

Report No: TESA2207000200ES Rev: 01 Page: 1 of 28

Appendix B - DAE & Probe Calibration Certificate

Calibration Laborator Cohmid & Partner Engineering AG eughausstrasse 43, 8004 Zuric		Hac-MRA	Schweizerischer Kalibrierdienst Service suisse d'étalonnage Servizio svizzero di taratura Swiss Calibration Service
accredited by the Swiss Accredita The Swiss Accreditation Servic Multilateral Agreement for the r	e is one of the signatories	to the EA	on No.: SCS 0108
CALIBRATION			No: DAE4-1665_Feb22
Dbject	DAE4 - SD 000 D		
Calibration procedure(s)	QA CAL-06.v30 Calibration procec	dure for the data acquisition ele	ectronics (DAE)
Calibration date:	February 28, 2022	2	
The measurements and the unc	ertainties with confidence pro	nal standards, which realize the physical u obability are given on the following pages in facility: environment temperature (22 \pm 3)	and are part of the certificate.
The measurements and the unco NI calibrations have been condu Calibration Equipment used (M8	ertainties with confidence pro	obability are given on the following pages a	and are part of the certificate.
The measurements and the unc All calibrations have been condu Calibration Equipment used (M8 Primary Standards	ertainties with confidence pro ucted in the closed laboratory TE critical for calibration)	obability are given on the following pages i facility: environment temperature (22 \pm 3)	and are part of the certificate.)°C and humidity < 70%.
The measurements and the unc All calibrations have been condu Calibration Equipment used (M8 Primary Standards Keithley Multimeter Type 2001	ertainties with confidence pro- incted in the closed laboratory TE critical for calibration)	bability are given on the following pages of facility: environment temperature (22 ± 3) Cal Date (Certificate No.)	and are part of the certificate.)°C and humidity < 70%. Scheduled Calibration
The measurements and the unc	ertainties with confidence pro- cited in the closed laboratory (TE critical for calibration) ID # SN: 0810278 ID # SE UWS 053 AA 1001	Date (Certificate No.) 31-Aug-21 (No:31368) Check Date (in house)	and are part of the certificate.)°C and humidity < 70%. <u>Scheduled Calibration</u> Aug-22
The measurements and the unc All calibrations have been condu Calibration Equipment used (M8 Primary Standards Keithley Multimeter Type 2001 Secondary Standards Auto DAE Calibration Unit Calibrator Box V2.1	ertainties with confidence pro- cited in the closed laboratory (TE critical for calibration) ID # SN: 0810278 ID # SE UWS 053 AA 1001	babbility are given on the following pages if facility: environment temperature (22 ± 3) Cal Date (Certificate No.) 31-Aug-21 (No:31368) Check Date (in house) 24-Jan-22 (in house check)	and are part of the certificate.)°C and humidity < 70%. Scheduled Calibration Aug-22 Scheduled Check In house check: Jan-23
The measurements and the unclusted with the unclusted of	ertainties with confidence pro- acted in the closed laboratory (TE critical for calibration) ID # SN: 0810278 ID # SE UWS 053 AA 1001 SE UMS 006 AA 1002	babbility are given on the following pages is facility: environment temperature (22 ± 3) Cal Date (Certificate No.) 31-Aug-21 (No:31368) Check Date (in house) 24-Jan-22 (in house check) 24-Jan-22 (in house check) Function	and are part of the certificate. y°C and humidity < 70%. Scheduled Calibration Aug-22 Scheduled Check In house check: Jan-23 In house check: Jan-23
The measurements and the unc All calibrations have been condu Calibration Equipment used (M8 Primary Standards Keithley Multimeter Type 2001 Secondary Standards Auto DAE Calibration Unit	ertainties with confidence pro- acted in the closed laboratory (TE critical for calibration) ID # SN: 0810278 ID # SE UWS 053 AA 1001 SE UMS 006 AA 1002	babbility are given on the following pages is facility: environment temperature (22 ± 3) Cal Date (Certificate No.) 31-Aug-21 (No:31368) Check Date (in house) 24-Jan-22 (in house check) 24-Jan-22 (in house check) Function	and are part of the certificate. y°C and humidity < 70%. Scheduled Calibration Aug-22 Scheduled Check In house check: Jan-23 In house check: Jan-23
The measurements and the unclear All calibrations have been condu- Calibration Equipment used (M8 Primary Standards Keithley Multimeter Type 2001 Secondary Standards Auto DAE Calibration Unit Calibrator Box V2.1	ertainties with confidence pro- acted in the closed laboratory TE critical for calibration) ID # SN: 0810278 ID # SE UWS 053 AA 1001 SE UMS 006 AA 1002	Cal Date (Certificate No.) 31-Aug-21 (No:31368) Check Date (in house) 24-Jan-22 (in house check) 24-Jan-22 (in house check) Exponentiation Laboratory Technician	and are part of the certificate.)°C and humidity < 70%. Scheduled Calibration Aug-22 Scheduled Check In house check: Jan-23 In house check: Jan-23 Signature J.V.R. Www Issued: February 28, 2022

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report reter only to the sample(s) lested and such sample(s) are retained to 90 days only. Mir#JSfabity i, Lt&Bateger and the company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fulleest extent of the law. prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279 台灣檢驗科技股份有限公司

f (886-2) 2298-0488

www.sqs.com.tw



Report No: TESA2207000200ES Rev: 01 Page: 2 of 28

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





Schweizerischer Kalibrierdienst Service suisse d'étalonnage Servizio svizzero di taratura Swiss Calibration Service

Accreditation No.: SCS 0108

S

C

S

Accredited by the Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Glossary

DAE Connector angle

data acquisition electronics information used in DASY system to align probe sensor X to the robot coordinate system.

Methods Applied and Interpretation of Parameters

- DC Voltage Measurement: Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- Connector angle: The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
 - DC Voltage Measurement Linearity: Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
 - Common mode sensitivity: Influence of a positive or negative common mode voltage on the differential measurement.
 - Channel separation: Influence of a voltage on the neighbor channels not subject to an input voltage.
 - AD Converter Values with inputs shorted: Values on the internal AD converter corresponding to zero input voltage
 - Input Offset Measurement: Output voltage and statistical results over a large number of zero voltage measurements.
 - Input Offset Current: Typical value for information; Maximum channel input offset current, not considering the input resistance.
 - Input resistance: Typical value for information: DAE input resistance at the connector, during internal auto-zeroing and during measurement.
 - Low Battery Alarm Voltage: Typical value for information. Below this voltage, a battery alarm signal is generated.
 - Power consumption: Typical value for information. Supply currents in various operating modes.

Certificate No: DAE4-1665_Feb22

Page 2 of 5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279 台灣檢驗科技股份有限公司

f (886-2) 2298-0488

www.sqs.com.tw



DC Voltage Measurement

High Range:	1LSB =	6.1µV,	full range =	-100+300 mV
Low Range:	1LSB =	61nV ,	full range =	-1+3mV
DASY measurement	parameters: Aut	to Zero Time: 3	sec; Measuring	time: 3 sec

Calibration Factors	Х	Y	Z
High Range	404.538 ± 0.02% (k=2)	404.846 ± 0.02% (k=2)	404.799 ± 0.02% (k=2)
Low Range	3.97984 ± 1.50% (k=2)	4.00706 ± 1.50% (k=2)	3.97892 ± 1.50% (k=2)

Connector Angle

Connector Angle to be used in DASY system	67.5 ° ± 1 °
Connector rangie to be dece at price of the	

Certificate No: DAE4-1665_Feb22

Page 3 of 5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責、同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279 台灣檢驗科技股份有限公司

f (886-2) 2298-0488

www.sgs.com.tw



Appendix (Additional assessments outside the scope of SCS0108)

1. DC Voltage Linearity

High Range	Reading (µV)	Difference (µV)	Error (%)
Channel X + Input	199994.01	0.74	0.00
Channel X + Input	20001.99	0.13	0.00
Channel X - Input	-20001.31	0.21	-0.00
Channel Y + Input	199989.61	-3.62	-0.00
Channel Y + Input	20000.37	-1.46	-0.01
Channel Y - Input	-20002.22	-0.64	0.00
Channel Z + Input	199995.34	2.10	0.00
Channel Z + Input	19997.55	-4.30	-0.02
Channel Z - Input	-20003.98	-2.43	0.01

Low Range	Reading (µV)	Difference (µV)	Error (%)
Channel X + Input	2000.61	-0.18	-0.01
Channel X + Input	201.51	0.25	0.13
Channel X - Input	-198.43	-0.05	0.02
Channel Y + Input	2001.19	0.29	0.01
Channel Y + Input	200.89	-0.45	-0.22
Channel Y - Input	-198.94	-0.49	0.24
Channel Z + Input	2000.93	0.12	0.01
Channel Z + Input	199.86	-1.37	-0.68
Channel Z - Input	-199.91	-1.34	0.68

2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Common mode Input Voltage (mV)	High Range Average Reading (µV)	Low Range Average Reading (μV)
Channel X	200	-2.56	-4.08
1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1	- 200	5.04	3.18
Channel Y	200	1.55	0.85
	- 200	-2.56	-2.50
Channel Z	200	-14.89	-14.80
	- 200	13.36	12.52

3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Input Voltage (mV)	Channel X (µV)	Channel Y (µV)	Channel Z (µV)
Channel X	200		0.23	-2.92
Channel Y	200	4.73		1.35
Channel Z	200	8.05	2.29	

Certificate No: DAE4-1665 Feb22

Page 4 of 5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責、同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents issued by the Company subject to its General Conductors and every printed overlear, available on request of accessible at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279 台灣檢驗科技股份有限公司

f (886-2) 2298-0488

```
www.sgs.com.tw
```



AD-Converter Values with inputs shorted

	High Range (LSB)	Low Range (LSB)
Channel X	16097	16090
Channel Y	16137	13762
Channel Z	16309	15672

5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec Input 10MΩ

	Average (µV)	min. Offset (µV)	max. Offset (μV)	Std. Deviation (µV)
Channel X	0.70	-0.02	1.57	0.30
Channel Y	-0.24	-1.38	0.80	0.42
Channel Z	-0.59	-1.93	0.05	0.35

6. Input Offset Current

Nominal Input circuitry offset current on all channels: <25fA

7. Input Resistance (Typical values for information)

dan se se se se	Zeroing (kOhm)	Measuring (MOhm)
Channel X	200	200
Channel Y	200	200
Channel Z	200	200

8. Low Battery Alarm Voltage (Typical values for information)

Typical values	Alarm Level (VDC)
Supply (+ Vcc)	+7.9
Supply (- Vcc)	-7.6

9. Power Consumption (Typical values for information)

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Vcc)	+0.01	+6	+14
Supply (- Vcc)	-0.01	-8	-9

Certificate No: DAE4-1665 Feb22

Page 5 of 5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279 台灣檢驗科技股份有限公司

f (886-2) 2298-0488

www.sgs.com.tw



Report No: TESA2207000200ES Rev: 01 Page: 6 of 28

ughausstrasse 43, 8004 Zur	rich, Switzerland	HAC MEA	Service suisse d'étalonnage Servizio svizzero di taratura Swiss Calibration Service
ccredited by the Swiss Accredi he Swiss Accreditation Servi Jultilateral Agreement for the	ice is one of the signatories	to the EA	reditation No.: SCS 0108
lient SGS-TW (Auc			EX3-7686_Oct21
CALIBRATION	CERTIFICATE		
Dbject	EX3DV4 - SN:768	6	
Calibration procedure(s)		A CAL-14.v6, QA CAL-23.v5, QA ure for dosimetric E-field probes	CAL-25.v7
Calibration date:	October 05, 2021		
This calibration certificate docu			
The measurements and the uno	certainties with confidence pro lucted in the closed laboratory	ai standards, which realize the physical units bability are given on the following pages and a facility: environment temperature $(22 \pm 3)^{\circ}C$ a	are part of the certificate.
The measurements and the und All calibrations have been cond Calibration Equipment used (M	certainties with confidence pro lucted in the closed laboratory &TE critical for calibration)	bability are given on the following pages and a facility: environment temperature (22 \pm 3)°C a	are part of the certificate.
The measurements and the und All calibrations have been cond Calibration Equipment used (M Primary Standards	certainties with confidence pro lucted in the closed laboratory &TE critical for calibration)	bability are given on the following pages and a facility: environment temperature (22 ± 3)°C a Cal Date (Certificate No.)	are part of the certificate. and humidity < 70%. Scheduled Calibration
The measurements and the une all calibrations have been cond Calibration Equipment used (M Primary Standards Power meter NRP	certainties with confidence pro lucted in the closed laboratory &TE critical for calibration)	bability are given on the following pages and a facility: environment temperature (22 ± 3)°C a Cal Date (Certificate No.) 08-Apr-21 (No. 217-03291/03262)	are part of the certificate. and humidity < 70%. Scheduled Calibration Apr.21
The measurements and the unc All calibrations have been cond Calibration Equipment used (M Primary Standards Prower meter NRP Prower sensor NRP-291	entainties with confidence pro lucted in the closed laboratory &TE critical for calibration) ID SN: 104778	bability are given on the following pages and it facility: environment temperature (22 ± 3)°C a Cal Date (Certificate No.) 09-Apr-21 (No. 217-03291/03292) 09-Apr-21 (No. 217-03291)	are part of the certificate. Ind humidity < 70%. Scheduled Calibration Apr.21 Apr.21
The measurements and the unc All calibrations have been cond Calibration Equipment used (M Primary Standards Power meter NRP Power sensor NRP-291 Power sensor NRP-291	ertainties with confidence pro locted in the closed laboratory &TE critical for calibration) ID SN: 104778 SN: 103244	bability are given on the following pages and it facility: environment temperature (22 ± 3)°C at Cal Date (Certificate No.) 09-Apr-21 (No. 217-03291) 09-Apr-21 (No. 217-03291) 09-Apr-21 (No. 217-03292)	are part of the certificate. Ind humidity < 70%. Scheduled Calibration Apr.21 Apr.21 Apr.21
The measurements and the unc NI calibration Equipment used (M Primary Standards Power meter NRP Power sensor NRP-291 Power sensor NRP-291 Power sensor NRP-291	ertainties with confidence pro lucted in the closed laboratory &TE critical for calibration) ID SN: 104778 SN: 103244 SN: 103245	bability are given on the following pages and it facility: environment temperature (22 ± 3)°C a Cal Date (Certificate No.) 09-Apr-21 (No. 217-03291/03292) 09-Apr-21 (No. 217-03291)	are part of the certificate. Ind humidity < 70%. Scheduled Calibration Apr.21 Apr.21
The measurements and the unit All calibrations have been cond Calibration Equipment used (M Primary Standards Power markor NRP-291 Power sensor NRP-291 Power sensor NRP-291 Power sensor NRP-291 Power Sensor NRP-291 Code 20 dB Attenuator DAE4	ertainties with confidence pro lucted in the closed laboratory &TE critical for calibration) ID SN: 104778 SN: 104778 SN: 103244 SN: 103245 SN: 202562 (20x)	Cal Date (Certificate No.) 08-Apr-21 (No. 217-03291) 08-Apr-21 (No. 217-03291) 08-Apr-21 (No. 217-03291) 08-Apr-21 (No. 217-03291) 08-Apr-21 (No. 217-03293)	are part of the certificate. ind humidity < 70%.
The measurements and the unit All calibrations have been cond Calibration Equipment used (M Primary Silandards Prover sinsor NRP-291 Prover sensor NRP-291 Prover sensor NRP-291 Prover sensor NRP-291 Reference 20 dB Attenuator ORE4 Reference Probe ES3DV2	extainlies with confidence pro ucted in the closed laboratory &TE critical for calibration) ID SN: 104778 SN: 10244 SN: 10244 SN: 102452 (20x) SN: 202552 (20x) SN: 660	Cal Date (Certificate No.) Cal Date (Certificate No.) 09-Apr-21 (No. 217-03291/03252) 09-Apr-21 (No. 217-03291) 09-Apr-21 (No. 217-03291) 09-Apr-21 (No. 217-03292) 09-Apr-21 (No. 217-03292) 09-Apr-20 (No. 217-03292) 09-Apr-21 (No. 217-03292)	are part of the certificate. Ind humidity < 70%. Scheduled Calibration Apr.21 Apr.21 Apr.21 Apr.21 Dec.21 Dec.21
The measurements and the uno- VII calibrations have been cond- calibration Equipment used (M Primary Standards Power motor NRP Power sensor NRP-291 Power sensor NRP-291 Reference 20 dB Attenuator DRAE Reference Probe ES3DV2 Secondary Standards	activities with confidence provided in the closed laboratory ATE critical for calibration) ID SN: 104778 SN: 10244 SN: 10244 SN: 02244 SN: 02245 SN: 02245 SN: 02245 SN: 02351	Cal Date (Certificate No.) Cal Date (Certificate No.) 09-Apr-21 (No. 277-03291/03292) 09-Apr-21 (No. 277-03291) 09-Apr-21 (No. 277-03291) 09-Apr-22 (No. 277-03293)	are part of the certificate. ind humidity < 70%.
The measurements and the unit VII calibrations have been cond Calibration Equipment used (M Primary Slandards Power motor NRP-291 Power sensor NRP-291 Power sensor NRP-291 Power sensor NRP-291 Reference 20 dB Attenuator DAEA Reference Probe ES3DV2 Secondary Standards Power mater E4198.	ID SN: 10244 SN: 10244 SN: 10245 SN: 0245 SN: 0245 SN: 0246 SN: 0246 SN: 0245 SN: 680 SN: 0313 ID	Cal Date (Vertificate No.) Cal Date (Certificate No.) 09-Apr-21 (No. 217-03291/03292) 09-Apr-21 (No. 217-03291) 09-Apr-21 (No. 217-03292)	are part of the certificate. In humidity < 70%. Scheduled Calibration Apr.21 Apr.21 Apr.21 Apr.21 Apr.21 Dec.21 Dec.21 Dec.21 Scheduled Check
The measurements and the unc All calibrations have been cond Calibration Equipment used (M Primary Standards Power mater NRP Power sensor NRP-231 Power sensor NRP-231 Reference 20 dB Attenuator DAE4 Reference Probe ES3DV2 Secondary Standards Power mater E41438. Power sensor E412A	aetainlies with confidence provided in the closed laboratory &TE critical for calibration) ID SN: 104778 SN: 103246 SN: 03244 SN: 05245 SN: 05246 SN: 03244 SN: 03245 SN: 03246 SN: 03246 SN: 03246 SN: 03246 SN: 03246 SN: 03247 SN: 041203874	Cal Date (Certificate No.) Od-Apr-21 (No. 217-03291/03292) 09-Apr-21 (No. 217-03291/03292) 09-Apr-21 (No. 217-03291) 09-Apr-21 (No. 217-03291) 09-Apr-21 (No. 217-03292) 09-Apr-10 (No. 201-002) Check Date (In house) 06-Apr-16 (In house check Jun-20)	are part of the certificate. Ind humidity < 70%. Scheduled Calibration Apr:21 Apr:21 Apr:21 Dec:21 Dec:21 Dec:21 Dec:21 Scheduled Check In house check: Jun-22
The measurements and the unit All calibrations have been cond Calibration Equipment used (M Primary Standards Power sensor NRP-291 Power sensor NRP-291 Power sensor NRP-291 Power sensor NRP-291 Reference 20 dB Attenuator OAE4 Reference 20 dB Attenuator OAE5 Secondary Standards Power sensor E4128 Power sensor E4128 Power sensor E4128 Power sensor E4128 Power sensor E4128	extainlies with confidence pro worked in the closed laboratory &TE oritical for calibration) 10 SN: 104778 SN: 10244 SN: 10244 SN: 10244 SN: 10244 SN: 20242 SN: 2024 SN: 2001 ID ID ID SN: 2041293874 SN: WY41499087 SN: WY41499087 SN: 000110210 SN: 000110210	Cal Date (Certificate No.) Cal Date (Certificate No.) 08-4pr-21 (No. 217-03291/03262) 09-4pr-21 (No. 217-03291) 09-4pr-21 (No. 217-03291) 09-4pr-21 (No. 217-03291) 09-4pr-21 (No. 217-03291) 09-4pr-21 (No. 217-03292) 09-4pr-16 (in house check Jun-20) 06-4pr-16 (in house check Jun-20) 08-4pr-16 (in house check Jun-20) 08-4pr-16 (in house check Jun-20) 08-4pr-16 (in house check Jun-20)	are part of the certificate. In humidity < 70%. Scheduled Calibration Apr.21 Apr.21 Apr.21 Dec.21 Dec.21 Dec.21 Dec.21 In house check: Jun-22 In house check: Jun-22 In house check: Jun-22
The measurements and the uno	aetainlies with confidence provided in the closed laboratory BTE critical for calibration) ID SN: 104778 SN: 103244 SN: 103245 SN: 20255 (20x) SN: 3013 ID SN: 0281293874 SN: 041293874 SN: 041498087 SN: 0410210210	bability are given on the following pages and it facility: environment temperature (22 ± 3)°C a Cal Date (Certificate No.) 08-Apr-21 (No. 217-03281/03282) 09-Apr-21 (No. 217-03281) 09-Apr-21 (No. 217-03282) 09-Apr-16 (In house check Jun-20) 06-Apr-16 (In house check Jun-20) 08-Apr-16 (In house check Jun-20) 08-Apr-16 (In house check Jun-20)	are part of the certificate. Ind humidity < 70%. Schoduled Calibration Apr:21 Apr:21 Apr:21 Apr:21 Dec:21 Dec:21 Dec:21 Scheduled Check In house check: Jun:22 In house check: Jun:22
The measurements and the unit All calibrations have been cond Calibration Equipment used (M Primary Standards Power sensor NRP-291 Power sensor NRP-291 Power sensor NRP-291 Power sensor NRP-291 Reference 20 dB Attenuator OAE4 Reference 20 dB Attenuator OAE5 Secondary Standards Power sensor E4128 Power sensor E4128 Power sensor E4128 Power sensor E4128 Power sensor E4128	extainlies with confidence pro worked in the closed laboratory &TE oritical for calibration) 10 SN: 104778 SN: 10244 SN: 10244 SN: 10244 SN: 10244 SN: 20242 SN: 2024 SN: 2001 ID ID ID SN: 2041293874 SN: WY41499087 SN: WY41499087 SN: 000110210 SN: 000110210	Cal Date (Certificate No.) Cal Date (Certificate No.) 08-4pr-21 (No. 217-03291/03262) 09-4pr-21 (No. 217-03291) 09-4pr-21 (No. 217-03291) 09-4pr-21 (No. 217-03291) 09-4pr-21 (No. 217-03291) 09-4pr-21 (No. 217-03292) 09-4pr-16 (in house check Jun-20) 06-4pr-16 (in house check Jun-20) 08-4pr-16 (in house check Jun-20) 08-4pr-16 (in house check Jun-20) 08-4pr-16 (in house check Jun-20)	are part of the certificate. In humidity < 70%. Scheduled Calibration Apr.21 Apr.21 Apr.21 Dec.21 Dec.21 Dec.21 Dec.21 In house check: Jun-22 In house check: Jun-22 In house check: Jun-22
The measurements and the uno- All calibrations have been cond Calibration Equipment used (M Primary Slandards Power moter NRP Power sensor NRP-291 Power sensor NRP-291 Reference Probe ES3DV2 Secondary Slandards Power sensor E4412A Power sensor E4412A Power sensor E4412A RF generator HP 8648C. RF generator HP 8648C.	artianilies with confidence provuled in the closed laboratory NTE critical for calibration) ID SN: 104778 SN: 102244 SN: 102245 SN: 02245 SN: 02493874 SN: 000110210 SN: 000110210 SN: 0001102100 SN: 00010210700 SN: 00010210700 SN: 000102100 SN: 000102100 SN: 000102100 SN: 000102100	Cal Date (Vertificate No.) Cal Date (Certificate No.) 09-Apr-21 (No. 217-03291/03/92) 09-Apr-21 (No. 217-03291/03/92) 09-Apr-21 (No. 217-03291) 09-Apr-21 (No. 217-03292) 09-Apr-16 (In house 200) 00-Apr-16 (In house check Jun-20) 09-Apr-16 (In house ch	are part of the certificate. In drumidity < 70%. Scheduled Calibration Apr-21 Apr-21 Apr-21 Dec-21 Dec-21 Dec-21 In house check: Jun-22 In house check: Jun-22

Certificate No: EX3-7686_Oct21

Page 1 of 23

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

Unless otherwise stated the results shown in this test report reter only to the sample(s) lested and such sample(s) are retained to 90 days only. Mir#JSfabity i, Lt&Bateger and the company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fulleest extent of the law. prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488



Report No: TESA2207000200ES Rev: 01 Page: 7 of 28

Calibration Laboratory of Schmid & Partne Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland



Schweizerischer Kalibrierdie Service suisse d'étaionnage Servizio svizzero di taratura Swiss Calibration Service S C s

Accreditation No.: SCS 0108

credited by the Swiss Accreditation Service (SAS) e Swiss Accreditation Service is one of the signatories to the EA utiliateral Agreement for the recognition of calibration cartificates

Glossary:	
TSL	tissue simulating liquid
NORMx,y,z	sensitivity in free space
ConvF	sensitivity in TSL / NORMx.v.z
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization ϕ	ip rotation around probe axis
Polarization 8	9 rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., 9 = 0 is normal to probe axis
- I be a second of the second be	

Connector Angle information used in DASY system to align probe sensor X to the robot coordinate system

- Calibration is Performed According to the Following Standards: a) IEC/IEEE 52209-1528. "Measurement Procedure For The Assessment Of Specific Absorption Rate Of Human Exposure To Radio Frequency Fields From Hand-Held And Body-Wom Wireless Communication Devices -Part 1528: Human Models, Instrumentation And Procedures (Frequency Range of 4 MHz to 10 GHz)", October Devices Devices
 - b) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"
- Methods Applied and Interpretation of Parameters:
 - ods Applied and Interpretation of Parameters: NORMX, yz, assessed for Efield polarization § = 0 (4 \$ 900 MHz in TEM-cell; 1 > 1800 MHz; R22 waveguide). NORMX, yz are only intermediate values, i.e., the uncertainties of NORMx, yz does not affect the E³-field uncertainty inside TSL (see below *ConVF*). NORM(*I*), *x*₁ = *NORM*, *x*₁, *z* * *frequency_response* (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConVF*. *DCPX*, *yz*: *DCP* are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media. *PAR*: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal

 - ÷. .
 - .
 - ÷.
 - PAR: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics Axy,z; Bxy,z; Cxy,z; Vxy,z; Vxy,z; A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode. *ConvF* and Boundary Effect Parameters: Assessed in Rat phantom using E-field (or Temperature Transfer Standard for 1 ≤ 800 MHz) and inside waveguide using analytical field distributions based on power measurements for 1 ≈ 800 MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORMky,z; * ConvF whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConVF* is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz. Spherical isotropy (3D deviation from isotropy): in a field of low gradients realized using a flat phantom exposed by a patch antenna. *Sensor Offset*: The sensor offset corresponds to the given by a patch antenna. *Connector Angle*: The angle is assessed using the information gained by determining the *NORMx* (no uncertainty required).
 - ÷
 - × .

Certificate No: EX3-7686 Oct21

Page 2 of 23

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

www.sqs.com.tw



Report No: TESA2207000200ES Rev: 01 Page: 8 of 28

EX3DV4 - SN-7688

October 05, 2021

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7686

		Senso	r X		Sens	or Y	111	Sensor Z	2-10.0	Unc (k=2	
Norm (u)	//(V/m) ²) ^A	0.69	3		0.6	5		0.53		± 10.1 %	
DCP (m)	/) ^B	101.	7		100	.2		101.2			
alibrat	ion Results for M	Indulation	Bee								
UID	Communication Sys		nes	A dB	B dBõV	c	D dB	VR mV	Max dev.	Max Unc ^e (k=2)	
0	CW		X	0.00	0.00	1.00	0.00	139.9	± 3.5 %	± 4.7 %	
			Y	0.00	0.00	1.00		144.6	1		
			Z	0.00	0.00	1.00		148.7			
10352-	Pulse Waveform (200	0Hz, 10%)	X	1.41	60.22	6.16	10.00	60.0	± 2.5 %	± 9.6 %	
AAA			Y	1.60	61.17	6.74		60.0			
			Z	1.47	60.50	6,36		60.0			
10353-	Pulse Waveform (200	OHz, 20%)	X	0.80	60.00	4.94	6.99	80.0	±2.2% ±9.6%		
AAA	a second contraction		Y	22.00	78.00	11.00		80.0	1		
			Z	0.77	60.00	4.91		80.0			
10354-	Pulse Waveform (200	0Hz, 40%)	X	0.05	124.90	0.21	3.98	95.0	±2.6 %	± 2.6 % ± 9.6 %	
AAA	a and analysis in the		Y	8.00	70.00	7.00		95.0		± 9.0 %	
			Z	0.01	122.46	0.50		95.0		1.1.1.1	
10355-	Pulse Waveform (200	0Hz, 60%)	X	9.66	156.50	22.91	2.22	120.0	±1.6 %	± 9.6 %	
AAA			Y	11.16	134.19	3.73		120.0			
	Contraction of the		Z	8.10	158.58	27.75		120.0			
10387-	QPSK Waveform, 1 M	ИНz	X	0.60	62.96	11.89	1.00	150.0	± 3.8 %	± 9.6 %	
AAA	1 - 1		Y	0.80	66.90	14.35		150.0	a later be		
			Z	0.70	65.20	13.33		150.0		10.00	
10388-	QPSK Waveform, 10	MHz	X	1.35	64.80	13.58	0.00	150.0	±1.3 %	± 9.6 %	
AAA			Ý	1.55	67.01	14.95		150.0			
	No. of Concession, Name		Z	1.47	66.19	14.43		150.0	t		
10396-	64-QAM Waveform,	100 kHz	_X	1.55	62.90	15.19	3.01	150.0	±1.7%	± 9.6 %	
AAA			Y	1.55	63.22	15.60		150.0	1.1.1		
			Z	1.65	63.86	15.63		150.0			
10399-	64-QAM Waveform,	40 MHz	X	2.83	65.68	14.83	0.00	150.0	±1.5%	± 9.6 %	
AAA	1		Y	2.98	66.59	15.44		150.0			
			Z	2.94	66.30	15.26		150.0			
10414-	WLAN CCDF, 64-QA	M, 40MHz	X	4.06	66,18	15,45	0.00	150.0	±2.8 %	± 9.6 %	
AAA	1002000-0001		Y	4.00	66.01	15.49		150.0		10.00	
			Z	3.97	65.86	15.39		150.0			

Note: For details on UID parameters see Appendix

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

⁴ The uncertainlies of Norm X,Y,Z do not affect the E⁴-field uncertainty inside TSL (see Pages 5 and 6). Numerical linearization parameter: uncertainty not required. Uncertainty and the second second

Certificate No: EX3-7686_Oct21

Page 3 of 23

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

Unless otherwise stated the results shown in this test report reterior only to the sample(s) reside and such sample(s) are relative to so days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com.tw/Terms-and-Conditions</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u> and for electronic format defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488

www.sgs.com.tw



EX3DV4- SN:7686

October 05, 2021

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7686

	C1 fF	C2 fF	α V-1	T1 ms.V ⁻²	T2 ms.V ⁻¹	T3 ms	T4 V ⁻²	T5 V-1	T6
X	11.7	85.69	34.21	3.35	0.00	4.90	0.12	0.00	1.00
Y	11.7	85.51	34.20	3.27	0.00	4.90	0.00	0.00	1.00
Z	11.5	85.16	34.91	1.66	0.00	4.90	0.38	0.00	1.00

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	-57.9
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm

Note: Measurement distance from surface can be increased to 3-4 mm for an Area Scan job.

Certificate No: EX3-7686 Oct21

Page 4 of 23

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

www.sgs.com.tw



Report No: TESA2207000200ES Rev: 01 Page: 10 of 28

EX3DV4-SN:7686

October 05, 2021

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7686

Calibration	Parameter	Determined in	Head	Tissue	Simulating	Media	
	Datative	Constructivity		-	1		-

f (MHz) ^c	Relative Permittivity ^F	Conductivity (S/m)	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k=2)
750	41.9	0.89	10.73	10.73	10.73	0.47	0.80	± 12.0 %
835	41.5	0.90	10.36	10.36	10.36	0.49	0.80	± 12.0 %
900	41.5	0.97	10.09	10.09	10.09	0.41	0.90	± 12.0 %
1450	40.5	1.20	9.37	9.37	9.37	0.38	0.80	± 12.0 %
1750	40.1	1.37	9.16	9.16	9.16	0.39	0.86	± 12.0 %
1900	40.0	1.40	8.83	8.83	8.83	0.30	0.86	± 12.0 %
2000	40.0	1.40	8.73	8.73	8.73	0.29	0.86	± 12.0 %
2300	39.5	1.67	8.55	8.55	8.55	0.34	0.90	± 12.0 %
2450	39.2	1.80	8.32	8.32	8.32	0.31	0.90	± 12.0 %
2600	39.0	1.96	8.02	8.02	8.02	0.27	1.00	± 12.0 %
3300	38.2	2.71	7.40	7.40	7.40	0.30	1.35	± 13.1 %
3500	37.9	2.91	7.35	7.35	7.35	0.30	1.35	± 13.1 9
3700	37.7	3.12	7.25	7.25	7.25	0.30	1.35	± 13.1 %
3900	37.5	3.32	6.90	6.90	6.90	0.40	1.60	± 13.1 %
4100	37.2	3.53	6.78	6.78	6.78	0.40	1.60	± 13.1 %
4200	37.1	3.63	6.45	6.45	6.45	0.40	1.70	± 13,1 %
4400	36.9	3.84	6.39	6.39	6.39	0.40	1.70	± 13.1 %
4600	36.7	4.04	6.38	6.38	6.38	0.40	1.70	± 13.1 %
4800	36.4	4.25	6.32	6.32	6.32	0.40	1.80	± 13.1 %
4950	36.3	4.40	6.29	6.29	6.29	0.40	1.80	± 13.1 %
5250	35.9	4.71	5.81	5.81	5.81	0.40	1.80	± 13.1 %
5600	35.5	5.07	5.16	5,16	5.16	0.40	1.80	± 13.1 %
5750	35.4	5.22	5.30	5.30	5.30	0.40	1.80	± 13.1 %

Increasing reasons and more as to unrear unry appreter tor LASY 94. and righter (see Page 2), else it is restricted to ± 50 MHz. The unortainty is the RSS of the ComV- increasing a statistication frequency and the unortainty for the indicated trequency band. Frequency validly below 300 MHz is ± 10, 25, 40, 60 and 70 MHz for ComV- assessments at 30, 64, 123, 150 and 220 MHz respectively. Validly of ComV- assessed at 8 MHz is 4.4 MHz, and ComV- assessed at 13 MHz is 0.4 MHz. Above 50 for frequency obtained to ± 110 MHz. * At frequencies below 3 GHz, the validly of issue parameters (and c) can be relaxed to ± 10% if liquid compensation frequency is * Mark tequencies below 3 GHz, the validly of issue parameters (and c) can be relaxed to ± 10%. If liquid compensation frequency measured SAX values. At frequencies above 3 GHz, the validly of issue parameters (and c) on the relaxed to ± 5%. The unortainity is the RSS of the ComV- unortainity for indicated larget issue parameters.

Certificate No: EX3-7686 Oct21

Page 5 of 23

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

Unless other was baled une solute of the state and the state report refer only to the sample(s) lessed and state and provide the sample(s) lessed and state prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488



Report No: TESA2207000200ES Rev: 01 Page: 11 of 28

EX3DV4-SN:7686

October 05, 2021

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7686

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^c	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k=2)
6500	34.5	6.07	6.20	6.20	6.20	0.20	2.50	± 18.6 %
7000	33.9	6.65	6.14	6.14	6.14	0.25	2.50	± 18.6 %
8000	32.7	7.84	6.08	6.08	6.08	0.50	1.50	± 18.6 %
9000	31.5	9.08	5.95	5.95	5.95	0,50	1.70	± 18.6 %

⁶ Frequency validity above 6GHz is ± 700 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.
⁷ All requencies 60 GHz, the validity of (issue parameters (*a* and *a*) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. The uncertainty is the RSS of the ConvF uncertainty for indicated target issue parameters.
⁸ Alpha/Depth are determined during oblitation. SPEcAR warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz; below ± 2% for frequencies between 3-6 GHz; and below ± 4% for frequencies between 8-10 GHz at any distance larger than fall the probe tig diameter from the boundary.

Certificate No: EX3-7686 Oct21

Page 6 of 23

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責、同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488

www.sgs.com.tw




Report No: TESA2207000200ES Rev: 01 Page: 12 of 28

EX3DV4- SN:7686

October 05, 2021

Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

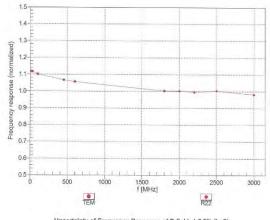

Uncertainty of Frequency Response of E-field: ± 6.3% (k=2)

Certificate No: EX3-7686 Oct21

Page 7 of 23

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號


t (886-2) 2299-3279 台灣檢驗科技股份有限公司

f (886-2) 2298-0488

www.sgs.com.tw



Report No: TESA2207000200ES Rev: 01 Page: 13 of 28

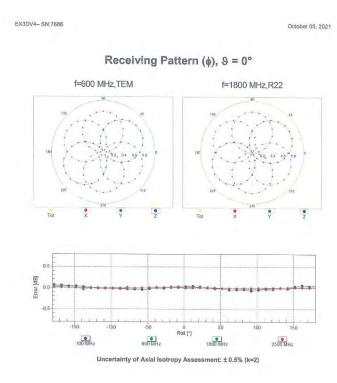

Certificate No: EX3-7686_Oct21

Page 8 of 23

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law


No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488

www.sgs.com.tw



Report No: TESA2207000200ES Rev: 01 Page: 14 of 28

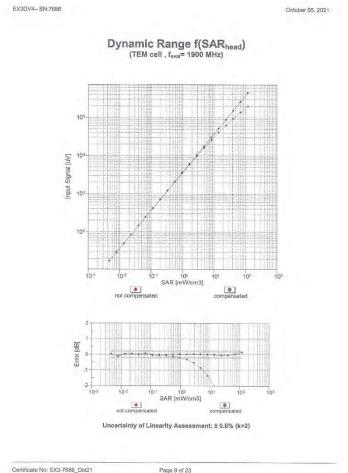

Page 9 of 23

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law


No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488

www.sgs.com.tw



Report No: TESA2207000200ES Rev: 01 Page: 15 of 28

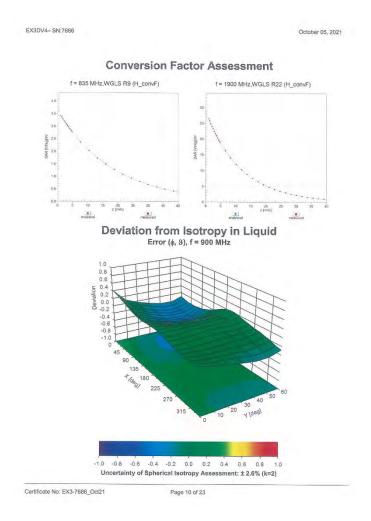

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

```
www.sgs.com.tw
```



Report No: TESA2207000200ES Rev: 01 Page: 16 of 28

		odulation Calibration Parameters			
UID	Rev	Communication System Name	Group	PAR (dB)	Unc (k=2
0	1	CW	CW	0.00	±4.7
10010	CAA	SAR Validation (Square, 100ms, 10ms)	Test	10.00	± 9.6
10011	CAB	UMTS-FDD (WCDMA)	WCDMA	2.91	± 9.6
10012	CAB	IEEE 802.11b WIFI 2.4 GHz (DSSS, 1 Mbps)	WLAN	1.87	± 9.6 °
10013	CAB	IEEE 802.11g WIFI 2.4 GHz (DSSS-OFDM, 6 Mbps)	WLAN	9.46	± 9.6 °
10021	DAC	GSM-FDD (TDMA, GMSK)	GSM	9.39	± 9.6 °
10023	DAC	GPRS-FDD (TDMA, GMSK, TN 0)	GSM	9.57	± 9.6 9
10024	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1)	GSM	6.56	± 9.6 9
10025	DAC	EDGE-FDD (TDMA, 8PSK, TN 0)	GSM	12.62	± 9.6 9
10026	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1)	GSM	9.55	± 9.6 9
10027	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2)	GSM	4.80	±9.65
10028	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)	GSM	3.55	± 9.6 9
10029	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2)	GSM	7.78	± 9.6 5
10030	CAA	IEEE 802.15.1 Bluetooth (GFSK, DH1)	Bluetooth	5.30	± 9.6
10031	CAA	IEEE 802.15.1 Bluetooth (GFSK, DH3)	Bluetooth	1.87	± 9.6 9
10032	CAA	IEEE 802.15.1 Bluetooth (GFSK, DH5)	Bluetooth	1.16	±9.6
10033	CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH1)	Bluetooth	7.74	± 9.6 9
10034	CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH3)	Bluetooth	4.53	± 9.6 9
10035	CAA	IEEE 802,15.1 Bluetooth (PI/4-DQPSK, DH5)	Bluetooth	3.83	± 9.6 9
10036	CAA	IEEE 802,15.1 Bluetooth (8-DPSK, DH1)	Bluetooth	8.01	± 9.6 5
10037	CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH3)	Bluetooth	4.77	± 9.6 9
10038	CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH5)	Bluetooth	4.10	± 9.6
10039	CAB	CDMA2000 (1xRTT, RC1)	CDMA2000	4.57	± 9.6 9
10042	CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Halfrate)	AMPS	7.78	± 9.6 5
10044	CAA	IS-91/EIA/TIA-553 FDD (FDMA, FM)	AMPS	0.00	± 9.6 9
10048	CAA	DECT (TDD, TDMAVFDM, GFSK, Full Slot, 24)	DECT	13.80	± 9.6 9
10049	CAA	DECT (TDD, TDMA/FDM, GFSK, Double Slot, 12)	DECT	10.79	± 9.6 9
10056	CAA	UMTS-TDD (TD-SCDMA, 1.28 Mcps)	TD-SCDMA	11.01	± 9.6 °
10058	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2-3)	GSM	6.52	± 9.6 °
10059	CAB	IEEE 802.11b WIFI 2.4 GHz (DSSS; 2 Mbps)	WLAN	2.12	±9.6 9
10060	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps)	WLAN	2.83	± 9.6 9
10061	CAB	IEEE 802,11b WiFi 2.4 GHz (DSSS, 11 Mbps)	WLAN	3.60	± 9.6 9
10062	CAD	IEEE 802.11a/h WIFI 5 GHz (OFDM, 6 Mbps)	WLAN	8.68	± 9.6
10063	CAD	IEEE 802.11a/h WIFI 5 GHz (OFDM, 9 Mbps)	WLAN	8.63	± 9.6 °
10064	CAD	IEEE 802,11a/h WIFI 5 GHz (OFDM, 12 Mbps)	WLAN	9.09	± 9.6 5
10065	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps)	WLAN	9.00	± 9.6 5
10066	CAD	IEEE 802.11a/h WIFI 5 GHz (OFDM, 24 Mbps)	WLAN	9.38	± 9.6 °
10067	CAD	IEEE 802.11a/h WIFI 5 GHz (OFDM, 36 Mbps)	WLAN	10.12	± 9.6 9
10068	GAD	IEEE 802,11a/h WiFi 5 GHz (OFDM, 48 Mbps)	WLAN	10.24	± 9.6 9
10069	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps)	WLAN	10.56	± 9.6 9
10071	CAB	IEEE 802.11g WiFI 2.4 GHz (DSSS/OFDM, 9 Mbps)	WLAN	9.83	± 9.6 9
10072	CAB	IEEE 802.11g WIFI 2.4 GHz (DSSS/OFDM, 12 Mbps)	WLAN	9.62	± 9.6 9
10073	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 18 Mbps)	WLAN	9.94	± 9.6 9
10074	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 24 Mbps)	WLAN	10.30	± 9.6 9
10075	CAB	IEEE 802.11g WIFI 2.4 GHz (DSSS/OFDM, 36 Mbps)	WLAN	10.77	± 9.6 9
10076	CAB	IEEE 802,11g WiFi 2.4 GHz (DSSS/OFDM, 48 Mbps)	WLAN	10.94	± 9.6 9
10077	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps)	WLAN	11.00	± 9.6 %
10081	CAB	CDMA2000 (1xRTT, RC3)	CDMA2000	3.97	± 9.6
10082	CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Fullrate)	AMPS	4.77	± 9.6 5
10090	DAC	GPRS-FDD (TDMA, GMSK, TN 0-4)	GSM	6.56	± 9.6
10097	CAB	UMTS-FDD (HSDPA)	WCDMA	3.98	± 9.6 °
10098	CAB	UMTS-FDD (HSUPA, Subtest 2)	WCDMA	3.98	± 9.6 5
10099	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-4)	GSM	9.55	± 9.6

Certificate No: EX3-7686 Oct21

Page 11 of 23

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

Unless otherwise stated the results shown in this test report reter only to the sample(s) lested and such sample(s) are retained to 90 days only. Mir#JSfabity i, Lt&Bateger and the company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fulleest extent of the law. prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488

```
www.sqs.com.tw
```



10100	CAE	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	LTE-FDD	1 5 67	1.00
10101	CAE	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)		5.67	± 9.6
10102	CAE	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 10-QAM)	LTE-FDD LTE-FDD	6.42	± 9.6
10102	CAG	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	LTE-FDD	6.60 9.29	± 9.6 ± 9.6
10104	CAG	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	LTE-TDD	9.29	-
10105	CAG	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	LTE-TDD	10.01	± 9.6 ± 9.6
10108	CAG	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	LTE-FDD	5.80	± 9.6
10109	CAG	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	LTE-FDD	6.43	± 9.6
10110	CAG	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	LTE-FDD	5.75	± 9.6
10111	CAG	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	LTE-FDD	6.44	± 9.6
10112	CAG	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	LTE-FDD	6.59	± 9.6
10113	CAG	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	LTE-FDD	6.62	± 9.6
10114	CAD	IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK)	WLAN	8.10	± 9.6
10115	CAD	IEEE 802.11n (HT Greenfield, 81 Mbps, 16-QAM)	WLAN	8.46	± 9.6
10116	CAD	IEEE 802.11n (HT Greenfield, 135 Mbps, 64-QAM)	WLAN	8.15	± 9.6
10117	CAD	IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)	WLAN	8.07	± 9.6
10118	CAD	IEEE 802.11n (HT Mixed, 81 Mbps, 16-QAM)	WLAN	8.59	± 9.6
10119	CAD	IEEE 802.11n (HT Mixed, 135 Mbps, 64-QAM)	WLAN	8.13	± 9.6
10140	CAE	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	LTE-FDD	6.49	± 9.6
10141	CAE	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	LTE-FDD	6.53	± 9.6
10142	CAE	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	LTE-FDD	5.73	± 9.6
10143	CAE	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	LTE-FDD	6.35	± 9.6
10144	CAE	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	LTE-FDD	6.65	± 9.6
10145	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	LTE-FDD	5.76	± 9.6
10146	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	LTE-FDD	6.41	± 9.6
10147	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	LTE-FDD	6.72	± 9.6
10149	CAE	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	LTE-FDD	6.42	± 9.6
10150	CAE	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	LTE-FDD	6.60	± 9.6
10151	CAG	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, OPSK)	LTE-TDD	9.28	± 9.6
10152	CAG	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	LTE-TDD	9.92	± 9.6
10153	CAG	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	LTE-TDD	10.05	± 9.6
10154	CAG	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	LTE-FDD	5.75	± 9.6
10155	CAG	LTE-FDD (SC-FDMA, 50% RB. 10 MHz, 16-QAM)	LTE-FDD	6.43	± 9.6
10156	CAG	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	LTE-FDD	5.79	± 9.6
10157	CAG	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	LTE-FDD	6.49	± 9.6
10158	CAG	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	LTE-FDD	6.62	± 9.6
10159	CAG	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	LTE-FDD	6.56	± 9.6
10160	CAE	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	LTE-FDD	5.82	± 9.6
10161	CAE	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	LTE-FDD	6.43	± 9.6
10162	CAE	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	LTE-FDD	6.58	± 9.6
10166	CAF	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	LTE-FDD	5.46	± 9.6
10167	CAF	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	LTE-FDD	6.21	± 9.6
10168	CAF	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	LTE-FDD	6.79	± 9.6
10169	CAE	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	LTE-FDD	5.73	± 9.6
10170	CAE	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	LTE-FDD	6.52	± 9.6
10171	AAE	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	LTE-FDD	6.49	± 9.6
10172	CAG	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	LTE-TDD	9.21	± 9.6
10173	CAG	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	LTE-TOD	9.48	± 9.6
10174	CAG	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	LTE-TDD	10.25	± 9.6
10175	CAG	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	LTE-FDD	5.72	± 9.6
10176	CAG	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	LTE-FDD	6.52	± 9.6
10177	CAI	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	LTE-FDD	5.73	± 9.6
10178	CAG	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	LTE-FDD	6.52	± 9.6
10179	CAG	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	LTE-FDD	6.50	± 9.6
10180	CAG	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	LTE-FDD	6.50	± 9.6
10181	CAE	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	LTE-FDD	5.73	± 9.6

Page 12 of 23

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

Unless otherwise stated the results shown in this test report reter only to the sample(s) lested and such sample(s) are retained to 90 days only. Mir#JSfabity i, Lt&Bateger and the company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fulleest extent of the law. prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488

www.sgs.com.tw



Report No: TESA2207000200ES Rev: 01 Page: 18 of 28

1.00	0.00	LTE-FDD	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	CAE	10182
± 9.6	6.52	LTE-FDD	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	AAD	10183
± 9.6	6.50	LTE-FDD	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	CAE	10184
± 9.6	5.73	LTE-FDD	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	CAE	10185
± 9.6	6.51	LTE-FDD	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	AAE	10186
± 9.6	6.50	LTE-FDD	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	CAF	10187
± 9,6	5.73	LTE-FDD	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	CAF	10188
± 9.6	6.52	LTE-FDD	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	AAF	10189
± 9.6	8.09	WLAN	IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK)	CAD	10193
	8.12	WLAN	IEEE 802.11n (HT Greenfield, 39 Mbps, 16-QAM)	CAD	10194
± 9.6	8.21	WLAN	IEEE 802.11n (HT Greenfield, 65 Mbps, 64-QAM)	CAD	10195
± 9.6	8.10	WLAN	IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)	CAD	10196
	8.13	WLAN	IEEE 802.11n (HT Mixed, 39 Mbps, 16-QAM)	CAD	10197
± 9.6	8.27	WLAN	IEEE 802.11n (HT Mixed, 65 Mbps, 64-QAM)	CAD	10198
± 9.0	8.03	WLAN	IEEE 802:11n (HT Mixed, 7.2 Mbps, BPSK)	CAD	10219
			IEEE 802.11n (HT Mixed, 43.3 Mbps, 16-QAM)	CAD	10220
± 9.6	8.13	WLAN	IEEE 802.11n (HT Mixed, 72.2 Mbps, 64-QAM)	CAD	10221
± 9.6	8.27	WLAN	IEEE 802.111 (H1 Mixed, 12.2 Mbps, 64-QAM) IEEE 802.11n (HT Mixed, 15 Mbps, BPSK)	CAD	10221
± 9,6	8.06	WLAN	IEEE 802.11n (HT Mixed, 15 Mops, BPSK) IEEE 802.11n (HT Mixed, 90 Mbps, 16-QAM)	CAD	10222
± 9.0	8.48	WLAN	IEEE 802.11n (HT Mixed, 90 Mbps, 16-QAM) IEEE 802.11n (HT Mixed, 150 Mbps, 64-QAM)	CAD	10223
± 9.6	8.08	WLAN		CAB	10224
± 9,6	5.97	WCDMA	UMTS-FDD (HSPA+)	CAB	
± 9.6	9.49	LTE-TDD	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	CAB	
± 9.6	10.26	LTE-TDD	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)		10227
± 9.6	9.22	LTE-TDD	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	CAB	10228
± 9,6	9.48	LTE-TDD	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	CAD	10229
±.9.6	10.25	LTE-TDD	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	CAD	10230
± 9.6	9.19	LTE-TDD	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	CAD	10231
± 9.6	9.48	LTE-TDD	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	CAG	10232
± 9.6	10.25	LTE-TDD	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	CAG	10233
± 9.6	9.21	LTE-TDD	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	CAG	10234
± 9.0	9.48	LTE-TDD	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	CAG	10235
± 9.6	10.25	LTE-TDD	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	CAG	10236
± 9.6	9.21	LTE-TDD	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	CAG	10237
± 9.6	9.48	LTE-TDD	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	CAF	10238
± 9.6	10.25	LTE-TDD	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	CAF	10239
±9.0	9.21	LTE-TDD	LTE-TDD (SC-FDMA. 1 RB, 15 MHz, QPSK)	CAF	10240
± 9.6	9.82	LTE-TDD	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	CAB	10241
±9.6	9.86	LTE-TDD	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	CAB	10242
± 9.6	9.46	LTE-TDD	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	CAB	10243
± 9.6	10.06	LTE-TDD	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	CAD	10244
± 9.4	10.06	LTE-TDD	LTE-TDD (SC-FDMA, 50% RB, 3 MHz. 64-QAM)	CAD	10245
± 9.6	9.30	LTE-TDD	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	CAD	10246
± 9.6	9.91	LTE-TDD	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	CAG	10247
± 9.4	10.09	LTE-TDD	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 84-QAM)	CAG	10248
± 9.6	9.29	LTE-TDD	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	CAG	10249
± 9.6	9.81	LTE-TDD	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	CAG	10250
± 9.0	10.17	LTE-TDD	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	CAG	10251
± 9.0	9.24	LTE-TDD	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	CAG	10252
± 9.6	9.90	LTE-TDD	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	CAF	10253
± 9.6	10.14	LTE-TDD	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	CAF	10254
± 9.1	9.20	LTE-TDD	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	CAF	10255
± 9.1	9.96	LTE-TDD	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	CAB	10256
± 9.	10.08	LTE-TDD	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	CAB	10257
± 9.6	9.34	LTE-TDD	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	CAB	10258
± 9.0	9.98	LTE-TDD	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	CAD	10259
19.	9,97	LTE-TDD	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	CAD	10260

Certificate No: EX3-7686_Oct21

Page 13 of 23

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

Unless other was baled une solute of the state and the state report refer only to the sample(s) lessed and state and provide the sample(s) lessed and state prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488

www.sgs.com.tw



Report No: TESA2207000200ES Rev: 01 Page: 19 of 28

10261	CAD	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	LTETOO	1001	1.000
10262	CAG	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	LTE-TDD	9.24	± 9.6
10263	CAG	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	LTE-TDD	9.83	± 9.6
10264	CAG	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	LTE-TDD	10.16	± 9.6
10265	CAG	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	LTE-TDD	9.23	± 9.6
10266	CAG	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	LTE-TDD	9.92	± 9.6
10267	CAG	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 04-0AM)	LTE-TDD	10.07	± 9.6
10268	CAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	LTE-TOD	9.30	±9.6
10269	CAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	LTE-TDD	10.06	± 9.6
10270		LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 04-0AW)	LTE-TDD	10.13	± 9.6
10274	CAB	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10)	LTE-TDD	9.58	± 9.6
10275	CAB	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10)	WGDMA	4.87	± 9.6
10277	CAA	PHS (QPSK)	WCDMA	3.96	± 9.6
10278	CAA	PHS (QPSK, BW 884MHz, Rolloff 0.5)	PHS	11.81	± 9.6
10279		PHS (QPSK, BW 884MHz, Rolloff 0.38)	PHS	11.81	± 9.6
10279	AAB	CDMA2000, RC1, SO55, Full Rate	PHS	12.18	± 9.6
10290	AAB		CDMA2000	3.91	± 9.6
10291		CDMA2000, RC3, SO55, Full Rate CDMA2000, RC3, SO32, Full Rate	CDMA2000	.3.46	± 9.6
10292	AAB		CDMA2000	3.39	± 9.6
10295	AAB	CDMA2000, RC3, SO3, Full Rate	CDMA2000	3.50	± 9.6
10295	AAD	CDMA2000, RC1, SO3, 1/8th Rate 25 fr.	CDMA2000	12.49	± 9.6
		LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-FDD	5.81	± 9.6
10298	AAD	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	LTE-FDD	5.72	± 9.6
10299	AAD	LTE-FDD (SC-FDMA, 50% RB. 3 MHz, 16-QAM)	LTE-FDD	6.39	± 9.6
10300	AAD	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	LTE-FDD	6.60	± 9.6
10301	AAA	IEEE 802,16e WIMAX (29:18, 5ms, 10MHz, QPSK, PUSC)	WIMAX	12.03	± 9.6
10302	AAA	IEEE 802.16e WIMAX (29:18, 5ms, 10MHz, QPSK, PUSC, 3CTRL)	WIMAX	12.57	± 9.1
10303	AAA	IEEE 802.16e WIMAX (31:15, 5ms, 10MHz, 64QAM, PUSC)	WIMAX	12,52	±9.0
10304	AAA	IEEE 802.16e WIMAX (29:18, 5ms, 10MHz, 64QAM, PUSC)	WIMAX	11.86	± 9.1
10305	AAA	IEEE 802.16e WIMAX (31:15, 10ms, 10MHz, 54QAM, PUSC)	WIMAX	15.24	± 9.6
10306	AAA	IEEE 802.16e WIMAX (29:18, 10ms, 10MHz, 64QAM, PUSC)	WIMAX	14.67	± 9.1
10307	AAA	IEEE 802,16e WIMAX (29:18, 10ms, 10MHz, QPSK, PUSC)	WiMAX	14.49	±9.6
10308	AAA	IEEE 802,16e WIMAX (29:18, 10ms, 10MHz, 16QAM, PUSC)	WIMAX	14.46	± 9.1
10309	AAA	IEEE 802.16e WIMAX (29:18, 10ms, 10MHz, 16QAM,AMC 2x3)	WIMAX	14.58	± 9.6
10310	AAA	IEEE 802,16e WIMAX (29:18, 10ms, 10MHz, QPSK, AMC 2x3	WiMAX	14.57	± 9.1
10311	AAD	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	LTE-FDD	6.06	± 9.6
10313	AAA	IDEN 1:3	IDEN	10.51	± 9,
10314	AAA	IDEN 1:6	IDEN	13.48	± 9.6
10315	AAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc dc)	WLAN	1.71	± 9.
10316		IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 96pc dc)	WLAN	8.36	± 9.0
10317	AAD	IEEE 802,11a WIFi 5 GHz (OFDM, 6 Mbps, 96pc dc)	WLAN	8.36	± 9.6
10352	AAA	Pulse Waveform (200Hz, 10%)	Generic	10.00	± 9.6
10353	AAA	Pulse Waveform (200Hz, 20%)	Generic	6.99	± 9.6
10354	AAA	Pulse Waveform (200Hz, 40%)	Generic	3.98	± 9.
10355	AAA	Pulse Waveform (200Hz, 60%)	Generic	2.22	± 9.
10356	AAA	Pulse Waveform (200Hz, 80%)	Generic	0.97	± 9.
10387	AAA	QPSK Waveform, 1 MHz	Generic	5.10	± 9.
10388		QPSK Waveform, 10 MHz	Generic	5.22	± 9.0
10396	AAA	64-QAM Waveform, 100 kHz	Generic	6.27	± 9.
10399	AAA	64-QAM Waveform, 40 MHz	Generic	6.27	± 9.1
10400	AAE	IEEE 802:11ac WiFi (20MHz, 64-QAM, 99pc dc)	WLAN	8.37	± 9.1
10401	AAE	IEEE 802.11ac WiFi (40MHz, 64-QAM, 99pc dc)	WLAN	8.60	± 9.
10402		IEEE 802,11ac WIFI (80MHz, 64-QAM, 99pc dc)	WLAN	8.53	± 9.1
10403	AAB	CDMA2000 (1xEV-DO, Rev. 0)	CDMA2000	3.76	± 9.
10404	AAB	CDMA2000 (1xEV-DO, Rev. A)	CDMA2000	3.77	± 9.
10406	AAB	CDMA2000, RC3, SO32, SCH0, Full Rate	CDMA2000	5.22	± 9.0
10410	AAG	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Sub=2.3,4,7,8,9)	LTE-TDD	7.82	± 9.

Certificate No: EX3-7686_Oct21

Page 14 of 23

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report reter only to the sample(s) lested and such sample(s) are retained to 90 days only. Mir#JSfabity i, Lt&Bateger and the company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fulleest extent of the law. prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488

www.sgs.com.tw



Report No: TESA2207000200ES Rev: 01 Page: 20 of 28

10414	AAA	WLAN CCDF. 64-QAM, 40MHz	Generic	8.54	± 9.6
10415		IEEE 802,11b WIFI 2.4 GHz (DSSS, 1 Mbps, 99pc dc)	WLAN	1.54	± 9.6
10416		IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc dc)	WLAN	8.23	± 9.6
10417	AAC	IEEE 802,11a/h WIFI 5 GHz (OFDM, 6 Mbps, 99pc dc)	WLAN	8.23	± 9.6
10418		IEEE 802.11g WIFI 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc, Long)	WLAN	8.14	± 9.6
10419	AAA	IEEE 802.11g WIFI 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc, Short)	WLAN	8.19	± 9.6
10422	AAC	IEEE 802.11n (HT Greenfield, 7.2 Mbps, BPSK)	WLAN	8.32	± 9.6
10423	AAC	IEEE 802.11n (HT Greenfield, 43.3 Mbps, 16-QAM)	WLAN	8.47	± 9.6
10424	AAC	IEEE 802.11n (HT Greenfield, 72.2 Mbps, 64-QAM)	WLAN	8.40	± 9.6
10425	AAC	IEEE 802.11n (HT Greenfield, 15 Mbps, BPSK)	WLAN	8.41	± 9.6
10426	AAC	IEEE 802.11n (HT Greenfield, 90 Mbps, 16-QAM)	WLAN	8.45	± 9.6
10427	AAC	IEEE 802,11n (HT Greenfield, 150 Mbps, 64-QAM)	WLAN	8.45	
10430	AAD	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1)	LTE-FDD	8.28	± 9.6
10431	AAD	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1)	LTE-FDD	8.38	
10432	AAC	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1)	LTE-FDD		± 9.6
10433	AAC	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1)	LTE-FDD	8.34	± 9.6
10434	AAA	W-CDMA (BS Test Model 1, 64 DPCH)	111212		± 9.6
10434	AAF	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Sub)	WCDMA	8.60	± 9.6
10435	AAD	LTE-FDD (SC-PDMA, 1 RB, 20 MHZ, QPSK, 0L Sub) LTE-FDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	7.82	± 9.6
10447	AAD		LTE-FDD	7.56	± 9.6
10448	AAC	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1, Clippin 44%)	LTE-FDD	7.53	± 9.6
	AAC	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, Cliping 44%)	LTE-FDD	7.51	± 9.6
10450		LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.48	± 9.6
10451	AAA	W-CDMA (BS Test Model 1, 64 DPCH, Clipping 44%)	WCDMA	7.59	± 9.6
10453	AAD	Validation (Square, 10ms, 1ms)	Test	10.00	± 9.6
10456	AAC	IEEE 802,11ac WiFi (160MHz, 64-QAM, 99pc dc)	WLAN	8.63	± 9.6
10457	AAA	UMTS-FDD (DC-HSDPA)	WCDMA	6.62	± 9.6
10458	AAA	CDMA2000 (1xEV-DO, Rev. B, 2 carriers)	CDMA2000	6.55	± 9.6
10459	AAA	CDMA2000 (1xEV-DO, Rev. B, 3 carriers)	CDMA2000	8.25	± 9.6
10460	AAA	UMTS-FDD (WCDMA, AMR)	WCDMA	2.39	± 9.6
10461	AAB	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Sub)	LTE-TDD	7.82	± 9.6
10462	AAB	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM, UL Sub)	LTE-TDD	8.30	± 9.6
10463	AAB	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM, UL Sub)	LTE-TDD	8.56	± 9,6
10464	AAC	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK, UL Sub)	LTE-TDD	7.82	± 9.6
10465	AAC	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM, UL Sub)	LTE-TDD	8.32	± 9.6
10466	AAC	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM, UL Sub)	LTE-TDD	8.57	± 9.6
10467	AAF	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Sub)	LTE-TDD	7.82	± 9.6
10468	AAF	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM, UL Sub)	LTE-TDD	8.32	± 9,6
10469	AAF	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM, UL Sub)	LTE-TDD	8.56	± 9.6
10470	AAF	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Sub)	LTE-TDD	7.82	± 9.6
10471	AAF	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM, UL Sub)	LTE-TDD	8.32	± 9.6
10472	AAF	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM, UL Sub)	LTE-TDD	8.57	± 9.6
10473	AAE	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK, UL Sub)	LTE-TDD	7.82	± 9.6
10474	AAE	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM, UL Sub)	LTE-TDD	8.32	± 9.6
10475	AAE	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM, UL Sub)	LTE-TDD	8.57	± 9.6
10477	AAF	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM, UL Sub)	LTE-TDD	8.32	± 9.6
10478	AAF	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM, UL Sub)	LTE-TDD	8.57	± 9.6
10479	AAB	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK, UL Sub)	LTE-TDD	7.74	± 9.6
10480	AAB	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM, UL Sub)	LTE-TDD	8.18	± 9.6
10481	AAB	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM, UL Sub)	LTE-TDD	8.45	± 9.6
10482	AAC	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK, UL Sub)	LTE-TDD	7.71	± 9.6
10483	AAC	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 18-QAM, Sub)	LTE-TDD	8.39	± 9.6
10484	AAC	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM, UL Sub)	LTE-TDD	8.47	± 9.6
10485	AAF	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK, UL Sub)	LTE-TDD	7.59	± 9.0
10486	AAF	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM, UL Sub)	LTE-TDD	8.38	± 9.6
10487	AAF	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM, UL Sub)	LTE-TDD	8.60	± 9.6
	1. 1. 1. 1. 1.	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK, UL Sub)	1-10-100	0.00	1 9.0

Certificate No: EX3-7686_Oct21

Page 15 of 23

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

Unless other was baled une solute of the state and the state report refer only to the sample(s) lessed and state and provide the sample(s) lessed and state prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488

www.sgs.com.tw



10489	AAF	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM, UL Sub)	I TE TOO	1.0.01	1.0.0
10490	AAF	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM, UL Sub)	LTE-TDD	8.31	± 9.6
10491	AAE	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK, UL Sub)	LTE-TDD	8.54	± 9.6
10492	AAE	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM, UL Sub)	LTE-TDD	7.74	± 9.6
10493	AAE	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM, UL Sub)	LTE-TDD		± 9.6
10494	AAF	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Sub)	LTE-TDD	8.55	± 9.6 ± 9.6
10495	AAF	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM, UL Sub)	LTE-TDD	8.37	
10496	AAF	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM, UL Sub)	LTE-TDD	8.54	±9.6
10497	AAB	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK, UL Sub)	LTE-TDD	7.67	± 9.6 ± 9.6
10498	AAB	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM, UL Sub)	LTE-TDD	8.40	± 9.6
10499	AAB	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM, UL Sub)	LTE-TDD	8.68	± 9.6
10500	AAC	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK, UL Sub)	LTE-TDD	7.67	± 9.6
10501	AAC	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM, UL Sub)	LTE-TDD	8.44	± 9.6
10502	AAC	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM, UL Sub)	LTE-TDD	8.52	± 9.6
10503	AAF	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK, UL Sub)	LTE-TDD		
10504	AAF	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM, UL Sub)	LTE-TDD	7.72	± 9.6 ± 9.6
10505	AAF	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM, UL Sub)			
10505	AAF	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM, 0L Sub)	LTE-TDD	8.54	± 9.6
10508	AAF	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK, 0L Sub) LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM, UL Sub)	LTE-TDD	7.74	± 9.6
10508	AAF	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM, UL Sub) LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM, UL Sub)	LTE-TDD	8.36	± 9.6
10509	AAE	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK, UL Sub)	LTE-TDD	8.55	± 9.6
10510	AAE	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 0PSK, 0L Sub) LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM, UL Sub)	LTE-TDD	7.99	± 9.6
10511	AAE	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM, UL SUB)	LTE-TDD	8.49	± 9.6
10512	AAF		LTE-TDD	8.51	± 9.6
10512	AAF	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK, UL Sub) LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM, UL Sub)	LTE-TDD	7.74	± 9.6
10513	AAF	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 18-QAM, UL Sub)	LTE-TDD	8.42	± 9.6
10515	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 99pc dc)	LTE-TDD	8.45	± 9.6
10516	AAA		WLAN	1.58	± 9.6
	AAA	IEEE 802.11b WiFi.2.4 GHz (DSSS, 5.5 Mbps, 99pc dc)	WLAN	1.57	± 9.6
10517	AAC	IEEE 802.11b WIFI 2.4 GHz (DSSS, 11 Mbps, 99pc dc)	WLAN	1.58	± 9.6
	AAC	IEEE 802.11a/h WIFI 5 GHz (OFDM, 9 Mbps, 99pc dc)	WLAN	8.23	± 9,6
10519	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 99pc dc)	WLAN	8.39	± 9.6
10520	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 99pc dc)	WLAN	8.12	± 9.6
	AAC	IEEE 802.11a/h WIFI 5 GHz (OFDM, 24 Mbps, 99pc dc)	WLAN	7.97	± 9.6
10522	AAC	IEEE 802.11a/h WIFI 5 GHz (OFDM, 36 Mbps, 99pc dc)	WLAN	8.45	± 9.6
		IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 99pc dc)	WLAN	8.08	± 9.6
10524	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 99pc dc)	WLAN	-8.27	± 9.6
10525	AAC	IEEE 802.11ac WiFi (20MHz, MCS0, 99pc dc)	WLAN	8.36	± 9.6
10526	AAC	IEEE 802.11ac WiFi (20MHz, MCS1, 99pc dc)	WLAN	8.42	± 9.6
10527	AAC	IEEE 802.11ac WiFi (20MHz, MCS2, 99pc dc)	WLAN	8.21	± 9.6
10528	AAC	IEEE 802.11ac WiFi (20MHz, MCS3, 99pc dc)	WLAN	8.36	± 9.6
10529	AAC	IEEE 802.11ac WiFi (20MHz, MCS4, 99pc dc)	WLAN	8.36	± 9.6
10531	AAC	IEEE 802.11ac WiFi (20MHz, MCS6, 99pc dc)	WLAN	8.43	± 9.6
10532		IEEE 802.11ac WiFi (20MHz, MCS7, 99pc dc)	WLAN	8.29	± 9.6
10533	AAC	IEEE 802.11ac WiFI (20MHz, MCS8, 99pc dc)	WLAN	8.38	± 9,6
10534	AAC	IEEE 802.11ac WiFI (40MHz, MCS0, 99pc dc)	WLAN	8.45	± 9.6
10535	AAC	IEEE 802.11ac WiFi (40MHz, MCS1, 99pc dc)	WLAN	8.45	± 9.6
10536	AAC	IEEE 802.11ac WiFi (40MHz, MCS2, 99pc dc)	WLAN	8.32	± 9.6
10537	AAC	IEEE 802,11ac WiFi (40MHz, MCS3, 99pc dc)	WLAN	8.44	± 9.6
10538	AAC	IEEE 802.11ac WiFi (40MHz, MCS4, 99pc dc)	WLAN	8.54	± 9.6
10540	AAC	IEEE 802.11ac WiFi (40MHz, MCS6, 99pc dc)	WLAN	8.39	± 9.6
10541	AAC	IEEE 802.11ac WiFi (40MHz, MCS7, 99pc dc)	WLAN	8.46	± 9.6
10542	AAC	IEEE 802.11ac WiFi (40MHz, MCS8, 99pc dc)	WLAN	8.65	± 9.6
10543	AAC	IEEE 802.11ac WiFi (40MHz, MCS9, 99pc dc)	WLAN	8.65	± 9.6
10544	AAC	IEEE 802.11ac WiFi (80MHz, MCS0, 99pc dc)	WLAN	8.47	± 9.6
10545	AAC	IEEE 802,11ac WIFI (80MHz, MCS1, 99pc dc)	WLAN	8.55	± 9.6
10546	AAC	IEEE 802.11ac WiFi (80MHz, MCS2, 99pc dc)	WLAN	8.35	± 9.6

Page 16 of 23

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

Unless other was baled une solute of the state and the state report refer only to the sample(s) lessed and state and provide the sample(s) lessed and state prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

www.sgs.com.tw



10547	AAC	IEEE 802.11ac WiFi (80MHz, MCS3, 99pc dc)	WLAN	8,49	± 9.6
10548	AAC	IEEE 802.11ac WiFi (80MHz, MCS4, 99pc dc)	WLAN	8.37	± 9.6
10550	AAC	IEEE 802.11ac WiFi (80MHz, MCS6, 99pc dc)	WLAN	8.39	± 9.6
10551	AAC	IEEE 802.11ac WiFi (80MHz, MCS7, 99pc dc)	WLAN	8.50	± 9.6
10552	AAC	IEEE 802.11ac WiFi (80MHz, MCS8, 99pc dc)	WLAN	8.42	± 9.6
10553	AAC	IEEE 802.11ac WIFI (80MHz, MCS9, 99pc dc)	WLAN	8.45	± 9.6
10554	AAD	IEEE 802.11ac WIFi (160MHz, MCS0, 99pc dc)	WLAN	8.48	± 9.6
10555	AAD	IEEE 802.11ac WiFI (160MHz, MCS1, 99pc dc)	WLAN	8,47	± 9.6
10556	AAD	IEEE 802.11ac WiFi (160MHz, MCS2, 99pc dc)	WLAN	8.50	± 9.6
10557	AAD	IEEE 802.11ac WIFI (160MHz, MCS3, 99pc dc)	WLAN	8.52	± 9.6
10558	AAD	IEEE 802.11ac WIFI (160MHz, MCS4, 99pc dc)	WLAN	8.61	± 9.6
10560	AAD	IEEE 802.11ac WiFi (160MHz, MCS6, 99pc dc)	WLAN	8.73	± 9.6
10561	AAD	IEEE 802.11ac WiFi (160MHz, MCS7, 99pc dc)	WLAN	8.56	± 9.6
10562	AAD	IEEE 802.11ac WiFi (160MHz, MCS8, 99pc dc)	WLAN	8.69	± 9.6
10563	AAD	IEEE 802.11ac WiFI (160MHz, MCS9, 99pc dc)	WLAN	8.77	± 9.6
10564	AAA	IEEE 802.11g WIFI 2.4 GHz (DSSS-OFDM, 9 Mbps, 99pc dc)	WLAN	8.25	± 9.6
10565	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 99pc dc)	WLAN	8.45	± 9.6
10566	AAA	IEEE 802.11g WIFI 2.4 GHz (DSSS-OFDM, 12 Mbps, 99pc dc)	WLAN	8.13	± 9.6
10567	AAA	IEEE 802.11g WIFI 2.4 GHz (DSSS-OFDM, 10 Mbps, 99pc dc)	WLAN	8.00	± 9.6
10568	AAA	IEEE 802.11g WIFI 2.4 GHz (DSSS-OFDM, 36 Mbps, 99pc dc)	WLAN	8.37	± 9.6
10569	AAA	IEEE 802.11g WIFI 2.4 GHz (DSSS-OFDM, 48 Mbps, 99pc dc)	WLAN	8.10	± 9.6
10570	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 99pc dc)	WLAN	8.30	± 9.6
10571	AAA	IEEE 802.11b WIFI 2.4 GHz (DSSS, 1 Mbps, 90pc dc)	WLAN	1.99	± 9.6
10572	AAA	IEEE 802.11b WIFi 2.4 GHz (DSSS, 2 Mbps, 90pc dc)	WLAN	1.99	± 9.6
10573	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 90pc dc)	WLAN	1.98	± 9.6
10574	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 90pc dc)	WLAN	1.98	± 9.6
10575	AAA	IEEE 802.11g WIFI 2.4 GHz (DSSS-OFDM, 6 Mbps, 90pc dc)	WLAN	8.59	± 9.6
10576	AAA	IEEE 802,11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 90pc dc)	WLAN	8.60	± 9.6
10577	AAA	IEEE 802,11g WIFI 2.4 GHz (DSSS-OFDM, 12 Mbps, 90pc dc)	WLAN	8.70	± 9.6
10578	AAA	IEEE 802,11g WiFI 2.4 GHz (DSSS-OFDM, 18 Mbps, 90pc dc)	WLAN	8.49	± 9.6
10579	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 90pc do)	WLAN	8.36	± 9,6
10580	AAA	IEEE 802,11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 90pc dc)	WLAN	8.76	± 9.6
10581	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 90pc dc)	WLAN	8.35	± 9.6
10582	AAA	IEEE 802.11g WIFI 2.4 GHz (DSSS-OFDM, 54 Mbps, 90pc dc)	WLAN	8.67	± 9.6
10583	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 90pc dc)	WLAN	8.59	± 9.6
10584	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 90pc dc)	WLAN	8.60	± 9.6
10585	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 90pc dc)	WLAN	8.70	± 9.6
10586	AAC	IEEE 802.11a/h WiFI 5 GHz (OFDM, 18 Mbps, 90pc dc)	WLAN	8.49	± 9.6
10587	AAC	IEEE 802.11a/h WiFI 5 GHz (OFDM, 13 Mbps, 90pc dc)	WLAN	8.36	± 9.6
10588	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 90pc dc)	WLAN	8.76	± 9.6
10589	AAC	IEEE 802.11a/n WIFI 5 GHz (OFDM, 36 Mops, 30pc dc)	WLAN	8.35	± 9.6
10590	AAC	IEEE 802.11a/h WIFI 5 GHz (OFDM, 54 Mbps, 90pc dc)	WLAN	8.67	± 9.6
10590	AAC	IEEE 802.11n (HT Mixed, 20MHz, MCS0, 90pc dc)	WLAN	8.63	± 9.6
10591	AAC	IEEE 802.11n (HT Mixed, 20MHz, MC30, 90pc dc)	WLAN	8.79	± 9.6
10592	AAC	IEEE 802.11n (HT Mixed, 20MHz, MCS1, 80pc dd)	WLAN	8.79	± 9.0
10593	AAC	IEEE 802.11n (HT Mixed, 20MHz, MCS2, 90pc dc)	WLAN	8.64	± 9.0
10594	AAC	IEEE 802.11n (HT Mixed, 20MHz, MCS3, 90pc dc)	WLAN	8.74	± 9.6
10595	AAC	IEEE 802.111 (HT Mixed, 20MHz, MCS4, 90pc dc)	WLAN	8,74	± 9.6
10590	AAC	IEEE 802.11n (HT Mixed, 20MHz, MCSS, solpc dc)	WLAN	8.72	± 9.6
10597	AAC	IEEE 802.111 (HT Mixed, 20MHz, MCS6, 90pc dc)	WLAN	8.50	± 9.6
10599	AAC	IEEE 802.111 (HT Mixed, 20MHz, MCS7, 50pc dc)	WLAN	8.79	± 9,6
10599	AAC	IEEE 802.11n (H1 Mixed, 40MHz, MCS0, 90pc dc) IEEE 802.11n (HT Mixed, 40MHz, MCS1, 90pc dc)	WLAN	8.79	± 9,6
	AAC	IEEE 802.11n (H1 Mixed, 40MHz, MCS1, 90pc dc) IEEE 802.11n (HT Mixed, 40MHz, MCS2, 90pc dc)			
10601	AAC	IEEE 802.11n (HT Mixed, 40MHz, MCS2, 90pc dc) IEEE 802.11n (HT Mixed, 40MHz, MCS3, 90pc dc)	WLAN	8.82	± 9.6
10602	AAC	IEEE 802.11n (HT Mixed, 40MHz, MCS3, 90pc dc) IEEE 802.11n (HT Mixed, 40MHz, MCS4, 90pc dc)	WLAN		
	LAAC	LEL OV. III (FI WIXED, 40WFL, WOO4, SUDGUC)	VVLAN	9.03	± 9.6

Page 17 of 23

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

Unless otherwise stated the results shown in this test report reter only to the sample(s) lested and such sample(s) are retained to 90 days only. Mir#JSfabity i, Lt&Bateger and the company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fulleest extent of the law. prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488



10605	AAC	IEEE 802.11n (HT Mixed, 40MHz, MCS6, 90pc dc)	WLAN	0.07	1.00
10606	AAC	IEEE 802.11n (HT Mixed, 40MHz, MCS0, 800c dc)		8.97	± 9.6
10607	AAC	IEEE 802.11ac WiFi (20MHz, MCS0, 90pc dc)	WLAN	8.82	± 9.6
10608	AAC	IEEE 802.11ac WiFi (20MHz, MCS1, 90pc dc)	WLAN	8.64	± 9.6
10609	AAC	IEEE 802.11ac WiFI (20MHz, MCS2, 90pc dc)	WLAN	8.77	± 9.6
10610	AAC	IEEE 802.11ac WiFI (20MHz, MCS3, 90pc dc)	WLAN	8.57	± 9.6
10611	AAC	IEEE 802.11ac WiFi (20MHz, MCS4, 90pc dc)	WLAN	8.78	± 9.6
10612	AAC	IEEE 802.11ac WiFi (20MHz, MCS5, 90pc dc)	WLAN	8.70	± 9.6
10613	AAC	IEEE 802.11ac WiFi (20MHz, MCS6, 90pc dc)		8.77	± 9.6
10614	AAC	IEEE 802.11ac WIFI (20MHz, MCS7, 90pc dc)	WLAN WLAN	8.94	± 9.6
10615	AAC	IEEE 802.11ac WiFi (20MHz, MCSB, 90pc dc)		8.59	± 9.6
10616	AAC	IEEE 802.11ac WiFi (40MHz, MCS0, 90pc dc)	WLAN WLAN	8.82	± 9.6
10617	AAC	IEEE 802.11ac WiFi (40MHz, MCS0, 80pc dc)	1112000	8.82	± 9.6
10618	AAC	IEEE 802.11ac WiFi (40MHz, MCS1, 90pc dc)	WLAN	8.81	± 9.6
10619	AAC	IEEE 802.11ac WiFi (40MHz, MCS2, 90pc dc)		8.58	± 9.6
10620	AAC	IEEE 802.11ac WiFi (40MHz, MCS3, 90pc dc)	WLAN	8.86	± 9.6
10621	AAC		WLAN	8.87	± 9.6
10621	AAC	IEEE 802.11ac WiFi (40MHz, MCS5, 90pc dc) IEEE 802.11ac WiFi (40MHz, MCS6, 90pc dc)	WLAN	8.77	± 9.6
10622	AAC		WLAN	8.68	± 9.6
10623	AAC	IEEE 802.11ac WiFi (40MHz, MCS7, 90pc dc)	WLAN	8.82	± 9.6
		IEEE 802.11ac WIFI (40MHz, MCS8, 90pc dc)	WLAN	8.96	± 9.6
10625	AAC	IEEE 802.11ac WIFI (40MHz, MCS9, 90pc dc)	WLAN	8.96	± 9.6
10626	AAC	IEEE 802.11ac WIFI (80MHz, MCS0, 90pc dc)	WLAN	8.83	± 9,6
10627	AAC	IEEE 802.11ac WiFi (80MHz, MCS1, 90pc dc)	WLAN	8.88	± 9.6
10628	AAC	IEEE 802.11ac WiFi (80MHz, MCS2, 90pc dc)	WLAN	8.71	± 9.6
10629	AAC	IEEE 802.11ac WiFi (80MHz, MCS3, 90pc dc)	WLAN	8.85	± 9.6
10630	AAC	IEEE 802.11ac WiFi (80MHz, MCS4, 90pc dc)	WLAN	8.72	± 9,6
10631	AAC	IEEE 802,11ac WiFi (80MHz, MCS5, 90pc dc)	WLAN	8.81	± 9.6
10632	AAC	IEEE 802.11ac WIFI (80MHz, MCS6, 90pc dc)	WLAN	8.74	± 9.6
10633	AAC	IEEE 802,11ac WiFi (80MHz, MCS7, 90pc dc)	WLAN	8.83	± 9.6
10634	AAC	IEEE 802.11ac WIFI (80MHz, MCS8, 90pc dc)	WLAN	8.80	± 9,6
10635	AAC	IEEE 802.11ac WIFI (80MHz, MCS9, 90pc dc)	WLAN	8.81	± 9.6
10636	AAD	IEEE 802.11ac WiFi (160MHz, MCS0, 90pc dc)	WLAN	8.83	± 9.6
10637	AAD	IEEE 802.11ac WiFi (160MHz, MCS1, 90pc dc)	WLAN	8.79	± 9.6
10638	AAD	IEEE 802.11ac WIFI (160MHz, MCS2, 90pc dc)	WLAN	8.86	± 9.6
10639	AAD	IEEE 802.11ac WiFI (160MHz, MCS3, 90pc dc)	WLAN	8.85	± 9.6
10640	AAD	IEEE 802.11ac WIFI (160MHz, MCS4. 90pc dc)	WLAN	8.98	± 9.6
10641	AAD	IEEE 802.11ac WiFi (160MHz, MCS5, 90pc dc)	WLAN	9.06	± 9.6
10642	AAD	IEEE 802.11ac WiFi (160MHz, MCS6, 90pc dc)	WLAN	9.06	± 9.6
10643	AAD	IEEE 802.11ac WiFi (160MHz, MCS7, 90pc dc)	WLAN	8.89	± 9.6
10644	AAD	IEEE 802.11ac WiFi (160MHz, MCS8, 90pc dc)	WLAN	9.05	± 9.6
10645	AAD	IEEE 802.11ac WIFi (160MHz, MCS9, 90pc dc)	WLAN	9.11	± 9.6
10646	AAG	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Sub=2,7)	LTE-TDD	11.96	± 9.6
10647	AAF	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Sub=2,7)	LTE-TDD	11.96	± 9.6
10648	AAA	CDMA2000 (1x Advanced)	CDMA2000	3.45	± 9.6
10652	AAE	LTE-TDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	6.91	± 9.6
10653	AAE	LTE-TDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	7.42	± 9.6
10654	AAD	LTE-TDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	6.96	± 9.6
10655	AAE	LTE-TDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	7.21	± 9.6
10658	AAA	Pulse Waveform (200Hz, 10%)	Test	10.00	± 9.6
10659	AAA	Pulse Waveform (200Hz, 20%)	Test	6.99	± 9.6
10660	AAA	Pulse Waveform (200Hz, 40%)	Test	3.98	± 9.6
10661	AAA	Pulse Waveform (200Hz, 60%)	Test	2.22	± 9.6
10662	AAA	Pulse Waveform (200Hz, 80%)	Test	0.97	± 9.6
10670	AAA	Bluetooth Low Energy	Bluetooth	2.19	± 9.6
10671	AAC	IEEE 802.11ax (20MHz, MCS0, 90pc dc)	WLAN	9.09	± 9.6
10672	AAC	IEEE 802.11ax (20MHz, MCS1, 90pc dc)	WLAN	8.57	± 9.6

Page 18 of 23

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

Unless other was baled une solute of the state and the state report refer only to the sample(s) lessed and state and provide the sample(s) lessed and state prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488

www.sgs.com.tw



10673	AAC	IEEE 802.11ax (20MHz, MCS2, 90pc dc)	WLAN	8.78	± 9.6
10674	AAC	IEEE 802.11ax (20MHz, MCS3, 90pc dc)	WLAN	8.74	± 9.6
10675		IEEE 802.11ax (20MHz, MCS4, 90pc dc)	WLAN	8.90	± 9.6
10676	AAC	IEEE 802.11ax (20MHz, MCS5, 90pc dc)	WLAN	8.77	± 9.6
10677	AAC	IEEE 802.11ax (20MHz, MCS6, 90pc dc)	WLAN	8.73	± 9.6
10678	AAC	IEEE 802.11ax (20MHz, MCS7, 90pc dc)	WLAN	8.78	± 9.6
10679	AAC	IEEE 802,11ax (20MHz, MCS8, 90pc dc)	WLAN	8.89	± 9.6
10680	AAC	IEEE 802.11ax (20MHz, MCS9, 90pc dc)	WLAN	8.80	± 9.6
10681	AAC	IEEE 802.11ax (20MHz, MCS10, 90pc dc)	WLAN	8.62	± 9.6
10682	AAC	IEEE 802.11ax (20MHz, MCS11, 90pc dc)	WLAN	8.83	± 9.6
10683	AAC	IEEE 802.11ax (20MHz, MCS0, 99pc dc)	WLAN	8.42	± 9.6
10684	AAC	IEEE 802.11ax (20MHz, MCS1, 99pc dc)	WLAN	8.26	± 9.6
10685	AAC	IEEE 802.11ax (20MHz, MCS2, 99pc dc)	WLAN	8.33	± 9.6
10686	AAC	IEEE 802.11ax (20MHz, MCS3, 99pc dc)	WLAN	8.28	± 9.6
10687	AAC	IEEE 802.11ax (20MHz, MCS4, 99pc dc)	WLAN	8.45	± 9.6
10688	AAC	IEEE 802,11ax (20MHz, MCS5, 99pc dc)	WLAN	8.29	± 9.6
10689	AAC	IEEE 802.11ax (20MHz, MCS6, 99pc dc)	WLAN	8.55	± 9.6
10690	AAC	IEEE 802.11ax (20MHz, MCS7, 99pc dc)	WLAN	8.29	± 9.6
10691	AAC	IEEE 802.11ax (20MHz, MCS8, 99pc dc)	WLAN	8.25	± 9.6
10692	AAC	IEEE 802.11ax (20MHz, MCS9, 99pc dc)	WLAN.	8.29	± 9.6 *
10693	AAC	IEEE 802.11ax (20MHz, MCS10, 99pc dc)	WLAN	8.25	± 9.6
10694	AAC	IEEE 802.11ax (20MHz, MCS11, 99pc dc)	WLAN	8.57	± 9.6
10695	AAC	IEEE 802.11ax (40MHz, MCS0, 90pc dc)	WLAN	8.78	± 9.6
10696	AAC	IEEE 802.11ax (40MHz, MCS1, 90pc dc)	WLAN	8.91	± 9.6
10697	AAC	IEEE 802.11ax (40MHz, MCS2, 90pc dc)	WLAN	8.61	± 9.6
10698	AAC	IEEE 802.11ax (40MHz, MCS3, 90pc dc)	WLAN	8.89	± 9.6
10699	AAC	IEEE 802.11ax (40MHz, MCS4, 90pc dc)	WLAN	8.82	± 9.6
10700	AAC	IEEE 802.11ax (40MHz, MCS5, 90pc dc)	WLAN	8.73	± 9.6
10701	AAC	IEEE 802.11ax (40MHz, MCS6, 90pc.dc)	WLAN	8.86	± 9.6
10702	AAC	IEEE 802,11ax (40MHz, MCS7, 90pc dc)	WLAN	8.70	± 9.6
10703		IEEE 802.11ax (40MHz, MCS8, 90pc dc)	WLAN	8.82	± 9.6
10704	AAC	IEEE 802.11ax (40MHz, MCS9, 90pc dc)	WLAN	8,56	± 9,6
10705		IEEE 802.11ax (40MHz, MCS10, 90pc dc)	WLAN	8.69	± 9.6
10706	AAC	IEEE 802.11ax (40MHz, MCS11, 90pc dc)	WLAN	8.66	± 9.6
10707	AAC	IEEE 802.11ax (40MHz, MCS0, 99pc dc)	WLAN	8.32	± 9.6
10708	AAC	IEEE 802.11ax (40MHz. MCS1, 99pc dc)	WLAN	8.55	± 9.6
10709		IEEE 802.11ax (40MHz, MCS2, 99pc dc)	WLAN	8.33	± 9.6
10710	AAC	IEEE 802.11ax (40MHz, MCS3, 99pc dc)	WLAN	8.29	± 9.6
10711		IEEE 802.11ax (40MHz, MCS4, 99pc dc)	WLAN	8.39	± 9.6
10712	AAC	IEEE 802,11ax (40MHz, MCS5, 99pc dc)	WLAN	8.67	± 9.6
10713		IEEE 802.11ax (40MHz, MCS6, 99pc dc)	WLAN	8.33	± 9.6
10714	AAC	IEEE 802.11ax (40MHz, MCS7, 99pc dc)	WLAN	8.26	± 9.6
10715		IEEE 802.11ax (40MHz, MCS8, 99pc dc)	WLAN	8.45	± 9.6
10716	AAC	IEEE 802.11ax (40MHz, MCS9, 99pc dc)	WLAN	8.30	± 9.6
10717	AAC	IEEE 802.11ax (40MHz, MCS10, 99pc dc)	WLAN	8.48	± 9.6
10718	AAC	IEEE 802.11ax (40MHz, MCS11, 99pc dc)	WLAN	8.24	± 9.6
10719		IEEE 802.11ax (80MHz, MCS0, 90pc dc)	WLAN	8.81	± 9.6
10720		IEEE 802.11ax (80MHz, MCS1, 90pc dc)	WLAN	8.87	± 9.6
10721	AAC	IEEE 802.11ax (80MHz, MCS2, 90pc dc)	WLAN	8.76	± 9.6
10722		IEEE 802.11ax (80MHz, MCS3, 90pc dc)	WLAN	8.55	± 9.6
10723		IEEE 802.11ax (80MHz, MCS4, 90pc dc)	WEAN	8.70	± 9,6
10724		IEEE 802.11ax (80MHz, MCS5, 90pc dc)	WLAN	8.90	± 9.6
10725	AAC	IEEE 802.11ax (80MHz, MCS6, 90pc dc) IEEE 802.11ax (80MHz, MCS7, 90pc dc)	WLAN	8.74	± 9.6
10726	AAC		WLAN	8.72	± 9.6
10727		IEEE 802.11ax (80MHz, MCS8, 90pc dc) IEEE 802.11ax (80MHz, MCS9, 90pc dc)	WLAN WLAN	8.66	± 9.6 ± 9.6

Page 19 of 23

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

Unless otherwise stated the results shown in this test report reter only to the sample(s) lested and such sample(s) are retained to 90 days only. Mir#JSfabity i, Lt&Bateger and the company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fulleest extent of the law. prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488

www.sqs.com.tw



10729	AAC	IEEE 802.11ax (80MHz, MCS10, 90pc dc)	WLAN	8.64	Trac
10730	AAC	IEEE 802.11ax (80MHz, MCS10, 90pc dc)	WLAN	1000	± 9,8
10731	AAC	IEEE 802.11ax (80MHz, MCS0, 99pc dc)	WLAN	8.67	± 9,6
10732	AAC	IEEE 802.11ax (80MHz, MCS1, 99pc dc)	WLAN	8.42	±9.6
10733	AAC	IEEE 802.11ax (80MHz, MCS2, 99pc dc)		8.46	± 9.6
10734	AAC	IEEE 802.11ax (80MHz, MCS2, 99pc dc)	WLAN	8.40	± 9.6
10735	AAC	IEEE 802.11ax (80MHz, MCS4, 99pc.dc)		8.25	± 9,8
10736	AAC	IEEE 802.11ax (80MHz, MCS5, 99pc dc)	WLAN	8.33	± 9.8
10737	AAC	IEEE 802.11ax (80MHz, MCS6, 99pc dc)	WLAN	8.27	± 9.6
10738	AAC	IEEE 802.11ax (80MHz, MCS8, 99pc dc)	WLAN	8.36	± 9.6
10739	AAC	IEEE 802.11ax (80MHz, MCS8, 99pc dc)	WLAN	8.29	± 9.6
10740	AAC	IEEE 802.11ax (80MHz, MCS9, 99pc dc)	WLAN		± 9.6
10741	AAC	IEEE 802.11ax (80MHz, MCS10, 99pc dc)	WLAN	8.48	± 9.6
10742	AAC	IEEE 802.11ax (80MHz, MCS10, 99pc dc)	WLAN	8.40	± 9.6
10743		IEEE 802.11ax (160MHz, MCS11, 350c 0c)	WLAN	8.43	± 9.6
10744		IEEE 802.11ax (160MHz, MCS1, 90pc dc)	WLAN	8.94	± 9.6
10745	AAC	IEEE 802.11ax (160MHz, MCS2, 90pc dc)	WLAN	9.16	± 9.6
10746	AAC	IEEE 802.11ax (160MHz, MCS3, 90pc dc)	WLAN	8.93	± 9.6
10747	AAC	IEEE 802.11ax (160MHz, MCS4, 90pc dc)	WLAN	9.11	± 9.6
10748		IEEE 802,11ax (160MHz, MCS5, 90pc dc)	WLAN	9.04	± 9.6
10749		IEEE 802.11ax (160MHz, MCS6, 90pc dc)	WLAN	8.93	± 9.6
10750		IEEE 802.11ax (160MHz, MCS7, 90pc dc)	WLAN	8,90	± 9.6
10751	AAC	IEEE 802.11ax (160MHz, MCS3, 90pc dc)	WLAN	8.79	± 9.0
10752		IEEE 802.11ax (160MHz, MCS9, 90pc dc)	WLAN	8.82	± 9.0
10753	AAC	IEEE 802.11ax (160MHz, MCS10, 90pc dc)	WLAN	8.81	± 9.6
10754	AAC	IEEE 802.11ax (160MHz, MCS11, 90pc dc)	WLAN	9.00	± 9.6
10755	AAC	IEEE 802.11ax (160MHz, MCS0, 99pc dc)	WLAN	8.64	± 9.6
10756	AAC	IEEE 802.11ax (160MHz, MCS1, 99pc dc)	WLAN	8.64	± 9.6
10757	AAC	IEEE 802.11ax (160MHz, MCS1, 99pc dc)	WLAN		± 9.6
10758	AAC	IEEE 802.11ax (160MHz, MCS3, 99pc dc)	WLAN	8.77	± 9.6
10759	AAC	IEEE 802.11ax (160MHz, MCS4, 99pc dc)	WLAN	8.69	± 9.6
10760	AAC	IEEE 802.11ax (160MHz, MCS5, 99pc dc)	WLAN	8.58 8.49	± 9.6
10761	AAC	IEEE 802.11ax (160MHz, MCS6, 99pc dc)	WLAN	8.58	± 9.6
10762	AAC	IEEE 802.11ax (160MHz, MCS7, 99pc dc)	WLAN	8.49	± 9.6
10763	AAC	IEEE 802.11ax (160MHz, MCS8, 99pc dc)	WLAN	8.53	± 9.6
10764	AAC	IEEE 802.11ax (160MHz, MCS9, 99pc dc)	WLAN	8.54	± 9.6
10765	AAC	IEEE 802.11ax (160MHz, MCS10, 99pc dc)	WLAN	8.54	± 9.6
10766	AAC	IEEE 802.11ax (160MHz, MCS11, 99pc dc)	WLAN	8.51	± 9.6
10767	AAE	5G NR (CP-OFDM, 1 RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	7.99	± 9.6
10768	AAD	5G NR (CP-OFDM, 1 RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.01	± 9.6
10769	AAD	5G NR (CP-OFDM, 1 RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.01	± 9.6
10770	AAD	5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.02	± 9.6
10771	AAD	5G NR (CP-OFDM, 1 RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.02	± 9.6
10772	AAD	5G NR (CP-OFDM, 1 RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.23	± 9.6
10773	AAD	5G NR (CP-OFDM, 1 RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.03	± 9.6
10774	AAD	5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.02	± 9.6
10775	AAD	5G NR (CP-OFDM, 50% RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.31	± 9.6
10776	AAD	5G NR (CP-OFDM, 50% RB, 10 MHz, QPSK, 15 KHz)	5G NR FR1 TDD	8.30	± 9.6
10777	AAC	5G NR (CP-OFDM, 50% RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.30	± 9.0
10778	AAD	5G NR (CP-OFDM, 50% RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.34	± 9.6
10779	AAC	5G NR (CP-OFDM, 50% RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.42	19.6
10780	AAD	5G NR (CP-OFDM, 50% RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.38	19.6
10781	AAD	5G NR (CP-OFDM, 50% RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.38	± 9.6
10782	AAD	5G NR (CP-OFDM, 50% RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.43	
10783	AAE	5G NR (CP-OFDM, 100% RB, 5 MHz, QPSK, 15 KHz)	5G NR FR1 TDD	8.43	± 9.6
10784		5G NR (CP-OFDM, 100% RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.29	± 9.6

Page 20 of 23

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

Unless otherwise stated the results shown in this test report reter only to the sample(s) lested and such sample(s) are retained to 90 days only. Mir#JSfabity i, Lt&Bateger and the company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fulleest extent of the law. prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488

```
www.sqs.com.tw
```



10785	AAD	5G NR (CP-OFDM, 100% RB. 15 MHz, QPSK, 15 kHz)		0.10	1.000
10786	AAD	5G NR (CP-OFDM, 100% RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 TDD 5G NR FR1 TDD	8.40	± 9.1
10787	AAD	5G NR (CP-OFDM, 100% RB, 25 MHz, QPSK, 15 kHz)			± 9.
10788	AAD	5G NR (CP-OFDM, 100% RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 TDD 5G NR FR1 TDD	8.44	±9.
10789	AAD	5G NR (CP-OFDM, 100% RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 TDD		± 9,
10790	AAD	5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.37	± 9.
10791	AAE	5G NR (CP-OFDM, 1 RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.83	± 9.
10792	AAD	5G NR (CP-OFDM, 1 RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.83	± 9.
10793	AAD	5G NR (CP-OFDM, 1 RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.95	±9.
10794	AAD	5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.82	± 9. ± 9.
10795	AAD	5G NR (CP-OFDM, 1 RB, 25 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.84	-
10796	AAD	5G NR (CP-OFDM, 1 RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.82	± 9. ± 9.
10797	AAD	5G NR (CP-OFDM, 1 RB, 40 MHz, QPSK, 30 kHz)			
10798	AAD	5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 30 KHz)	5G NR FR1 TDD	8.01	± 9,
10799	AAD	5G NR (CP-OFDM, 1 RB, 60 MHz, QPSK, 30 KHz)	5G NR FR1 TDD	7.89	± 9.
10801	AAD	5G NR (CP-OFDM, 1 RB, 80 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.93	± 9.
10802	AAD	5G NR (CP-OFDM, 1 RB, 90 MHz, QPSK, 30 KHz)	5G NR FR1 TDD	7.89	± 9.
10803	AAD	5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.87	± 9.
10805	AAD	5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz) 5G NR (CP-OFDM, 50% RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.93	± 9.
10805	AAD		5G NR FR1 TDD	8.34	± 9.
10806	AAD	5G NR (CP-OFDM, 50% RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.37	± 9.
10809	AAD	5G NR (CP-OFDM, 50% RB, 30 MHz, OPSK, 30 kHz)	5G NR FR1 TDD	8.34	± 9.
		5G NR (CP-OFDM, 50% RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.34	± 9.
10812	AAD	5G NR (CP-OFDM, 50% RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.35	± 9.
10817	AAE	5G NR (CP-OFDM, 100% RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.35	± 9.
10818	AAD	5G NR (CP-OFDM, 100% RB. 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.34	± 9,
10819	AAD	5G NR (CP-OFDM, 100% RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.33	± 9.
10820	AAD	5G NR (CP-OFDM, 100% RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.30	± 9.
10821	AAD	5G NR (CP-OFDM, 100% RB, 25 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.41	± 9.
10822	AAD	5G NR (CP-OFDM, 100% RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.41	± 9.
10823	AAD	5G NR (CP-OFDM, 100% RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.36	± 9.
10824	AAD	5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.39	± 9.
10825	AAD	5G NR (CP-OFDM, 100% RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.41	± 9.
10827	AAD	5G NR (CP-OFDM, 100% RB, 80 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.42	± 9,
10828	AAD	5G NR (CP-OFDM, 100% RB, 90 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.43	± 9.
10829	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.40	± 9.
10830	AAD	5G NR (CP-OFDM, 1 RB, 10 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.63	±9.
10831	AAD	5G NR (CP-OFDM, 1 RB. 15 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.73	± 9.
10832	AAD	5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.74	±9.
10833	AAD	5G NR (CP-OFDM, 1 RB, 25 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.70	± 9.
10834	AAD	5G NR (CP-OFDM, 1 RB, 30 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.75	± 9.
10835	AAD	5G NR (CP-OFDM, 1 RB, 40 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.70	± 9.
10836	AAD	5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.66	±9
10837	AAD	5G NR (CP-OFDM, 1 RB, 60 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.68	± 9.
10839	AAD	5G NR (CP-OFDM, 1 RB, 80 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.70	±9
10840	AAD	5G NR (CP-OFDM, 1 RB, 90 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.67	±9
10841	AAD	5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.71	± 9
10843	AAD	5G NR (CP-OFDM, 50% RB, 15 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.49	± 9
10844	AAD	5G NR (CP-OFDM, 50% RB, 20 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.34	± 9.
10846	AAD	5G NR (CP-OFDM, 50% RB, 30 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.41	± 9
10854	AAD	5G NR (CP-OFDM, 100% RB, 10 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.34	± 9
10855	AAD	5G NR (CP-OFDM, 100% RB, 15 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.36	± 9
10856	AAD	5G NR (CP-OFDM, 100% RB, 20 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.37	19
10857	AAD	5G NR (CP-OFDM, 100% RB, 25 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.35	± 9
10858	AAD	5G NR (CP-OFDM, 100% RB, 30 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.36	±9
10859	AAD	5G NR (CP-OFDM, 100% RB, 40 MHz, OPSK, 60 kHz)	5G NR FR1 TDD	8.34	± 9.
10860	AAD	5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.41	± 9.

Page 21 of 23

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

Unless other was baled une solute of the state and the state report refer only to the sample(s) lessed and state and provide the sample(s) lessed and state prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488

www.sgs.com.tw



Report No: TESA2207000200ES Rev: 01 Page: 27 of 28

10861	AAD	5G NR (CP-OFDM, 100% RB, 60 MHz, QPSK, 60 kHz)	COND FOL TOD	10.00	1.0
10863	AAD	5G NR (CP-OFDM, 100% RB, 80 MHz, QPSK, 60 KHz)	5G NR FR1 TDD	8.40	±9.
10864	AAD	5G NR (CP-OFDM, 100% RB, 90 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.41	±9.
10865	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 80 kHz)	5G NR FR1 TDD	8.37	±9.
10866	AAD	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.41	± 9.
10868	AAD	5G NR (DFT-s-OFDM, 100% RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	± 9.
10869	AAD	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 120 kHz)	5G NR FR1 TDD	5.89	±9.
10870	AAD	5G NR (DFT-s-OFDM, 100% RB, 100 MHz, QFSK, 120 kHz)	5G NR FR2 TDD	5.75	±9.
10871	AAD	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, 16QAM, 120 KHz)	5G NR FR2 TDD	5.86	±9.
10872	AAD	5G NR (DFT-s-OFDM, 100% RB, 100 MHz, 160AM, 120 KHz)	5G NR FR2 TDD 5G NR FR2 TDD	5.75	±9.
10873	AAD	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, 84QAM, 120 KHz)		6.52	±9.
10874	AAD	5G NR (DFT-s-OFDM, 100% RB, 100 MHz, 64QAM, 120 KHz)	5G NR FR2 TDD	6.61	±9.
10875	AAD	5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	6.65	±9.
10876	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, OPSK, 120 kHz)	5G NR FR2 TDD	7.78	±9.
10877	AAD	5G NR (CP-OFDM, 1 RB, 100 MHz, 16QAM, 120 KHz)	5G NR FR2 TDD	8.39	±9.
10878	AAD		5G NR FR2 TDD	7.95	± 9.
10879	AAD.	5G NR (CP-OFDM, 100% RB, 100 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	8.41	± 9.
10879	AAD	5G NR (CP-OFDM, 1 RB, 100 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	8.12	± 9.
10880	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, 64QAM, 120 kHz) 5G NR (DFT-s-OFDM, 1 RB, 50 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	8.38	± 9.
10882	AAD		5G NR FR2 TDD	5.75	± 9.
10882	AAD	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	5.96	± 9.
10883	AAD	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	6.57	± 9.
		5G NR (DFT-s-OFDM, 100% RB, 50 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	6.53	±9.
10885	AAD	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	6.61	± 9.
10886	AAD	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	6.65	±9,
10887	AAD	5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	7,78	± 9.
10888	AAD	5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	8.35	± 9.
10889	AAD	5G NR (CP-OFDM, 1 RB, 50 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	8.02	± 9.
10890	AAD	5G NR (CP-OFDM, 100% RB, 50 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	8.40	±9.
10891	AAD	5G NR (CP-OFDM, 1 RB, 50 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	8.13	± 9.
10892	AAD	5G NR (CP-OFDM, 100% RB, 50 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	8.41	± 9.
10897	AAC	5G NR (DFT-s-OFDM, 1 RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.66	± 9.
10898	AAB	5G NR (DFT-s-OFDM, 1 RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.67	± 9.
10899	AAB	5G NR (DFT-s-OFDM, 1 RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.67	± 9.
10900	AAB	5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	±9.
10901	AAB	5G NR (DFT-s-OFDM, 1 RB, 25 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	± 9.
10902	AAB	5G NR (DFT-s-OFDM, 1 RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	±9.
10903	AAB	5G NR (DFT-s-OFDM, 1 RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	±9.
10904	AAB	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	± 9.
10905	AAB	5G NR (DFT-s-OFDM, 1 RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	± 9.
10906	AAB	5G NR (DFT-s-OFDM, 1 RB, 80 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	± 9.
10907	AAC	5G NR (DFT-s-OFDM, 50% RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.78	± 9.
10908	AAB	5G NR (DFT-s-OFDM, 50% RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.93	± 9.
10909	AAB	5G NR (DFT-s+OFDM, 50% RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.96	± 9.
10910	AAB	5G NR (DFT-s-OFDM, 50% RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.83	± 9.
10911	AAB	5G NR (DFT-s-OFDM, 50% RB, 25 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.93	± 9.
10912	AAB	5G NR (DFT-s-OFDM, 50% RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	± 9.
10913	AAB	5G NR (DFT-s-OFDM, 50% RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	± 9.
10914	AAB	5G NR (DFT-s-OFDM, 50% RB, 50 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.85	± 9.
10915	AAB	5G NR (DFT-s-OFDM, 50% RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.83	± 9.
10916	AAB	5G NR (DFT-s-OFDM, 50% RB, 80 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.87	± 9
10917	AAB	5G NR (DFT-s-OFDM, 50% RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.94	± 9.
10918	AAC	5G NR (DFT-s-OFDM, 100% RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.86	± 9.
10919	AAB	5G NR (DFT-s-OFDM, 100% RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.86	± 9.
10920	AAB	5G NR (DFT-s-OFDM, 100% RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.87	± 9.
10921	AAB	5G NR (DFT-s-OFDM, 100% RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	± 9.
10922	AAB	5G NR (DFT-s-OFDM, 100% RB, 25 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.82	± 9.

Certificate No: EX3-7686 Oct21

Page 22 of 23

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

Unless other was baled une solute of the state and the state report refer only to the sample(s) lessed and state and provide the sample(s) lessed and state prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488

```
www.sgs.com.tw
```



10923	AAB	5G NR (DFT-s-OFDM, 100% RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	± 9.6
10924	AAB	5G NR (DFT-s-OFDM, 100% RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	± 9.6
10925	AAB	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.95	± 9.6
10926	AAB	5G NR (DFT-s-OFDM, 100% RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	± 9.6
10927	AAB	5G NR (DFT-s-OFDM, 100% RB, 80 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.94	± 9.6
10928	AAC	5G NR (DFT-s-OFDM, 1 RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.52	± 9.6
10929	AAC	5G NR (DFT-s-OFDM, 1 RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.52	± 9.6
10930	AAC	5G NR (DFT-s-OFDM, 1 RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.52	± 9.6
10931	AAC	5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.51	± 9.6
10932	AAC	5G NR (DFT-s-OFDM, 1 RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.51	± 9.6
10933	AAC	5G NR (DFT-s-OFDM, 1 RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.51	± 9.6
10934	AAC	5G NR (DFT-s-OFDM, 1 RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.51	± 9.6
10935	AAD	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.51	± 9.6
10936	AAC	5G NR (DFT-s-OFDM, 50% RB, 5 MHz, QPSK, 15 kHz)			-
10937	AAC	5G NR (DFT-s-OFDM, 50% RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.90	± 9.6
10938	AAC	5G NR (DFT-s-OFDM, 50% RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.77	± 9.6
10939	AAC	5G NR (DFT-s-OFDM, 50% RB, 15 MHz, QPSK, 15 KHz) 5G NR (DFT-s-OFDM, 50% RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.90	±9.6
10939	AAC	5G NR (DFT-s-OFDM, 50% RB, 25 MHz, QPSK, 15 KHz)	5G NR FR1 FDD	5.82	±9.6
10941	AAC	5G NR (DFT-S-OFDM, 50% RB, 25 MHz, QPSK, 15 KHz) 5G NR (DFT-S-OFDM, 50% RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.89	± 9.6
10942	AAC	5G NR (DFT-s-OFDM, 50% RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 FDD 5G NR FR1 FDD	5.83	± 9.6
10943	AAD	5G NR (DFT-s-OFDM, 50% RB, 50 MHz, QPSK, 15 kHz)			
10944	AAC	5G NR (DFT-s-OFDM, 100% RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.95	± 9.6
10945	AAC	5G NR (DFT-s-OFDM, 100% RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.81	± 9.6
10946	AAC	5G NR (DFT-s-OFDM, 100% RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.85	± 9.6
10947	AAC	5G NR (DFT-s-OFDM, 100% RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.83	± 9.6
10948	AAC	5G NR (DFT-s-OFDM, 100% RB, 25 MHz, QPSK, 15 KHz)	5G NR FR1 FDD	5.87	± 9.6
10949	AAC	5G NR (DFT-s-OFDM, 100% RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.94	± 9.6
10950	AAC	5G NR (DFT-s-OFDM, 100% RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.87	± 9.6
10951	AAD	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.94	± 9.6
10952	AAA	5G NR DL (CP-OFDM, TM 3.1, 5 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	5.92	± 9.6
10953	AAA	5G NR DL (CP-OFDM, TM 3.1, 5 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.25	± 9.6
10954	AAA	5G NR DL (CP-OFDM, TM 3.1, 15 MHz, 84-QAM, 15 kHz)	5G NR FR1 FDD	8,15	± 9.6
10955	AAA	5G NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.23	± 9.6
10956	AAA	5G NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 15 KHz) 5G NR DL (CP-OFDM, TM 3.1, 5 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.42	± 9.6
10957	AAA	5G NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 30 KHz)	5G NR FR1 FDD	8.14	± 9.6
10958	AAA	5G NR DL (CP-OFDM, TM 3.1, 10 MHz, 84-QAM, 30 kHz)	5G NR FR1 FDD	8,31	± 9.6
10959	AAA	5G NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 KHz)	5G NR FR1 FDD	8.61	± 9.6
10959	AAC	5G NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 30 KHz)	5G NR FR1 FDD	8.33	± 9.6
10961	AAB		5G NR FR1 TDD	9.32	± 9.6
10961	AAB	5G NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	9.36	± 9.6
10962	AAB	5G NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 15 KHz)	5G NR FR1 TDD	9.40	± 9.6
10963	AAB	5G NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	9.55	± 9.6
10964	AAG	5G NR DL (CP-OFDM, TM 3.1, 5 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.29	± 9.6
10965		5G NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.37	± 9.6
	AAB	5G NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.55	± 9.6
10967	AAB	5G NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.42	± 9,6
		5G NR DL (CP-OFDM, TM 3.1, 100 MHz, 84-QAM, 30 kHz)	5G NR FR1 TDD	9.49	± 9.6
10972	AAB	5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	11.59	± 9,6
1.		5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	9.06	± 9.6
10974	AAB	5G NR (CP-OFDM, 100% RB, 100 MHz, 256-QAM, 30 kHz)	5G NR FR1 TDD	10.28	± 9.6
10978	AAA.	ULLA BDR	ULLA	2.23	± 9.6
10979	AAA	ULLA HDR4	ULLA	7.02	± 9.6
10980	AAA	ULLA HDR8	ULLA	8.82	± 9.6
10981	AAA	ULLA HDRp4	ULLA	1.50	± 9.6
10982	AAA	ULLA HDRp8	ULLA	1.44	± 9.6

Page 23 of 23

- End of report -

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

Unless other was baled une solute of the state and the state report refer only to the sample(s) lessed and state and provide the sample(s) lessed and state prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488

www.sgs.com.tw