

FCC RF Test Report

APPLICANT : Lenovo (Shanghai) Electronics Technology Co., Ltd.
EQUIPMENT : Portable Tablet Computer
BRAND NAME : Lenovo
MODEL NAME : TB360ZJ
FCC ID : O57TB360ZJ
STANDARD : 47 CFR Part 2, 27Q
CLASSIFICATION : Licensed Non-Broadcast Station Transmitter (TNB)
TEST DATE(S) : Mar. 28, 2023 ~ Apr. 03, 2023

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu

Province 215300 People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY..... 3
SUMMARY OF TEST RESULT 4
1 GENERAL DESCRIPTION 5
1.1 Applicant 5
1.2 Manufacturer 5
1.3 Product Feature of Equipment Under Test 5
1.4 Product Specification of Equipment Under Test 5
1.5 Modification of EUT 6
1.6 Re-use of Measured Data 6
1.7 Maximum EIRP and Emission Designator 8
1.8 Testing Site 8
1.9 Test Software 8
1.10 Applied Standards 9
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 10
2.1 Test Mode 10
2.2 Connection Diagram of Test System 10
2.3 Support Unit used in test configuration and system 11
2.4 Frequency List of Low/Middle/High Channels 11
3 CONDUCTED TEST ITEMS 12
3.1 Measuring Instruments 12
3.2 Test Setup 12
3.3 Test Result of Conducted Test 12
3.4 Conducted Output Power Measurement 12
3.5 EIRP 13
4 RADIATED TEST ITEMS 14
4.1 Measuring Instruments 14
4.2 Test Setup 14
4.3 Test Result of Radiated Test 15
4.4 Radiated Spurious Emission Measurement 16
5 LIST OF MEASURING EQUIPMENT 17
6 UNCERTAINTY OF EVALUATION 18
APPENDIX A. TEST RESULTS OF CONDUCTED TEST
APPENDIX B. TEST RESULTS OF RADIATED TEST
APPENDIX C. TEST SETUP PHOTOGRAPHS
APPENDIX D. REFERENCE REPORT



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG312017C	Rev. 01	Initial issue of report	May 15, 2023

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	—	Report Only	-
3.5	§27.50 (k)(3)	EIRP	EIRP < 1W (30dBm)	PASS	-
4.4	§2.1053 §27.53 (n)(2)	Radiated Spurious Emission	-13dBm/MHz	PASS	Under limit 44.42 dB at 6912.000 MHz

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

1 General Description

1.1 Applicant

Lenovo (Shanghai) Electronics Technology Co., Ltd.

Section 304-305, Building No. 4, # 222, Meiyue Road, China (Shanghai) Pilot Free Trade Zone

1.2 Manufacturer

Lenovo PC HK Limited

23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay, Hong Kong, China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Portable Tablet Computer
Brand Name	Lenovo
Model Name	TB360ZJ
FCC ID	O57TB360ZJ
IMEI Code	Conducted: 861392060006920 Radiation: 861392060006946
HW Version	TB360ZJ
SW Version	TB360ZJ_RF01_0316
EUT Stage	Identical Prototype

1.4 Product Specification of Equipment Under Test

Product Feature	
Tx/Rx Frequency	5G NR n77: 3450 MHz ~ 3550 MHz 5G NR n78: 3450 MHz ~ 3550 MHz
Bandwidth	n77: 20MHz/40MHz/100MHz n78: 60MHz/100MHz
SCS	30kHz
Antenna Type	PIFA Antenna
Antenna Gain	<p><Ant. 3>: n77: 0.32 dBi n78: 0.32 dBi</p> <p><Ant. 4>: n77: 0.09 dBi n78: 0.09 dBi</p> <p><Ant. 7>: n77: 0.13 dBi n78: 0.13 dBi</p> <p><Ant. 11>: n77: -2.11 dBi n78: -2.11 dBi</p>

Type of Modulation	CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM
--------------------	---

Remark:

1. The device supports n77/n78(1T4R) SRS resources on Ant.3/4/7/11, only the worst test data of Antenna 3 is showed in the report.
2. 5G NR support SA (n77) mode and NSA(n77/n78) mode, and supports power class 3 only.
3. The EN-DC mode combination could be referred to the product spec.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Re-use of Measured Data

1.6.1 Introduction Section

This application re-uses data collected on a similar device. The subject device of this application (Model: TB360ZJ, FCC ID: O57TB360ZJ) is electrically identical to the reference device (Model: TB360ZU, FCC ID: O57TB360ZU) for the portions of the circuitry corresponding to the data being re-used. Based on their similarity, the 47 CFR Part 2, Part 27 Subpart Q (equipment class:TNB) reuse the original model's result and do spot-check, following the FCC KDB 484596 D01 v01.

The applicant takes full responsibility that the test data as referenced in this report represent compliance for this FCC ID: O57TB360ZJ.

1.6.2 Model Difference Information

The **main** difference between FCC ID: O57TB360ZU and FCC ID: O57TB360ZJ is as below:

- Remove GSM850/1900, WCDMA Band II/IV, LTE B2/4/7/12/13/25/38/66, 5G NR n5/7/38/41/66/71, 5G NR n78 SA mode.
- Add n77 NSA mode; LTE B41 support HPUE mode;

Other differences and all the details of similarity and difference can be found in the confidential documents (TB360ZJ_Operational Description of Product Equality Declaration).

1.6.3 Reference detail Section:

Rule Part	Equipment Class	Frequency Band (MHz)	Reference FCC ID (Parent)	Reference Title	Report Title/Section
27Q	TNB (NR)	n77/n78	O57TB360ZU	FG311926I	All sections applicable for n77 SA mode except Power

1.6.4 Spot Check Verification Data Section

Conducted power test and radiated spurious emission test against the variant model based on the worst-case condition from the original model was performed in this filing to demonstrate the test data from original model remains representative for the variant model

Summary for power and RSE spot check for each rule entry and technology is listed as below:

Test Item	Mode	O57TB360ZU Parent Worst Result	O57TB360ZJ Variant Check Result	Difference (dB)
Conducted Power (dBm)	27Q n77	26.51	24.91	-1.6
Radiated Spurious Emission (dBm)	27Q N77 BW=100M	-47.19	-41.16	6.03

Conclusion:

Conducted Power and Radiated spurious emission test against the variant model based on the worst-case condition from the original model was performed in this filing to demonstrate the test data from original model remains representative for the variant model.

Based on the spot check test result, the test data from the original model is representative for the variant model. The power level and RSE spot check are shown within expected level compliant to limit line.

We confirm that the test data reuse policy of FCC KDB 484596 D01 Referencing Test Data v01 has been followed and the test data as referenced from the parent model report represents compliance with new FCC ID.

1.7 Maximum EIRP and Emission Designator

5G NR n77		PI/2 BPSK / QPSK	16QAM/64QAM/256QAM
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Maximum EIRP(W)
100	3500.01	0.3334	0.2399

ENDC B41A_n78		PI/2 BPSK / QPSK	16QAM/64QAM/256QAM
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Maximum EIRP(W)
100	3500.01	0.2985	0.2427

Note:

1. According to the maximum power between 5G NR n77 and 5G NR n78, 5G NR n77 covers 5G NR n78 mode for all test items.
2. All modulations have been tested, and only the worst test results of PSK & QAM are shown in the report.

1.8 Testing Site

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH04-KS TH01-KS	CN1257	314309

1.9 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH04-KS	AUDIX	E3	6.2009-8-24a1



1.10 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 27Q
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 Power Meas License Digital Systems D01 v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

All test items were verified and recorded according to the standards and without any deviation during the test.

2 Test Configuration of Equipment Under Test

2.1 Test Mode


Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases were recorded in this report(X Plane).

The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission

Test Items	5G NR	Bandwidth (MHz)									Modulation					RB #		Test Channel			
		20	30	40	50	60	70	80	90	100	PI/2 BPSK	QPSK	16QAM	64QAM	256 QAM	1	Full	L	M	H	
Max. Output Power	n77	v	-	v	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	v	v
	n78	-	-	-	-	v	-	-	-	v	v	v	v	v	v	v	v	v	v	v	v
E.I.R.P	n77	v	-	v	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	v	v
	n78	-	-	-	-	v	-	-	-	v	v	v	v	v	v	v	v	v	v	v	v
Radiated Spurious Emission	n77	Worst Case																		v	
Note	<ol style="list-style-type: none"> The mark "v" means that this configuration is chosen for testing The mark "-" means that this bandwidth is not supported. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. Based on engineering evaluation, only the worst modulations test results are shown in the report. Frequency Stability : Normal Voltage = 3.86V ; Low Voltage =3.60V. ; High Voltage =4.43V 																				

2.2 Connection Diagram of Test System

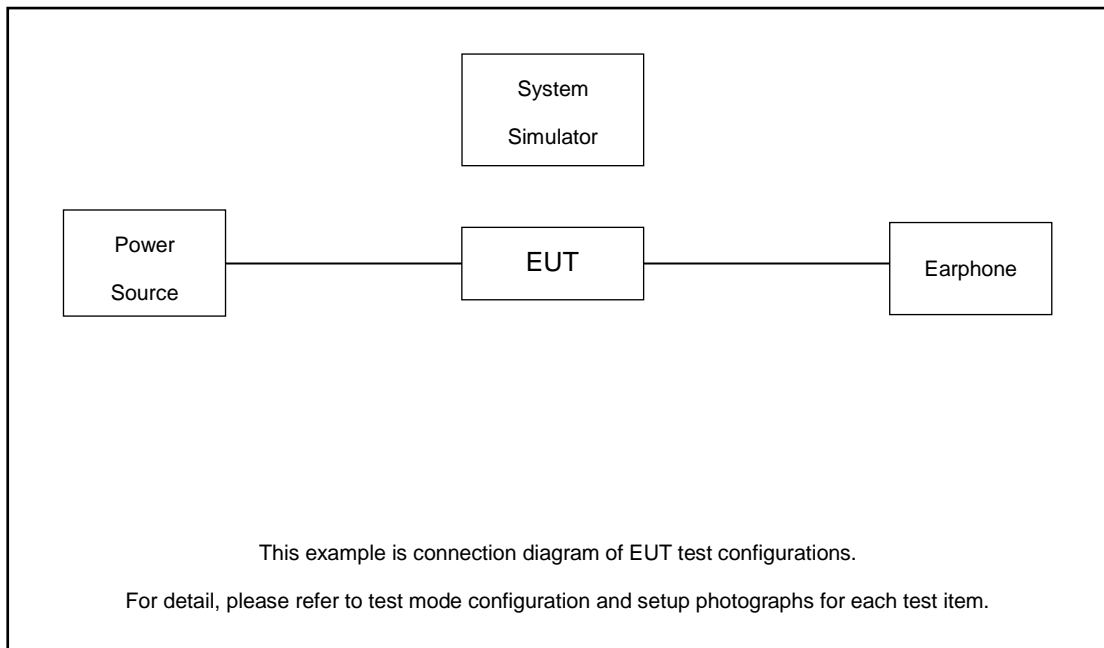

The EUT has been configuration operated in a manner tended to maximize its emission characteristics in a typical application.

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	Power Supply	GWINSTEK	PSS-2002	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8820/8821	N/A	N/A	Unshielded, 1.8 m
3.	NR Base Station	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m
4.	Earphone	N/A	N/A	N/A	N/A	N/A

2.4 Frequency List of Low/Middle/High Channels

5G n77 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	-	633334	-
	Frequency	-	3500.01	-
40	Channel	631334	633334	635332
	Frequency	3470.01	3500.01	3529.98
20	Channel	630668	633334	636000
	Frequency	3460.02	3500.01	3540

5G n78 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	-	633334	-
	Frequency	-	3500.01	-
60	Channel	632000	633334	634666
	Frequency	3480	3500.01	3519.99


3 Conducted Test Items

3.1 Measuring Instruments

See list of measuring instruments of this test report.

3.2 Test Setup

3.2.1 Conducted Output Power

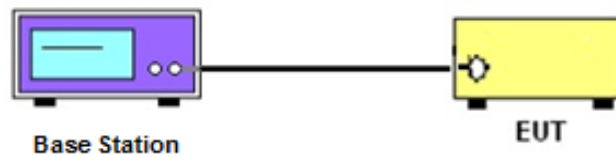

3.3 Test Result of Conducted Test

Please refer to Appendix A.

3.4 Conducted Output Power Measurement

3.4.1 Description of the Conducted Output Power Measurement

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.

3.5 EIRP

3.5.1 Description of EIRP Limit

§ 27.50 (k)(3)

Mobile devices are limited to 1Watt (30 dBm) EIRP. Mobile devices operating in these bands must employ a means for limiting power to the minimum necessary for successful communications

3.5.2 Test Procedures

1. According to KDB 412172 D01 Power Approach,
2. $EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where
 P_T = transmitter output power in dBm
 G_T = gain of the transmitting antenna in dBi
 L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


4.2.1 For radiated test below 30MHz

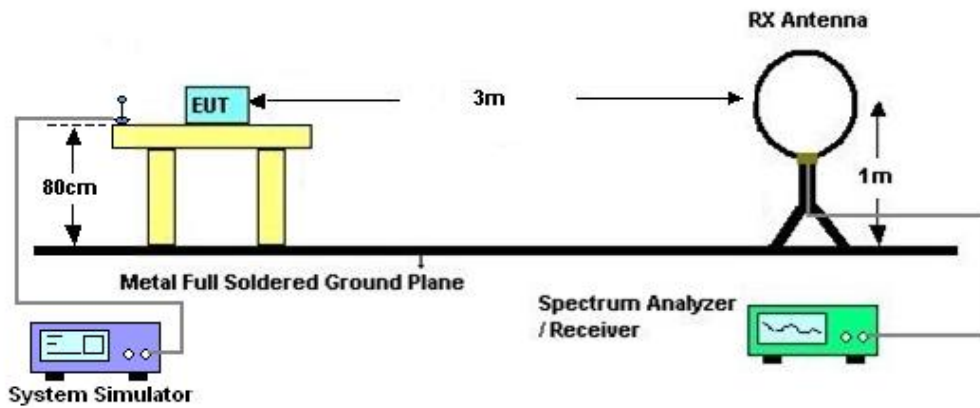

4.2.2 For radiated test from 30MHz to 1GHz

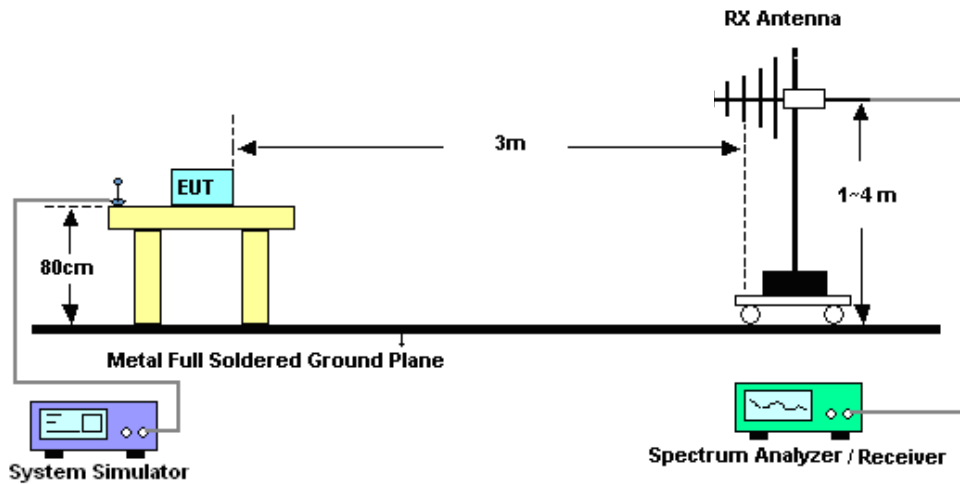

4.2.3 For radiated test above 1GHz

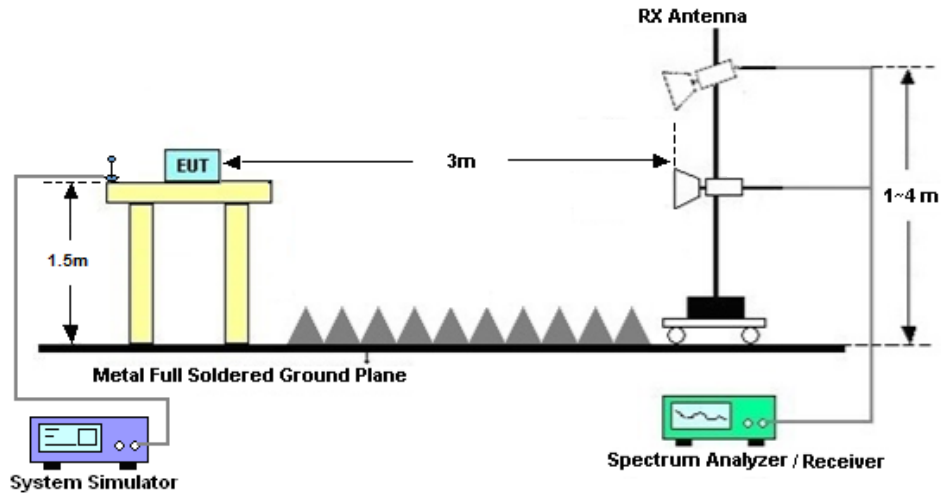

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.



4.4 Radiated Spurious Emission Measurement

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI/TIA-603-E. The power of any emission outside of the authorized operating frequency ranges shall not exceed -13 dBm/MHz.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
1. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
5. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
$$\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$$
$$\text{ERP (dBm)} = \text{EIRP} - 2.15$$
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 12, 2022	Apr. 03, 2023	Oct. 11, 2023	Conducted (TH01-KS)
Power divider	STI	STI08-0055	-	0.5~40GHz	NCR	Apr. 03, 2023	NCR	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 15, 2022	Apr. 03, 2023	Jul. 14, 2023	Conducted (TH01-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57471079	10Hz-44G,MAX 30dB	Oct. 12, 2022	Mar. 28, 2023	Oct. 11, 2023	Radiation (03CH04-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 16, 2022	Mar. 28, 2023	Oct. 15, 2023	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz-1GHz	May 24, 2022	Mar. 28, 2023	May 23, 2023	Radiation (03CH04-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	1284	1GHz~18GHz	Jan. 04, 2023	Mar. 28, 2023	Jan. 03, 2024	Radiation (03CH04-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 04, 2023	Mar. 28, 2023	Jan. 03, 2024	Radiation (03CH04-KS)
Amplifier	SONOMA	310N	187289	9KHz-1GHz	Jan. 04, 2023	Mar. 28, 2023	Jan. 03, 2024	Radiation (03CH04-KS)
Amplifier	MITEQ	EM18G40G GA	060728	18~40GHz	Jan. 04, 2023	Mar. 28, 2023	Jan. 03, 2024	Radiation (03CH04-KS)
high gain Amplifier	EM	EM01G18G A	060840	1Ghz-18Ghz	Oct. 12, 2022	Mar. 28, 2023	Oct. 11, 2023	Radiation (03CH04-KS)
Amplifier	Agilent	8449B	3008A02370	1Ghz-18Ghz	Oct. 12, 2022	Mar. 28, 2023	Oct. 11, 2023	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Mar. 28, 2023	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Mar. 28, 2023	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Mar. 28, 2023	NCR	Radiation (03CH04-KS)

NCR: No Calibration Required

6 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	±0.46 dB

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.3dB
---	-------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.8dB
---	-------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.8dB
---	-------

----- THE END -----



Appendix A. Test Results of Conducted Test

Test Engineer :	Simle Wang	Temperature :	22~23°C
		Relative Humidity :	40~42%

FR1 n77(Ant3)

Transmitter Conducted Output Power And EIRP, (G_T-L_C)=0.32dB

NR Band	SCS	BandWidth	Arfcn	Freq(MHz)	Modulation	RB	Conducted Power(dBm)	EIRP(dBm)	EIRP(W)
77	30	20	630668	3460.02	DFT-s-OFDM PI/2 BPSK	1@1	24.61	24.93	0.3112
77	30	20	630668	3460.02	DFT-s-OFDM QPSK	1@1	24.71	25.03	0.3184
77	30	20	630668	3460.02	DFT-s-OFDM 16 QAM	1@1	23.78	24.1	0.2570
77	30	20	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	24.51	24.83	0.3041
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	1@1	24.58	24.9	0.3090
77	30	20	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	23.67	23.99	0.2506
77	30	20	636000	3540	DFT-s-OFDM PI/2 BPSK	1@1	24.79	25.11	0.3243
77	30	20	636000	3540	DFT-s-OFDM QPSK	1@1	24.65	24.97	0.3141
77	30	20	636000	3540	DFT-s-OFDM 16 QAM	1@1	23.94	24.26	0.2667
77	30	40	631334	3470.01	DFT-s-OFDM PI/2 BPSK	1@1	24.68	25	0.3162
77	30	40	631334	3470.01	DFT-s-OFDM QPSK	1@1	24.71	25.03	0.3184
77	30	40	631334	3470.01	DFT-s-OFDM 16 QAM	1@1	23.81	24.13	0.2588
77	30	40	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	24.56	24.88	0.3076
77	30	40	633334	3500.01	DFT-s-OFDM QPSK	1@1	24.62	24.94	0.3119
77	30	40	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	23.68	24	0.2512
77	30	40	635332	3529.98	DFT-s-OFDM PI/2 BPSK	1@1	24.61	24.93	0.3112
77	30	40	635332	3529.98	DFT-s-OFDM QPSK	1@1	24.69	25.01	0.3170
77	30	40	635332	3529.98	DFT-s-OFDM 16 QAM	1@1	23.76	24.08	0.2559
77	30	100	633334	3500.01	DFT-s-OFDM PI/2 BPSK	135@67	24.58	24.9	0.3090
77	30	100	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	24.91	25.23	0.3334
77	30	100	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@271	24.17	24.49	0.2812
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	135@67	24.67	24.99	0.3155
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@1	24.32	24.64	0.2911
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@271	24.23	24.55	0.2851
77	30	100	633334	3500.01	DFT-s-OFDM 16 QAM	135@67	23.16	23.48	0.2228
77	30	100	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	23.48	23.8	0.2399
77	30	100	633334	3500.01	DFT-s-OFDM 16 QAM	1@271	23.26	23.58	0.2280
77	30	100	633334	3500.01	DFT-s-OFDM 64 QAM	135@67	21.66	21.98	0.1578
77	30	100	633334	3500.01	DFT-s-OFDM 64 QAM	1@1	21.72	22.04	0.1600
77	30	100	633334	3500.01	DFT-s-OFDM 64 QAM	1@271	21.6	21.92	0.1556
77	30	100	633334	3500.01	DFT-s-OFDM 256 QAM	135@67	19.65	19.97	0.0993
77	30	100	633334	3500.01	DFT-s-OFDM 256 QAM	1@1	19.66	19.98	0.0995
77	30	100	633334	3500.01	DFT-s-OFDM 256 QAM	1@271	19.55	19.87	0.0971
77	30	100	633334	3500.01	CP-OFDM QPSK	137@68	22.75	23.07	0.2028
77	30	100	633334	3500.01	CP-OFDM QPSK	1@1	22.81	23.13	0.2056
77	30	100	633334	3500.01	CP-OFDM QPSK	1@271	22.69	23.01	0.2000

FR1 EN DC 41A_n77A(Ant3)

Transmitter Conducted Output Power And EIRP, (G_T-L_C)=0.32dB

NR Band	SCS	BandWidth	Arfcn	Freq(MHz)	Modulation	RB	Conducted Power(dBm)	EIRP(dBm)	EIRP(W)
77	30	20	630668	3460.02	DFT-s-OFDM PI/2 BPSK	1@1	24.79	25.11	0.3243
77	30	20	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	24.81	25.13	0.3258
77	30	20	636000	3540	DFT-s-OFDM PI/2 BPSK	1@1	24.57	24.89	0.3083
77	30	40	631334	3470.01	DFT-s-OFDM PI/2 BPSK	1@1	24.87	25.19	0.3304
77	30	40	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	24.84	25.16	0.3281
77	30	40	635332	3529.98	DFT-s-OFDM PI/2 BPSK	1@1	24.48	24.8	0.3020
77	30	100	633334	3500.01	DFT-s-OFDM PI/2 BPSK	135@67	24.18	24.5	0.2818
77	30	100	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	24.89	25.21	0.3319
77	30	100	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@271	23.3	23.62	0.2301
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	135@67	24.19	24.51	0.2825
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@1	24.82	25.14	0.3266
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@271	23.31	23.63	0.2307
77	30	100	633334	3500.01	DFT-s-OFDM 16 QAM	135@67	23.2	23.52	0.2249
77	30	100	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	24.17	24.49	0.2812
77	30	100	633334	3500.01	DFT-s-OFDM 16 QAM	1@271	22.55	22.87	0.1936
77	30	100	633334	3500.01	DFT-s-OFDM 64 QAM	135@67	21.71	22.03	0.1596
77	30	100	633334	3500.01	DFT-s-OFDM 64 QAM	1@1	22.63	22.95	0.1972
77	30	100	633334	3500.01	DFT-s-OFDM 64 QAM	1@271	21.17	21.49	0.1409
77	30	100	633334	3500.01	DFT-s-OFDM 256 QAM	135@67	19.69	20.01	0.1002
77	30	100	633334	3500.01	DFT-s-OFDM 256 QAM	1@1	20.34	20.66	0.1164
77	30	100	633334	3500.01	DFT-s-OFDM 256 QAM	1@271	18.65	18.97	0.0789
77	30	100	633334	3500.01	CP-OFDM QPSK	1@1	23.52	23.84	0.2421

FR1 EN DC 41A_N78A(Ant3)

Transmitter Conducted Output Power And EIRP, (G_T-L_C)=0.32dB

NR Band	SCS	BandWidth	Arfcn	Freq(MHz)	Modulation	RB	Conducted Power(dBm)	EIRP(dBm)	EIRP(W)
78	30	60	632000	3480	DFT-s-OFDM PI/2 BPSK	1@1	24.43	24.75	0.2985
78	30	60	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	24.29	24.61	0.2891
78	30	60	634666	3519.99	DFT-s-OFDM PI/2 BPSK	1@1	24.3	24.62	0.2897
78	30	100	633334	3500.01	DFT-s-OFDM PI/2 BPSK	135@67	24.24	24.56	0.2858
78	30	100	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	24.43	24.75	0.2985
78	30	100	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@271	24.05	24.37	0.2735
78	30	100	633334	3500.01	DFT-s-OFDM QPSK	135@67	24.2	24.52	0.2831
78	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@1	24.24	24.56	0.2858
78	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@271	24.08	24.4	0.2754
78	30	100	633334	3500.01	DFT-s-OFDM 16 QAM	135@67	23.21	23.53	0.2254
78	30	100	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	23.53	23.85	0.2427
78	30	100	633334	3500.01	DFT-s-OFDM 16 QAM	1@271	23.33	23.65	0.2317
78	30	100	633334	3500.01	DFT-s-OFDM 64 QAM	135@67	21.65	21.97	0.1574
78	30	100	633334	3500.01	DFT-s-OFDM 64 QAM	1@1	22.02	22.34	0.1714
78	30	100	633334	3500.01	DFT-s-OFDM 64 QAM	1@271	21.69	22.01	0.1589
78	30	100	633334	3500.01	DFT-s-OFDM 256 QAM	135@67	19.67	19.99	0.0998
78	30	100	633334	3500.01	DFT-s-OFDM 256 QAM	1@1	19.52	19.84	0.0964
78	30	100	633334	3500.01	DFT-s-OFDM 256 QAM	1@271	19.3	19.62	0.0916
78	30	100	633334	3500.01	CP-OFDM QPSK	1@1	22.73	23.05	0.2018



Appendix B. Test Results of Radiated Test

Radiated Spurious Emission

Test Engineer :	Carry Xu	Temperature :	23~25°C
		Relative Humidity :	41~42%

Pre-scanned harmonic for the different antenna combinations, we choose the worst antenna mode to perform final test and record in the report.

EN-DC_41A_n77A / LTE 10MHz + NR 100MHz / QPSK / ANT2 (LTE) & ANT3(NR)								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	6912	-60.50	-13	-47.50	-70.71	3.03	13.24	H
	10356	-61.15	-13	-48.15	-70.60	3.56	13.01	H
	13818	-59.73	-13	-46.73	-69.25	3.92	13.44	H
	6912	-57.42	-13	-44.42	-67.63	3.03	13.24	V
	10356	-58.10	-13	-45.10	-67.55	3.56	13.01	V
	13818	-60.00	-13	-47.00	-69.52	3.92	13.44	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



Appendix D. Reference Report

Please refer to Sporton report number FG311926I which is issued separately.