

Appendix D. SAR Test Setup Photos

Body Exposure Condition




Bottom Face, Test Separation 0 mm



Edge1, Test Separation 0 mm



Edge2, Test Separation 0 mm

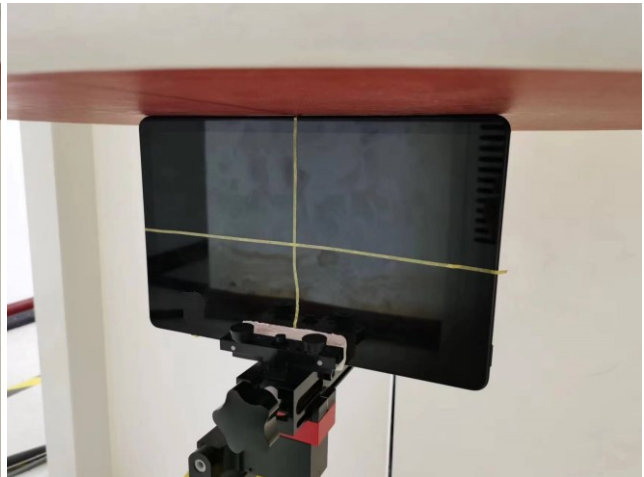

Edge3, Test Separation 0 mm



Edge4, Test Separation 0 mm



Bottom Face, Test Separation 11 mm(Sensor off)



Edge1, Test Separation 11 mm(Sensor off)



Bottom Face, Test Separation 20 mm(Sensor off)



Edge2, Test Separation 20 mm(Sensor off)



Bottom Face, Test Separation 22 mm(Sensor off)



Edge1, Test Separation 22 mm(Sensor off)




Bottom Face, Test Separation 18 mm(Sensor off)



Edge1, Test Separation 16 mm(Sensor off)

Antenna Location

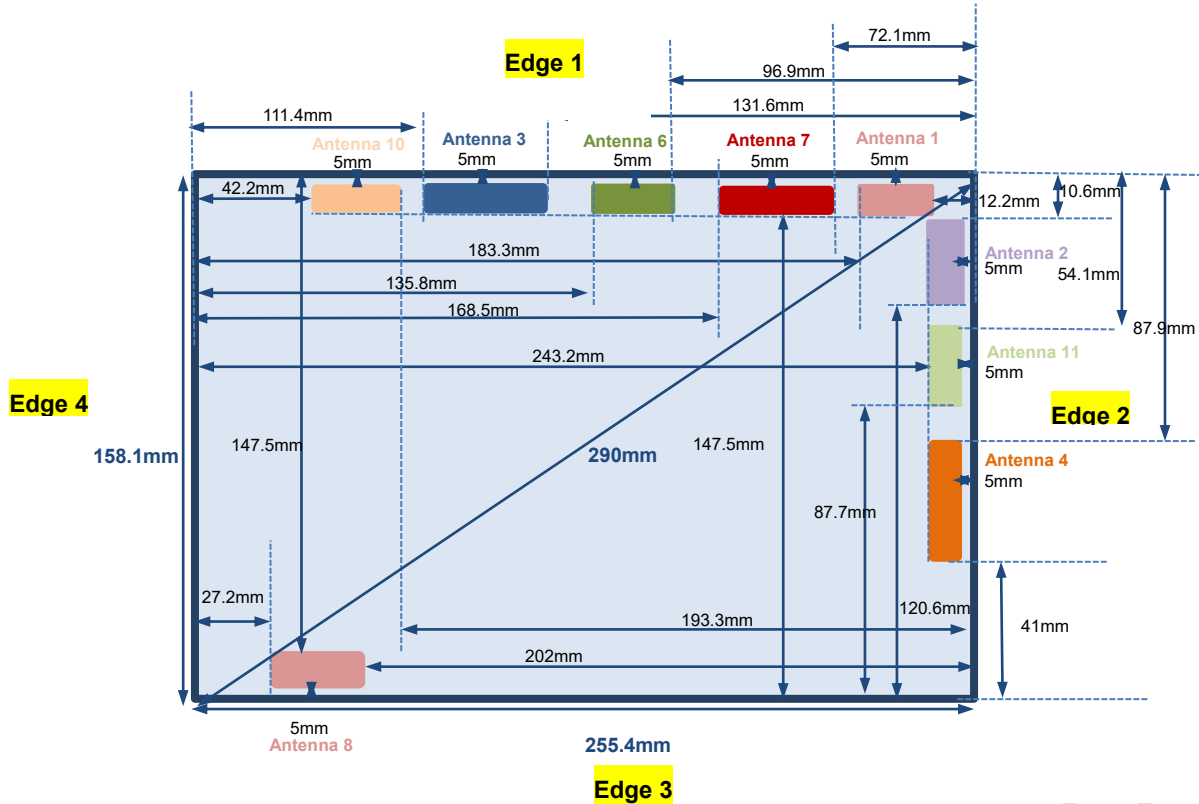

Front Face

Antenna	Support Band
Antenna 1	GSM: 850<TX/RX> WCDMA: B5<TX/RX> LTE: B5/12/13/26<TX/RX> NR: n5/n71<TX/RX>
Antenna 2	GSM: 1900<TX/RX> WCDMA: B2/4<TX/RX> LTE: B2/4/7/25/66/38/41 <TX/RX> NR: n2/n66/n38/n41 <TX/RX>
Antenna 3	LTE: B42 <TX/RX> NR: n77/78<TX/RX>
Antenna 4	NR: n41/n77/78<RX>
Antenna 6	LTE: B4/7/66<TX/RX> NR: n7/n66/n41<TX/RX>
Antenna 7	NR: n77/78<RX>
Antenna 8	NR: n41<RX>
Antenna 10	Bluetooth <TX/RX> WIFI 2.4GHz <TX/RX> WIFI 5GHz<TX/RX>
Antenna 11	NR: n77/78<RX>

Note:

1. LTE Band 4 at Antenna 6 was limited to inter-band uplink CA only, and LTE Band 7/66 at Antenna 6 was limited to EN-DC combination and inter-band uplink CA only.
2. 5GNR n41 at Antenna 4/8 and 5GNR n77/78 at Antenna 4/7/11 supports SRS (Sounding Reference Signal) functionality only.