

**01\_FR1 n71\_20M\_QPSK\_1RB\_1Offset\_Bottom Face\_0mm\_Ch136100**

Communication System: Band n71; Frequency: 680.5

Medium: HSL. Medium parameters used:  $f= 680.5$  MHz;  $\sigma= 0.862$  S/m;  $\epsilon_r = 42.7$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(10.95, 10.95, 10.95); Calibrated: 2022-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2022-10-26
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151
- Measurement Software: cDASY6 V6.6.0.13926


**Area Scan (90.0 mm x 120.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.962 W/kg; SAR (10g) = 0.532 W/kg;

**Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm):** Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.02 dB

SAR (1g) = 0.974 W/kg; SAR (10g) = 0.533 W/kg;

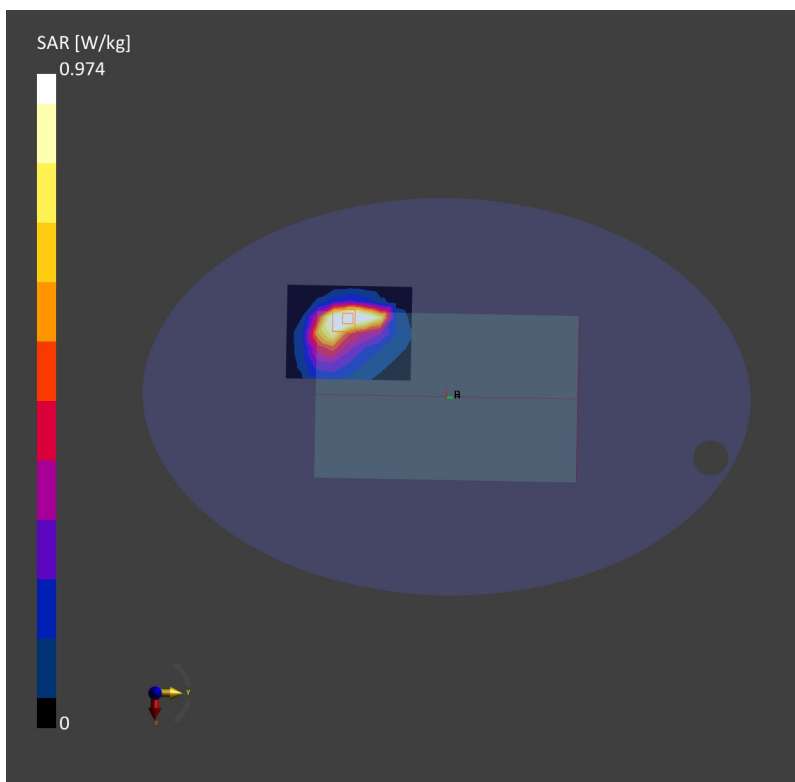

## 02\_LTE Band 12\_10M\_QPSK\_1RB\_0Offset\_Bottom Face\_0mm\_Ch23095

Communication System: Band 12, E-UTRA/FDD; Frequency: 707.5

Medium: HSL. Medium parameters used:  $f=707.5$  MHz;  $\sigma=0.863$  S/m;  $\epsilon_r=42.5$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(10.95, 10.95, 10.95); Calibrated: 2022-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2022-10-26
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151
- Measurement Software: cDASY6 V6.6.0.13926


**Area Scan (90.0 mm x 120.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.925 W/kg; SAR (10g) = 0.570 W/kg;

**Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm):** Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = -0.01 dB

SAR (1g) = 0.908 W/kg; SAR (10g) = 0.482 W/kg;

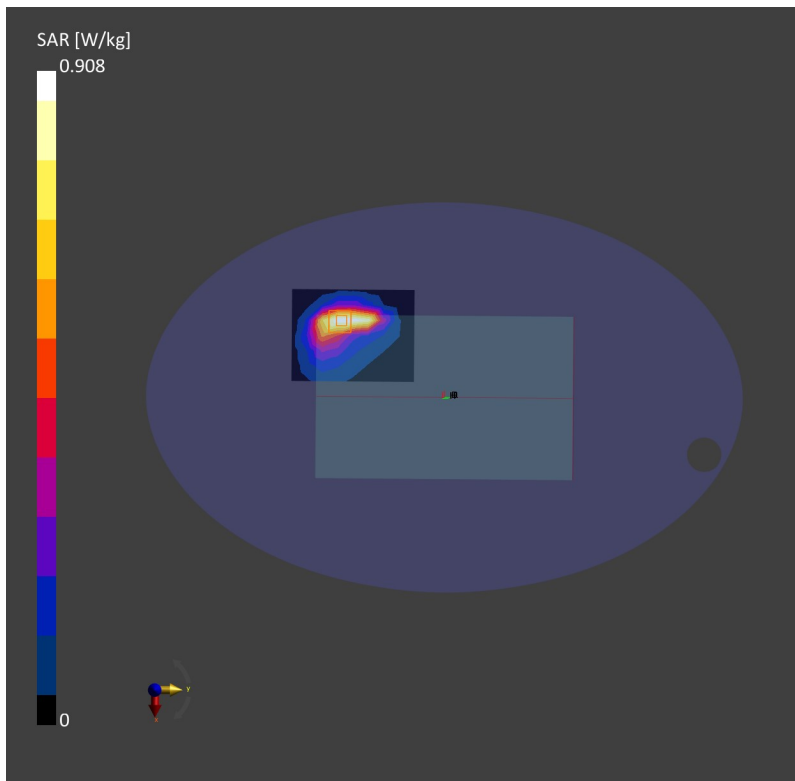

### 03\_LTE Band 13\_10M\_QPSK\_1RB\_0Offset\_Bottom Face\_0mm\_Ch23230

Communication System: Band 13, E-UTRA/FDD; Frequency: 782.0

Medium: HSL. Medium parameters used:  $f = 782.0$  MHz;  $\sigma = 0.896$  S/m;  $\epsilon_r = 42.4$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(10.95, 10.95, 10.95); Calibrated: 2022-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2022-10-26
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151
- Measurement Software: cDASY6 V6.6.0.13926


**Area Scan (90.0 mm x 120.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.920 W/kg; SAR (10g) = 0.560 W/kg;

**Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm):** Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = -0.01 dB

SAR (1g) = 0.902 W/kg; SAR (10g) = 0.535 W/kg;

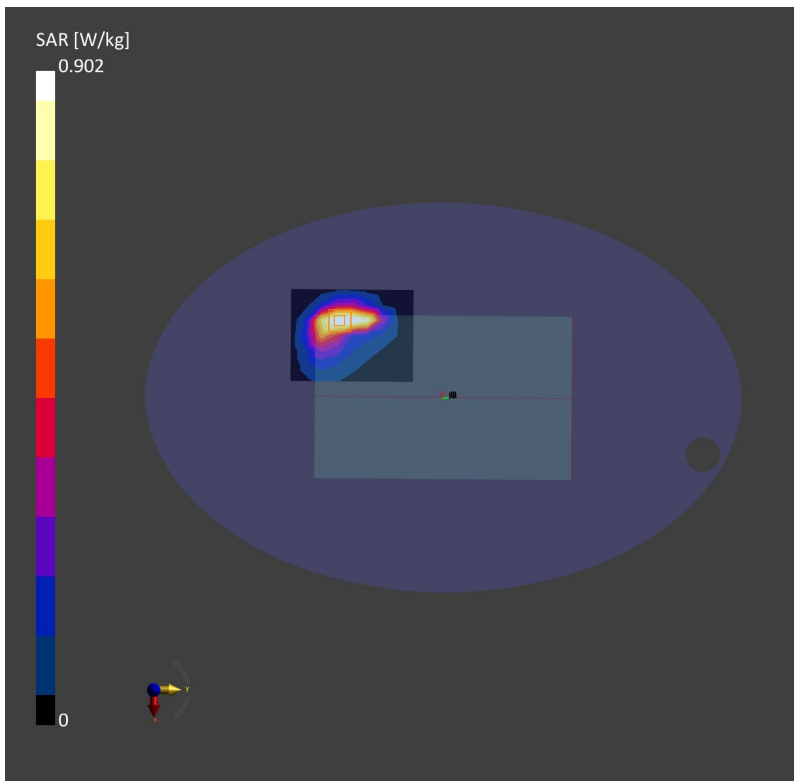

#### 04\_GSM850\_GPRS (2 Tx slots)\_Bottom Face\_0mm\_Ch189

Communication System: GSM 850; Frequency: 836.4

Medium: HSL. Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.913$  S/m;  $\epsilon_r = 41.9$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(10.57, 10.57, 10.57); Calibrated: 2022-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2022-10-26
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151
- Measurement Software: cDASY6 V6.6.0.13926


**Area Scan (90.0 mm x 120.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.716 W/kg; SAR (10g) = 0.456 W/kg;

**Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm):** Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.02 dB

SAR (1g) = 0.899 W/kg; SAR (10g) = 0.458 W/kg;

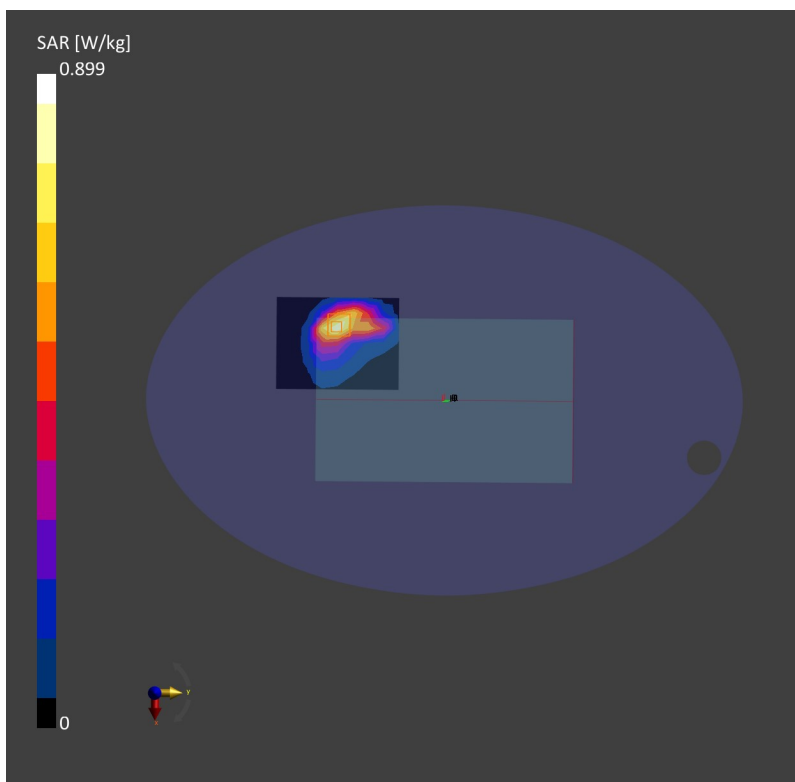

## 05\_WCDMA V\_RMC 12.2Kbps\_Bottom Face\_0mm\_Ch4182


Communication System: Band 5, UTRA/FDD; Frequency: 836.4  
Medium: HSL. Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.913$  S/m;  $\epsilon_r = 41.9$   
Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

### DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(10.57, 10.57, 10.57); Calibrated: 2022-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2022-10-26
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151
- Measurement Software: cDASY6 V6.6.0.13926

**Area Scan (90.0 mm x 120.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm  
SAR (1g) = 0.831 W/kg; SAR (10g) = 0.510 W/kg;

**Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm):** Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm  
Power Drift = -0.18 dB  
SAR (1g) = 0.929 W/kg; SAR (10g) = 0.493 W/kg;

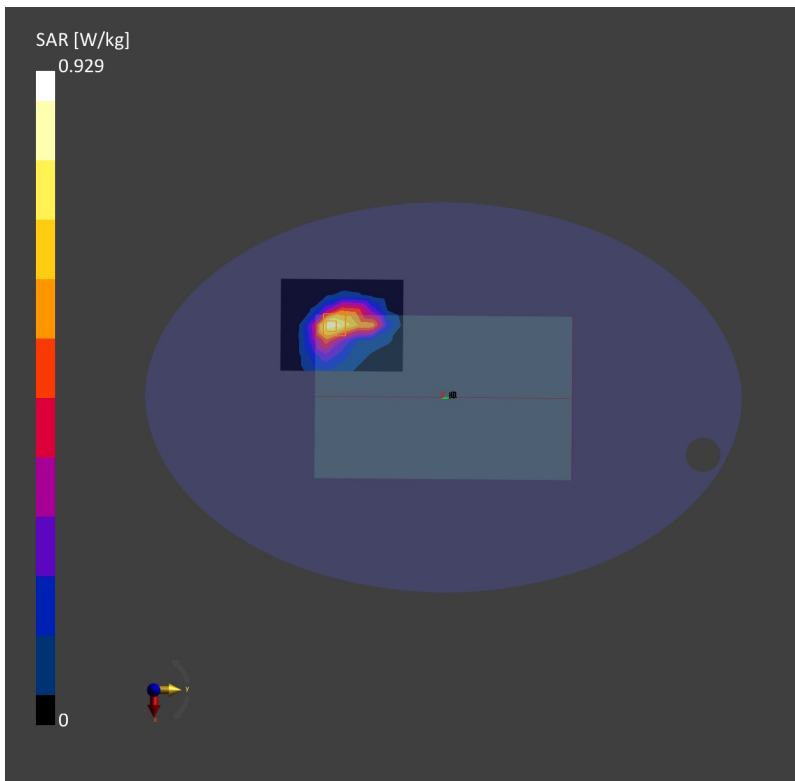

## 06\_LTE Band 26\_15M\_QPSK\_1RB\_0Offset\_Bottom Face\_0mm\_Ch26865

Communication System: Band 26 E-UTRA/FDD; Frequency: 831.5

Medium: HSL. Medium parameters used:  $f= 831.5$  MHz;  $\sigma= 0.909$  S/m;  $\epsilon_r = 41.9$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(10.57, 10.57, 10.57); Calibrated: 2022-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2022-10-26
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151
- Measurement Software: cDASY6 V6.6.0.13926


**Area Scan (90.0 mm x 120.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.935 W/kg; SAR (10g) = 0.565 W/kg;

**Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm):** Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = -0.05 dB

SAR (1g) = 0.950 W/kg; SAR (10g) = 0.489 W/kg;

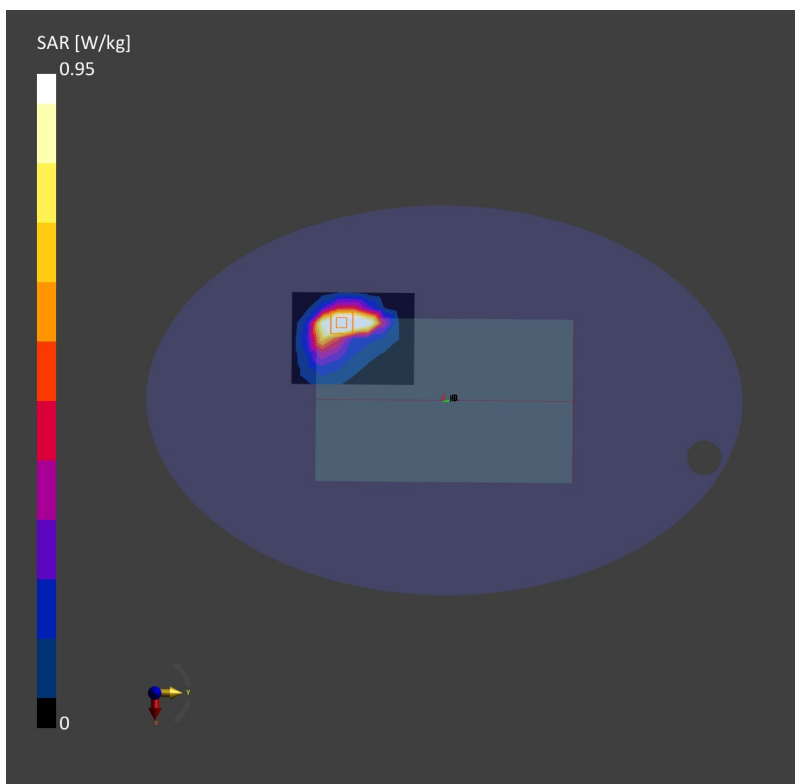

**07\_FR1 n5\_20M\_QPSK\_1RB\_1Offset\_Edge 1\_0mm\_Ch167300**

Communication System: Band n5; Frequency: 836.5

Medium: HSL. Medium parameters used:  $f= 836.5$  MHz;  $\sigma= 0.913$  S/m;  $\epsilon_r = 41.9$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(10.57, 10.57, 10.57); Calibrated: 2022-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2022-10-26
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151
- Measurement Software: cDASY6 V6.6.0.13926


**Area Scan (60.0 mm x 90.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.05 W/kg; SAR (10g) = 0.550 W/kg;

**Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm):** Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.05 dB

SAR (1g) = 1.04 W/kg; SAR (10g) = 0.501 W/kg;

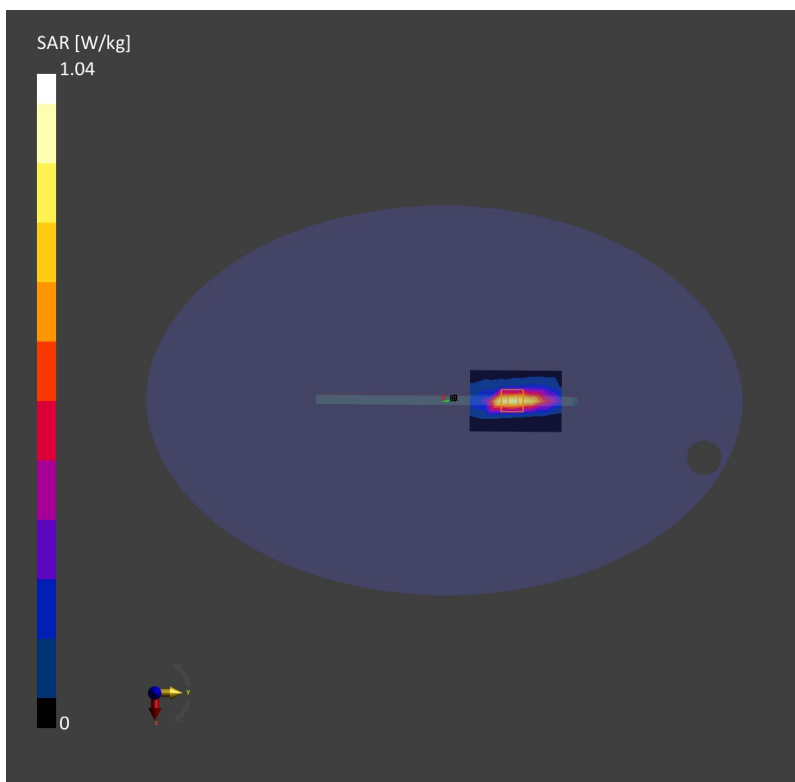

## 08\_WCDMA IV\_RMC 12.2Kbps\_Bottom Face\_0mm\_Ch1413

Communication System: Band 4, UTRA/FDD; Frequency: 1732.6

Medium: HSL. Medium parameters used:  $f= 1732.6$  MHz;  $\sigma= 1.30$  S/m;  $\epsilon_r = 40.3$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(9.01, 9.01, 9.01); Calibrated: 2022-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2022-10-26
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151
- Measurement Software: cDASY6 V6.6.0.13926


**Area Scan (90.0 mm x 90.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.733 W/kg; SAR (10g) = 0.386 W/kg;

**Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm):** Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = -0.05 dB

SAR (1g) = 0.928 W/kg; SAR (10g) = 0.423 W/kg;

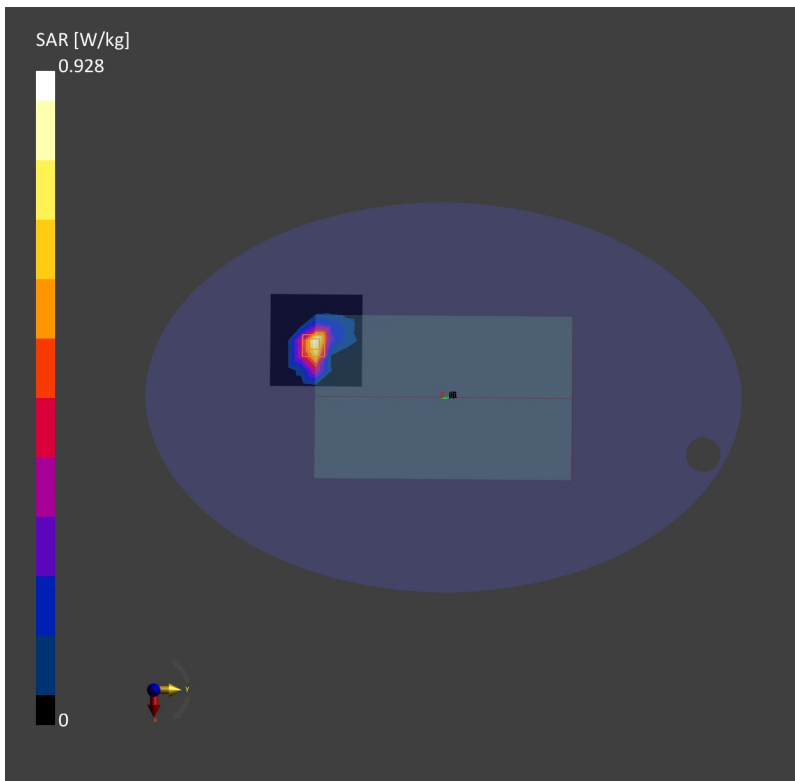



**09\_LTE Band 66\_20M\_QPSK\_1RB\_0Offset\_Bottom Face\_0mm\_Ch132322**


Communication System: Band 66, E-UTRA/FDD; Frequency: 1745.0  
Medium: HSL. Medium parameters used:  $f=1745.0$  MHz;  $\sigma=1.31$  S/m;  $\epsilon_r=40.2$   
Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

**DASY6 Configuration:**

- Probe: EX3DV4 - SN7764; ConvF(9.01, 9.01, 9.01); Calibrated: 2022-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2022-10-26
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151
- Measurement Software: cDASY6 V6.6.0.13926

**Area Scan (90.0 mm x 90.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm  
SAR (1g) = 0.842 W/kg; SAR (10g) = 0.424 W/kg;

**Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm):** Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm  
Power Drift = 0.18 dB  
SAR (1g) = 0.923 W/kg; SAR (10g) = 0.423 W/kg;

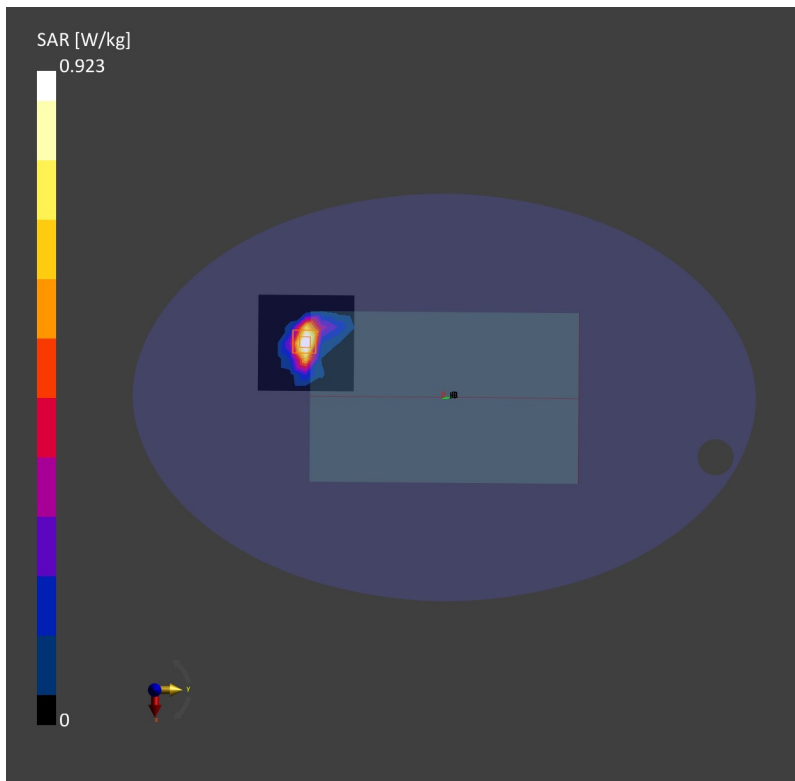

## 10\_FR1 n66\_40M\_QPSK\_1RB\_1Offset\_Bottom Face\_0mm\_Ch349000

Communication System: Band n66; Frequency: 1745.0

Medium: HSL. Medium parameters used:  $f=1745.0$  MHz;  $\sigma=1.31$  S/m;  $\epsilon_r=40.2$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(9.01, 9.01, 9.01); Calibrated: 2022-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2022-10-26
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151
- Measurement Software: cDASY6 V6.6.0.13926


**Area Scan (90.0 mm x 120.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.881 W/kg; SAR (10g) = 0.449 W/kg;

**Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm):** Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = -0.04 dB

SAR (1g) = 0.991 W/kg; SAR (10g) = 0.462 W/kg;

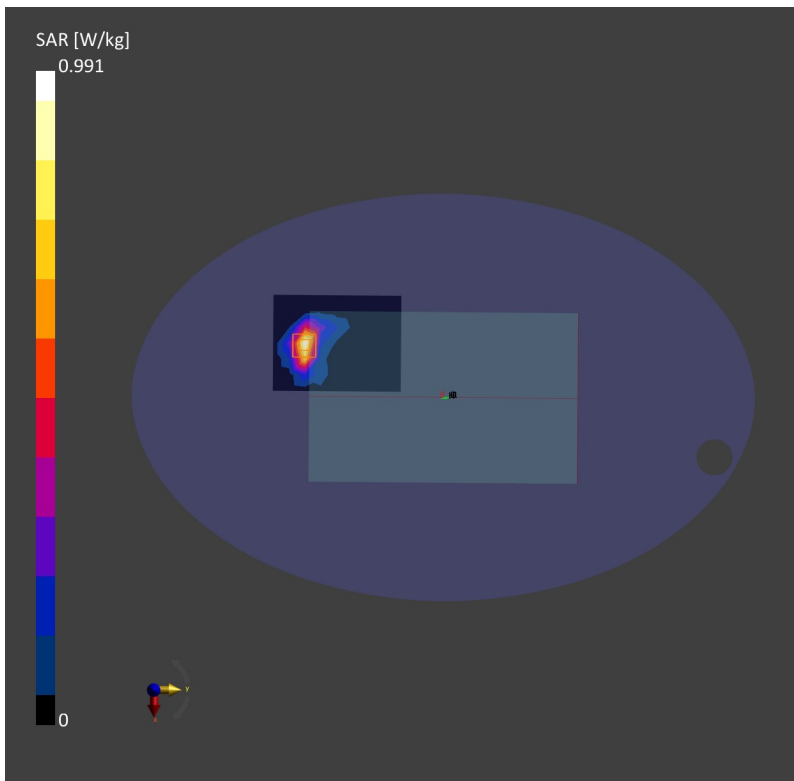

## 11\_GSM1900\_GPRS (2 Tx slots)\_Bottom Face\_0mm\_Ch661

Communication System: PCS 1900; Frequency: 1880.0

Medium: HSL. Medium parameters used:  $f= 1880.0$  MHz;  $\sigma= 1.40$  S/m;  $\epsilon_r = 40.1$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(8.58, 8.58, 8.58); Calibrated: 2022-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2022-10-26
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151
- Measurement Software: cDASY6 V6.6.0.13926


**Area Scan (90.0 mm x 120.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.931 W/kg; SAR (10g) = 0.427 W/kg;

**Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm):** Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.05 dB

SAR (1g) = 0.954 W/kg; SAR (10g) = 0.439 W/kg;

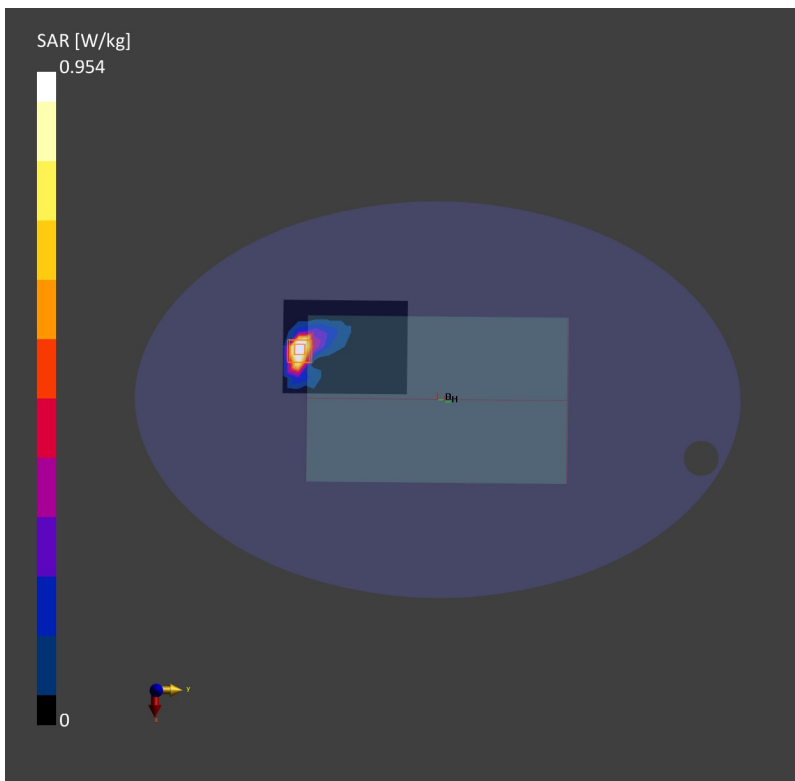

## 12\_WCDMA II\_RMC 12.2Kbps\_Bottom Face\_0mm\_Ch9400

Communication System: Band 2, UTRA/FDD; Frequency: 1880.0

Medium: HSL. Medium parameters used:  $f= 1880.0$  MHz;  $\sigma= 1.40$  S/m;  $\epsilon_r = 40.1$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(8.58, 8.58, 8.58); Calibrated: 2022-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2022-10-26
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151
- Measurement Software: cDASY6 V6.6.0.13926


**Area Scan (90.0 mm x 90.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.01 W/kg; SAR (10g) = 0.463 W/kg;

**Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm):** Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = -0.02 dB

SAR (1g) = 0.949 W/kg; SAR (10g) = 0.418 W/kg;

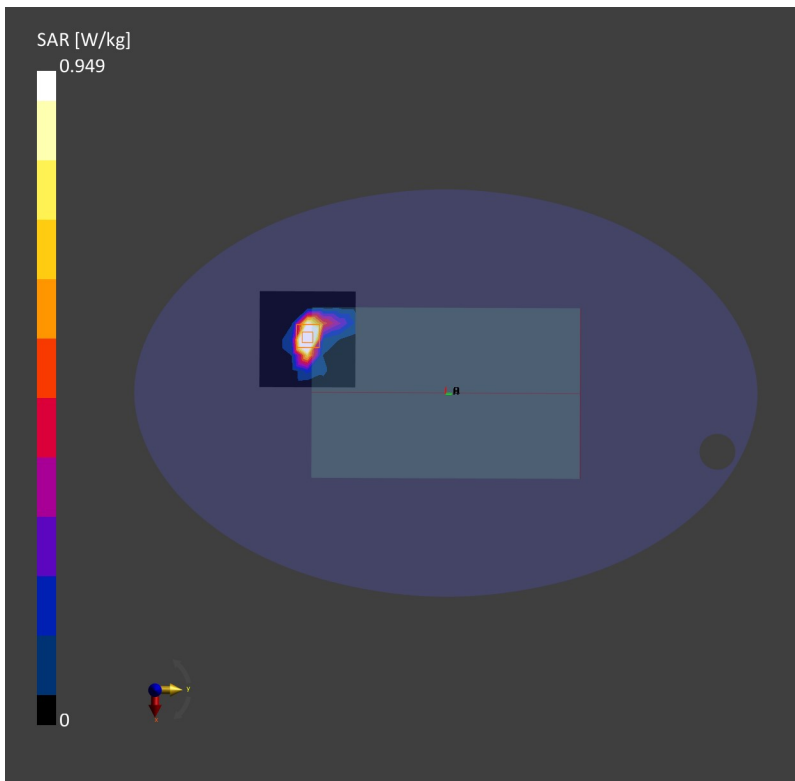

### 13\_LTE Band 25\_20M\_QPSK\_1RB\_0Offset\_Bottom Face\_0mm\_Ch26340


Communication System: Band 25, E-UTRA/FDD; Frequency: 1880.0  
Medium: HSL. Medium parameters used:  $f= 1880.0$  MHz;  $\sigma= 1.40$  S/m;  $\epsilon_r = 40.1$   
Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

#### DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(8.58, 8.58, 8.58); Calibrated: 2022-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2022-10-26
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151
- Measurement Software: cDASY6 V6.6.0.13926

**Area Scan (90.0 mm x 120.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm  
SAR (1g) = 0.970 W/kg; SAR (10g) = 0.457 W/kg;

**Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm):** Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm  
Power Drift = 0.05 dB  
SAR (1g) = 1.03 W/kg; SAR (10g) = 0.465 W/kg;

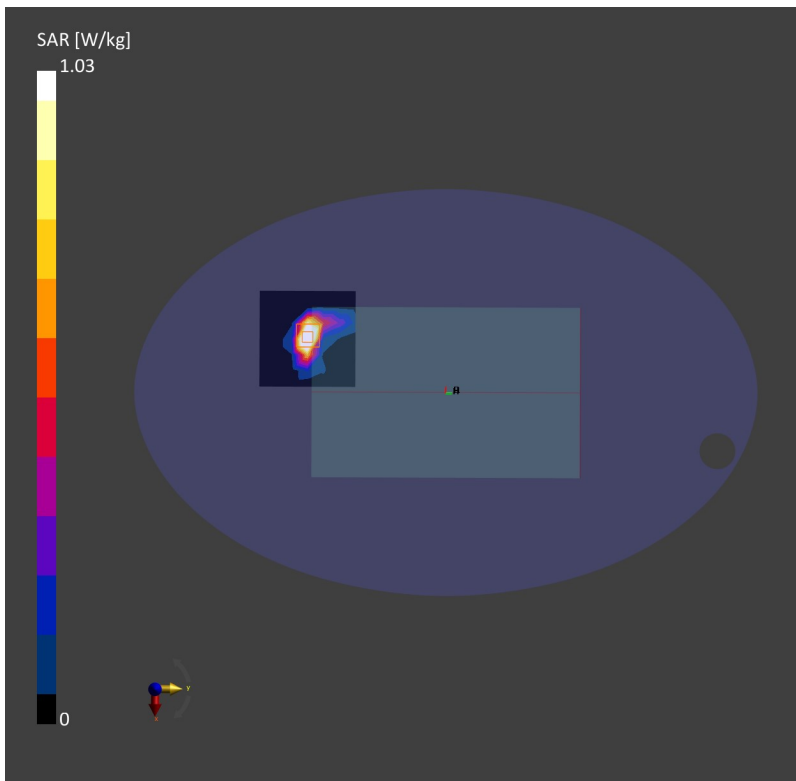

## 14\_LTE Band 7\_20M\_QPSK\_1RB\_0Offset\_Edge 2\_0mm\_Ch21100

Communication System: Band 7, E-UTRA/FDD; Frequency: 2535.0

Medium: HSL. Medium parameters used:  $f= 2535.0$  MHz;  $\sigma= 1.96$  S/m;  $\epsilon_r = 40.7$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(7.99, 7.99, 7.99); Calibrated: 2022-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2022-10-26
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151
- Measurement Software: cDASY6 V6.6.0.13926


**Area Scan (96.0 mm x 96.0 mm):** Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.895 W/kg; SAR (10g) = 0.344 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = 0.04 dB

SAR (1g) = 0.953 W/kg; SAR (10g) = 0.353 W/kg;

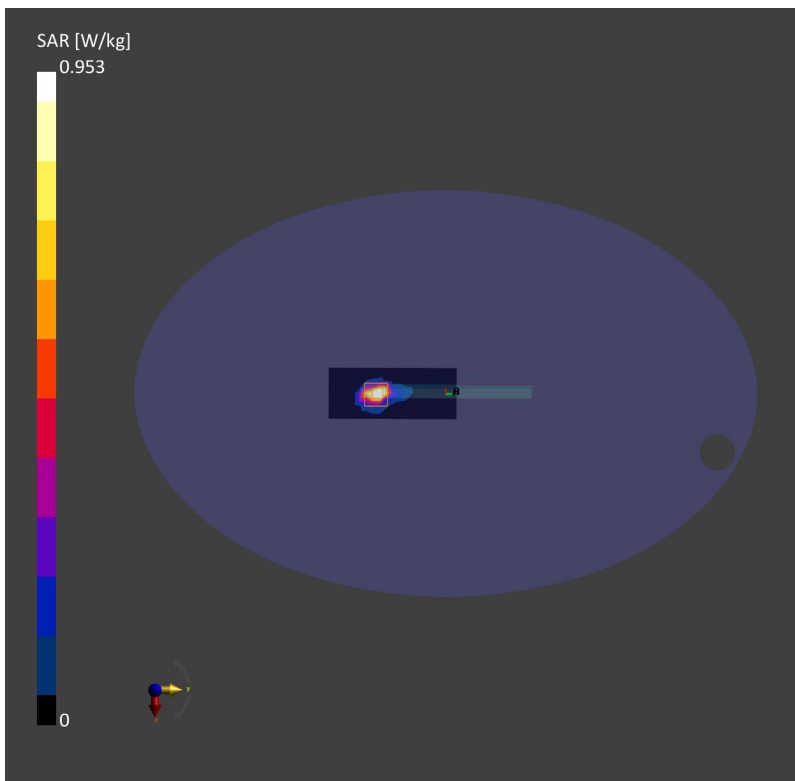

## 15\_LTE Band 41\_20M\_QPSK\_1RB\_0Offset\_Edge 2\_0mm\_Ch40620


Communication System: Band 41, E-UTRA/TDD; Frequency: 2593.0  
Medium: HSL. Medium parameters used:  $f= 2593.0$  MHz;  $\sigma= 2.00$  S/m;  $\epsilon_r = 40.6$   
Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

### DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(7.99, 7.99, 7.99); Calibrated: 2022-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2022-10-26
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151
- Measurement Software: cDASY6 V6.6.0.13926

**Area Scan (96.0 mm x 96.0 mm):** Measurement Grid: 12.0 mm x 12.0 mm  
SAR (1g) = 0.946 W/kg; SAR (10g) = 0.317 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm  
Power Drift = 0.07 dB  
SAR (1g) = 1.01 W/kg; SAR (10g) = 0.324 W/kg;

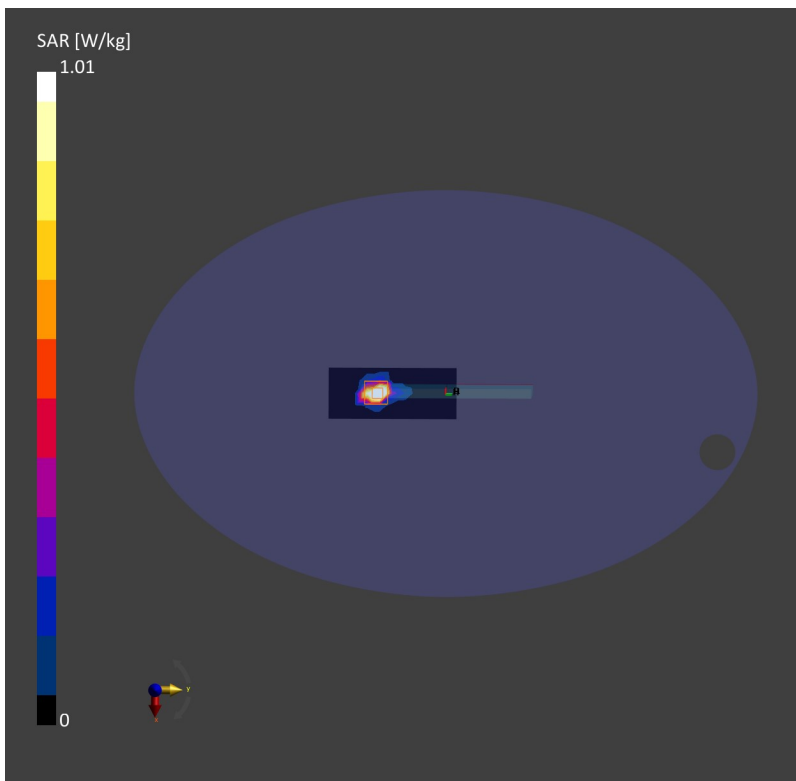

## 16\_FR1 n7\_40M\_QPSK\_1RB\_1Offset\_Edge 2\_0mm\_Ch507000

Communication System: Band n7; Frequency: 2535.0

Medium: HSL. Medium parameters used:  $f= 2535.0$  MHz;  $\sigma= 1.96$  S/m;  $\epsilon_r = 40.7$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(7.99, 7.99, 7.99); Calibrated: 2022-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2022-10-26
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151
- Measurement Software: cDASY6 V6.6.0.13926


**Area Scan (48.0 mm x 72.0 mm):** Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.726 W/kg; SAR (10g) = 0.285 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = 0.01 dB

SAR (1g) = 0.960 W/kg; SAR (10g) = 0.338 W/kg;

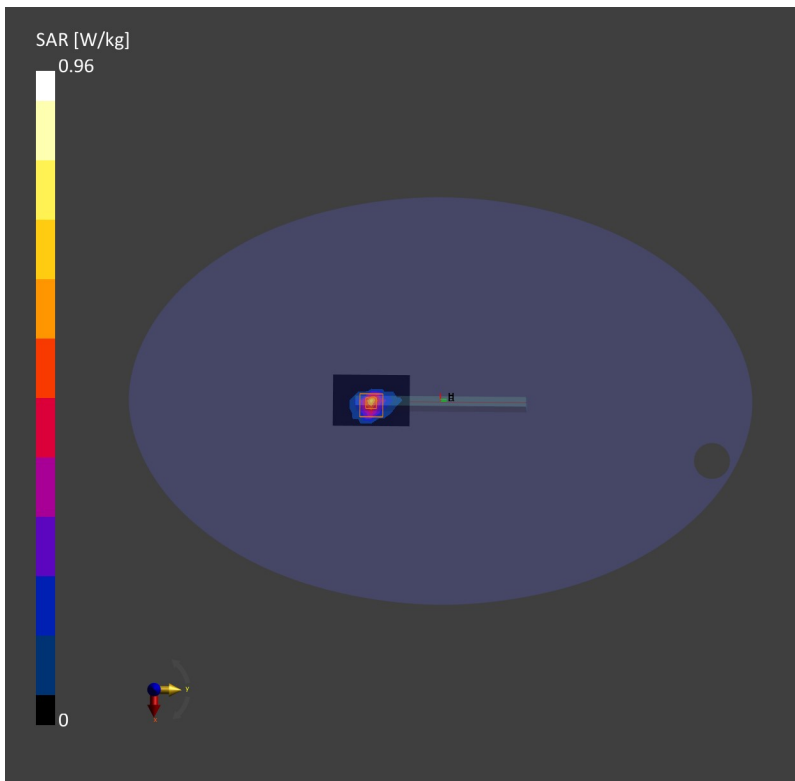



**17\_FR1 n41 HPUE\_100M\_QPSK\_1RB\_1Offset\_Edge 2\_0mm\_Ch518598**

Communication System: Band n41; Frequency: 2593.0

Medium: HSL. Medium parameters used:  $f= 2593.0$  MHz;  $\sigma= 2.00$  S/m;  $\epsilon_r = 40.6$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(7.99, 7.99, 7.99); Calibrated: 2022-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2022-10-26
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151
- Measurement Software: cDASY6 V6.6.0.13926


**Area Scan (48.0 mm x 120.0 mm):** Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.881 W/kg; SAR (10g) = 0.312 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = -0.01 dB

SAR (1g) = 0.945 W/kg; SAR (10g) = 0.322 W/kg;

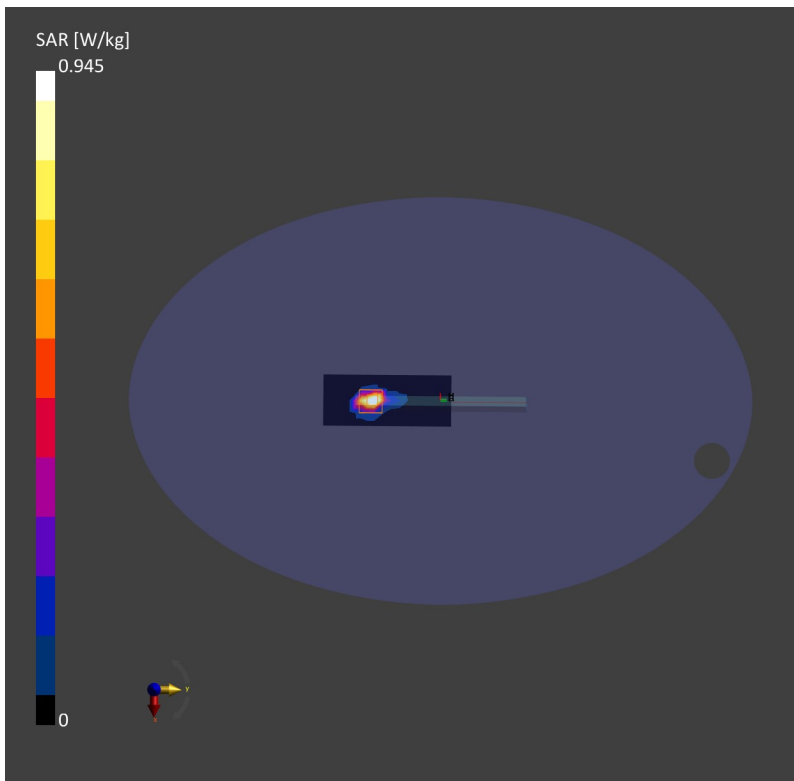

## 18\_LTE Band 42\_20M\_QPSK\_1RB\_0Offset\_Bottom Face\_0mm\_Ch42590

Communication System: Band 42, E-UTRA/TDD; Frequency: 3500.0

Medium: HSL. Medium parameters used:  $f= 3500.0$  MHz;  $\sigma= 2.81$  S/m;  $\epsilon_r = 38.7$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(7.45, 7.45, 7.45); Calibrated: 2022-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2022-10-26
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151
- Measurement Software: cDASY6 V6.6.0.13926


**Area Scan (80.0 mm x 80.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.564 W/kg; SAR (10g) = 0.215 W/kg;

**Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.03 dB

SAR (1g) = 0.660 W/kg; SAR (10g) = 0.217 W/kg;

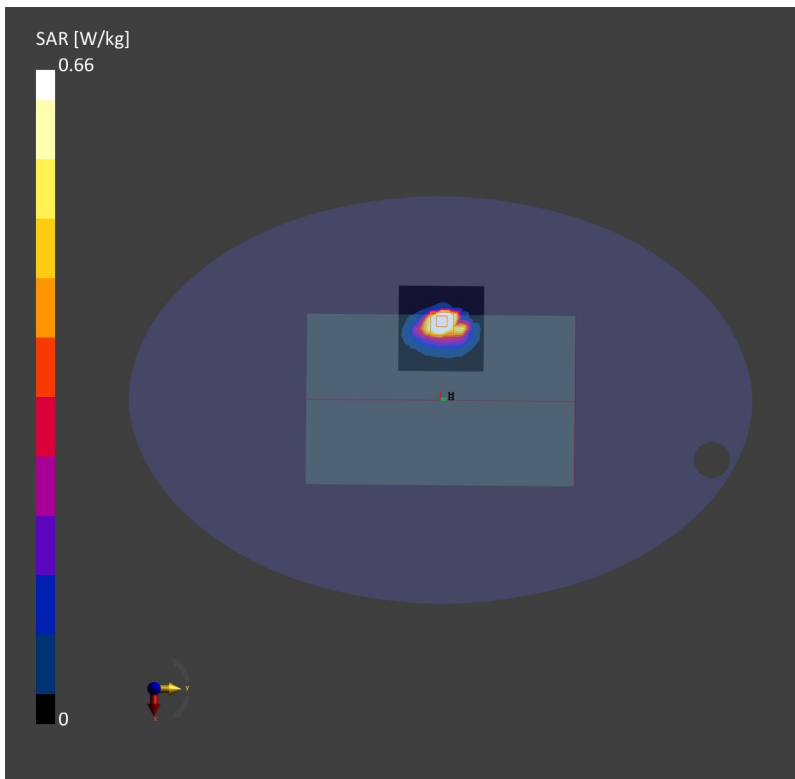

Date: 2023-03-25

## 19\_Part27O FR1 n77\_100M\_QPSK\_135RB\_69Offset\_Bottom Face\_0mm\_Ch656000

Communication System: Band n77; Frequency: 3840.0

Medium: HSL. Medium parameters used:  $f= 3840.0$  MHz;  $\sigma= 3.22$  S/m;  $\epsilon_r = 37.7$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(6.66, 6.66, 6.66); Calibrated: 2022-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2022-10-26
- Phantom: ELIV8.0 (20deg probe tilt); Serial: 2151
- Measurement Software: cDASY6 V6.6.0.13926


**Area Scan (80.0 mm x 80.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.887 W/kg; SAR (10g) = 0.297 W/kg;

**Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.16 dB

SAR (1g) = 0.852 W/kg; SAR (10g) = 0.296 W/kg;

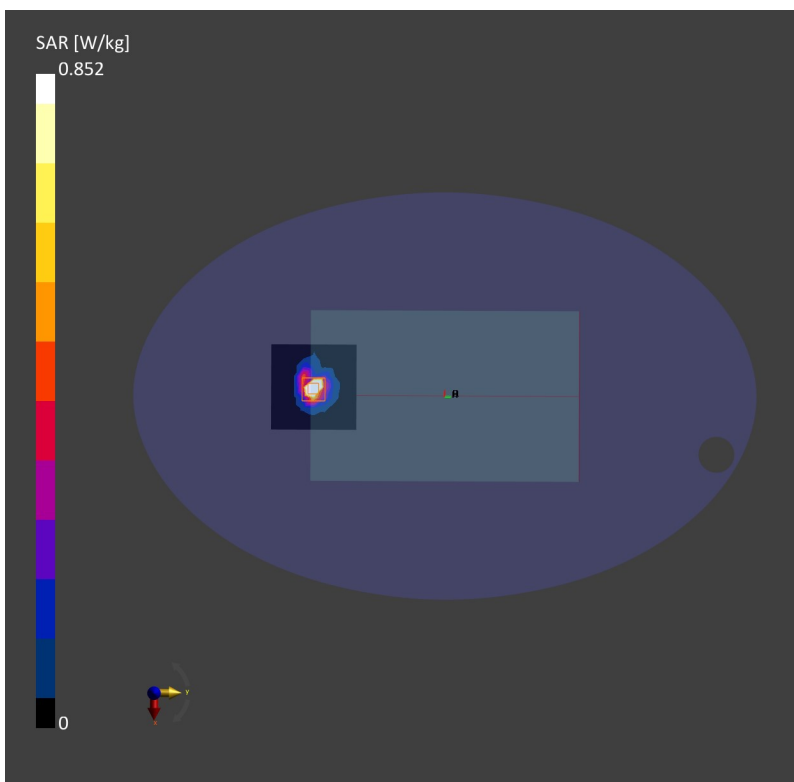

## 20\_WLAN2.4G\_802.11b 1Mbps\_Bottom Face\_0mm\_Ch11


Communication System: WLAN 2.4GHz; Frequency: 2462.0  
Medium: HSL. Medium parameters used:  $f= 2462.0$  MHz;  $\sigma= 1.82$  S/m;  $\epsilon_r = 38.6$   
Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

### DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(8.25, 8.25, 8.25); Calibrated: 2022-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2022-10-26
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151
- Measurement Software: cDASY6 V6.6.0.13926

**Area Scan (90.0 mm x 90.0 mm):** Measurement Grid: 12.0 mm x 12.0 mm  
SAR (1g) = 0.358 W/kg; SAR (10g) = 0.155 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm  
Power Drift = 0.02 dB  
SAR (1g) = 0.414 W/kg; SAR (10g) = 0.152 W/kg;

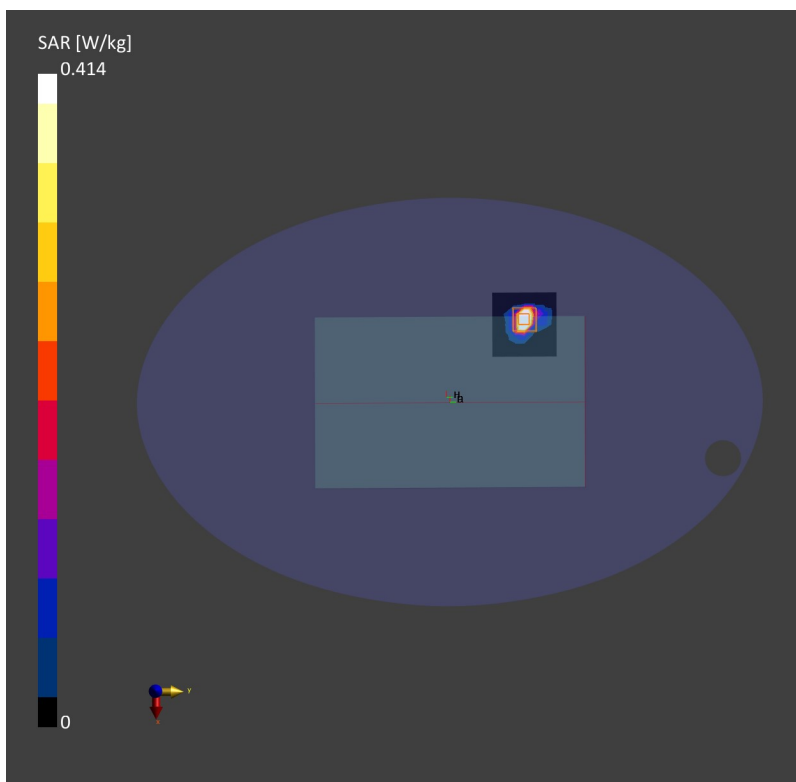

## 21\_Bluetooth\_1Mbps\_Bottom Face\_0mm\_Ch0

Communication System: ISM 2.4 GHz Band; Frequency: 2402.0

Medium: HSL. Medium parameters used:  $f= 2402.0$  MHz;  $\sigma= 1.79$  S/m;  $\epsilon_r = 38.7$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(8.25, 8.25, 8.25); Calibrated: 2022-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2022-10-26
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151
- Measurement Software: cDASY6 V6.6.0.13926


**Area Scan (72.0 mm x 96.0 mm):** Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.078 W/kg; SAR (10g) = 0.028 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = -0.02 dB

SAR (1g) = 0.089 W/kg; SAR (10g) = 0.030 W/kg;

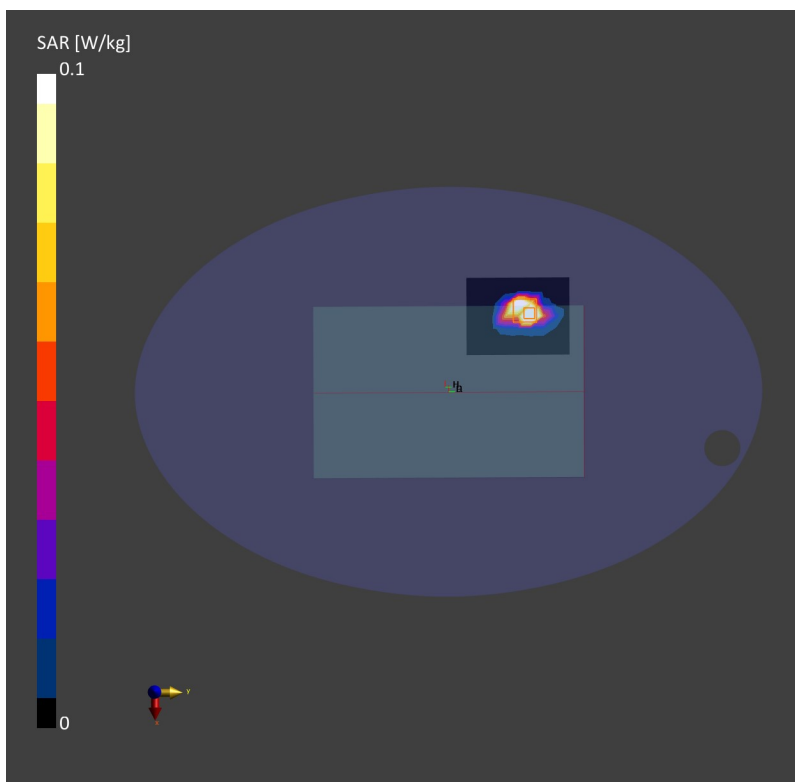

## 22\_WLAN5Hz\_802.11ac-VHT80 MCS0\_Bottom Face\_0mm\_Ch58

Communication System: WLAN 5GHz; Frequency: 5290.0

Medium: HSL. Medium parameters used:  $f= 5290.0$  MHz;  $\sigma= 4.59$  S/m;  $\epsilon_r = 36.1$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(5.65, 5.65, 5.65); Calibrated: 2022-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2022-10-26
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151
- Measurement Software: cDASY6 V6.6.0.13926


**Area Scan (60.0 mm x 60.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.480 W/kg; SAR (10g) = 0.129 W/kg;

**Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.03 dB

SAR (1g) = 0.515 W/kg; SAR (10g) = 0.114 W/kg;

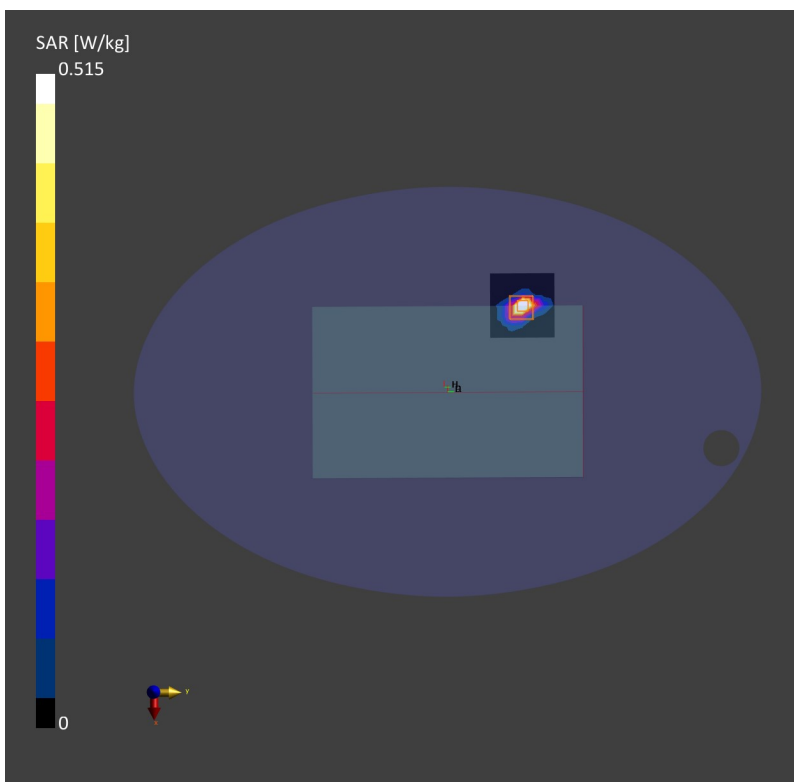

## 23\_WLAN5Hz\_802.11ac-VHT80 MCS0\_Bottom Face\_0mm\_Ch106

Communication System: WLAN 5GHz; Frequency: 5530.0

Medium: HSL. Medium parameters used:  $f= 5530.0$  MHz;  $\sigma= 4.84$  S/m;  $\epsilon_r = 35.6$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(4.9, 4.9, 4.9); Calibrated: 2022-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2022-10-26
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151
- Measurement Software: cDASY6 V6.6.0.13926


**Area Scan (60.0 mm x 60.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.602 W/kg; SAR (10g) = 0.131 W/kg;

**Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.06 dB

SAR (1g) = 0.556 W/kg; SAR (10g) = 0.120 W/kg;

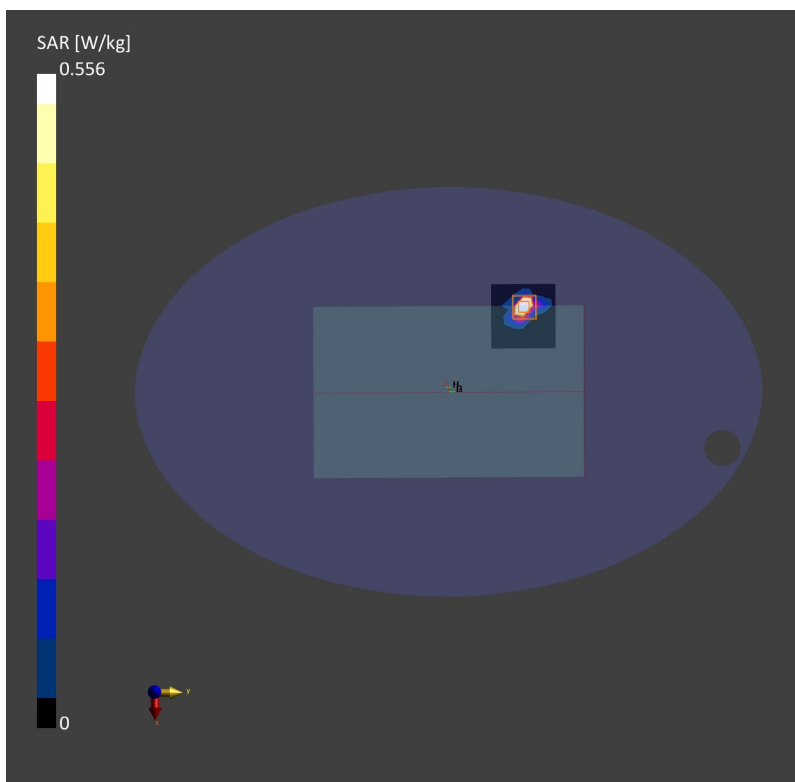

## 24\_WLAN5Hz\_802.11ac-VHT80 MCS0\_Bottom Face\_0mm\_Ch155

Communication System: WLAN 5GHz; Frequency: 5775.0

Medium: HSL. Medium parameters used:  $f= 5775.0$  MHz;  $\sigma= 5.11$  S/m;  $\epsilon_r = 35.4$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(5.1, 5.1, 5.1); Calibrated: 2022-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2022-10-26
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151
- Measurement Software: cDASY6 V6.6.0.13926

**Area Scan (60.0 mm x 60.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.479 W/kg; SAR (10g) = 0.144 W/kg;

**Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.07 dB

SAR (1g) = 0.530 W/kg; SAR (10g) = 0.161 W/kg;

