

Test Laboratory: BTL Inc.

Date: 12/12/2015

System Check_H835_1212

DUT: Dipole 835 MHz D835V2;SN:4d160;

Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835$ MHz; $\sigma = 0.889$ S/m; $\epsilon_r = 42.695$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3 °C; Liquid Temperature: 22.4 °C

DASY Configuration:

- Probe: EX3DV4 - SN3932; ConvF(9.75, 9.75, 9.75); Calibrated: 01/30/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 09/18/2015
- Phantom: SAM Front; Type: Twin SAM; Serial: 1784
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Area Scan (5x12x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 3.05 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 58.84 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 3.35 W/kg

SAR(1 g) = 2.4 W/kg; SAR(10 g) = 1.53 W/kg

Maximum value of SAR (measured) = 2.96 W/kg

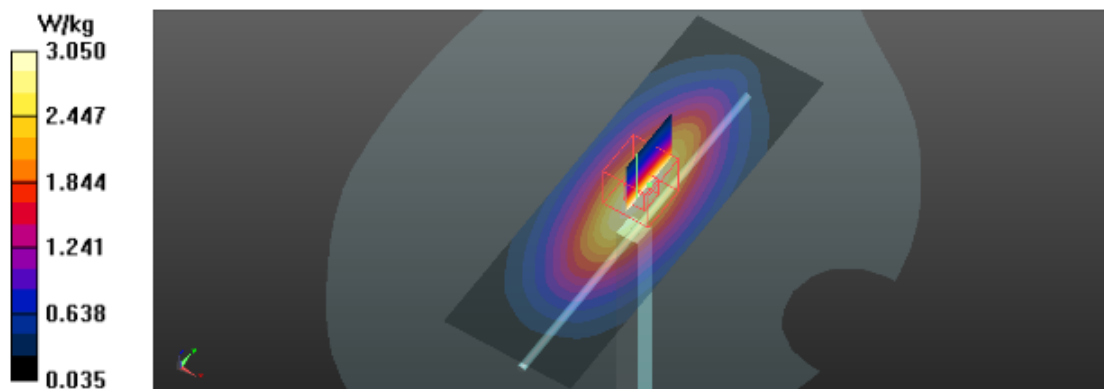

Test Laboratory: BTL Inc.

Date: 12/12/2015

System Check_H1900_1212

DUT: Dipole 1900 MHz D1900V2;SN:5d179;

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.424$ S/m; $\epsilon_r = 39.10$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3 °C; Liquid Temperature: 22.2 °C

DASY Configuration:

- Probe: EX3DV4 - SN3932; ConvF(8.23, 8.23, 8.23); Calibrated: 01/30/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 09/18/2015
- Phantom: SAM Right; Type: Twin SAM; Serial: 1896
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Area Scan (6x6x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 15.2 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 84.74 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 16.3 W/kg

SAR(1 g) = 9.96 W/kg; SAR(10 g) = 5.20 W/kg

Maximum value of SAR (measured) = 13.5 W/kg

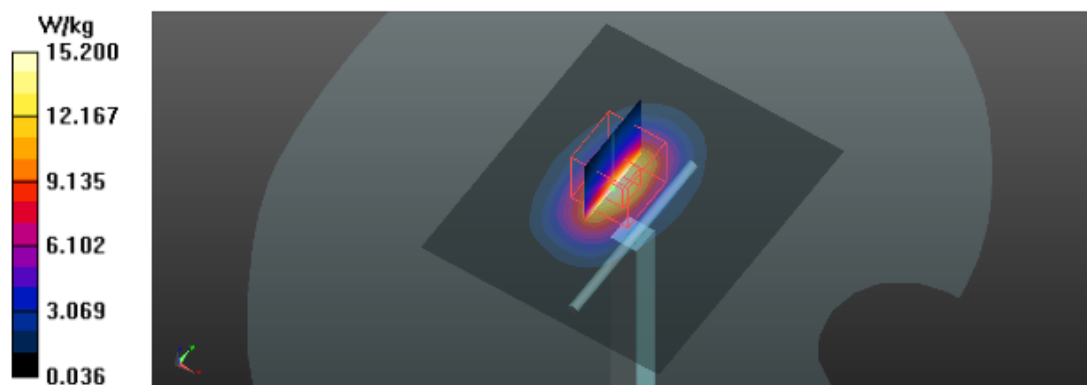

Test Laboratory: BTL Inc.

Date: 12/11/2015

System Check_H2450_1211

DUT: Dipole 2450 MHz D2450V2;SN:919;

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.845$ S/m; $\epsilon_r = 39.08$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.2 °C; Liquid Temperature: 22.4 °C

DASY Configuration:

- Probe: EX3DV4 - SN3932; ConvF(7.38, 7.38, 7.38); Calibrated: 01/30/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 09/18/2015
- Phantom: SAM Right; Type: Twin SAM; Serial: 1896
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Area Scan (9x9x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 21.2 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 89.47 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 23.6 W/kg

SAR(1 g) = 12.9 W/kg; SAR(10 g) = 6.10 W/kg

Maximum value of SAR (measured) = 18.5 W/kg

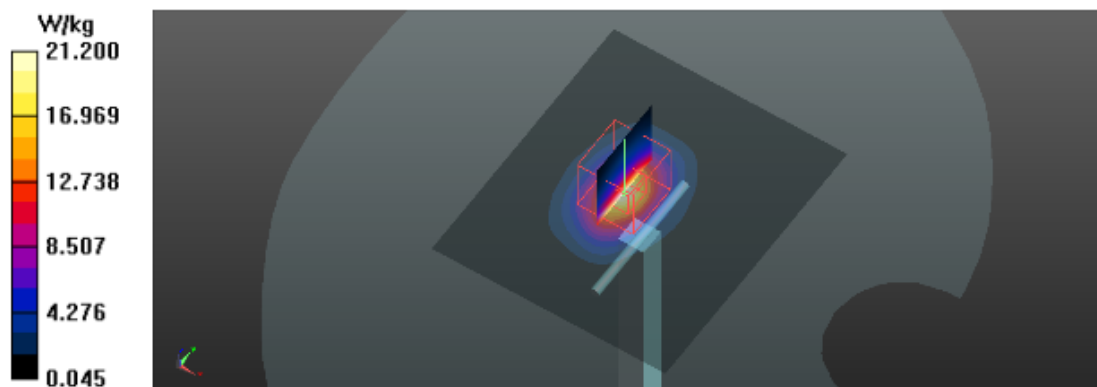

Test Laboratory: BTL Inc.

Date: 12/15/2015

System Check_B835_1215

DUT: Dipole 835 MHz D835V2;SN:4d160;

Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835$ MHz; $\sigma = 0.976$ S/m; $\epsilon_r = 54.66$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.4 °C; Liquid Temperature: 22.3 °C

DASY Configuration:

- Probe: EX3DV4 - SN3932; ConvF(10.19, 10.19, 10.19); Calibrated: 01/30/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 09/18/2015
- Phantom: SAM Right; Type: SAM; Serial: 1896
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Area Scan (5x12x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 3.23 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 59.67 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 3.92 W/kg

SAR(1 g) = 2.39 W/kg; SAR(10 g) = 1.74 W/kg

Maximum value of SAR (measured) = 3.35 W/kg

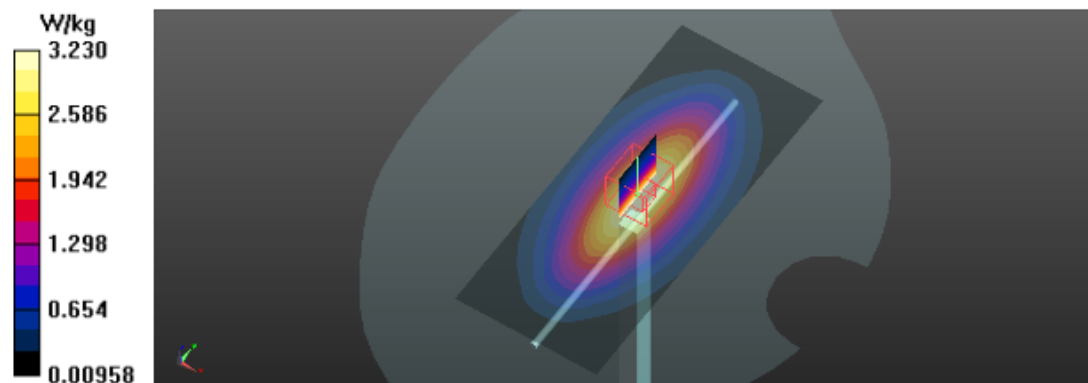

Test Laboratory: BTL Inc.

Date: 12/16/2015

System Check_B1900_1216

DUT: Dipole 1900 MHz D1900V2;SN:5d179;

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.551$ S/m; $\epsilon_r = 53.76$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.2 °C; Liquid Temperature: 22.4 °C

DASY Configuration:

- Probe: EX3DV4 - SN3932; ConvF(7.86, 7.86, 7.86); Calibrated: 01/30/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 09/18/2015
- Phantom: SAM Right; Type: Twin SAM; Serial: 1784
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Area Scan (6x6x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 15.0 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 82.52 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 15.8 W/kg

SAR(1 g) = 9.75 W/kg; SAR(10 g) = 5.5 W/kg

Maximum value of SAR (measured) = 13.4 W/kg

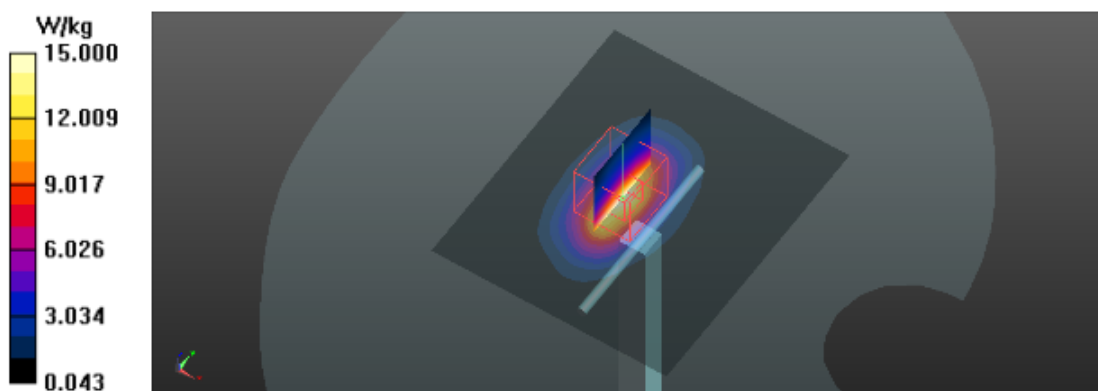

Test Laboratory: BTL Inc.

Date: 12/16/2015

System Check_B2450_1216

DUT: Dipole 2450 MHz D2450V2;SN:919;

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.999$ S/m; $\epsilon_r = 51.71$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3 °C; Liquid Temperature: 22.5 °C

DASY Configuration:

- Probe: EX3DV4 - SN3932; ConvF(7.6, 7.6, 7.6); Calibrated: 01/30/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 09/18/2015
- Phantom: SAM Front; Type: Twin SAM; Serial: 1784
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Area Scan (9x9x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 21.5 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 99.61 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 24.6 W/kg

SAR(1 g) = 12.65 W/kg; SAR(10 g) = 6.39 W/kg

Maximum value of SAR (measured) = 19.5 W/kg

