

6.6.2 Test procedures

The measurement is according to ANSI C63.10 clause 7.8.7

1. Connect the EUT through cable and divide with CBT32 and spectrum analyzer.
2. Enable the EUT transmit maximum power.
3. Set the spectrum analyzer as
4. Span: two or five times of OBW
5. RBW= 1% to 5% of the OBW; VBW \geq 3RBW; Max Hold.
6. Select the max peak, and N DB DOWN=20dB.
7. Record the results.

Measurement Result:

For GFSK

Channel	20dB Bandwidth (MHz)		Conclusion
0	Fig 96.	1.029	P
39	Fig 97.	1.029	P
78	Fig 98.	1.029	P

For $\pi/4$ DQPSK


Channel	20dB Bandwidth (MHz)		Conclusion
0	Fig 99.	1.087	P
39	Fig 100.	1.087	P
78	Fig 101.	1.087	P

For 8DPSK

Channel	20dB Bandwidth (MHz)		Conclusion
0	Fig 102.	1.188	P
39	Fig 103.	1.192	P
78	Fig 104.	1.192	P


Conclusion: PASS

Test graphs as below:

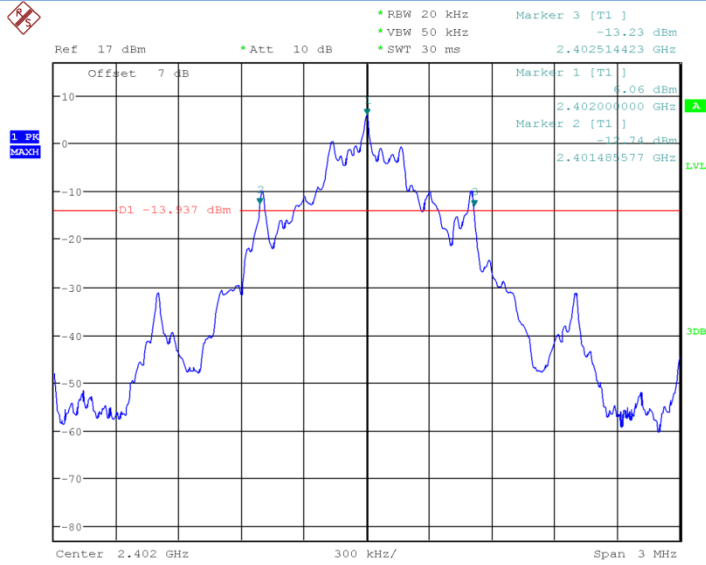


Date: 24.JAN.2016 10:29:10

Fig 94. 20dB Bandwidth: GFSK, Ch0

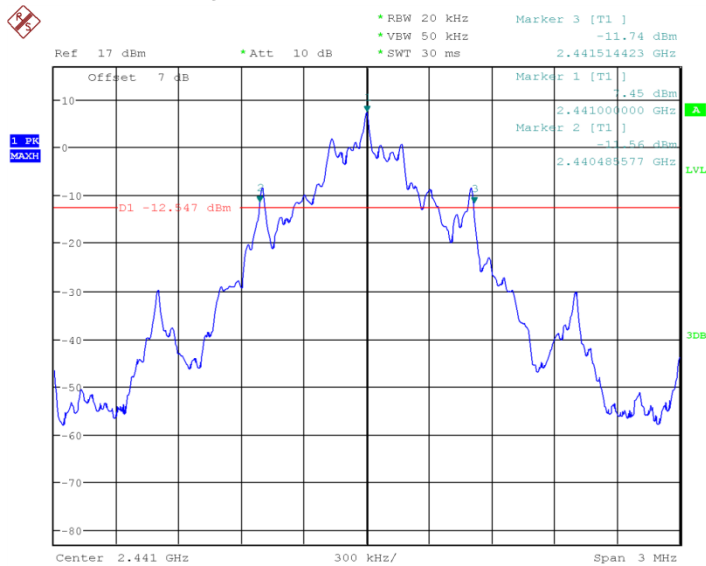


Date: 24.JAN.2016 10:29:24

Fig 95. 20dB Bandwidth: GFSK, Ch39

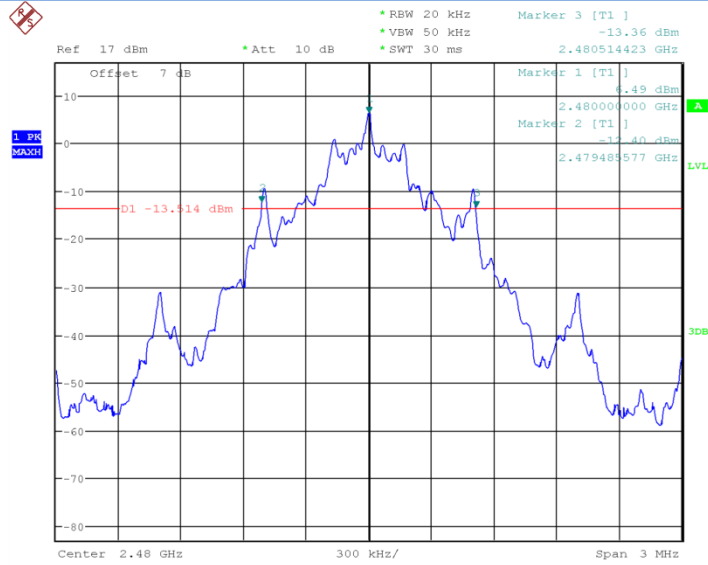


Date: 24.JAN.2016 10:29:38

Fig 96. 20dB Bandwidth: GFSK, Ch78

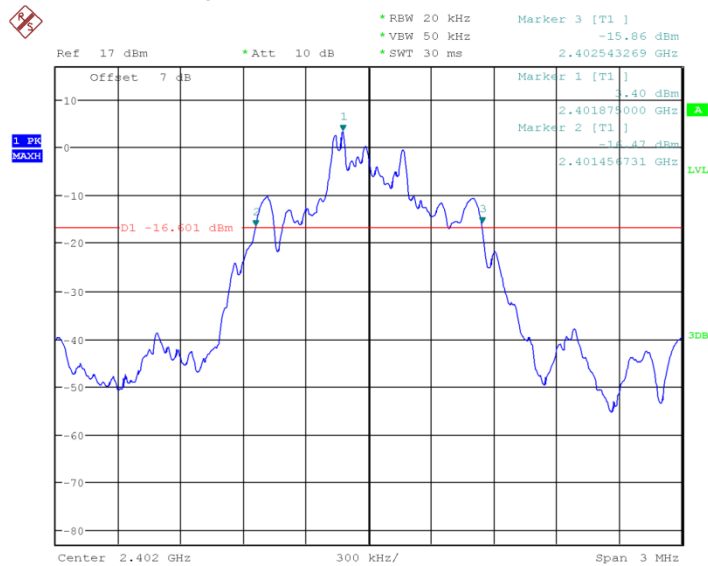


Date: 24.JAN.2016 10:29:52

Fig 97. 20dB Bandwidth: $\pi/4$ DQPSK, Ch0

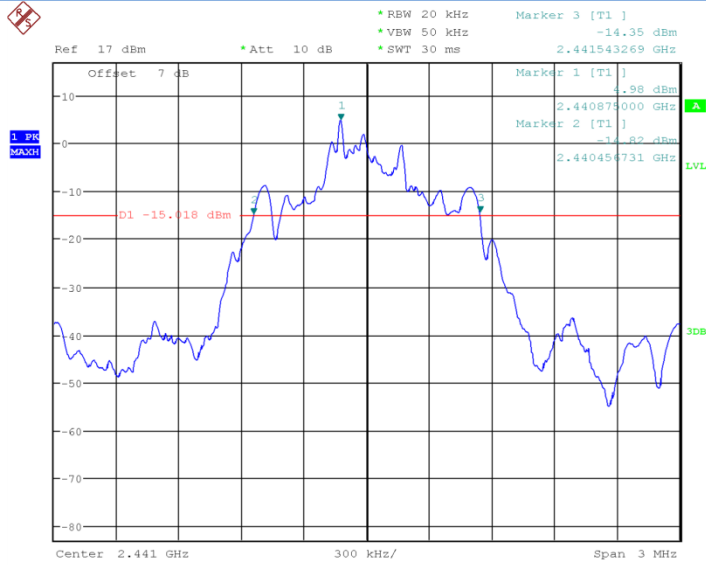


Date: 24.JAN.2016 10:30:06

Fig 98. 20dB Bandwidth: $\pi/4$ DQPSK, Ch39

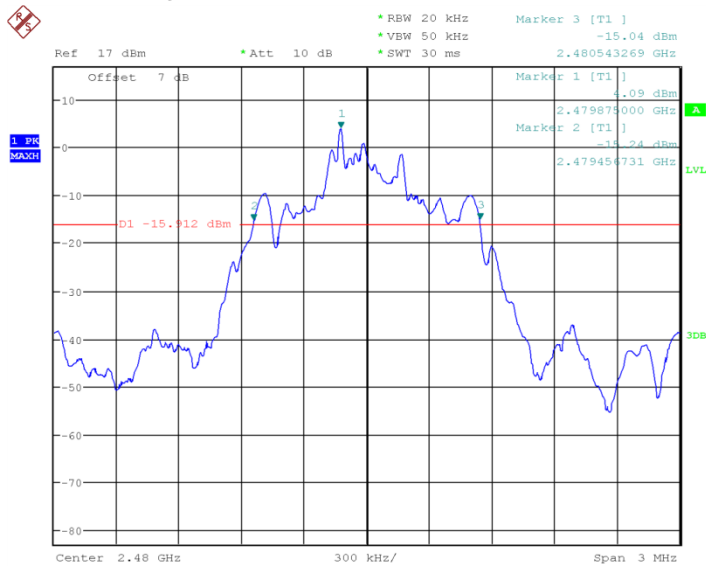


Date: 24.JAN.2016 10:30:20

Fig 99. 20dB Bandwidth: $\pi/4$ DQPSK, Ch78

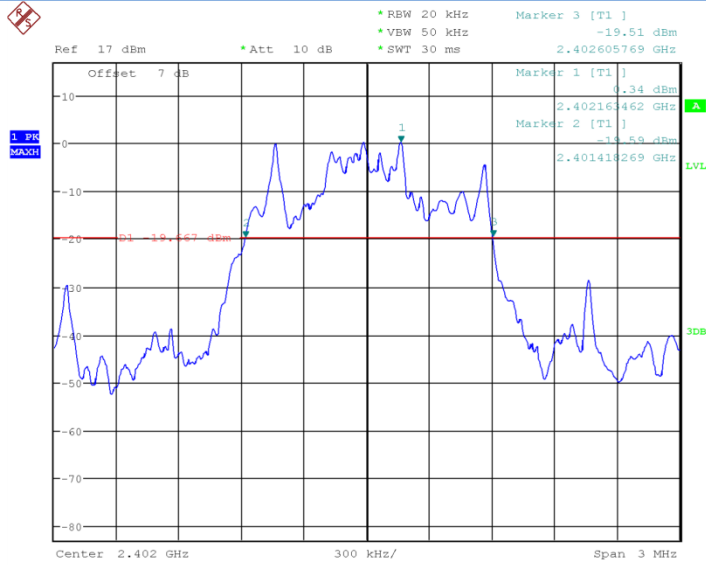


Date: 24.JAN.2016 10:30:34

Fig 100. 20dB Bandwidth: 8DPSK, Ch0

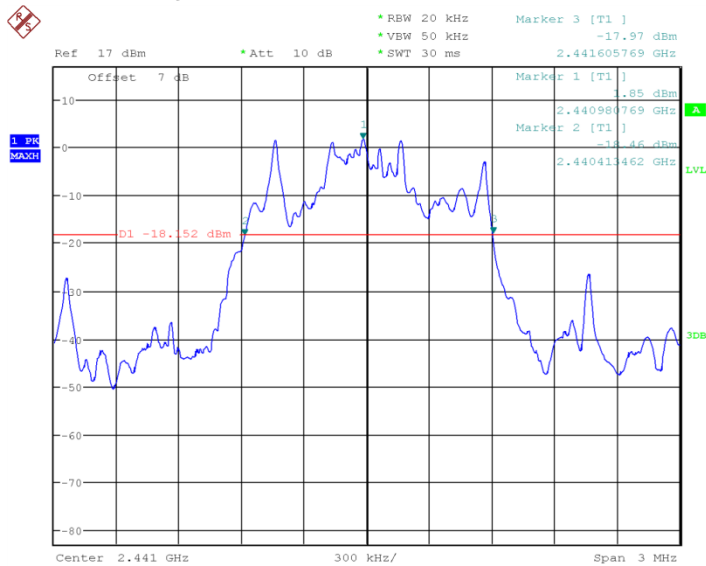

Date: 24.JAN.2016 10:30:48

Fig 101. 20dB Bandwidth: 8DPSK, Ch39

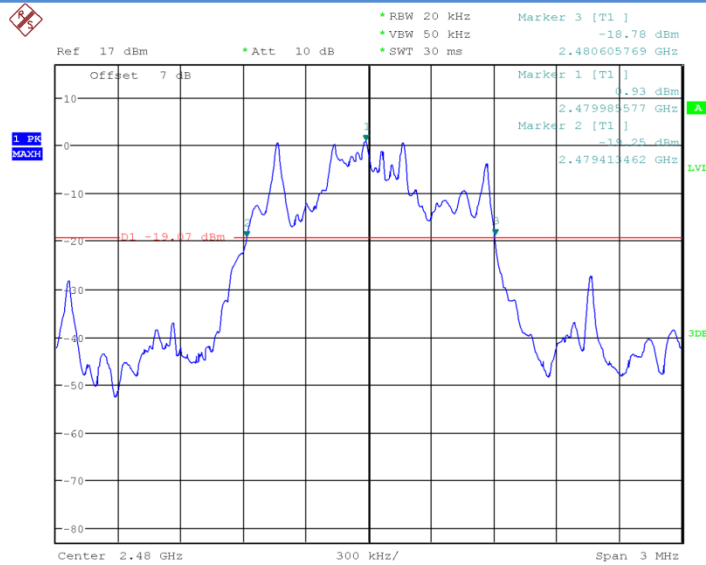

Date: 24.JAN.2016 10:31:02

Fig 102. 20dB Bandwidth: 8DPSK, Ch78

6.7. Carrier Frequency Separation

6.7.1 Measurement Limit:

Standard	Limit (KHz)
FCC 47 CFR Part 15.247 (a) (1)	Over 25KHz or (2/3)*20dB bandwidth

6.7.2 Test procedures

The measurement is according to ANSI C63.10 clause 7.8.2.

1. Connect the EUT through cable and divide with CBT32 and spectrum analyzer.
2. Enable the EUT transmit in hopping mode.
3. Span: Wide enough to capture the peaks of two adjacent channels.
4. RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
5. Video (or average) bandwidth (VBW) \geq RBW.
6. Sweep: Auto.
7. Detector function: Peak.
8. Trace: Max hold.
9. Allow the trace to stabilize.

6.7.3 Measurement Result:

For GFSK

Channel	Carrier separation (KHz)	Conclusion

39	Fig 103.	1004.8077	P
----	----------	-----------	---

For $\pi/4$ DQPSK


Channel	Carrier separation (KHz)	Conclusion
39	Fig 104.	P

For 8DPSK

Channel	Carrier separation (KHz)	Conclusion
39	Fig 105.	P


Conclusion: PASS

Test graphs as below:

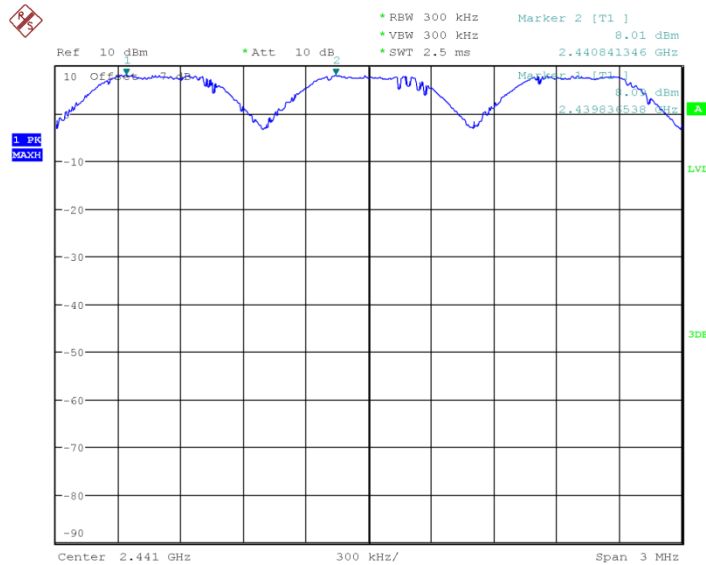


Date: 24.JAN.2016 10:32:47

Fig 103. Carrier separation measurement: GFSK, Ch39

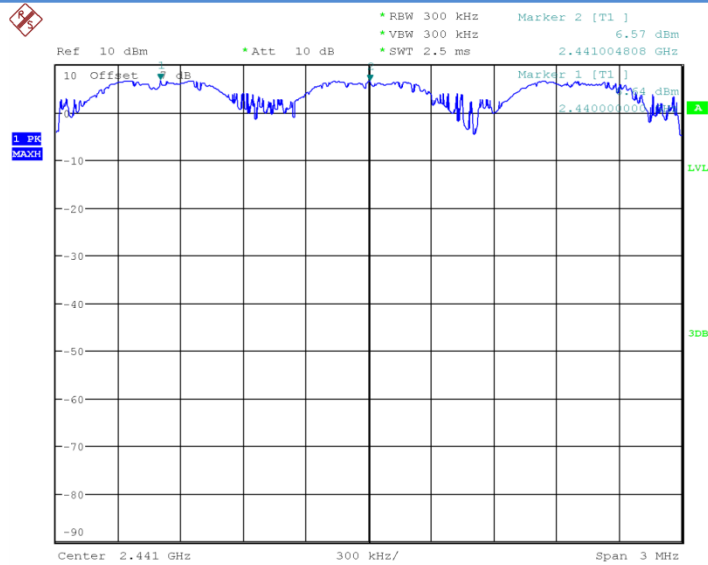

Date: 24.JAN.2016 10:33:58

Fig 104. Carrier separation measurement: $\pi/4$ DQPSK, Ch39

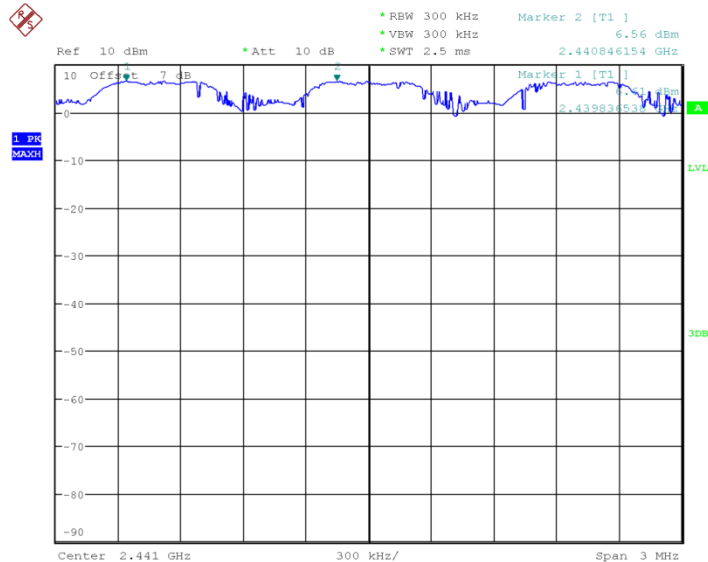

Date: 24.JAN.2016 10:35:08

Fig 105. Carrier separation measurement: 8DPSK, Ch39

6.8. Number Of Hopping Channels

6.8.1 Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247 (a)(1)(iii)	At least 15 non-overlapping channels

6.8.2 Test procedure

The measurement is according to ANSI C63.10 clause 7.8.3.

1. Connect the EUT through cable and divide with CBT32 and spectrum analyzer.
2. Enable the EUT transmit in hopping mode.
3. Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
4. RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
5. VBW \geq RBW.
6. Sweep: Auto.
7. Detector function: Peak.
8. Trace: Max hold.
9. Allow the trace to stabilize.
10. Record the test results.

6.8.3 Measurement Result:

For GFSK

Channel	Number of hopping channels		Conclusion
0~39	Fig 106.	79	P
40~78	Fig 107.		P

For $\pi/4$ DQPSK


Channel	Number of hopping channels		Conclusion
0~39	Fig 108.	79	P
40~78	Fig 109.		P

For 8DPSK

Channel	Number of hopping channels		Conclusion
0~39	Fig 110.	79	P
40~78	Fig 111.		P


Conclusion: PASS

Test graphs as below:

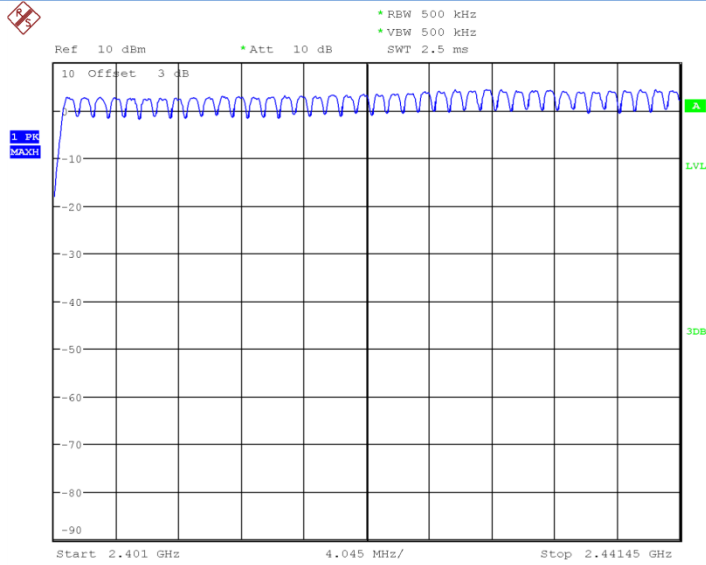


Date: 24.JAN.2016 10:37:46

Fig 106. Number of hopping frequency: GFSK, Ch0~39

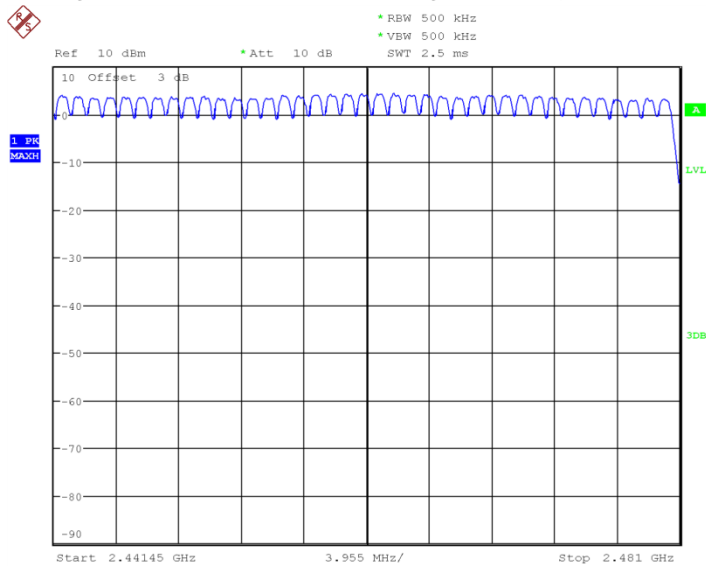


Date: 24.JAN.2016 10:39:51

Fig 107. Number of hopping frequency: GFSK, Ch40~78

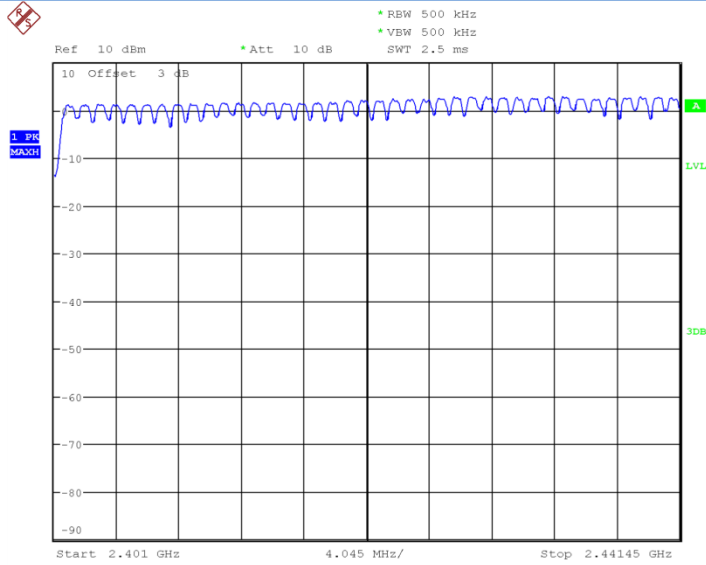


Date: 24.JAN.2016 10:41:57

Fig 108. Number of hopping frequency: $\pi/4$ DQPSK, Ch0~39

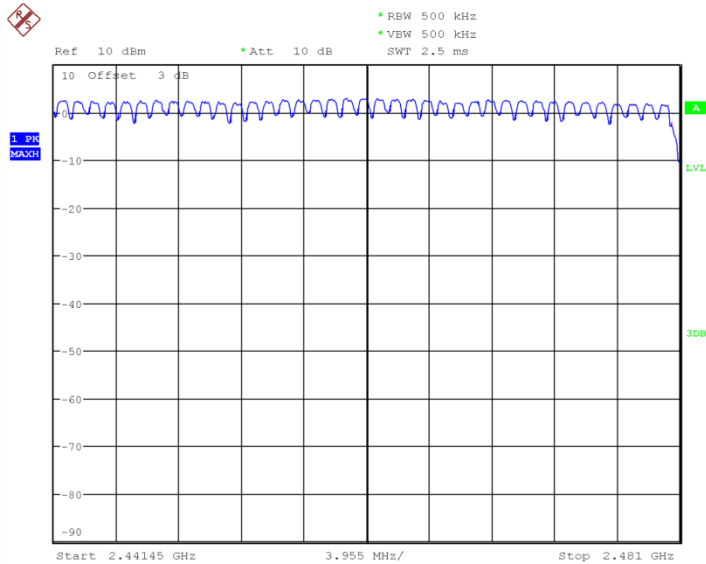


Date: 24.JAN.2016 10:44:01

Fig 109. Number of hopping frequency: $\pi/4$ DQPSK, Ch40~78

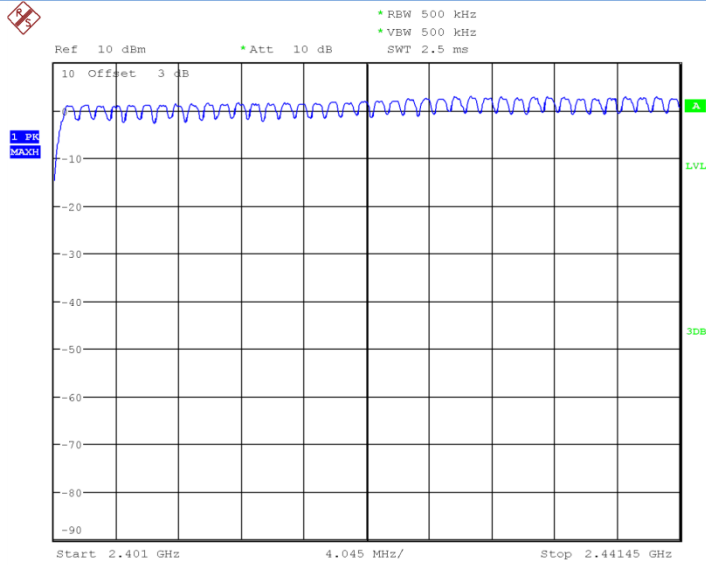

Date: 24.JAN.2016 10:46:06

Fig 110. Number of hopping frequency: 8DPSK, Ch0~39

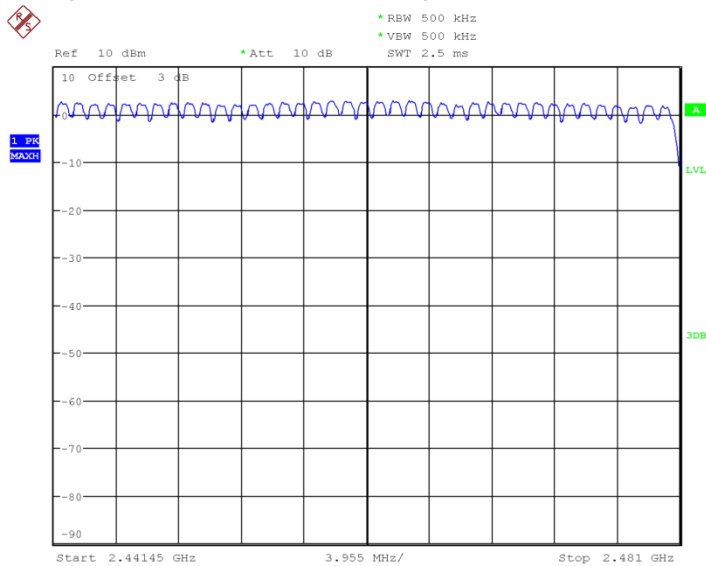

Date: 24.JAN.2016 10:48:11

Fig 111. Number of hopping frequency: 8DPSK, Ch40~78

7. Test Equipments and Ancillaries Used For Tests

The test equipments and ancillaries used are as follows.

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Date	Cal.interval
1	Vector Signal Analyser	FSQ26	101096	Rohde&Schwarz	2015-05-13	1
2	Bluetooth Tester	CBT32	100785	Rohde&Schwarz	2015-05-13	1
3	DC Power Supply	ZUP60-14	LOC-220Z006-0007	TDL-Lambda	2015-05-13	1
4	Power Meter	NRP2	101804	Rohde&Schwarz	2015-08-31 3	1
5	Wideband Power	Z81	100241	Rohde&Schwarz	2015-05-04	1

Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Date	Cal.interval
1	Universal Radio Communicati	CMU200	123126	R&S	2015-05-1 3	1
2	Test Receiver	ESU40	100307	R&S	2015-05-1 3	1
3	Trilog Antenna	VULB916 3	VULB9163-51 5	Schwarzbeck	2014-11-0 5	3
4	Double Ridged Guide Antenna	ETS-311 7	00135885	ETS	2014-05-0 6	3

5	2-Line V-Network	ENV216	101380	R&S	2015-05-1 3	1
---	---------------------	--------	--------	-----	----------------	---

Anechoic chamber

Fully anechoic chamber by Frankonia German.

8. Test Environment

Shielding Room1 (6.0 meters×3.0 meters×2.7 meters) did not exceed following limits along the conducted RF performance testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Ground system resistance	< 0.5 Ω
Uniformity of field strength	Between 0 and 6 dB, from 80MHz to 3000 MHz

Control room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. =30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

Fully-anechoic chamber1 (6.8 meters×3.08 meters×3.53 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
Uniformity of field strength	Between 0 and 6 dB, from 80MHz to 3000 MHz

Fully-anechoic chamber2 (Tapered Section: 8.75 meters×3.66 meters×3.66 meters, Rectangular Section: 7.32 meters×3.97 meters×3.66 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
Uniformity of field strength	Between 0 and 6 dB, from 30MHz to 40000MHz

ANNEX A. Deviations from Prescribed Test Methods

No deviation from Prescribed Test Methods.

ANNEX B. Accreditation Certificate



Accredited Laboratory

A2LA has accredited

EAST CHINA INSTITUTE OF TELECOMMUNICATIONS

Shanghai, People's Republic of China


for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. This laboratory also meets the requirements of any additional program requirements in the field of Electrical. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).



Presented this 10th day of December 2014.



President & CEO
For the Accreditation Council
Certificate Number 3682.01
Valid to February 28, 2017

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

*******End The Report*******