

FCC/IC

SAR

TEST REPORT

ISSUED BY
Shenzhen BALUN Technology Co., Ltd.



FOR
Portable Tablet Computer

ISSUED TO
LENOVO (SHANGHAI) ELECTRONICS TECHNOLOGY CO
LTD

NO 68 BUILDING 199 FENJU RD, CHINA (SHANGHAI) PILOT FREE
TRADE ZONE, SHANGHAI, 200131 CHINA



Tested by: Tu Lang
Tu Lang
(Engineer)

Date: Mar. 2, 2016

Approved by: Wei Yanquan
Wei Yanquan
(Chief Engineer)

Date: Mar. 2, 2016

Report No.: BL-SZ1610062-701
EUT Type: Portable Tablet Computer
Model Name: Lenovo TB3-X70F
Brand Name: Lenovo
FCC ID: O57TB3X70F
IC Number: 10407A-TB3X70F
Test Standard: FCC 47 CFR Part 2.1093
IEEE 1528: 2013
IC RSS-102 issue 5 (Others refer chapters 3.1)
Maximum SAR: Body (1 g): 1.189 W/kg
Test Conclusion: Pass
Test Date: Jan. 21, 2016 ~ Feb. 29, 2016
Date of Issue: Mar. 2, 2016

NOTE: This test report can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. BALUN Laboratory. Any objections should be raised within thirty days from the date of issue. To validate the report, please visit BALUN website.

Revision History

<u>Version</u>	<u>Issue Date</u>	<u>Revisions Content</u>
<u>Rev. 01</u>	<u>Feb. 2, 2016</u>	<u>Initial Issue</u>
<u>Rev. 02</u>	<u>Feb. 5, 2016</u>	<u>Deleted hotspot description at section 3.3.1;</u> <u>Corrected the reference dipole SAR of 5800MHz body and recalculated the result at ANNEX B</u>
<u>Rev. 03</u>	<u>Mar. 2, 2016</u>	<u>Add testing for another EUT (Refer to the EUT description in section 2.4)</u>

TABLE OF CONTENTS

- 1 GENERAL INFORMATION 4
 - 1.1 Identification of the Testing Laboratory 4
 - 1.2 Identification of the Responsible Testing Location 4
 - 1.3 Test Environment Condition 4
 - 1.4 Announce 5
- 2 PRODUCT INFORMATION 6
 - 2.1 Applicant Information 6
 - 2.2 Manufacturer Information 6
 - 2.3 Factory Information 6
 - 2.4 General Description for Equipment under Test (EUT) 7
 - 2.5 Ancillary Equipment 8
 - 2.6 Technical Information 9
- 3 SUMMARY OF TEST RESULT 10
 - 3.1 Test Standards 10
 - 3.2 Device Category and SAR Limit 11
 - 3.3 Test Result Summary 12
 - 3.4 Test Uncertainty 13
- 4 MEASUREMENT SYSTEM 17
 - 4.1 Specific Absorption Rate (SAR) Definition 17
 - 4.2 DASY SAR System 18
- 5 SYSTEM VERIFICATION 26
 - 5.1 Purpose of System Check 26
 - 5.2 System Check Setup 26

6	TEST POSITION CONFIGURATIONS.....	27
6.1	Head Exposure Conditions.....	27
6.2	Body-worn Position Conditions	29
6.3	Hotspot Mode Exposure Position Conditions	30
7	MEASUREMENT PROCEDURE.....	31
7.1	Measurement Process Diagram.....	31
7.2	SAR Scan General Requirement	32
7.3	Measurement Procedure.....	33
7.4	Area & Zoom Scan Procedure	33
8	CONDUCTED RF OUPUT POWER.....	34
8.1	WIFI.....	34
8.2	Bluetooth	36
9	TEST EXCLUSION CONSIDERATION.....	37
9.1	SAR Test Exclusion Consideration Table	38
9.2	10g Extremity Exposure Consideration	40
10	TEST RESULT	41
11	SAR Measurement Variability.....	43
12	SIMULTANEOUS TRANSMISSION	44
12.1	Simultaneous Transmission Mode Consider	44
12.2	Estimated SAR Calculation	45
13	TEST EQUIPMENTS LIST	46
ANNEX A	SIMULATING LIQUID VERIFICATION RESULT	47
ANNEX B	SYSTEM CHECK RESULT	49
ANNEX C	TEST DATA.....	58
ANNEX D	EUT EXTERNAL PHOTOS	90
ANNEX E	EST SETUP PHOTOS	90
ANNEX F	CALIBRATION REPORT	91
F.1	E-Field Probe.....	91
F.2	Data Acquisition Electronics	102
F.3	2450 MHz Dipole	105
F.4	5GHz Dipole	113
F.5	Dipole Performance Measurement Report	126

1 GENERAL INFORMATION

1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co.,Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province,P. R. China
Phone Number	+86 755 6685 0100
Fax Number	+86 755 6182 4271

1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co.,Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province,P. R. China
Accreditation Certificate	<p>The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 11524A-1.</p> <p>The laboratory has been listed by US Federal Communications Commission to perform electromagnetic emission measurements. The recognition numbers of test site are 832625.</p> <p>The laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L6791.</p>
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055

1.3 Test Environment Condition

Ambient Temperature	21 to 23°C
Ambient Relative Humidity	34 to 45%
Ambient Pressure	100 to 102KPa

1.4 Announce

- (1) The test report reference to the report template version v2.1.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (5) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (6) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	LENOVO (SHANGHAI) ELECTRONICS TECHNOLOGY CO LTD
Address	NO 68 BUILDING 199 FENJU RD, CHINA (SHANGHAI) PILOT FREE TRADE ZONE, SHANGHAI, 200131 CHINA

2.2 Manufacturer Information

Manufacturer	Lenovo PC HK Limited.
Address	23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay, Hong Kong

2.3 Factory Information

Factory1	BYD Precision Manufacture Co., Ltd.
Address1	No.3001, Baohe Road, Baolong Industrial, Longgang, Shenzhen, P.R. China
Factory2	Motorola (Wuhan) Mobility Technologies Communication Co., Ltd
Address2	No.19, Gaoxin 4th Road, Wuhan East Lake High-tech Zone, Wuhan, China
Factory3	Dong Guan Huabel Electronic Technology Co., Ltd
Address3	No.9 Industrial Northern Road, National High-Tech Industrial Development Zone, SongShan Lake, Dong Guan City, China

2.4 General Description for Equipment under Test (EUT)

EUT Type	Portable Tablet Computer
Model Name Under Test	Lenovo TB3-X70F
Series Model Name	N/A
Description of Model Name Differentiation	N/A
Hardware Version	A6604_MB_PCB_V2.0
Software Version	TB3-X70F_160108
Dimensions (Approx.)	247.4mm x 171.5 mm x 9.4mm
Weight (Approx.)	500g (with battery)
Network and Wireless connectivity	WLAN; Bluetooth; GPS; GLONASS; NFC

EUT	Hardware	Manufacturer
Configuration A	LCD display	BOE TECHNOLOGY GROUP CO., LTD.
	Battery	Sunwoda Electronic Co.,Ltd.
Configuration B	LCD display	Innolux corporation
	Battery	SCUD (Fujian) Electronics Co.,Ltd.

Note: The EUT have two sample which Configuration A is OF display with XWD battery and Configuration B is AUO display with ATL battery), the internal structure and circuit electrical parameters are the same; but the LCD display and battery are different. All of them were tested in this report, the Configuration A sample as the main for tested and the Configuration B sample as confirmatory test. In Spurious Emissions test, only the Configuration A + C-P35 (HUNTKEY) and Configuration B + C-P35 (Acbel) were shown in this report.

2.5 Ancillary Equipment

Ancillary Equipment 1	Battery 1	
	Brand Name	Lenovo
	Model No.	L14D2P31
	Serial No.	N/A
	Capacitance	7000 mAh
	Rated Voltage	3.8 V
	Limit Charge Voltage	4.35 V
	Manufacturer	Sunwoda Electronic Co. Ltd
Ancillary Equipment 2	Battery 2	
	Brand Name	Lenovo
	Model No.	L14D2P31
	Serial No.	N/A
	Capacitance	7000 mAh
	Rated Voltage	3.8 V
	Limit Charge Voltage	4.35 V
	Limit Charge Voltage	SCUD (Fujian) Electronics Co., Ltd.
Ancillary Equipment 3	Charger 1	
	Brand Name	Lenovo
	Serial Model Name.	C-P35
	Rated Input	100-240 V \sim , 50/60 Hz, 0.5 A
	Rated Output	5.2 V $\overline{=}$, 2.0 A
	Manufacturer	SHENZHEN HUNTKEY ELECTRIC CO LTD
Ancillary Equipment 4	Charger 2	
	Brand Name	Lenovo
	Serial Model Name.	C-P35
	Rated Input	100-240 V \sim , 50/60 Hz, 0.3 A
	Rated Output	5.2 V $\overline{=}$, 2.0 A
	Manufacturer	Acbel Polytech Inc.
Ancillary Equipment 5	USB Cable 1	
	Length(Approx.)	102 cm
	Manufacturer	SHIN AN WIRE&CABLE CO., LTD.
Ancillary Equipment 6	USB Cable 2	
	Length(Approx.)	102 cm
	Manufacturer	SAIBO ELECTRON TECHNOLOGY(HK)CO., LTD.

2.6 Technical Information

The requirement for the following technical information of the EUT was tested in this report:

Operating Mode	WLAN; Bluetooth	
Frequency Range	802.11b/g	2400 MHz ~ 2483.5 MHz
	802.11n (HT20/HT40)	2400 MHz ~ 2483.5 MHz
	802.11a	5150 MHz ~ 5250 MHz
		5250 MHz ~ 5350 MHz
		5470 MHz ~ 5725 MHz
		5725 MHz ~ 5850 MHz
	802.11 n(HT20/HT40)	5150 MHz ~ 5250 MHz
		5250 MHz ~ 5350 MHz
		5470 MHz ~ 5725 MHz
		5725 MHz ~ 5850 MHz
	802.11 ac(HT20/HT40)	5150 MHz ~ 5250 MHz
		5250 MHz ~ 5350 MHz
		5470 MHz ~ 5725 MHz
5725 MHz ~ 5850 MHz		
Bluetooth	2400 MHz ~ 2483.5 MHz	
Antenna Type	WLAN: PIFA Antenna Bluetooth: PIFA Antenna	
Hotspot Function	Not Support	
Exposure Category	General Population/Uncontrolled exposure	
Product	Type	
	<input checked="" type="checkbox"/> Production unit	<input type="checkbox"/> Identical prototype

3 SUMMARY OF TEST RESULT

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 2	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	ANSI/IEEE Std. C95.1-2005	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz
3	RSS-102: 2015 (Issue 5)	Radio Frequency (RF) Exposure Compliance of Radio Communication Apparatus (All Frequency Bands)
4	IEEE Std. 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
5	FCC KDB 447498 D01 v06	Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies
6	FCC KDB 941225 D06 v02r01	SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities
7	FCC KDB 865664 D01 v01r04	SAR Measurement 100 MHz to 6 GHz
8	FCC KDB 865664 D02 v01r02	RF Exposure Reporting
9	FCC KDB 648474 D04 v01r03	SAR Evaluation Considerations for Wireless Handsets
10	FCC KDB 616217 D04 v01r02	SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers
11	FCC KDB 248227 D01 v02r02	SAR GUIDANCE FOR IEEE 802.11 (Wi-Fi) TRANSMITTERS

3.2 Device Category and SAR Limit

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user.

Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

Table of Exposure Limits:

Body Position	SAR Value (W/Kg)	
	General Population/ Uncontrolled Exposure	Occupational/ Controlled Exposure
Whole-Body SAR (averaged over the entire body)	0.08	0.4
Partial-Body SAR (averaged over any 1 gram of tissue)	1.60	8.0
SAR for hands, wrists, feet and ankles (averaged over any 10 grams of tissue)	4.0	20.0

NOTE:

General Population/Uncontrolled Exposure: Locations where there is the exposure of individuals who have no knowledge or control of their exposure. General population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

Occupational/Controlled Exposure: Locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

3.3 Test Result Summary

3.3.1 Highest SAR (1 g Value)

EUT	Mode	Maximum Scaled SAR (W/kg)	Maximum Report SAR (W/kg)	Limit (W/kg)
Configuration A	2.4G WLAN 802.11b	1.053	1.189	1.6
	5.3G WLAN 802.11ac(HT40)	0.976		
	5.6G WLAN 802.11n(HT40)	1.189		
	5.8G WLAN 802.11ac(HT40)	1.078		
Configuration B	2.4G WLAN 802.11b	1.084		
	5.3G WLAN 802.11ac(HT40)	1.097		
	5.6G WLAN 802.11n(HT40)	1.128		
	5.8G WLAN 802.11ac(HT40)	1.036		
Verdict	Pass			

3.3.2 Highest Simultaneous SAR

2.4G WIFI, 5G WIFI and Bluetooth share the same antenna and cannot transmit simultaneously. So the simultaneous multi-band transmission evaluation is not required in this report.

3.4 Test Uncertainty

3.4.1 Measurement uncertainty evaluation for SAR test

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in IEEE 1528 This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

1) System Measurement Uncertainty (frequency range from 300 MHz to 3 GHz)

Uncertainty Component	Tol (+-%)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	Vi
Measurement System								
Probe calibration	6.0	N	1	1	1	6.00	6.00	∞
Axial Isotropy	4.7	R	$\sqrt{3}$	0.7	0.7	1.90	1.90	∞
Hemispherical Isotropy	9.6	R	$\sqrt{3}$	0.7	0.7	3.90	3.90	∞
Boundary effect	1.0	R	$\sqrt{3}$	1	1	0.60	0.60	∞
Linearity	4.7	R	$\sqrt{3}$	1	1	2.70	2.70	∞
System detection limits	1.0	R	$\sqrt{3}$	1	1	0.60	0.60	∞
Readout Electronics	0.3	N	1	1	1	0.30	0.30	∞
Response Time	0.8	R	$\sqrt{3}$	1	1	0.50	0.50	∞
Integration Time	2.6	R	$\sqrt{3}$	1	1	1.50	1.50	∞
RF ambient Conditions - Noise	3.0	R	$\sqrt{3}$	1	1	1.70	1.70	∞
RF ambient Conditions - Reflections	3.0	R	$\sqrt{3}$	1	1	1.70	1.70	∞
Probe positioner Mechanical Tolerance	0.4	R	$\sqrt{3}$	1	1	0.20	0.20	∞
Probe positioning with respect to Phantom Shell	2.9	R	$\sqrt{3}$	1	1	1.70	1.70	∞
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	2.0	R	$\sqrt{3}$	1	1	1.20	1.20	∞
Test sample Related								
Test sample positioning	2.9	N	1	1	1	2.90	2.90	N-1
Device Holder Uncertainty	3.6	N	1	1	1	3.60	3.60	N-1
Output power Variation - SAR drift measurement	5.0	R	$\sqrt{3}$	1	1	2.90	2.90	∞
SAR scaling	0.0	R	$\sqrt{3}$	1	1	0.00	0.00	∞
Phantom and Tissue Parameters								
Phantom Uncertainty (Shape and thickness tolerances)	4.0	R	$\sqrt{3}$	1	1	3.50	3.50	∞
SAR correction	1.9	R	$\sqrt{3}$	1	0.84	1.10	0.90	∞
Liquid conductivity - measurement uncertainty	2.5	N	$\sqrt{3}$	0.78	0.71	1.10	1.00	∞
Liquid permittivity - measurement uncertainty	2.5	N	$\sqrt{3}$	0.26	0.26	0.30	0.40	∞
Liquid conductivity - temperature uncertainty	3.4	N	$\sqrt{3}$	0.78	0.71	1.50	1.40	∞
Liquid permittivity - temperature uncertainty	0.4	N	$\sqrt{3}$	0.26	0.26	0.10	0.10	∞
Combined Standard Uncertainty		RSS				13.1	13.0	
Expanded Uncertainty (95% Confidence interval)		K=2				26.1	26.1	

2) System Measurement Uncertainty (frequency range from 3 GHz to 6 GHz)

Uncertainty Component	Tol (+-%)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	Vi
Measurement System								
Probe calibration	6.55	N	1	1	1	6.55	6.55	∞
Axial Isotropy	4.7	R	$\sqrt{3}$	0.7	0.7	1.90	1.90	∞
Hemispherical Isotropy	9.6	R	$\sqrt{3}$	0.7	0.7	3.90	3.90	∞
Boundary effect	2.0	R	$\sqrt{3}$	1	1	1.20	1.20	∞
Linearity	4.7	R	$\sqrt{3}$	1	1	2.70	2.70	∞
System detection limits	1.0	R	$\sqrt{3}$	1	1	0.60	0.60	∞
Readout Electronics	0.3	N	1	1	1	0.30	0.30	∞
Reponse Time	0.8	R	$\sqrt{3}$	1	1	0.50	0.50	∞
Integration Time	2.6	R	$\sqrt{3}$	1	1	1.50	1.50	∞
RF ambient Conditions - Noise	3.0	R	$\sqrt{3}$	1	1	1.70	1.70	∞
RF ambient Conditions - Reflections	3.0	R	$\sqrt{3}$	1	1	1.70	1.70	∞
Probe positioner Mechanical Tolerance	0.8	R	$\sqrt{3}$	1	1	0.50	0.50	∞
Probe positioning with respect to Phantom Shell	6.7	R	$\sqrt{3}$	1	1	3.90	3.90	∞
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	4.0	R	$\sqrt{3}$	1	1	2.30	2.30	∞
Test sample Related								
Test sample positioning	2.9	N	1	1	1	2.90	2.90	N-1
Device Holder Uncertainty	3.6	N	1	1	1	3.60	3.60	N-1
Output power Variation - SAR drift measurement	5.0	R	$\sqrt{3}$	1	1	2.90	2.90	∞
SAR scaling	0.0	R	$\sqrt{3}$	1	1	0.00	0.00	∞
Phantom and Tissue Parameters								
Phantom Uncertainty (Shape and thickness tolerances)	6.6	R	$\sqrt{3}$	1	1	3.80	3.80	∞
SAR correction	1.9	R	$\sqrt{3}$	1	0.84	1.10	0.90	∞
Liquid conductivity - measurement uncertainty	2.5	N	$\sqrt{3}$	0.78	0.71	1.10	1.00	∞
Liquid permittivity - measurement uncertainty	2.5	N	$\sqrt{3}$	0.26	0.26	0.30	0.40	∞
Liquid conductivity - temperature uncertainty	3.4	N	$\sqrt{3}$	0.78	0.71	1.50	1.40	∞
Liquid permittivity - temperature uncertainty	0.4	N	$\sqrt{3}$	0.26	0.26	0.10	0.10	∞
Combined Standard Uncertainty		RSS				14.0	14.0	
Expanded Uncertainty (95% Confidence interval)		K=2				28.1	28.0	

3.4.2 Measurement uncertainty evaluation for system check

This measurement uncertainty budget is suggested by IEEE 1528. The break down of the individual uncertainties is as follows:

1) System Measurement Uncertainty (frequency range from 300 MHz to 3 GHz)

Uncertainty Component	Tol (+/- %)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+/-%)	10g Ui (+/-%)	Vi
Measurement System								
Probe calibration	6.0	N	1	1	1	6.00	6.00	∞
Axial Isotropy	4.7	R	$\sqrt{3}$	0.7	0.7	1.90	1.90	∞
Hemispherical Isotropy	9.6	R	$\sqrt{3}$	0.7	0.7	3.90	3.90	∞
Boundary effect	1.0	R	$\sqrt{3}$	1	1	0.60	0.60	∞
Linearity	4.7	R	$\sqrt{3}$	1	1	2.70	2.70	∞
System detection limits	1.0	R	$\sqrt{3}$	1	1	0.60	0.60	∞
Readout Electronics	0.3	N	1	1	1	0.30	0.30	∞
Reponse Time	0.8	R	$\sqrt{3}$	1	1	0.50	0.50	∞
Integration Time	2.6	R	$\sqrt{3}$	1	1	1.50	1.50	∞
RF ambient Conditions - Noise	3.0	R	$\sqrt{3}$	1	1	1.70	1.70	∞
RF ambient Conditions - Reflections	3.0	R	$\sqrt{3}$	1	1	1.70	1.70	∞
Probe positioner Mechanical Tolerance	0.4	R	$\sqrt{3}$	1	1	0.20	0.20	∞
Probe positioning with respect to Phantom Shell	2.9	R	$\sqrt{3}$	1	1	1.70	1.70	∞
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	2.0	R	$\sqrt{3}$	1	1	1.20	1.20	∞
Dipole								
Deviation of experimental dipole	5.5	R	$\sqrt{3}$	1	1	3.20	3.20	∞
Dipole axis to liquid distance	2.0	R	1	1	1	1.20	1.20	∞
Power drift	4.7	R	$\sqrt{3}$	1	1	2.70	2.70	∞
Phantom and Tissue Parameters								
Phantom Uncertainty (Shape and thickness tolerances)	4.0	R	$\sqrt{3}$	1	1	3.50	3.50	∞
SAR correction	1.9	R	$\sqrt{3}$	1	0.84	1.10	0.90	∞
Liquid conductivity - measurement uncertainty	2.5	N	$\sqrt{3}$	0.78	0.71	1.10	1.00	∞
Liquid permittivity - measurement uncertainty	2.5	N	$\sqrt{3}$	0.26	0.26	0.30	0.40	∞
Liquid conductivity - temperature uncertainty	3.4	N	$\sqrt{3}$	0.78	0.71	1.50	1.40	∞
Liquid permittivity - temperature uncertainty	0.4	N	$\sqrt{3}$	0.26	0.26	0.10	0.10	∞
Combined Standard Uncertainty		RSS				10.56	10.52	
Expanded Uncertainty (95% Confidence interval)		K=2				21.12	21.04	

2) System Measurement Uncertainty (frequency range from 3 GHz to 6 GHz)

Uncertainty Component	Tol (+-%)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	Vi
Measurement System								
Probe calibration	6.55	N	1	1	1	6.55	6.55	∞
Axial Isotropy	4.7	R	$\sqrt{3}$	0.7	0.7	1.90	1.90	∞
Hemispherical Isotropy	9.6	R	$\sqrt{3}$	0.7	0.7	3.90	3.90	∞
Boundary effect	2.0	R	$\sqrt{3}$	1	1	1.20	1.20	∞
Linearity	4.7	R	$\sqrt{3}$	1	1	2.70	2.70	∞
System detection limits	1.0	R	$\sqrt{3}$	1	1	0.60	0.60	∞
Readout Electronics	0.3	N	1	1	1	0.30	0.30	∞
Reponse Time	0.8	R	$\sqrt{3}$	1	1	0.50	0.50	∞
Integration Time	2.6	R	$\sqrt{3}$	1	1	1.50	1.50	∞
RF ambient Conditions - Noise	3.0	R	$\sqrt{3}$	1	1	1.70	1.70	∞
RF ambient Conditions - Reflections	3.0	R	$\sqrt{3}$	1	1	1.70	1.70	∞
Probe positioner Mechanical Tolerance	0.8	R	$\sqrt{3}$	1	1	0.50	0.50	∞
Probe positioning with respect to Phantom Shell	6.7	R	$\sqrt{3}$	1	1	3.90	3.90	∞
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	4.0	R	$\sqrt{3}$	1	1	2.30	2.30	∞
Dipole								
Deviation of experimental dipole	5.5	R	$\sqrt{3}$	1	1	3.20	3.20	∞
Dipole axis to liquid distance	2.0	R	1	1	1	1.20	1.20	∞
Power drift	4.7	R	$\sqrt{3}$	1	1	2.70	2.70	∞
Phantom and Tissue Parameters								
Phantom Uncertainty (Shape and thickness tolerances)	6.6	R	$\sqrt{3}$	1	1	3.80	3.80	∞
SAR correction	1.9	R	$\sqrt{3}$	1	0.84	1.10	0.90	∞
Liquid conductivity - measurement uncertainty	2.5	N	$\sqrt{3}$	0.78	0.71	1.10	1.00	∞
Liquid permittivity - measurement uncertainty	2.5	N	$\sqrt{3}$	0.26	0.26	0.30	0.40	∞
Liquid conductivity - temperature uncertainty	3.4	N	$\sqrt{3}$	0.78	0.71	1.50	1.40	∞
Liquid permittivity - temperature uncertainty	0.4	N	$\sqrt{3}$	0.26	0.26	0.10	0.10	∞
Combined Standard Uncertainty		RSS				11.75	11.72	
Expanded Uncertainty (95% Confidence interval)		K=2				23.50	23.44	

4 MEASUREMENT SYSTEM

4.1 Specific Absorption Rate (SAR) Definition

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg) SAR measurement can be related to the electrical field in the tissue by


$$\text{SAR} = \frac{\sigma E^2}{\rho}$$

Where: σ is the conductivity of the tissue,

ρ is the mass density of the tissue and E is the RMS electrical field strength.

4.2 DASY SAR System

4.2.1 DASY SAR System Diagram

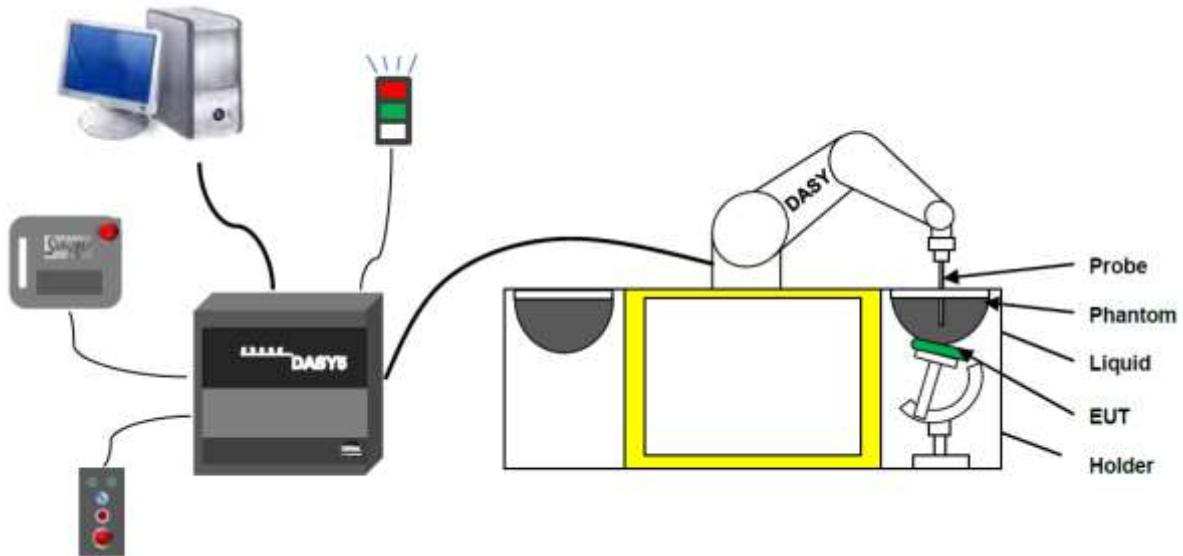

The DASY5 system for performing compliance tests consists of the following items:

1. A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
2. A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
3. A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
4. A unit to operate the optical surface detector which is connected to the EOC.
5. The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY5 measurement server.
6. The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation.
7. DASY5 software and SEMCAD data evaluation software.
8. Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
9. The generic twin phantom enabling the testing of left-hand and right-hand usage.
10. The device holder for handheld mobile phones.
11. Tissue simulating liquid mixed according to the given recipes.
12. System validation dipoles allowing to validate the proper functioning of the system.

4.2.2 Robot

The Dasy SAR system uses the high precision robots. Symmetrical design with triangular core Built-in optical fiber for surface detection system For the 6-axis controller system, Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents). The robot series have many features that are important for our application:



- **High precision**
(repeatability ± 0.02 mm)
- **High reliability**
(industrial design)
- **Low maintenance costs**
(virtually maintenance free due to direct drive gears; no belt drives)
- **Jerk-free straight movements**
(brush less synchron motors; no stepper motors)
- **Low ELF interference**
(motor control fields shielded via the closed metallic construction shields)

4.2.3 E-Field Probe

The probe is specially designed and calibrated for use in liquids with high permittivities for the measurements the Specific Dosimetric E-Field Probe EX3DV4-SN:7340 with following specifications is used.

Construction	Symmetrical design with triangular core Built-in optical fiber for surface detection system Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., glycoether)
Calibration	ISO/IEC 17025 calibration service available
Frequency	10 MHz to 6 GHz; Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.2 dB in HSL (rotation around probe axis) ; ± 0.4 dB in HSL (rotation normal to probe axis)
Dynamic range	5 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB
Dimensions	Overall length: 337 mm (Tip: 9 mm) Tip diameter: 2.5 mm (Body: 10 mm) Distance from probe tip to dipole centers: 1.0 mm
Application	General dosimetry up to 3 GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms (EX3DV4)




E-Field Probe Calibration Process

Probe calibration is realized, in compliance with CENELEC EN 62209-1/-2 and IEEE 1528 std, with CALISAR, Antenna proprietary calibration system. The calibration is performed with the EN 62209-1/2 annexe technique using reference guide at the five frequencies.

4.2.4 Data Acquisition Electronics


The data acquisition electronics (DAE) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converte and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

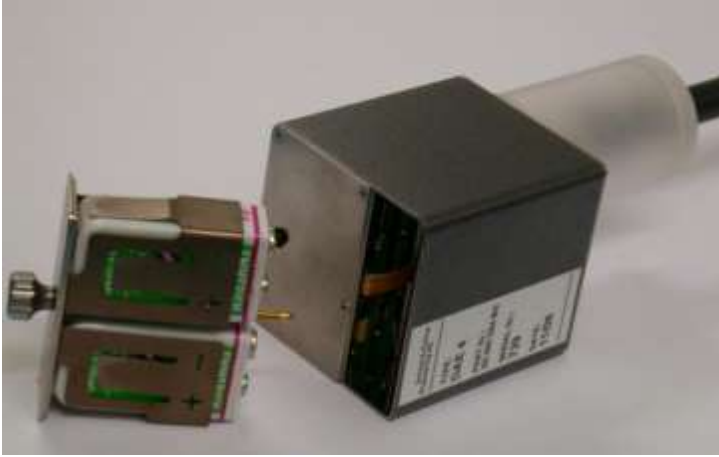

- Input Impedance: 200M Ω
- The Inputs: Symmetrical and Floating
- Commom Mode Rejection: Above 80dB

4.2.5 Phantoms

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.

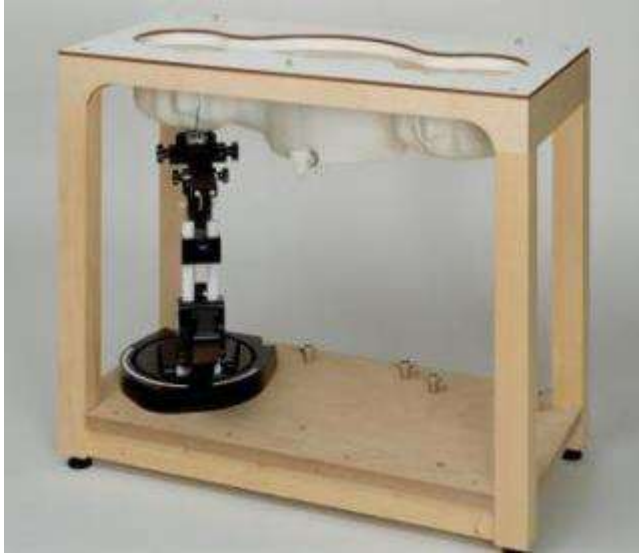

- Left hand
- Right hand
- Flat phantom

Photo of Phantom SN1857



Photo of Phantom SN1859



Serial Number	Material	Length	Height
SN 1857 SAM1	Vinylester, glass fiber reinforced	1000	500
SN 1859 SAM2	Vinylester, glass fiber reinforced	1000	500

4.2.6 Device Holder


The DASY5 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65° . The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. This device holder is used for standard mobile phones or PDA's only. If necessary an additional support of polystyrene material is used. Larger DUT's (e.g. notebooks) cannot be tested using this device holder. Instead a support of bigger polystyrene cubes and thin polystyrene plates is used to position the DUT in all relevant positions to find and measure spots with maximum SAR values. Therefore those devices are normally only tested at the flat part of the SAM.



The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1° .

4.2.7 Simulating Liquid

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5%.

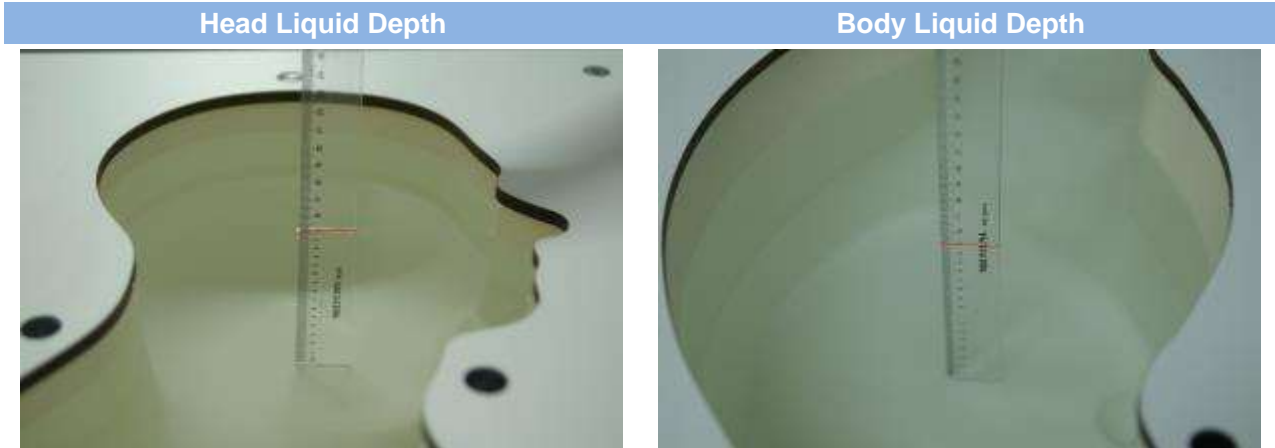

The following table gives the recipes for tissue simulating liquid and the theoretical Conductivity/Permittivity.

Head (Reference IEEE1528)								
Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity σ (S/m)	Permittivity ϵ
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.4	40.0
2450	55.0	0	0	0.1	0	44.9	1.80	39.2
2600	54.9	0	0	0.1	0	45.0	1.96	39.0
Frequency (MHz)	Water (%)	Hexyl Carbitol (%)			Triton X-100 (%)		Conductivity σ (S/m)	Permittivity ϵ
5200	62.52	17.24			17.24		4.66	36.0
5800	62.52	17.24			17.24		5.27	35.3
Body (From instrument manufacturer)								
Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity σ (S/m)	Permittivity ϵ
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0.1	0	31.3	1.95	52.7
2600	68.2	0	0	0.1	0	31.7	2.16	52.5

Frequency(MHz)	Water	DGBE (%)	Salt (%)	Conductivity σ (S/m)	Permittivity ϵ
5200	78.60	21.40	/	5.54	47.86
5800	78.50	21.40	0.1	6.0	48.20


5 SYSTEM VERIFICATION

5.1 Purpose of System Check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

5.2 System Check Setup

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

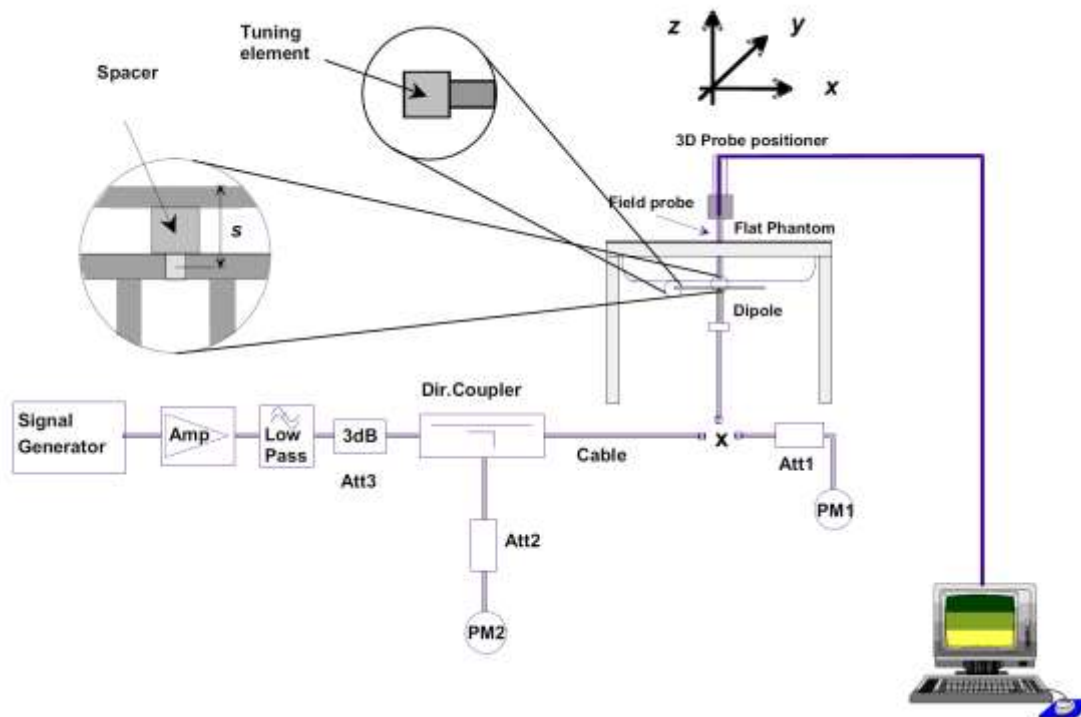

6 TEST POSITION CONFIGURATIONS


According to KDB 648474 D04 Handset v01r02, handsets are tested for SAR compliance in head, body-worn accessory and other use configurations described in the following subsections.

6.1 Head Exposure Conditions

Head exposure is limited to next to the ear voice mode operations. Head SAR compliance is tested according to the test positions defined in IEEE Std 1528-2013 using the SAM phantom illustrated as below.


6.1.1 Two Imaginary Lines on the Handset

- The vertical centerline passes through two points on the front side of the handset - the midpoint of the width w_t of the handset at the level of the acoustic output, and the midpoint of the width w_b of the bottom of the handset.
- The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.
- The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.

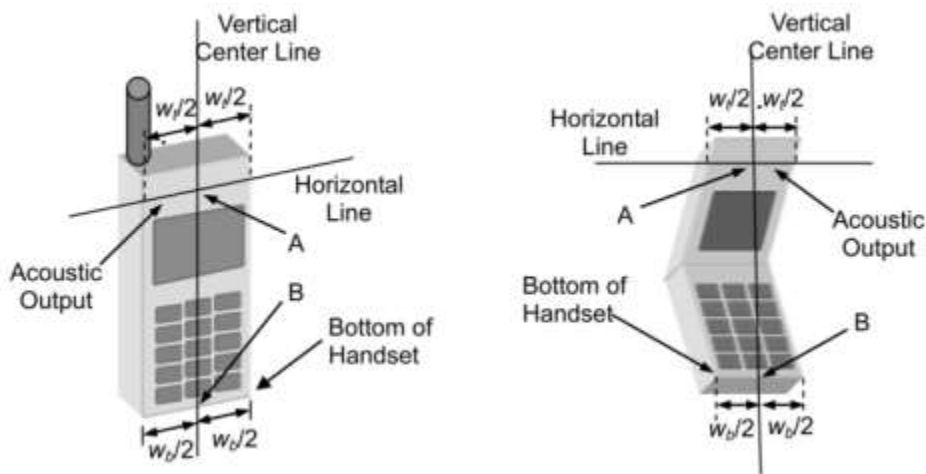

6.1.2 Cheek Position

- To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.
- To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost.

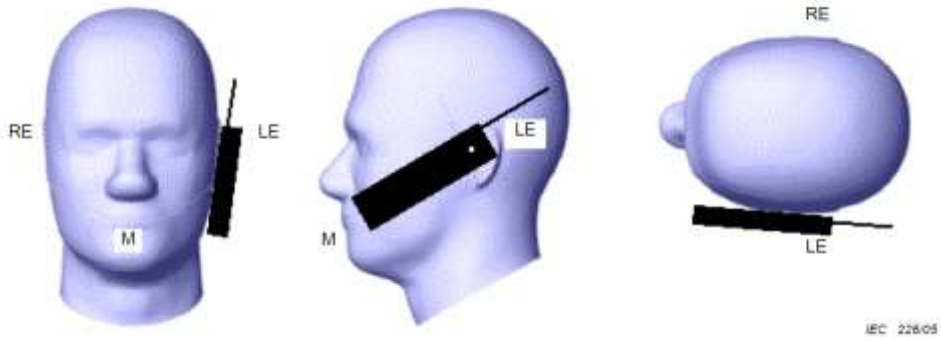

6.1.3 Tilted Position

- (a) To position the device in the "cheek" position described above.
- (b) While maintaining the device the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost.




6.2 Body-worn Position Conditions

Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in EN 62209-2 are used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode. When the reported SAR for a body-worn accessory.


Body-worn accessories that do not contain metallic or conductive components may be tested according to worst-case exposure configurations, typically according to the smallest test separation distance required for the group of body-worn accessories with similar operating and exposure characteristics. All body-worn accessories containing metallic components are tested in conjunction with the host device.

Body-worn accessory SAR compliance is based on a single minimum test separation distance for all wireless and operating modes applicable to each body-worn accessory used by the host, and according to the relevant voice and/or data mode transmissions and operations. If a body-worn accessory supports voice only operations in its normal and expected use conditions, testing of data mode for body-worn compliance is not required. A conservative minimum test separation distance for supporting off-the-shelf body-worn accessories that may be acquired by users of consumer handsets is used to test for body-worn accessory SAR compliance. This distance is determined by the handset manufacturer, according to the requirements of Supplement C 01-01. Devices that are designed to operate on the body of users using lanyards and straps, or without requiring additional body-worn accessories, will be tested using a conservative minimum test separation distance ≤ 5 mm to support compliance.

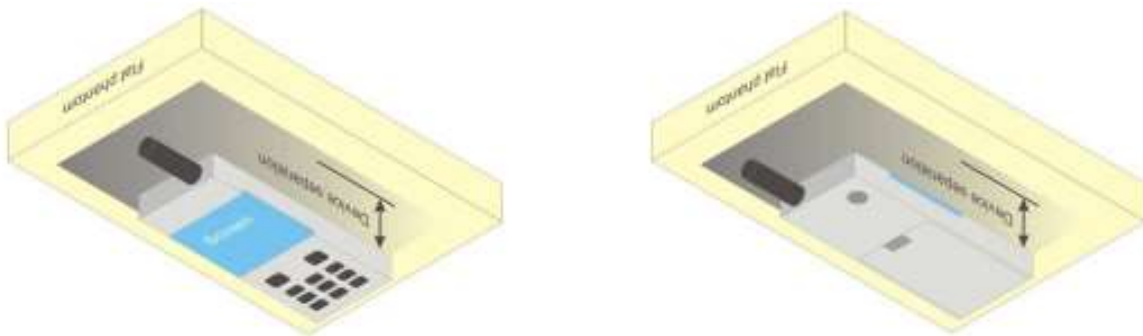


6.3 Hotspot Mode Exposure Position Conditions

For handsets that support hotspot mode operations, with wireless router capabilities and various web browsing functions, the relevant hand and body exposure conditions are tested according to the hotspot SAR procedures in KDB 941225. A test separation distance of 10 mm is required between the phantom and all surfaces and edges with a transmitting antenna located within 25 mm from that surface or edge. When the form factor of a handset is smaller than 9 cm x 5 cm, a test separation distance of 5 mm (instead of 10 mm) is required for testing hotspot mode. When the separation distance required for body-worn accessory testing is larger than or equal to that tested for hotspot mode, in the same wireless mode and for the same surface of the phone, the hotspot mode SAR data may be used to support body-worn accessory SAR compliance for that particular configuration (surface).

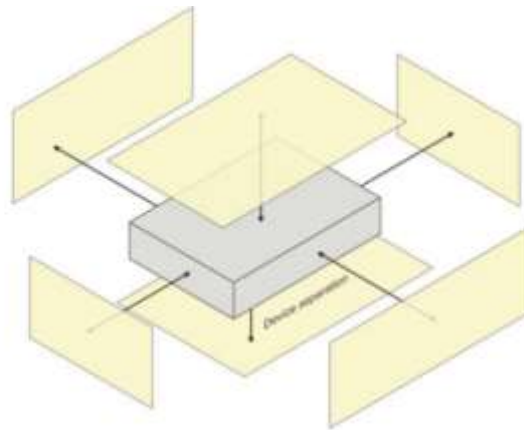

7 MEASUREMENT PROCEDURE

7.1 Measurement Process Diagram

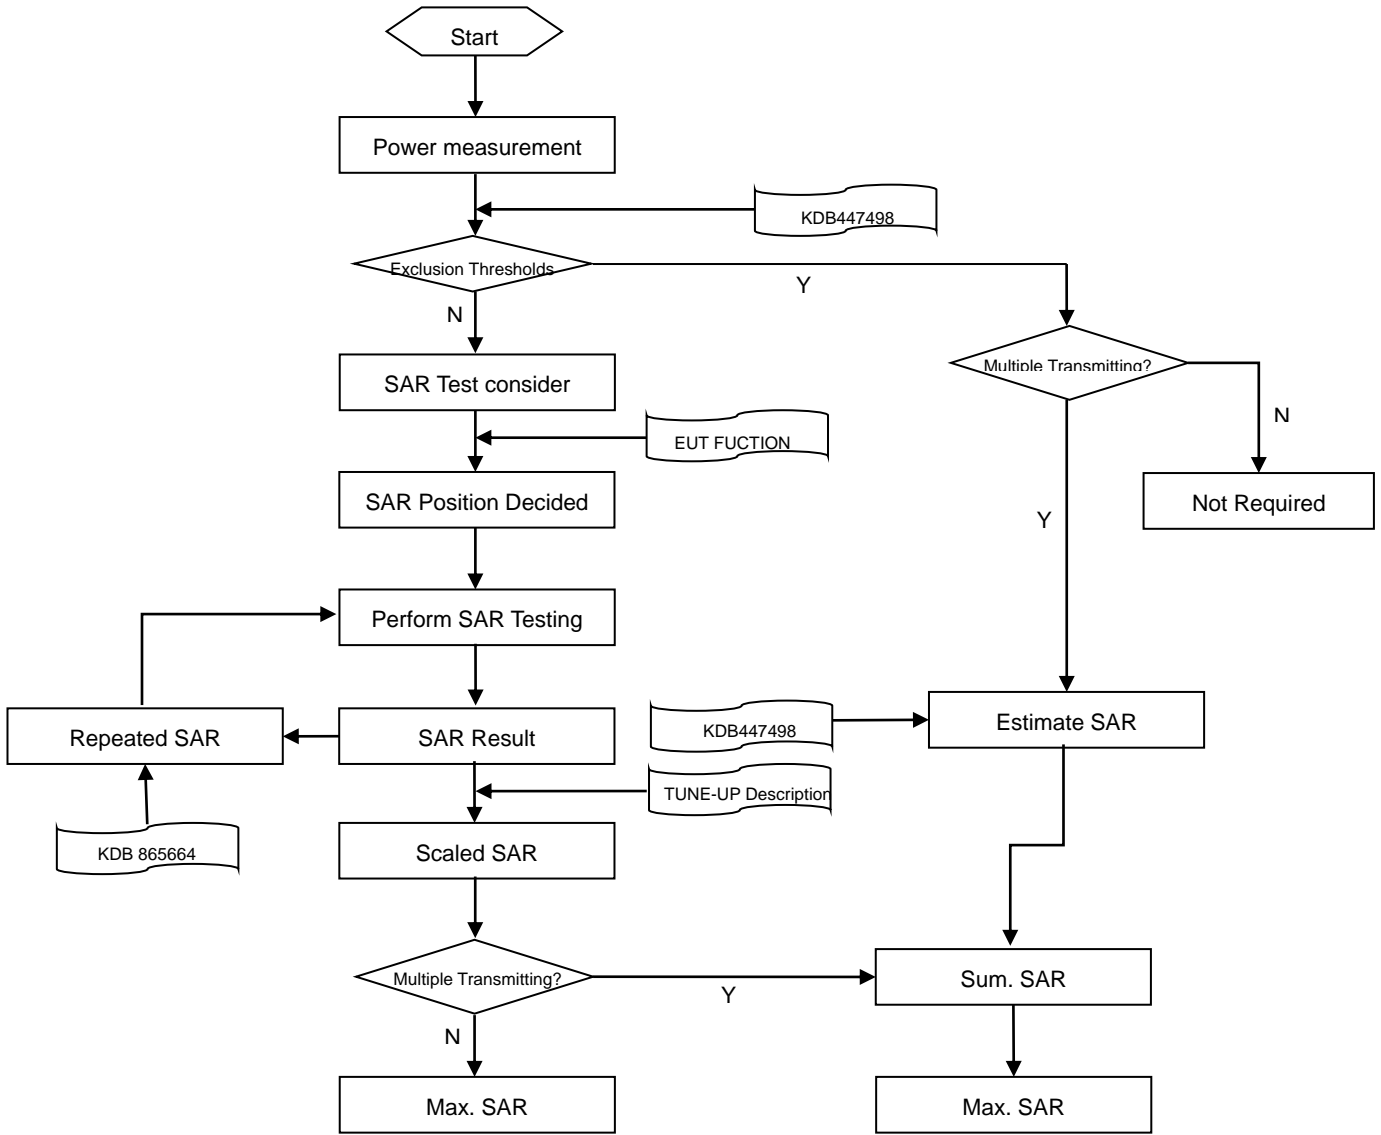

7.2 SAR Scan General Requirement

Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1 g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std 1528-2013.

			≤3GHz	>3GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5±1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			30°±1°	20°±1°
Maximum area scan spatial resolution: Δx Area , Δy Area			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3–4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx Zoom , Δy Zoom			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3–4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: Δz Zoom (n)		≤ 5 mm	3–4 GHz: ≤ 4 mm
				4–5 GHz: ≤ 3 mm
				5–6 GHz: ≤ 2 mm
	graded grid	Δz Zoom (1): between 1st two points closest to phantom surface	≤ 4 mm	3–4 GHz: ≤ 3 mm
Δz Zoom (n>1): between subsequent points		4–5 GHz: ≤ 2.5 mm 5–6 GHz: ≤ 2 mm		
			≤ 1.5· Δz Zoom (n-1)	
Minimum zoom scan volume	x, y, z		≥30 mm	3–4 GHz: ≥ 28 mm
				4–5 GHz: ≥ 25 mm
				5–6 GHz: ≥ 22 mm
Note: <ol style="list-style-type: none"> δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the reported SAR from the area scan based 1 g SAR estimation procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz. 				

7.3 Measurement Procedure

The following steps are used for each test position

- a. Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface
- b. Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
- c. Measurement of the SAR distribution with a grid of 8 to 16mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
- d. Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8*4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

7.4 Area & Zoom Scan Procedure

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. Area scan and zoom scan resolution setting follows KDB 865664 D01v01r04 quoted below.

When the 1 g SAR of the highest peak is within 2 dB of the SAR limit, additional zoom scans are required for other peaks within 2 dB of the highest peak that have not been included in any zoom scan to ensure there is no increase in SAR.

8 CONDUCTED RF OUTPUT POWER

8.1 WIFI

8.1.1 2.4G WIFI

Band (GHz)	Mode	Channel	Freq. (MHz)	Peak Power (dBm)	SAR Test Require.
2.4 (2.4~2.4835)	802.11b	1	2412	15.54	Yes
		6	2437	15.52	No
		11	2462	15.18	No
	802.11g	1	2412	11.89	No
		6	2437	13.65	No
		11	2462	11.54	No
	802.11n(HT20)	1	2412	12.15	No
		6	2437	12.98	No
		11	2462	11.32	No
	802.11n(HT40)	3	2422	10.04	No
		6	2437	13.78	No
		9	2452	9.42	No

8.1.2 5G WIFI


Band (GHz)	Mode	Channel	Freq. (MHz)	Peak Power (dBm)	SAR Test Require.
5.2 (5.15~5.25)	802.11a	36	5180	13.26	No
		44	5220	14.29	No
		48	5240	14.28	No
	802.11n(HT20)	36	5180	13.14	No
		44	5220	14.07	No
		48	5240	14.04	No
	802.11n(HT40)	38	5190	13.48	No
		46	5230	14.30	No
	802.11ac(HT20)	36	5180	13.21	No
		44	5220	14.25	No
		48	5240	14.04	No
	802.11ac(HT40)	38	5190	13.45	No
46		5230	14.41	No	
5.3 (5.25~5.35)	802.11a	52	5260	14.44	No
		60	5300	14.46	No
		64	5320	13.20	No
	802.11n(HT20)	52	5260	14.18	No
		60	5300	14.22	No
		64	5320	13.02	No
	802.11n(HT40)	54	5270	14.58	No
		62	5310	14.30	No

	802.11ac(HT20)	52	5260	14.25	No	
		60	5300	14.29	No	
		64	5320	13.12	No	
	802.11ac(HT40)	54	5270	14.69	Yes	
		62	5310	14.38	No	
5.6 (5.47~5.725)	802.11a	100	5500	13.02	No	
		116	5580	14.13	No	
		120	5600	14.55	No	
		140	5700	14.78	No	
	802.11n(HT20)	100	5500	12.77	No	
		116	5580	13.88	No	
		120	5600	13.71	No	
		140	5700	14.61	No	
	802.11n(HT40)	102	5510	14.05	No	
		110	5550	12.65	No	
		118	5590	13.46	No	
		134	5670	14.92	Yes	
	802.11ac(HT20)	100	5500	12.81	No	
		116	5580	13.97	No	
		120	5600	13.58	No	
		140	5700	14.65	No	
	802.11ac(HT40)	102	5510	14.16	No	
		110	5550	12.64	No	
		118	5590	13.98	No	
		134	5670	14.89	No	
	5.8 (5.725~5.850)	802.11a	149	5745	14.37	No
			157	5785	14.32	No
			161	5805	14.30	No
			165	5825	14.12	No
802.11n(HT20)		149	5745	14.18	No	
		157	5785	14.13	No	
		161	5805	14.20	No	
		165	5825	14.32	No	
802.11n(HT40)		151	5755	14.43	No	
		159	5790	13.36	No	
802.11ac(HT20)		149	5745	14.15	No	
		157	5785	14.27	No	
		161	5805	14.22	No	
		165	5825	14.17	No	
802.11ac(HT40)		151	5755	14.59	Yes	
		159	5790	13.32	No	

8.2 Bluetooth

Mode	GFSK			$\pi/4$ -DQPSK		
Channel	0	39	78	0	39	78
Frequency (MHz)	2402	2441	2480	2402	2441	2480
Peak Power (dBm)	0.65	-0.83	-1.65	0.39	-1.05	-1.92
Mode	8-DPSK			BLE (GFSK)		
Channel	0	39	78	0	19	39
Frequency (MHz)	2402	2441	2480	2402	2440	2480
Peak Power (dBm)	0.64	-0.78	-1.69	-3.90	-4.93	-5.98

9 TEST EXCLUSION CONSIDERATION

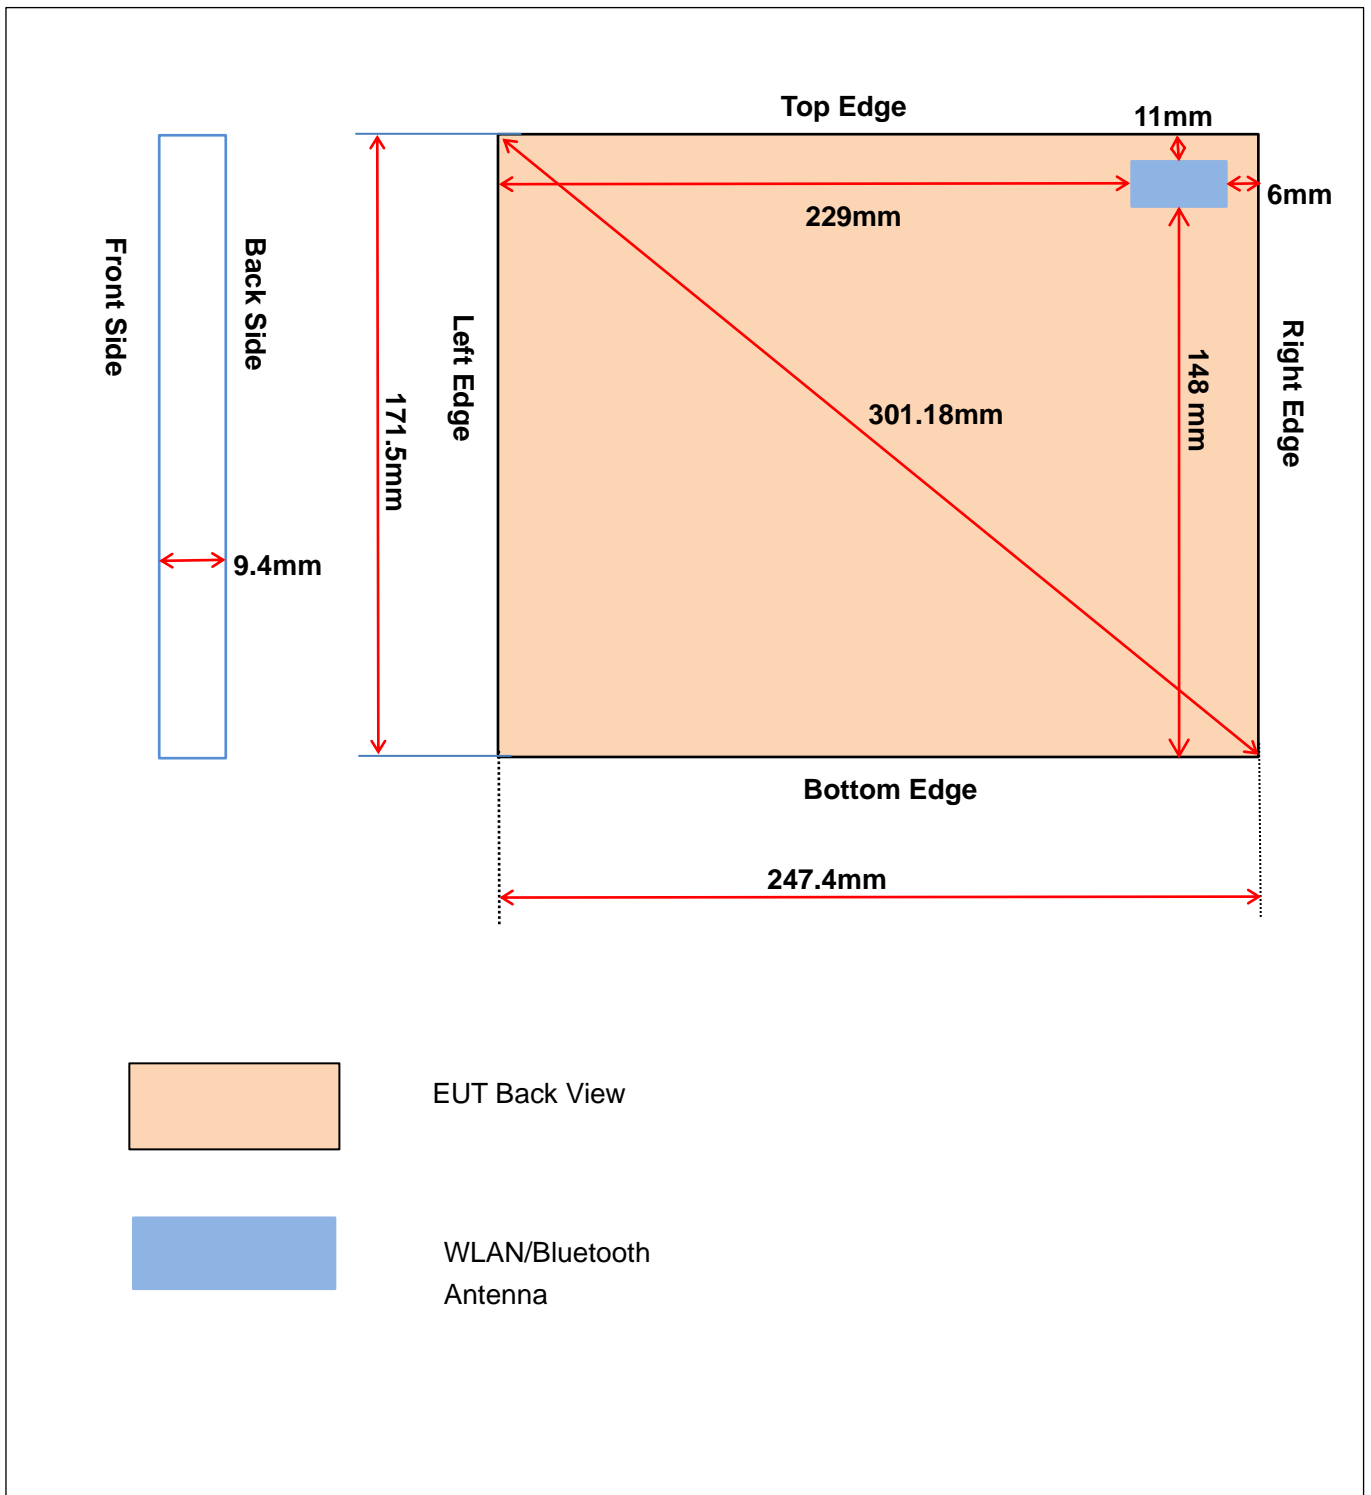

9.1 SAR Test Exclusion Consideration Table

According with FCC KDB 447498 D01, Appendix A, <SAR Test Exclusion Thresholds for 100 MHz – 6 GHz and ≤ 50 mm> Table, this Device SAR test configurations consider as following :

Band	Mode	Max. Peak Power		Test Position Configurations						
		dBm	mW	Head	Front Side	Back Side	Left Edge	Right Edge	Top Edge	Bottom Edge
WLAN 2.4G	Distance to User		<5mm	7mm	2mm	229mm	6mm	11mm	148mm	
	802.11b	15.70	37.15	No	No	Yes	No	Yes	Yes	No
	802.11g	13.80	23.99	No	No	No	No	No	No	No
	802.11n(HT20)	13.10	20.42	No	No	No	No	No	No	No
	802.11n(HT40)	13.90	24.55	No	No	No	No	No	No	No
WLAN 5.2G	802.11a	14.40	27.54	No	No	No	No	No	No	No
	802.11n(HT20)	14.10	25.70	No	No	No	No	No	No	No
	802.11n(HT40)	14.60	28.84	No	No	No	No	No	No	No
	802.11ac(HT20)	14.30	26.92	No	No	No	No	No	No	No
	802.11ac(HT40)	14.50	28.18	No	No	No	No	No	No	No
WLAN 5.3G	802.11a	14.50	28.18	No	No	No	No	No	No	No
	802.11n(HT20)	14.40	27.54	No	No	No	No	No	No	No
	802.11n(HT40)	14.70	29.51	No	No	No	No	No	No	No
	802.11ac(HT20)	14.40	27.54	No	No	No	No	No	No	No
	802.11ac(HT40)	14.80	30.20	No	No	Yes	No	Yes	Yes	No
WLAN 5.6G	802.11a	14.80	30.20	No	No	No	No	No	No	No
	802.11n(HT20)	14.70	29.51	No	No	No	No	No	No	No
	802.11n(HT40)	15.00	31.62	No	No	Yes	No	Yes	Yes	No
	802.11ac(HT20)	14.70	29.51	No	No	No	No	No	No	No
	802.11ac(HT40)	15.00	31.62	No	No	No	No	No	No	No
WLAN 5.8G	802.11a	14.40	27.54	No	No	No	No	No	No	No
	802.11n(HT20)	14.40	27.54	No	No	No	No	No	No	No
	802.11n(HT40)	14.50	28.18	No	No	No	No	No	No	No
	802.11ac(HT20)	14.30	26.92	No	No	No	No	No	No	No
	802.11ac(HT40)	14.70	29.51	No	No	Yes	No	Yes	Yes	No
Bluetooth	Distance to User		<5mm	7mm	2mm	229mm	6mm	11mm	148mm	
	Bluetooth BR/EDR	0.80	1.20	No	No	No	No	No	No	
	Bluetooth BLE	-3.80	0.42	No	No	No	No	No	No	

Note:

- Maximum power is the source-based time-average power and represents the maximum RF output power including tune-up tolerance among production units
- Per KDB 447498 D01, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
- Per KDB 447498 D01, standalone SAR test exclusion threshold is applied; If the distance of the antenna to the user is < 5mm, 5mm is used to determine SAR exclusion threshold
- Per KDB 447498 D01, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances

≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR

- a. $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- b. Power and distance are rounded to the nearest mW and mm before calculation
- c. The result is rounded to one decimal place for comparison
- d. For < 50 mm distance, we just calculate mW of the exclusion threshold value (3.0) to do compare.

This formula is $[3.0] / [\sqrt{f(\text{GHz})}] \cdot [(\text{min. test separation distance, mm})] = \text{exclusion threshold of mW}$.

5. Per KDB 447498 D01, at 100 MHz to 6 GHz and for test separation distances > 50 mm, the SAR test exclusion threshold is determined according to the following
 - a. $[\text{Threshold at 50 mm in step 1}] + (\text{test separation distance} - 50 \text{ mm}) \cdot (f(\text{MHz})/150)$ mW, at 100 MHz to 1500 MHz
 - b. $[\text{Threshold at 50 mm in step 1}] + (\text{test separation distance} - 50 \text{ mm}) \cdot 10$ mW at > 1500 MHz and ≤ 6 GHz
6. Per KDB 248227 D01, choose the highest output power channel to test SAR and determine further SAR exclusion.8. For each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is less than 1/4dB higher than those measured at the lowest data rate
7. Per KDB 248227 D01 SAR is not required for the following 2.4 GHz OFDM conditions.
 - a. When KDB Publication 447498 D01 SAR test exclusion applies to the OFDM configuration.
 - b. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is $\leq 1.2 \text{ W/kg}$.
8. Per KDB 248227 D01 SAR is not required for the following U-NII-1 and U-NII-2A bands conditions.
 - a. When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is $\leq 1.2 \text{ W/kg}$, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, each band is tested independently for SAR.
 - b. When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is $\leq 1.2 \text{ W/kg}$, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, each band is tested independently for SAR.

9.2 10g Extremity Exposure Consideration

According with FCC KDB 648474 D04, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, unless it is confirmed otherwise through KDB inquiries, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance;

The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions. The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

Conclusion:

The maximum 1g SAR for EUT is 1.189 W/Kg, which is less than 1.2W/Kg, 10-g extremity SAR is not required.

10 TEST RESULT

Fre. Band	Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (%)	1 g Meas. SAR (W/Kg)	Meas. Power (dBm)	Max. tune-up Power (dBm)	Scaling Factor	1 g Scaled SAR (W/Kg)	Meas. No.
Configuration A												
2.4G	802.11 b	Back side	0	1	2412	0.00	0.983	15.54	15.70	1.038	1.020	1#
			0	6	2437	2.09	1.010	15.52	15.70	1.042	1.053	2#
		Right Edge	0	1	2412	-2.50	0.174	15.54	15.70	1.038	0.181	3#
		Top Edge	0	1	2412	2.57	0.392	15.54	15.70	1.038	0.407	4#
5.3G	802.11ac (HT40)	Back side	0	54	5270	2.09	0.952	14.69	14.80	1.026	0.976	5#
			0	62	5310	3.99	0.532	14.38	14.80	1.102	0.586	6#
		Right Edge	0	54	5270	3.75	0.510	14.69	14.80	1.026	0.523	7#
		Top Edge	0	54	5270	2.09	0.235	14.69	14.80	1.026	0.241	8#
5.6G	802.11n (HT40)	Back side	0	134	5670	1.86	1.028	14.92	15.00	1.019	1.047	9#
			0	118	5590	3.75	0.834	13.46	15.00	1.426	1.189	10#
		Right Edge	0	134	5670	2.09	0.231	14.92	15.00	1.019	0.235	11#
		Top Edge	0	134	5670	1.62	0.449	14.92	15.00	1.019	0.457	12#
5.8G	802.11ac (HT40)	Back side	0	151	5755	2.32	1.051	14.59	14.70	1.026	1.078	13#
			0	159	5795	0.00	0.543	13.32	14.70	1.374	0.746	14#
		Right Edge	0	151	5755	3.28	0.398	14.59	14.70	1.026	0.408	15#
		Top Edge	0	151	5755	0.23	0.160	14.59	14.70	1.026	0.164	16#
Configuration B												
2.4G	802.11 b	Back side	0	1	2412	2.80	0.974	15.54	15.70	1.038	1.011	17#
			0	6	2437	-1.14	1.040	15.52	15.70	1.042	1.084	18#
		Right Edge	0	1	2412	3.51	0.240	15.54	15.70	1.038	0.249	19#
		Top Edge	0	1	2412	2.33	0.142	15.54	15.70	1.038	0.147	20#
5.3G	802.11ac (HT40)	Back side	0	54	5270	3.99	1.070	14.69	14.80	1.026	1.097	21#
			0	62	5310	-2.95	0.241	14.38	14.80	1.102	0.265	22#
		Right Edge	0	54	5270	1.86	0.163	14.69	14.80	1.026	0.167	23#
		Top Edge	0	54	5270	3.75	0.125	14.69	14.80	1.026	0.128	24#
5.6G	802.11n (HT40)	Back side	0	134	5670	0.46	1.090	14.92	15.00	1.019	1.110	25#
			0	118	5590	4.71	0.791	13.46	15.00	1.426	1.128	26#
		Right Edge	0	134	5670	2.80	0.123	14.92	15.00	1.019	0.125	27#
		Top Edge	0	134	5670	2.09	0.104	14.92	15.00	1.019	0.106	28#
5.8G	802.11ac (HT40)	Back side	0	151	5755	1.62	1.010	14.59	14.70	1.026	1.036	29#
			0	159	5795	1.39	0.252	13.32	14.70	1.374	0.346	30#
		Right Edge	0	151	5755	3.28	0.104	14.59	14.70	1.026	0.107	31#
		Top Edge	0	151	5755	-3.84	0.180	14.59	14.70	1.026	0.185	32#

Note :

1. Refer to ANNEX C for the detailed test data for each test configuration.
2. $\text{Power Drift}(\%) = 10^{\frac{\text{Meas Power Drift}(\text{dB})}{10}} - 1$.
3. According to KDB 616217 D04, SAR evaluation for the front of the surface display screens are not necessary.
4. According to KDB 248227 D01

- a. When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required in that exposure configuration.
- b. When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

11 SAR Measurement Variability

According to KDB 865664 D01, SAR measurement variability was assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. Alternatively, if the highest measured SAR for both head and body tissue-equivalent media are ≤ 1.45 W/kg and the ratio of these highest SAR values, i.e., largest divided by smallest value, is ≤ 1.10 , the highest SAR configuration for either head or body tissue-equivalent medium may be used to perform the repeated measurement. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR repeated measurement procedure:

1. When the highest measured SAR is < 0.80 W/kg, repeated measurement is not required.
2. When the highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
3. If the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 , or when the original or repeated measurement is ≥ 1.45 W/kg, perform a second repeated measurement.
4. If the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 , and the original, first or second repeated measurement is ≥ 1.5 W/kg, perform a third repeated measurement.

EUT	Frequency Band (MHz)	Wireless Band	RF Exposure Conditions	Test Position	Highest Measured SAR (W/kg)	Repeated SAR (Yes/No)	Highest Measured SAR (W/kg)	Largest to Smallest SAR Ratio
Configuration A	2.4G	802.11 b	Body	Back side	1.010	Yes	0.988	1.022
	5.3G	802.11ac (HT40)	Body	Back side	0.952	Yes	0.938	1.015
	5.6G	802.11n (HT40)	Body	Back side	1.028	Yes	0.996	1.032
	5.8G	802.11ac (HT40)	Body	Back side	1.051	Yes	1.024	1.026
Configuration A	2.4G	802.11 b	Body	Back side	1.040	Yes	0.998	1.040
	5.3G	802.11ac (HT40)	Body	Back side	1.070	Yes	1.01	1.060
	5.6G	802.11n (HT40)	Body	Back side	1.090	Yes	1.00	1.090
	5.8G	802.11ac (HT40)	Body	Back side	1.010	Yes	0.989	1.020

Note: The ratio of largest to smallest SAR for the original and first repeated measurements is < 1.20 , the second repeated measurement is not required.

12 SIMULTANEOUS TRANSMISSION

12.1 Simultaneous Transmission Mode Consider

2.4G WIFI, 5G WIFI and Bluetooth share the same antenna and cannot transmit simultaneously. So the simultaneous multi-band transmission evaluation is not required in this report.

12.2 Estimated SAR Calculation

According to KDB 447498 D01, when standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR was estimated according to following formula to result in substantially conservative SAR values of ≤ 0.4 W/kg to determine simultaneous transmission SAR test exclusion.

$$\text{Estimated SAR} = \frac{\text{Max. Tune Up Power}(mw)}{\text{Min Test Separation Distance}} * \frac{\sqrt{f_{GHz}}}{x} \quad (\text{where } x = 7.5 \text{ for 1-g SAR})$$

If the minimum test separation distance is < 5 mm, a distance of 5 mm is used for estimated SAR calculation. When the test separation distance is > 50 mm, the 0.4 W/kg is used for SAR-1g.

Band	Mode	Position	Antenna To user (mm)	SAR Testing	Max. Tune-up Power (dBm)	Max. Tune-up Power (mW)	Frequency (GHz)	Calculation Distance/Gap (mm)	Estimated SAR (W/kg)
BR/EDR	GFSK	Back side	5	No	0.80	1.20	2.402	5	0.050
		Right Edge	5	No	0.80	1.20	2.402	5	0.050
		Top Edge	5	No	0.80	1.20	2.402	5	0.050
BLE	GFSK	Back side	5	No	-3.80	0.42	2.402	5	0.017
		Right Edge	5	No	-3.80	0.42	2.402	5	0.017
		Top Edge	5	No	-3.80	0.42	2.402	5	0.017

13 TEST EQUIPMENTS LIST

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
PC	Dell	N/A	N/A	N/A	N/A
2450MHz Validation Dipole	Speag	D2450V2	SN: 952	2014/11/27	2016/11/26
5G Validation Dipole	Speag	D5GHzV2	SN 1200	2014/12/04	2016/12/03
E-Field Probe	Speag	EX3DV4	SN: 7340	2015/12/10	2016/12/09
Phantom1	Speag	SAM	SN: 1859	N/A	N/A
Phantom2	Speag	SAM	SN: 1857	N/A	N/A
Data acquisition electronics	Speag	DAE4	SN: 1454	2015/12/08	2016/12/07
Signal Generator	R&S	SMBV100A	260592	2015/07/16	2016/07/15
Power Meter	Agilent	E4419B	GB40201833	2015/10/14	2016/10/13
Power Sensor	R&S	NRP-Z21	103971	2015/07/16	2016/07/15
Power Amplifier	SATIMO	6552B	22374	N/A	N/A
Dielectric Probe Kit	SATIMO	SCLMP	SN 25/13 OCPG56	2015/08/17	2016/08/16
Network Analyzer	R&S	ZVL-6	EMY46103472	2015/07/16	2016/07/15
Attenuator	COM-MW	ZA-S1-31	1305003187	N/A	N/A
Directional coupler	AA-MCS	AAMCS-UDC	000272	N/A	N/A

ANNEX A SIMULATING LIQUID VERIFICATION RESULT

The dielectric parameters of the liquids were verified prior to the SAR evaluation using an SCLMP Dielectric Probe Kit.

Date	Liquid Type	Fre. (MHz)	Temp. (°C)	Meas. Conductivity (σ) (S/m)	Meas. Permittivity (ϵ)	Target Conductivity (σ) (S/m)	Target Permittivity (ϵ)	Conductivity Tolerance (%)	Permittivity Tolerance (%)
2016.01.21	Body	2402	21.4	1.97	51.76	1.90	52.77	3.68	-1.91
		2412		1.97	51.70	1.91	52.75	3.14	-1.99
		2422		1.98	51.68	1.92	52.74	3.13	-2.01
		2437		2.01	51.63	1.94	52.72	3.61	-2.07
		2440		2.01	51.49	1.94	52.71	3.61	-2.31
		2441		2.01	51.22	1.94	52.71	3.61	-2.83
		2450		2.01	50.93	1.95	52.70	3.08	-3.36
		2452		2.02	50.91	1.95	52.70	3.59	-3.40
		2462		2.03	50.86	1.97	52.69	3.05	-3.47
		2480		2.05	50.35	1.99	52.66	3.02	-4.39
2016.01.22	Body	5180	21.6	5.15	47.95	5.28	49.04	-2.46	-2.22
		5190		5.17	47.91	5.29	49.02	-2.27	-2.26
		5200		5.18	47.86	5.30	49.00	-2.26	-2.33
		5220		5.19	47.80	5.30	48.99	-2.08	-2.43
		5230		5.22	47.59	5.32	48.97	-1.88	-2.82
		5240		5.26	47.46	5.35	48.96	-1.68	-3.06
		5260		5.32	47.21	5.37	48.94	-0.93	-3.53
		5270		5.37	46.99	5.38	48.92	-0.19	-3.95
		5300		5.38	46.95	5.42	48.88	-0.74	-3.95
		5310		5.40	46.92	5.43	48.87	-0.55	-3.99
		5320		5.41	46.90	5.44	48.85	-0.55	-3.99
		5500		5.56	46.62	5.65	48.61	-1.59	-4.09
		5510		5.59	46.59	5.66	48.60	-1.24	-4.14
		5550		5.64	46.51	5.71	48.54	-1.23	-4.18
		5580		5.65	46.49	5.74	48.50	-1.57	-4.14
		5590		5.67	46.42	5.75	48.48	-1.39	-4.25
		5600		5.68	46.36	5.77	48.47	-1.56	-4.35
		5670		5.78	46.20	5.85	48.36	-1.20	-4.47
		5700		5.81	46.18	5.88	48.34	-1.19	-4.47
		5745		5.89	46.07	5.94	48.28	-0.84	-4.58
5755	5.98	45.96	5.95	48.26	0.50	-4.77			
5785	6.01	45.92	5.98	48.22	0.50	-4.77			
5790	6.02	45.93	5.99	48.21	0.50	-4.73			
5800	6.03	45.92	6.00	48.20	0.50	-4.73			
5805	6.05	45.89	6.01	48.19	0.67	-4.77			
5825	6.08	45.86	6.03	48.17	3.68	-1.91			

Note: The tolerances limit of Conductivity and Permittivity is $\pm 5\%$.

Date	Liquid	Fre.	Temp.	Meas.	Meas.	Target	Target	Conductivity	Permittivity
------	--------	------	-------	-------	-------	--------	--------	--------------	--------------

	Type	(MHz)	(°C)	Conductivity (σ) (S/m)	Permittivity (ϵ)	Conductivity (σ) (S/m)	Permittivity (ϵ)	Tolerance (%)	Tolerance (%)
2016.02.28	Body	2402	21.2	1.89	52.44	1.90	52.77	-0.53	-0.63
		2412		1.88	52.60	1.91	52.75	-1.57	-0.28
		2422		1.90	52.78	1.92	52.74	-1.04	0.08
		2437		1.92	52.70	1.94	52.72	-1.03	-0.04
		2440		1.93	52.74	1.94	52.71	-0.52	0.06
		2441		1.96	52.75	1.94	52.71	1.03	0.08
		2450		1.99	52.85	1.95	52.70	-2.64	-2.14
		2452		1.93	51.80	1.95	52.70	-1.03	-1.71
		2462		1.94	52.65	1.97	52.69	-1.52	-0.08
		2480		1.99	52.56	1.99	52.66	0.00	-0.19
2016.02.27	Body	5180	21.5	5.25	49.03	5.28	49.04	-0.57	-0.02
		5190		5.26	49.01	5.29	49.02	-0.57	-0.02
		5200		5.16	47.95	5.30	49.00	-0.52	-4.00
		5220		5.38	48.89	5.30	48.99	1.51	-0.20
		5230		5.30	48.93	5.32	48.97	-0.38	-0.08
		5240		5.38	48.90	5.35	48.96	0.56	-0.12
		5260		5.39	48.98	5.37	48.94	0.37	0.08
		5270		5.34	48.90	5.38	48.92	-0.74	-0.04
		5300		5.41	47.86	5.42	48.88	-0.18	-2.09
		5310		5.46	48.90	5.43	48.87	0.55	0.06
		5320		5.48	48.95	5.44	48.85	0.74	0.20
		2016.02.29		Body	5500	21.1	5.68	48.68	5.65
5510	5.67		48.30		5.66		48.60	0.18	-0.62
5550	5.78		48.50		5.71		48.54	1.23	-0.08
5580	5.76		48.60		5.74		48.50	0.35	0.21
5590	5.78		48.43		5.75		48.48	0.52	-0.10
5600	5.74		46.53		5.77		48.47	0.17	-4.61
5670	5.78		48.32		5.85		48.36	-1.20	-0.08
2016.02.27	Body	5700	21.4	5.78	48.56	5.88	48.34	-1.70	0.46
		5745		5.86	48.15	5.94	48.28	-1.35	-0.27
		5755		5.98	48.30	5.95	48.26	0.50	0.08
		5785		5.85	48.10	5.98	48.22	-2.17	-0.25
		5790		5.85	48.16	5.99	48.21	-2.34	-0.10
		5800		6.01	45.98	6.00	48.20	0.17	-4.61
		5805		6.01	48.13	6.01	48.19	0.00	-0.12
5825	6.05	48.15	6.03	48.17	0.33	-0.04			

Note: The tolerances limit of Conductivity and Permittivity is $\pm 5\%$.

ANNEX B SYSTEM CHECK RESULT

Comparing to the original SAR value provided by SPEAG, the validation data should be within its specification of 10 % (for 1 g).

Date	Liquid Type	Freq. (MHz)	Power (mW)	Measured SAR (W/kg)	Normalized SAR (W/kg)	Dipole SAR (W/kg)	Tolerance (%)	Targeted SAR (W/kg)	Tolerance (%)
2016.01.21	Body	2450	100	5.16	51.60	50.60	1.98	52.40	-1.53
2016.01.22	Body	5200	100	7.96	79.60	75.30	5.71	76.5	4.05
2016.01.22	Body	5600	100	8.49	84.90	80.50	5.47	83.3	1.92
2016.01.22	Body	5800	100	8.13	81.30	74.70	8.84	78.0	4.23
2016.02.28	Body	2450	100	5.06	50.60	50.60	0.00	52.40	-3.44
2016.02.27	Body	5200	100	8.01	80.10	75.30	6.37	76.5	4.71
2016.02.29	Body	5600	100	8.52	85.20	80.50	5.84	83.3	2.28
2016.02.27	Body	5800	100	8.07	80.70	74.70	8.03	78.0	3.46

Note: The tolerance limit of System validation $\pm 10\%$.

System Performance Check Data (2450MHz Body)

2450-BODY-2016-1-21

Date/Time: 1/21/2016

Communication System Band: D2450 (2450.0 MHz); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 2.01$ S/m; $\epsilon_r = 50.93$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 21.9 Liquid Temperature: 21.4

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(7.38, 7.38, 7.38); Calibrated: 12/10/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 12/8/2015
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/CW 2450 100mW BODY/Area Scan (81x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 5.66 W/kg


Configuration/CW 2450 100mW BODY/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 53.63 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 10.6 W/kg

SAR(1 g) = 5.16 W/kg; SAR(10 g) = 2.24 W/kg

Maximum value of SAR (measured) = 5.69 W/kg

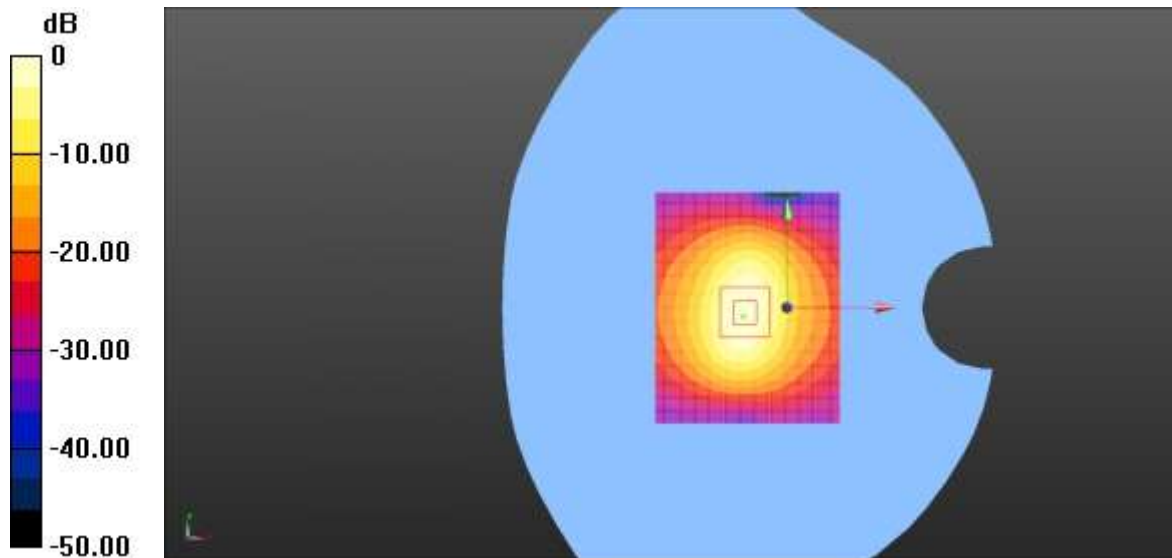

0 dB = 5.69 W/kg = 7.55 dBW/kg

System Performance Check Data (5200MHz Body)

5200-HEAD-2016-1-22

Date/Time: 1/22/2016

Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.18$ S/m; $\epsilon_r = 47.86$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.0 Liquid Temperature: 21.6

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(4.56, 4.56, 4.56); Calibrated: 12/10/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 12/8/2015
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/CW 5200/Area Scan (81x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 9.68 W/kg


Configuration/CW 5200/Zoom Scan (7x7x21)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 42.23 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 25.8.1 W/kg

SAR(1 g) = 7.96 W/kg; SAR(10 g) = 2.21 W/kg

Maximum value of SAR (measured) = 9.77 W/kg

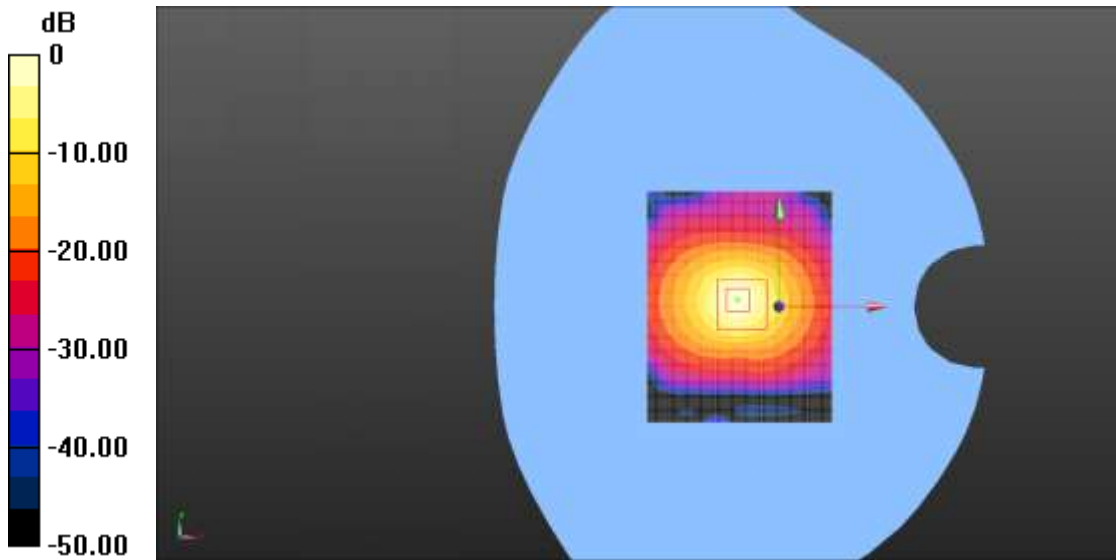

0 dB = 9.77 W/kg = 9.9 dBW/kg

System Performance Check Data (5600MHz Body)

5600-BODY-2016-1-22

Date/Time: 1/22/2016

Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5600$ MHz; $\sigma = 5.68$ S/m; $\epsilon_r = 46.36$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.0 Liquid Temperature: 21.6

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(3.98, 3.98, 3.98); Calibrated: 12/10/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 12/1/2014
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/cw5600 body 2/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 10.01 W/kg


Configuration/cw5600 body 2/Zoom Scan (8x8x21)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 43.94 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 32.6 W/kg

SAR(1 g) = 8.49 W/kg; SAR(10 g) = 2.26 W/kg

Maximum value of SAR (measured) = 10.08 W/kg

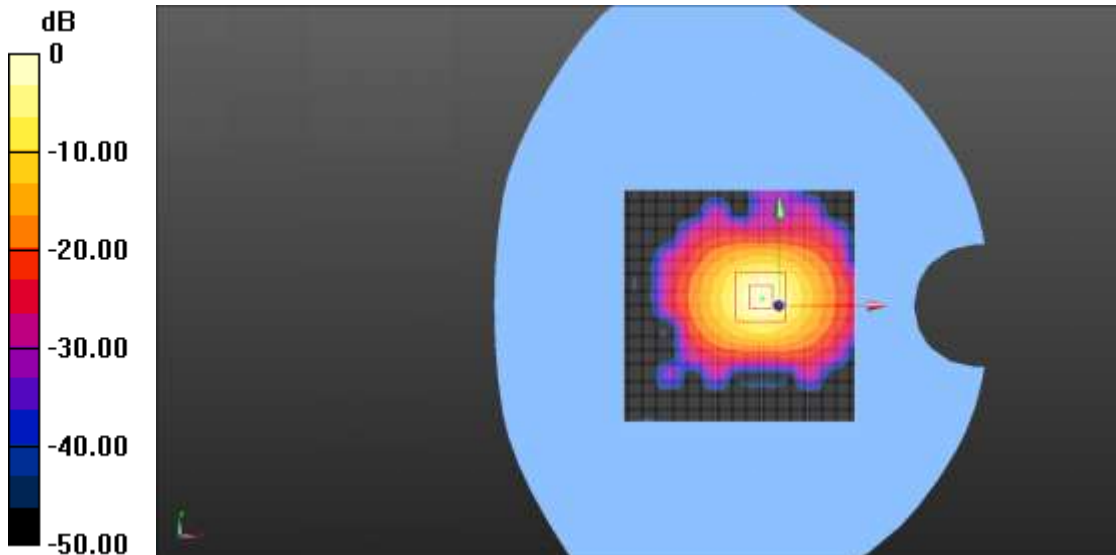

0 dB = 10.08 W/kg = 10.03 dBW/kg

System Performance Check Data (5800MHz Body)

5800-BODY-2016-1-22

Date/Time: 1/22/2016

Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5800 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5800$ MHz; $\sigma = 6.03$ S/m; $\epsilon_r = 45.92$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.0 Liquid Temperature: 21.6

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(4.15, 4.15, 4.15); Calibrated: 12/10/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 12/8/2015
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/cw5800 body/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 9.95 W/kg


Configuration/cw5800 body/Zoom Scan (8x8x21)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 42.68 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 47.5 W/kg

SAR(1 g) = 8.13 W/kg; SAR(10 g) = 2.26 W/kg

Maximum value of SAR (measured) = 9.98 W/kg

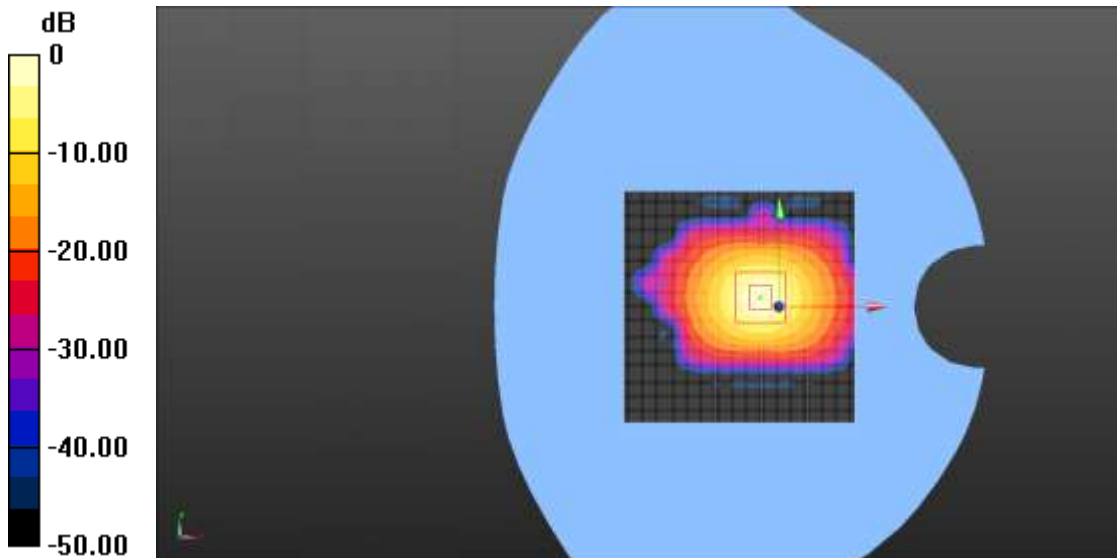

0 dB = 9.98 W/kg = 9.99 dBW/kg

System Performance Check Data (2450MHz Body)

Date/Time: 2/28/2016

Communication System Band: CD2450 (2450.0 MHz); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.99$ S/m; $\epsilon_r = 52.85$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 21.9 Liquid Temperature: 21.2

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(7.38, 7.38, 7.38); Calibrated: 12/10/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 12/8/2015
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/CW 2450 100mW BODY/Area Scan (81x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 5.46 W/kg


Configuration/CW 2450 100mW BODY/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 52.83 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 10.6 W/kg

SAR(1 g) = 5.06 W/kg; SAR(10 g) = 2.21 W/kg

Maximum value of SAR (measured) = 5.58 W/kg

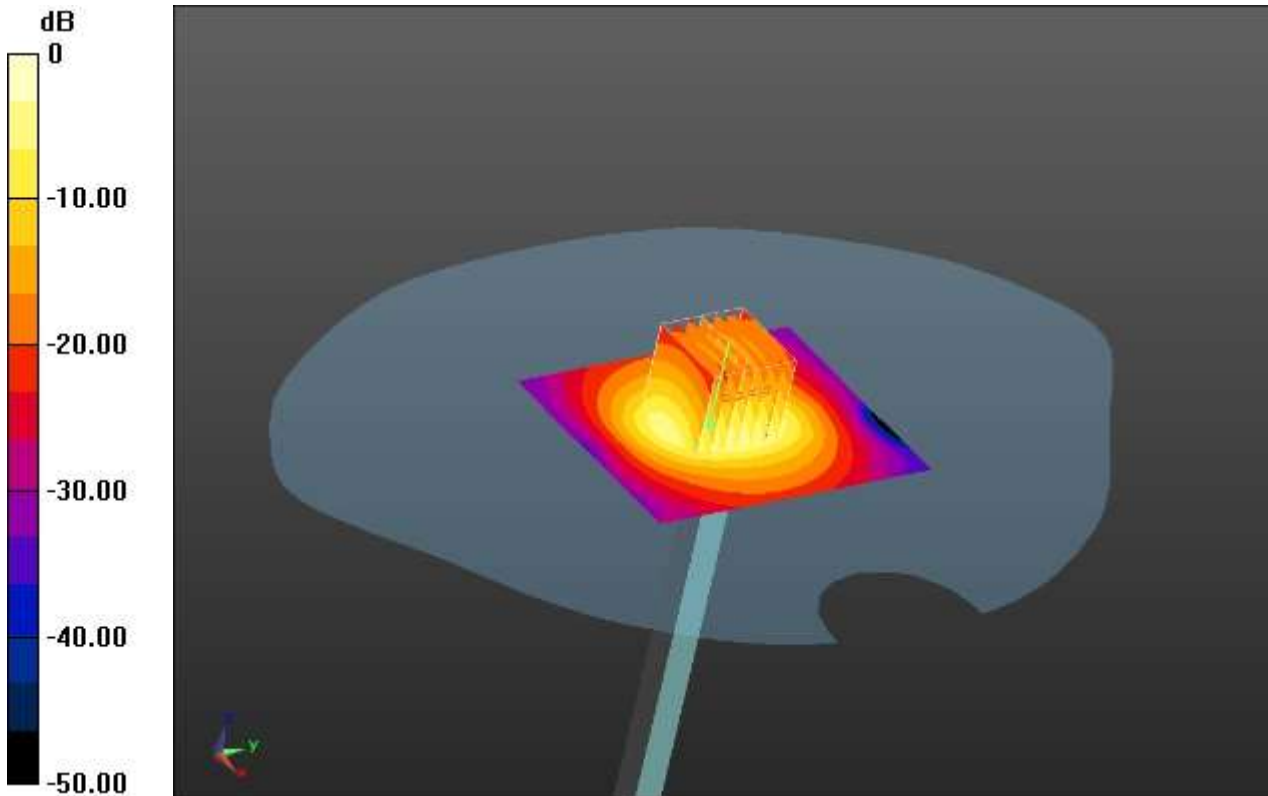

0 dB = 5.76 W/kg = 7.60 dBW/kg

System Performance Check Data (5200MHz Body)

Date/Time: 2/27/2016

Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.16$ S/m; $\epsilon_r = 47.95$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.1 Liquid Temperature: 21.5

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(4.56, 4.56, 4.56); Calibrated: 12/10/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 12/8/2015
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/CW 5200/Area Scan (81x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 9.89 W/kg


Configuration/CW 5200/Zoom Scan (7x7x21)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 43.03 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 25.99 W/kg

SAR(1 g) = 8.01 W/kg; SAR(10 g) = 2.24 W/kg

Maximum value of SAR (measured) = 9.83 W/kg

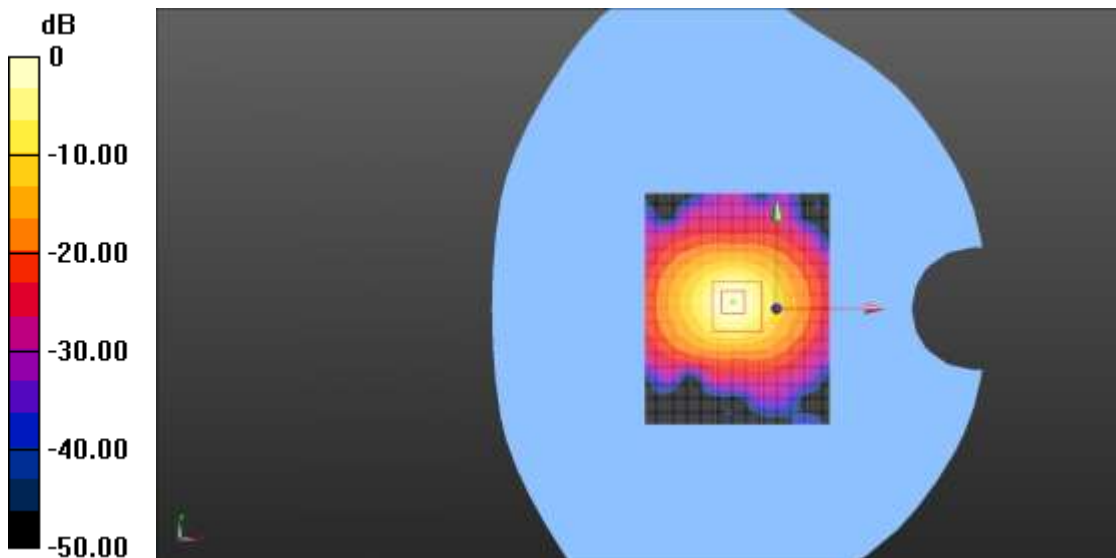

0 dB = 9.83 W/kg = 9.93 dBW/kg

System Performance Check Data (5600MHz Body)

Date/Time: 2/29/2016

Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5600$ MHz; $\sigma = 5.74$ S/m; $\epsilon_r = 46.53$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 21.7 Liquid Temperature: 21.1

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(4.1, 4.1, 4.1); Calibrated: 12/10/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 12/1/2014
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/CW5600 Body/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 10.12 W/kg


Configuration/CW5600 Body/Zoom Scan (8x8x21)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 44.06 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 33.1 W/kg

SAR(1 g) = 8.52 W/kg; SAR(10 g) = 2.28 W/kg

Maximum value of SAR (measured) = 10.16 W/kg

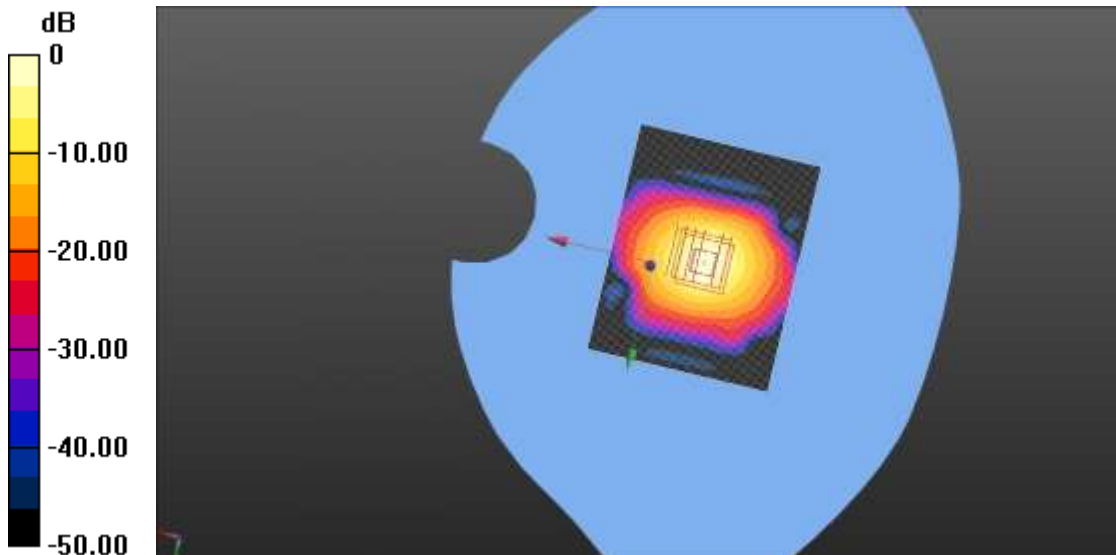

0 dB = 10.16 W/kg = 10.07 dBW/kg

System Performance Check Data (5800MHz Body)

Date/Time: 2/27/2016

Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5800 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5800 \text{ MHz}$; $\sigma = 6.01 \text{ S/m}$; $\epsilon_r = 45.98$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature: 22.0 Liquid Temperature: 21.4

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(4.15, 4.15, 4.15); Calibrated: 12/10/2015;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 12/8/2015
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/cw5800 body/Area Scan (101x101x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 9.45 W/kg


Configuration/cw5800 body/Zoom Scan (8x8x21)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 41.13 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 47.5 W/kg

SAR(1 g) = 8.07 W/kg; SAR(10 g) = 2.21 W/kg

Maximum value of SAR (measured) = 9.49 W/kg

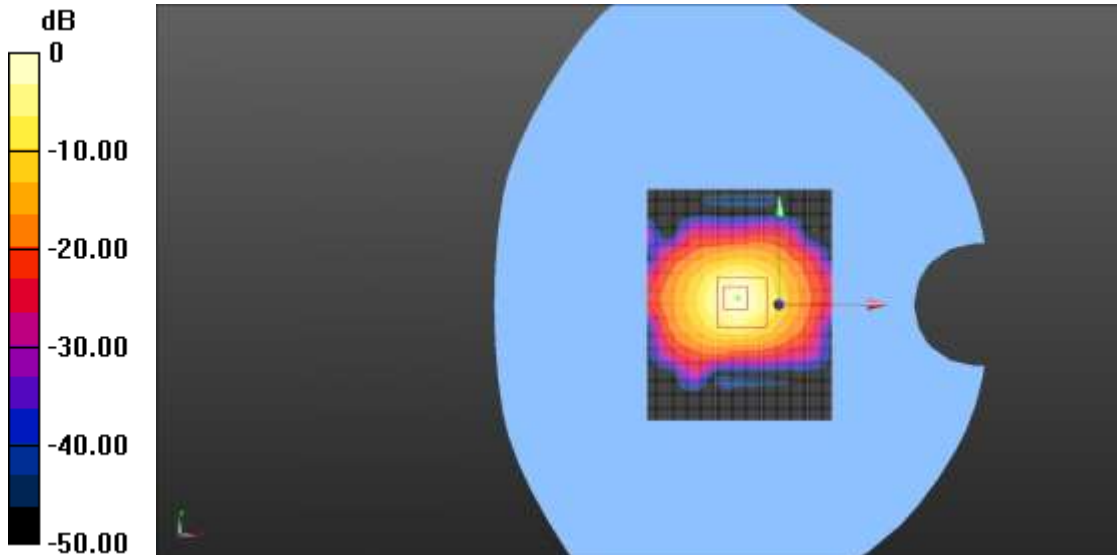

0 dB = 9.49 W/kg = 9.97 dBW/kg

ANNEX C TEST DATA

MEAS. 1 Body Plane with Back Side on Channel 1 in 2.4G WLAN 802.11b with

Configuration A mode

Date/Time: 1/21/2016

Communication System Band: WLAN(b); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.973$ S/m; $\epsilon_r = 51.702$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 21.9 Liquid Temperature: 21.4

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(7.38, 7.38, 7.38); Calibrated: 12/10/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 12/8/2015
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

2.4G 1-21/WLAN(b) 2.4G Back Body on low/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.18 W/kg


2.4G 1-21/WLAN(b) 2.4G Back Body on low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.83 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 2.70 W/kg

SAR(1 g) = 0.983 W/kg; SAR(10 g) = 0.354 W/kg

Maximum value of SAR (measured) = 1.20 W/kg

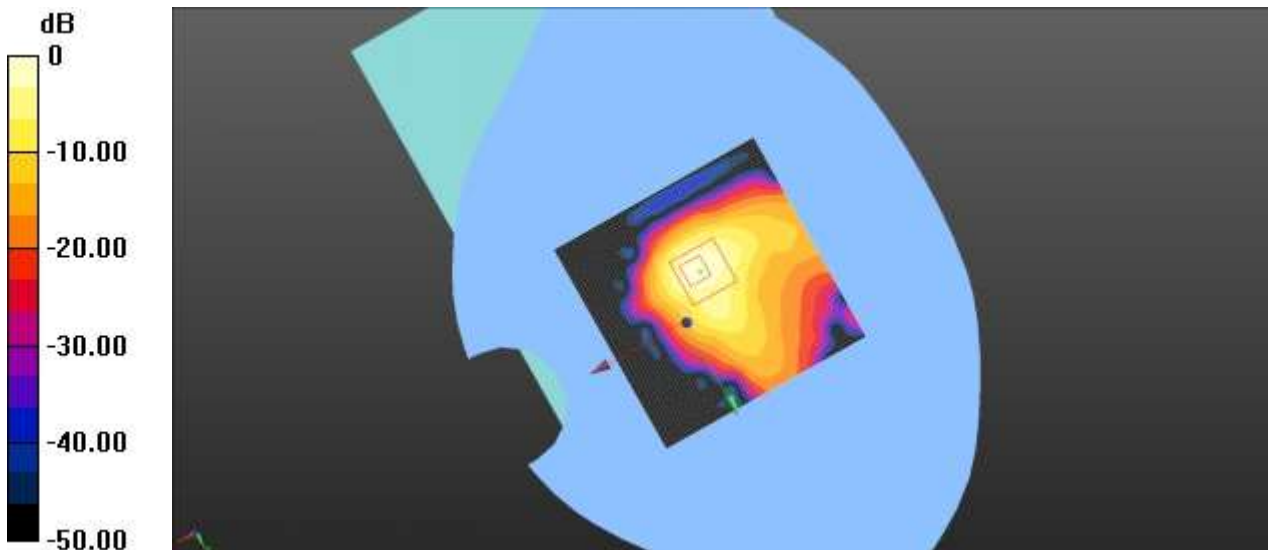

0 dB = 1.20 W/kg = 0.79 dBW/kg

MEAS. 2 Body Plane with Back Side on Channel 6 in 2.4G WLAN 802.11b with Configuration A mode

Date/Time: 1/21/2016

Communication System Band: WLAN(b); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 2.005$ S/m; $\epsilon_r = 51.631$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 21.9 Liquid Temperature: 21.4

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(7.38, 7.38, 7.38); Calibrated: 12/10/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 12/8/2015
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

2.4G 1-21/WLAN(b) 2.4G Back Body on Middle/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.53 W/kg


2.4G 1-21/WLAN(b) 2.4G Back Body on Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.21 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 2.91 W/kg

SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.372 W/kg

Maximum value of SAR (measured) = 1.35 W/kg

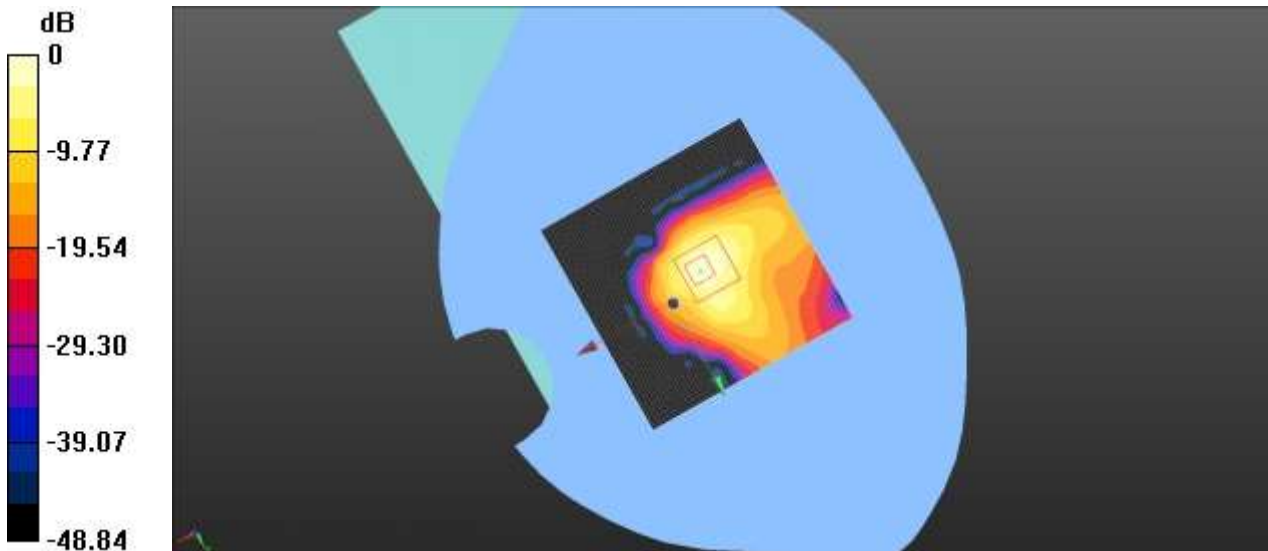

0 dB = 1.35 W/kg = 1.30 dBW/kg

MEAS. 3 Body Plane with Right Edge on Channel 1 in 2.4G WLAN 802.11b with Configuration A mode

Date/Time: 1/21/2016

Communication System Band: WLAN(b); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.973$ S/m; $\epsilon_r = 51.702$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 21.9 Liquid Temperature: 21.4

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(7.38, 7.38, 7.38); Calibrated: 12/10/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 12/8/2015
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

2.4G 1-21/WLAN(b) 2.4G Right Body on low/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.206 W/kg


2.4G 1-21/WLAN(b) 2.4G Right Body on low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.168 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.386 W/kg

SAR(1 g) = 0.174 W/kg; SAR(10 g) = 0.075 W/kg

Maximum value of SAR (measured) = 0.208 W/kg

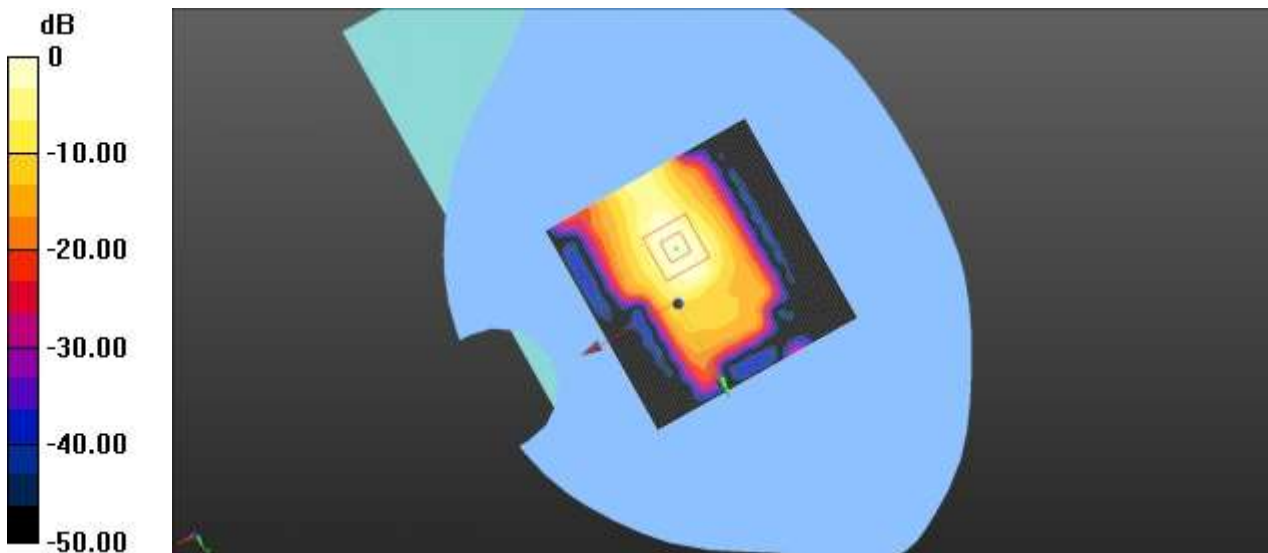

0 dB = 0.206 W/kg = -6.86 dBW/kg

MEAS. 4 Body Plane with Top Edge on Channel 1 in 2.4G WLAN 802.11b with Configuration A mode

Date/Time: 1/21/2016

Communication System Band: WLAN(b); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.973$ S/m; $\epsilon_r = 51.702$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 21.9 Liquid Temperature: 21.4

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(7.38, 7.38, 7.38); Calibrated: 12/10/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 12/8/2015
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

2.4G 1-21/WLAN(b) 2.4G Top Body on low/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.475 W/kg


2.4G 1-21/WLAN(b) 2.4G Top Body on low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.70 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.931 W/kg

SAR(1 g) = 0.392 W/kg; SAR(10 g) = 0.157 W/kg

Maximum value of SAR (measured) = 0.465 W/kg

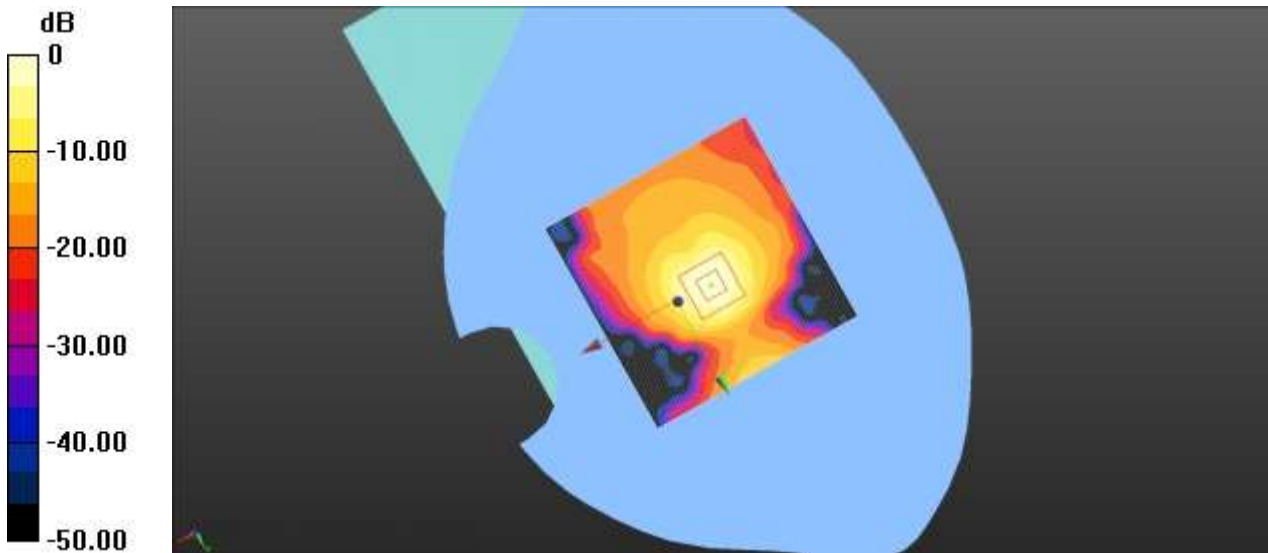

0 dB = 0.475 W/kg = -3.23 dBW/kg

MEAS. 5 Body Plane with Back Side on Channel 54 in 5.3G WLAN 802.11

ac(HT40) with Configuration A mode

Date/Time: 1/22/2016

Communication System Band: WLAN(ac) 40Mhz; Frequency: 5270 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5270$ MHz; $\sigma = 5.37$ S/m; $\epsilon_r = 46.99$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.0 Liquid Temperature:21.6

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(4.56, 4.56, 4.56); Calibrated: 12/10/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 12/8/2015
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

5G/WLAN(ac)5.3G Back Body on channel 54/Area Scan (81x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.02 W/kg


5G/WLAN(ac)5.3G Back Body on channel 54/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 5.93 W/kg

SAR(1 g) = 0.952 W/kg; SAR(10 g) = 0.212 W/kg

Maximum value of SAR (measured) = 1.21 W/kg

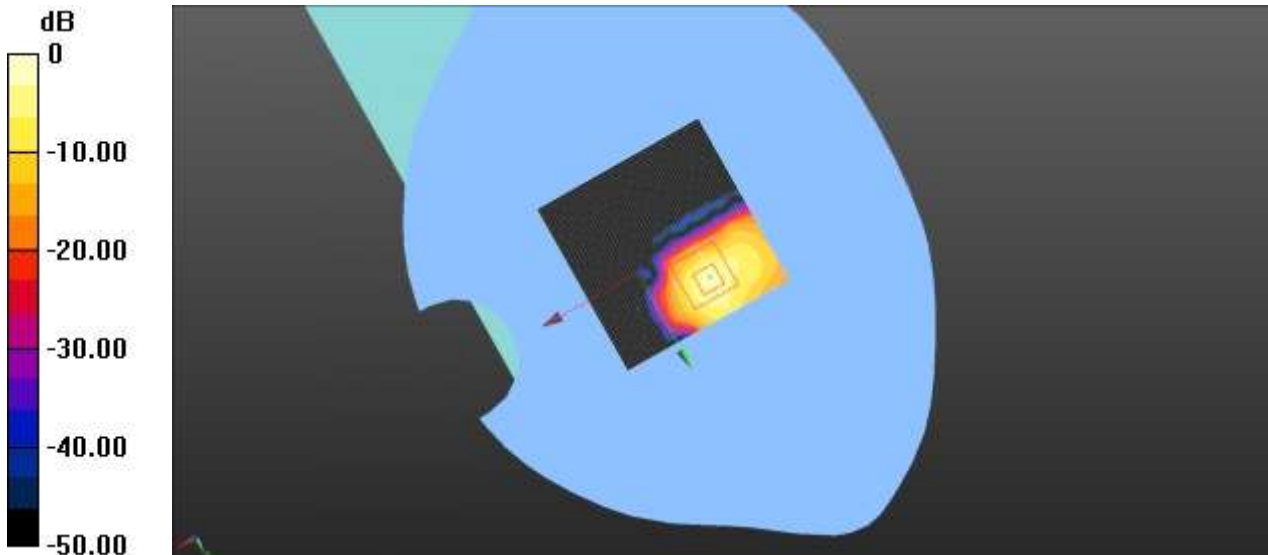

0 dB = 1.21 W/kg = 0.82 dBW/kg

MEAS. 6 Body Plane with Back Side on Channel 62 in 5.3G WLAN 802.11

ac(HT40) with Configuration A mode

Date/Time: 1/22/2016

Communication System Band: WLAN(ac) 40Mhz; Frequency: 5310 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5310$ MHz; $\sigma = 5.395$ S/m; $\epsilon_r = 46.915$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.0 Liquid Temperature:21.6

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(4.56, 4.56, 4.56); Calibrated: 12/10/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 12/8/2015
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

5G/Procedure Name: WLAN(ac) 5.3G Back Body on channel 62/Area Scan (81x81x1): Interpolated grid:

$dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.962 W/kg

5G/Procedure Name: WLAN(ac) 5.3G Back Body on channel 62/Zoom Scan (7x7x12)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 1.667 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 1.90 W/kg

SAR(1 g) = 0.532 W/kg; SAR(10 g) = 0.182 W/kg

Maximum value of SAR (measured) = 1.02 W/kg

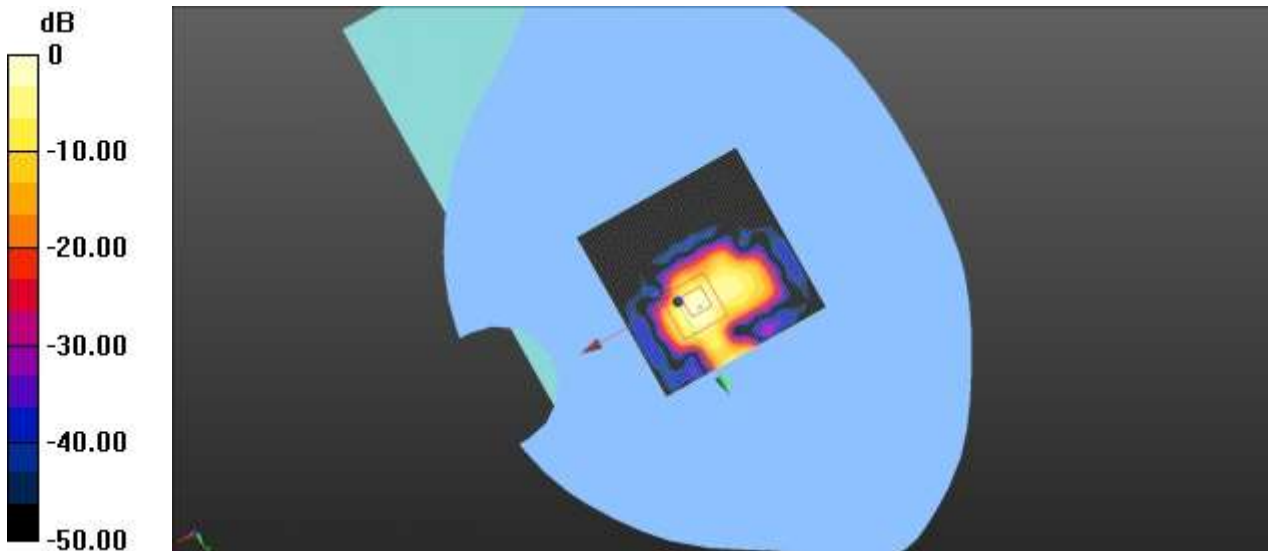

0 dB = 1.02W/kg =1.18dBW/kg

MEAS. 7 Body Plane with Right Edge on Channel 54 in 5.3G WLAN 802.11

ac(HT40) with Configuration A mode

Date/Time: 1/22/2016

Communication System Band: WLAN(ac) 40Mhz; Frequency: 5270 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5270$ MHz; $\sigma = 5.37$ S/m; $\epsilon_r = 46.99$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.0 Liquid Temperature:21.6

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(4.56, 4.56, 4.56); Calibrated: 12/10/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 12/8/2015
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

5G/WLAN(ac)5.3G Right Body on channel 54/Area Scan (81x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.540 W/kg


5G/WLAN(ac)5.3G Right Body on channel 54/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.499 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 3.01 W/kg

SAR(1 g) = 0.510 W/kg; SAR(10 g) = 0.117 W/kg

Maximum value of SAR (measured) = 1.42 W/kg

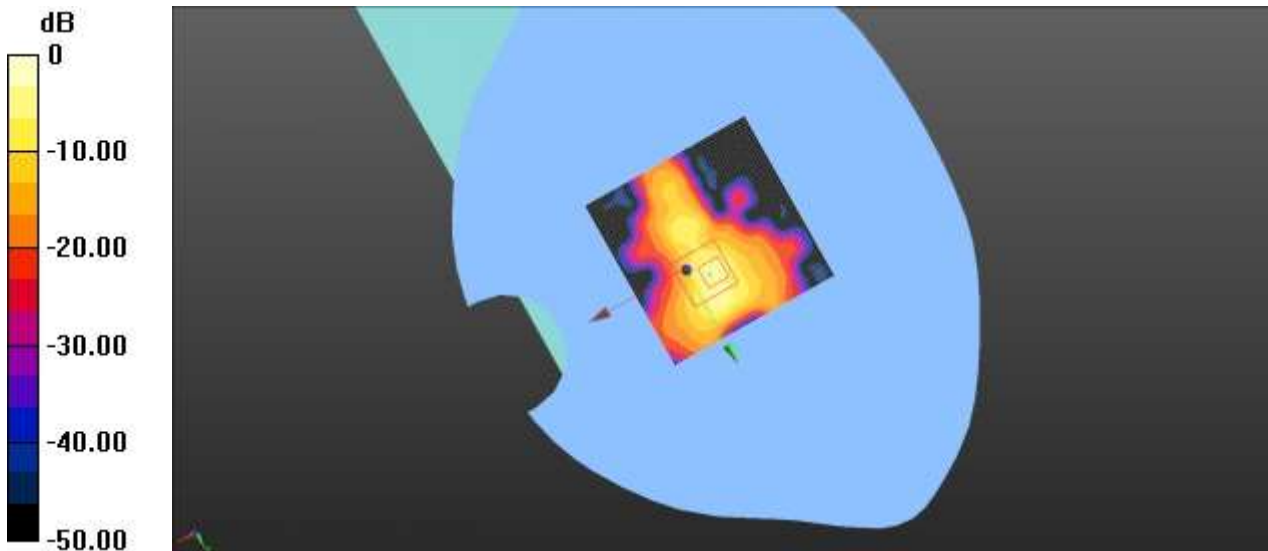

0 dB = 1.42 W/kg = 1.52 dBW/kg

MEAS. 8 Body Plane with Top Edge on Channel 54 in 5.3G WLAN 802.11

ac(HT40) with Configuration A mode

Date/Time: 1/22/2016

Communication System Band: WLAN(ac) 40Mhz; Frequency: 5270 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5270$ MHz; $\sigma = 5.37$ S/m; $\epsilon_r = 46.99$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.0 Liquid Temperature:21.6

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(4.56, 4.56, 4.56); Calibrated: 12/10/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 12/8/2015
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

5G/WLAN(ac)5.3G Top Body on channel 54/Area Scan (81x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.453 W/kg


5G/WLAN(ac)5.3G Top Body on channel 54/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.112 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.868 W/kg

SAR(1 g) = 0.235 W/kg; SAR(10 g) = 0.054 W/kg

Maximum value of SAR (measured) = 0.461 W/kg

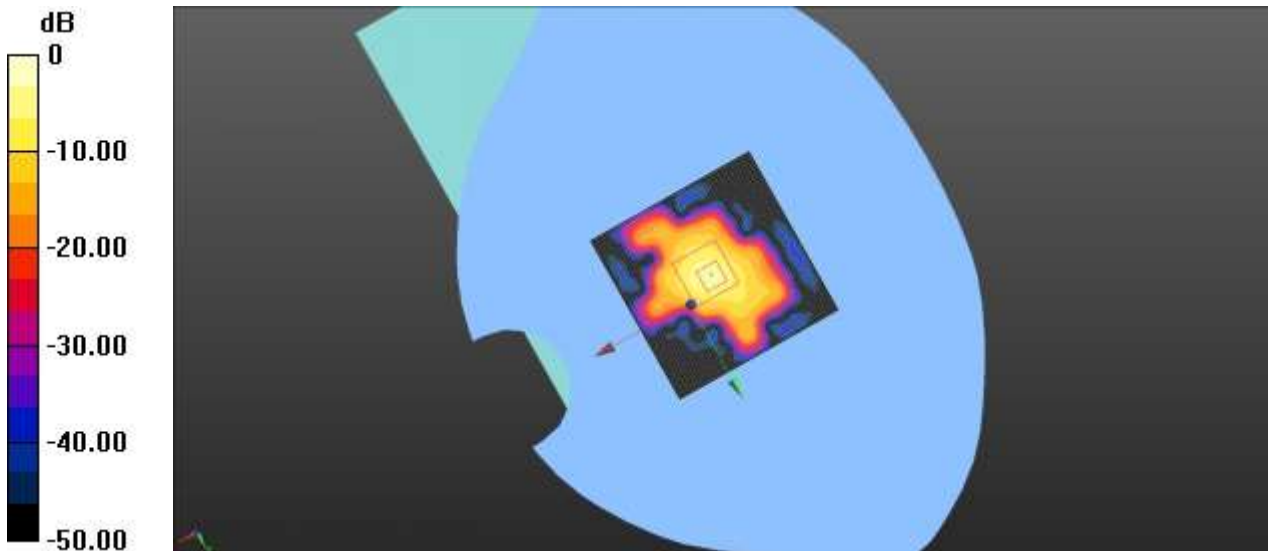

0 dB = 0.461 W/kg = -3.36 dBW/kg

MEAS. 9 Body Plane with Back Side on Channel 134 in 5.6G WLAN 802.11n(HT40) with Configuration A mode

Date/Time: 1/22/2016

Communication System Band: WLAN(n)40Mhz; Frequency: 5670 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5670$ MHz; $\sigma = 5.78$ S/m; $\epsilon_r = 46.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.0 Liquid Temperature:21.6

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(3.98, 3.98, 3.98); Calibrated: 12/10/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 12/8/2015
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

5G 1-21/WLAN(n-HT40) 5.6G Back Body on High/Area Scan (81x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.05 W/kg

5G 1-21/WLAN(n-HT40) 5.6G Back Body on High/Zoom Scan (7x7x12)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.147 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 6.05 W/kg

SAR(1 g) = 1.028 W/kg; SAR(10 g) = 0.244 W/kg

Maximum value of SAR (measured) = 1.13 W/kg

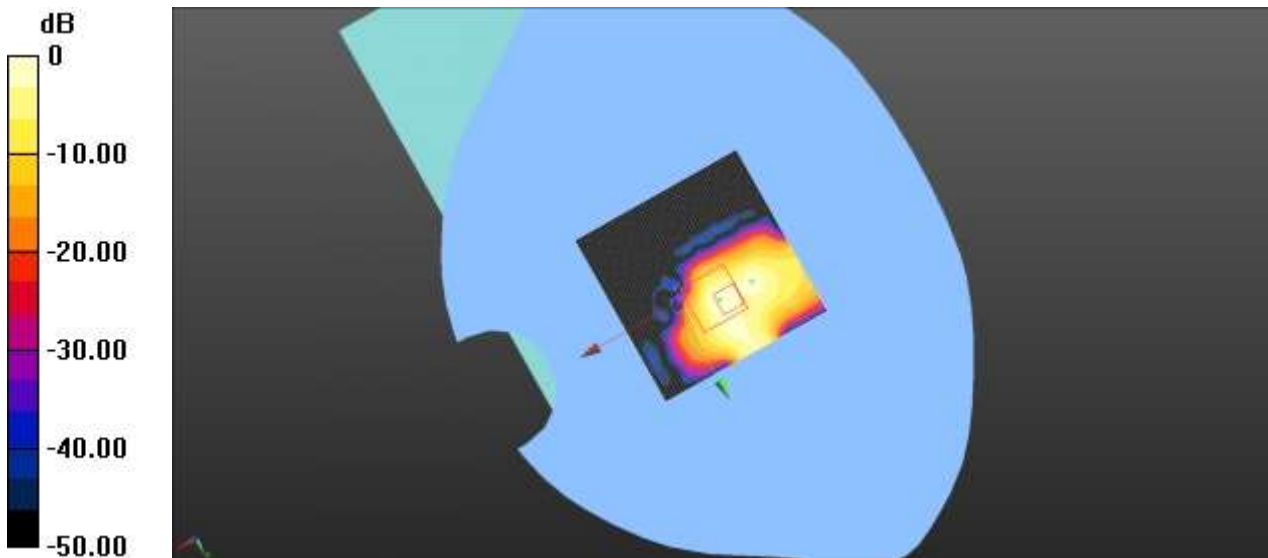

0 dB = 1.13 W/kg = 0.53 dBW/kg

MEAS. 10 Body Plane with Back Side on Channel 118 in 5.6G WLAN 802.11n(HT40) with Configuration A mode

Date/Time: 1/22/2016

Communication System Band: WLAN(n)40Mhz; Frequency: 5590 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5590$ MHz; $\sigma = 5.67$ S/m; $\epsilon_r = 46.42$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.0 Liquid Temperature:21.6

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(3.98, 3.98, 3.98); Calibrated: 12/10/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 12/8/2015
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

5G 1-21/WLAN(n)5.6G Back Body on channel 118/Area Scan (81x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.00 W/kg

5G 1-21/WLAN(n)5.6G Back Body on channel 118/Zoom Scan (7x7x12)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.433 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 5.94 W/kg

SAR(1 g) = 0.834 W/kg; SAR(10 g) = 0.185 W/kg

Maximum value of SAR (measured) = 1.02W/kg

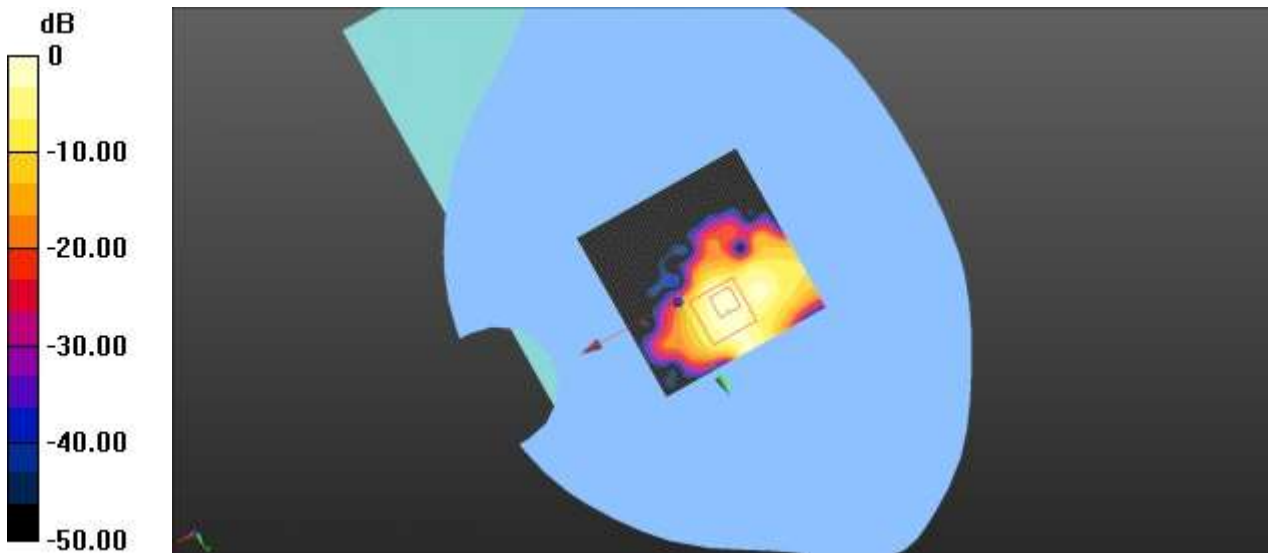

0 dB = 1.02 W/kg = 0.29dBW/kg

MEAS. 11 Body Plane with Right Edge on Channel 134 in 5.6G WLAN 802.11n(HT40) with Configuration A mode

Date/Time: 1/22/2016

Communication System Band: WLAN(n)40Mhz; Frequency: 5670 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5670$ MHz; $\sigma = 5.78$ S/m; $\epsilon_r = 46.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.0 Liquid Temperature:21.6

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(3.98, 3.98, 3.98); Calibrated: 12/10/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 12/8/2015
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration 3/WLAN(n-HT40) 5.6G Right Body on High/Area Scan (81x81x1): Interpolated grid:

$dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.255 W/kg

Configuration 3/WLAN(n-HT40) 5.6G Right Body on High/Zoom Scan (7x7x12)/Cube 0: Measurement grid:


$dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 6.849 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.25 W/kg

SAR(1 g) = 0.231 W/kg; SAR(10 g) = 0.055 W/kg

Maximum value of SAR (measured) = 0.298 W/kg

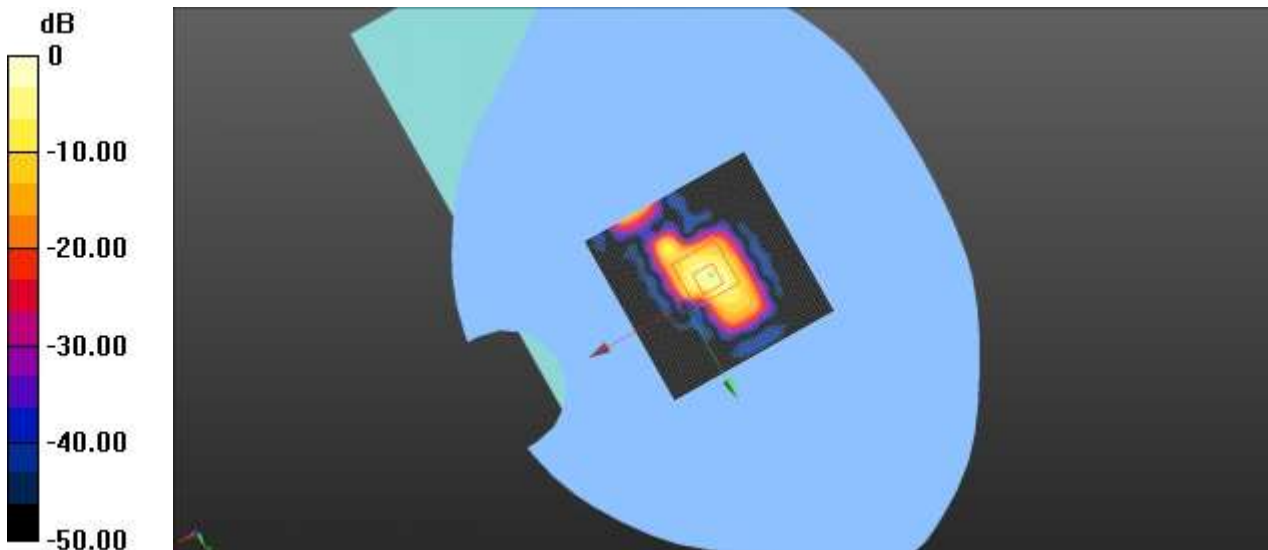

0 dB = 0.298 W/kg = -5.26 dBW/kg

MEAS. 12 Body Plane with Top Edge on Channel 134 in 5.6G WLAN 802.11n(HT40) with Configuration A mode

Date/Time: 1/22/2016

Communication System Band: WLAN(n)40Mhz; Frequency: 5670 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5670$ MHz; $\sigma = 5.78$ S/m; $\epsilon_r = 46.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.0 Liquid Temperature:21.6

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(3.98, 3.98, 3.98); Calibrated: 12/10/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 12/8/2015
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

5G 1-21/WLAN(n-HT40) 5.6G Top Body on High/Area Scan (81x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.445 W/kg


5G 1-21/WLAN(n-HT40) 5.6G Top Body on High/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.909 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.99 W/kg

SAR(1 g) = 0.449 W/kg; SAR(10 g) = 0.142 W/kg

Maximum value of SAR (measured) = 0.517 W/kg

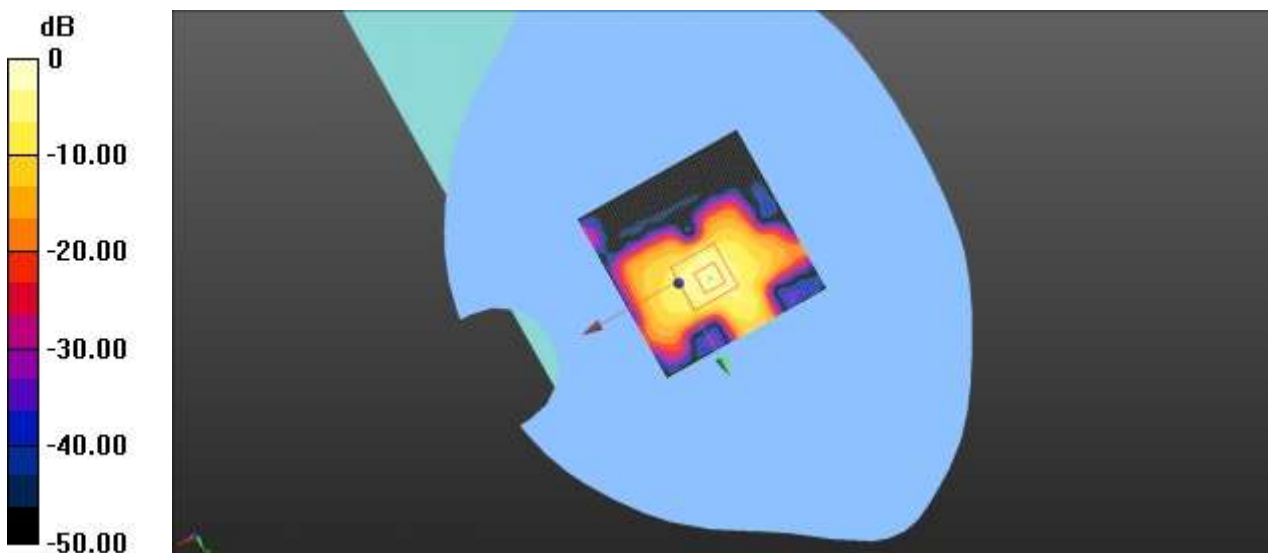

0 dB = 0.517 W/kg = -2.87 dBW/kg

MEAS. 13 Body Plane with Back Side on Channel 151 in 5.8G WLAN 802.11

ac(HT40) with Configuration A mode

Date/Time: 1/22/2016

Communication System Band: WLAN(ac) 40Mhz; Frequency: 5755 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5755$ MHz; $\sigma = 5.98$ S/m; $\epsilon_r = 45.96$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.0 Liquid Temperature: 21.6

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(4.15, 4.15, 4.15); Calibrated: 12/10/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 12/8/2015
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

5G/WLAN(ac)5.8G Back Body on High/Area Scan (81x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.10 W/kg


5G/WLAN(ac)5.8G Back Body on High/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.590 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 6.29 W/kg

SAR(1 g) = 1.051 W/kg; SAR(10 g) = 0.280 W/kg

Maximum value of SAR (measured) = 1.14 W/kg

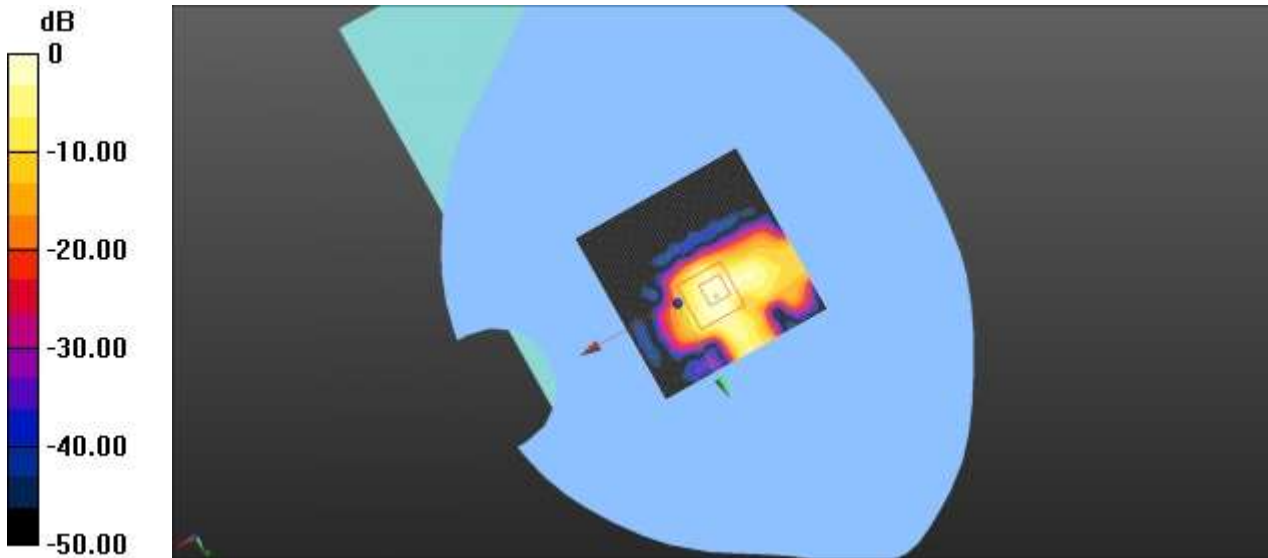

0 dB = 1.14 W/kg = 0.57 dBW/kg

MEAS. 14 Body Plane with Back Side on Channel 159 in 5.8G WLAN 802.11

ac(HT40) with Configuration A mode

Date/Time: 1/22/2016

Communication System Band: WLAN(ac) 40Mhz; Frequency: 5795 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5795 \text{ MHz}$; $\sigma = 6.02 \text{ S/m}$; $\epsilon_r = 45.93$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature:22.0 Liquid Temperature:21.6

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(4.15, 4.15, 4.15); Calibrated: 12/10/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 12/8/2015
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

5G/WLAN(ac)5.8G Back Body on channel 159/Area Scan (81x81x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.558 W/kg


5G/WLAN(ac)5.8G Back Body on channel 159/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 2.97 W/kg

SAR(1 g) = 0.543 W/kg; SAR(10 g) = 0.187 W/kg

Maximum value of SAR (measured) = 1.68 W/kg

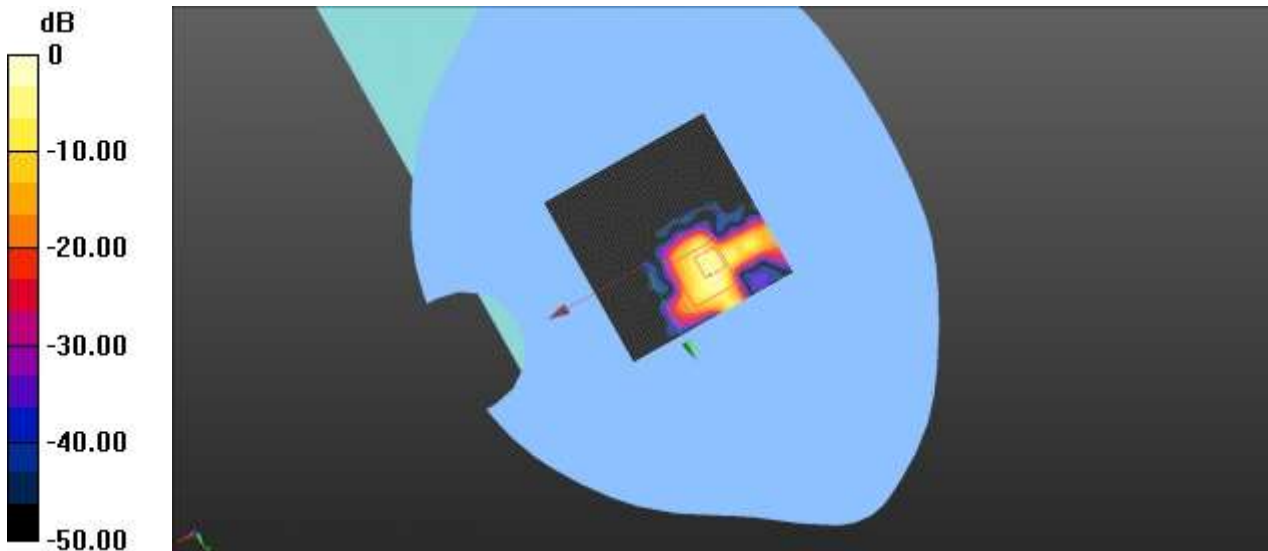

0 dB = 1.68 W/kg = 1.98 dBW/kg

MEAS. 15 Body Plane with Right Edge on Channel 151 in 5.8G WLAN 802.11

ac(HT40) with Configuration A mode

Date/Time: 1/22/2016

Communication System Band: WLAN(n)40Mhz; Frequency: 5755 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5755$ MHz; $\sigma = 5.98$ S/m; $\epsilon_r = 45.96$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.0 Liquid Temperature:21.6

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(4.15, 4.15, 4.15); Calibrated: 12/10/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 12/8/2015
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

5G/WLAN(ac)5.8G Right Body on channel 151/Area Scan (81x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.438 W/kg


5G/WLAN(ac)5.8G Right Body on channel 151/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.296 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 2.33 W/kg

SAR(1 g) = 0.398 W/kg; SAR(10 g) = 0.055 W/kg

Maximum value of SAR (measured) = 0.571 W/kg

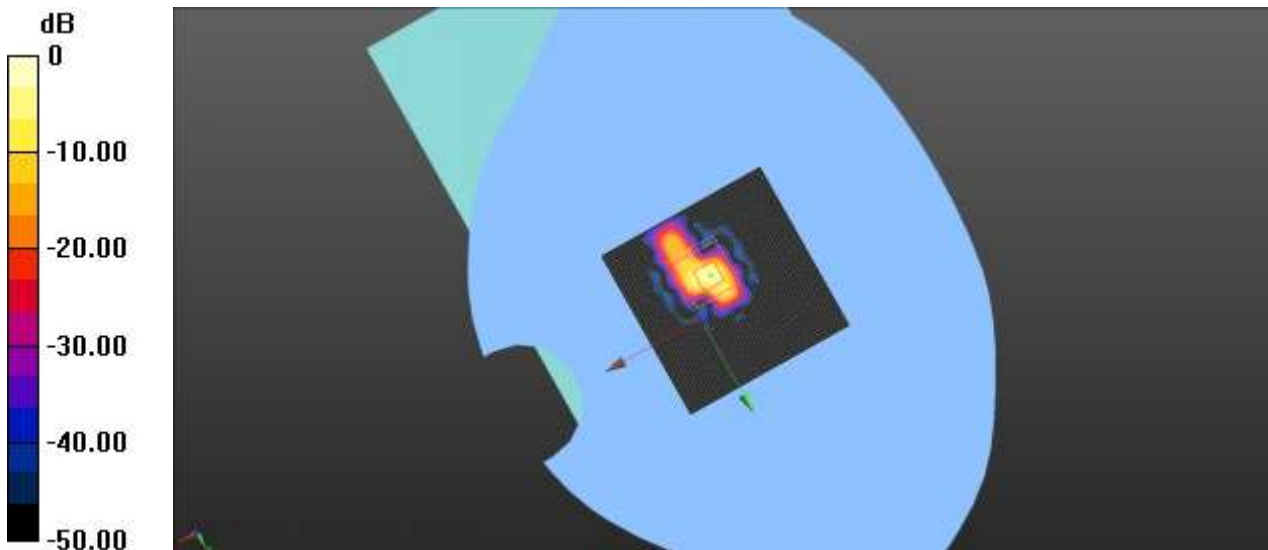

0 dB = 0.571 W/kg = -2.43 dBW/kg

MEAS. 16 Body Plane with Top Edge on Channel 151 in 5.8G WLAN 802.11

ac(HT40) with Configuration A mode

Date/Time: 1/22/2016

Communication System Band: WLAN(n)40Mhz; Frequency: 5755 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5755$ MHz; $\sigma = 5.98$ S/m; $\epsilon_r = 45.96$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.0 Liquid Temperature: 21.6

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(4.15, 4.15, 4.15); Calibrated: 12/10/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 12/8/2015
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

5G/WLAN(ac)5.8G Top Body on channel 151/Area Scan (81x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.250 W/kg


5G/WLAN(ac)5.8G Top Body on channel 151/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.505 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.898 W/kg

SAR(1 g) = 0.160 W/kg; SAR(10 g) = 0.033 W/kg

Maximum value of SAR (measured) = 0.327 W/kg

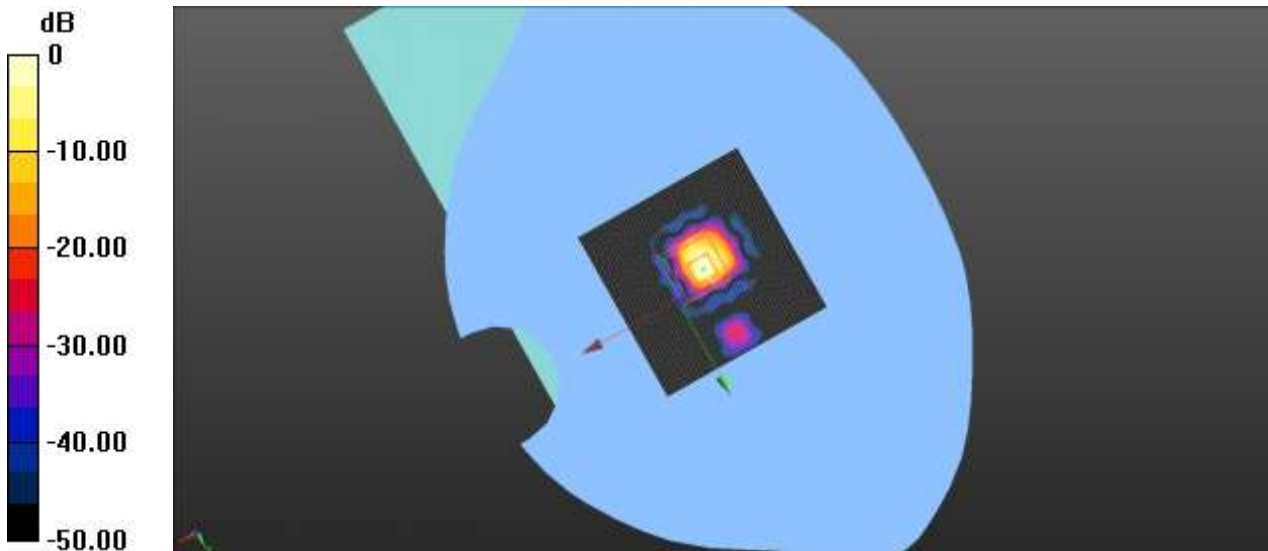

0 dB = 0.327 W/kg = -4.85 dBW/kg

MEAS. 17 Body Plane with Back Side on Channel 1 in 2.4G WLAN 802.11b with Configuration B mode

Date/Time: 2/28/2016

Communication System Band: WLAN(n); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.965$ S/m; $\epsilon_r = 51.523$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 21.9 Liquid Temperature: 21.2

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(7.38, 7.38, 7.38); Calibrated: 12/10/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 12/8/2015
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

2.4GHz 2#/WLAN(b) 2.4G Back Body on Low Channel/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.993 W/kg


2.4GHz 2#/WLAN(b) 2.4G Back Body on Low Channel/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.461 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 3.03 W/kg

SAR(1 g) = 0.974 W/kg; SAR(10 g) = 0.328 W/kg

Maximum value of SAR (measured) = 1.19 W/kg

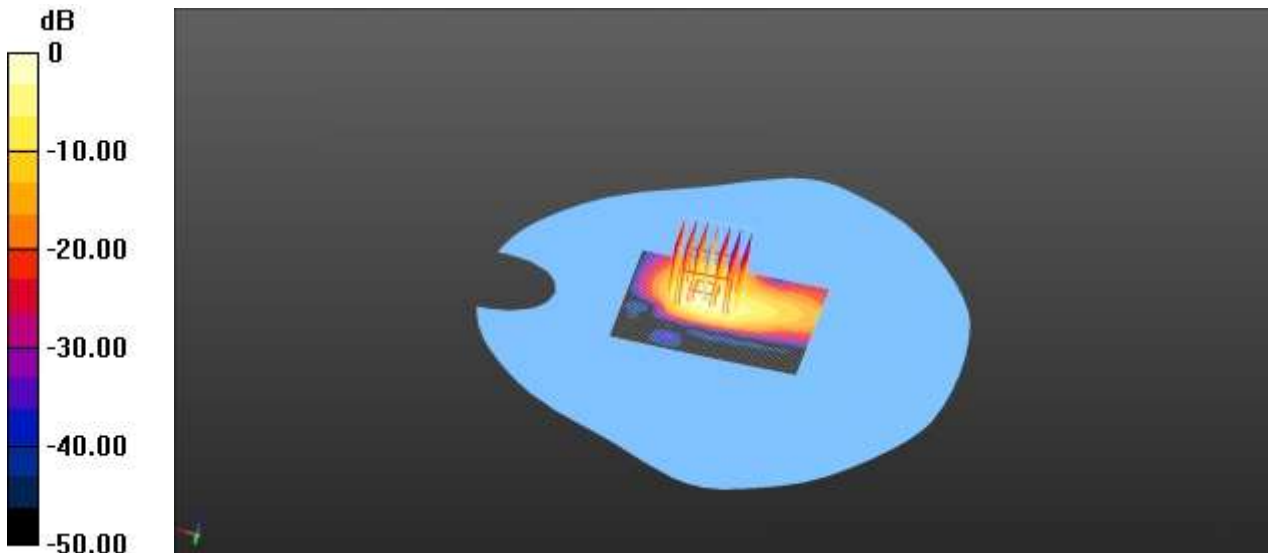

0 dB = 1.19 W/kg = 0.76 dBW/kg

MEAS. 18 Body Plane with Back Side on Channel 6 in 2.4G WLAN 802.11b with Configuration B mode

Date/Time: 2/28/2016

Communication System Band: WLAN(b); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 2.004$ S/m; $\epsilon_r = 51.607$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 21.9 Liquid Temperature: 21.2

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(7.38, 7.38, 7.38); Calibrated: 12/10/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 12/8/2015
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

2.4GHz 2#/WLAN(b) 2.4G Back Body on Middle Channel/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.14 W/kg


2.4GHz 2#/WLAN(b) 2.4G Back Body on Middle Channel/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.257 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 3.26 W/kg

SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.351 W/kg

Maximum value of SAR (measured) = 1.26 W/kg

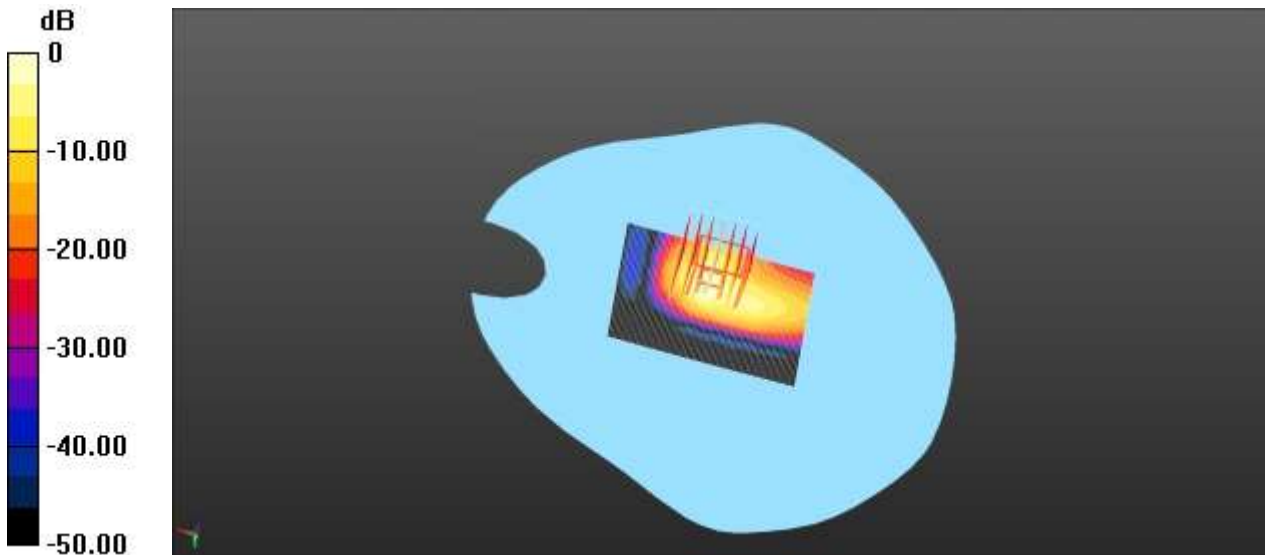

0 dB = 1.26 W/kg = 1.00 dBW/kg

MEAS. 19 Body Plane with Right Edge on Channel 1 in 2.4G WLAN 802.11b with Configuration B mode

Date/Time: 2/28/2016

Communication System Band: WLAN(n); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.965$ S/m; $\epsilon_r = 51.523$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 21.9 Liquid Temperature: 21.2

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(7.38, 7.38, 7.38); Calibrated: 12/10/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 12/8/2015
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

2.4GHz 2#/WLAN(b) 2.4G Right Body on Low Channel/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.283 W/kg

2.4GHz 2#/WLAN(b) 2.4G Right Body on Low Channel/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.151 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.545 W/kg

SAR(1 g) = 0.240 W/kg; SAR(10 g) = 0.097 W/kg

Maximum value of SAR (measured) = 0.289 W/kg



0 dB = 0.289 W/kg = -5.39 dBW/kg

MEAS. 20 Body Plane with Top Edge on Channel 1 in 2.4G WLAN 802.11b with

Configuration B mode

Date/Time: 2/28/2016

Communication System Band: WLAN(n); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.965$ S/m; $\epsilon_r = 51.523$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 21.9 Liquid Temperature: 21.2

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(7.38, 7.38, 7.38); Calibrated: 12/10/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 12/8/2015
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

2.4GHz 2#/WLAN(b) 2.4G Top Body on Low Channel/Area Scan (71x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.176 W/kg


2.4GHz 2#/WLAN(b) 2.4G Top Body on Low Channel/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.505 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.450 W/kg

SAR(1 g) = 0.142 W/kg; SAR(10 g) = 0.057 W/kg

Maximum value of SAR (measured) = 0.167 W/kg

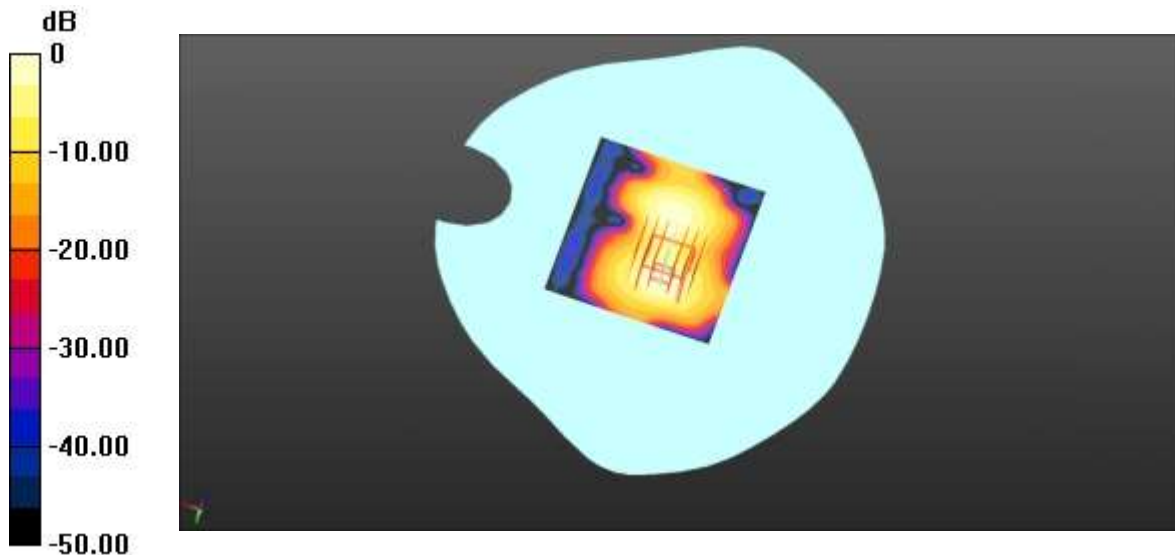

0 dB = 0.167 W/kg = -7.77 dBW/kg

MEAS. 21 Body Plane with Back Side on Channel 54 in 5.3G WLAN 802.11

ac(HT40) with Configuration A mode

Date/Time: 2/27/2016

Communication System Band: WLAN(ac) 40Mhz; Frequency: 5270 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5270$ MHz; $\sigma = 5.37$ S/m; $\epsilon_r = 46.73$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.1 Liquid Temperature: 21.5

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(4.56, 4.56, 4.56); Calibrated: 12/10/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 12/8/2015
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

5 GHz 2#/WLAN(ac)5.3G Back Body on 54 Channel /Area Scan (81x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Reference Value = 8.186 V/m; Power Drift = 0.17 dB

Maximum value of SAR (interpolated) = 1.01 W/kg


5 GHz 2#/WLAN(ac)5.3G Back Body on 54 Channel /Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 8.186 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 5.47 W/kg

SAR(1 g) = 1.07 W/kg; SAR(10 g) = 0.288 W/kg

Maximum value of SAR (measured) = 2.31 W/kg

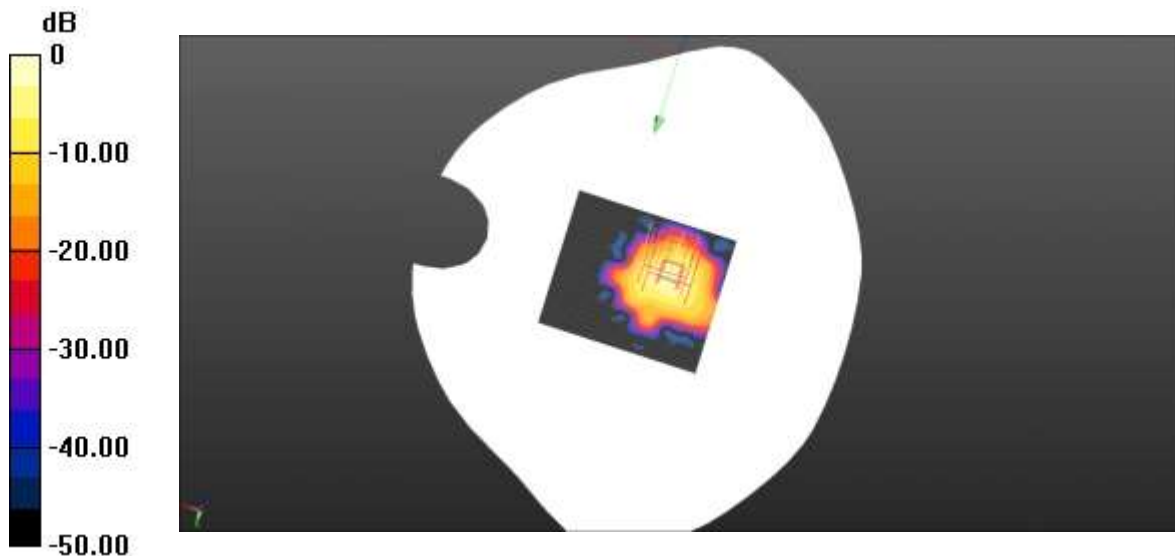

0 dB = 2.31 W/kg = 3.64 dBW/kg

MEAS. 22 Body Plane with Back Side on Channel 62 in 5.3G WLAN 802.11

ac(HT40) with Configuration A mode

Date/Time: 2/27/2016

Communication System Band: WLAN(ac) 40Mhz; Frequency: 5310 MHz;Duty Cycle: 1:1

Medium parameters used $f = 5310$ MHz; $\sigma = 5.39$ S/m; $\epsilon_r = 46.93$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.1 Liquid Temperature:21.5

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(4.56, 4.56, 4.56); Calibrated: 12/10/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 12/8/2015
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

5G/Procedure Name: WLAN(ac) 5.3G Back Body on channel 62/Area Scan (81x81x1): Interpolated grid:

$dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.543 W/kg

5G/Procedure Name: WLAN(ac) 5.3G Back Body on channel 62/Zoom Scan (7x7x12)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 1.736 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.83 W/kg

SAR(1 g) = 0.241 W/kg; SAR(10 g) = 0.041 W/kg

Maximum value of SAR (measured) = 0.603 W/kg

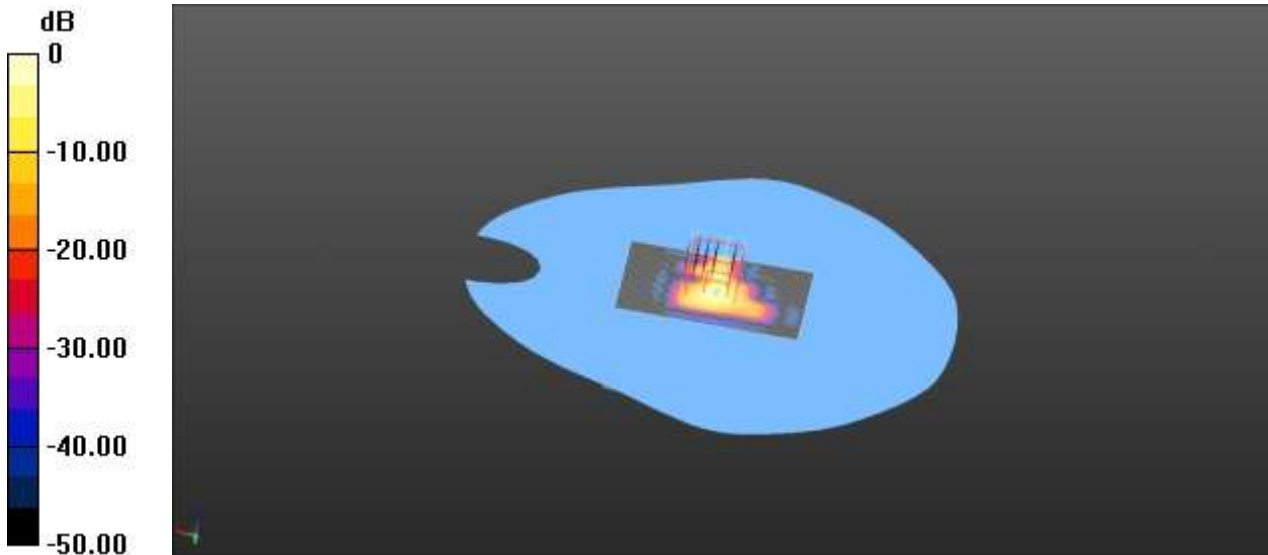

0 dB = 0.603 W/kg = -2.2 dBW/kg

MEAS. 23 Body Plane with Right Edge on Channel 54 in 5.3G WLAN 802.11

ac(HT40) with Configuration B mode

Date/Time: 2/27/2016

Communication System Band: WLAN(ac) 40Mhz; Frequency: 5270 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5270$ MHz; $\sigma = 5.37$ S/m; $\epsilon_r = 46.73$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.1 Liquid Temperature:21.5

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(4.56, 4.56, 4.56); Calibrated: 12/10/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 12/8/2015
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

5 GHz 2#/WLAN(ac) 5.3G Right Body on 54 Channel/Area Scan (81x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.204 W/kg


5 GHz 2#/WLAN(ac) 5.3G Right Body on 54 Channel/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.7630 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.717 W/kg

SAR(1 g) = 0.163 W/kg; SAR(10 g) = 0.037 W/kg

Maximum value of SAR (measured) = 0.424 W/kg

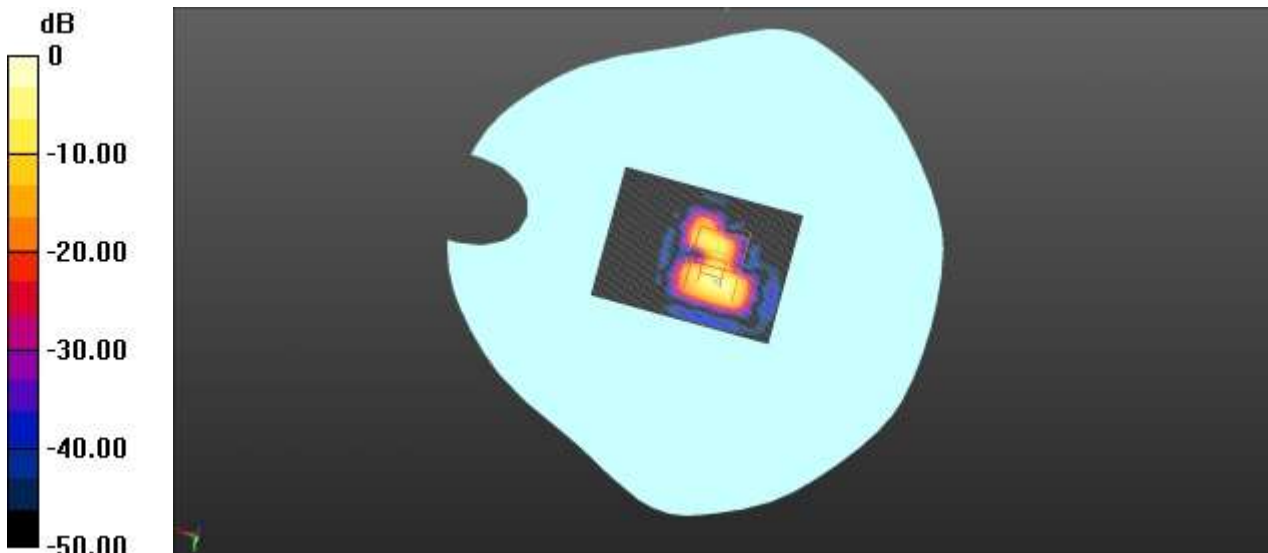

MEAS. 24 Body Plane with Top Edge on Channel 54 in 5.3G WLAN 802.11

ac(HT40) with Configuration B mode

Date/Time: 2/27/2016

Communication System Band: WLAN(ac) 40Mhz; Frequency: 5270 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5270$ MHz; $\sigma = 5.37$ S/m; $\epsilon_r = 46.73$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.1 Liquid Temperature: 21.5

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(4.56, 4.56, 4.56); Calibrated: 12/10/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 12/8/2015
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

5 GHz 2#/WLAN(ac) 5.3G Top Body on 54 Channel/Area Scan (81x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.256 W/kg


5 GHz 2#/WLAN(ac) 5.3G Top Body on 54 Channel/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.045 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.508 W/kg

SAR(1 g) = 0.125 W/kg; SAR(10 g) = 0.033 W/kg

Maximum value of SAR (measured) = 0.279 W/kg

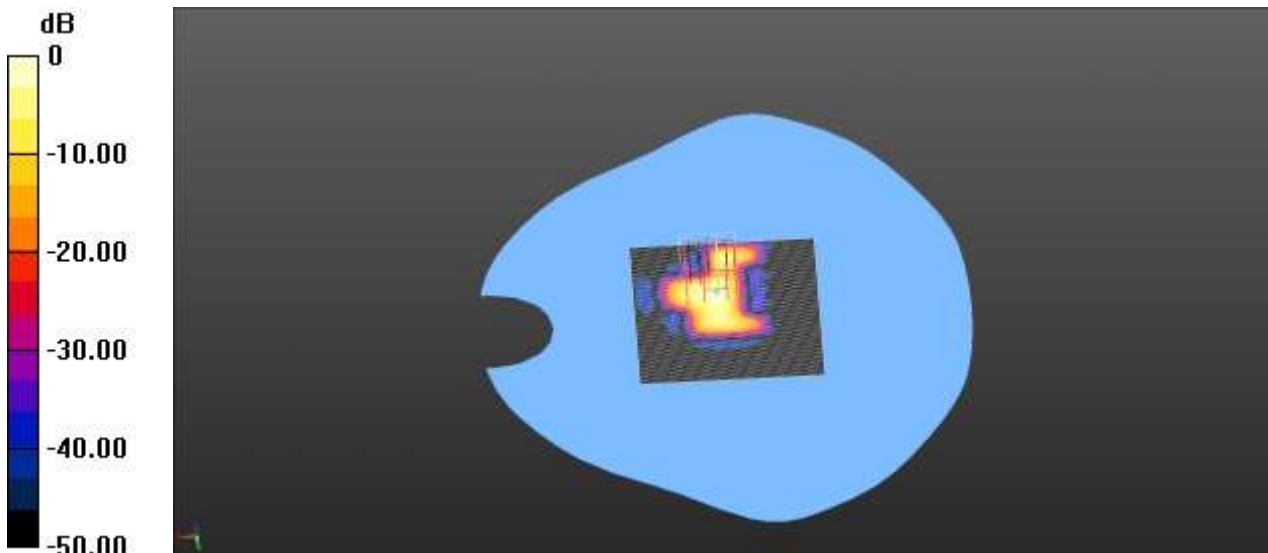

0 dB = 0.279 W/kg = -5.54 dBW/kg

MEAS. 25 Body Plane with Back Side on Channel 134 in 5.6G WLAN 802.11n(HT40) with Configuration B mode

Date/Time: 2/29/2016

Communication System Band: WLAN(n)40Mhz; Frequency: 5670 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5670$ MHz; $\sigma = 5.76$ S/m; $\epsilon_r = 46.15$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:21.7 Liquid Temperature:21.1

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(3.98, 3.98, 3.98); Calibrated: 12/10/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 12/8/2015
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

5 GHz 2#/WLAN(n) 5.6G Back Body on 134/Area Scan (81x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.69 W/kg


5 GHz 2#/WLAN(n) 5.6G Back Body on 134/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.8690 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 7.36 W/kg

SAR(1 g) = 1.09 W/kg; SAR(10 g) = 0.230 W/kg

Maximum value of SAR (measured) = 2.64 W/kg

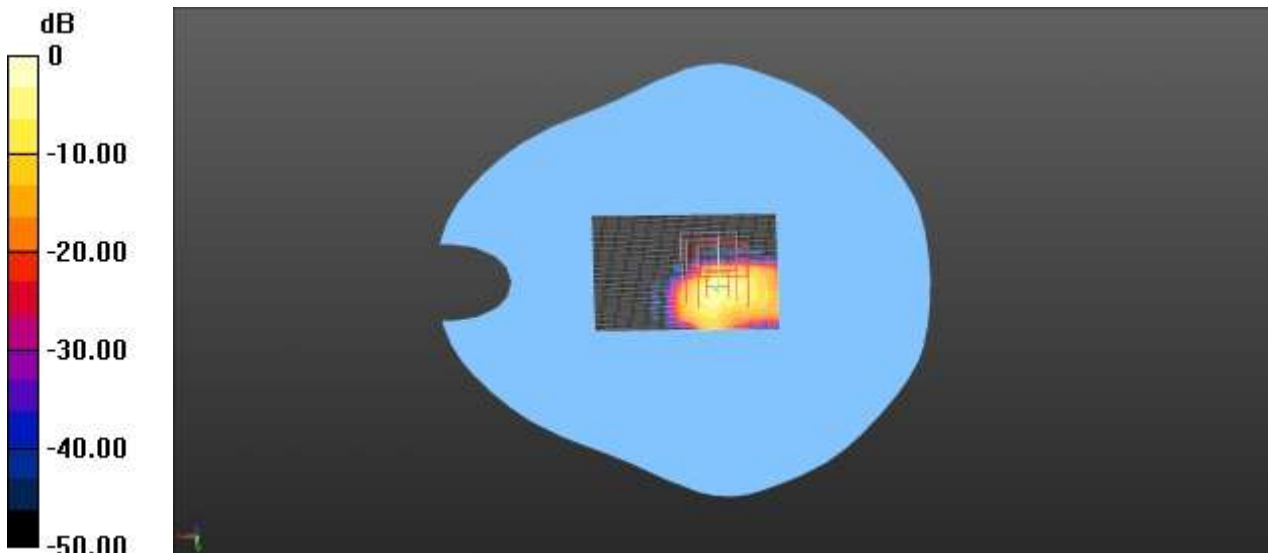

0 dB = 2.64 W/kg = 4.22 dBW/kg

MEAS. 26 Body Plane with Back Side on Channel 118 in 5.6G WLAN 802.11n(HT40) with Configuration B mode

Date/Time: 2/29/2016

Communication System Band: WLAN(n)40Mhz; Frequency: 5590 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5590$ MHz; $\sigma = 5.71$ S/m; $\epsilon_r = 46.67$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:21.7 Liquid Temperature:21.1

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(3.98, 3.98, 3.98); Calibrated: 12/10/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 12/8/2015
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

5 GHz 2#/WLAN(n) 5.6G Back Body on 118/Area Scan (81x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.04 W/kg


5 GHz 2#/WLAN(n) 5.6G Back Body on 118/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 9.831 V/m; Power Drift = 0.20 dB

Peak SAR (extrapolated) = 5.88 W/kg

SAR(1 g) = 0.791 W/kg; SAR(10 g) = 0.219 W/kg

Maximum value of SAR (measured) = 2.02 W/kg

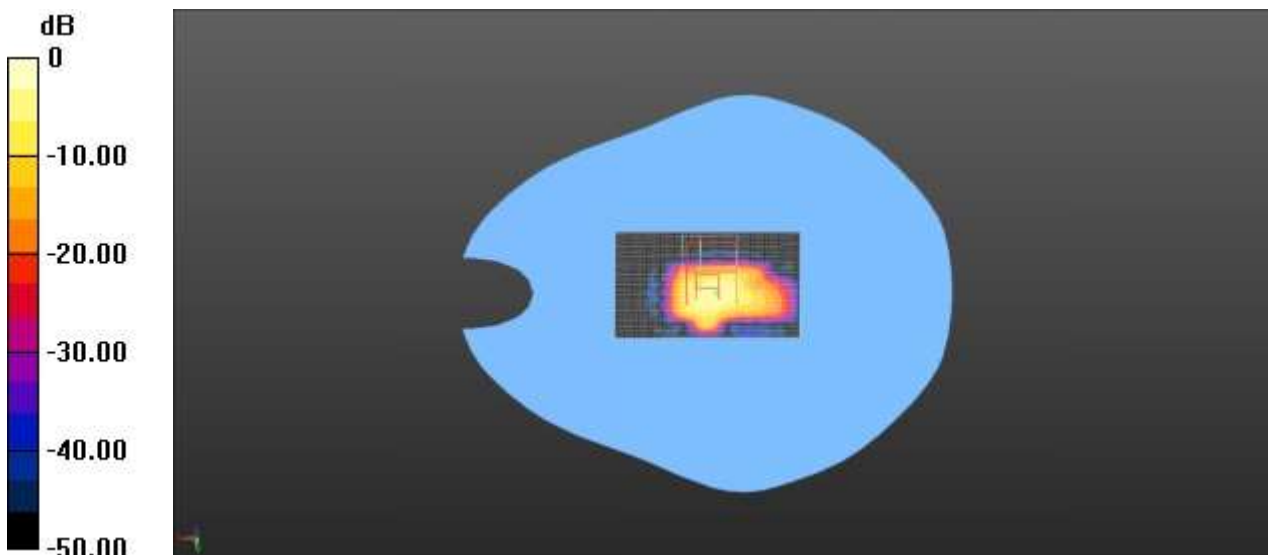

0 dB = 2.20 W/kg = 3.05 dBW/kg

MEAS. 27 Body Plane with Right Edge on Channel 134 in 5.6G WLAN 802.11n(HT40) with Configuration B mode

Date/Time: 2/29/2016

Communication System Band: WLAN(n)40Mhz; Frequency: 5670 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5670$ MHz; $\sigma = 5.76$ S/m; $\epsilon_r = 46.15$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:21.7 Liquid Temperature:21.1

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(3.98, 3.98, 3.98); Calibrated: 12/10/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 12/8/2015
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

5 GHz 2#/WLAN(n) 5.6G Right Body on 134/Area Scan (81x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.170 W/kg


5 GHz 2#/WLAN(n) 5.6G Right Body on 134/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.342 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.664 W/kg

SAR(1 g) = 0.123 W/kg; SAR(10 g) = 0.031 W/kg

Maximum value of SAR (measured) = 0.316 W/kg

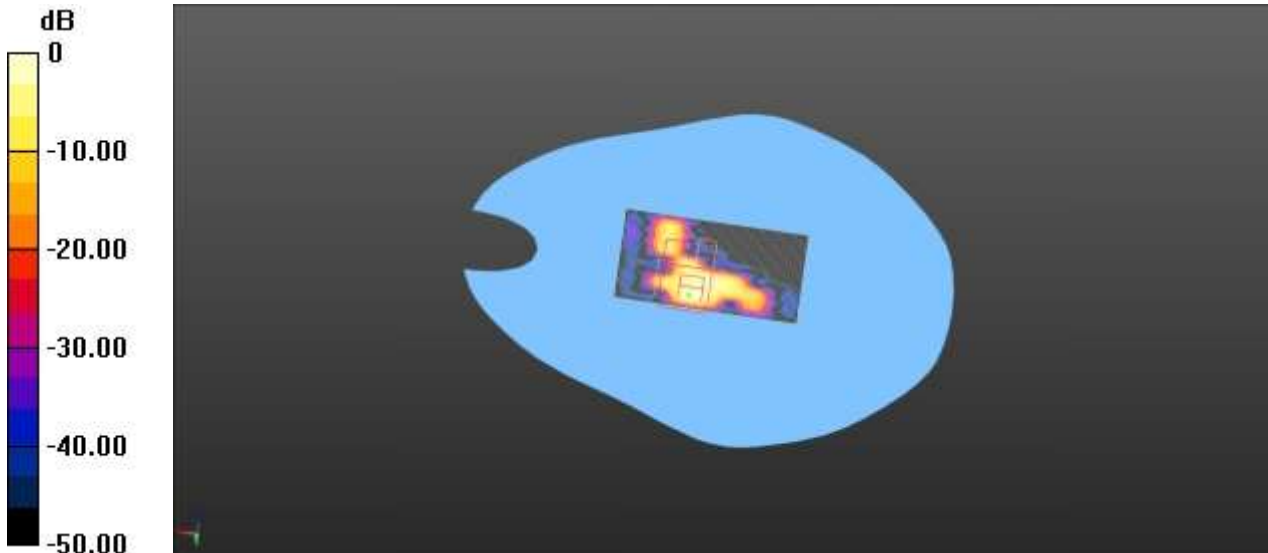

0 dB = 0.170 W/kg = -7.70 dBW/kg

MEAS. 28 Body Plane with Top Edge on Channel 134 in 5.6G WLAN 802.11n(HT40) with Configuration B mode

Date/Time: 2/29/2016

Communication System Band: WLAN(n)40Mhz; Frequency: 5670 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5670$ MHz; $\sigma = 5.76$ S/m; $\epsilon_r = 46.15$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:21.7 Liquid Temperature:21.1

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(3.98, 3.98, 3.98); Calibrated: 12/10/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 12/8/2015
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

5 GHz 2#/WLAN(n) 5.6G Top Body on 134/Area Scan (81x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.164 W/kg


5 GHz 2#/WLAN(n) 5.6G Top Body on 134/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.317 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.474 W/kg

SAR(1 g) = 0.104 W/kg; SAR(10 g) = 0.035 W/kg

Maximum value of SAR (measured) = 0.244 W/kg

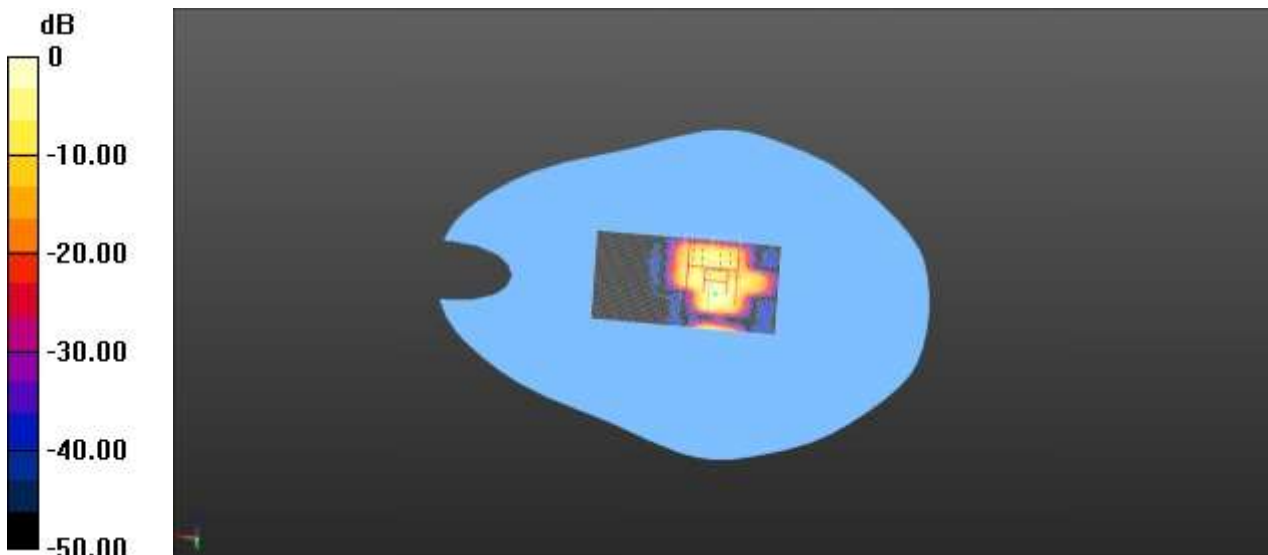

0 dB = 0.244 W/kg = -6.13 dBW/kg

MEAS. 29 Body Plane with Back Side on Channel 151 in 5.8G WLAN 802.11

ac(HT40) with Configuration B mode

Date/Time: 2/27/2016

Communication System Band: WLAN(ac) 40Mhz; Frequency: 5755 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5755$ MHz; $\sigma = 5.97$ S/m; $\epsilon_r = 46.18$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.0 Liquid Temperature:21.4

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(4.15, 4.15, 4.15); Calibrated: 12/10/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 12/8/2015
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

5 GHz 2#/WLAN(ac) 5.8G Back Body on 151/Area Scan (81x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.03 W/kg


5 GHz 2#/WLAN(ac) 5.8G Back Body on 151/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.156 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 6.10 W/kg

SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.238 W/kg

Maximum value of SAR (measured) = 1.08 W/kg

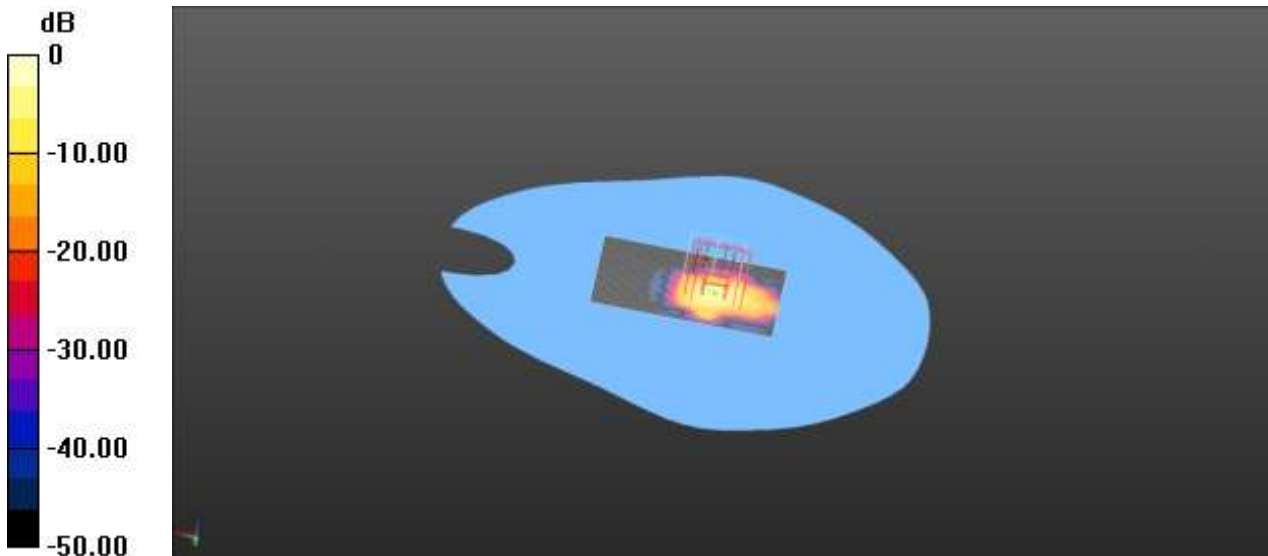

0 dB = 1.08 W/kg = 0.33 dBW/kg

MEAS. 30 Body Plane with Back Side on Channel 159 in 5.8G WLAN 802.11

ac(HT40) with Configuration B mode

Date/Time: 2/27/2016

Communication System Band: WLAN(ac) 40Mhz; Frequency: 5795 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5795$ MHz; $\sigma = 6.00$ S/m; $\epsilon_r = 45.85$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 21.0 Liquid Temperature: 21.4

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(4.15, 4.15, 4.15); Calibrated: 12/10/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 12/8/2015
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

5G/WLAN(ac)5.8G Back Body on channel 159/Area Scan (81x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.346 W/kg


5G/WLAN(ac)5.8G Back Body on channel 159/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.396 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 2.68 W/kg

SAR(1 g) = 0.252 W/kg; SAR(10 g) = 0.069 W/kg

Maximum value of SAR (measured) = 0.376 W/kg

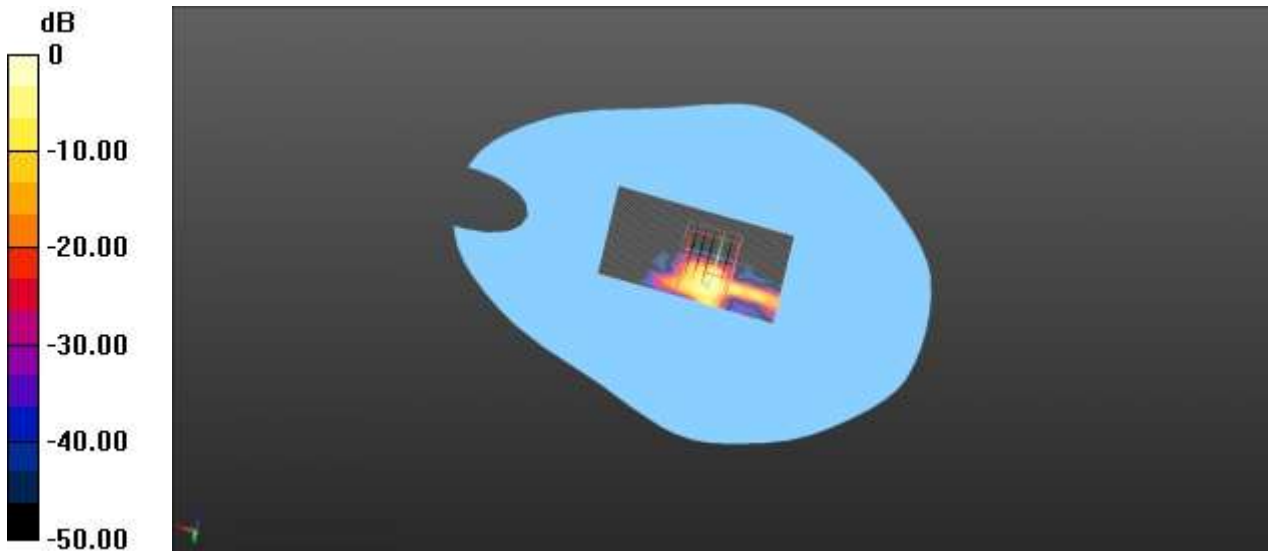

0 dB = 0.376 W/kg = -4.00 dBW/kg

MEAS. 31 Body Plane with Right Edge on Channel 151 in 5.8G WLAN 802.11

ac(HT40) with Configuration B mode

Date/Time: 2/27/2016

Communication System Band: WLAN(ac) 40Mhz; Frequency: 5755 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5755$ MHz; $\sigma = 5.97$ S/m; $\epsilon_r = 46.18$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.0 Liquid Temperature:21.4

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(4.15, 4.15, 4.15); Calibrated: 12/10/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 12/8/2015
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

5 GHz 2#/WLAN(ac) 5.8G Rgiht Body on 151 Channel/Area Scan (81x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0950 W/kg


5 GHz 2#/WLAN(ac) 5.8G Rgiht Body on 151 Channel/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.284 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.611 W/kg

SAR(1 g) = 0.104 W/kg; SAR(10 g) = 0.024 W/kg

Maximum value of SAR (measured) = 0.282 W/kg

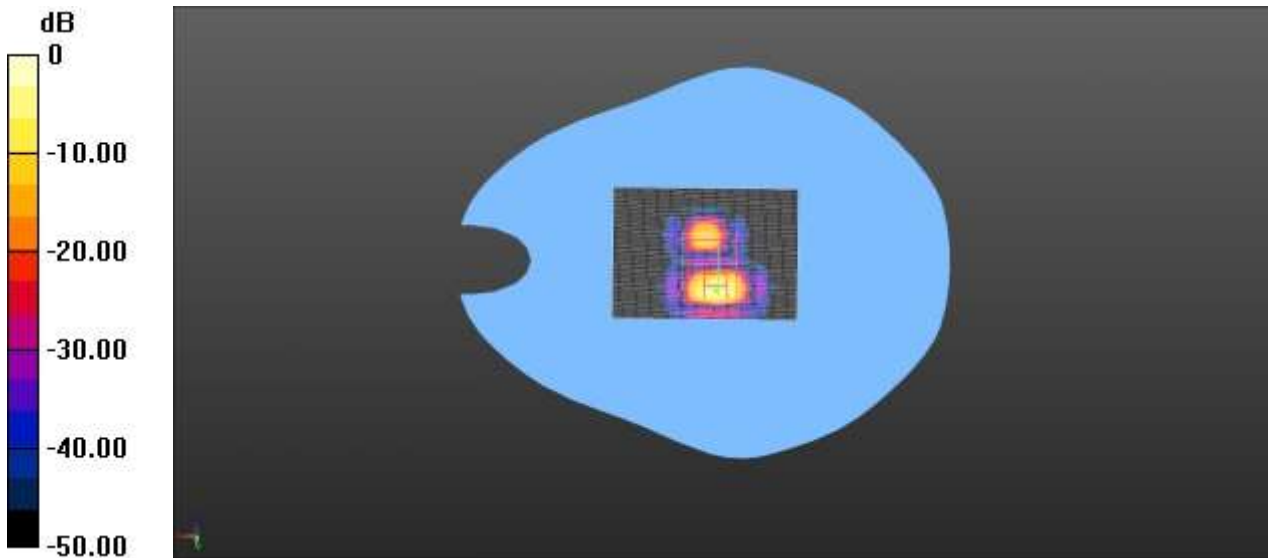

0 dB = 0.282 W/kg = -5.50 dBW/kg

MEAS. 32 Body Plane with Top Edge on Channel 151 in 5.8G WLAN 802.11

ac(HT40) with Configuration B mode

Date/Time: 2/27/2016

Communication System Band: WLAN(ac) 40Mhz; Frequency: 5755 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5755$ MHz; $\sigma = 5.97$ S/m; $\epsilon_r = 46.18$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.0 Liquid Temperature: 21.4

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(4.15, 4.15, 4.15); Calibrated: 12/10/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 12/8/2015
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

5 GHz 2#/WLAN(ac) 5.8G Top Body on 151 Channel/Area Scan (81x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.202 W/kg


5 GHz 2#/WLAN(ac) 5.8G Top Body on 151 Channel/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.208 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.180 W/kg; SAR(10 g) = 0.051 W/kg

Maximum value of SAR (measured) = 0.379 W/kg

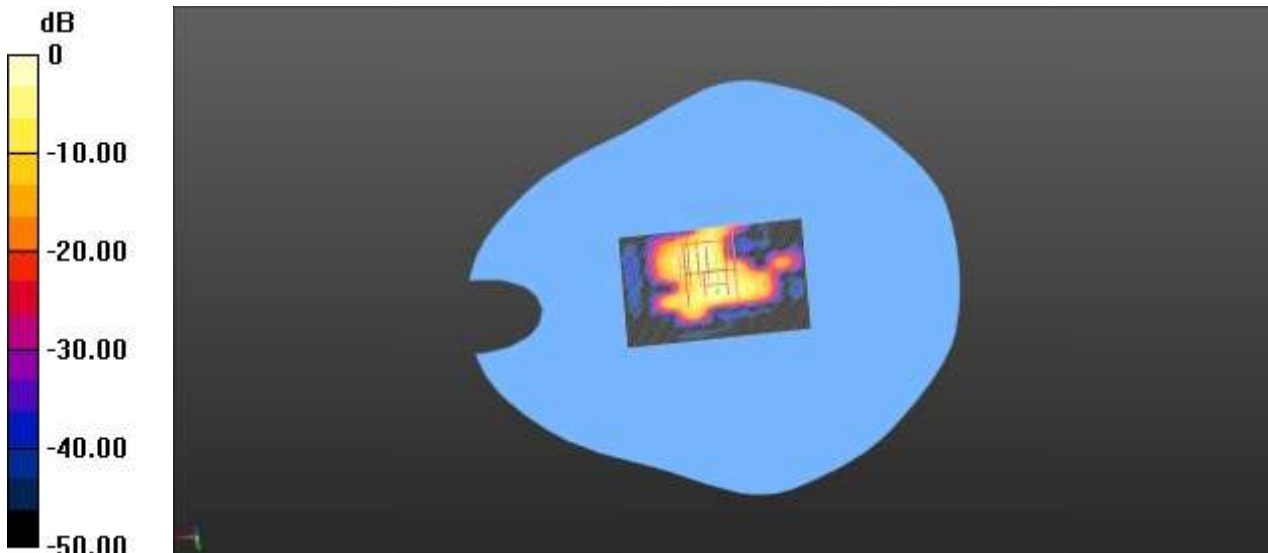

0 dB = 0.379 W/kg = -4.21 dBW/kg

ANNEX D EUT EXTERNAL PHOTOS

Please refer the document "BL-SZ1610062-AW.pdf".

ANNEX E EST SETUP PHOTOS

Please refer the document "BL-SZ1610062-AS.pdf".

ANNEX F CALIBRATION REPORT




F.1 E-Field Probe


In Collaboration with
s p e a g
CALIBRATION LABORATORY
 Add: No 51 Xueyuan Road, Haidian District, Beijing, 100191, China
 Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209
 E-mail: ctfl@chinantl.com [Http://www.chinantl.cn](http://www.chinantl.cn)



CALIBRATION
 No. L6570

Client **baluntek** Certificate No: **Z15-97196**

CALIBRATION CERTIFICATE			
Object	EX3DV4 - SN:7340		
Calibration Procedure(s)	FD-Z11-2-004-01 Calibration Procedures for Dosimetric E-field Probes		
Calibration date:	December 10, 2015		
<p>This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility, environment temperature(22±3)°C and humidity<70%.</p> <p>Calibration Equipment used (M&TE critical for calibration)</p>			
Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Power Meter NRP2	101919	01-Jul-15 (CTTL, No.J15X04256)	Jun-16
Power sensor NRP-Z91	101547	01-Jul-15 (CTTL, No.J15X04256)	Jun-16
Power sensor NRP-Z91	101548	01-Jul-15 (CTTL, No.J15X04256)	Jun-16
Reference10dBAttenuator	18N50W-10dB	13-Mar-14(TMC,No.JZ14-1103)	Mar-16
Reference20dBAttenuator	18N50W-20dB	13-Mar-14(TMC,No.JZ14-1104)	Mar-16
Reference Probe EX3DV4	SN 7307	27-Feb-15(SPEAG,No.EX3-7307_Feb15)	Feb-16
DAE4	SN 771	27-Jan-15(SPEAG, No.DAE4-771_Jan15)	Jan -16
Secondary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
SignalGeneratorMG3700A	6201052605	01-Jul-15 (CTTL, No.J15X04255)	Jun-16
Network Analyzer E5071C	MY46110673	03-Feb-15 (CTTL, No.J15X00728)	Feb-16
	Name	Function	Signature
Calibrated by:	Yu Zongying	SAR Test Engineer	
Reviewed by:	Qi Dianyuan	SAR Project Leader	
Approved by:	Lu Bingsong	Deputy Director of the laboratory	
Issued: December 11, 2015			
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A,B,C,D	modulation dependent linearization parameters
Polarization Φ	Φ rotation around probe axis
Polarization θ	θ rotation around an axis that is in the plane normal to probe axis (at measurement center), i $\theta=0$ is normal to probe axis

Connector Angle Information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300MHz to 3GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}:** Assessed for E-field polarization $\theta=0$ (fs900MHz in TEM-cell; $f>1800$ MHz: waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not effect the E^2 -field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}:** DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- PAR:** PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics.
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; VR_{x,y,z}; A,B,C** are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters:** Assessed in flat phantom using E-field (or Temperature Transfer Standard for fs800MHz) and inside waveguide using analytical field distributions based on power measurements for $f>800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty valued are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy):** in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset:** The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle:** The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).



In Collaboration with
Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209
E-mail: ctl@chinattl.com <http://www.chinattl.cn>

Probe EX3DV4

SN: 7340

Calibrated: December 10, 2015

Calibrated for DASY/EASY Systems

(Note: non-compatible with DASY2 system!)



In Collaboration with
TTL Speag
 CALIBRATION LABORATORY
 Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
 Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209
 E-mail: cntl@chinattl.com <http://www.chinattl.cn>

DASY/EASY – Parameters of Probe: EX3DV4 – SN: 7340

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	0.51	0.48	0.45	±10.8%
DCP(mV) ^B	100.7	101.8	105.1	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB· μV	C	D dB	VR mV	Unc ^E (k=2)
0	CW	X	0.0	0.0	1.0	0.00	194.7	±2.2%
		Y	0.0	0.0	1.0		188.5	
		Z	0.0	0.0	1.0		183.1	

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution Corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X, Y, Z do not affect the E²-field uncertainty inside TSL. (see Page 5 and Page 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



In Collaboration with
TTL SPEAG
 CALIBRATION LABORATORY
 Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
 Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209
 E-mail: ttl@chinattl.com <http://www.chinattl.cn>

DASY/EASY – Parameters of Probe: EX3DV4 – SN: 7340

Calibration Parameter Determined in Head Tissue Simulating Media

f [MHz] ^c	Relative Permittivity ^f	Conductivity (S/m) ^f	ConvF X	ConvF Y	ConvF Z	Alpha ^g	Depth ^g (mm)	Unct. (k=2)
850	41.5	0.92	9.56	9.56	9.56	0.12	1.42	± 12%
1750	40.1	1.37	8.22	8.22	8.22	0.22	1.08	± 12%
1900	40.0	1.40	8.15	8.15	8.15	0.21	1.09	± 12%
2450	39.2	1.80	7.62	7.62	7.62	0.48	0.72	± 12%
2600	39.0	1.96	7.42	7.42	7.42	0.34	0.98	± 12%
5200	36.0	4.66	5.33	5.33	5.33	0.39	1.21	± 13%
5800	35.5	5.07	4.70	4.70	4.70	0.39	1.20	± 13%
5800	35.3	5.27	4.68	4.68	4.68	0.39	1.25	± 13%

^c Frequency validity of ±100MHz only applies for DASY v4.4 and higher (Page 2), else it is restricted to ±50MHz. The uncertainty is the RSS of ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^f At frequency below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ±10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ±5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^g Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for the frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.



In Collaboration with
TTL SPEAG
 CALIBRATION LABORATORY
 Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
 Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209
 E-mail: ctt@chinattl.com <http://www.chinattl.cn>

DASY/EASY – Parameters of Probe: EX3DV4 – SN: 7340

Calibration Parameter Determined in Body Tissue Simulating Media

f [MHz] ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unct. (k=2)
850	55.2	0.99	9.83	9.83	9.83	0.15	1.46	±12%
1750	53.4	1.49	7.87	7.87	7.87	0.20	1.16	±12%
1900	53.3	1.52	7.51	7.51	7.51	0.18	1.30	±12%
2450	52.7	1.95	7.38	7.38	7.38	0.35	0.97	±12%
2600	52.5	2.16	6.99	6.99	6.99	0.34	1.02	±12%
5200	49.0	5.30	4.56	4.56	4.56	0.45	1.31	±13%
5600	48.5	5.77	3.98	3.98	3.98	0.48	1.33	±13%
5800	48.2	6.00	4.15	4.15	4.15	0.50	1.18	±13%

^C Frequency validity of ±100MHz only applies for DASY v4.4 and higher (Page 2), else it is restricted to ±50MHz. The uncertainty is the RSS of ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.


^F At frequency below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ±10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ±5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for the frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.



Add: No.51 Xuziyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)

Frequency Response of E-Field (TEM-Cell: ifi110 EXX, Waveguide: R22)

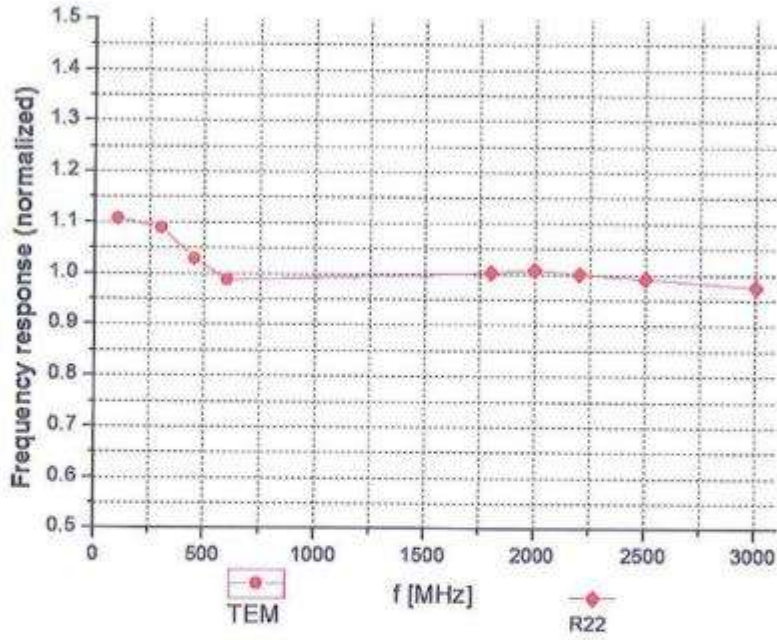

Uncertainty of Frequency Response of E-field: $\pm 7.5\%$ (k=2)






In Collaboration with
 Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
 Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209
 E-mail: cntl@chinatl.com [Http://www.chinatl.cn](http://www.chinatl.cn)

Receiving Pattern (Φ), $\theta=0^\circ$

f=600 MHz, TEM



f=1800 MHz, R22

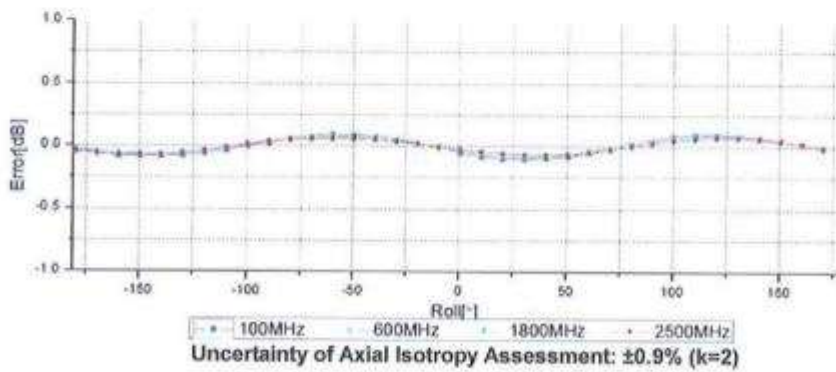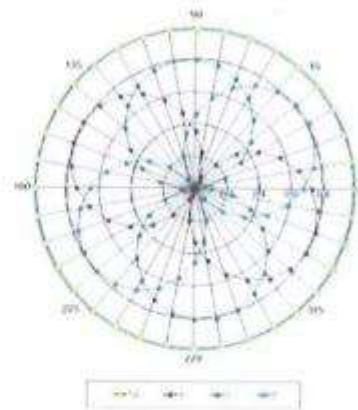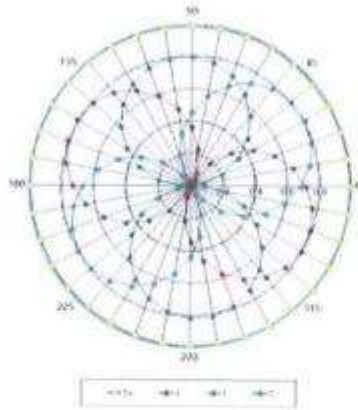



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209
E-mail: cttl@chinattl.com <http://www.chinattl.cn>

Dynamic Range f(SAR_{head}) (TEM cell, f = 900 MHz)

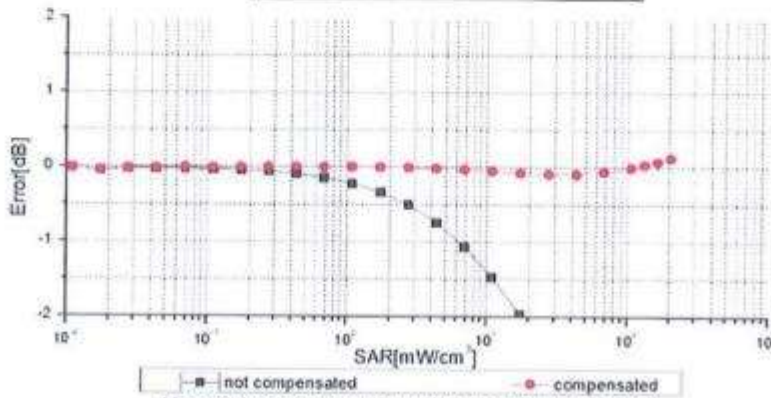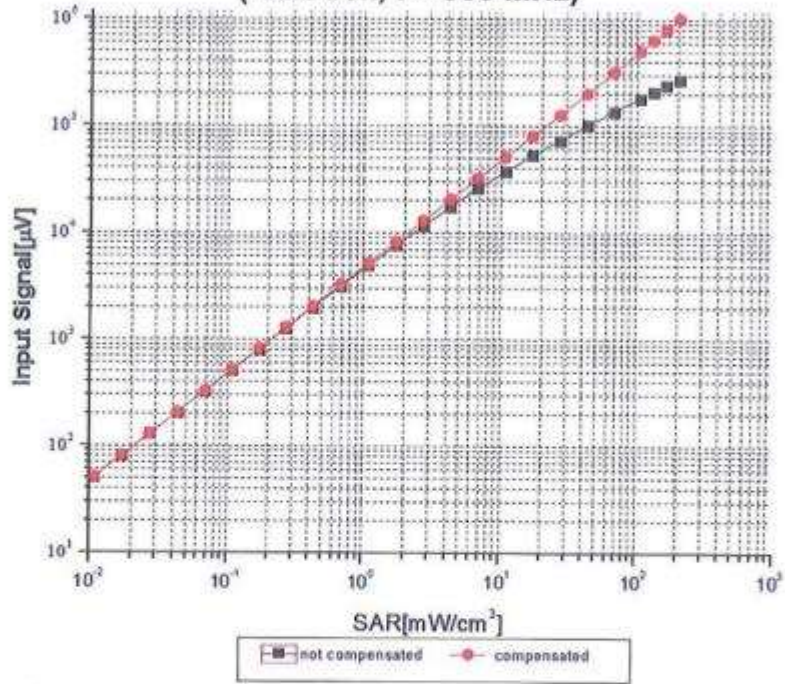

Uncertainty of Linearity Assessment: ±0.9% (k=2)





In Collaboration with
 Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
 Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209
 E-mail: cttl@chinattl.com <http://www.chinattl.cn>


Conversion Factor Assessment

f=850 MHz, WGLS R9(H_convF)

f=1750 MHz, WGLS R22(H_convF)

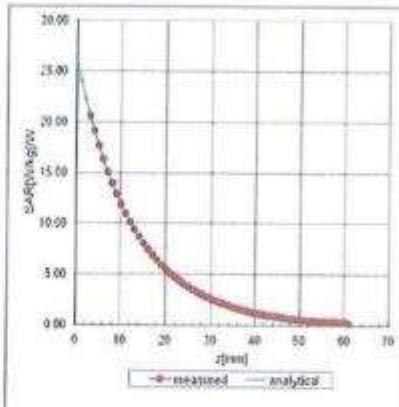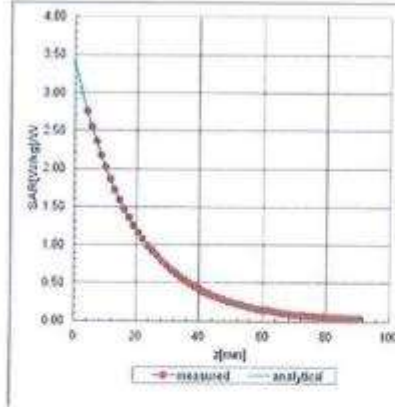

Deviation from Isotropy in Liquid

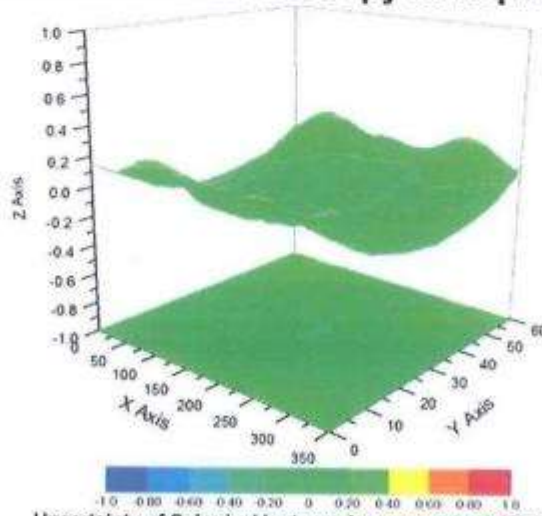

Uncertainty of Spherical Isotropy Assessment: $\pm 2.8\%$ (K=2)




Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209
E-mail: ttl@chinattl.com <http://www.chinattl.cn>

DASY/EASY – Parameters of Probe: EX3DV4 – SN: 7340

Other Probe Parameters



Sensor Arrangement	Triangular
Connector Angle (°)	130.2
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disable
Probe Overall Length	337mm
Probe Body Diameter	10mm
Tip Length	9mm
Tip Diameter	2.5mm
Probe Tip to Sensor X Calibration Point	1mm
Probe Tip to Sensor Y Calibration Point	1mm
Probe Tip to Sensor Z Calibration Point	1mm
Recommended Measurement Distance from Surface	1.4mm

F.2 Data Acquisition Electronics



In Collaboration with
s p e e g
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209
E-mail: cttl@chinattl.com <http://www.chinattl.cn>

CALIBRATION
No. L0670

Client : **baluntek** Certificate No: **Z15-97195**

CALIBRATION CERTIFICATE

Object: **DAE4 - SN: 1454**

Calibration Procedure(s): **FD-Z11-2-002-01
Calibration Procedure for the Data Acquisition Electronics (DAEx)**




Calibration date: **December 08, 2015**

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Process Calibrator 753	1971018	08-July-15 (CTTL, No:J15X04257)	July-16

	Name	Function	Signature
Calibrated by:	Yu Zongying	SAR Test Engineer	
Reviewed by:	Qi Dianyuan	SAR Project Leader	
Approved by:	Lu Bingsong	Deputy Director of the laboratory	

Issued: December 08, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: Z15-97195

Page 1 of 3



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209
E-mail: ctt@chinattl.com Http://www.chinattl.cn

Glossary:

DAE data acquisition electronics
Connector angle information used in DASY system to align probe sensor X to the robot coordinate system.

Methods Applied and Interpretation of Parameters:

- *DC Voltage Measurement:* Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- *Connector angle:* The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The report provide only calibration results for DAE, it does not contain other performance test results.



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209
E-mail: ctri@chinattl.com Http://www.chinattl.cn

DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1 μ V, full range = -100...+300 mV

Low Range: 1LSB = 81nV, full range = -1.....+3mV

DASY measurement parameters; Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	404.175 \pm 0.15% (k=2)	403.666 \pm 0.15% (k=2)	403.739 \pm 0.15% (k=2)
Low Range	4.01281 \pm 0.7% (k=2)	3.9916 \pm 0.7% (k=2)	3.99929 \pm 0.7% (k=2)

Connector Angle

Connector Angle to be used in DASY system	317.5 $^{\circ}$ \pm 1 $^{\circ}$
---	-------------------------------------

F.3 2450 MHz Dipole

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Dgieie (Vitec)**

Certificate No: **D2450V2-952_Nov14**

CALIBRATION CERTIFICATE

Object: **D2450V2 - SN: 952**

Calibration procedure(s): **QA CAL-05.v9
Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **November 27, 2014**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	07-Oct-14 (No. 217-02020)	Oct-15
Power sensor HP 8481A	US37292783	07-Oct-14 (No. 217-02020)	Oct-15
Power sensor HP 8481A	MY41092317	07-Oct-14 (No. 217-02021)	Oct-15
Reference 20 dB Attenuator	SN: 5058 (20k)	03-Apr-14 (No. 217-01918)	Apr-15
Type-N mismatch combination	SN: 5047.2 / 08327	03-Apr-14 (No. 217-01921)	Apr-15
Reference Probe ES3DV3	SN: 3205	30-Dec-13 (No. ES3-3205_Dec13)	Dec-14
DAE4	SN: 601	18-Aug-14 (No. DAE4-601_Aug14)	Aug-15
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-13)	In house check: Oct-16
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-14)	In house check: Oct-15

Calibrated by:	Name Michael Weber	Function Laboratory Technician	Signature
Approved by:	Name Katja Pokovic	Technical Manager	

Issued: November 28, 2014

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
C Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:* SAR measured at the stated antenna input power.
- SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	39.0 ± 6 %	1.86 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.3 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	52.3 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.17 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.5 W/kg ± 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	50.9 ± 6 %	2.03 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	13.0 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	50.6 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	6.02 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	23.7 W/kg ± 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS108)**Antenna Parameters with Head TSL**

Impedance, transformed to feed point	53.4 Ω + 3.0 $\mu\Omega$
Return Loss	- 27.2 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	50.7 Ω + 5.1 $\mu\Omega$
Return Loss	- 25.8 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.161 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	August 05, 2014

DASY5 Validation Report for Head TSL

Date: 27.11.2014

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 952

Communication System: UID 0 - CW; Frequency: 2450 MHz

 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.86$ S/m; $\epsilon_r = 39$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.53, 4.53, 4.53); Calibrated: 30.12.2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 100.8 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 27.5 W/kg


SAR(1 g) = 13.3 W/kg; SAR(10 g) = 6.17 W/kg

Maximum value of SAR (measured) = 17.5 W/kg

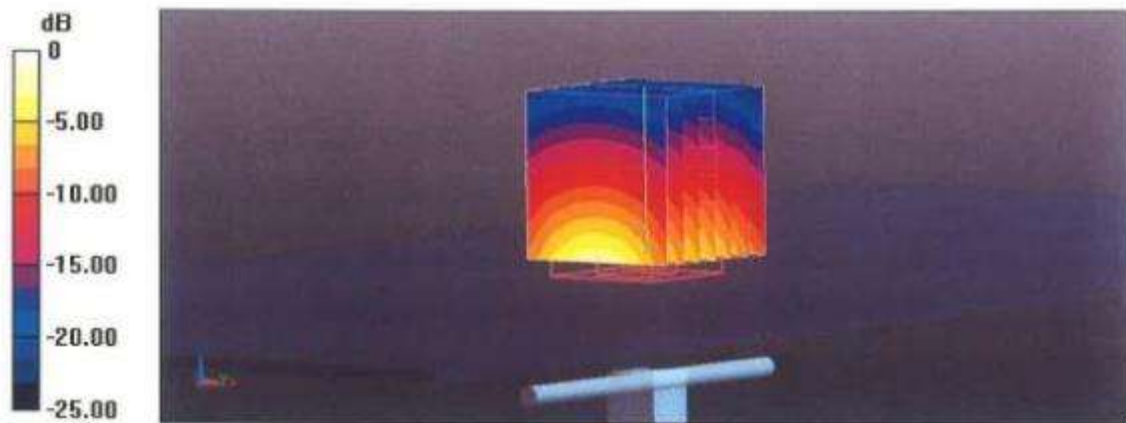

0 dB = 17.5 W/kg = 12.43 dBW/kg

Impedance Measurement Plot for Head TSL

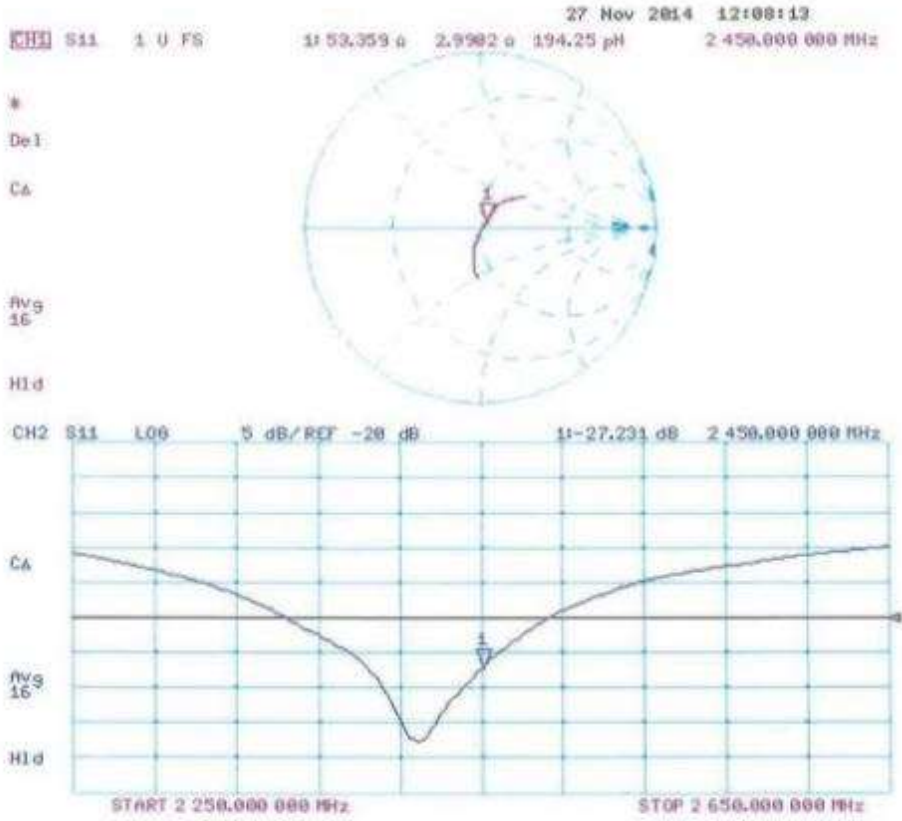

DASY5 Validation Report for Body TSL

Date: 27.11.2014

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 952

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 2.03$ S/m; $\epsilon_r = 50.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.35, 4.35, 4.35); Calibrated: 30.12.2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 95.25 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 27.2 W/kg


SAR(1 g) = 13 W/kg; SAR(10 g) = 6.02 W/kg

Maximum value of SAR (measured) = 17.3 W/kg

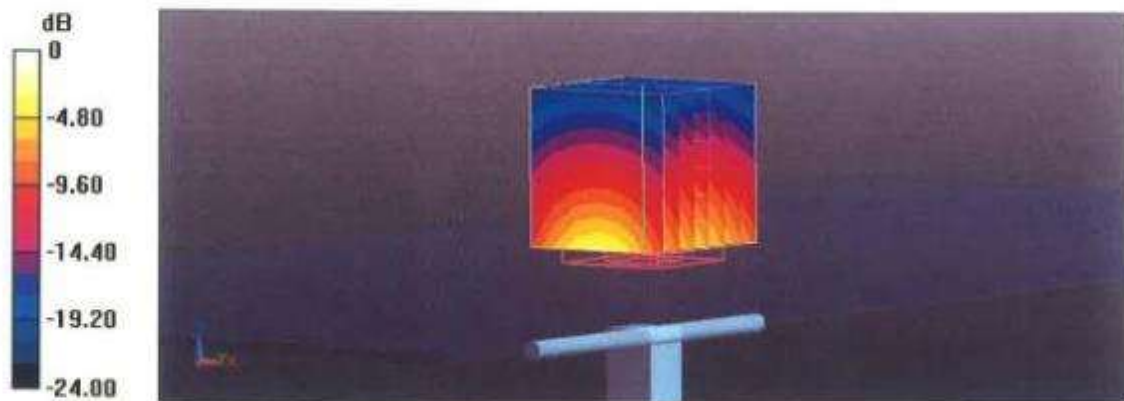

0 dB = 17.3 W/kg = 12.38 dBW/kg

Impedance Measurement Plot for Body TSL

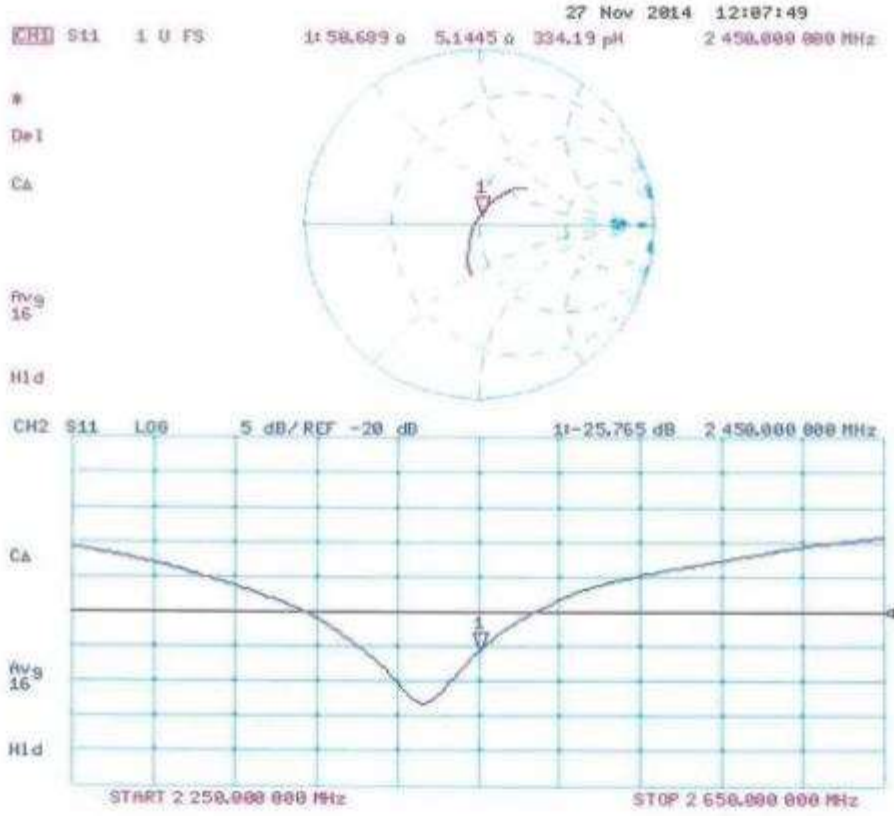

F.4 5GHz Dipole

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Dgieie (Vitec)**

Certificate No: **D5GHzV2-1200_Dec14**

CALIBRATION CERTIFICATE

Object **D5GHzV2 - SN:1200**

Calibration procedure(s) **QA CAL-22.v2
Calibration procedure for dipole validation kits between 3-6 GHz**

Calibration date: **December 04, 2014**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	07-Oct-14 (No. 217-02020)	Oct-15
Power sensor HP 8481A	US37292783	07-Oct-14 (No. 217-02020)	Oct-15
Power sensor HP 8481A	MY41092317	07-Oct-14 (No. 217-02021)	Oct-15
Reference 20 dB Attenuator	SN: 5058 (20k)	03-Apr-14 (No. 217-01918)	Apr-15
Type-N mismatch combination	SN: 5047.2 / 06327	03-Apr-14 (No. 217-01921)	Apr-15
Reference Probe ES3DV3	SN: 3205	30-Dec-13 (No. ES3-3205_Dec13)	Dec-14
DAE4	SN: 601	18-Aug-14 (No. DAE4-601_Aug14)	Aug-15

Secondary Standards	ID #	Check Date (In house)	Scheduled Check
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-13)	In house check: Oct-16
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-14)	In house check: Oct-15

Calibrated by:	Name Michael Weber	Function Laboratory Technician	Signature
Approved by:	Name Katja Pokovic	Function Technical Manager	

Issued: December 4, 2014

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEC 62209-2, "Evaluation of Human Exposure to Radio Frequency Fields from Handheld and Body-Mounted Wireless Communication Devices in the Frequency Range of 30 MHz to 6 GHz: Human models, Instrumentation, and Procedures"; Part 2: "Procedure to determine the Specific Absorption Rate (SAR) for including accessories and multiple transmitters", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"
- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:* SAR measured at the stated antenna input power.
- SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy = 4.0 mm, dz = 1.4 mm	Graded Ratio = 1.4 (Z direction)
Frequency	5200 MHz ± 1 MHz 5600 MHz ± 1 MHz 5800 MHz ± 1 MHz	

Head TSL parameters at 5200 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	36.0	4.66 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.4 ± 6 %	4.50 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5200 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	7.81 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	77.3 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.24 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	22.1 W/kg ± 19.5 % (k=2)

Head TSL parameters at 5600 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.5	5.07 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	33.8 ± 6 %	4.89 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5600 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.09 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	79.9 W / kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.30 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	22.7 W/kg ± 19.5 % (k=2)

Head TSL parameters at 5800 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.3	5.27 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	33.6 ± 6 %	5.09 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5800 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	7.84 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	77.5 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.24 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	22.1 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5200 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	49.0	5.30 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	47.1 ± 6 %	5.45 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	---	---

SAR result with Body TSL at 5200 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.59 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	75.3 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.12 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.0 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5600 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.5	5.77 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.4 ± 6 %	5.98 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	---	---

SAR result with Body TSL at 5600 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	8.11 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	80.5 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.24 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	22.2 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5800 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.2	6.00 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.0 ± 6 %	6.25 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	---	---

SAR result with Body TSL at 5800 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.53 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	74.7 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.08 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	20.6 W/kg ± 19.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS108)

Antenna Parameters with Head TSL at 5200 MHz

Impedance, transformed to feed point	47.4 Ω - 1.4 j Ω
Return Loss	- 30.3 dB

Antenna Parameters with Head TSL at 5600 MHz

Impedance, transformed to feed point	49.9 Ω + 5.7 j Ω
Return Loss	- 24.9 dB

Antenna Parameters with Head TSL at 5800 MHz

Impedance, transformed to feed point	49.5 Ω + 3.7 j Ω
Return Loss	- 28.6 dB

Antenna Parameters with Body TSL at 5200 MHz

Impedance, transformed to feed point	47.0 Ω + 0.4 j Ω
Return Loss	- 30.2 dB

Antenna Parameters with Body TSL at 5600 MHz

Impedance, transformed to feed point	50.0 Ω + 7.2 j Ω
Return Loss	- 22.8 dB

Antenna Parameters with Body TSL at 5800 MHz

Impedance, transformed to feed point	49.4 Ω + 5.5 j Ω
Return Loss	- 25.1 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.191 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	September 11, 2014

DASY5 Validation Report for Head TSL

Date: 04.12.2014

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 5GHz; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1200

Communication System: UID 0 - CW; Frequency: 5200 MHz, Frequency: 5600 MHz, Frequency: 5800 MHz
Medium parameters used: $f = 5200$ MHz; $\sigma = 4.5$ S/m; $\epsilon_r = 34.4$; $\rho = 1000$ kg/m³, Medium parameters used:
 $f = 5600$ MHz; $\sigma = 4.89$ S/m; $\epsilon_r = 33.8$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5800$ MHz; $\sigma = 5.09$
S/m; $\epsilon_r = 33.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.52, 5.52, 5.52); Calibrated: 30.12.2013, ConvF(4.86, 4.86, 4.86); Calibrated: 30.12.2013, ConvF(4.91, 4.91, 4.91); Calibrated: 30.12.2013;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan,**dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 64.97 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 28.2 W/kg

SAR(1 g) = 7.81 W/kg; SAR(10 g) = 2.24 W/kg

Maximum value of SAR (measured) = 17.9 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan,**dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 63.58 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 31.6 W/kg

SAR(1 g) = 8.09 W/kg; SAR(10 g) = 2.3 W/kg

Maximum value of SAR (measured) = 19.6 W/kg


Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan,**dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 61.53 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 32.0 W/kg


SAR(1 g) = 7.84 W/kg; SAR(10 g) = 2.24 W/kg

Maximum value of SAR (measured) = 19.1 W/kg

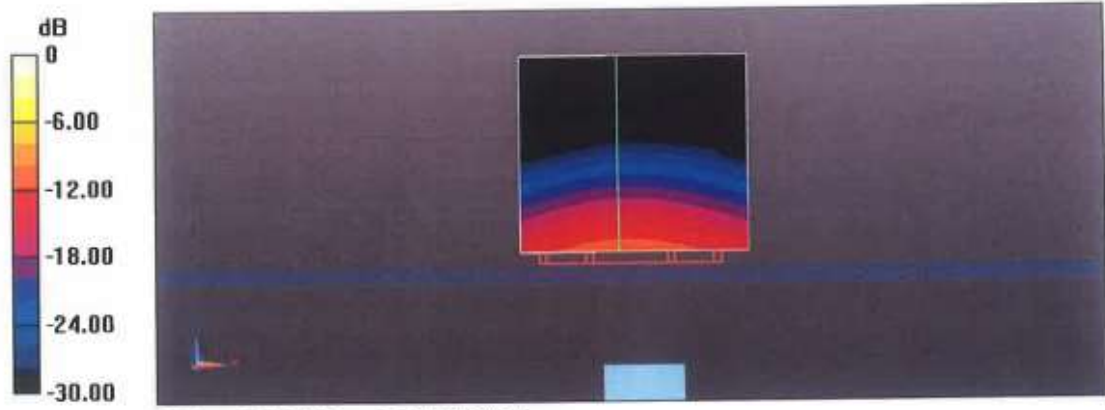

0 dB = 19.1 W/kg = 12.81 dBW/kg

Impedance Measurement Plot for Head TSL

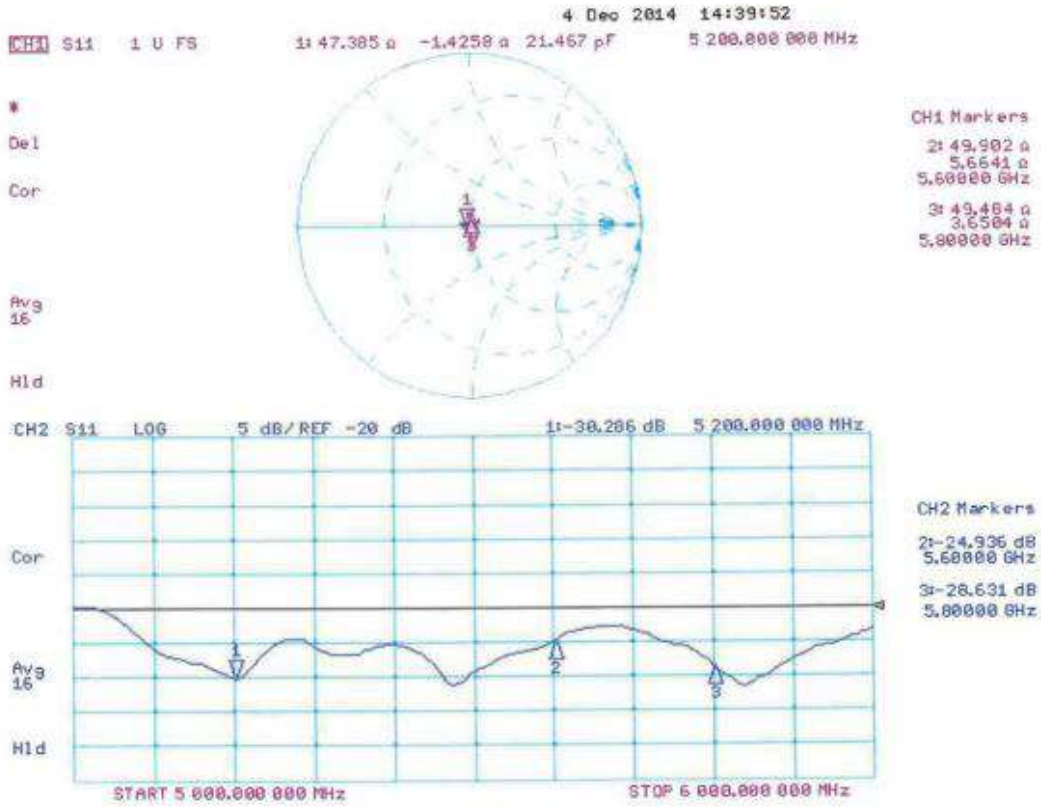

DASY5 Validation Report for Body TSL

Date: 04.12.2014

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 5GHz; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1200

Communication System: UID 0 - CW; Frequency: 5200 MHz, Frequency: 5600 MHz, Frequency: 5800 MHz
Medium parameters used: $f = 5200$ MHz; $\sigma = 5.45$ S/m; $\epsilon_r = 47.1$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5600$ MHz; $\sigma = 5.98$ S/m; $\epsilon_r = 46.4$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5800$ MHz; $\sigma = 6.25$ S/m; $\epsilon_r = 46$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.01, 5.01, 5.01); Calibrated: 30.12.2013, ConvF(4.3, 4.3, 4.3); Calibrated: 30.12.2013, ConvF(4.47, 4.47, 4.47); Calibrated: 30.12.2013;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 58.96 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 29.6 W/kg

SAR(1 g) = 7.59 W/kg; SAR(10 g) = 2.12 W/kg

Maximum value of SAR (measured) = 17.5 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 58.53 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 35.5 W/kg

SAR(1 g) = 8.11 W/kg; SAR(10 g) = 2.24 W/kg

Maximum value of SAR (measured) = 19.7 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 55.45 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 34.5 W/kg


SAR(1 g) = 7.53 W/kg; SAR(10 g) = 2.08 W/kg

Maximum value of SAR (measured) = 18.6 W/kg

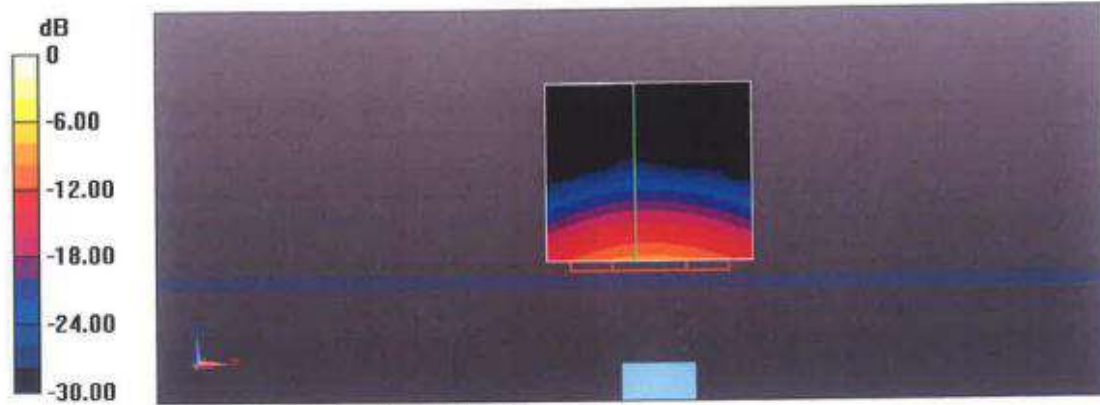
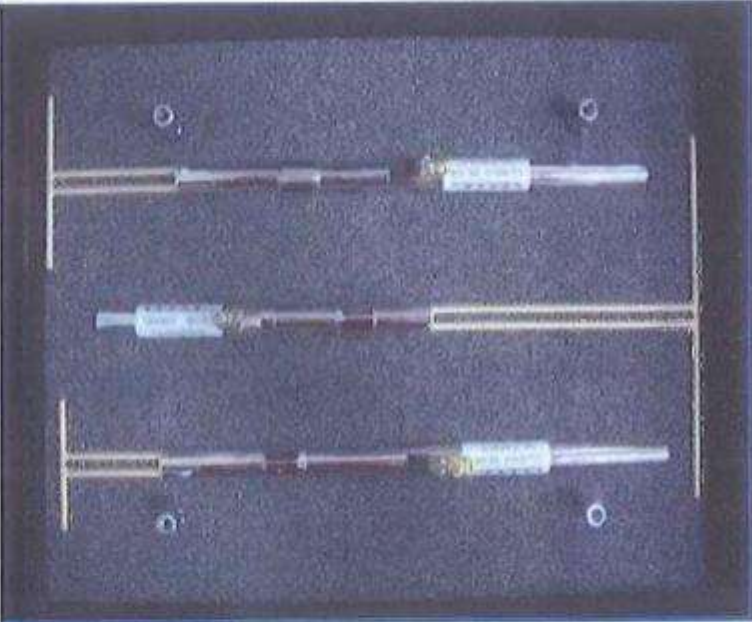




0 dB = 18.6 W/kg = 12.70 dBW/kg

Impedance Measurement Plot for Body TSL

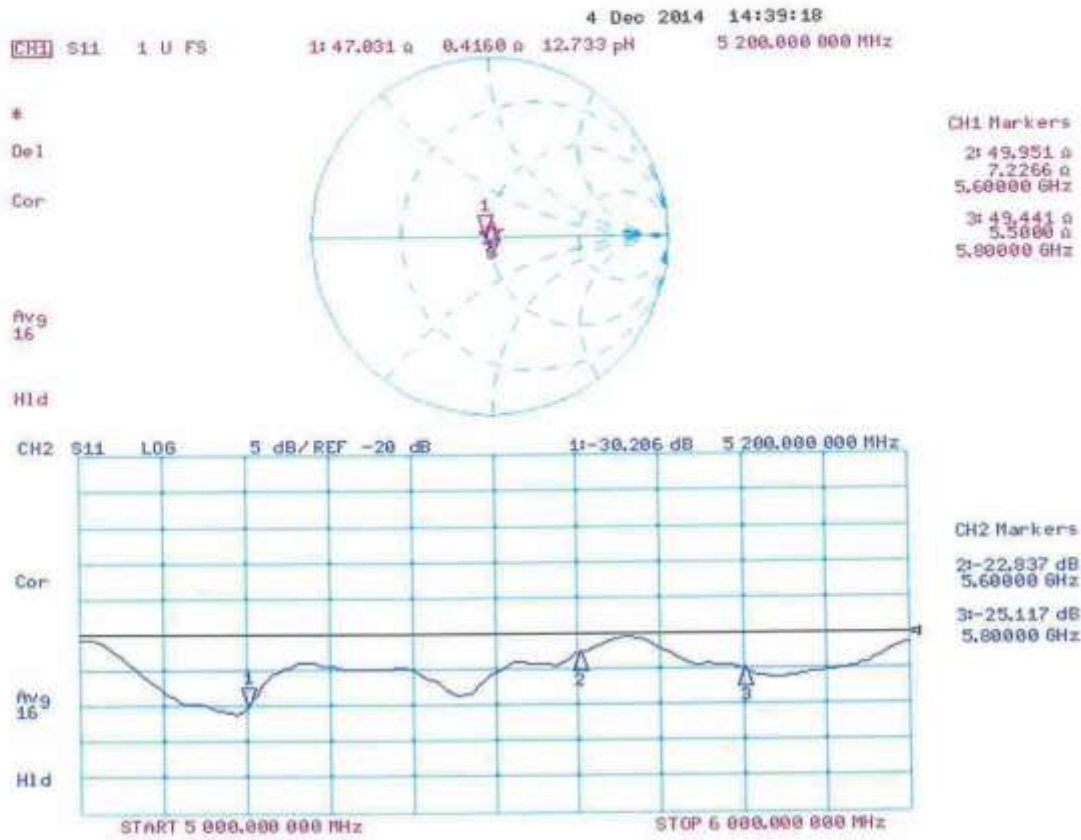

F.5 Dipole Performance Measurement Report

SAR Dipole Performance Measurement Report	ISSUED BY Shenzhen BALUN Technology Co., Ltd.  FOR Validation Dipoles
	
Tested by:  Tu Lang (Engineer) Approved by:  Wei Yanqian (Chief Engineer)	Report No.: LW-SZ15C0264-701 EUT Type: SAR Validation Dipole Model Name: D835V2, D1750V2 D1900V2, D2450V2 D2600V2, D5GHzV2 Brand Name: Speag Test Conclusion: Pass Test Date: Oct. 23, 2015 – Oct. 26, 2015 Date of Issue: Oct. 29, 2015

NOTE: This test report can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. BALUN Laboratory. Any objections should be raised within thirty days from the date of issue. To validate the report, please visit BALUN website.



1 GENERAL INFORMATION

1.1 Introduction


This document contains a summary of the requirements set forth by the IEEE 1528, FCC KDB 865664 D01 for reference dipoles used for SAR measurement system validations. Instead of the typical annual calibration recommended by measurement standards, the reference dipoles were demonstrated that the SAR target, impedance and return loss have remain stable, so the longer calibration interval is acceptable.


1.2 General Description for Equipment under Test (EUT)

EUT Type	DASY 52 Reference Dipoles
Manufacturer	Speag

Parameter	EUT 1	EUT 2	EUT 3	EUT 4	EUT 5	EUT 6
Model	D835V2	D1750V2	D1900V2	D2450V2	D2600V2	D5GHzV2
Frequency	835 MHz	1750 MHz	1900 MHz	2450 MHz	2600 MHz	5GHz-6GHz
Serial Number	SN 4d187	SN 1130	SN 5d193	SN 952	SN 1095	SN 1200
Product Condition (New/ Used)	Used	Used	Used	Used	Used	Used
Last Cal. Date	2014/11/26	2014/11/28	2014/11/28	2014/11/27	2014/11/27	2014/12/4

1.3 EUT Photos

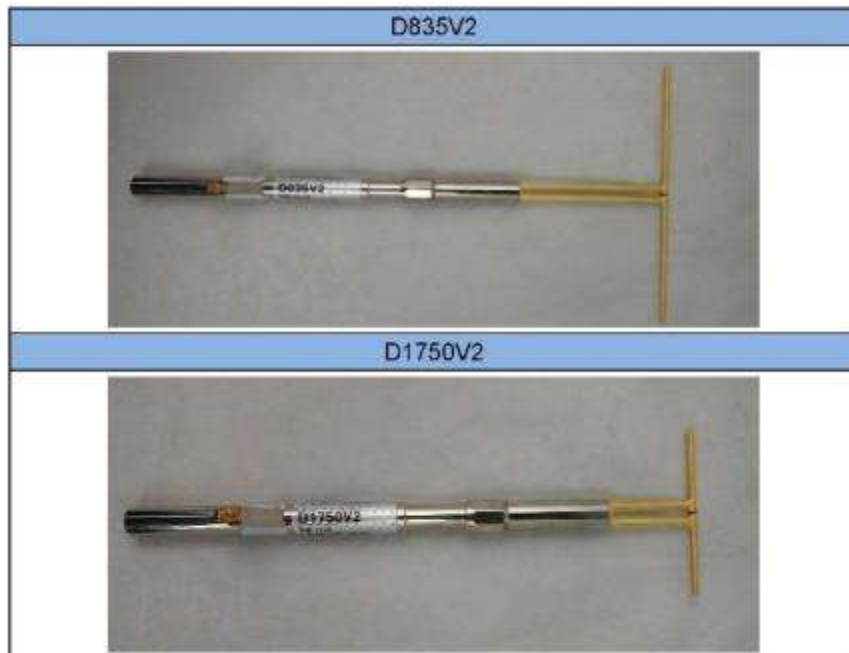

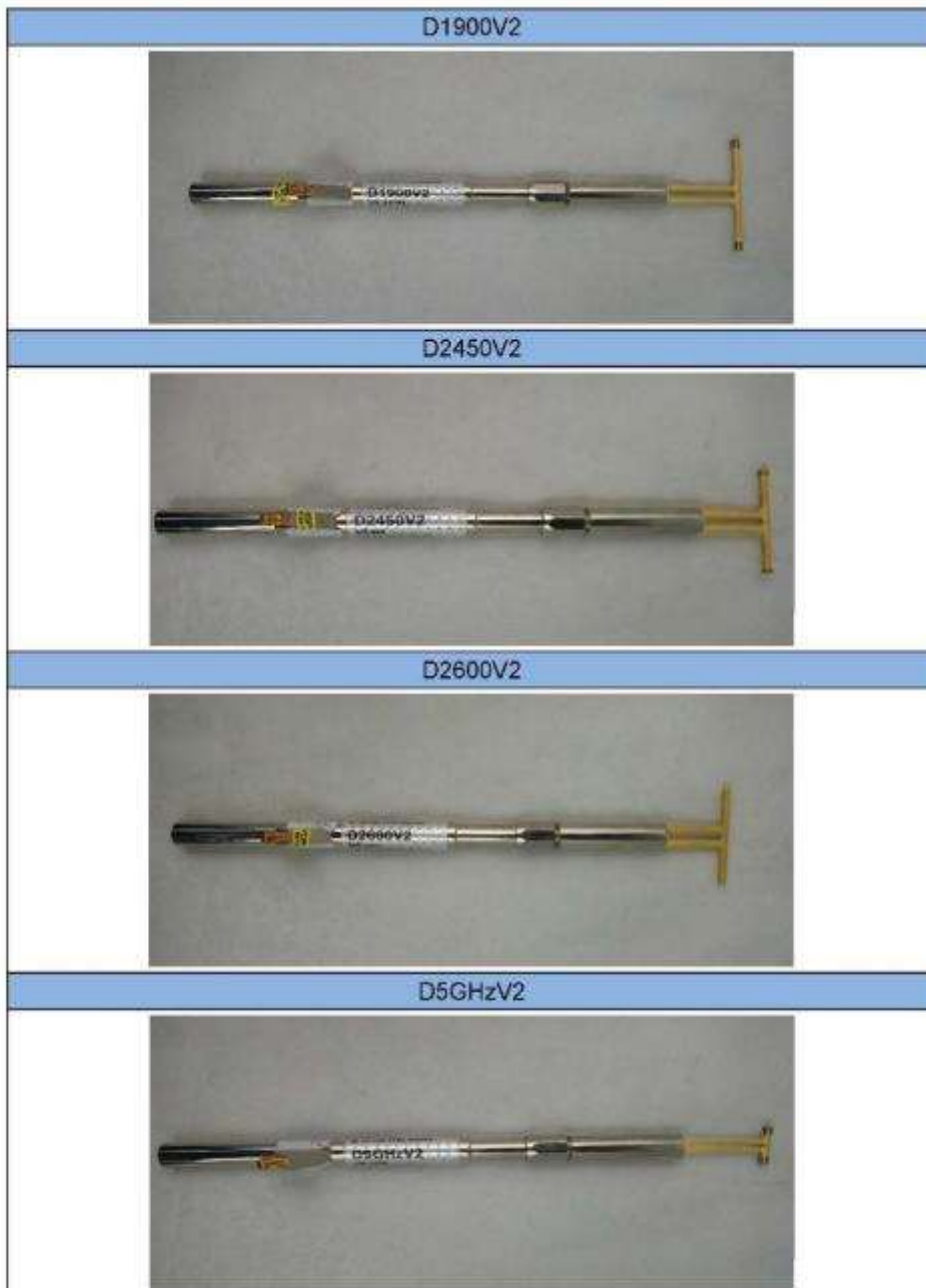



2 SIMULATING LIQUID VERIFICATION

Liquid Type	Fre. (MHz)	Meas. Conductivity (σ) (S/m)	Meas. Permittivity (ϵ)	Target Conductivity (σ) (S/m)	Target Permittivity (ϵ)	Conductivity Tolerance (%)	Permittivity Tolerance (%)
Head	835	0.89	41.83	0.90	41.50	-1.11	0.80
Body	835	0.98	53.88	0.97	55.20	1.03	-2.39
Head	1750	1.38	39.23	1.37	40.10	0.73	-2.17
Body	1750	1.45	51.75	1.49	53.40	-2.68	-3.09
Head	1900	1.43	39.44	1.40	40.00	2.14	-1.40
Body	1900	1.55	51.81	1.52	53.30	1.97	-3.17
Head	2450	1.84	38.53	1.80	39.20	2.22	-1.71
Body	2450	1.99	51.17	1.95	52.70	2.05	-2.90
Head	2600	1.97	38.09	1.96	39.00	0.51	-2.33
Body	2600	2.20	50.81	2.16	52.50	1.85	-3.22
Head	5200	4.78	36.52	4.66	35.99	2.58	1.47
Body	5200	5.38	48.74	5.30	49.01	1.51	-0.55
Head	5600	5.20	35.06	5.07	35.53	2.58	-1.32
Body	5600	5.72	46.31	5.77	48.47	-0.87	-4.46
Head	5800	5.42	34.40	5.27	35.30	2.85	-2.55
Body	5800	5.92	46.06	6.00	48.20	-1.33	-4.44




3 DIPOLE IMPEDANCE AND RETURN LOSS

The dipoles are designed to have low return loss when presented against a flat phantom at the specified distance. A Vector Network Analyser was used to perform a return loss measurement on the specific dipole when in the measurement location against the phantom and the distance was specified by the manufacturer with a special, low loss and low relative permittivity spacer.

The impedance was measured at the SMA-connector with the network analyser.


3.1 D835V2

RETURN LOSS AND IMPEDANCE IN HEAD LIQUID

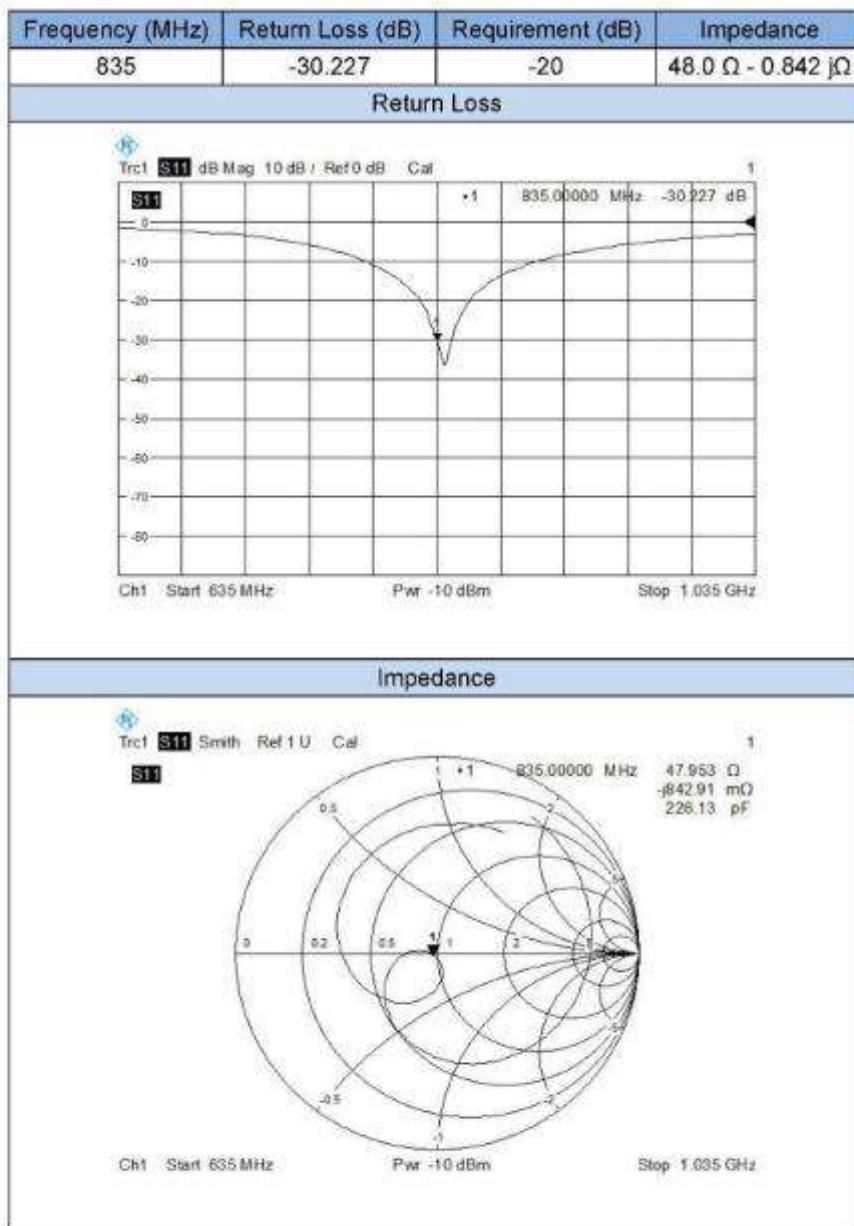




RETURN LOSS AND IMPEDANCE IN BODY LIQUID

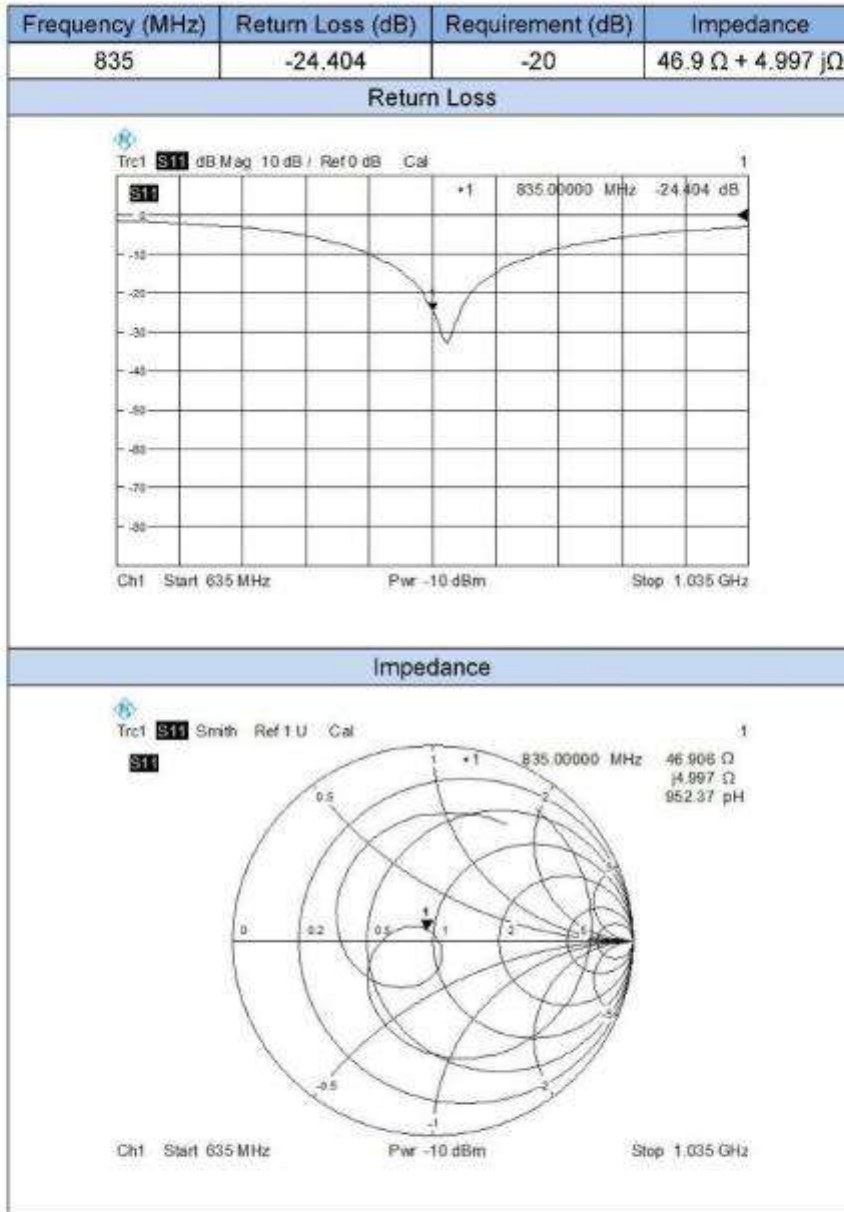



3.2 D1750V2

RETURN LOSS AND IMPEDANCE IN HEAD LIQUID

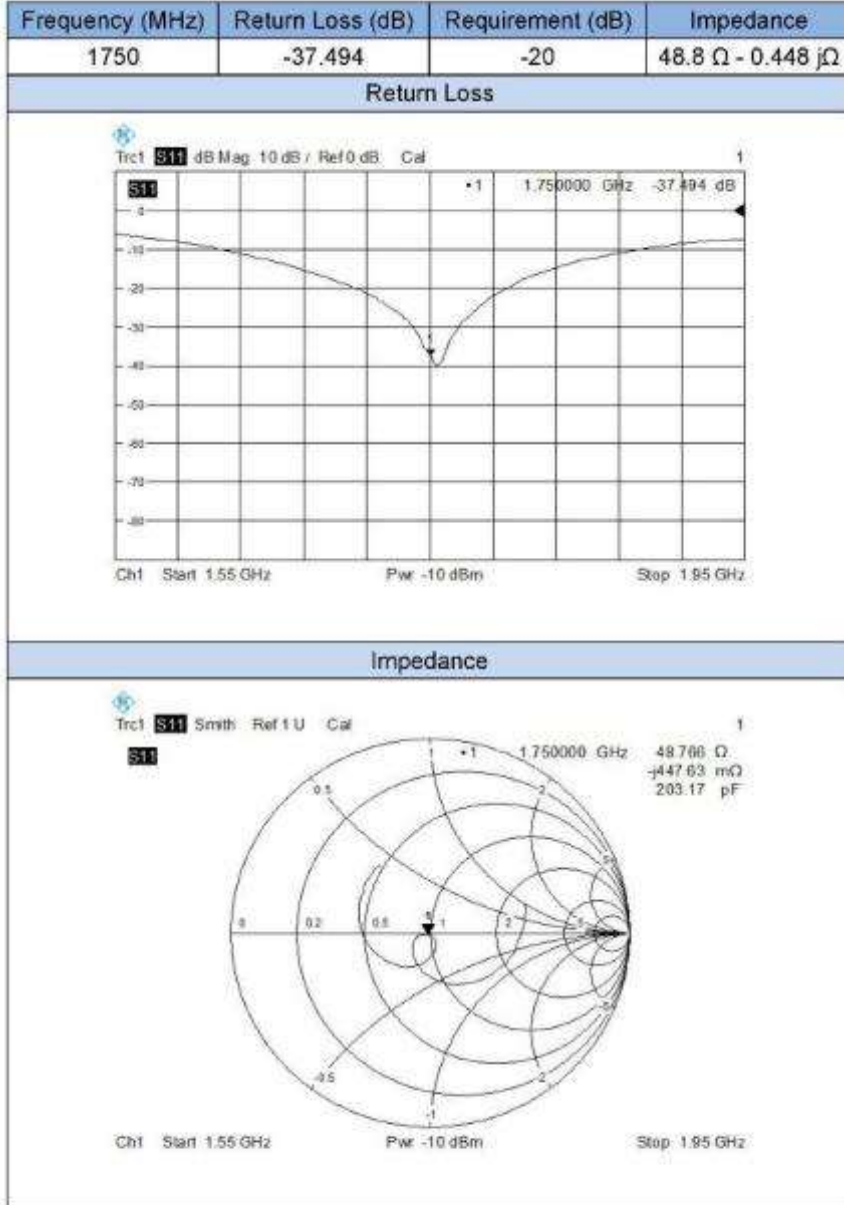





RETURN LOSS AND IMPEDANCE IN BODY LIQUID

Frequency (MHz)	Return Loss (dB)	Requirement (dB)	Impedance
1750	-25.849	-20	48.0 Ω + 4.534 jΩ

Return Loss

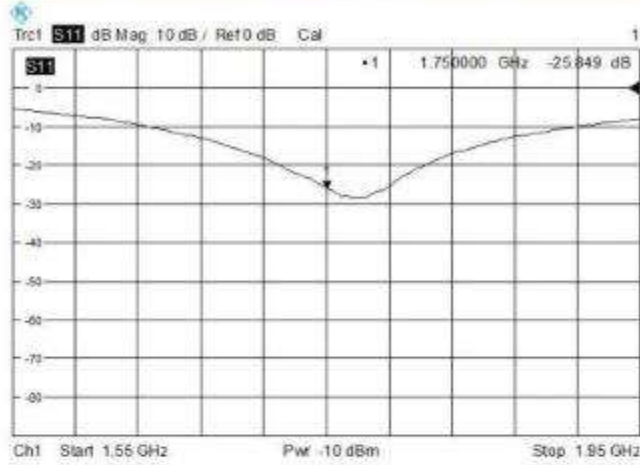

Impedance

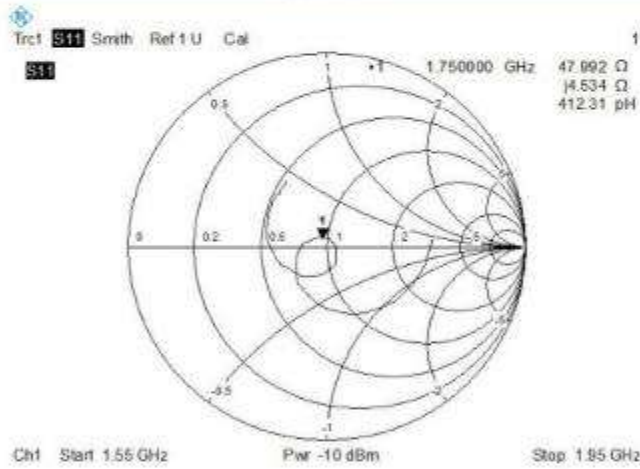




3.3 D1900V2


RETURN LOSS AND IMPEDANCE IN HEAD LIQUID

Frequency (MHz)	Return Loss(dB)	Requirement (dB)	Impedance
1900	-31.607	-20	47.520 Ω -0.735 $j\Omega$

Return Loss

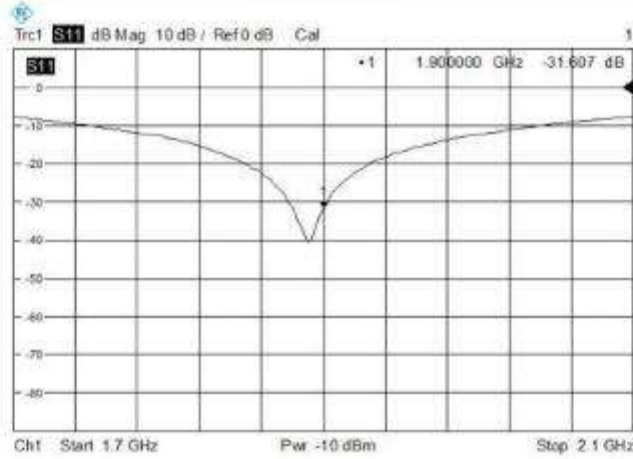

Impedance

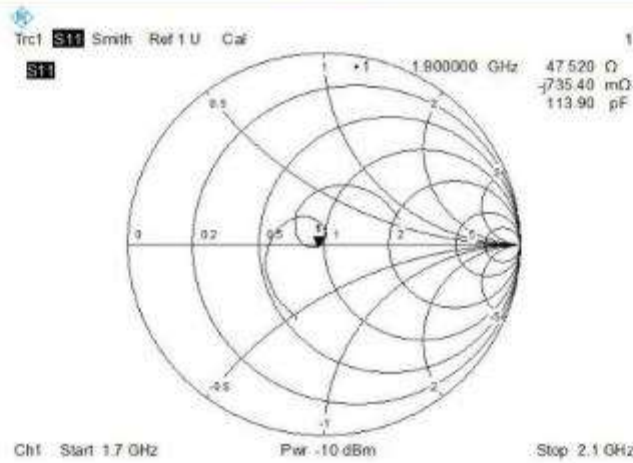





RETURN LOSS AND IMPEDANCE IN BODY LIQUID

Frequency (MHz)	Return Loss (dB)	Requirement (dB)	Impedance
1900	-25.957	-20	48.4 Ω - 4.6 jΩ

Return Loss

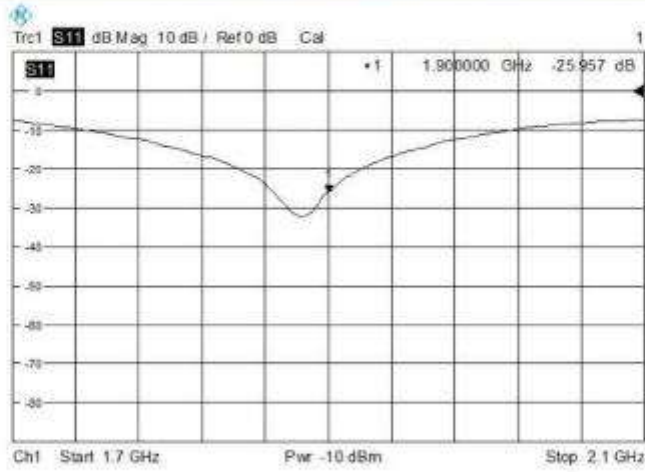

Impedance

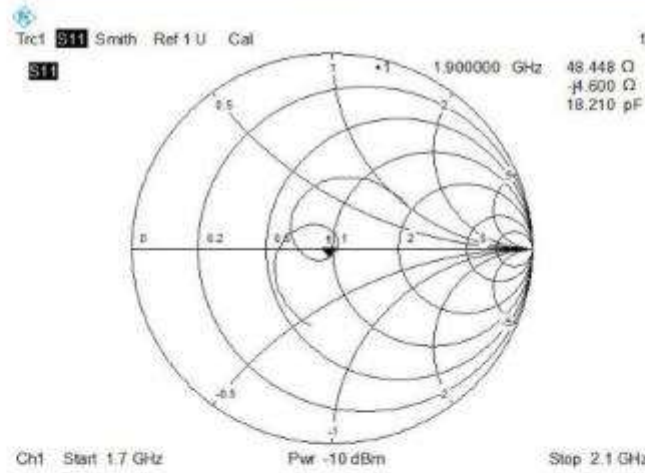




3.4 D2450V2



RETURN LOSS AND IMPEDANCE IN HEAD LIQUID

Frequency (MHz)	Return Loss (dB)	Requirement (dB)	Impedance
2450	-27.642	-20	46.5 Ω + 1.998 jΩ

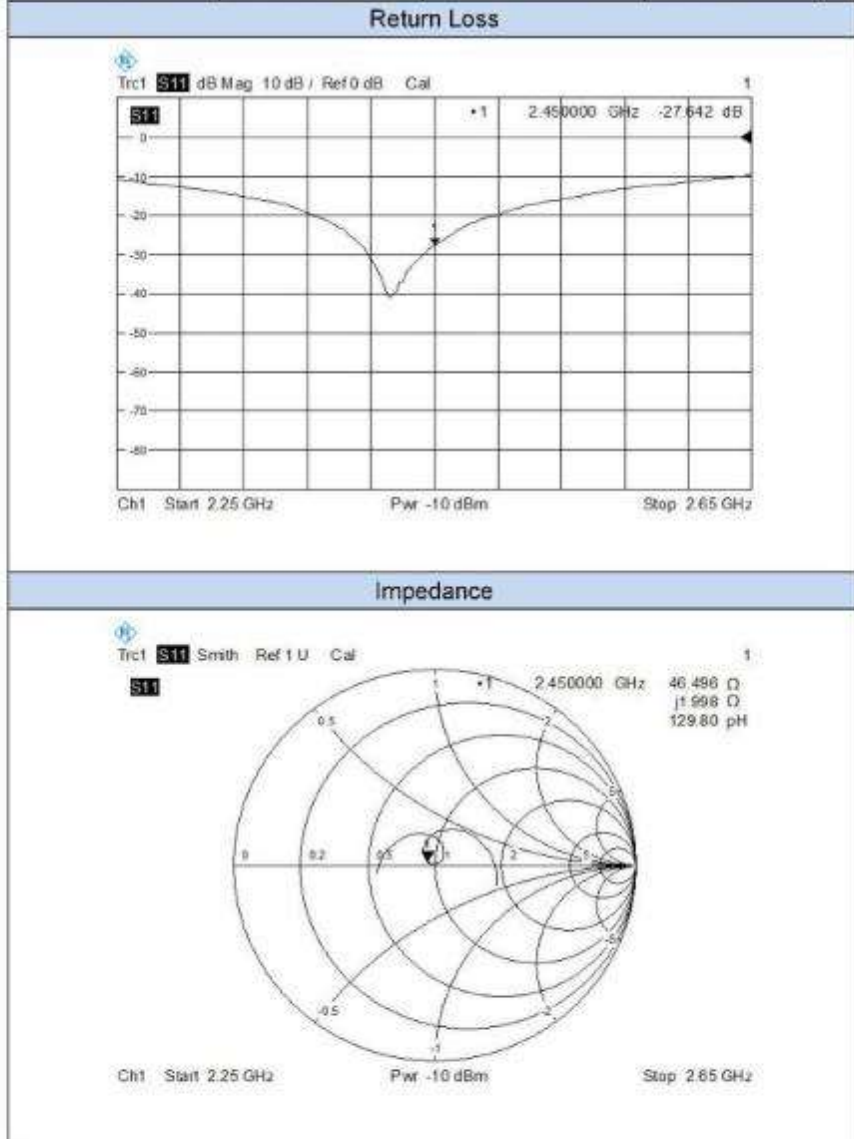


RETURN LOSS AND IMPEDANCE IN BODY LIQUID


Frequency (MHz)	Return Loss (dB)	Requirement (dB)	Impedance
2450	-27.494	-20	46.8 Ω - 2.446 $j\Omega$

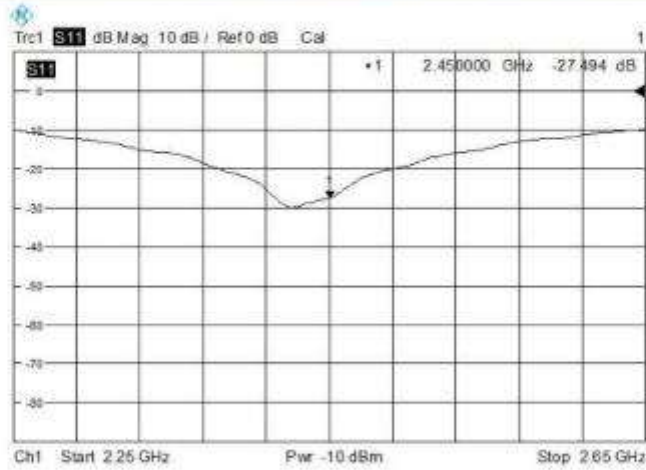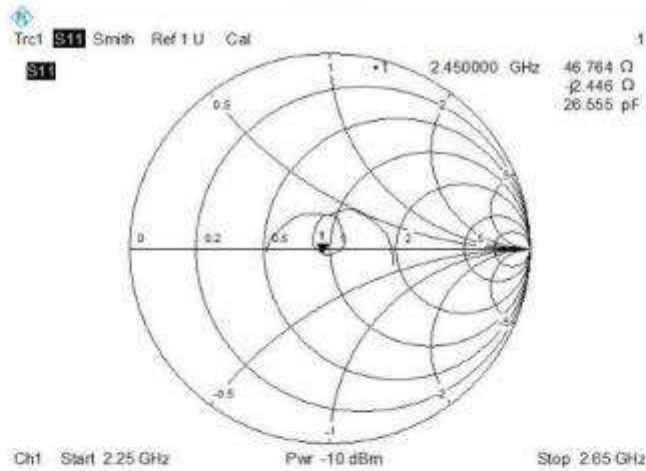Return Loss

Impedance




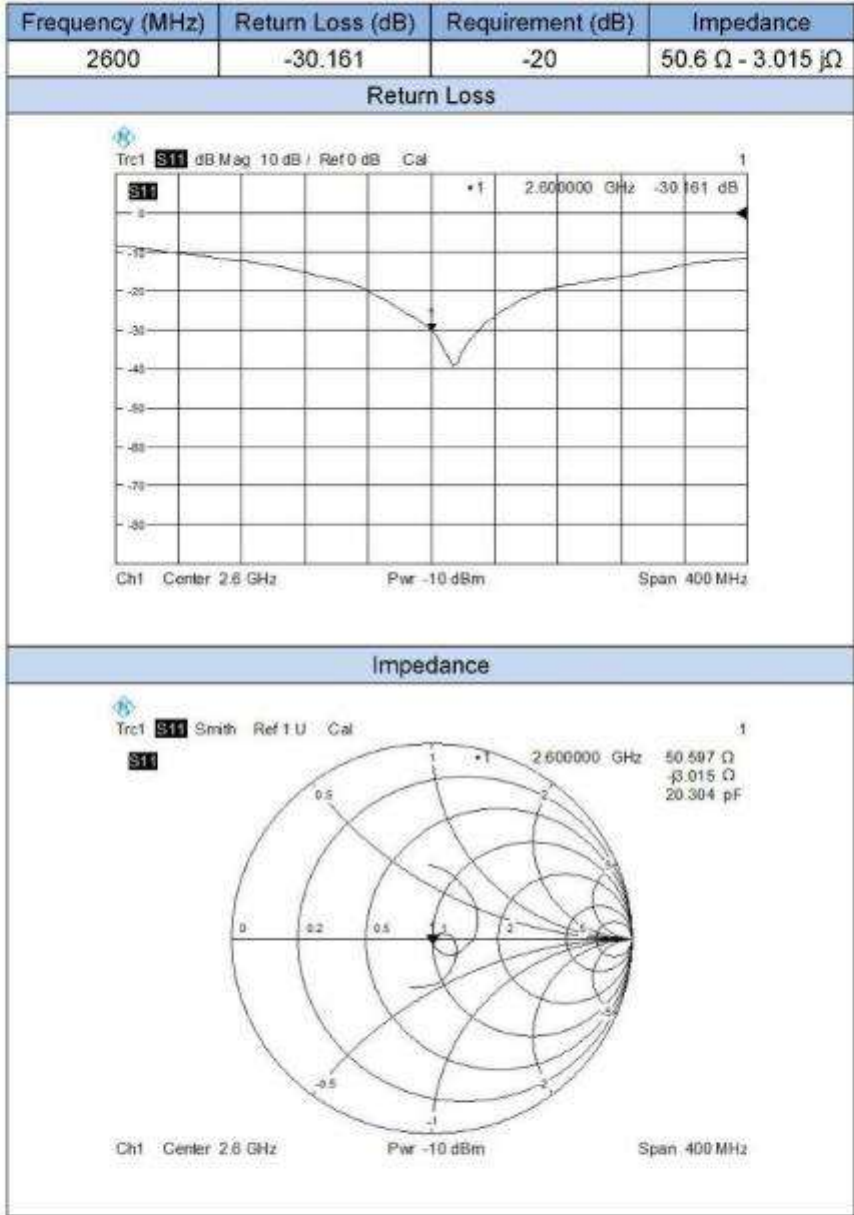
3.5 D2600V2

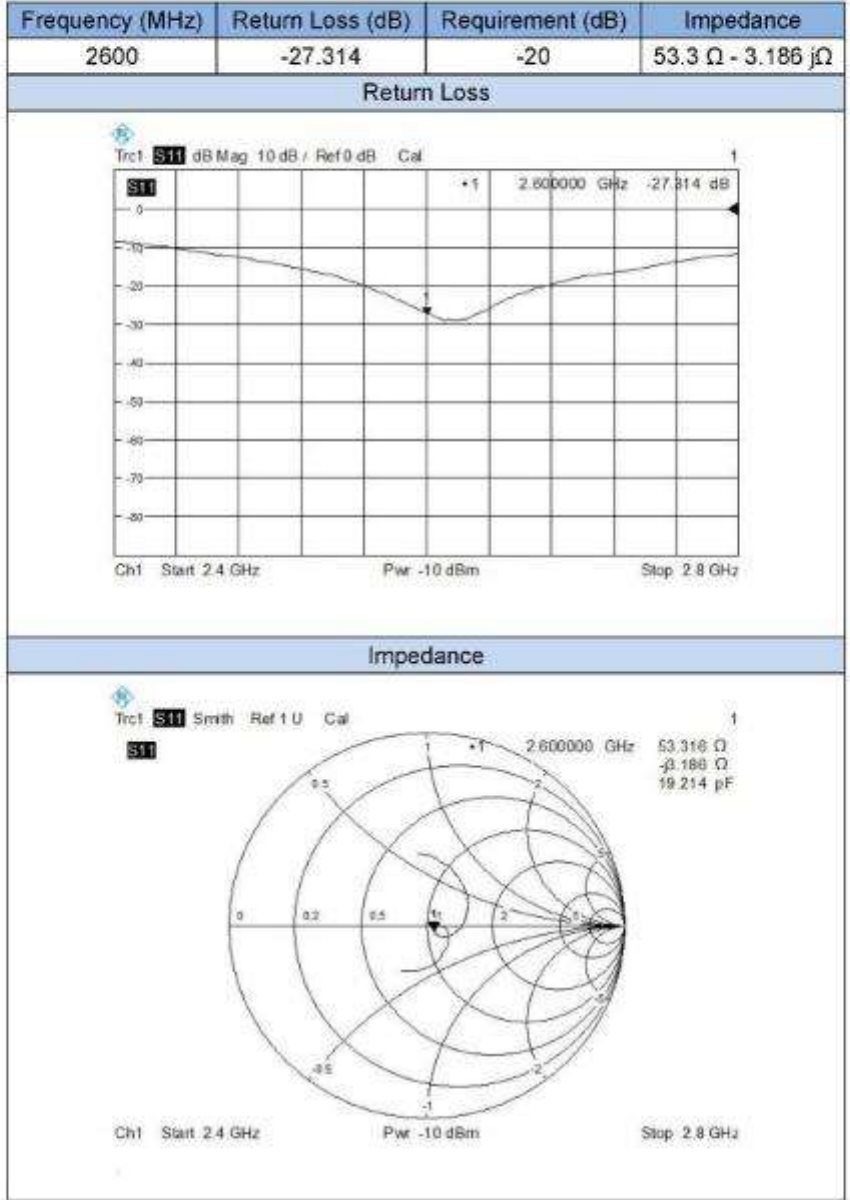RETURN LOSS AND IMPEDANCE IN HEAD LIQUID





RETURN LOSS AND IMPEDANCE IN BODY LIQUID






3.6 D5GHzV2


RETURN LOSS AND IMPEDANCE IN HEAD LIQUID

Frequency (MHz)	Return Loss (dB)	Requirement (dB)	Impedance
5200	-31.668	-20	$47.8 \Omega + 1.189 j\Omega$
5600	-22.615	-20	$53.4 \Omega - 3.757 j\Omega$
5800	-29.503	-20	$51.1 \Omega + 1.415 j\Omega$

Return Loss


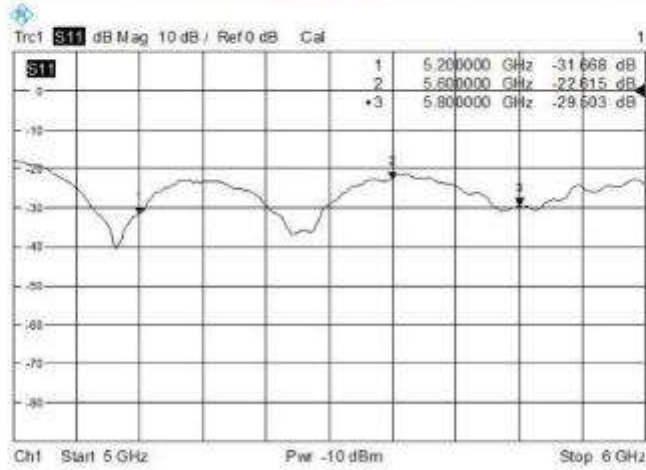


Impedance

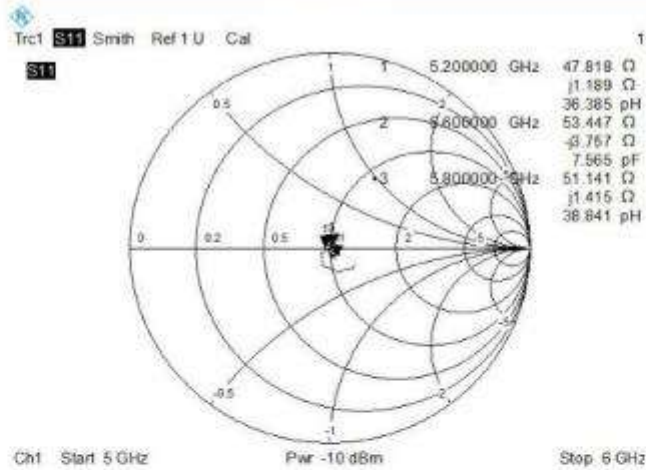


RETURN LOSS AND IMPEDANCE IN BODY LIQUID


Frequency (MHz)	Return Loss (dB)	Requirement (dB)	Impedance
5200	-30.037	-20	47.2 Ω + 1.088 $j\Omega$
5600	-21.932	-20	52.0 Ω - 3.425 $j\Omega$
5800	-28.420	-20	51.6 Ω + 1.436 $j\Omega$

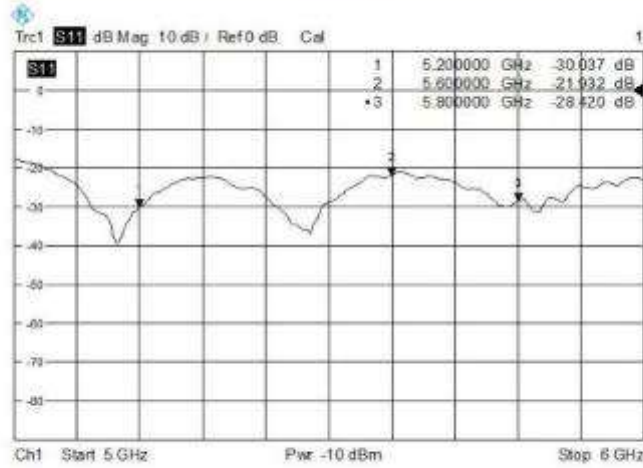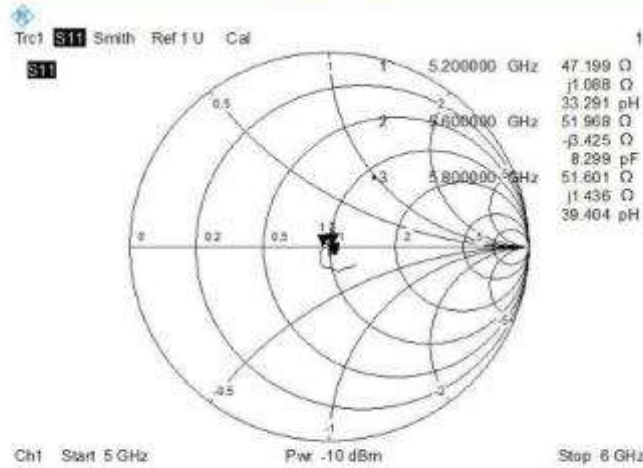Return Loss

Impedance




4 VALIDATION MEASUREMENT

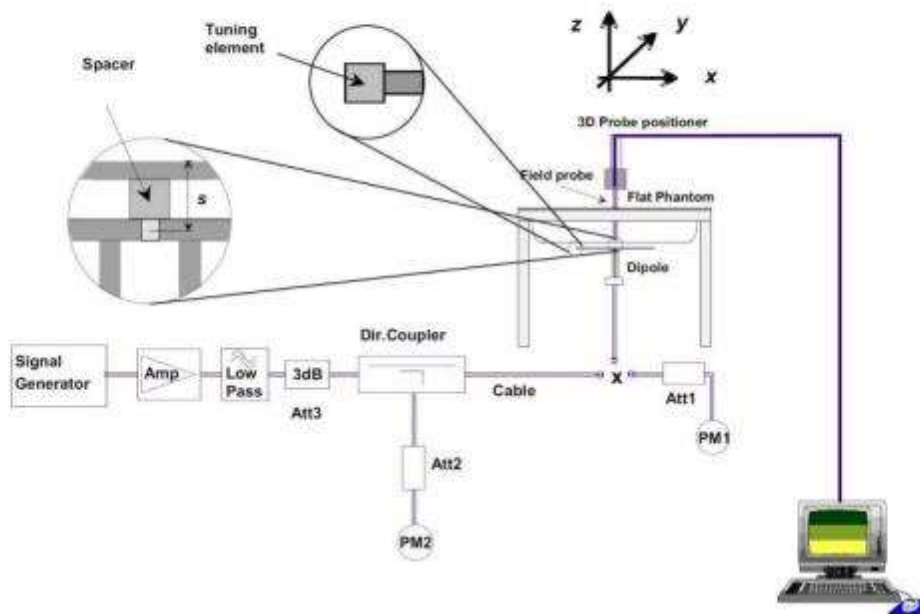The IEEE Std. 1528, FCC KDBs and CE/IEC 62209 standards state that the system validation measurements must be performed using a reference dipole meeting the fore mentioned return loss and mechanical dimension requirements. The validation measurement must be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards. Per the standards, the dipole shall be positioned below the bottom of the phantom, with the dipole length centered and parallel to the longest dimension of the flat phantom, with the top surface of the dipole at the described distance from the bottom surface of the phantom.



4.1 Dipole SAR Validation Measurement Result

Freq. (MHz)	Liquid Type	Power (mW)	1 g Measured SAR (W/kg)	Normalized SAR (W/kg)	10 g Measured SAR (W/kg)	Normalized SAR (W/kg)	1 g Targeted SAR (W/kg)	Tolerance (%)	10 g Targeted SAR (W/kg)	Tolerance (%)
835	Head	100	0.959	9.59	0.627	6.27	9.56	0.31	6.22	0.80
	Body	100	0.981	9.61	0.634	6.34	9.56	0.52	6.22	1.93
1750	Head	100	3.440	34.40	1.810	18.10	36.40	-5.49	19.30	-6.22
	Body	100	3.660	36.60	1.950	19.50	36.40	0.55	19.30	1.04
1900	Head	100	3.960	39.60	2.070	20.70	39.70	-0.25	20.50	0.98
	Body	100	4.010	40.10	2.090	20.90	39.70	1.01	20.50	1.95
2450	Head	100	5.260	52.60	2.410	24.10	52.40	0.38	24.00	0.42
	Body	100	5.130	51.30	2.330	23.30	52.40	-2.10	24.00	-2.92
2600	Head	100	5.410	54.10	2.360	23.60	55.30	-2.17	24.60	-4.07



	Body	100	5.580	55.80	2.420	24.20	55.30	0.90	24.60	-1.63
5200	Head	100	8.220	82.20	2.240	22.40	76.50	7.45	21.60	3.70
	Body	100	8.320	83.20	2.280	22.80	76.50	8.76	21.60	5.56
5600	Head	100	8.240	82.40	2.260	22.60				
	Body	100	8.410	84.10	2.330	23.30				
5800	Head	100	7.280	72.80	2.120	21.20	78.0	-6.67	21.90	-3.20
	Body	100	8.240	82.40	2.300	23.00	78.0	5.64	21.90	5.02



4.2 D835V2

4.2.1 Dipole 835 MHz Validation Measurement for Head Tissue

Dipole 835 MHz; Type: D835V2; Serial: D835V2-SN: 4d187

Date/Time: 10/25/2015

Communication System Band: D835 (835.0 MHz); Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835$ MHz; $\sigma = 0.89$ S/m; $\epsilon_r = 41.83$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 21.4 Liquid Temperature: 20.8

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(9.56, 9.56, 9.56);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454;
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Dipole validation measurement for Head Tissue/Pin= 100mW , d=15mm/Zoom


Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 34.03 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.44 W/kg

SAR(1 g) = 0.959 W/kg; SAR(10 g) = 0.627 W/kg

Maximum value of SAR (measured) = 1.03 W/kg

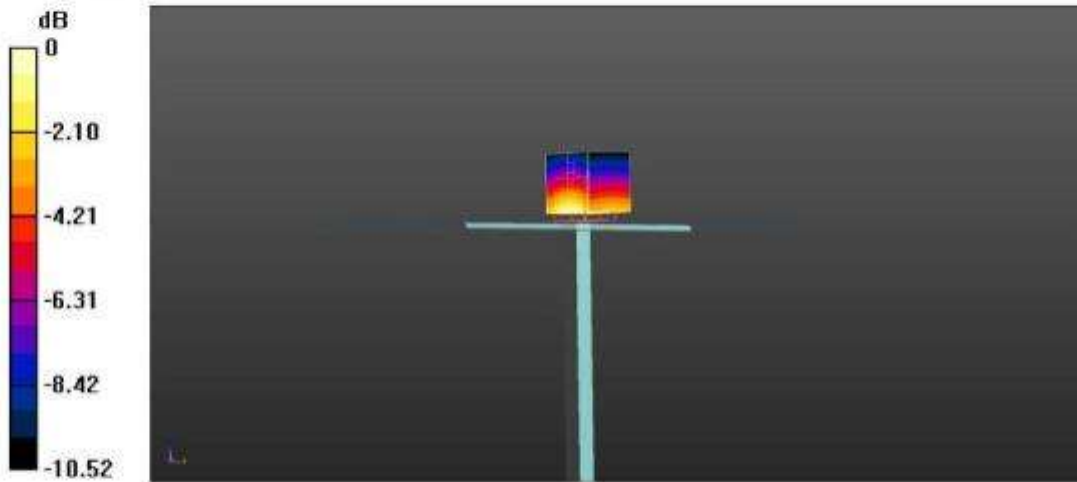

0 dB = 1.03 W/kg = 0.13 dBW/kg



4.2.2 Dipole 835 MHz Validation Measurement for Body Tissue

Dipole 835 MHz; Type: D835V2; Serial: D835V2-SN: 4d187

Date/Time: 10/25/2015

Communication System Band: D835 (835.0 MHz); Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835$ MHz; $\sigma = 0.98$ S/m; $\epsilon_r = 53.88$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4 Liquid Temperature: 21.8

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(9.83, 9.83, 9.83);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454;
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Dipole validation measurement for Body Tissue/Pin= 100mW , d=15mm /Zoom


Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 31.63 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.40 W/kg

SAR(1 g) = 0.961 W/kg; SAR(10 g) = 0.634 W/kg

Maximum value of SAR (measured) = 1.04 W/kg

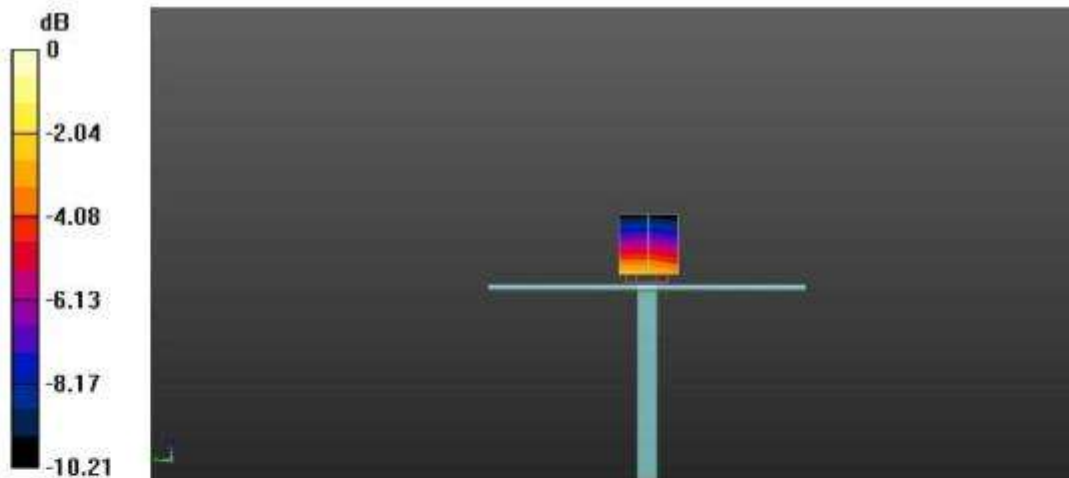



4.3D1750V2

4.3.1 Dipole 1750 MHz Validation Measurement for Head Tissue

Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2-SN: 1130

Date/Time: 10/23/2015

Communication System Band: D1750 (1750.0 MHz); Frequency: 1750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 39.23$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 21.8 Liquid Temperature: 21.2

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(9.13, 9.13, 9.13);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454;
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Dipole validation measurement for Head Tissue/Pin= 100mW ,d=10mm /Zoom


Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 40.68 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 6.42 W/kg

SAR(1 g) = 3.44 W/kg; SAR(10 g) = 1.81 W/kg

Maximum value of SAR (measured) = 3.87 W/kg

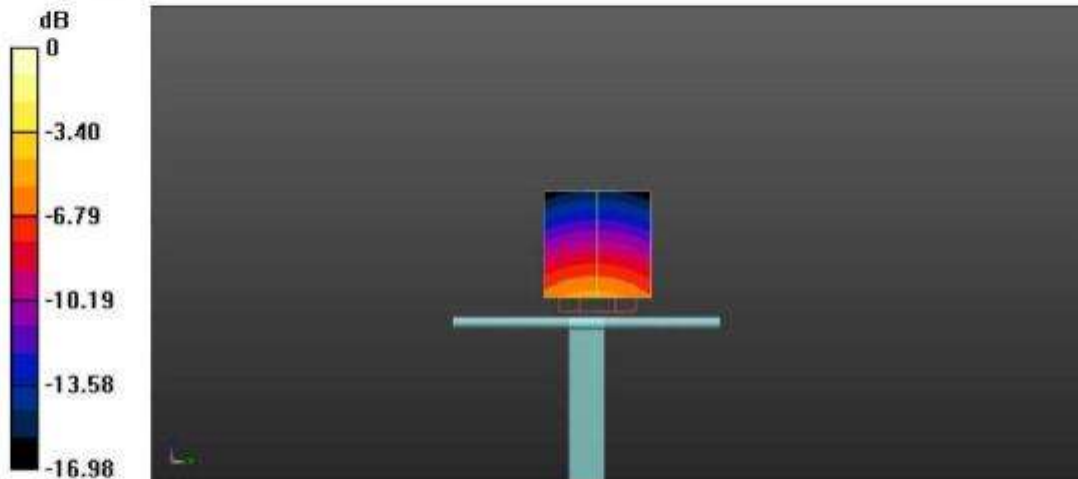



4.3.2 Dipole 1750 MHz Validation Measurement for Body Tissue

Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2-SN: 1130

Date/Time: 10/22/2015

Communication System Band: D1750 (1750.0 MHz); Frequency: 1750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.45$ S/m; $\epsilon_r = 51.75$; $\rho = 1000$ kg/m³.

Phantom section: Flat Section

Ambient Temperature: 21.8 Liquid Temperature: 21.2

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(7.87, 7.87, 7.87);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454;
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Dipole validation measurement for Body Tissue/Pin= 100mW ,d=10mm /Zoom


Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 38.41 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 6.61 W/kg

SAR(1 g) = 3.66 W/kg; SAR(10 g) = 1.95 W/kg

Maximum value of SAR (measured) = 4.14 W/kg

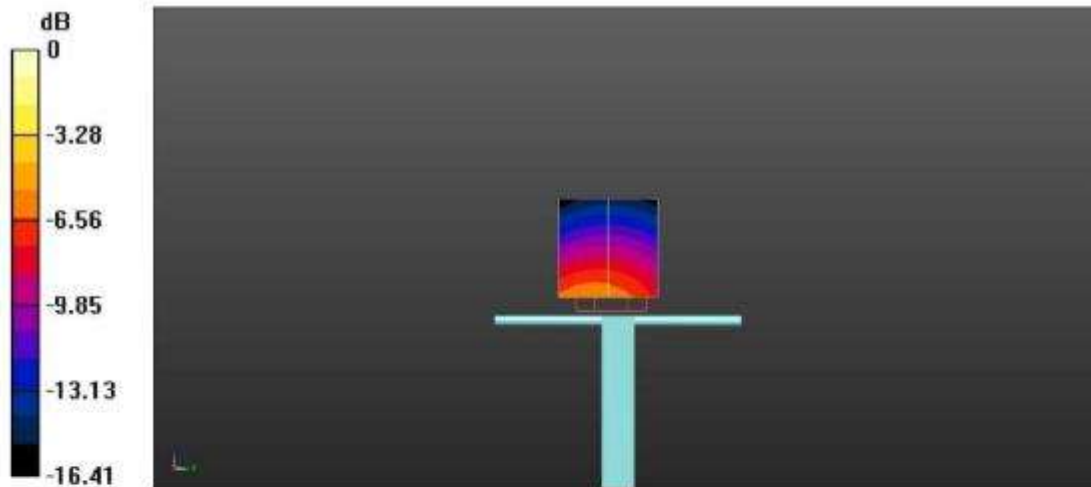

0 dB = 4.14 W/kg = 6.17 dBW/kg



4.4D1900V2

4.4.1 Dipole 1900 MHz Validation Measurement for Head Tissue

Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2-SN: 5d193

Date/Time: 10/25/2015

Communication System Band: D1900 (1900.0 MHz); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.43$ S/m; $\epsilon_r = 39.75$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 21.7 Liquid Temperature: 20.9

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(8.15, 8.15, 8.15);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454;
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)


Dipole validation measurement for Head Tissue/Pin= 100mW ,d=10mm /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 48.36 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 7.33 W/kg

SAR(1 g) = 3.96 W/kg; SAR(10 g) = 2.07 W/kg

Maximum value of SAR (measured) = 4.40 W/kg

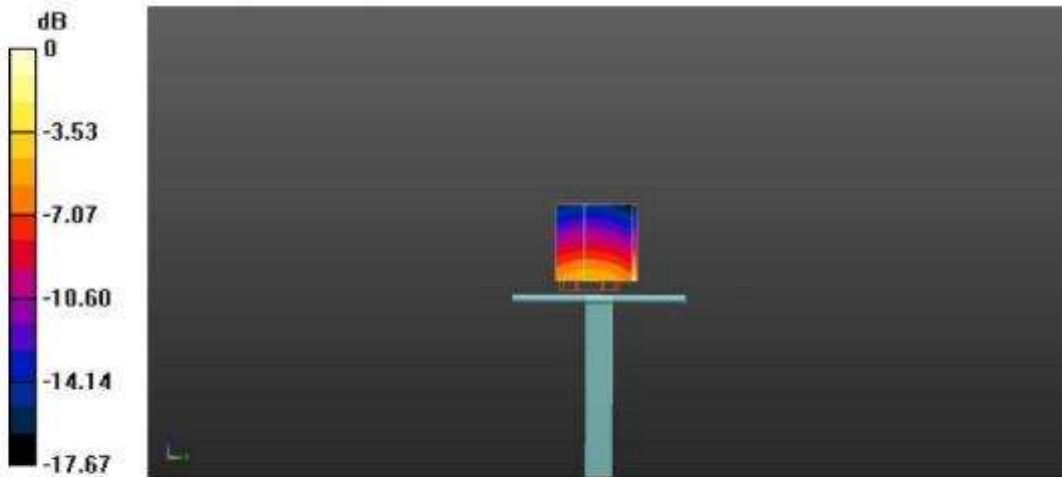

0 dB = 4.40 W/kg = 6.43 dBW/kg



4.4.2 Dipole 1900 MHz Validation Measurement for Body Tissue

Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2-SN: 5d193

Date/Time: 10/25/2015

Communication System Band: D1900 (1900.0 MHz); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.55$ S/m; $\epsilon_r = 51.61$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 21.7 Liquid Temperature: 20.9

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(7.51, 7.51, 7.51);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454;
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Dipole validation measurement for Body Tissue/Pin= 100mW ,d=10mm /Zoom


Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 48.99 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 7.27 W/kg

SAR(1 g) = 4.01 W/kg; SAR(10 g) = 2.09 W/kg

Maximum value of SAR (measured) = 4.55 W/kg

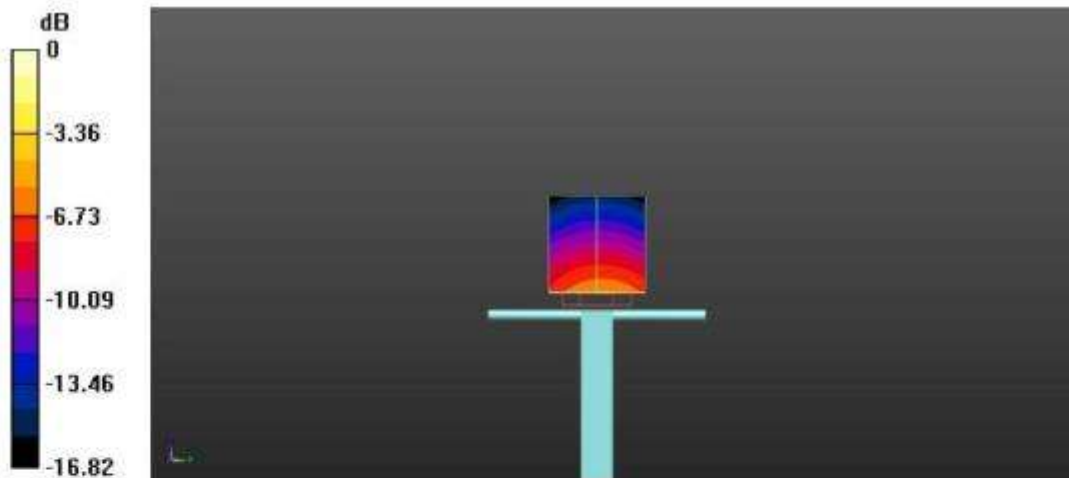

0 dB = 4.55 W/kg = 6.58 dBW/kg



4.5 D2450V2

4.5.1 Dipole 2450 MHz Validation Measurement for Head Tissue

Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2-SN: 952

Date/Time: 10/24/2015

Communication System Band: CD2450 (2450.0 MHz); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.84$ S/m; $\epsilon_r = 38.53$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.1 Liquid Temperature: 21.2

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(7.62, 7.62, 7.62);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454;
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)


Dipole validation measurement for Head Tissue/Pin= 100mW ,d=10mm /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 53.74 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 11.3 W/kg

SAR(1 g) = 5.26 W/kg; SAR(10 g) = 2.41 W/kg

Maximum value of SAR (measured) = 6.00 W/kg

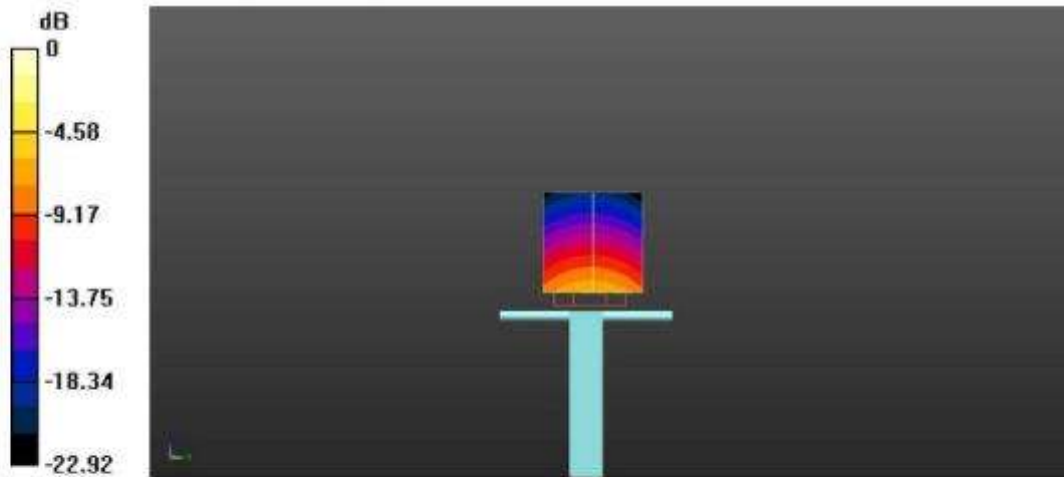

0 dB = 6.00 W/kg = 7.78 dBW/kg



4.5.2 Dipole 2450 MHz Validation Measurement for Body Tissue

Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2-SN: 952

Date/Time: 10/24/2015

Communication System Band: D2450 (2450.0 MHz); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.99$ S/m; $\epsilon_r = 51.17$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.1 Liquid Temperature: 21.2

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(7.55, 7.55, 7.55);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454;
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Dipole validation measurement for Body Tissue/Pin= 100mW ,d=10mm /Zoom


Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 50.42 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 10.8 W/kg

SAR(1 g) = 5.13 W/kg; SAR(10 g) = 2.33 W/kg

Maximum value of SAR (measured) = 5.91 W/kg

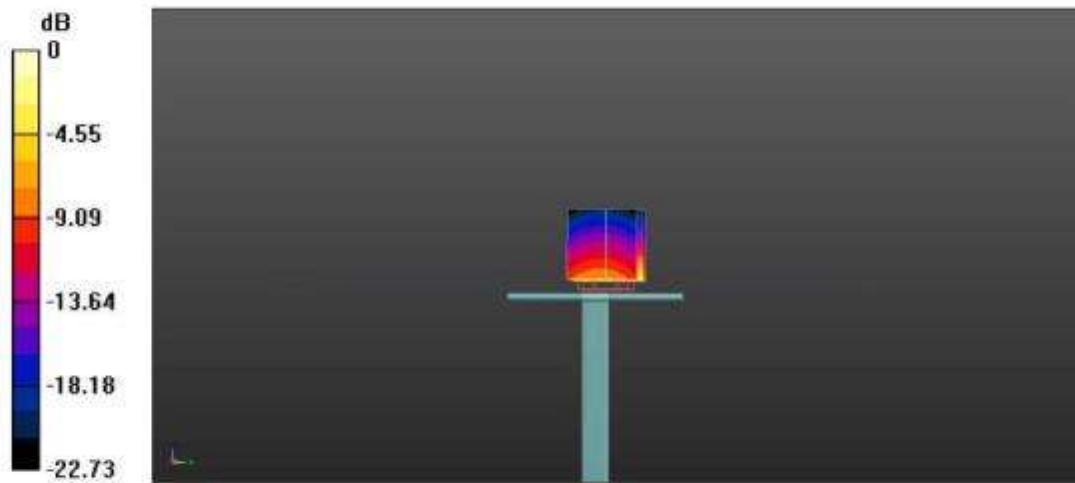

0 dB = 5.91 W/kg = 7.72 dBW/kg



4.6 D2600V2

4.6.1 Dipole 2600 MHz Validation Measurement for Head Tissue

Dipole 2600 MHz; Type: D2600V2; Serial: D2600V2-SN: 1095

Date/Time: 10/24/2015

Communication System Band: D2600 (2600.0 MHz); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2600$ MHz; $\sigma = 1.97$ S/m; $\epsilon_r = 38.09$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 21.5 Liquid Temperature: 20.6

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(7.64, 7.64, 7.64);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454;
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)


Dipole validation measurement for Head Tissue/Pin= 100mW ,d=10mm /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 52.69 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 12.2 W/kg

SAR(1 g) = 5.41 W/kg; SAR(10 g) = 2.36 W/kg

Maximum value of SAR (measured) = 6.17 W/kg

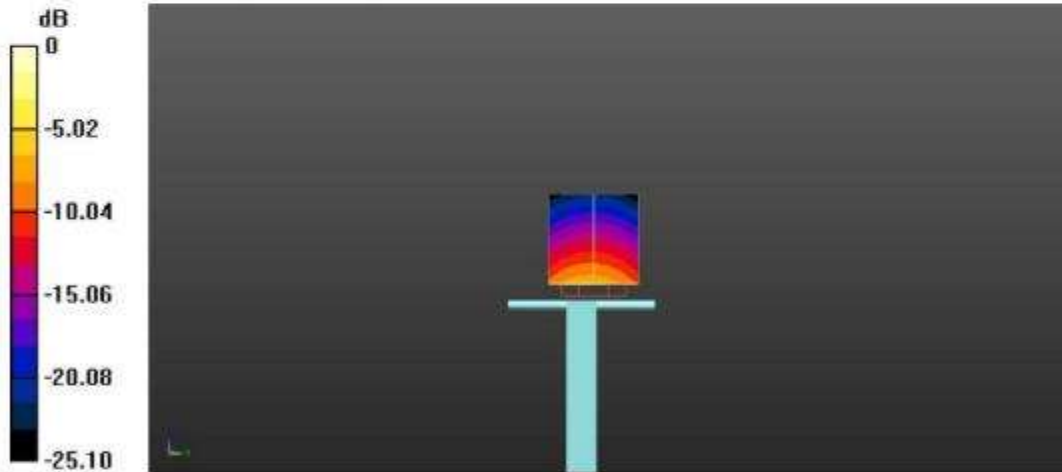

0 dB = 6.17 W/kg = 7.90 dBW/kg



4.6.2 Dipole 2600 MHz Validation Measurement for Body Tissue

Dipole 2600 MHz; Type: D2600V2; Serial: D835V2-SN: 1095

Date/Time: 10/24/2015

Communication System Band: D2600 (2600.0 MHz); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2600$ MHz; $\sigma = 2.20$ S/m; $\epsilon_r = 50.81$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 21.5 Liquid Temperature: 20.6

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(7.11, 7.11, 7.11);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454;
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Dipole validation measurement for Body Tissue/Pin= 100mW ,d=10mm /Zoom


Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 52.33 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 12.3 W/kg

SAR(1 g) = 5.58 W/kg; SAR(10 g) = 2.42 W/kg

Maximum value of SAR (measured) = 6.45 W/kg

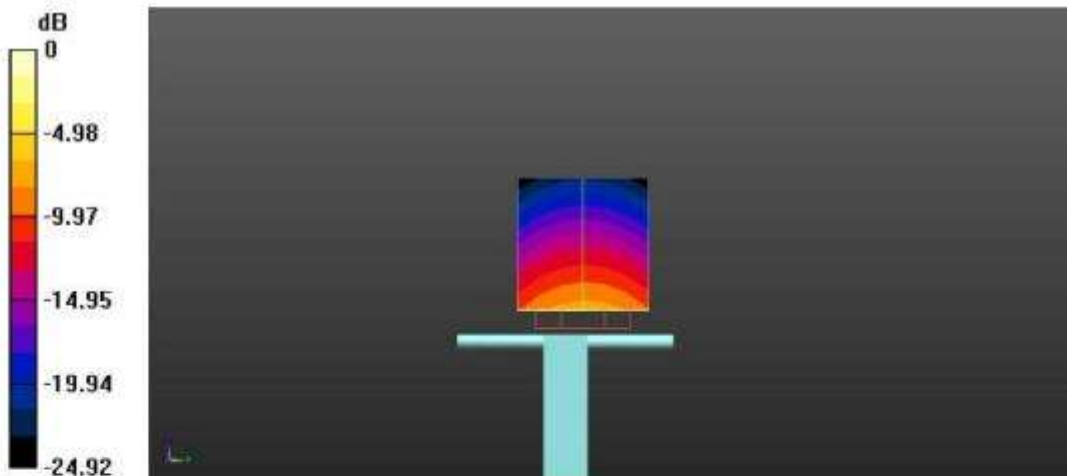

0 dB = 6.45 W/kg = 8.10 dBW/kg



4.7 D5GHzV2

4.7.1 Dipole 5 GHz Validation Measurement for Head Tissue

Dipole 5GHz; Type: D5GHzV2; Serial: D5GHzV2-SN: 1200

Date/Time: 10/26/2015

Communication System Band: D5GHz (5000.0 - 6000.0 MHz);

Frequency: 5200 MHz,

Frequency: 5600 MHz,

Frequency: 5800 MHz;

Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.78$ S/m; $\epsilon_r = 36.52$; $\rho = 1000$ kg/m³ , Medium

parameters used: $f = 5600$ MHz; $\sigma = 5.20$ S/m; $\epsilon_r = 35.06$; $\rho = 1000$ kg/m³ , Medium parameters

used: $f = 5800$ MHz; $\sigma = 5.42$ S/m; $\epsilon_r = 34.40$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.0 Liquid Temperature:20.3

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(5.33, 5.33, 5.33); ConvF(4.70, 4.70, 4.70); ConvF(4.68, 4.68, 4.68);
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454;
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)


Dipole validation measurement for Head Tissue/Pin= 100mW ,dist=10mm,f=5200 MHz /Zoom Scan (7x7x21)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 45.80 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 25.9 W/kg

SAR(1 g) = 8.22 W/kg; SAR(10 g) = 2.24 W/kg

Maximum value of SAR (measured) = 9.71 W/kg

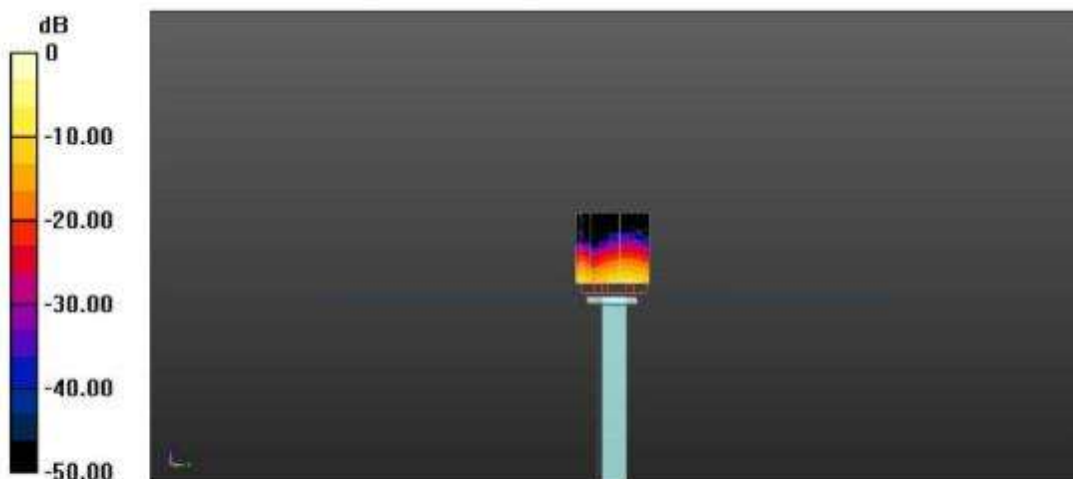

0 dB = 9.71 W/kg = 9.87 dBW/kg


**Dipole validation measurement for Head Tissue/Pin= 100mW ,dist=10mm,f=5600****MHz /Zoom Scan (7x7x21)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 44.02 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 28.3 W/kg

SAR(1 g) = 8.24 W/kg; SAR(10 g) = 2.29 W/kg

Maximum value of SAR (measured) = 9.45 W/kg

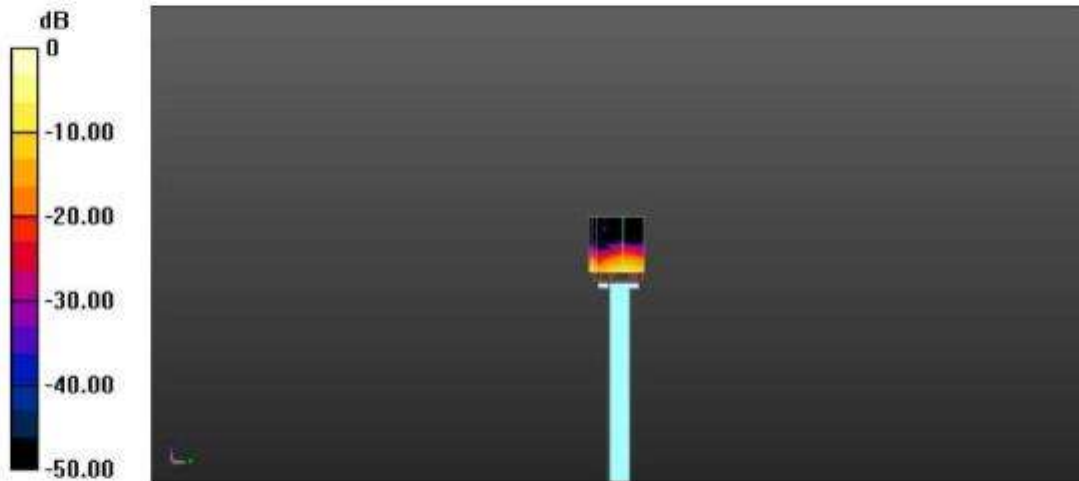

0 dB = 9.45 W/kg = 9.75 dBW/kg

Dipole Calibration for Head Tissue/Pin= 100mW ,dist=10mm,f=5800 MHz /Zoom**Scan (7x7x21)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 39.70 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 24.4 W/kg

SAR(1 g) = 7.28 W/kg; SAR(10 g) = 2.12 W/kg

Maximum value of SAR (measured) = 8.38 W/kg



0 dB = 8.79 W/kg = 9.44 dBW/kg



4.7.2 Dipole 5 GHz Validation Measurement for Body Tissue

Dipole 5GHz; Type: D5GHzV2; Serial: D5GHzV2-SN: 1200

Date/Time: 10/26/2015

Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5200 MHz; Frequency: 5600 MHz; Frequency: 5800 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.38$ S/m; $\epsilon_r = 48.74$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5600$ MHz; $\sigma = 5.72$ S/m; $\epsilon_r = 46.31$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5800$ MHz; $\sigma = 5.92$ S/m; $\epsilon_r = 46.06$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.3 Liquid Temperature:21.4

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(4.56, 4.56, 4.56);ConvF(3.98, 3.98, 3.98); ConvF(4.15, 4.15, 4.15);
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454;
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Dipole validation measurement for Body Tissue/Pin= 100mW ,dist=10mm,f=5200

MHz /Zoom Scan (7x7x21)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 45.58 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 26.9 W/kg

SAR(1 g) = 8.32 W/kg; SAR(10 g) = 2.28 W/kg

Maximum value of SAR (measured) = 9.86 W/kg



0 dB = 9.86 W/kg = 9.94 dBW/kg



Dipole validation measurement for Body Tissue/Pin= 100mW , dist=10mm,f=5600 MHz /Zoom Scan (7x7x21)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 47.14 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 35.1 W/kg

SAR(1 g) = 8.41 W/kg; SAR(10 g) = 2.33 W/kg

Maximum value of SAR (measured) = 10.3 W/kg



0 dB = 10.3 W/kg = 9.90 dBW/kg

Dipole validation measurement for Body Tissue/Pin= 100mW , dist=10mm,f=5800 MHz /Zoom Scan (7x7x21)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 41.88 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 28.9 W/kg

SAR(1 g) = 8.24 W/kg; SAR(10 g) = 2.3 W/kg

Maximum value of SAR (measured) = 9.33 W/kg

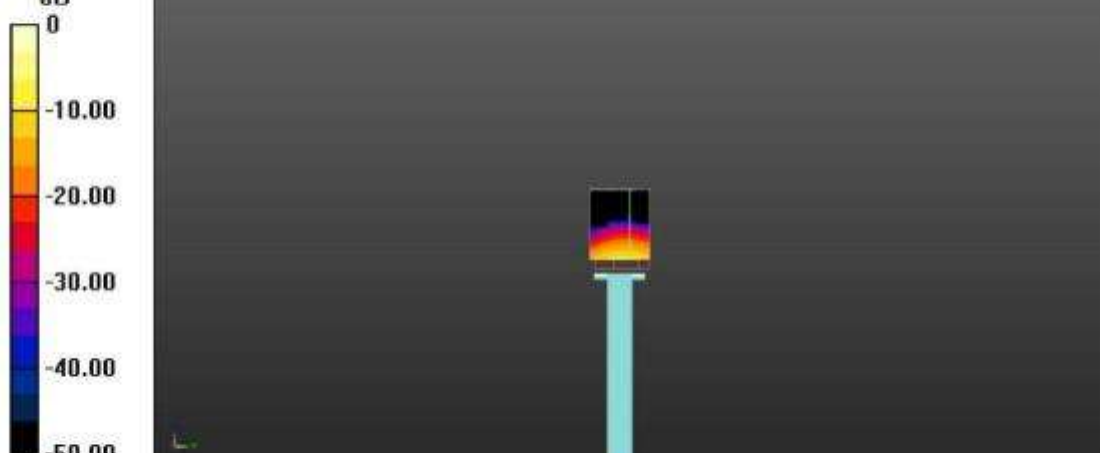

0 dB = 9.33 W/kg = 9.70 dBW/kg

--END OF REPORT--

--END OF REPORT--