



FCC RF Test Report

APPLICANT : Lenovo(Shanghai) Electronics Technology Co., Ltd.
EQUIPMENT : Portable Tablet Computer
BRAND NAME : Lenovo
MODEL NAME : TB570FU
FCC ID : O57TB570FU
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Nov. 03, 2022 ~ Nov. 23, 2022

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant 5

 1.2 Manufacturer 5

 1.3 Product Feature of Equipment Under Test..... 5

 1.4 Product Specification of Equipment Under Test..... 6

 1.5 Modification of EUT 6

 1.6 Testing Location 7

 1.7 Test Software..... 7

 1.8 Applicable Standards..... 7

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 8

 2.1 Carrier Frequency and Channel 8

 2.2 Test Mode..... 9

 2.3 Connection Diagram of Test System..... 9

 2.4 Support Unit used in test configuration and system 10

 2.5 EUT Operation Test Setup 10

 2.6 Measurement Results Explanation Example..... 11

3 TEST RESULT 12

 3.1 6dB and 99% Bandwidth Measurement 12

 3.2 Output Power Measurement..... 13

 3.3 Power Spectral Density Measurement 14

 3.4 Conducted Band Edges and Spurious Emission Measurement 16

 3.5 Radiated Band Edges and Spurious Emission Measurement 17

 3.6 AC Conducted Emission Measurement..... 21

 3.7 Antenna Requirements 23

4 LIST OF MEASURING EQUIPMENT 24

5 UNCERTAINTY OF EVALUATION 25

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. AC CONDUCTED EMISSION TEST RESULT

APPENDIX C. RADIATED SPURIOUS EMISSION

APPENDIX D. DUTY CYCLE PLOTS

APPENDIX E. SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	≥ 0.5MHz	Pass	-
3.1	-	99% Bandwidth	-	Report Only	-
3.2	15.247(b)	Power Output Measurement	≤ 30dBm	Pass	-
3.3	15.247(e)	Power Spectral Density	≤ 8dBm/3kHz	Pass	-
3.4	15.247(d)	Conducted Band Edges	≤ 20dBc	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.16 dB at 2484.88 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 6.07 dB at 0.162 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Declaration of Conformity:
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits.
Comments and Explanations:
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Lenovo(Shanghai) Electronics Technology Co., Ltd.

Section 304-305, Building No. 4, # 222, Meiyue Road, China (Shanghai) Pilot Free Trade Zone

1.2 Manufacturer

Lenovo PC HK Limited

23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay, Hong Kong, China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Portable Tablet Computer
Brand Name	Lenovo
Model Name	TB570FU
FCC ID	O57TB570FU
SN	Conducted: HA192AC0035 Conduction: HA1R5MJ7 Radiation: HA1R78HK
HW Version	TB570FU
SW Version	TB570FU_RF01_20221124
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to antenna	<MIMO Ant. 4b + Ant. 5b > 802.11b : 25.28 dBm (0.3373 W) 802.11g : 28.97 dBm (0.7889 W) 802.11n HT20 : 27.80 dBm (0.6026 W) 802.11n HT40 : 28.37 dBm (0.6871 W) 802.11ax HE20 : 29.01 dBm (0.7962 W) 802.11ax HE40 : 29.14 dBm (0.8204 W)
99% Occupied Bandwidth	802.11b : 12.79 MHz 802.11g : 17.38 MHz 802.11n HT20 : 18.54 MHz 802.11n HT40 : 37.32 MHz 802.11ax HE20 : 19.14 MHz 802.11ax HE40 : 37.96 MHz
Antenna Type / Gain	<Ant.4b>: FPC Antenna / -0.3 dBi <Ant.5b>: FPC Antenna / -0.4 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n: OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ax: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM)

Note:

1. For WLAN SISO & MIMO mode, the whole testing has assessed only MIMO mode by referring to the higher output power.
2. 802.11ax support OFDMA full RU tone and partial RU tone, both full RU and partial RU-left (for low CH) and partial RU-right (for high CH) test output Power/ PSD/RSE Bandedge, the other items only test full RU to cover partial RU due to the full RU Power/PSD > partial RU.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People’s Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-KS CO01-KS 03CH07-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH07-KS	AUDIX	E3	6.2009-8-24al
2.	CO01-KS	AUDIX	E3	6.2009-8-24

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C §15.247
- FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.


MIMO Antenna

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ax HE20	MCS0
802.11ax HE40	MCS0


Test Cases	
AC Conducted Emission	Mode 1 :Bluetooth Link + WLAN Link (2.4G) + USB Cable1(Charging from Adapter) + Earphone
Remark: For Radiated Test Cases, the tests were performance with Adapter and USB Cable 1.	

2.3 Connection Diagram of Test System

For AC Conducted Emission:

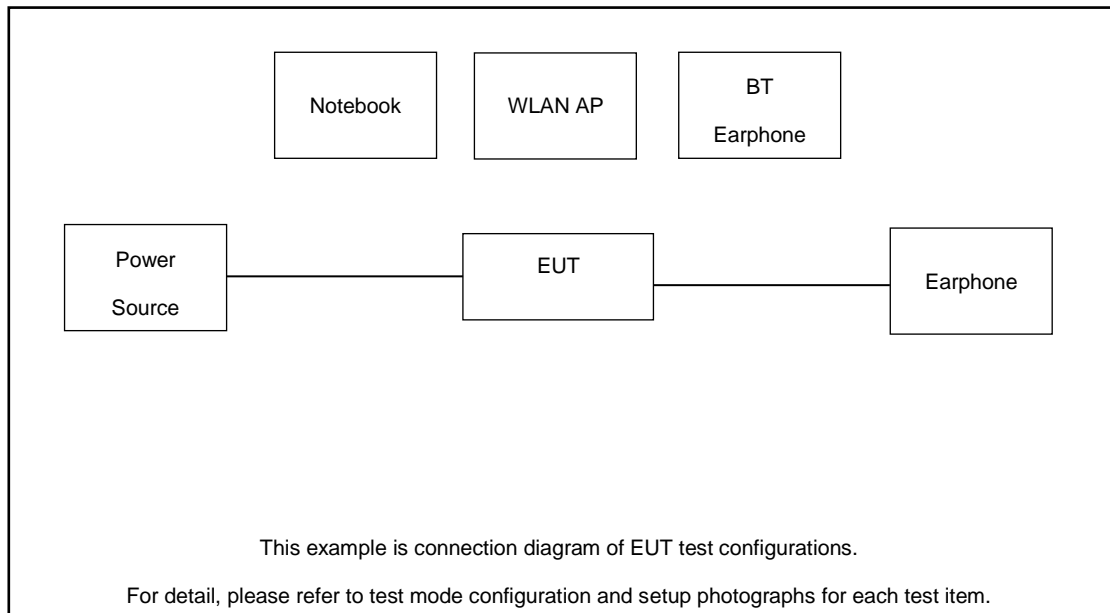

For Radiated Emission:

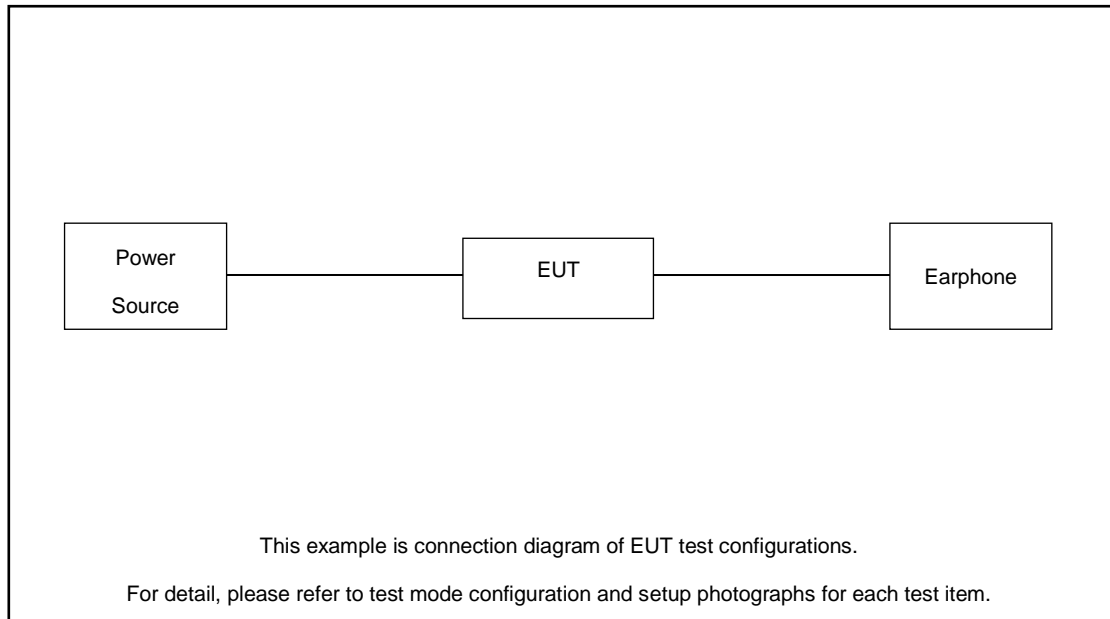

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A
2.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded, 1.8m
3.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
4.	Earphone	Lenovo	P121	N/A	N/A	Unshielded, 1.2m

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.



2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 2.95 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 2.95 + 10 = 12.95 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1%~5% of OBW and set the Video bandwidth (VBW) = 3MHz.
6. Measure and record the results in the test report.

3.1.4 Test Setup

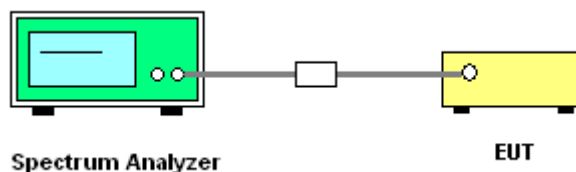

3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

3.2.4 Test Setup

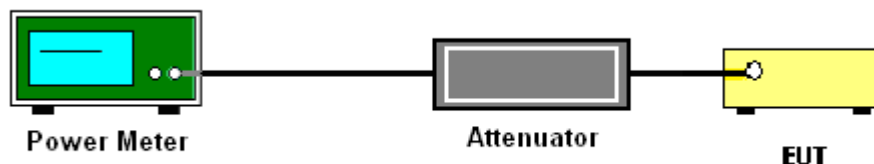

3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.


If measurements performed using method (2) plus $10 \log(N)$ exceeds the emission limit, the test should choose method (1) before declaring that the device fails the emission limit.

Method (1): Measure and sum the spectra across the outputs.

The total final Power Spectral Density is from a device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points, the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.

Method (2): Measure and add $10 \log(N)$ dB, where N is the number of outputs. (N=2)

3.3.4 Test Setup

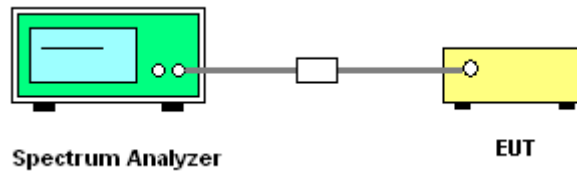

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup



3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Please refer to Appendix A.



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

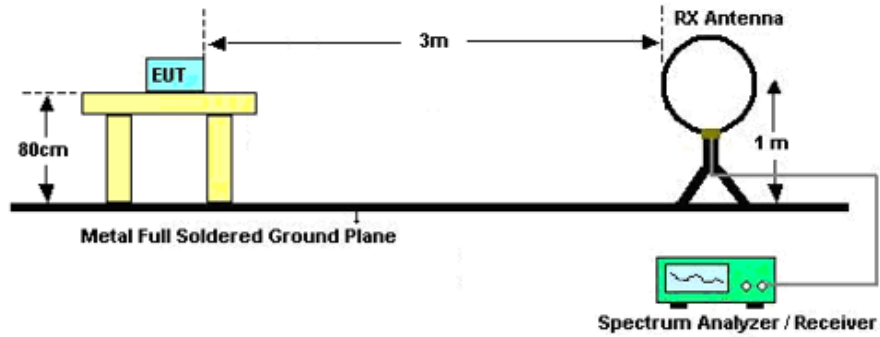

For radiated emissions from 30MHz to 1GHz

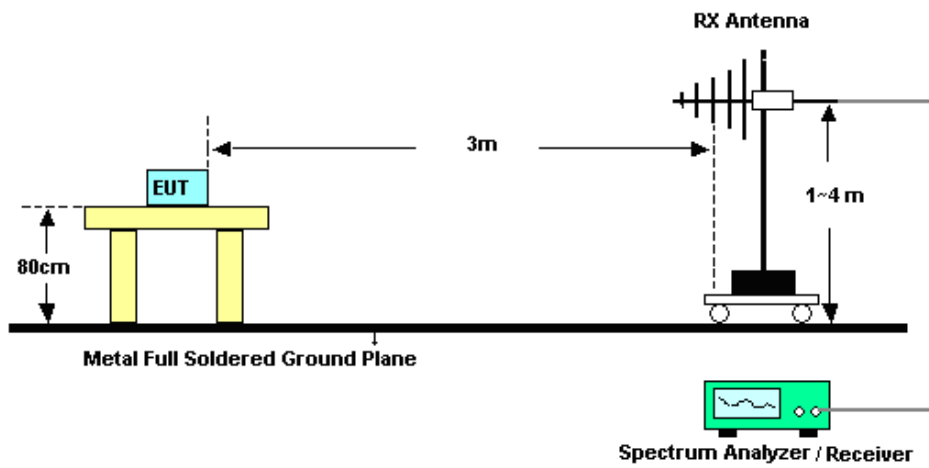

For radiated emissions above 1GHz

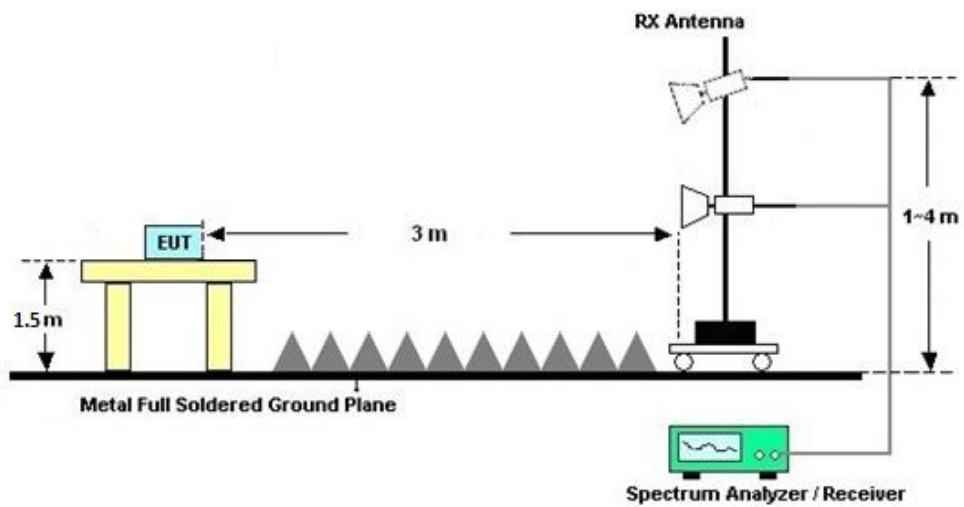



3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup

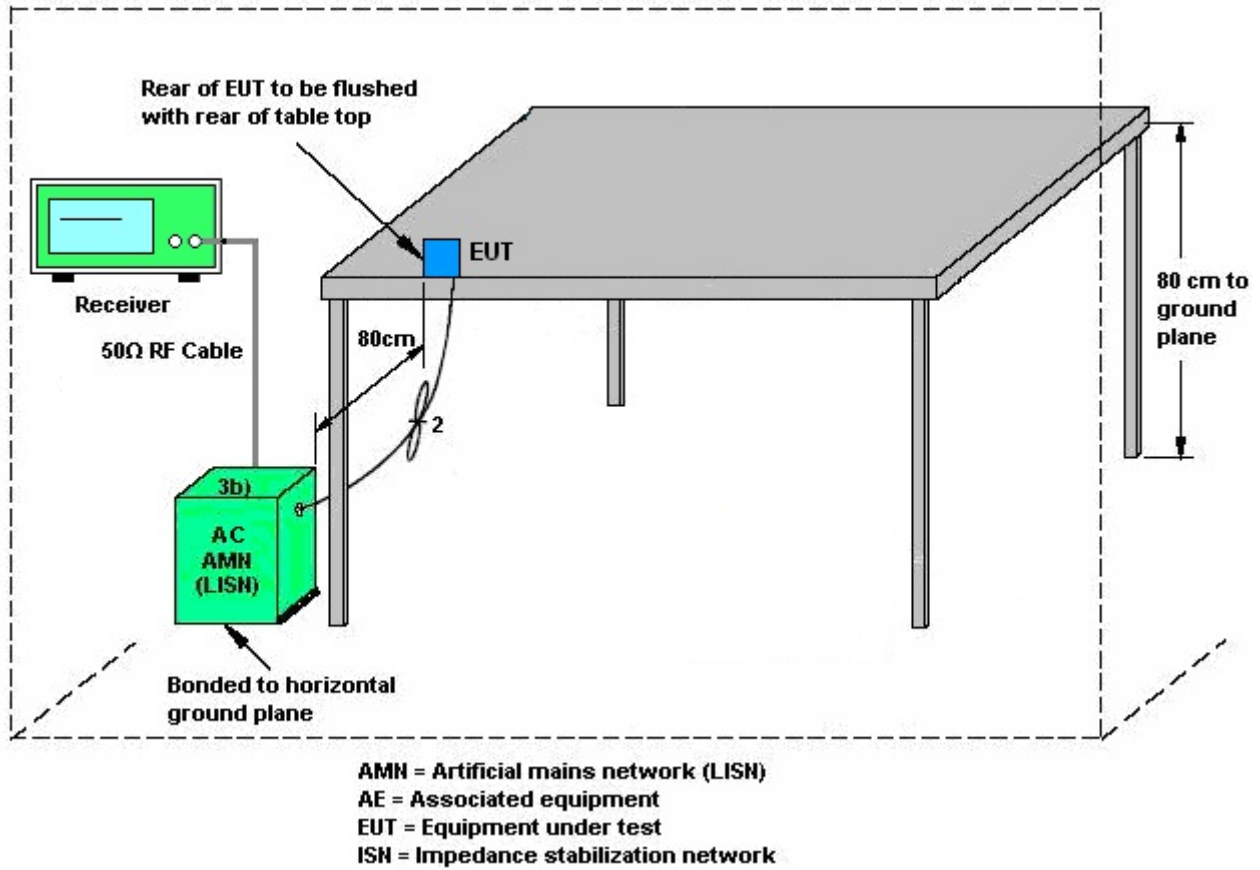

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

<CDD Modes >

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain = G_{ANT} + Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain = $10 \log(N_{ANT}/N_{SS}=1)$ dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$.

Directional gain may be calculated by using the formulas applicable to equal gain antennas with G_{ANT} set equal to the gain of the antenna having the highest gain;

The EUT supports CDD mode.

For power, the directional gain G_{ANT} is set equal to the antenna having the highest gain, i.e., F)2)f)i).

For PSD, the directional gain calculation is following F)2)f)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

<CDD Modes>						
			DG	DG	Power	PSD
	Ant. 4b	Ant. 5b	for	for	Limit	Limit
	(dBi)	(dBi)	Power	PSD	Reduction	Reduction
	(dBi)	(dBi)	(dBi)	(dBi)	(dB)	(dB)
2.4 GHz	-0.30	-0.40	-0.30	2.66	0.00	0.00

$Power\ Limit\ Reduction = DG(Power) - 6dBi, (min = 0)$

$PSD\ Limit\ Reduction = DG(PSD) - 6dBi, (min = 0)$



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 12, 2022	Nov. 06, 2022~ Nov. 23, 2022	Oct. 11, 2023	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 05, 2022	Nov. 06, 2022~ Nov. 23, 2022	Jan. 04, 2023	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 05, 2022	Nov. 06, 2022~ Nov. 23, 2022	Jan. 04, 2023	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz;Max x 30dBm	Oct. 12, 2022	Nov. 03, 2022~ Nov. 23, 2022	Oct. 11, 2023	Radiation (03CH07-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55370528	10Hz-44G,MAX 30dB	Oct. 12, 2022	Nov. 03, 2022~ Nov. 23, 2022	Oct. 11, 2023	Radiation (03CH07-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 16, 2022	Nov. 03, 2022~ Nov. 23, 2022	Oct. 15, 2023	Radiation (03CH07-KS)
Bilog Antenna	TeseQ	CBL6111D	59913	30MHz-1GHz	Aug. 26, 2022	Nov. 03, 2022~ Nov. 23, 2022	Aug. 25, 2023	Radiation (03CH07-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 06, 2022	Nov. 03, 2022~ Nov. 23, 2022	Apr. 05, 2023	Radiation (03CH07-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 05, 2022	Nov. 03, 2022~ Nov. 23, 2022	Jan. 04, 2023	Radiation (03CH07-KS)
Amplifier	SONOMA	310N	413740	9KHz-1GHz	Jan. 05, 2022	Nov. 03, 2022~ Nov. 23, 2022	Jan. 04, 2023	Radiation (03CH07-KS)
Amplifier	EM	EM01G18GA	060834	1Ghz-18Ghz	Oct. 12, 2022	Nov. 03, 2022~ Nov. 23, 2022	Oct. 11, 2023	Radiation (03CH07-KS)
high gain Amplifier	EM	EM01G18GA	060840	1Ghz-18Ghz	Oct. 12, 2022	Nov. 03, 2022~ Nov. 23, 2022	Oct. 11, 2023	Radiation (03CH07-KS)
Amplifier	MITEQ	EM18G40GG A	060728	18~40GHz	Jan. 05, 2022	Nov. 03, 2022~ Nov. 23, 2022	Jan. 04, 2023	Radiation (03CH07-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Nov. 03, 2022~ Nov. 23, 2022	NCR	Radiation (03CH07-KS)
Turn Table	EM	EM 1000-T	N/A	0~360 degree	NCR	Nov. 03, 2022~ Nov. 23, 2022	NCR	Radiation (03CH07-KS)
Antenna Mast	EM	EM 1000-A	N/A	1 m~4 m	NCR	Nov. 03, 2022~ Nov. 23, 2022	NCR	Radiation (03CH07-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	May 24, 2022	Nov. 16, 2022	May 23, 2023	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 13, 2022	Nov. 16, 2022	Oct. 12, 2023	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	May 24, 2022	Nov. 16, 2022	May 23, 2023	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 12, 2022	Nov. 16, 2022	Oct. 11, 2023	Conduction (CO01-KS)

NCR: No Calibration Required



5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	±0.56 dB
Conducted Emissions	±0.92 dB
Occupied Channel Bandwidth	±0.03 %
Conducted Power Spectral Density	±0.54 dB

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.78dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

----- THE END -----



Appendix A. Conducted Test Results

Test Engineer:	Long Wu	Temperature:	0-40	°C
Test Date:	2022/11/6~2022/11/23	Relative Humidity:	51~54	%

TEST RESULTS DATA
Peak Output Power

2.4GHz Band																	
Mod.	Data Rate	RU Config	Ntx	CH.	Freq. (MHz)	Peak Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
						Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11b	1Mbps		2	1	2412	22.47	22.07	25.28	30.00		-0.30	24.98		36.00		Pass	
11b	1Mbps		2	6	2437	22.22	21.57	24.92	30.00		-0.30	24.62		36.00		Pass	
11b	1Mbps		2	11	2462	22.54	21.84	25.21	30.00		-0.30	24.91		36.00		Pass	
11g	6Mbps		2	1	2412	25.96	25.95	28.97	30.00		-0.30	28.67		36.00		Pass	
11g	6Mbps		2	6	2437	25.27	24.93	28.11	30.00		-0.30	27.81		36.00		Pass	
11g	6Mbps		2	11	2462	25.21	25.44	28.34	30.00		-0.30	28.04		36.00		Pass	
HT20	MCS0	-	2	1	2412	24.95	24.29	27.64	30.00		-0.30	27.34		36.00		Pass	
HT20	MCS0		2	6	2437	24.81	24.76	27.80	30.00		-0.30	27.50		36.00		Pass	
HT20	MCS0		2	10	2457	24.78	24.59	27.70	30.00		-0.30	27.40		36.00		Pass	
HT20	MCS0		2	11	2462	24.26	23.76	27.03	30.00		-0.30	26.73		36.00		Pass	
HT40	MCS0		2	3	2422	24.86	24.65	27.77	30.00		-0.30	27.47		36.00		Pass	
HT40	MCS0		2	6	2437	25.33	25.39	28.37	30.00		-0.30	28.07		36.00		Pass	
HT40	MCS0		2	9	2452	24.62	24.27	27.46	30.00		-0.30	27.16		36.00		Pass	
HE20	MCS0	FULL	2	1	2412	26.06	25.94	29.01	30.00		-0.30	28.71		36.00		Pass	
HE20	MCS0	26RU	2	1	2412	17.83	17.68	20.77	30.00		-0.30	20.47		36.00		Pass	
HE20	MCS0	52RU	2	1	2412	21.18	20.88	24.04	30.00		-0.30	23.74		36.00		Pass	
HE20	MCS0	106RU	2	1	2412	24.49	23.85	27.19	30.00		-0.30	26.89		36.00		Pass	
HE20	MCS0	FULL	2	6	2437	25.17	24.85	28.02	30.00		-0.30	27.72		36.00		Pass	
HE20	MCS0	26RU	2	6	2437	20.44	19.54	23.02	30.00		-0.30	22.72		36.00		Pass	
HE20	MCS0	52RU	2	6	2437	23.11	22.66	25.90	30.00		-0.30	25.60		36.00		Pass	
HE20	MCS0	106RU	2	6	2437	25.12	24.61	27.88	30.00		-0.30	27.58		36.00		Pass	
HE20	MCS0	FULL	2	10	2457	25.26	24.62	27.96	30.00		-0.30	27.66		36.00		Pass	
HE20	MCS0	FULL	2	11	2462	25.22	24.51	27.89	30.00		-0.30	27.59		36.00		Pass	
HE20	MCS0	26RU	2	11	2462	15.82	14.91	18.40	30.00		-0.30	18.10		36.00		Pass	
HE20	MCS0	52RU	2	11	2462	19.13	18.49	21.83	30.00		-0.30	21.53		36.00		Pass	
HE20	MCS0	106RU	2	11	2462	22.26	21.63	24.97	30.00		-0.30	24.67		36.00		Pass	
HE40	MCS0	FULL	2	3	2422	26.27	25.81	29.06	30.00		-0.30	28.76		36.00		Pass	
HE40	MCS0	FULL	2	6	2437	26.49	25.74	29.14	30.00		-0.30	28.84		36.00		Pass	
HE40	MCS0	FULL	2	8	2447	24.38	23.94	27.18	30.00		-0.30	26.88		36.00		Pass	
HE40	MCS0	FULL	2	9	2452	20.32	19.97	23.16	30.00		-0.30	22.86		36.00		Pass	

Note:

Ant. 1 = Ant.4b, Ant.2= Ant.5b

Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
Average Output Power

2.4GHz Band										
Mod.	Data Rate	RU Config	Ntx	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)		
						Ant 1	Ant 2	Ant 1	Ant 2	SUM
11b	1Mbps	-	2	1	2412	0.00	0.00	19.98	19.61	22.81
11b	1Mbps		2	6	2437	0.00	0.00	19.85	19.12	22.51
11b	1Mbps		2	11	2462	0.00	0.00	20.11	19.34	22.75
11g	6Mbps		2	1	2412	0.13	0.13	17.12	16.76	19.96
11g	6Mbps		2	6	2437	0.13	0.13	19.84	19.02	22.46
11g	6Mbps		2	11	2462	0.13	0.13	16.89	16.04	19.50
HT20	MCS0		2	1	2412	0.14	0.14	17.35	16.70	20.05
HT20	MCS0		2	6	2437	0.14	0.14	19.67	19.03	22.38
HT20	MCS0		2	10	2457	0.14	0.14	17.66	17.09	20.40
HT20	MCS0		2	11	2462	0.14	0.14	16.46	15.52	19.03
HT40	MCS0		2	3	2422	0.28	0.28	14.76	13.59	17.23
HT40	MCS0		2	6	2437	0.28	0.28	16.87	16.14	19.53
HT40	MCS0		2	9	2452	0.28	0.28	14.03	13.61	16.84
HE20	MCS0		FULL	2	1	2412	0.18	0.18	16.39	15.81
HE20	MCS0	26RU	2	1	2412	0.04	0.03	7.31	7.05	10.20
HE20	MCS0	52RU	2	1	2412	0.03	0.03	10.42	10.20	13.33
HE20	MCS0	106RU	2	1	2412	0.10	0.10	13.55	13.37	16.47
HE20	MCS0	FULL	2	6	2437	0.18	0.18	18.10	17.22	20.69
HE20	MCS0	26RU	2	6	2437	0.04	0.03	9.83	8.95	12.43
HE20	MCS0	52RU	2	6	2437	0.03	0.03	12.45	11.64	15.08
HE20	MCS0	106RU	2	6	2437	0.10	0.10	15.04	14.04	17.58
HE20	MCS0	FULL	2	10	2457	0.18	0.18	15.40	13.90	17.73
HE20	MCS0	FULL	2	11	2462	0.18	0.18	14.93	13.37	17.23
HE20	MCS0	26RU	2	11	2462	0.18	0.18	5.56	4.47	8.06
HE20	MCS0	52RU	2	11	2462	0.18	0.18	9.11	7.87	11.55
HE20	MCS0	106RU	2	11	2462	0.18	0.18	12.24	11.09	14.71
HE40	MCS0	FULL	2	3	2422	0.34	0.34	16.87	15.67	19.32
HE40	MCS0	FULL	2	6	2437	0.34	0.34	16.87	15.91	19.43
HE40	MCS0	FULL	2	8	2447	0.34	0.34	15.12	14.72	17.93
HE40	MCS0	FULL	2	9	2452	0.34	0.34	10.06	9.65	12.87

Note:
 Ant. 1 = Ant.4b, Ant.2= Ant.5b
 Measured power (dBm) has offset with cable loss.



6dB Bandwidth

Test Result


Test Mode	Antenna	Freq(MHz)	6dB BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B-CDD	Ant.4b	2412	8.04	2408.00	2416.04	0.5	PASS
	Ant.5b	2412	7.60	2407.96	2415.56	0.5	PASS
	Ant.4b	2437	7.08	2433.48	2440.56	0.5	PASS
	Ant.5b	2437	7.56	2433.00	2440.56	0.5	PASS
	Ant.4b	2462	7.56	2458.00	2465.56	0.5	PASS
	Ant.5b	2462	8.00	2458.00	2466.00	0.5	PASS
11G-CDD	Ant.4b	2412	16.04	2403.88	2419.92	0.5	PASS
	Ant.5b	2412	15.68	2403.88	2419.56	0.5	PASS
	Ant.4b	2437	16.28	2428.88	2445.16	0.5	PASS
	Ant.5b	2437	15.68	2429.48	2445.16	0.5	PASS
	Ant.4b	2462	16.08	2453.84	2469.92	0.5	PASS
	Ant.5b	2462	16.32	2453.84	2470.16	0.5	PASS
11N20CDD	Ant.4b	2412	16.76	2403.64	2420.40	0.5	PASS
	Ant.5b	2412	16.92	2403.24	2420.16	0.5	PASS
	Ant.4b	2437	16.24	2429.28	2445.52	0.5	PASS
	Ant.5b	2437	16.96	2428.84	2445.80	0.5	PASS
	Ant.4b	2457	16.32	2448.60	2464.92	0.5	PASS
	Ant.5b	2457	17.56	2448.24	2465.80	0.5	PASS
	Ant.4b	2462	15.72	2453.84	2469.56	0.5	PASS
	Ant.5b	2462	17.52	2453.24	2470.76	0.5	PASS
11N40CDD	Ant.4b	2422	35.20	2404.48	2439.68	0.5	PASS
	Ant.5b	2422	35.76	2403.84	2439.60	0.5	PASS
	Ant.4b	2437	35.44	2419.48	2454.92	0.5	PASS
	Ant.5b	2437	35.20	2419.40	2454.60	0.5	PASS
	Ant.4b	2452	35.12	2434.48	2469.60	0.5	PASS
	Ant.5b	2452	35.12	2434.48	2469.60	0.5	PASS



11AX20CDD	Ant.4b	2412	18.76	2402.60	2421.36	0.5	PASS
	Ant.5b	2412	16.44	2403.00	2419.44	0.5	PASS
	Ant.4b	2437	18.44	2427.72	2446.16	0.5	PASS
	Ant.5b	2437	18.24	2428.20	2446.44	0.5	PASS
	Ant.4b	2457	18.32	2447.92	2466.24	0.5	PASS
	Ant.5b	2457	18.20	2447.72	2465.92	0.5	PASS
	Ant.4b	2462	18.28	2452.88	2471.16	0.5	PASS
	Ant.5b	2462	18.72	2452.72	2471.44	0.5	PASS
11AX40CDD	Ant.4b	2422	37.60	2403.28	2440.88	0.5	PASS
	Ant.5b	2422	37.36	2403.04	2440.40	0.5	PASS
	Ant.4b	2437	37.28	2418.52	2455.80	0.5	PASS
	Ant.5b	2437	36.64	2418.20	2454.84	0.5	PASS
	Ant.4b	2447	36.08	2429.48	2465.56	0.5	PASS
	Ant.5b	2447	35.12	2429.48	2464.60	0.5	PASS
	Ant.4b	2452	36.32	2434.00	2470.32	0.5	PASS
	Ant.5b	2452	35.12	2434.48	2469.60	0.5	PASS




Test Graphs

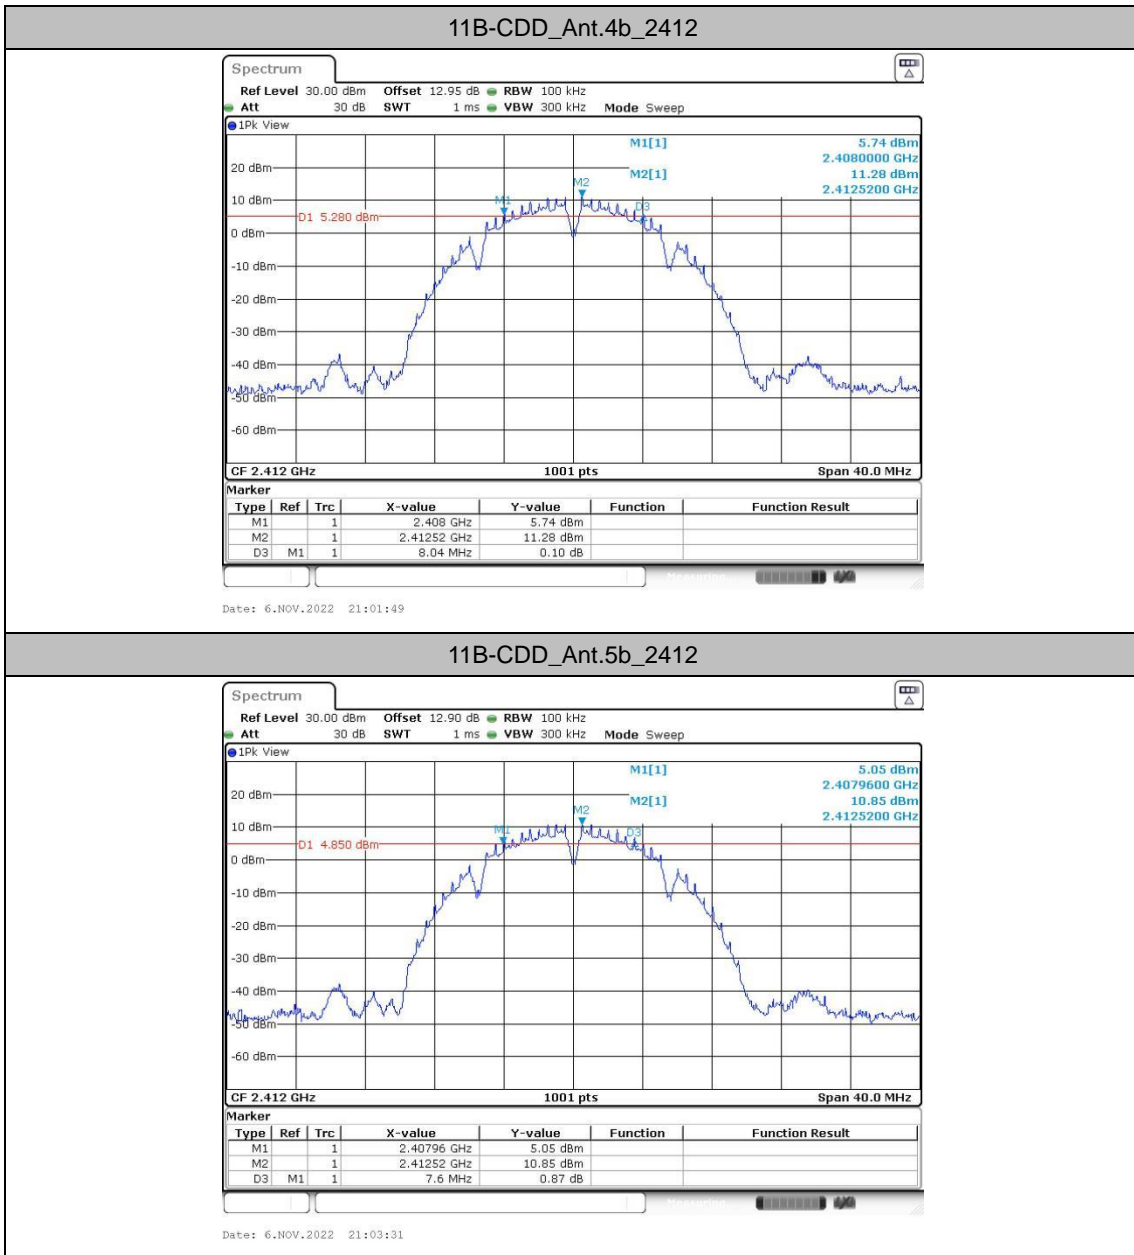




11B-CDD_Ant.4b_2437

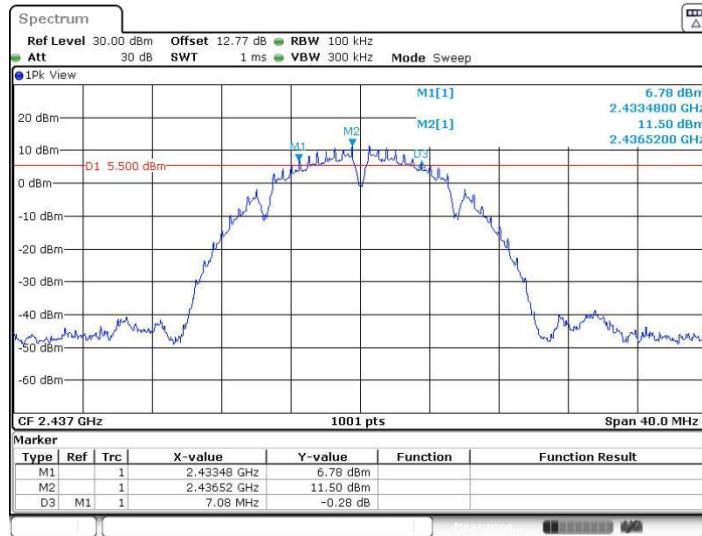



Date: 6.NOV.2022 21:05:31


11B-CDD_Ant.5b_2437

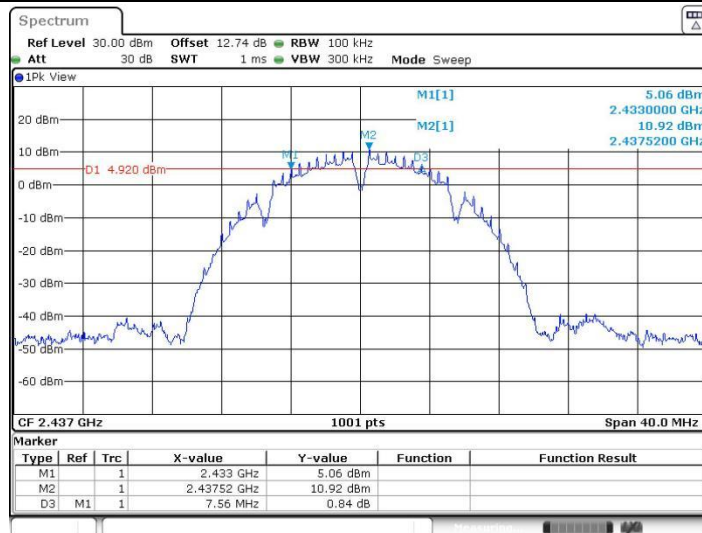



Date: 6.NOV.2022 21:07:00

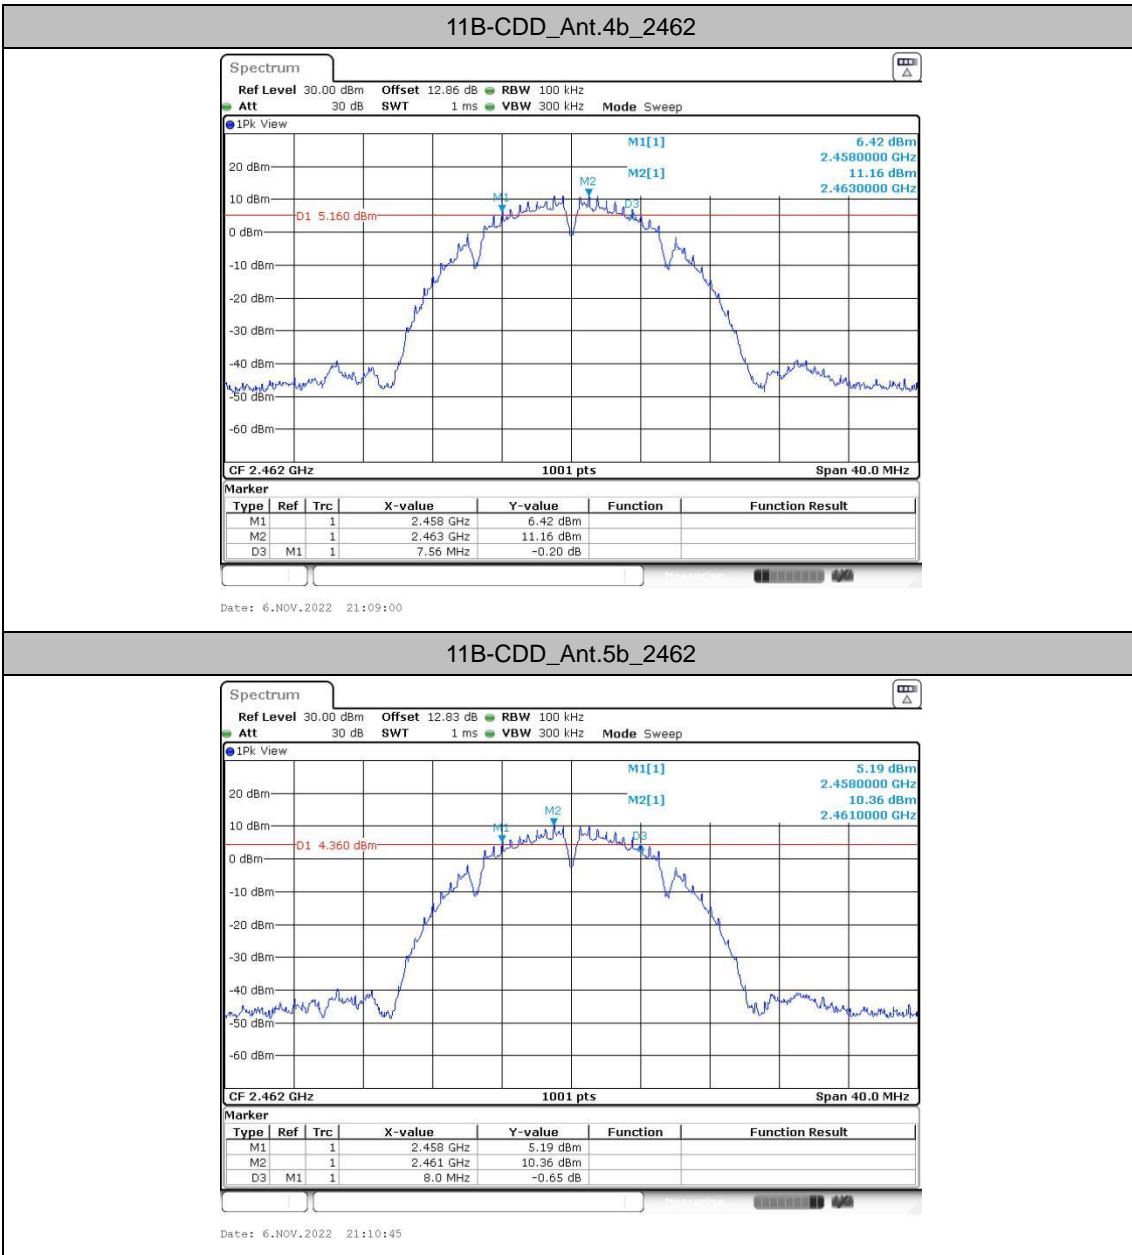


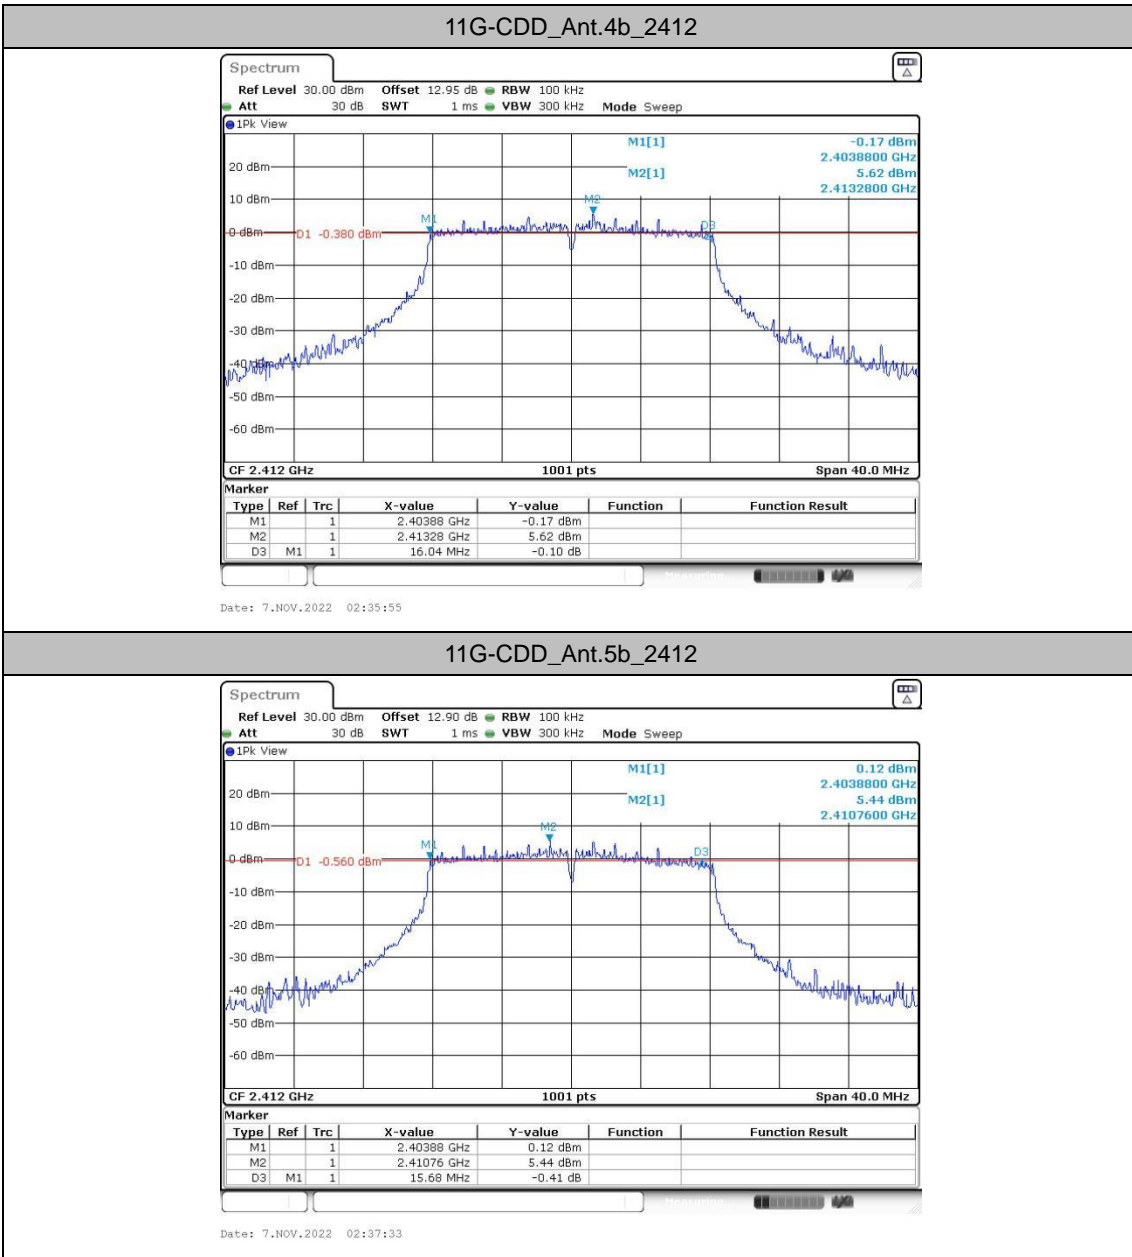


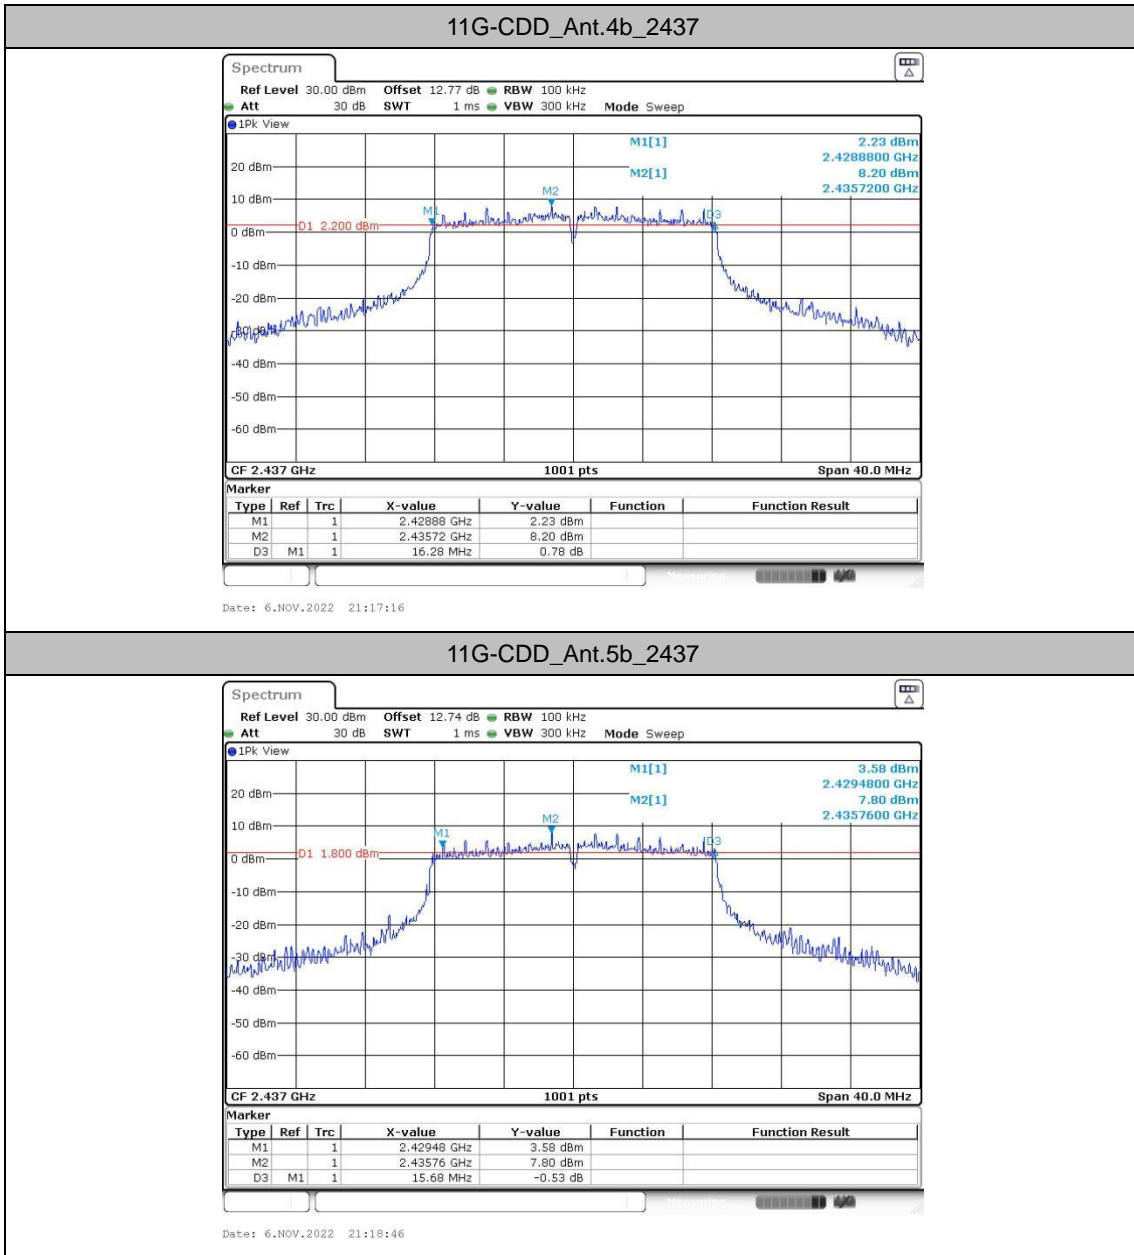


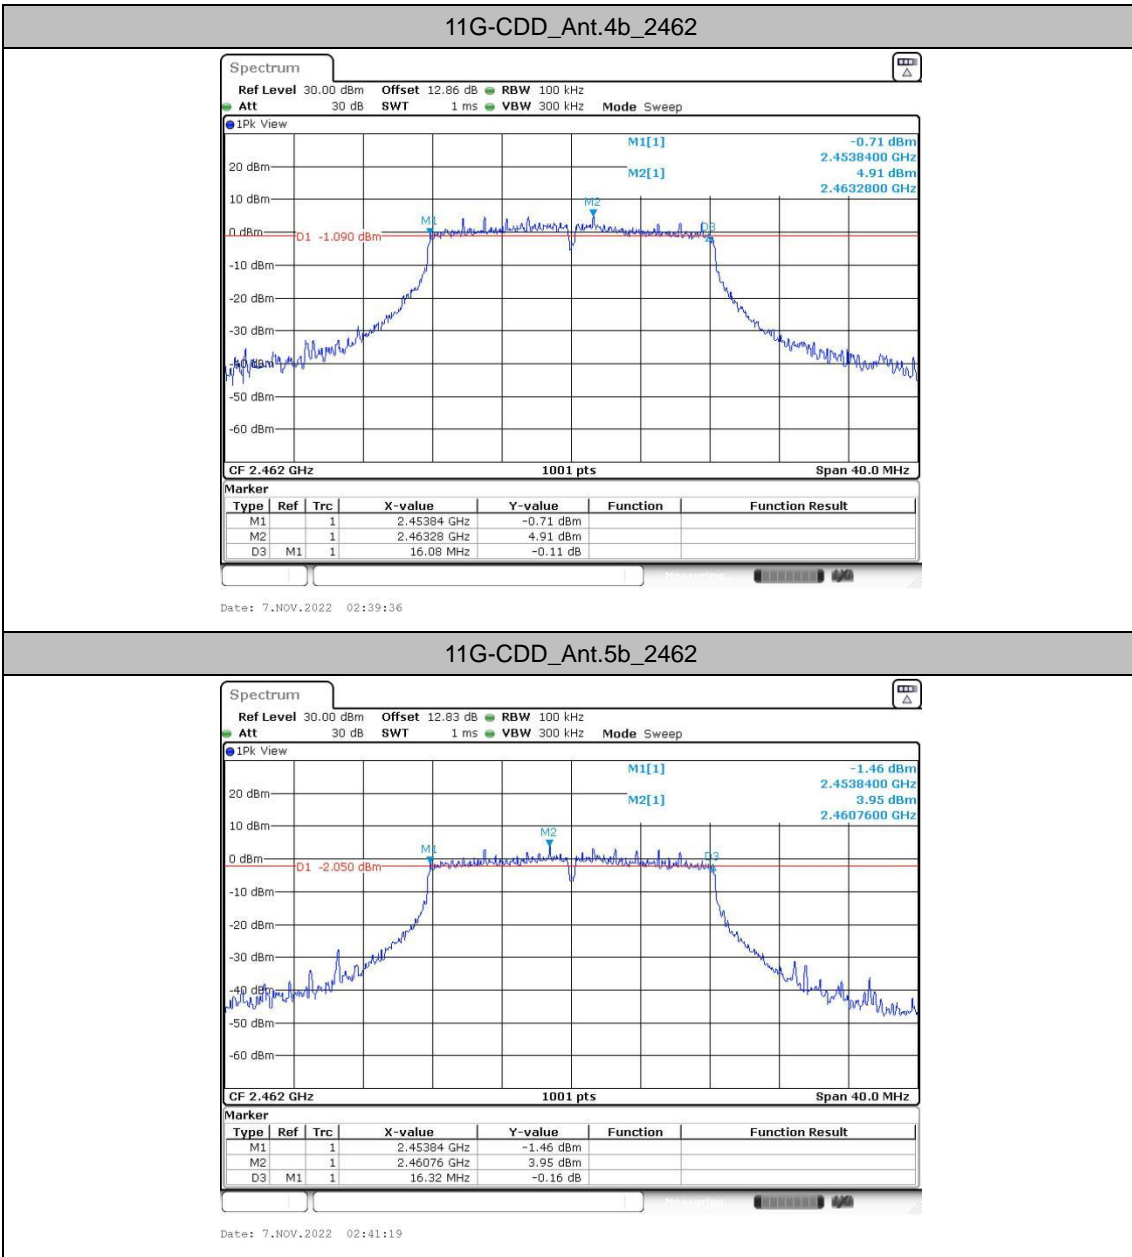


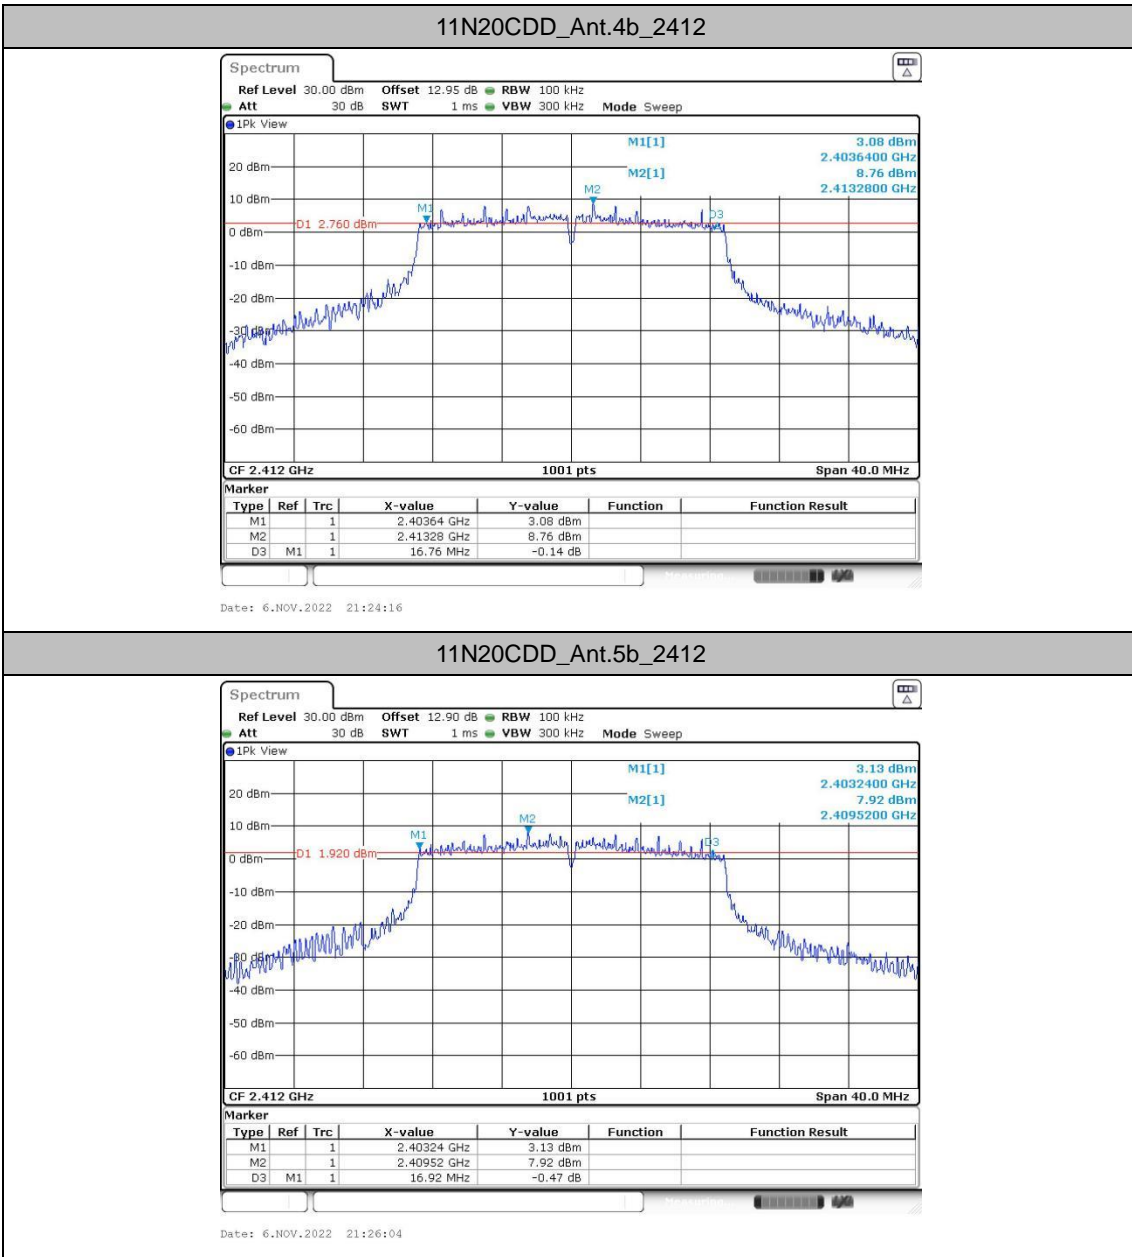


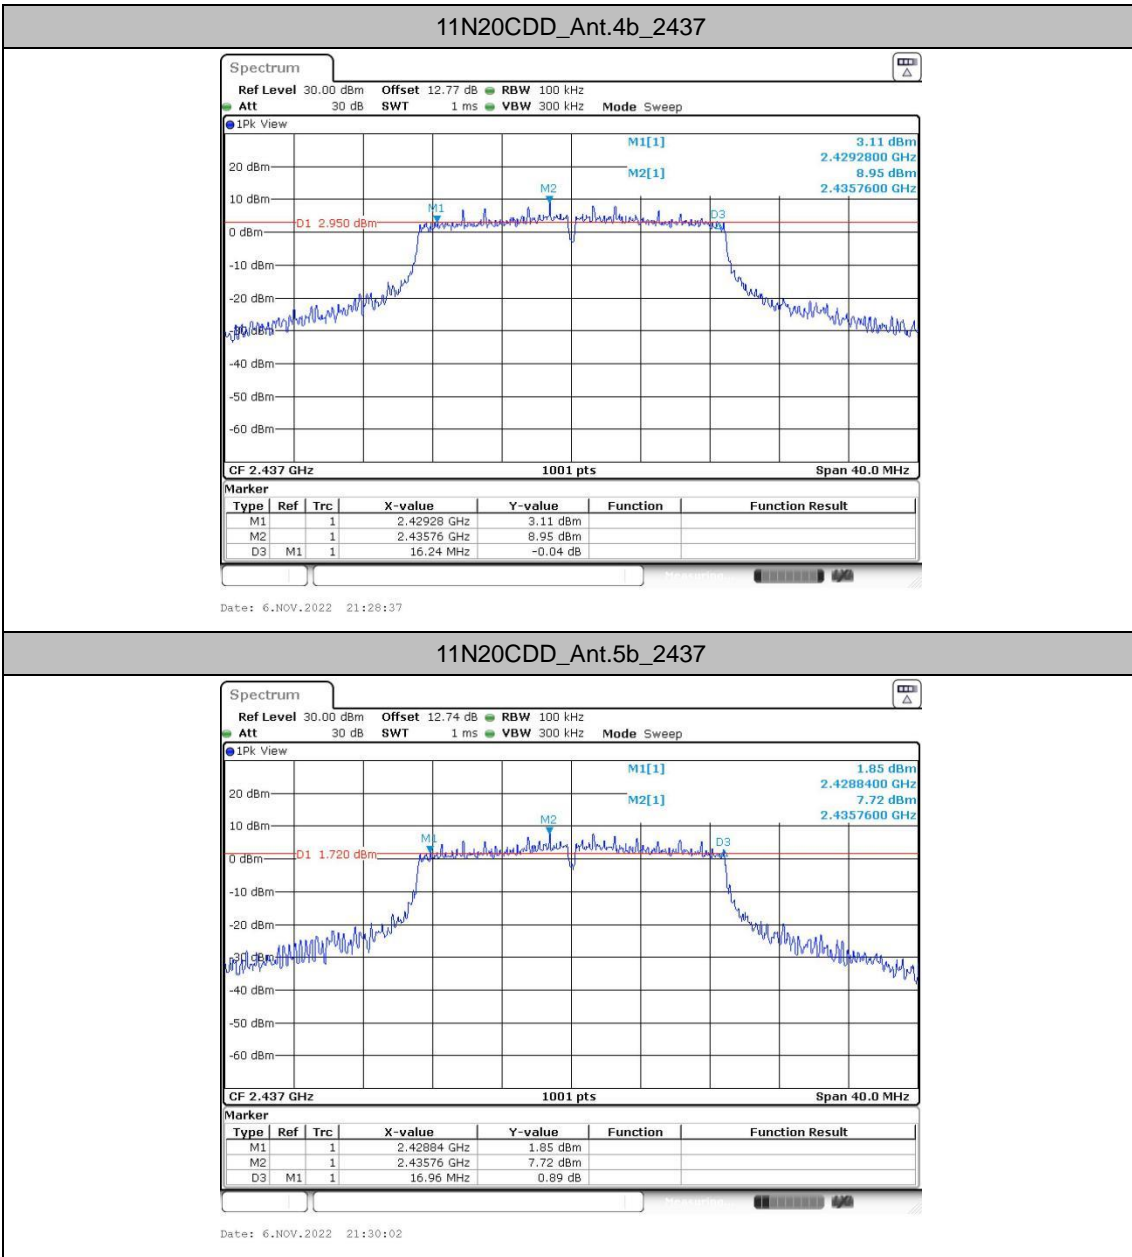


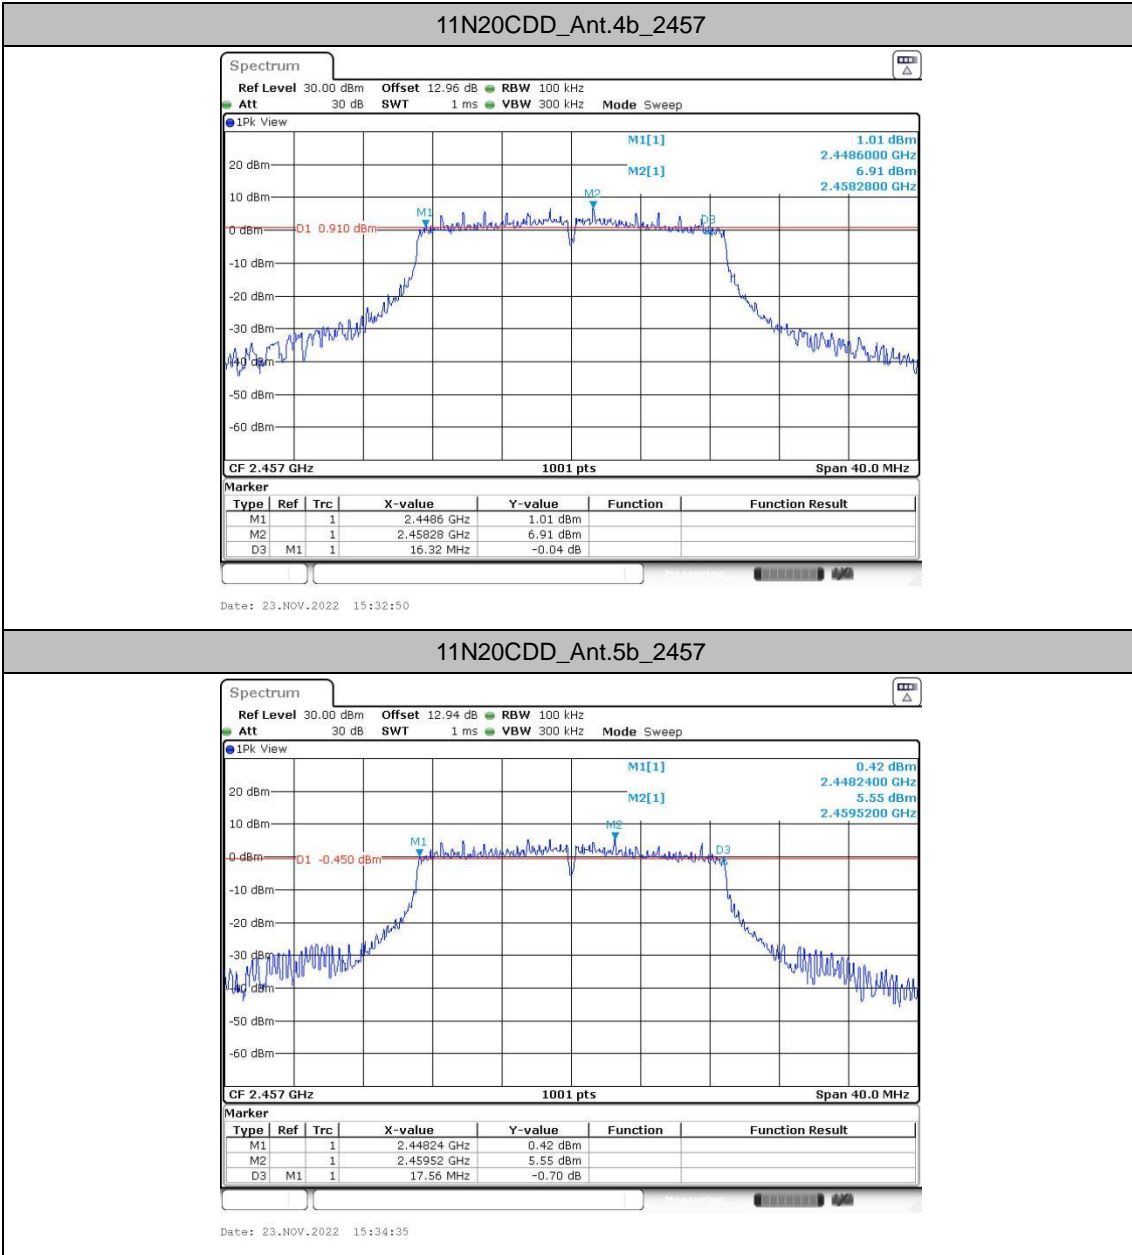


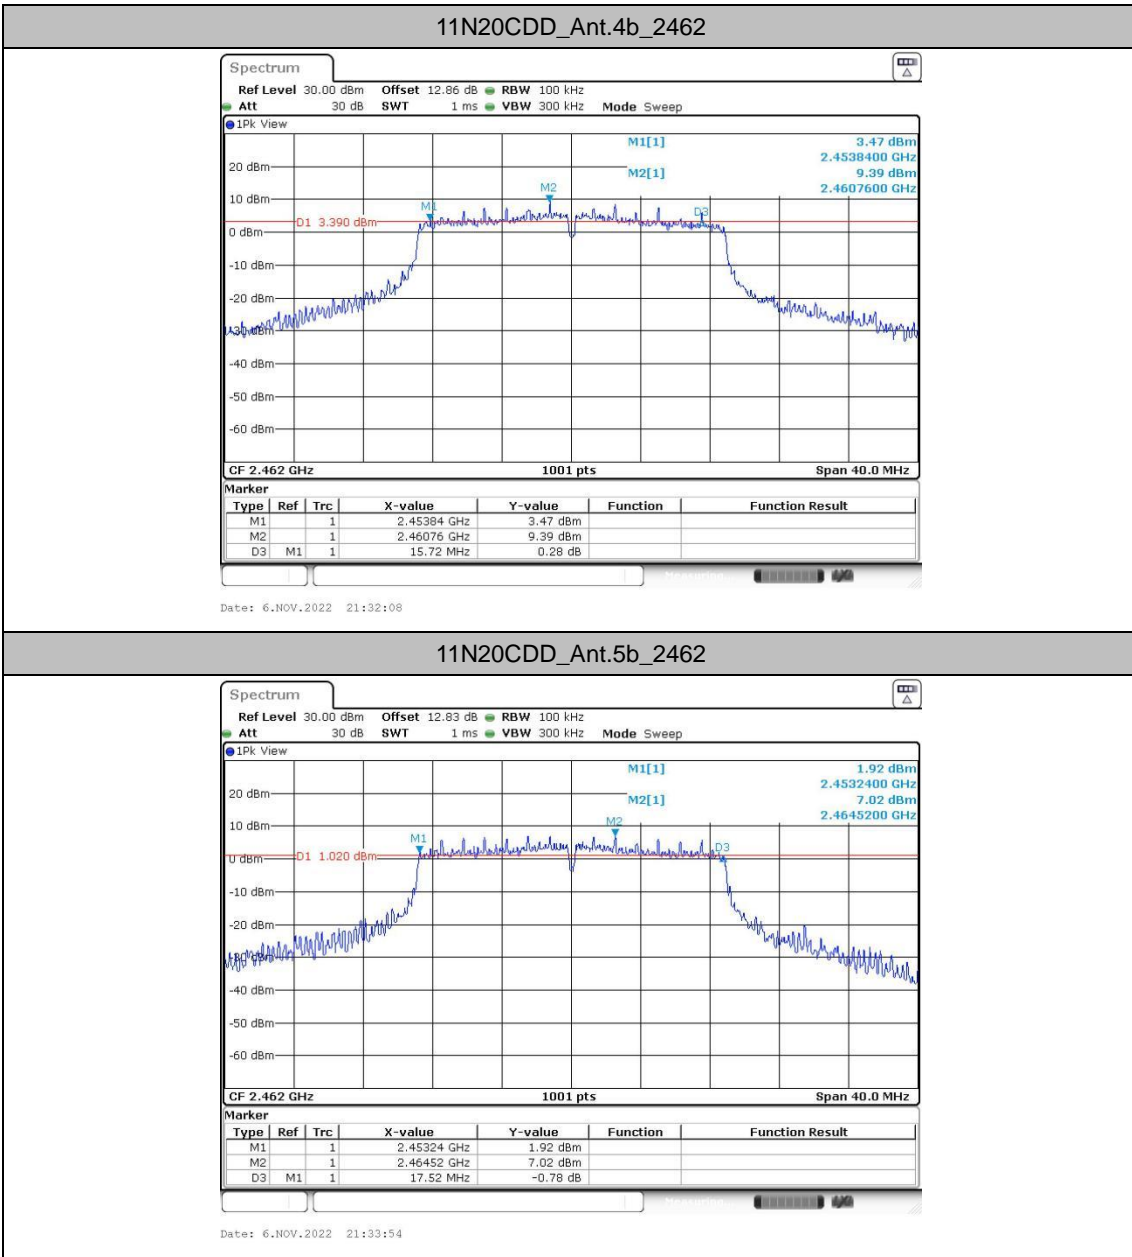


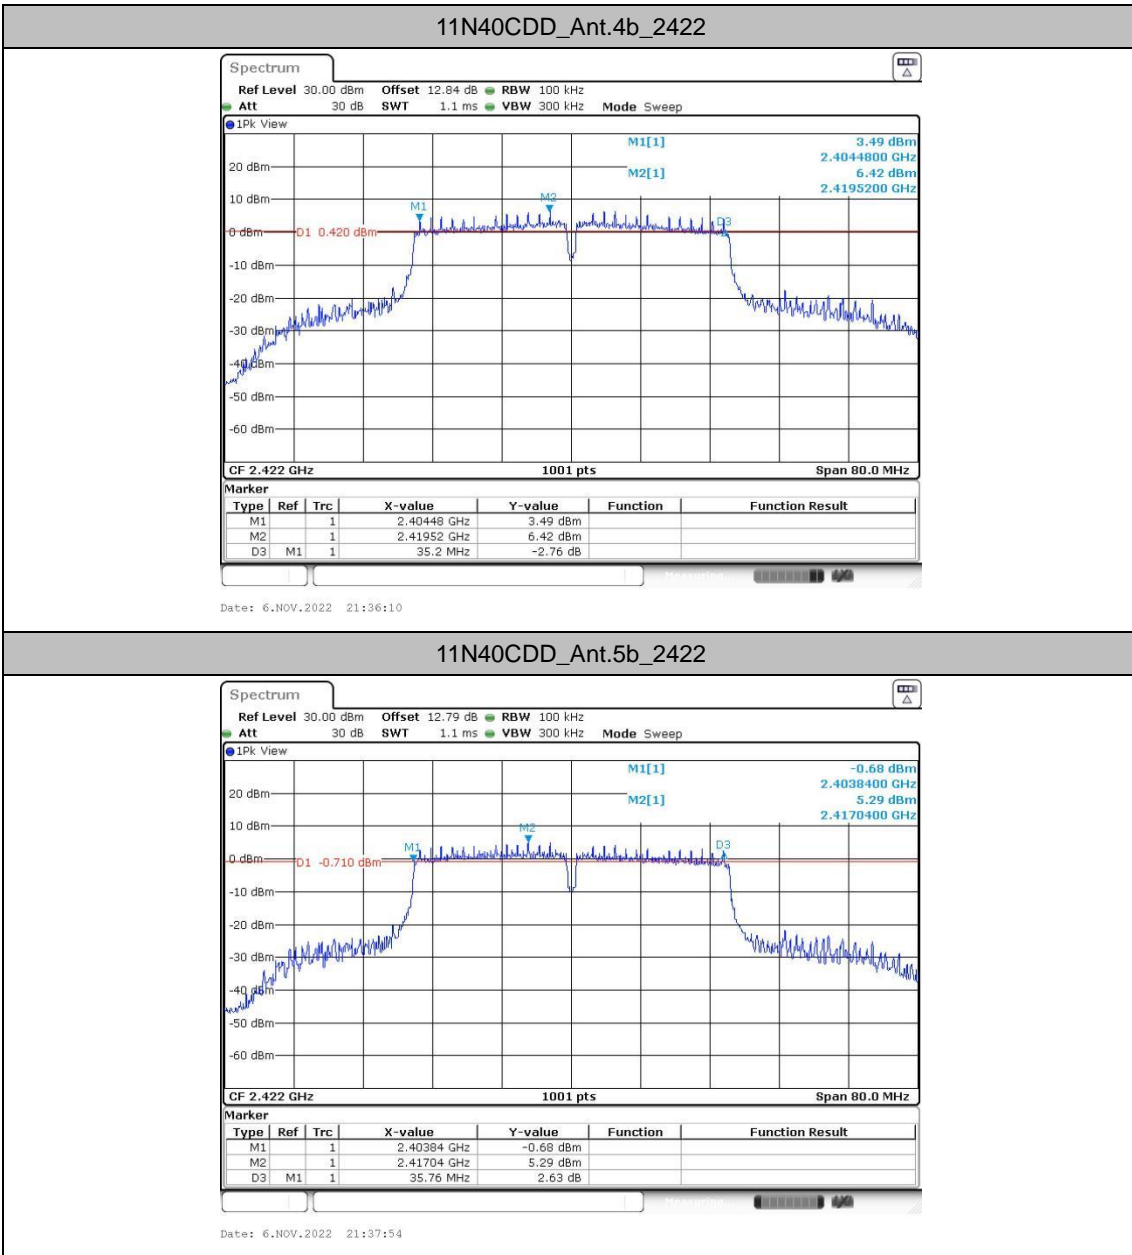


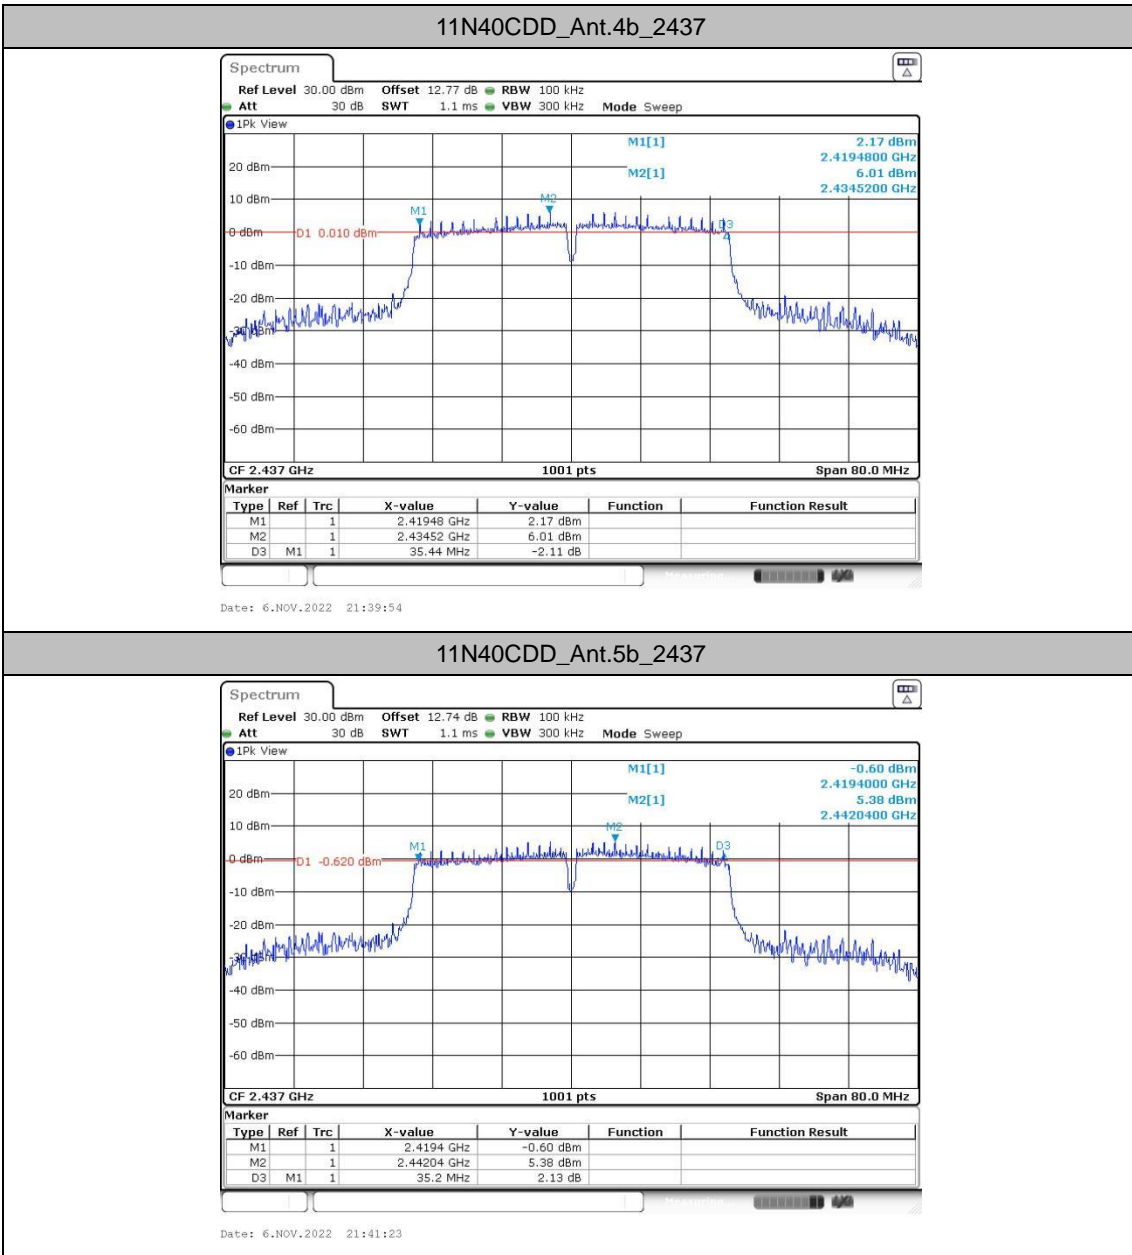


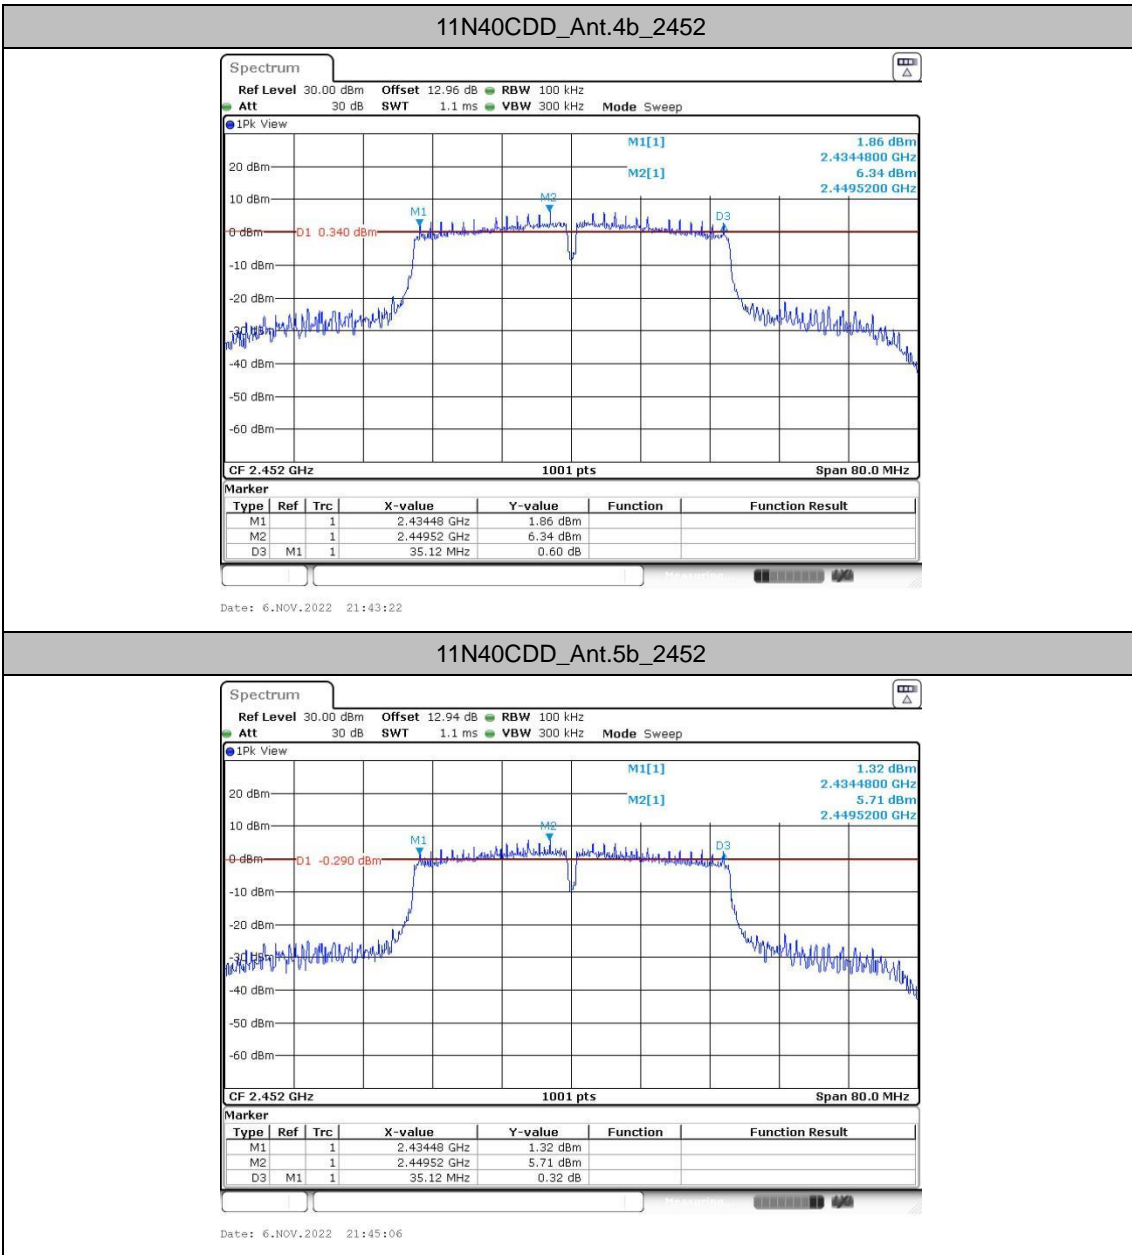


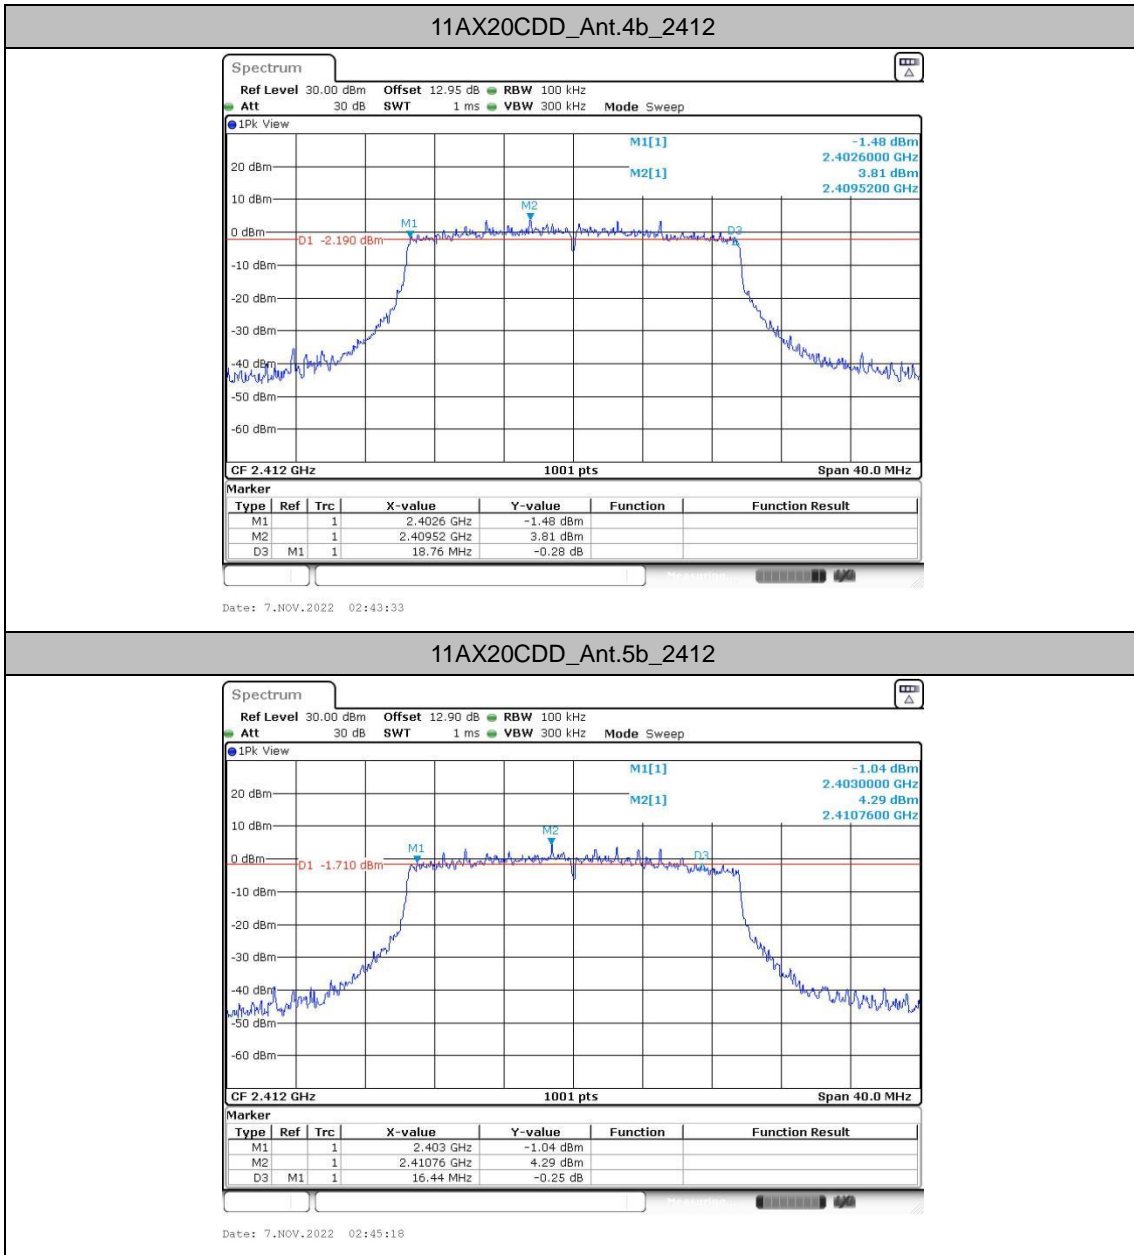


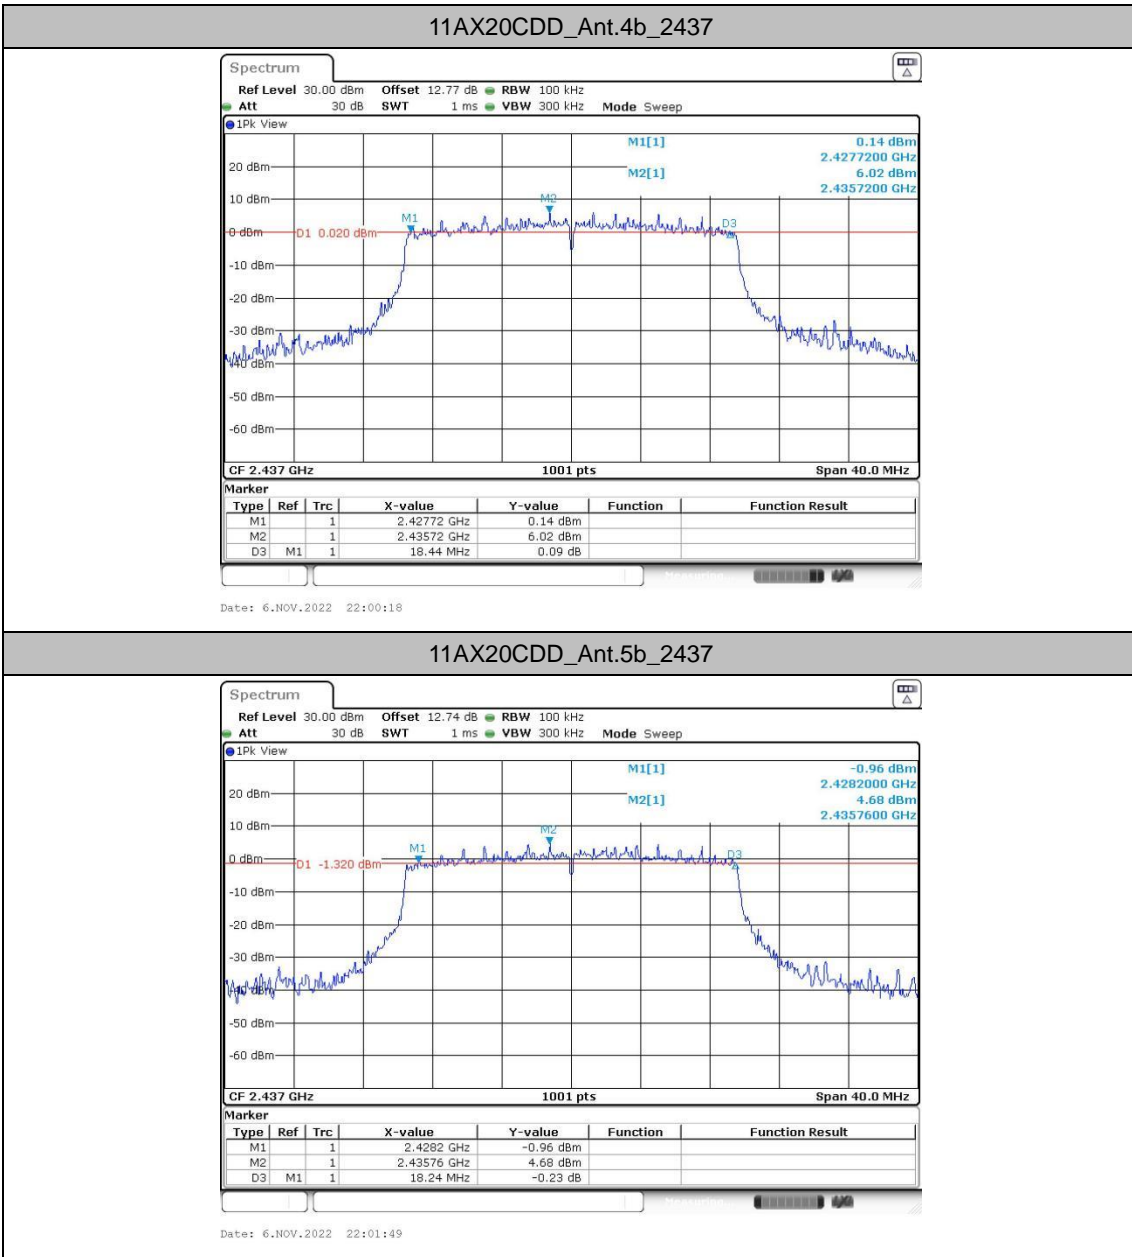


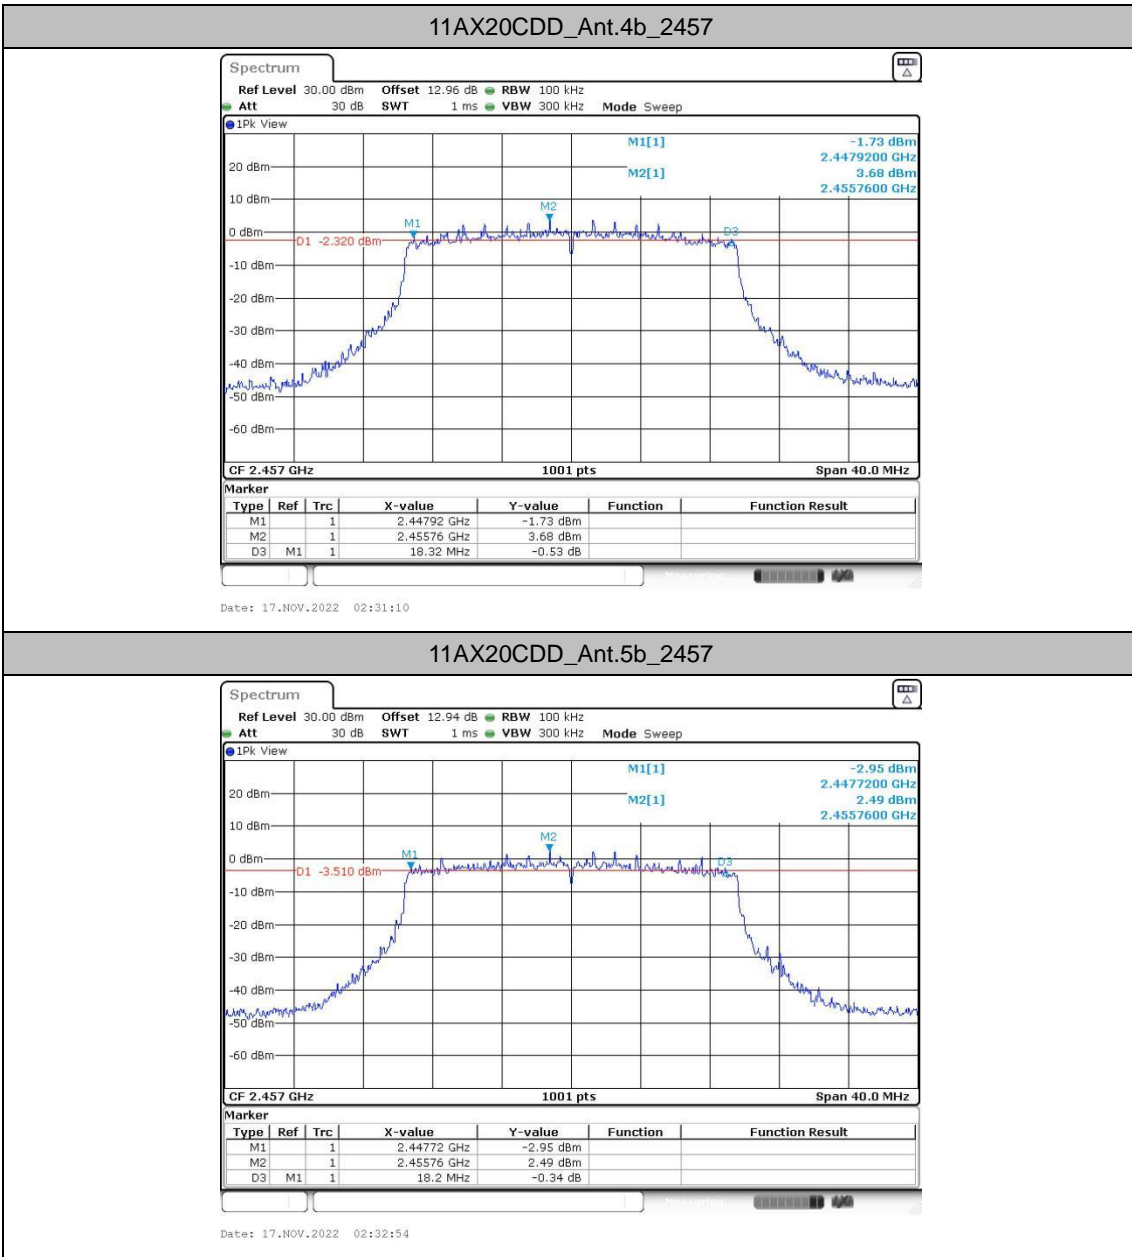


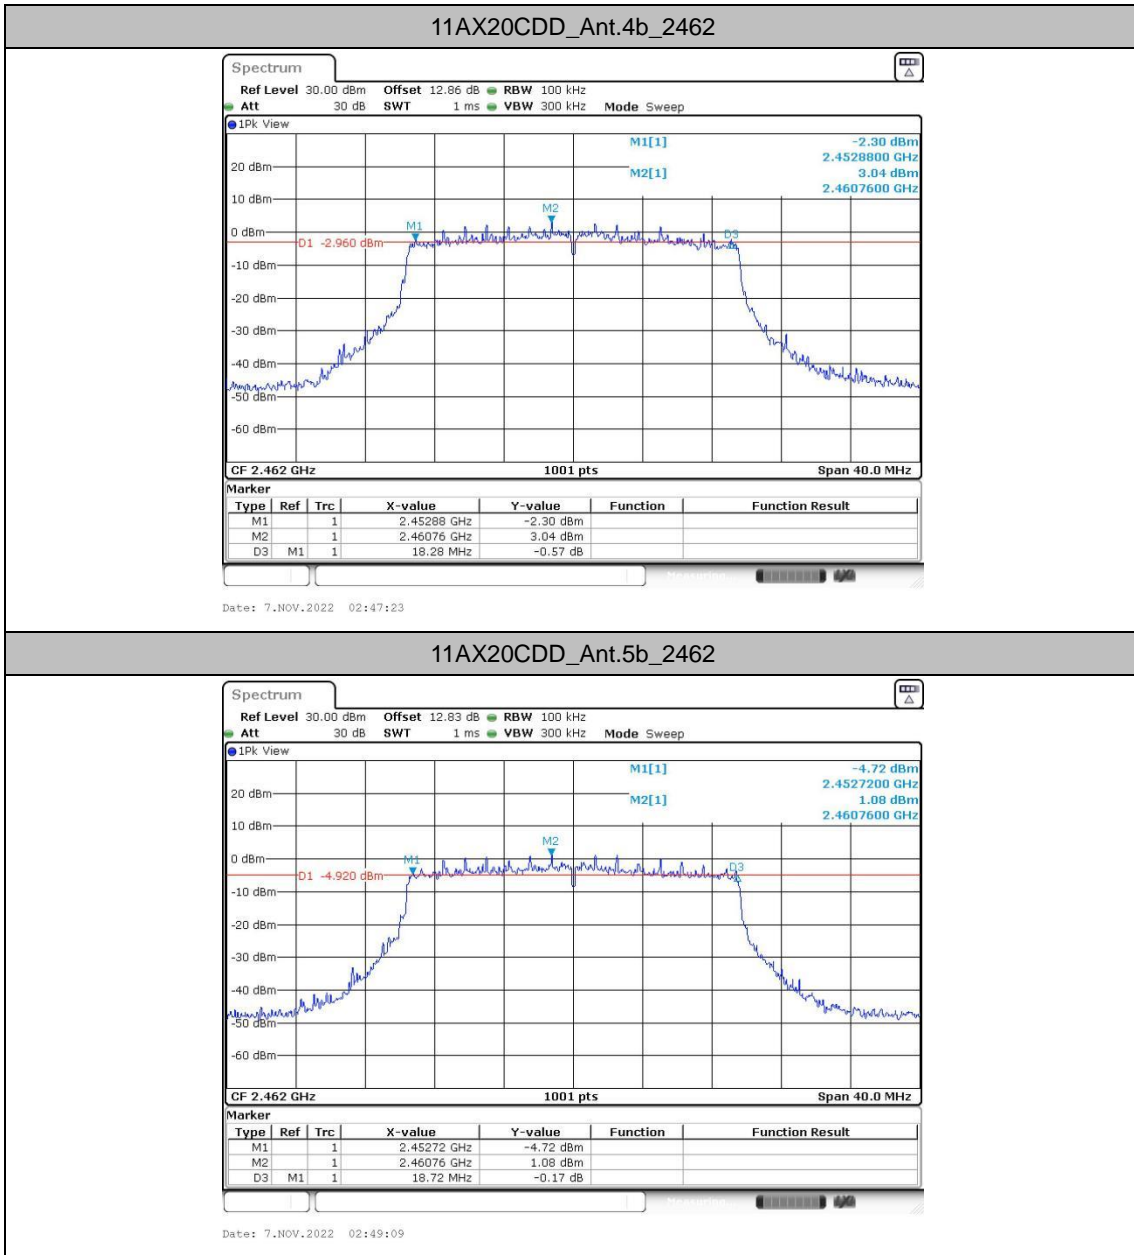

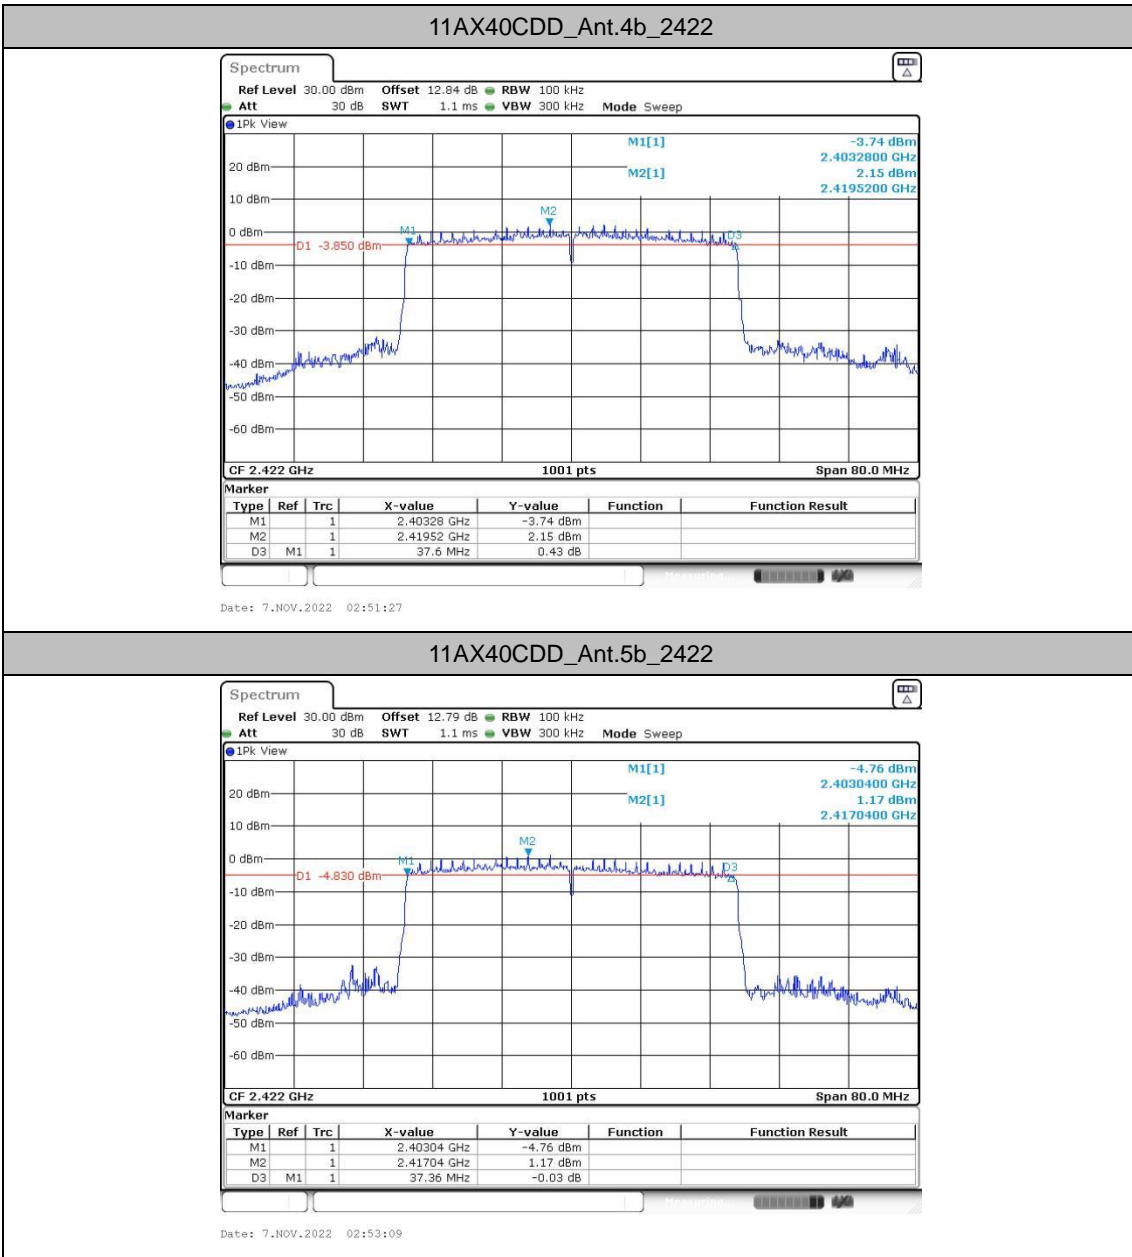

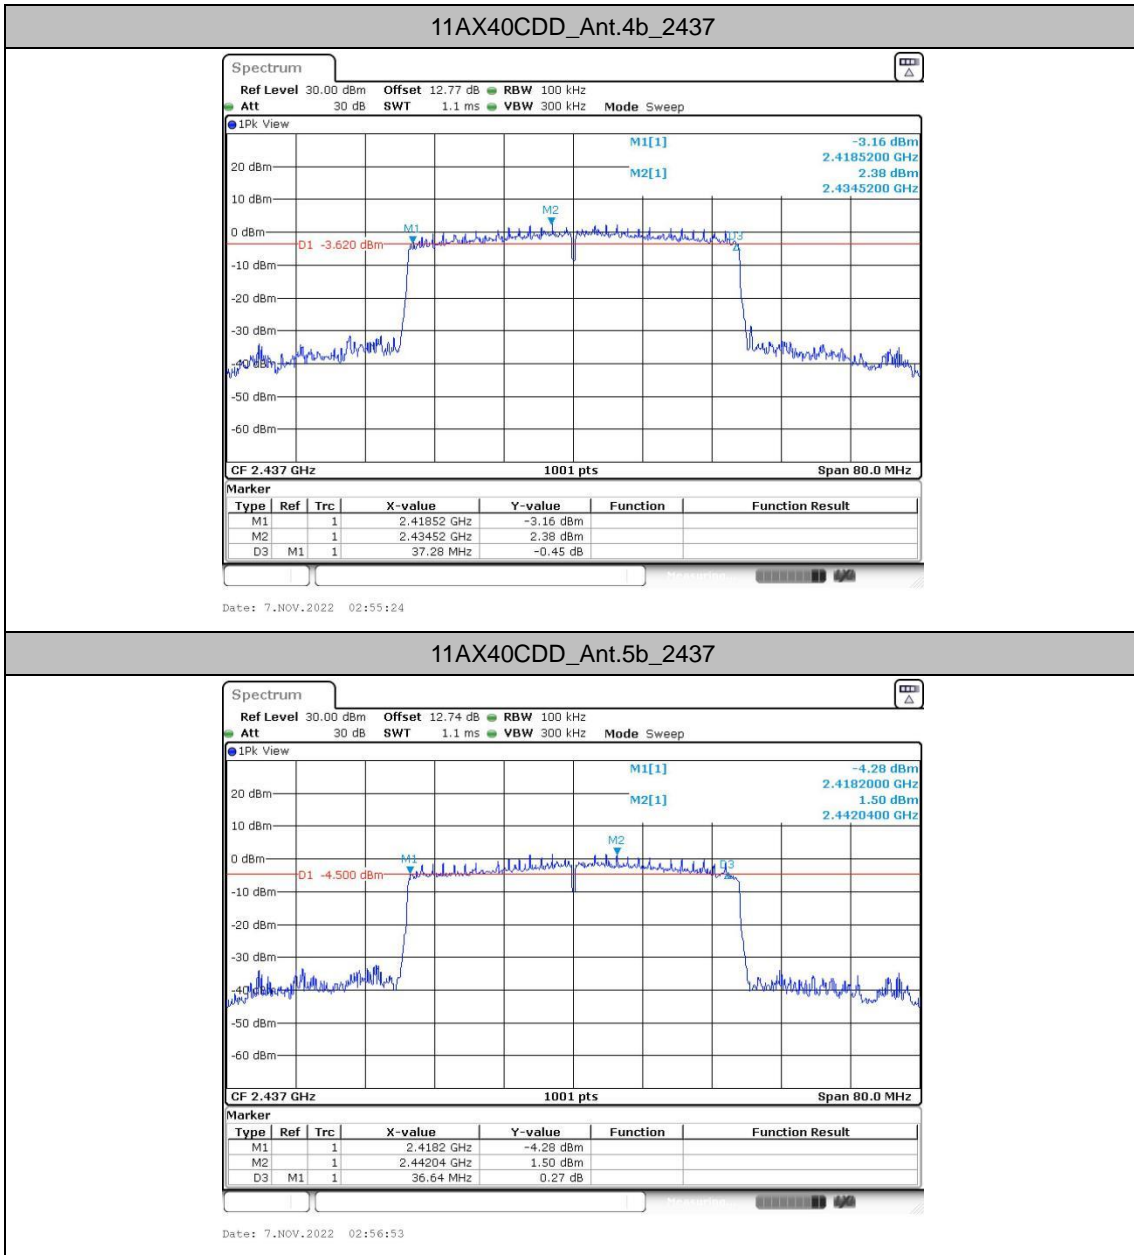

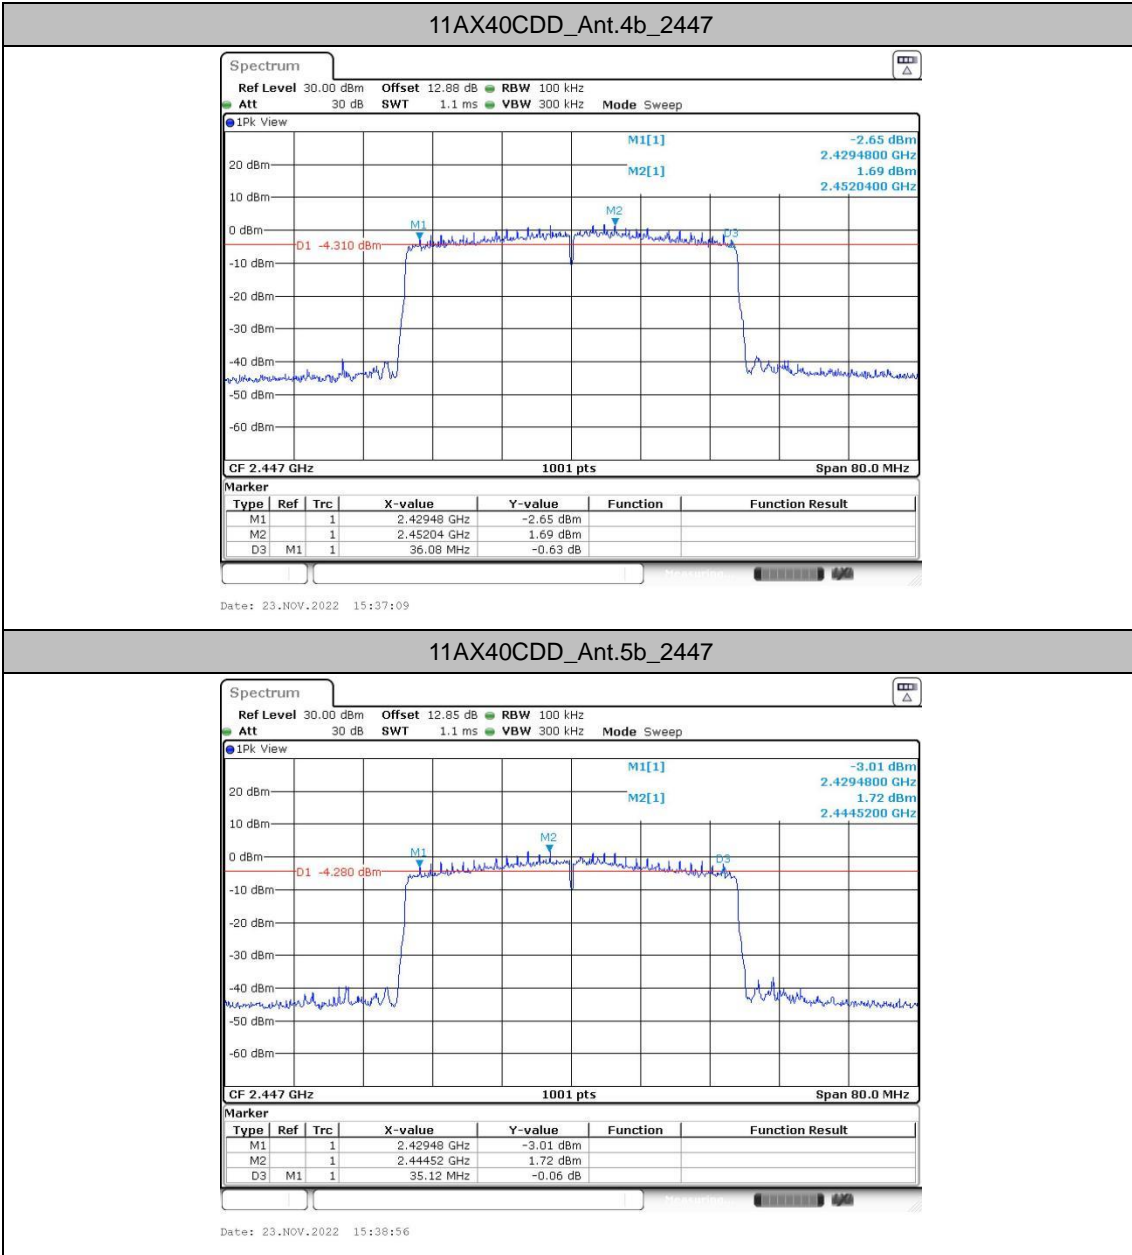

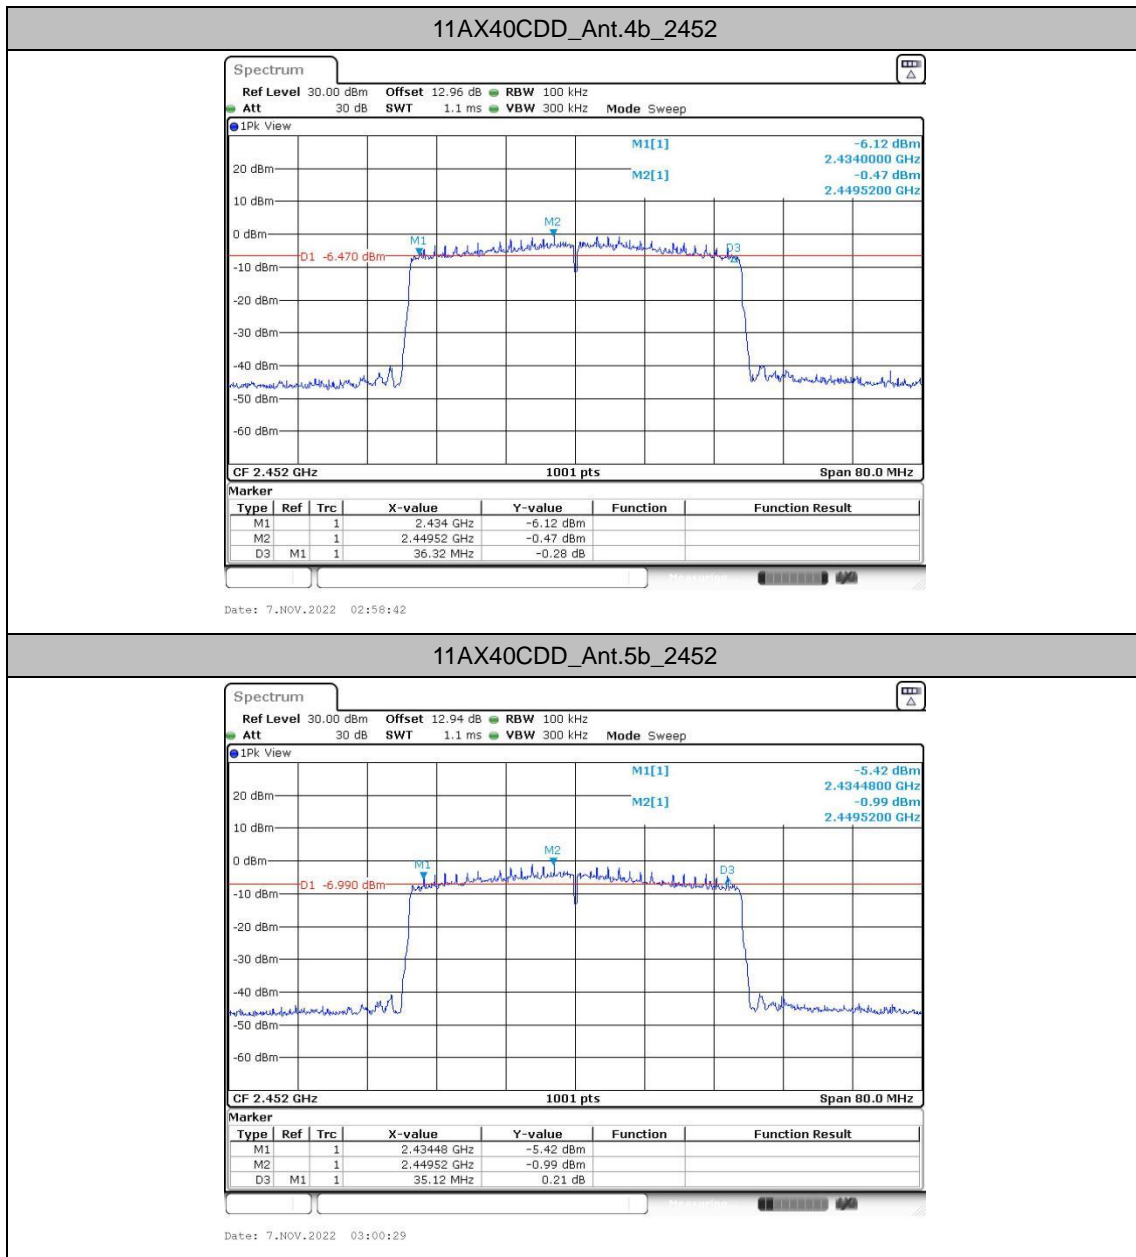



Occupied Channel Bandwidth

Test Result


Test Mode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B-CDD	Ant.4b	2412	12.587	2405.6863	2418.2737	---	---
	Ant.5b	2412	12.468	2405.6863	2418.1538	---	---
	Ant.4b	2437	12.667	2430.7263	2443.3936	---	---
	Ant.5b	2437	12.587	2430.8062	2443.3936	---	---
	Ant.4b	2462	12.627	2455.6464	2468.2737	---	---
	Ant.5b	2462	12.787	2455.5664	2468.3536	---	---
11G-CDD	Ant.4b	2412	17.063	2403.4486	2420.5115	---	---
	Ant.5b	2412	16.743	2403.5684	2420.3117	---	---
	Ant.4b	2437	17.383	2428.3686	2445.7512	---	---
	Ant.5b	2437	16.903	2428.6084	2445.5115	---	---
	Ant.4b	2462	17.023	2453.4486	2470.4715	---	---
	Ant.5b	2462	16.823	2453.5684	2470.3916	---	---
11N20CDD	Ant.4b	2412	18.501	2402.7293	2421.2308	---	---
	Ant.5b	2412	17.902	2402.9690	2420.8711	---	---
	Ant.4b	2437	18.541	2427.7692	2446.3107	---	---
	Ant.5b	2437	18.062	2428.0090	2446.0709	---	---
	Ant.4b	2457	18.142	2447.8891	2466.0310	---	---
	Ant.5b	2457	17.902	2448.0090	2465.9111	---	---
	Ant.4b	2462	18.541	2452.6094	2471.1508	---	---
	Ant.5b	2462	18.182	2452.8092	2470.9910	---	---
11N40CDD	Ant.4b	2422	37.323	2403.4585	2440.7812	---	---
	Ant.5b	2422	36.843	2403.6184	2440.4615	---	---
	Ant.4b	2437	37.003	2418.6184	2455.6214	---	---
	Ant.5b	2437	36.843	2418.5385	2455.3816	---	---
	Ant.4b	2452	36.683	2433.6983	2470.3816	---	---
	Ant.5b	2452	36.683	2433.6184	2470.3017	---	---




11AX20CDD	Ant.4b	2412	19.101	2402.4496	2421.5504	---	---
	Ant.5b	2412	19.021	2402.4496	2421.4705	---	---
	Ant.4b	2437	19.141	2427.4496	2446.5904	---	---
	Ant.5b	2437	19.101	2427.4895	2446.5904	---	---
	Ant.4b	2457	19.061	2447.4895	2466.5504	---	---
	Ant.5b	2457	19.061	2447.4496	2466.5105	---	---
	Ant.4b	2462	19.101	2452.4096	2471.5105	---	---
	Ant.5b	2462	19.101	2452.4496	2471.5504	---	---
11AX40CDD	Ant.4b	2422	37.882	2403.0589	2440.9411	---	---
	Ant.5b	2422	37.962	2402.9790	2440.9411	---	---
	Ant.4b	2437	37.882	2418.1389	2456.0210	---	---
	Ant.5b	2437	37.722	2418.1389	2455.8611	---	---
	Ant.4b	2447	37.642	2428.2188	2465.8611	---	---
	Ant.5b	2447	37.562	2428.2188	2465.7812	---	---
	Ant.4b	2452	37.642	2433.1389	2470.7812	---	---
	Ant.5b	2452	37.642	2433.1389	2470.7812	---	---



Test Graphs

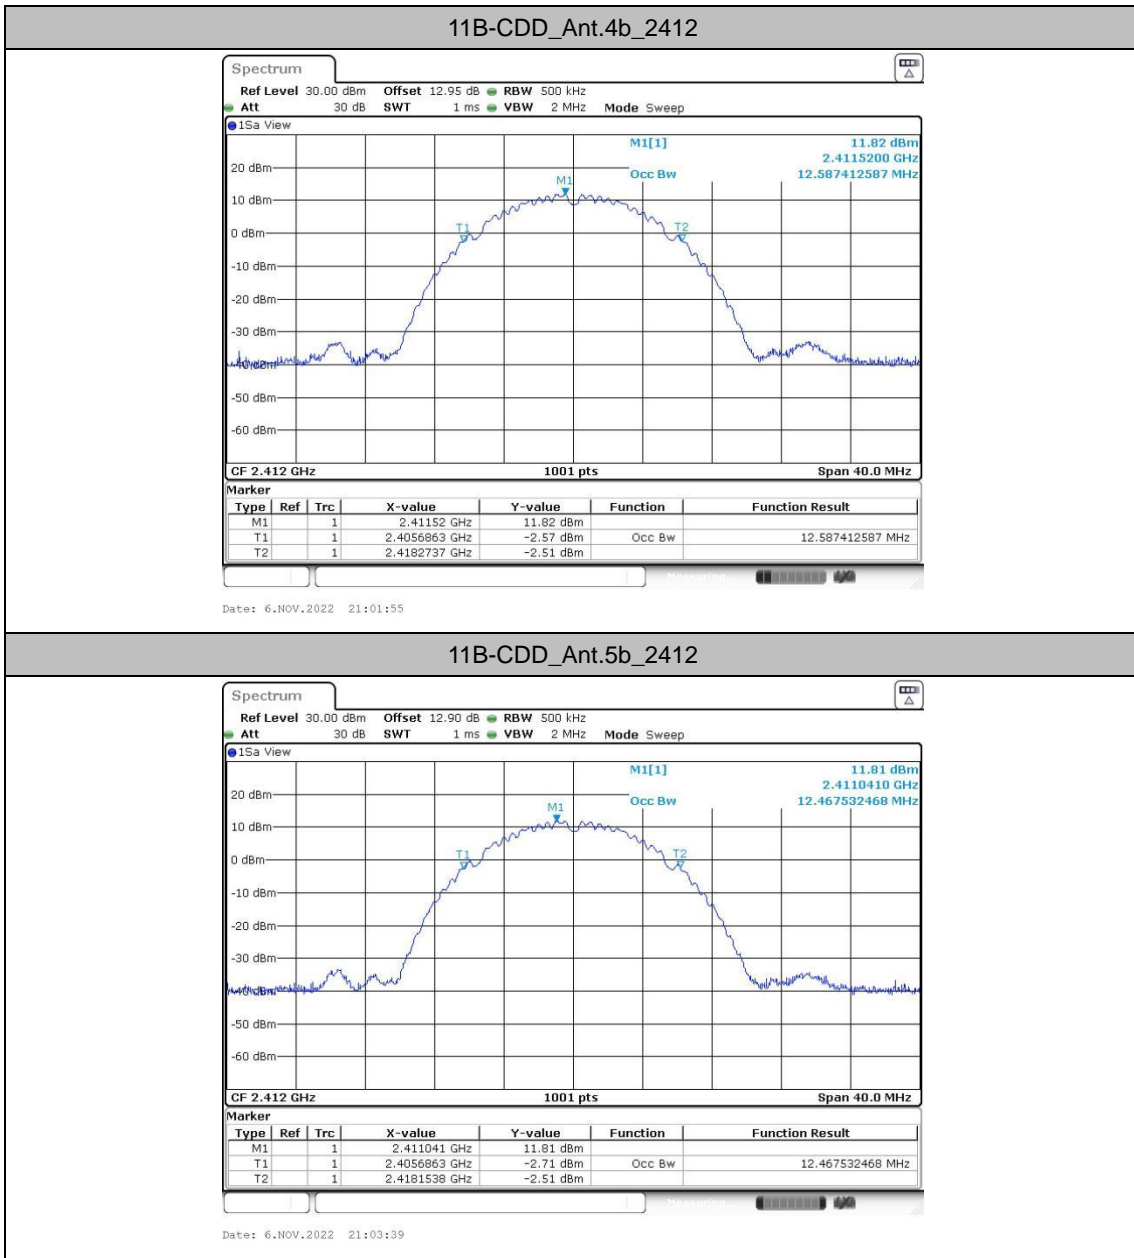

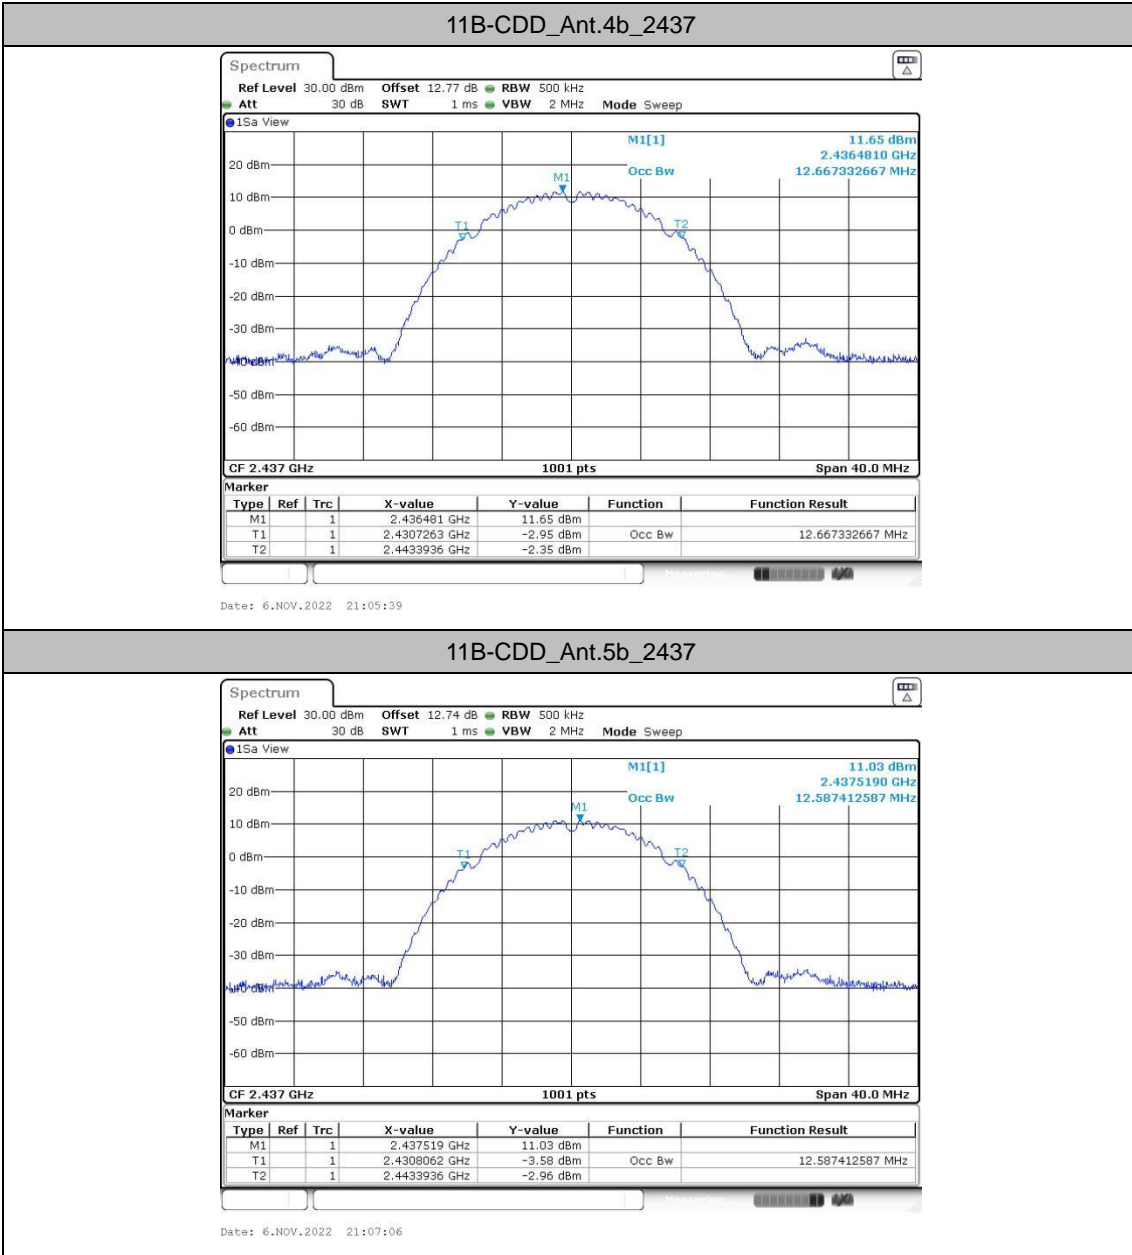
11B-CDD_Ant.5b_2437

