


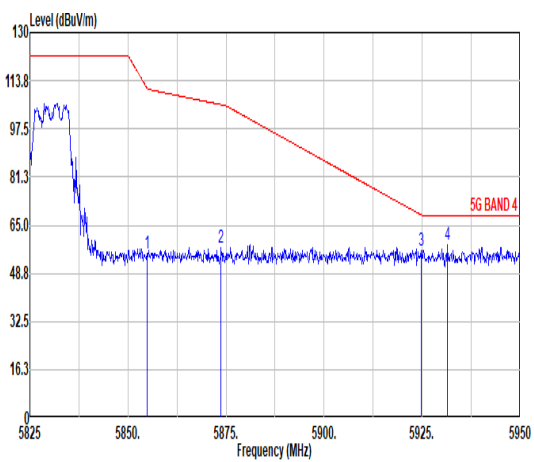
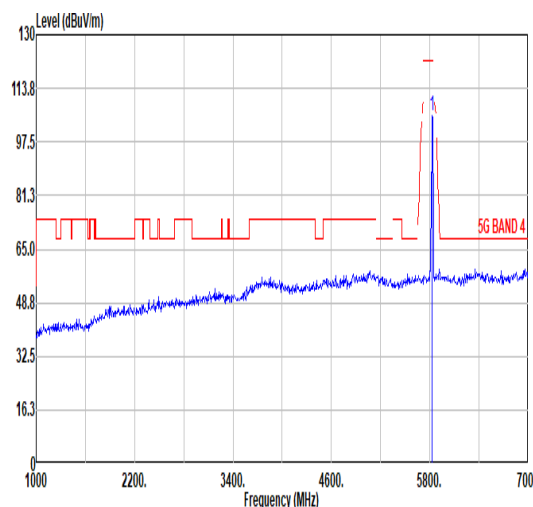
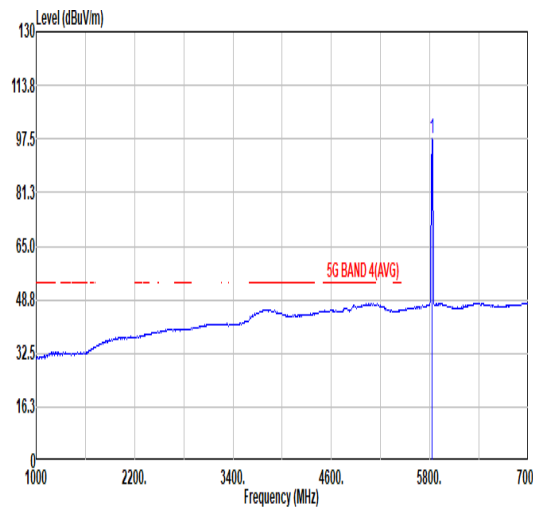


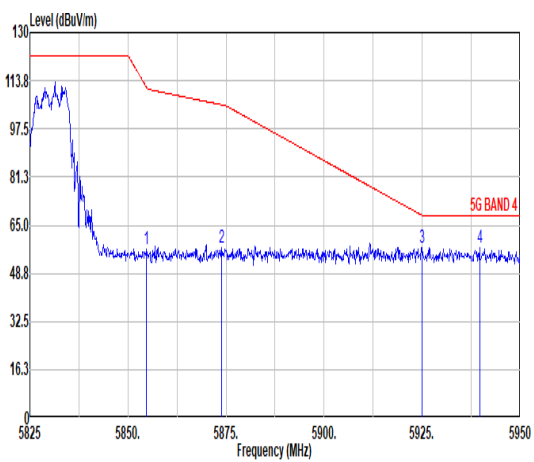

Mode	58																																																																																																																								
	Band Edge																																																																																																																								
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Partial_RU106/54_5825MHz																																																																																																																								
ANT	ANT 4A+5A																																																																																																																								
Pol.	Horizontal	Fundamental																																																																																																																							
Peak	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.88</td> <td>55.63</td> <td>111.18</td> <td>-55.55</td> <td>38.91</td> <td>35.08</td> <td>11.43</td> <td>29.79</td> <td>0.00</td> <td>357</td> <td>289</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5873.75</td> <td>57.28</td> <td>105.65</td> <td>-48.37</td> <td>40.52</td> <td>35.11</td> <td>11.44</td> <td>29.79</td> <td>0.00</td> <td>357</td> <td>289</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.75</td> <td>56.56</td> <td>68.48</td> <td>-11.92</td> <td>39.72</td> <td>35.19</td> <td>11.47</td> <td>29.82</td> <td>0.00</td> <td>357</td> <td>289</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5931.50</td> <td>58.50</td> <td>68.30</td> <td>-9.80</td> <td>41.65</td> <td>35.20</td> <td>11.48</td> <td>29.83</td> <td>0.00</td> <td>357</td> <td>289</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5854.88	55.63	111.18	-55.55	38.91	35.08	11.43	29.79	0.00	357	289	PEAK	2	5873.75	57.28	105.65	-48.37	40.52	35.11	11.44	29.79	0.00	357	289	PEAK	3	5924.75	56.56	68.48	-11.92	39.72	35.19	11.47	29.82	0.00	357	289	PEAK	4	5931.50	58.50	68.30	-9.80	41.65	35.20	11.48	29.83	0.00	357	289	PEAK	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>105.37</td> <td>-----</td> <td>-----</td> <td>88.70</td> <td>35.04</td> <td>11.41</td> <td>29.78</td> <td>0.00</td> <td>357</td> <td>289</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	105.37	-----	-----	88.70	35.04	11.41	29.78	0.00	357	289	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																	
1	5854.88	55.63	111.18	-55.55	38.91	35.08	11.43	29.79	0.00	357	289	PEAK																																																																																																													
2	5873.75	57.28	105.65	-48.37	40.52	35.11	11.44	29.79	0.00	357	289	PEAK																																																																																																													
3	5924.75	56.56	68.48	-11.92	39.72	35.19	11.47	29.82	0.00	357	289	PEAK																																																																																																													
4	5931.50	58.50	68.30	-9.80	41.65	35.20	11.48	29.83	0.00	357	289	PEAK																																																																																																													
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																	
1	5825.00	105.37	-----	-----	88.70	35.04	11.41	29.78	0.00	357	289	PEAK																																																																																																													
Avg	Blank	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>97.65</td> <td>-----</td> <td>-----</td> <td>80.98</td> <td>35.04</td> <td>11.41</td> <td>29.78</td> <td>0.00</td> <td>357</td> <td>289</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	97.65	-----	-----	80.98	35.04	11.41	29.78	0.00	357	289	AVERAGE																																																																															
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																	
1	5825.00	97.65	-----	-----	80.98	35.04	11.41	29.78	0.00	357	289	AVERAGE																																																																																																													

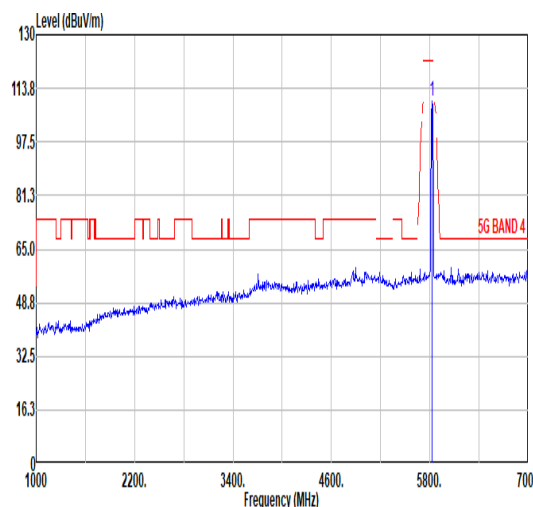

Mode	58																																																																																																														
	Band Edge																																																																																																														
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Partial_RU106/54_5825MHz																																																																																																														
ANT	ANT 4A+5A																																																																																																														
Pol.	Vertical	Fundamental																																																																																																													
Peak	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.75</td> <td>56.98</td> <td>111.47</td> <td>-54.49</td> <td>40.26</td> <td>35.08</td> <td>11.43</td> <td>29.79</td> <td>0.00</td> <td>134</td> <td>350</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5873.88</td> <td>57.37</td> <td>105.61</td> <td>-48.24</td> <td>40.61</td> <td>35.11</td> <td>11.44</td> <td>29.79</td> <td>0.00</td> <td>134</td> <td>350</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5925.00</td> <td>57.32</td> <td>68.30</td> <td>-10.98</td> <td>40.47</td> <td>35.19</td> <td>11.48</td> <td>29.82</td> <td>0.00</td> <td>134</td> <td>350</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5939.63</td> <td>57.41</td> <td>68.30</td> <td>-10.89</td> <td>40.56</td> <td>35.21</td> <td>11.48</td> <td>29.84</td> <td>0.00</td> <td>134</td> <td>350</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	dB	dB/m	dB	dB	cm	deg	Remark	1	5854.75	56.98	111.47	-54.49	40.26	35.08	11.43	29.79	0.00	134	350	PEAK	2	5873.88	57.37	105.61	-48.24	40.61	35.11	11.44	29.79	0.00	134	350	PEAK	3	5925.00	57.32	68.30	-10.98	40.47	35.19	11.48	29.82	0.00	134	350	PEAK	4	5939.63	57.41	68.30	-10.89	40.56	35.21	11.48	29.84	0.00	134	350	PEAK	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>110.07</td> <td>-----</td> <td>-----</td> <td>93.40</td> <td>35.04</td> <td>11.41</td> <td>29.78</td> <td>0.00</td> <td>134</td> <td>350</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	dB	cm	deg	Remark	1	5825.00	110.07	-----	-----	93.40	35.04	11.41	29.78	0.00	134	350	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	dB	dB/m	dB	dB	cm	deg	Remark																																																																																																			
1	5854.75	56.98	111.47	-54.49	40.26	35.08	11.43	29.79	0.00	134	350	PEAK																																																																																																			
2	5873.88	57.37	105.61	-48.24	40.61	35.11	11.44	29.79	0.00	134	350	PEAK																																																																																																			
3	5925.00	57.32	68.30	-10.98	40.47	35.19	11.48	29.82	0.00	134	350	PEAK																																																																																																			
4	5939.63	57.41	68.30	-10.89	40.56	35.21	11.48	29.84	0.00	134	350	PEAK																																																																																																			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	dB	cm	deg	Remark																																																																																																			
1	5825.00	110.07	-----	-----	93.40	35.04	11.41	29.78	0.00	134	350	PEAK																																																																																																			
Avg	Blank	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>102.55</td> <td>-----</td> <td>-----</td> <td>85.88</td> <td>35.04</td> <td>11.41</td> <td>29.78</td> <td>0.00</td> <td>134</td> <td>350</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	dB	cm	deg	Remark	1	5825.00	102.55	-----	-----	85.88	35.04	11.41	29.78	0.00	134	350	AVERAGE																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	dB	cm	deg	Remark																																																																																																			
1	5825.00	102.55	-----	-----	85.88	35.04	11.41	29.78	0.00	134	350	AVERAGE																																																																																																			

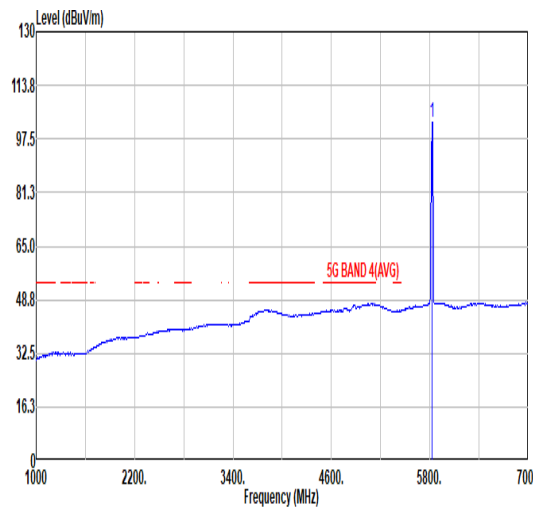

Mode	59																																																																																																										
	Harmonic																																																																																																										
	U-NII-2C-3_5.47-5.85_802.11a_CH144_5720MHz																																																																																																										
ANT	ANT 4A+5A																																																																																																										
Pol.	Horizontal	Vertical																																																																																																									
Peak Avg																																																																																																											
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11440.00</td> <td>54.78</td> <td>74.00</td> <td>-19.22</td> <td>60.74</td> <td>38.81</td> <td>17.72</td> <td>62.49</td> <td>0.00</td> <td>194</td> <td>176</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11440.00</td> <td>44.71</td> <td>54.00</td> <td>-9.29</td> <td>50.67</td> <td>38.81</td> <td>17.72</td> <td>62.49</td> <td>0.00</td> <td>194</td> <td>176</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11440.00	54.78	74.00	-19.22	60.74	38.81	17.72	62.49	0.00	194	176	PEAK	2	11440.00	44.71	54.00	-9.29	50.67	38.81	17.72	62.49	0.00	194	176	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11440.00</td> <td>54.96</td> <td>74.00</td> <td>-19.04</td> <td>60.92</td> <td>38.81</td> <td>17.72</td> <td>62.49</td> <td>0.00</td> <td>152</td> <td>154</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11440.00</td> <td>45.52</td> <td>54.00</td> <td>-8.48</td> <td>51.48</td> <td>38.81</td> <td>17.72</td> <td>62.49</td> <td>0.00</td> <td>152</td> <td>154</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11440.00	54.96	74.00	-19.04	60.92	38.81	17.72	62.49	0.00	152	154	PEAK	2	11440.00	45.52	54.00	-8.48	51.48	38.81	17.72	62.49	0.00	152	154
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																			
1	11440.00	54.78	74.00	-19.22	60.74	38.81	17.72	62.49	0.00	194	176	PEAK																																																																																															
2	11440.00	44.71	54.00	-9.29	50.67	38.81	17.72	62.49	0.00	194	176	AVERAGE																																																																																															
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																			
1	11440.00	54.96	74.00	-19.04	60.92	38.81	17.72	62.49	0.00	152	154	PEAK																																																																																															
2	11440.00	45.52	54.00	-8.48	51.48	38.81	17.72	62.49	0.00	152	154	AVERAGE																																																																																															



Mode	60																																																																																																																		
	Harmonic																																																																																																																		
	U-NII-2C-3_5.47-5.85_802.11ax HE20_CH144_Full RU_5720MHz																																																																																																																		
ANT	ANT 4A+5A																																																																																																																		
Pol.	Horizontal	Vertical																																																																																																																	
Peak Avg																																																																																																																			
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11440.00</td> <td>53.21</td> <td>74.00</td> <td>-20.79</td> <td>59.17</td> <td>38.81</td> <td>17.72</td> <td>62.49</td> <td>0.00</td> <td>160</td> <td>172</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11440.00</td> <td>43.98</td> <td>54.00</td> <td>-10.02</td> <td>49.94</td> <td>38.81</td> <td>17.72</td> <td>62.49</td> <td>0.00</td> <td>160</td> <td>172</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11440.00	53.21	74.00	-20.79	59.17	38.81	17.72	62.49	0.00	160	172	PEAK	2	11440.00	43.98	54.00	-10.02	49.94	38.81	17.72	62.49	0.00	160	172	AVERAGE	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11440.00</td> <td>51.04</td> <td>74.00</td> <td>-22.96</td> <td>57.00</td> <td>38.81</td> <td>17.72</td> <td>62.49</td> <td>0.00</td> <td>100</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11440.00</td> <td>41.57</td> <td>54.00</td> <td>-12.43</td> <td>47.53</td> <td>38.81</td> <td>17.72</td> <td>62.49</td> <td>0.00</td> <td>100</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11440.00	51.04	74.00	-22.96	57.00	38.81	17.72	62.49	0.00	100	360	PEAK	2	11440.00	41.57	54.00	-12.43	47.53	38.81	17.72	62.49	0.00	100	360
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																									
1	11440.00	53.21	74.00	-20.79	59.17	38.81	17.72	62.49	0.00	160	172	PEAK																																																																																																							
2	11440.00	43.98	54.00	-10.02	49.94	38.81	17.72	62.49	0.00	160	172	AVERAGE																																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																									
1	11440.00	51.04	74.00	-22.96	57.00	38.81	17.72	62.49	0.00	100	360	PEAK																																																																																																							
2	11440.00	41.57	54.00	-12.43	47.53	38.81	17.72	62.49	0.00	100	360	AVERAGE																																																																																																							





Mode	61																																																																																	
	Harmonic																																																																																	
	U-NII-2C-3_5.47-5.85_802.11ax HE40_CH142_Full RU_5710MHz																																																																																	
ANT	ANT 4A+5A																																																																																	
Pol.	Horizontal	Vertical																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11420.00</td> <td>49.15</td> <td>74.00</td> <td>-24.85</td> <td>55.16</td> <td>38.79</td> <td>17.70</td> <td>62.50</td> <td>0.00</td> <td>100</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11420.00	49.15	74.00	-24.85	55.16	38.79	17.70	62.50	0.00	100	360	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11420.00</td> <td>49.59</td> <td>74.00</td> <td>-24.41</td> <td>55.60</td> <td>38.79</td> <td>17.70</td> <td>62.50</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11420.00	49.59	74.00	-24.41	55.60	38.79	17.70	62.50	0.00	100	0	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 11420.00	49.15	74.00	-24.85	55.16	38.79	17.70	62.50	0.00	100	360	PEAK																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 11420.00	49.59	74.00	-24.41	55.60	38.79	17.70	62.50	0.00	100	0	PEAK																																																																							





Mode	62																																																																																							
	Harmonic																																																																																							
	U-NII-2C-3_5.47-5.85_802.11ax HE80_CH138_Full RU_5690MHz																																																																																							
ANT	ANT 4A+5A																																																																																							
Pol.	Horizontal	Vertical																																																																																						
Peak Avg	<table border="1"> <thead> <tr> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11380.00</td> <td>49.21</td> <td>74.00</td> <td>-24.79</td> <td>55.28</td> <td>38.77</td> <td>17.67</td> <td>62.51</td> <td>0.00</td> <td>100</td> <td>360 PEAK</td> </tr> </tbody> </table>	Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 11380.00	49.21	74.00	-24.79	55.28	38.77	17.67	62.51	0.00	100	360 PEAK	<table border="1"> <thead> <tr> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11380.00</td> <td>48.65</td> <td>74.00</td> <td>-25.35</td> <td>54.72</td> <td>38.77</td> <td>17.67</td> <td>62.51</td> <td>0.00</td> <td>100</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 11380.00	48.65	74.00	-25.35	54.72	38.77	17.67	62.51	0.00	100	0 PEAK
Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor	cm	deg																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 11380.00	49.21	74.00	-24.79	55.28	38.77	17.67	62.51	0.00	100	360 PEAK																																																																														
Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor	cm	deg																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 11380.00	48.65	74.00	-25.35	54.72	38.77	17.67	62.51	0.00	100	0 PEAK																																																																														



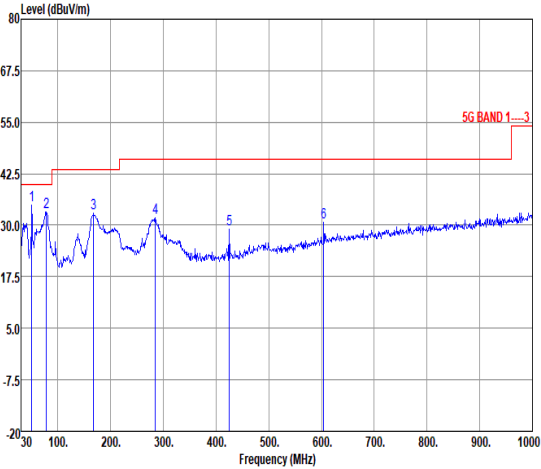
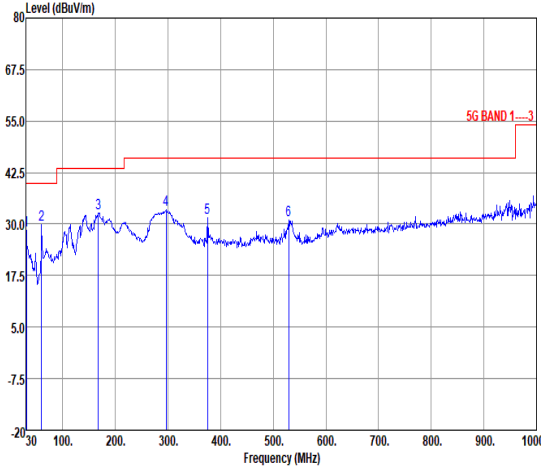


	63																																																																																																																																																											
Mode	Emission below 1GHz																																																																																																																																																											
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full RU_5290MHz																																																																																																																																																											
ANT	ANT 4A+5A																																																																																																																																																											
Pol.	Horizontal	Vertical																																																																																																																																																										
Peak QP	 <p>Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The plot shows a blue signal line with peaks labeled 1 through 6. A red stepped line represents the 5G BAND 1 limit, labeled '5G BAND 1-3'. The y-axis ranges from -20 to 80 dBuV/m, and the x-axis ranges from 30 to 1000 MHz.</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Over (dB)</th> <th>ReadAntenna Level (dBuV)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>A/Pos (cm)</th> <th>T/Pos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>50.37</td><td>34.78</td><td>40.00</td><td>-5.22</td><td>51.69</td><td>14.49</td><td>1.00</td><td>32.40</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>78.50</td><td>33.30</td><td>40.00</td><td>-6.70</td><td>50.49</td><td>13.94</td><td>1.27</td><td>32.40</td><td>---</td><td>Peak</td></tr> <tr><td>3</td><td>167.74</td><td>32.79</td><td>43.50</td><td>-10.71</td><td>47.33</td><td>15.98</td><td>1.88</td><td>32.40</td><td>---</td><td>Peak</td></tr> <tr><td>4</td><td>285.11</td><td>31.78</td><td>46.00</td><td>-14.22</td><td>42.75</td><td>19.01</td><td>2.42</td><td>32.40</td><td>---</td><td>Peak</td></tr> <tr><td>5</td><td>424.79</td><td>28.97</td><td>46.00</td><td>-17.03</td><td>35.89</td><td>22.41</td><td>3.07</td><td>32.40</td><td>---</td><td>Peak</td></tr> <tr><td>6</td><td>604.24</td><td>30.62</td><td>46.00</td><td>-15.38</td><td>33.16</td><td>26.21</td><td>3.65</td><td>32.40</td><td>---</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	ReadAntenna Level (dBuV)	Cable Loss (dB)	Preamp Loss (dB)	A/Pos (cm)	T/Pos (deg)	Remark	1	50.37	34.78	40.00	-5.22	51.69	14.49	1.00	32.40	---	Peak	2	78.50	33.30	40.00	-6.70	50.49	13.94	1.27	32.40	---	Peak	3	167.74	32.79	43.50	-10.71	47.33	15.98	1.88	32.40	---	Peak	4	285.11	31.78	46.00	-14.22	42.75	19.01	2.42	32.40	---	Peak	5	424.79	28.97	46.00	-17.03	35.89	22.41	3.07	32.40	---	Peak	6	604.24	30.62	46.00	-15.38	33.16	26.21	3.65	32.40	---	Peak	 <p>Level (dBuV/m) vs Frequency (MHz) for Vertical polarization. The plot shows a blue signal line with peaks labeled 1 through 6. A red stepped line represents the 5G BAND 1 limit, labeled '5G BAND 1-3'. The y-axis ranges from -20 to 80 dBuV/m, and the x-axis ranges from 30 to 1000 MHz.</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Over (dB)</th> <th>ReadAntenna Level (dBuV)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>A/Pos (cm)</th> <th>T/Pos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>30.97</td><td>28.42</td><td>40.00</td><td>-11.58</td><td>34.97</td><td>25.09</td><td>0.76</td><td>32.40</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>60.07</td><td>29.98</td><td>40.00</td><td>-10.02</td><td>49.17</td><td>12.14</td><td>1.07</td><td>32.40</td><td>---</td><td>Peak</td></tr> <tr><td>3</td><td>167.74</td><td>32.61</td><td>43.50</td><td>-10.89</td><td>47.15</td><td>15.98</td><td>1.88</td><td>32.40</td><td>---</td><td>Peak</td></tr> <tr><td>4</td><td>296.75</td><td>33.50</td><td>46.00</td><td>-12.50</td><td>44.10</td><td>19.27</td><td>2.53</td><td>32.40</td><td>---</td><td>Peak</td></tr> <tr><td>5</td><td>375.32</td><td>31.45</td><td>46.00</td><td>-14.55</td><td>39.72</td><td>21.25</td><td>2.88</td><td>32.40</td><td>---</td><td>Peak</td></tr> <tr><td>6</td><td>529.55</td><td>30.92</td><td>46.00</td><td>-15.08</td><td>35.48</td><td>24.67</td><td>3.17</td><td>32.40</td><td>---</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	ReadAntenna Level (dBuV)	Cable Loss (dB)	Preamp Loss (dB)	A/Pos (cm)	T/Pos (deg)	Remark	1	30.97	28.42	40.00	-11.58	34.97	25.09	0.76	32.40	---	Peak	2	60.07	29.98	40.00	-10.02	49.17	12.14	1.07	32.40	---	Peak	3	167.74	32.61	43.50	-10.89	47.15	15.98	1.88	32.40	---	Peak	4	296.75	33.50	46.00	-12.50	44.10	19.27	2.53	32.40	---	Peak	5	375.32	31.45	46.00	-14.55	39.72	21.25	2.88	32.40	---	Peak	6	529.55	30.92	46.00	-15.08	35.48	24.67	3.17	32.40	---	Peak
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	ReadAntenna Level (dBuV)	Cable Loss (dB)	Preamp Loss (dB)	A/Pos (cm)	T/Pos (deg)	Remark																																																																																																																																																		
1	50.37	34.78	40.00	-5.22	51.69	14.49	1.00	32.40	---	Peak																																																																																																																																																		
2	78.50	33.30	40.00	-6.70	50.49	13.94	1.27	32.40	---	Peak																																																																																																																																																		
3	167.74	32.79	43.50	-10.71	47.33	15.98	1.88	32.40	---	Peak																																																																																																																																																		
4	285.11	31.78	46.00	-14.22	42.75	19.01	2.42	32.40	---	Peak																																																																																																																																																		
5	424.79	28.97	46.00	-17.03	35.89	22.41	3.07	32.40	---	Peak																																																																																																																																																		
6	604.24	30.62	46.00	-15.38	33.16	26.21	3.65	32.40	---	Peak																																																																																																																																																		
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	ReadAntenna Level (dBuV)	Cable Loss (dB)	Preamp Loss (dB)	A/Pos (cm)	T/Pos (deg)	Remark																																																																																																																																																		
1	30.97	28.42	40.00	-11.58	34.97	25.09	0.76	32.40	---	Peak																																																																																																																																																		
2	60.07	29.98	40.00	-10.02	49.17	12.14	1.07	32.40	---	Peak																																																																																																																																																		
3	167.74	32.61	43.50	-10.89	47.15	15.98	1.88	32.40	---	Peak																																																																																																																																																		
4	296.75	33.50	46.00	-12.50	44.10	19.27	2.53	32.40	---	Peak																																																																																																																																																		
5	375.32	31.45	46.00	-14.55	39.72	21.25	2.88	32.40	---	Peak																																																																																																																																																		
6	529.55	30.92	46.00	-15.08	35.48	24.67	3.17	32.40	---	Peak																																																																																																																																																		

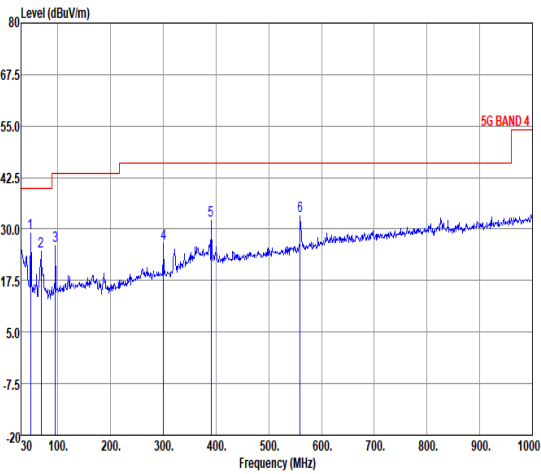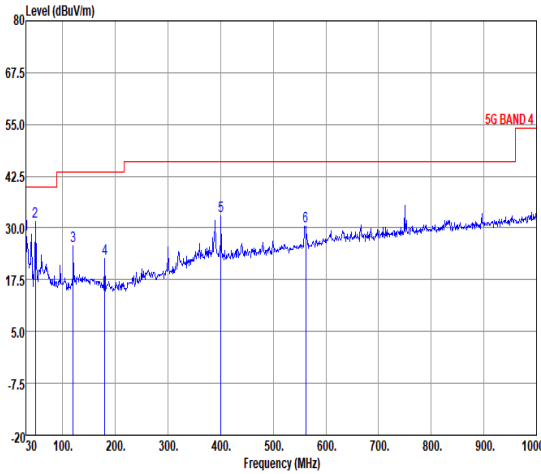

	64																																																																																																																																																											
Mode	Emission below 1GHz																																																																																																																																																											
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Full RU_5825MHz																																																																																																																																																											
ANT	ANT 4A+5A																																																																																																																																																											
Pol.	Horizontal	Vertical																																																																																																																																																										
Peak QP	 <p>Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The plot shows a blue signal line with several peaks labeled 1 through 6. A red stepped line represents the 5G BAND 4 limit, starting at 42.5 dBuV/m and increasing to 55.0 dBuV/m. The signal peaks are generally below the limit line.</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Over (dB)</th> <th>ReadAntenna Level (dBuV)</th> <th>Cable Loss Factor (dB/m)</th> <th>Preamp Loss Factor (dB)</th> <th>A/Pos (cm)</th> <th>T/Pos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>48.43</td><td>28.89</td><td>40.00</td><td>-11.11</td><td>44.86</td><td>15.45</td><td>0.98</td><td>32.40</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>67.83</td><td>24.45</td><td>40.00</td><td>-15.55</td><td>40.79</td><td>14.90</td><td>1.16</td><td>32.40</td><td>---</td><td>Peak</td></tr> <tr><td>3</td><td>94.99</td><td>25.95</td><td>43.50</td><td>-17.55</td><td>41.54</td><td>15.44</td><td>1.37</td><td>32.40</td><td>---</td><td>Peak</td></tr> <tr><td>4</td><td>300.63</td><td>26.54</td><td>46.00</td><td>-19.46</td><td>37.03</td><td>19.35</td><td>2.56</td><td>32.40</td><td>---</td><td>Peak</td></tr> <tr><td>5</td><td>390.84</td><td>32.15</td><td>46.00</td><td>-13.85</td><td>39.95</td><td>21.65</td><td>2.95</td><td>32.40</td><td>---</td><td>Peak</td></tr> <tr><td>6</td><td>559.62</td><td>33.20</td><td>46.00</td><td>-12.80</td><td>37.01</td><td>25.31</td><td>3.28</td><td>32.40</td><td>---</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	ReadAntenna Level (dBuV)	Cable Loss Factor (dB/m)	Preamp Loss Factor (dB)	A/Pos (cm)	T/Pos (deg)	Remark	1	48.43	28.89	40.00	-11.11	44.86	15.45	0.98	32.40	---	Peak	2	67.83	24.45	40.00	-15.55	40.79	14.90	1.16	32.40	---	Peak	3	94.99	25.95	43.50	-17.55	41.54	15.44	1.37	32.40	---	Peak	4	300.63	26.54	46.00	-19.46	37.03	19.35	2.56	32.40	---	Peak	5	390.84	32.15	46.00	-13.85	39.95	21.65	2.95	32.40	---	Peak	6	559.62	33.20	46.00	-12.80	37.01	25.31	3.28	32.40	---	Peak	 <p>Level (dBuV/m) vs Frequency (MHz) for Vertical polarization. The plot shows a blue signal line with several peaks labeled 1 through 6. A red stepped line represents the 5G BAND 4 limit, starting at 42.5 dBuV/m and increasing to 55.0 dBuV/m. The signal peaks are generally below the limit line.</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Over (dB)</th> <th>ReadAntenna Level (dBuV)</th> <th>Cable Loss Factor (dB/m)</th> <th>Preamp Loss Factor (dB)</th> <th>A/Pos (cm)</th> <th>T/Pos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>30.00</td><td>28.51</td><td>40.00</td><td>-11.49</td><td>34.41</td><td>25.74</td><td>0.76</td><td>32.40</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>48.43</td><td>31.48</td><td>40.00</td><td>-8.52</td><td>47.45</td><td>15.45</td><td>0.98</td><td>32.40</td><td>---</td><td>Peak</td></tr> <tr><td>3</td><td>120.21</td><td>25.75</td><td>43.50</td><td>-17.75</td><td>38.97</td><td>17.55</td><td>1.63</td><td>32.40</td><td>---</td><td>Peak</td></tr> <tr><td>4</td><td>180.35</td><td>22.49</td><td>43.50</td><td>-21.01</td><td>37.84</td><td>15.09</td><td>1.96</td><td>32.40</td><td>---</td><td>Peak</td></tr> <tr><td>5</td><td>400.54</td><td>32.94</td><td>46.00</td><td>-13.06</td><td>40.45</td><td>21.89</td><td>3.00</td><td>32.40</td><td>---</td><td>Peak</td></tr> <tr><td>6</td><td>561.56</td><td>30.40</td><td>46.00</td><td>-15.60</td><td>34.14</td><td>25.36</td><td>3.30</td><td>32.40</td><td>---</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	ReadAntenna Level (dBuV)	Cable Loss Factor (dB/m)	Preamp Loss Factor (dB)	A/Pos (cm)	T/Pos (deg)	Remark	1	30.00	28.51	40.00	-11.49	34.41	25.74	0.76	32.40	---	Peak	2	48.43	31.48	40.00	-8.52	47.45	15.45	0.98	32.40	---	Peak	3	120.21	25.75	43.50	-17.75	38.97	17.55	1.63	32.40	---	Peak	4	180.35	22.49	43.50	-21.01	37.84	15.09	1.96	32.40	---	Peak	5	400.54	32.94	46.00	-13.06	40.45	21.89	3.00	32.40	---	Peak	6	561.56	30.40	46.00	-15.60	34.14	25.36	3.30	32.40	---	Peak
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	ReadAntenna Level (dBuV)	Cable Loss Factor (dB/m)	Preamp Loss Factor (dB)	A/Pos (cm)	T/Pos (deg)	Remark																																																																																																																																																		
1	48.43	28.89	40.00	-11.11	44.86	15.45	0.98	32.40	---	Peak																																																																																																																																																		
2	67.83	24.45	40.00	-15.55	40.79	14.90	1.16	32.40	---	Peak																																																																																																																																																		
3	94.99	25.95	43.50	-17.55	41.54	15.44	1.37	32.40	---	Peak																																																																																																																																																		
4	300.63	26.54	46.00	-19.46	37.03	19.35	2.56	32.40	---	Peak																																																																																																																																																		
5	390.84	32.15	46.00	-13.85	39.95	21.65	2.95	32.40	---	Peak																																																																																																																																																		
6	559.62	33.20	46.00	-12.80	37.01	25.31	3.28	32.40	---	Peak																																																																																																																																																		
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	ReadAntenna Level (dBuV)	Cable Loss Factor (dB/m)	Preamp Loss Factor (dB)	A/Pos (cm)	T/Pos (deg)	Remark																																																																																																																																																		
1	30.00	28.51	40.00	-11.49	34.41	25.74	0.76	32.40	---	Peak																																																																																																																																																		
2	48.43	31.48	40.00	-8.52	47.45	15.45	0.98	32.40	---	Peak																																																																																																																																																		
3	120.21	25.75	43.50	-17.75	38.97	17.55	1.63	32.40	---	Peak																																																																																																																																																		
4	180.35	22.49	43.50	-21.01	37.84	15.09	1.96	32.40	---	Peak																																																																																																																																																		
5	400.54	32.94	46.00	-13.06	40.45	21.89	3.00	32.40	---	Peak																																																																																																																																																		
6	561.56	30.40	46.00	-15.60	34.14	25.36	3.30	32.40	---	Peak																																																																																																																																																		

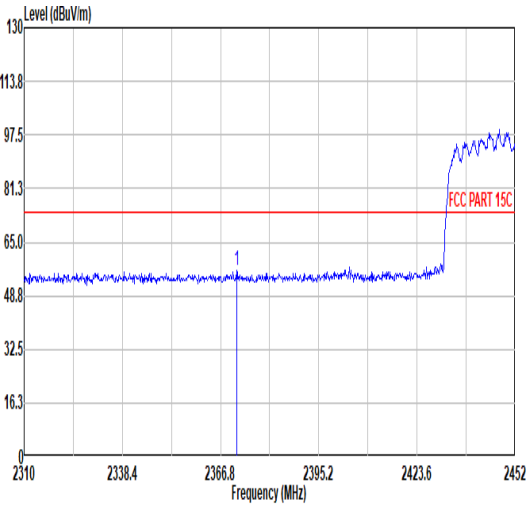
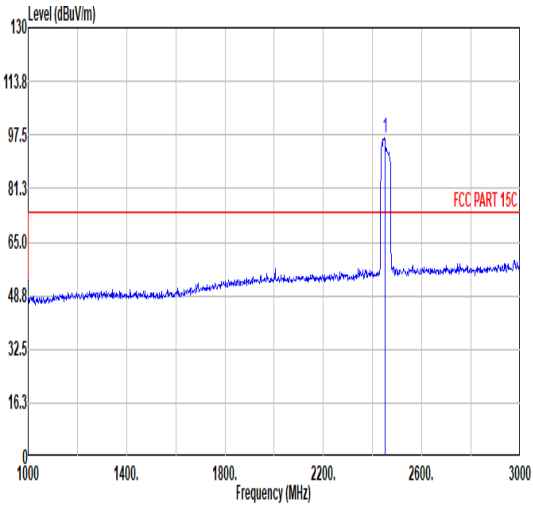
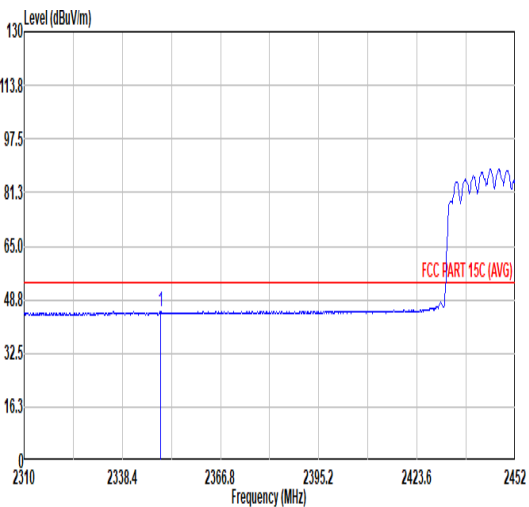
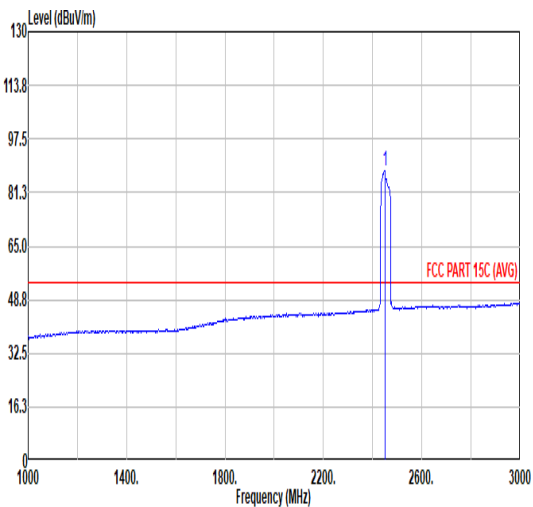


Mode	65																																																																													
	Band Edge – WLAN 2.4G-L																																																																													
	Co-location																																																																													
ANT	ANT 4B+5A																																																																													
Pol.	Horizontal	Fundamental																																																																												
Peak	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2371.49</td> <td>56.19</td> <td>74.00</td> <td>-17.81</td> <td>41.31</td> <td>31.94</td> <td>7.84</td> <td>30.90</td> <td>6.00</td> <td>157 130 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2371.49	56.19	74.00	-17.81	41.31	31.94	7.84	30.90	6.00	157 130 PEAK	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2452.00</td> <td>96.89</td> <td>-----</td> <td>-----</td> <td>81.62</td> <td>32.07</td> <td>7.95</td> <td>30.75</td> <td>6.00</td> <td>157 130 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2452.00	96.89	-----	-----	81.62	32.07	7.95	30.75	6.00	157 130 PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 2371.49	56.19	74.00	-17.81	41.31	31.94	7.84	30.90	6.00	157 130 PEAK																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 2452.00	96.89	-----	-----	81.62	32.07	7.95	30.75	6.00	157 130 PEAK																																																																					
Avg	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2349.48</td> <td>45.31</td> <td>54.00</td> <td>-8.69</td> <td>30.55</td> <td>31.89</td> <td>7.79</td> <td>30.92</td> <td>6.00</td> <td>157 130 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2349.48	45.31	54.00	-8.69	30.55	31.89	7.79	30.92	6.00	157 130 AVERAGE	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2452.00</td> <td>87.91</td> <td>-----</td> <td>-----</td> <td>72.64</td> <td>32.07</td> <td>7.95</td> <td>30.75</td> <td>6.00</td> <td>157 130 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2452.00	87.91	-----	-----	72.64	32.07	7.95	30.75	6.00	157 130 AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 2349.48	45.31	54.00	-8.69	30.55	31.89	7.79	30.92	6.00	157 130 AVERAGE																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 2452.00	87.91	-----	-----	72.64	32.07	7.95	30.75	6.00	157 130 AVERAGE																																																																					



	65																																													
Mode	Band Edge – WLAN 2.4G-R																																													
	Co-location																																													
ANT	ANT 4B+5A																																													
Pol.	Horizontal	Fundamental																																												
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2494.67</td> <td>57.52</td> <td>74.00</td> <td>-16.48</td> <td>41.99</td> <td>32.14</td> <td>8.00</td> <td>30.61</td> <td>6.00</td> <td>157</td> <td>130</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2494.67	57.52	74.00	-16.48	41.99	32.14	8.00	30.61	6.00	157	130	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																				
1	2494.67	57.52	74.00	-16.48	41.99	32.14	8.00	30.61	6.00	157	130	PEAK																																		
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2494.54</td> <td>45.94</td> <td>54.00</td> <td>-8.06</td> <td>30.46</td> <td>32.13</td> <td>7.99</td> <td>30.64</td> <td>6.00</td> <td>157</td> <td>130</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2494.54	45.94	54.00	-8.06	30.46	32.13	7.99	30.64	6.00	157	130	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																				
1	2494.54	45.94	54.00	-8.06	30.46	32.13	7.99	30.64	6.00	157	130	AVERAGE																																		

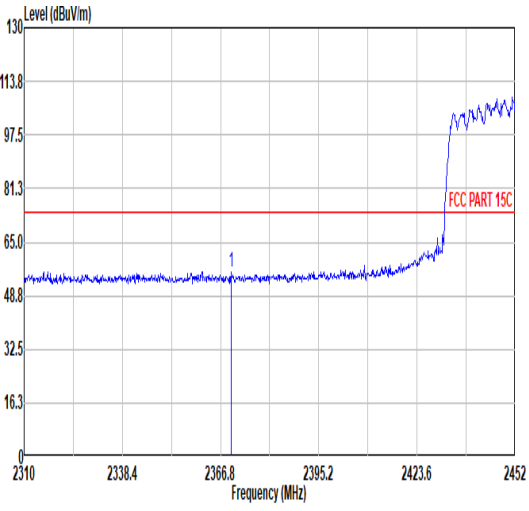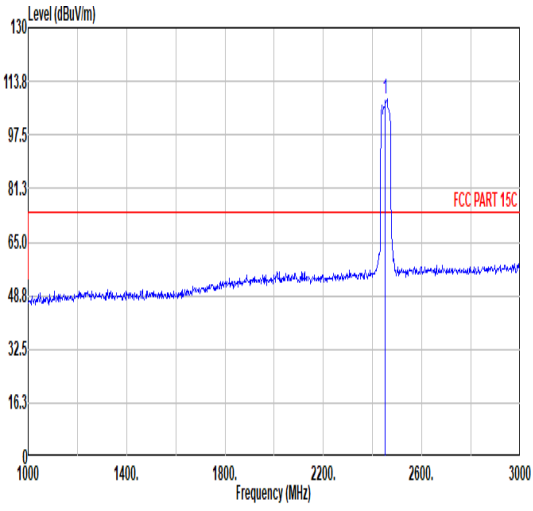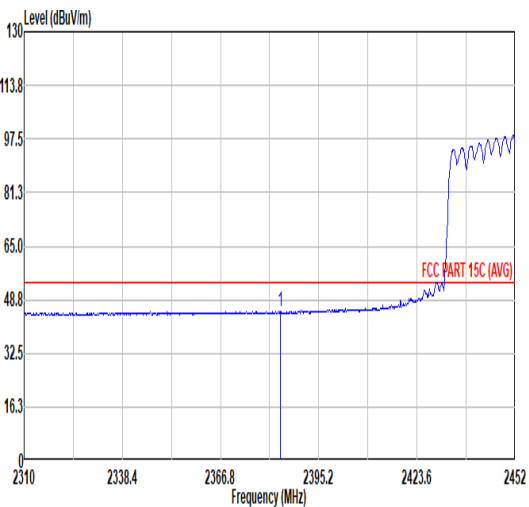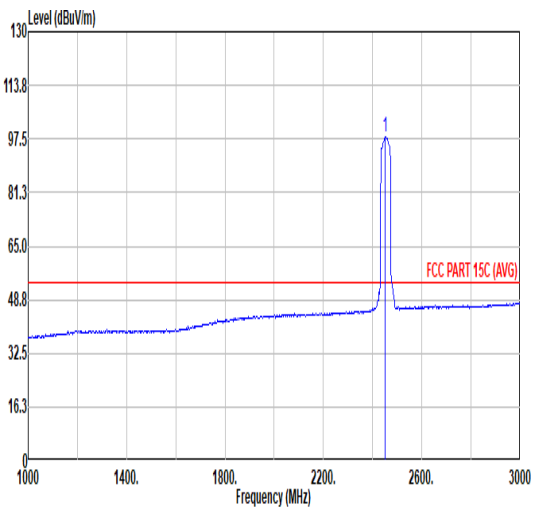

Mode	65																																																																																			
	Band Edge – WLAN 2.4G-L																																																																																			
	Co-location																																																																																			
ANT	ANT 4B+5A																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2369.78</td> <td>56.13</td> <td>74.00</td> <td>-17.87</td> <td>41.27</td> <td>31.93</td> <td>7.83</td> <td>30.90</td> <td>6.00</td> <td>373</td> <td>176</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2369.78	56.13	74.00	-17.87	41.27	31.93	7.83	30.90	6.00	373	176	PEAK	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2452.00</td> <td>108.57</td> <td>-----</td> <td>-----</td> <td>93.23</td> <td>32.09</td> <td>7.96</td> <td>30.71</td> <td>6.00</td> <td>373</td> <td>176</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	108.57	-----	-----	93.23	32.09	7.96	30.71	6.00	373	176	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2369.78	56.13	74.00	-17.87	41.27	31.93	7.83	30.90	6.00	373	176	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2452.00	108.57	-----	-----	93.23	32.09	7.96	30.71	6.00	373	176	PEAK																																																																								
Avg	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2304.12</td> <td>45.25</td> <td>54.00</td> <td>-8.75</td> <td>30.31</td> <td>31.97</td> <td>7.86</td> <td>30.09</td> <td>6.00</td> <td>373</td> <td>176</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2304.12	45.25	54.00	-8.75	30.31	31.97	7.86	30.09	6.00	373	176	AVERAGE	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2452.00</td> <td>98.11</td> <td>-----</td> <td>-----</td> <td>82.81</td> <td>32.08</td> <td>7.95</td> <td>30.73</td> <td>6.00</td> <td>373</td> <td>176</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	98.11	-----	-----	82.81	32.08	7.95	30.73	6.00	373	176	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2304.12	45.25	54.00	-8.75	30.31	31.97	7.86	30.09	6.00	373	176	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2452.00	98.11	-----	-----	82.81	32.08	7.95	30.73	6.00	373	176	AVERAGE																																																																								



Mode	65																																					
	Band Edge – WLAN 2.4G-R																																					
	Co-location																																					
ANT	ANT 4B+5A																																					
Pol.	Vertical	Fundamental																																				
Peak	<table border="1" data-bbox="268 1131 774 1254"> <thead> <tr> <th>Limit Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Read Level</th> <th>Ant Level</th> <th>Cable Factor</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2484.64</td> <td>64.28</td> <td>74.00</td> <td>-9.72</td> <td>48.80</td> <td>32.13</td> <td>7.99</td> <td>30.64</td> <td>6.00</td> <td>373</td> <td>176</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Freq	Level	Line	Margin	Read Level	Ant Level	Cable Factor	Preamp Loss	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2484.64	64.28	74.00	-9.72	48.80	32.13	7.99	30.64	6.00	373	176	PEAK	Blank
Limit Freq	Level	Line	Margin	Read Level	Ant Level	Cable Factor	Preamp Loss	Aux Factor	APos	TPos	Remark																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																												
1 2484.64	64.28	74.00	-9.72	48.80	32.13	7.99	30.64	6.00	373	176	PEAK																											
Avg	<table border="1" data-bbox="268 1809 774 1933"> <thead> <tr> <th>Limit Freq</th> <th>Level</th> <th>Over Line</th> <th>Limit</th> <th>Read Level</th> <th>Ant Level</th> <th>Cable Factor</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2483.63</td> <td>50.92</td> <td>54.00</td> <td>-3.08</td> <td>35.45</td> <td>32.13</td> <td>7.99</td> <td>30.65</td> <td>6.00</td> <td>373</td> <td>176</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Freq	Level	Over Line	Limit	Read Level	Ant Level	Cable Factor	Preamp Loss	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2483.63	50.92	54.00	-3.08	35.45	32.13	7.99	30.65	6.00	373	176	AVERAGE	Blank
Limit Freq	Level	Over Line	Limit	Read Level	Ant Level	Cable Factor	Preamp Loss	Aux Factor	APos	TPos	Remark																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																												
1 2483.63	50.92	54.00	-3.08	35.45	32.13	7.99	30.65	6.00	373	176	AVERAGE																											



	65																																																																																																
Mode	Harmonic-WLAN 2.4G																																																																																																
	Co-location																																																																																																
ANT	ANT 4B+5A																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg																																																																																																	
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4904.00</td> <td>43.77</td> <td>74.00</td> <td>-30.23</td> <td>64.09</td> <td>34.70</td> <td>10.42</td> <td>65.44</td> <td>300</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7356.00</td> <td>44.30</td> <td>74.00</td> <td>-29.70</td> <td>60.17</td> <td>36.57</td> <td>12.83</td> <td>65.27</td> <td>300</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	4904.00	43.77	74.00	-30.23	64.09	34.70	10.42	65.44	300	360	PEAK	2	7356.00	44.30	74.00	-29.70	60.17	36.57	12.83	65.27	300	360	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4904.00</td> <td>43.31</td> <td>74.00</td> <td>-30.69</td> <td>63.63</td> <td>34.70</td> <td>10.42</td> <td>65.44</td> <td>100</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7356.00</td> <td>43.77</td> <td>74.00</td> <td>-30.23</td> <td>59.64</td> <td>36.57</td> <td>12.83</td> <td>65.27</td> <td>100</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	4904.00	43.31	74.00	-30.69	63.63	34.70	10.42	65.44	100	360	PEAK	2	7356.00	43.77	74.00	-30.23	59.64	36.57	12.83	65.27	100	360
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																										
1	4904.00	43.77	74.00	-30.23	64.09	34.70	10.42	65.44	300	360	PEAK																																																																																						
2	7356.00	44.30	74.00	-29.70	60.17	36.57	12.83	65.27	300	360	PEAK																																																																																						
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																										
1	4904.00	43.31	74.00	-30.69	63.63	34.70	10.42	65.44	100	360	PEAK																																																																																						
2	7356.00	43.77	74.00	-30.23	59.64	36.57	12.83	65.27	100	360	PEAK																																																																																						



		65																																																																																																	
Mode	Band Edge – WLAN 5G-L																																																																																																		
	Co-location																																																																																																		
ANT	ANT 4B+5A																																																																																																		
Pol.	Horizontal	Fundamental																																																																																																	
Peak	<p>Level (dBuV/m) vs Frequency (MHz) plot for Peak Horizontal. Shows a signal level around 65 dBuV/m with a red limit line at 65 dBuV/m. A peak is visible at 5139.06 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5139.06</td> <td>58.26</td> <td>74.00</td> <td>-15.74</td> <td>42.56</td> <td>34.38</td> <td>10.62</td> <td>29.30</td> <td>0.00</td> <td>356</td> <td>63</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5139.06	58.26	74.00	-15.74	42.56	34.38	10.62	29.30	0.00	356	63	PEAK	<p>Peak Fundamental Spectrum Plot. Shows a signal level around 65 dBuV/m with a red limit line at 65 dBuV/m. A peak is visible at 2443.20 MHz, labeled 'WLAN 2.4G Fundamental Signal'.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2443.20</td> <td>94.38</td> <td></td> <td>85.87</td> <td>32.06</td> <td>7.21</td> <td>30.76</td> <td>0.00</td> <td>356</td> <td>63</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5290.00</td> <td>96.65</td> <td></td> <td>88.86</td> <td>34.50</td> <td>10.76</td> <td>29.46</td> <td>0.00</td> <td>356</td> <td>63</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2443.20	94.38		85.87	32.06	7.21	30.76	0.00	356	63	Peak	2	5290.00	96.65		88.86	34.50	10.76	29.46	0.00	356	63	Peak	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5139.06	58.26	74.00	-15.74	42.56	34.38	10.62	29.30	0.00	356	63	PEAK																																																																																							
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Factor																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																									
1	2443.20	94.38		85.87	32.06	7.21	30.76	0.00	356	63	Peak																																																																																								
2	5290.00	96.65		88.86	34.50	10.76	29.46	0.00	356	63	Peak																																																																																								
Avg	<p>Avg Horizontal Spectrum Plot. Shows a signal level around 48 dBuV/m with a red limit line at 48 dBuV/m. A peak is visible at 5054.97 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5054.97</td> <td>47.76</td> <td>54.00</td> <td>-6.24</td> <td>32.20</td> <td>34.21</td> <td>10.58</td> <td>29.23</td> <td>0.00</td> <td>356</td> <td>63</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5054.97	47.76	54.00	-6.24	32.20	34.21	10.58	29.23	0.00	356	63	AVERAGE	<p>Avg Fundamental Spectrum Plot. Shows a signal level around 48 dBuV/m with a red limit line at 48 dBuV/m. A peak is visible at 2449.20 MHz, labeled 'WLAN 2.4G Fundamental Signal'.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2449.20</td> <td>86.32</td> <td></td> <td>77.77</td> <td>32.07</td> <td>7.22</td> <td>30.74</td> <td>0.00</td> <td>356</td> <td>63</td> <td>Average</td> </tr> <tr> <td>2</td> <td>5290.00</td> <td>87.45</td> <td></td> <td>71.66</td> <td>34.50</td> <td>10.75</td> <td>29.46</td> <td>0.00</td> <td>356</td> <td>63</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2449.20	86.32		77.77	32.07	7.22	30.74	0.00	356	63	Average	2	5290.00	87.45		71.66	34.50	10.75	29.46	0.00	356	63	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																									
1	5054.97	47.76	54.00	-6.24	32.20	34.21	10.58	29.23	0.00	356	63	AVERAGE																																																																																							
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Factor																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																									
1	2449.20	86.32		77.77	32.07	7.22	30.74	0.00	356	63	Average																																																																																								
2	5290.00	87.45		71.66	34.50	10.75	29.46	0.00	356	63	AVERAGE																																																																																								



	65																																																	
Mode	Band Edge – WLAN 5G-R																																																	
	Co-location																																																	
ANT	ANT 4B+5A																																																	
Pol.	Horizontal	Fundamental																																																
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5448.87</td> <td>56.79</td> <td>74.00</td> <td>-17.21</td> <td>40.92</td> <td>34.52</td> <td>10.96</td> <td>29.61</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0.00</td> <td>356</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>63 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5448.87	56.79	74.00	-17.21	40.92	34.52	10.96	29.61							0.00	356								63 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																											
1 5448.87	56.79	74.00	-17.21	40.92	34.52	10.96	29.61																																											
						0.00	356																																											
							63 PEAK																																											
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5350.01</td> <td>46.05</td> <td>54.00</td> <td>-7.95</td> <td>30.24</td> <td>34.50</td> <td>10.83</td> <td>29.52</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0.00</td> <td>356</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>63 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5350.01	46.05	54.00	-7.95	30.24	34.50	10.83	29.52							0.00	356								63 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																											
1 5350.01	46.05	54.00	-7.95	30.24	34.50	10.83	29.52																																											
						0.00	356																																											
							63 AVERAGE																																											



		65																																																																																												
Mode	Band Edge – WLAN 5G-L																																																																																													
	Co-location																																																																																													
ANT	ANT 4B+5A																																																																																													
Pol.	Vertical	Fundamental																																																																																												
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5090.89</td> <td>57.76</td> <td>74.00</td> <td>-16.24</td> <td>42.13</td> <td>34.28</td> <td>10.60</td> <td>29.25</td> <td>0.00</td> <td>127</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5090.89	57.76	74.00	-16.24	42.13	34.28	10.60	29.25	0.00	127	360	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2443.20</td> <td>100.62</td> <td></td> <td>92.11</td> <td>32.06</td> <td>7.21</td> <td>30.76</td> <td>0.00</td> <td>127</td> <td>360</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5290.00</td> <td>100.62</td> <td></td> <td>84.82</td> <td>34.50</td> <td>10.76</td> <td>29.46</td> <td>0.00</td> <td>127</td> <td>360</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2443.20	100.62		92.11	32.06	7.21	30.76	0.00	127	360	Peak	2	5290.00	100.62		84.82	34.50	10.76	29.46	0.00	127	360	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																						
1	5090.89	57.76	74.00	-16.24	42.13	34.28	10.60	29.25	0.00	127	360	PEAK																																																																																		
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																						
1	2443.20	100.62		92.11	32.06	7.21	30.76	0.00	127	360	Peak																																																																																			
2	5290.00	100.62		84.82	34.50	10.76	29.46	0.00	127	360	Peak																																																																																			
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5076.72</td> <td>47.82</td> <td>54.00</td> <td>-6.18</td> <td>32.23</td> <td>34.25</td> <td>10.59</td> <td>29.25</td> <td>0.00</td> <td>127</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5076.72	47.82	54.00	-6.18	32.23	34.25	10.59	29.25	0.00	127	360	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2449.20</td> <td>89.71</td> <td></td> <td>81.16</td> <td>32.07</td> <td>7.22</td> <td>30.74</td> <td>0.00</td> <td>127</td> <td>360</td> <td>Average</td> </tr> <tr> <td>2</td> <td>5290.00</td> <td>90.23</td> <td></td> <td>74.43</td> <td>34.50</td> <td>10.76</td> <td>29.46</td> <td>0.00</td> <td>127</td> <td>360</td> <td>Average</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2449.20	89.71		81.16	32.07	7.22	30.74	0.00	127	360	Average	2	5290.00	90.23		74.43	34.50	10.76	29.46	0.00	127	360	Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																						
1	5076.72	47.82	54.00	-6.18	32.23	34.25	10.59	29.25	0.00	127	360	AVERAGE																																																																																		
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																						
1	2449.20	89.71		81.16	32.07	7.22	30.74	0.00	127	360	Average																																																																																			
2	5290.00	90.23		74.43	34.50	10.76	29.46	0.00	127	360	Average																																																																																			







Mode	65																																												
	Band Edge – WLAN 5G-R																																												
	Co-location																																												
ANT	ANT 4B+5A																																												
Pol.	Vertical	Fundamental																																											
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5457.88</td> <td>55.91</td> <td>74.00</td> <td>-18.09</td> <td>40.02</td> <td>34.53</td> <td>10.98</td> <td>29.62</td> <td>0.00</td> <td>127</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5457.88	55.91	74.00	-18.09	40.02	34.53	10.98	29.62	0.00	127	360	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																			
1 5457.88	55.91	74.00	-18.09	40.02	34.53	10.98	29.62	0.00	127	360	PEAK																																		
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5350.44</td> <td>47.12</td> <td>54.00</td> <td>-6.88</td> <td>31.31</td> <td>34.50</td> <td>10.83</td> <td>29.52</td> <td>0.00</td> <td>127</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5350.44	47.12	54.00	-6.88	31.31	34.50	10.83	29.52	0.00	127	360	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																			
1 5350.44	47.12	54.00	-6.88	31.31	34.50	10.83	29.52	0.00	127	360	AVERAGE																																		



Mode	65																																																																																							
	Harmonic- WLAN 5G																																																																																							
	Co-location																																																																																							
ANT	ANT 4B+5A																																																																																							
Pol.	Horizontal	Vertical																																																																																						
Peak																																																																																								
Avg																																																																																								
	<table border="1"> <thead> <tr> <th rowspan="2">Limit</th> <th colspan="2">Read</th> <th rowspan="2">Ant</th> <th rowspan="2">Cable</th> <th rowspan="2">Preamp</th> <th rowspan="2">Aux</th> <th rowspan="2">APos</th> <th rowspan="2">TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> </tr> </thead> <tbody> <tr> <td></td> <td>MHz</td> <td>dBuV/m</td> <td>dBuV/m</td> <td>dB</td> <td>dBuV</td> <td>dB/m</td> <td>dB</td> <td>dB</td> <td>dB</td> <td>cm</td> <td>deg</td> <td></td> </tr> <tr> <td>1</td> <td>10580.00</td> <td>45.64</td> <td>68.30</td> <td>-22.66</td> <td>58.55</td> <td>37.64</td> <td>15.67</td> <td>66.22</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	10580.00	45.64	68.30	-22.66	58.55	37.64	15.67	66.22	0.00	100	0	PEAK	<table border="1"> <thead> <tr> <th rowspan="2">Limit</th> <th colspan="2">Read</th> <th rowspan="2">Ant</th> <th rowspan="2">Cable</th> <th rowspan="2">Preamp</th> <th rowspan="2">Aux</th> <th rowspan="2">APos</th> <th rowspan="2">TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> </tr> </thead> <tbody> <tr> <td></td> <td>MHz</td> <td>dBuV/m</td> <td>dBuV/m</td> <td>dB</td> <td>dBuV</td> <td>dB/m</td> <td>dB</td> <td>dB</td> <td>dB</td> <td>cm</td> <td>deg</td> <td></td> </tr> <tr> <td>1</td> <td>10580.00</td> <td>45.33</td> <td>68.30</td> <td>-22.97</td> <td>58.24</td> <td>37.64</td> <td>15.67</td> <td>66.22</td> <td>0.00</td> <td>100</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	10580.00	45.33	68.30	-22.97	58.24	37.64	15.67	66.22	0.00	100	360	PEAK
Limit	Read		Ant	Cable								Preamp	Aux	APos	TPos	Remark																																																																								
	Freq	Level			Line Margin	Level	Factor	Loss Factor	Factor																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																													
1	10580.00	45.64	68.30	-22.66	58.55	37.64	15.67	66.22	0.00	100	0	PEAK																																																																												
Limit	Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
	Freq	Level								Line Margin	Level	Factor	Loss Factor	Factor																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																													
1	10580.00	45.33	68.30	-22.97	58.24	37.64	15.67	66.22	0.00	100	360	PEAK																																																																												

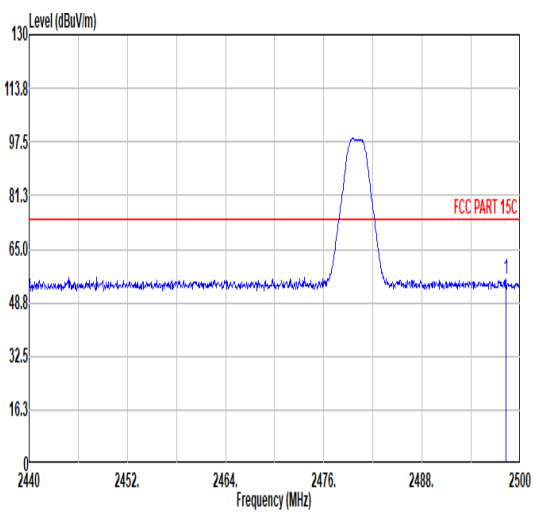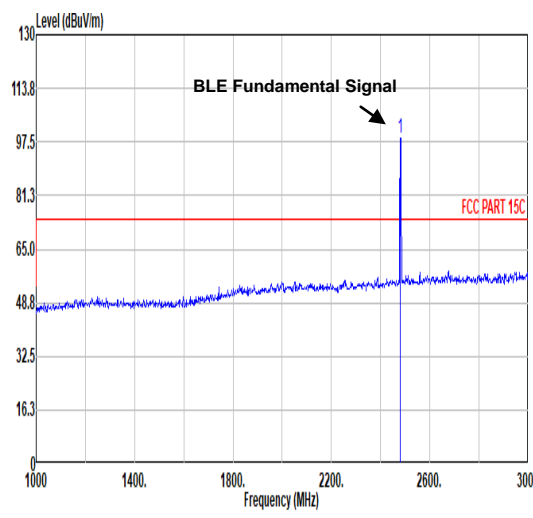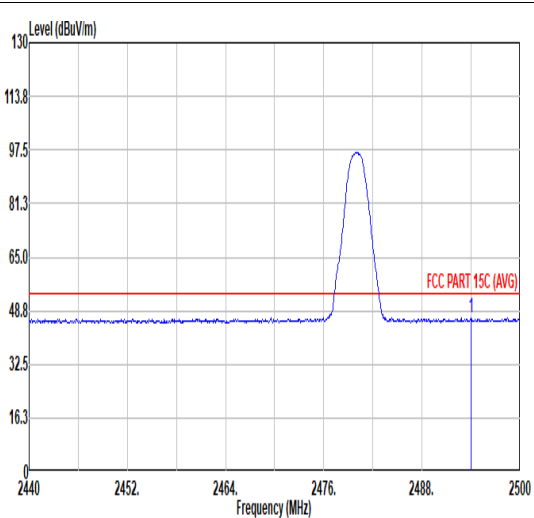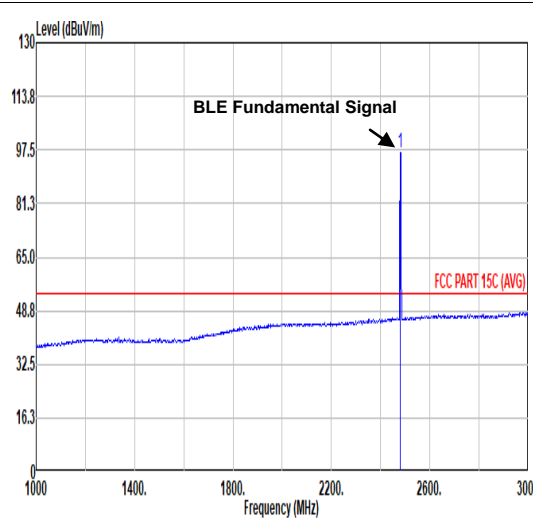

Mode	66																																																																																			
	Band Edge -BLE																																																																																			
	Co-location																																																																																			
ANT	ANT 4B+5A																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot showing a peak at approximately 2476 MHz. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 2440 to 2500 MHz. A red horizontal line indicates the FCC PART 15C limit at approximately 74 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2498.26</td> <td>56.00</td> <td>74.00</td> <td>-18.00</td> <td>41.13</td> <td>32.15</td> <td>7.32</td> <td>30.60</td> <td>6.00</td> <td>305</td> <td>154</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2498.26	56.00	74.00	-18.00	41.13	32.15	7.32	30.60	6.00	305	154	PEAK	 <p>BLE Fundamental Signal vs Frequency (MHz) plot showing a sharp peak at approximately 2476 MHz. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 1000 to 3000 MHz. A red horizontal line indicates the FCC PART 15C limit at approximately 74 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>98.66</td> <td>-----</td> <td>-----</td> <td>83.92</td> <td>32.12</td> <td>7.28</td> <td>30.66</td> <td>6.00</td> <td>305</td> <td>154</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	98.66	-----	-----	83.92	32.12	7.28	30.66	6.00	305	154	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2498.26	56.00	74.00	-18.00	41.13	32.15	7.32	30.60	6.00	305	154	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2480.00	98.66	-----	-----	83.92	32.12	7.28	30.66	6.00	305	154	PEAK																																																																								
Avg	 <p>Horizontal Average Spectrum Plot showing a peak at approximately 2476 MHz. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 2440 to 2500 MHz. A red horizontal line indicates the FCC PART 15C (AVG) limit at approximately 54 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2494.00</td> <td>46.52</td> <td>54.00</td> <td>-7.48</td> <td>31.69</td> <td>32.14</td> <td>7.31</td> <td>30.62</td> <td>6.00</td> <td>305</td> <td>154</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2494.00	46.52	54.00	-7.48	31.69	32.14	7.31	30.62	6.00	305	154	AVERAGE	 <p>BLE Fundamental Signal Average Spectrum Plot showing a sharp peak at approximately 2476 MHz. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 1000 to 3000 MHz. A red horizontal line indicates the FCC PART 15C (AVG) limit at approximately 54 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>96.48</td> <td>-----</td> <td>-----</td> <td>81.74</td> <td>32.12</td> <td>7.28</td> <td>30.66</td> <td>6.00</td> <td>305</td> <td>154</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	96.48	-----	-----	81.74	32.12	7.28	30.66	6.00	305	154	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2494.00	46.52	54.00	-7.48	31.69	32.14	7.31	30.62	6.00	305	154	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2480.00	96.48	-----	-----	81.74	32.12	7.28	30.66	6.00	305	154	AVERAGE																																																																								







Mode	66																																																																															
	Band Edge - BLE																																																																															
	Co-location																																																																															
ANT	ANT 4B+5A																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2483.56</td> <td>59.60</td> <td>74.00</td> <td>-14.40</td> <td>44.83</td> <td>32.13</td> <td>7.29</td> <td>30.65</td> <td>6.00</td> <td>100</td> <td>191 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2483.56	59.60	74.00	-14.40	44.83	32.13	7.29	30.65	6.00	100	191 PEAK	<p>BLE Fundamental Signal</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2480.00</td> <td>107.72</td> <td>-----</td> <td>-----</td> <td>92.98</td> <td>32.12</td> <td>7.28</td> <td>30.66</td> <td>6.00</td> <td>100</td> <td>191 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2480.00	107.72	-----	-----	92.98	32.12	7.28	30.66	6.00	100	191 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 2483.56	59.60	74.00	-14.40	44.83	32.13	7.29	30.65	6.00	100	191 PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 2480.00	107.72	-----	-----	92.98	32.12	7.28	30.66	6.00	100	191 PEAK																																																																						
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2483.56</td> <td>50.26</td> <td>54.00</td> <td>-3.74</td> <td>35.49</td> <td>32.13</td> <td>7.29</td> <td>30.65</td> <td>6.00</td> <td>100</td> <td>191 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2483.56	50.26	54.00	-3.74	35.49	32.13	7.29	30.65	6.00	100	191 AVERAGE	<p>BLE Fundamental Signal</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2480.00</td> <td>105.60</td> <td>-----</td> <td>-----</td> <td>90.86</td> <td>32.12</td> <td>7.28</td> <td>30.66</td> <td>6.00</td> <td>100</td> <td>191 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2480.00	105.60	-----	-----	90.86	32.12	7.28	30.66	6.00	100	191 AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 2483.56	50.26	54.00	-3.74	35.49	32.13	7.29	30.65	6.00	100	191 AVERAGE																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 2480.00	105.60	-----	-----	90.86	32.12	7.28	30.66	6.00	100	191 AVERAGE																																																																						



Mode	66																																																																																																											
	Harmonic - BLE																																																																																																											
	Co-location																																																																																																											
ANT	ANT 4B+5A																																																																																																											
Pol.	Horizontal	Vertical																																																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4960.00</td> <td>42.39</td> <td>74.00</td> <td>-31.61</td> <td>63.24</td> <td>34.10</td> <td>10.50</td> <td>65.45</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7440.00</td> <td>43.98</td> <td>74.00</td> <td>-30.02</td> <td>60.64</td> <td>35.00</td> <td>12.87</td> <td>65.33</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	4960.00	42.39	74.00	-31.61	63.24	34.10	10.50	65.45	0.00	300	0	PEAK	2	7440.00	43.98	74.00	-30.02	60.64	35.00	12.87	65.33	0.00	300	0	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4960.00</td> <td>43.10</td> <td>74.00</td> <td>-30.90</td> <td>63.95</td> <td>34.10</td> <td>10.50</td> <td>65.45</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7440.00</td> <td>45.03</td> <td>74.00</td> <td>-28.97</td> <td>61.69</td> <td>35.00</td> <td>12.87</td> <td>65.33</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	4960.00	43.10	74.00	-30.90	63.95	34.10	10.50	65.45	0.00	100	0	PEAK	2	7440.00	45.03	74.00	-28.97	61.69	35.00	12.87	65.33	0.00	100	0	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																				
1	4960.00	42.39	74.00	-31.61	63.24	34.10	10.50	65.45	0.00	300	0	PEAK																																																																																																
2	7440.00	43.98	74.00	-30.02	60.64	35.00	12.87	65.33	0.00	300	0	PEAK																																																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																				
1	4960.00	43.10	74.00	-30.90	63.95	34.10	10.50	65.45	0.00	100	0	PEAK																																																																																																
2	7440.00	45.03	74.00	-28.97	61.69	35.00	12.87	65.33	0.00	100	0	PEAK																																																																																																

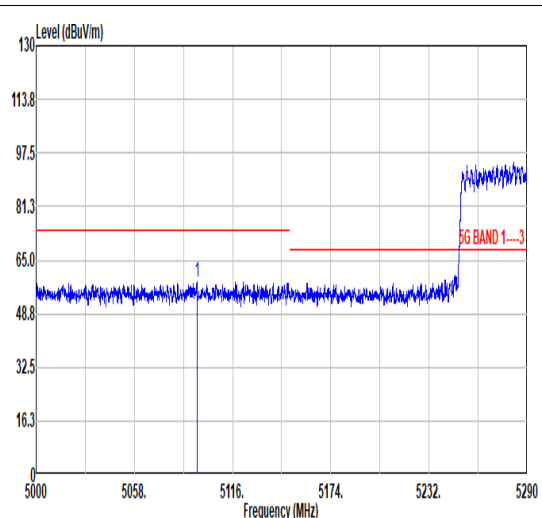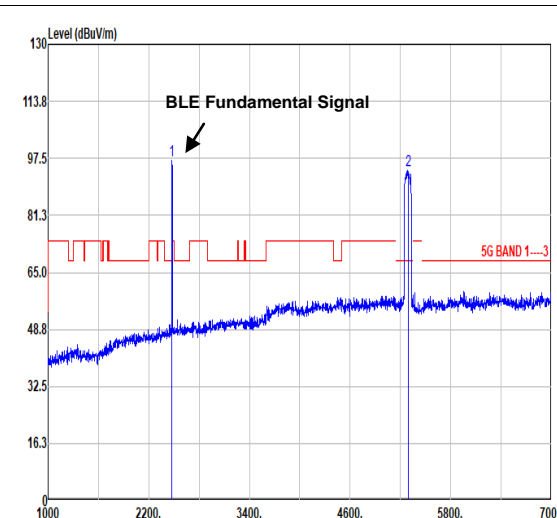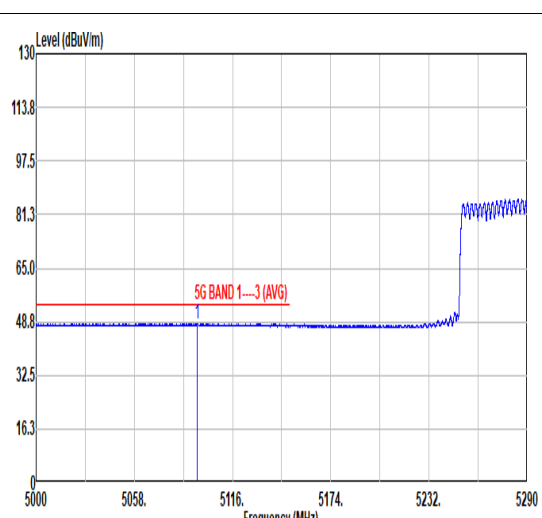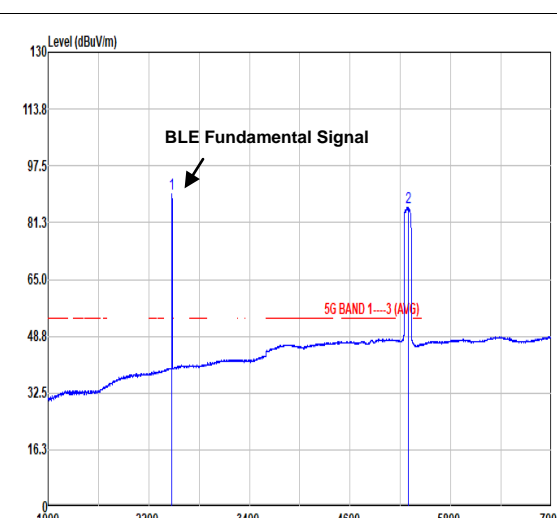

		66																																																																																														
Mode	Band Edge – WLAN 5G-L																																																																																															
	Co-location																																																																																															
ANT	ANT 4B+5A																																																																																															
Pol.	Horizontal	Fundamental																																																																																														
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Peak Horizontal. The plot shows a blue signal line fluctuating around a red limit line labeled '5G BAND 1-3'. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 5000 to 5290 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5094.91</td> <td>58.17</td> <td>74.00</td> <td>-15.83</td> <td>41.32</td> <td>34.29</td> <td>11.82</td> <td>29.26</td> <td>0.00</td> <td>100</td> <td>298</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5094.91	58.17	74.00	-15.83	41.32	34.29	11.82	29.26	0.00	100	298	PEAK	 <p>Peak Fundamental Spectrum Plot. The plot shows a blue signal line with two prominent peaks labeled '1' and '2'. An arrow points to peak '1' with the label 'BLE Fundamental Signal'. A red limit line labeled '5G BAND 1-3' is shown. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 1000 to 7000 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2477.60</td> <td>96.96</td> <td></td> <td>87.52</td> <td>32.12</td> <td>7.98</td> <td>30.66</td> <td>0.00</td> <td>100</td> <td>298</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5290.00</td> <td>93.96</td> <td></td> <td>76.93</td> <td>34.50</td> <td>11.99</td> <td>29.46</td> <td>0.00</td> <td>100</td> <td>298</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2477.60	96.96		87.52	32.12	7.98	30.66	0.00	100	298	Peak	2	5290.00	93.96		76.93	34.50	11.99	29.46	0.00	100	298	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	5094.91	58.17	74.00	-15.83	41.32	34.29	11.82	29.26	0.00	100	298	PEAK																																																																																				
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2477.60	96.96		87.52	32.12	7.98	30.66	0.00	100	298	Peak																																																																																					
2	5290.00	93.96		76.93	34.50	11.99	29.46	0.00	100	298	Peak																																																																																					
Avg	 <p>Avg Horizontal Spectrum Plot. The plot shows a blue signal line with a red limit line labeled '5G BAND 1-3 (AVG)'. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 5000 to 5290 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5095.20</td> <td>48.25</td> <td>54.00</td> <td>-5.75</td> <td>31.40</td> <td>34.29</td> <td>11.82</td> <td>29.26</td> <td>0.00</td> <td>100</td> <td>298</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5095.20	48.25	54.00	-5.75	31.40	34.29	11.82	29.26	0.00	100	298	AVERAGE	 <p>Avg Fundamental Spectrum Plot. The plot shows a blue signal line with two peaks labeled '1' and '2'. An arrow points to peak '1' with the label 'BLE Fundamental Signal'. A red limit line labeled '5G BAND 1-3 (AVG)' is shown. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 1000 to 7000 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2477.60</td> <td>89.59</td> <td></td> <td>80.15</td> <td>32.12</td> <td>7.98</td> <td>30.66</td> <td>0.00</td> <td>100</td> <td>298</td> <td>Average</td> </tr> <tr> <td>2</td> <td>5290.00</td> <td>85.59</td> <td></td> <td>68.56</td> <td>34.50</td> <td>11.99</td> <td>29.46</td> <td>0.00</td> <td>100</td> <td>298</td> <td>Average</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2477.60	89.59		80.15	32.12	7.98	30.66	0.00	100	298	Average	2	5290.00	85.59		68.56	34.50	11.99	29.46	0.00	100	298	Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	5095.20	48.25	54.00	-5.75	31.40	34.29	11.82	29.26	0.00	100	298	AVERAGE																																																																																				
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2477.60	89.59		80.15	32.12	7.98	30.66	0.00	100	298	Average																																																																																					
2	5290.00	85.59		68.56	34.50	11.99	29.46	0.00	100	298	Average																																																																																					





Mode	66																																												
	Band Edge – WLAN 5G-R																																												
	Co-location																																												
ANT	ANT 4B+5A																																												
Pol.	Horizontal	Fundamental																																											
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5352.19</td> <td>58.25</td> <td>74.00</td> <td>-15.75</td> <td>41.22</td> <td>34.50</td> <td>12.05</td> <td>29.52</td> <td>0.00</td> <td>100</td> <td>298</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5352.19	58.25	74.00	-15.75	41.22	34.50	12.05	29.52	0.00	100	298	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																			
1 5352.19	58.25	74.00	-15.75	41.22	34.50	12.05	29.52	0.00	100	298	PEAK																																		
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5354.14</td> <td>47.32</td> <td>54.00</td> <td>-6.68</td> <td>30.29</td> <td>34.50</td> <td>12.05</td> <td>29.52</td> <td>0.00</td> <td>100</td> <td>298</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5354.14	47.32	54.00	-6.68	30.29	34.50	12.05	29.52	0.00	100	298	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																			
1 5354.14	47.32	54.00	-6.68	30.29	34.50	12.05	29.52	0.00	100	298	AVERAGE																																		



		66																																																																																																							
Mode	Band Edge – WLAN 5G-L																																																																																																								
	Co-location																																																																																																								
ANT	ANT 4B+5A																																																																																																								
Pol.	Vertical	Fundamental																																																																																																							
Peak																																																																																																									
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5026.18</td> <td>58.64</td> <td>74.00</td> <td>-15.36</td> <td>41.93</td> <td>34.15</td> <td>11.78</td> <td>29.22</td> <td>0.00</td> <td>106</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5026.18	58.64	74.00	-15.36	41.93	34.15	11.78	29.22	0.00	106	360	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2477.60</td> <td>107.61</td> <td>.....</td> <td>.....</td> <td>98.17</td> <td>32.12</td> <td>7.98</td> <td>30.66</td> <td>0.00</td> <td>106</td> <td>360</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5290.00</td> <td>102.61</td> <td>.....</td> <td>.....</td> <td>85.58</td> <td>34.50</td> <td>11.99</td> <td>29.46</td> <td>0.00</td> <td>106</td> <td>360</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2477.60	107.61	98.17	32.12	7.98	30.66	0.00	106	360	Peak	2	5290.00	102.61	85.58	34.50	11.99	29.46	0.00	106	360
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																															
1	5026.18	58.64	74.00	-15.36	41.93	34.15	11.78	29.22	0.00	106	360	PEAK																																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																															
1	2477.60	107.61	98.17	32.12	7.98	30.66	0.00	106	360	Peak																																																																																													
2	5290.00	102.61	85.58	34.50	11.99	29.46	0.00	106	360	Peak																																																																																													
Avg																																																																																																									
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5008.24</td> <td>48.39</td> <td>54.00</td> <td>-5.61</td> <td>31.55</td> <td>34.28</td> <td>11.81</td> <td>29.25</td> <td>0.00</td> <td>106</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5008.24	48.39	54.00	-5.61	31.55	34.28	11.81	29.25	0.00	106	360	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2477.60</td> <td>100.04</td> <td>.....</td> <td>.....</td> <td>90.60</td> <td>32.12</td> <td>7.98</td> <td>30.66</td> <td>0.00</td> <td>106</td> <td>360</td> <td>Average</td> </tr> <tr> <td>2</td> <td>5290.00</td> <td>94.04</td> <td>.....</td> <td>.....</td> <td>77.01</td> <td>34.50</td> <td>11.99</td> <td>29.46</td> <td>0.00</td> <td>106</td> <td>360</td> <td>Average</td> </tr> </tbody> </table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2477.60	100.04	90.60	32.12	7.98	30.66	0.00	106	360	Average	2	5290.00	94.04	77.01	34.50	11.99	29.46	0.00	106	360
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																															
1	5008.24	48.39	54.00	-5.61	31.55	34.28	11.81	29.25	0.00	106	360	AVERAGE																																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																															
1	2477.60	100.04	90.60	32.12	7.98	30.66	0.00	106	360	Average																																																																																													
2	5290.00	94.04	77.01	34.50	11.99	29.46	0.00	106	360	Average																																																																																													

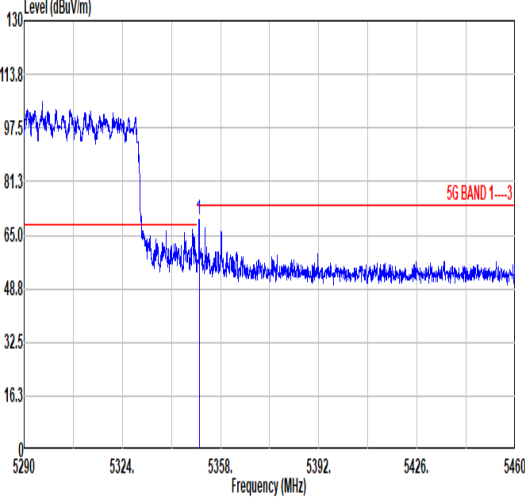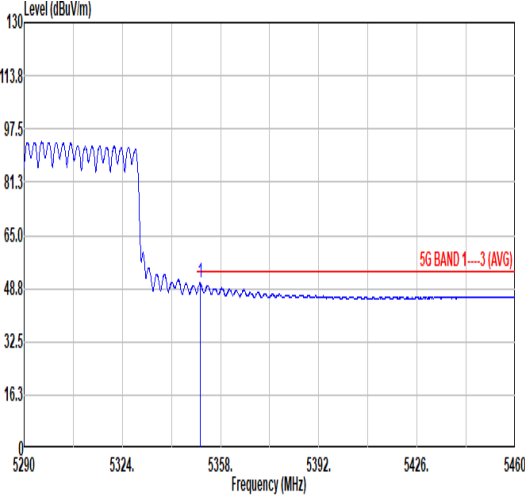

Mode	66																																														
	Band Edge – WLAN 5G-R																																														
	Co-location																																														
ANT	ANT 4B+5A																																														
Pol.	Vertical	Fundamental																																													
Peak	 <table border="1" data-bbox="268 1131 778 1254"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.57</td> <td>69.86</td> <td>74.00</td> <td>-4.14</td> <td>52.83</td> <td>34.50</td> <td>12.05</td> <td>29.52</td> <td>0.00</td> <td>106</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5350.57	69.86	74.00	-4.14	52.83	34.50	12.05	29.52	0.00	106	360	PEAK	Blank	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																					
1	5350.57	69.86	74.00	-4.14	52.83	34.50	12.05	29.52	0.00	106	360	PEAK																																			
Avg	 <table border="1" data-bbox="268 1809 778 1933"> <thead> <tr> <th></th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.86</td> <td>50.53</td> <td>54.00</td> <td>-3.47</td> <td>33.50</td> <td>34.50</td> <td>12.05</td> <td>29.52</td> <td>0.00</td> <td>106</td> <td>360</td> <td>Average</td> </tr> </tbody> </table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5350.86	50.53	54.00	-3.47	33.50	34.50	12.05	29.52	0.00	106	360	Average	Blank
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																					
1	5350.86	50.53	54.00	-3.47	33.50	34.50	12.05	29.52	0.00	106	360	Average																																			




Mode	66																																																																																																																															
	Harmonic_WLAN 5G																																																																																																																															
	Co-location																																																																																																																															
ANT	ANT 4B+5A																																																																																																																															
Pol.	Horizontal	Vertical																																																																																																																														
Peak																																																																																																																																
Avg																																																																																																																																
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 10580.00</td> <td>43.36</td> <td>68.30</td> <td>-24.94</td> <td>54.90</td> <td>37.64</td> <td>17.04</td> <td>66.22</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>100</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>360</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 10580.00	43.36	68.30	-24.94	54.90	37.64	17.04	66.22	0.00									100									360									PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 10580.00</td> <td>42.53</td> <td>68.30</td> <td>-25.77</td> <td>54.07</td> <td>37.64</td> <td>17.04</td> <td>66.22</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>300</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>360</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 10580.00	42.53	68.30	-25.77	54.07	37.64	17.04	66.22	0.00									300									360									PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																								
1 10580.00	43.36	68.30	-24.94	54.90	37.64	17.04	66.22	0.00																																																																																																																								
								100																																																																																																																								
								360																																																																																																																								
								PEAK																																																																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																								
1 10580.00	42.53	68.30	-25.77	54.07	37.64	17.04	66.22	0.00																																																																																																																								
								300																																																																																																																								
								360																																																																																																																								
								PEAK																																																																																																																								



Appendix D. Duty Cycle Plots


Antenna	Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
4a+5a	802.11a	97.07	1.3913	0.7188	0.75KHz
4a+5a	802.11ax HE20 Full RU	96.29	1.0145	0.9857	1KHz
4a+5a	802.11ax HE20 Partial_RU26	99.33	-	-	10Hz
4a+5a	802.11ax HE20 Partial_RU52	99.32	-	-	10Hz
4a+5a	802.11ax HE20 Partial_RU106	97.21	2.4046	0.4159	0.43KHz
4a+5a	802.11ax HE40	92.23	0.5333	1.8750	2KHz
4a+5a	802.11ax HE80	86.34	0.2841	3.5204	3.6KHz
4a+5a	802.11ax HE160	68.18	0.1739	5.7501	5.8kHz

802.11a

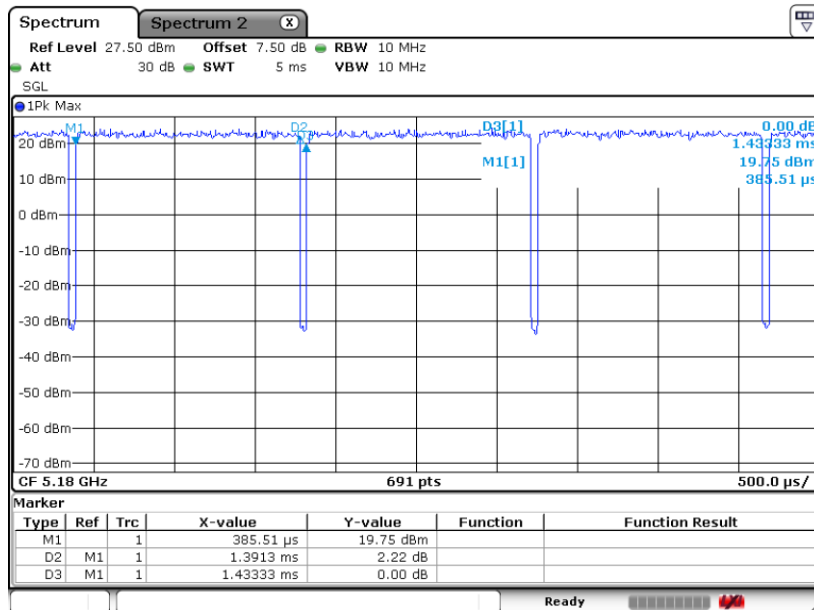




802.11ax HE20 Full RU

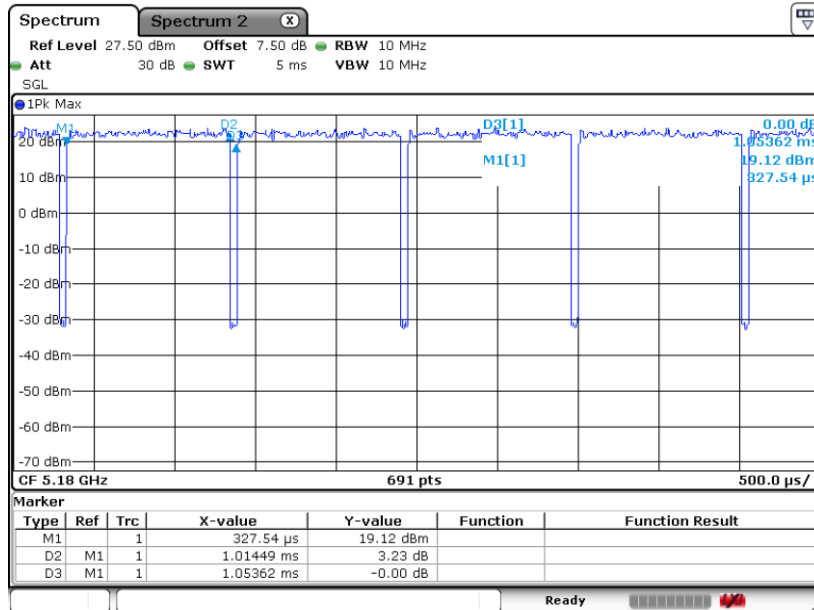


802.11ax HE20 Partial_RU26

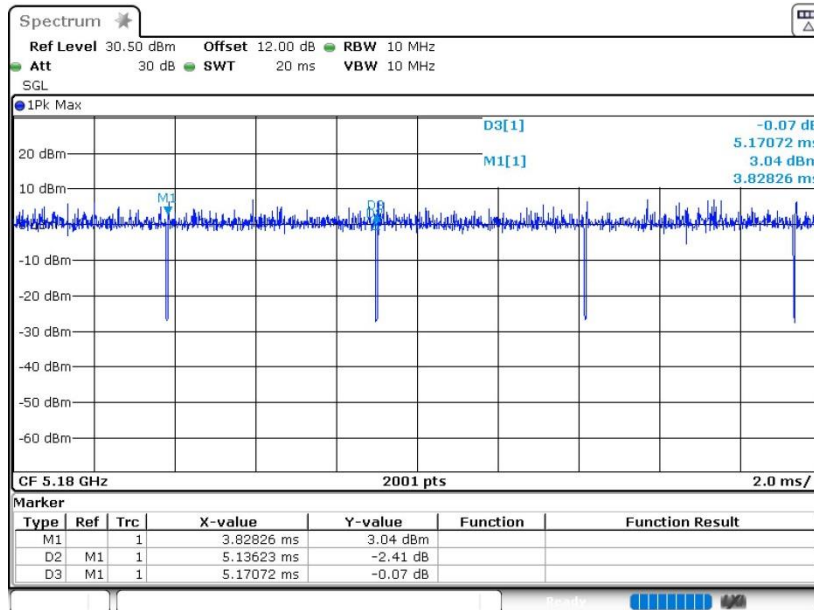




802.11ax HE20 Partial_RU52

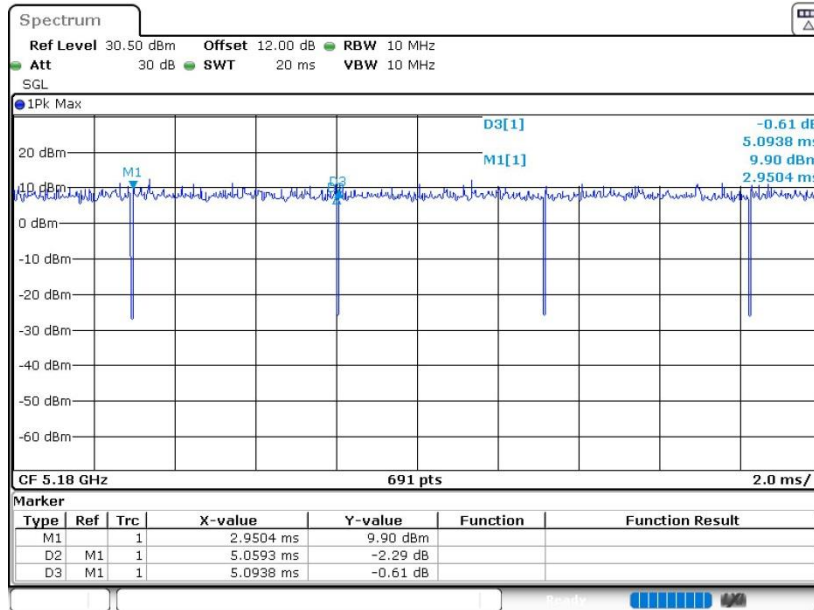


802.11ax HE20 Partial_RU106

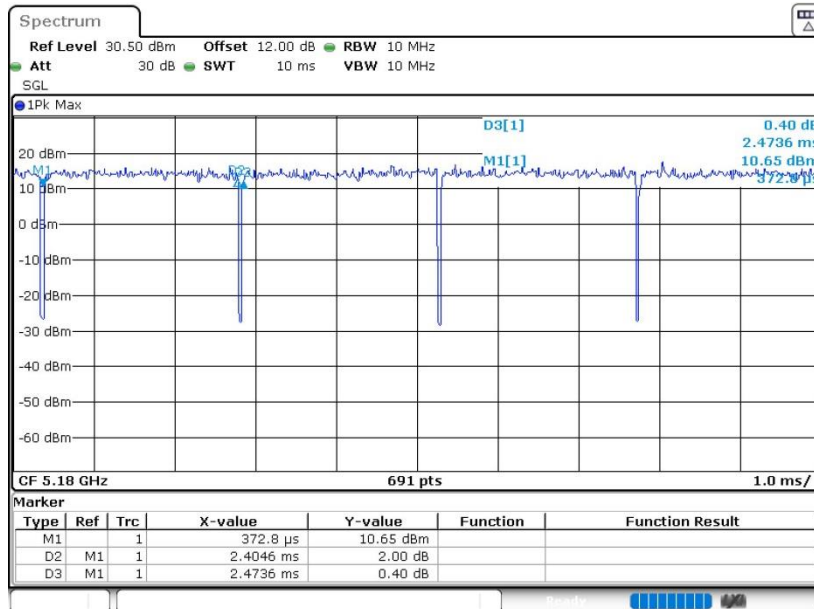




802.11ax HE40

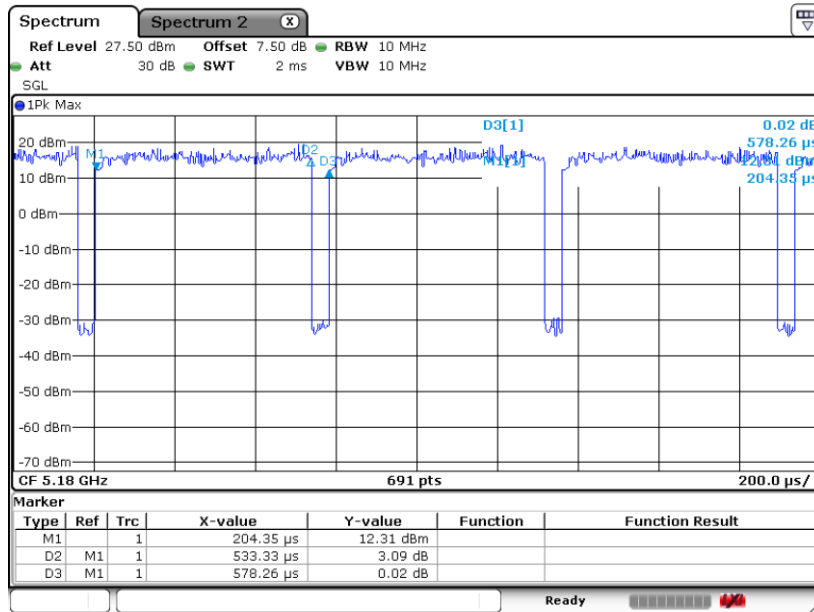

802.11ax HE80

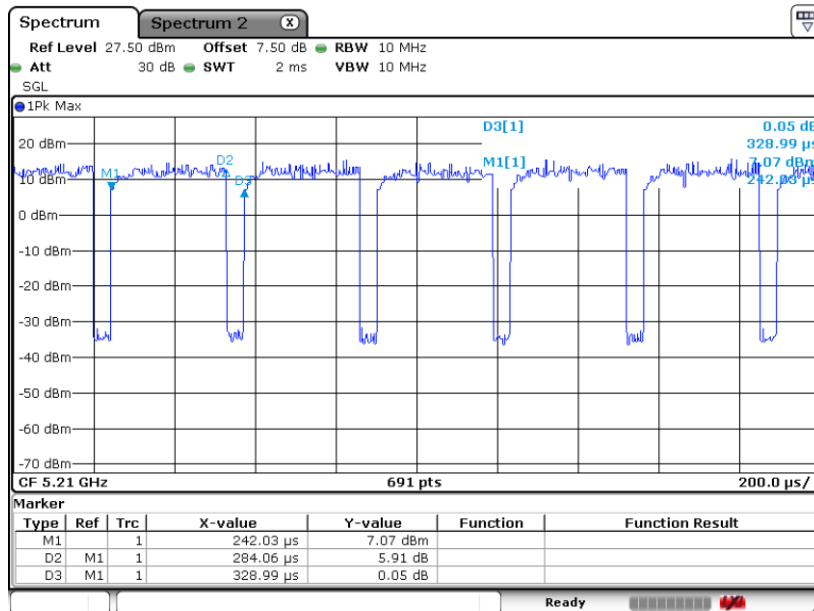



802.11ax HE160

