



Bluetooth (Average Limit)


Frequency range (MHz)	Average Limit (dB μ V)	Conclusion
0.15 to 0.5	56 to 46	P
0.5 to 5	46	
5 to 30	50	

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

The measurement is made according to ANSI C63.10

Conclusion: PASS

Test graphs as below:

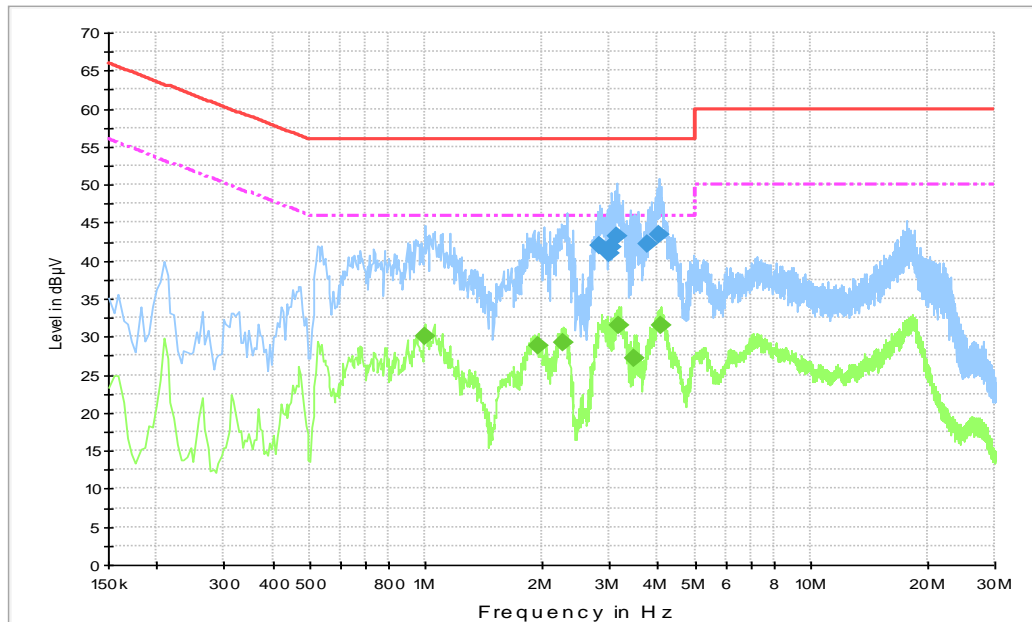

Final Result 1

Frequency	QuasiPeak	PE	Line	Corr.	Margin	Limit
2.827500	41.9	GND	L1	10.3	14.1	56.0
2.994000	41.1	GND	L1	10.3	14.9	56.0
3.043500	41.8	GND	L1	10.3	14.2	56.0
3.120000	43.3	GND	L1	10.3	12.7	56.0
3.754500	42.2	GND	L1	10.3	13.8	56.0
4.033500	43.4	GND	L1	10.3	12.6	56.0

Final Result 2

Frequency	QuasiPeak	PE	Line	Corr.	Margin	Limit
0.996000	30.0	GND	L1	10.2	16.0	46.0
1.959000	28.9	GND	L1	10.3	17.1	46.0
2.274000	29.1	GND	L1	10.2	16.9	46.0
3.160500	31.6	GND	L1	10.3	14.4	46.0
3.475500	27.2	GND	L1	10.3	18.8	46.0
4.069500	31.6	GND	L1	10.3	14.4	46.0

ANNEX E: Accreditation Certificate

United States Department of Commerce
National Institute of Standards and Technology

NVLAP[®]

Certificate of Accreditation to ISO/IEC 17025:2005

NVLAP LAB CODE: 600118-0


Telecommunication Technology Labs, CAICT
Beijing
China


*is accredited by the National Voluntary Laboratory Accreditation Program for specific services,
listed on the Scope of Accreditation, for:*

Electromagnetic Compatibility & Telecommunications

*This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005.
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality
management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).*

2016-09-29 through 2017-09-30
Effective Dates

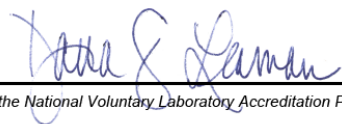


For the National Voluntary Laboratory Accreditation Program

END OF REPORT