



TEST REPORT

No. I17Z61065-EMC05

for

Lenovo(Shanghai) Electronics Technology Co., Ltd.

Portable Tablet Computer

Lenovo TB-7504F

with

FCC ID: O57TB7504F

Hardware Version: Lenovo Tablet TB-7504F

Software Version: TB-7504F_RF01_170712

Issued Date: 2017-08-04



Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn



REPORT HISTORY

Report Number	Revision	Description	Issue Date
I17Z61065-EMC05	Rev.0	1 st edition	2017-08-04



CONTENTS

1. TEST LABORATORY	4
1.1. TESTING LOCATION	4
1.2. TESTING ENVIRONMENT	4
1.3. PROJECT DATA	4
1.4. SIGNATURE.....	4
2. CLIENT INFORMATION	5
2.1. APPLICANT INFORMATION.....	5
2.2. MANUFACTURER INFORMATION.....	5
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	6
3.1. ABOUT EUT.....	6
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	6
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	6
3.4. EUT SET-UPS	8
4. REFERENCE DOCUMENTS.....	9
4.1. REFERENCE DOCUMENTS FOR TESTING.....	9
5. LABORATORY ENVIRONMENT.....	10
6. SUMMARY OF TEST RESULTS.....	11
7. TEST EQUIPMENTS UTILIZED.....	12
ANNEX A: MEASUREMENT RESULTS	13

1. Test Laboratory

1.1. Testing Location

Location: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China
100191

1.2. Testing Environment

Normal Temperature: 15-35°C


Relative Humidity: 20-75%

1.3. Project data

Testing Start Date: 2017-07-16

Testing End Date: 2017-07-31


1.4. Signature



Wang Junqing
(Prepared this test report)



Zhang Ying
(Reviewed this test report)



Liu Baodian
Deputy Director of the laboratory
(Approved this test report)



2. Client Information

2.1. Applicant Information

Company Name: Lenovo(Shanghai) Electronics Technology Co., Ltd.
Address: NO.68 BUILDING, 199 FENJU RD, Pilot Free Trade Zone, 200131,
China
City: Shanghai
Postal Code: 200131
Country: China
Telephone: +86-21-50504500-8281
Fax: +86-21-50807240

2.2. Manufacturer Information

Company Name: Lenovo PC HK Limited
Address: 23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay,
Hong Kong
City: Hong Kong
Postal Code: /
Country: China
Telephone: +86-21-50504500-8281
Fax: +86-21-50807240



3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	Portable Tablet Computer
Model Name	Lenovo TB-7504F
FCC ID	O57TB7504F
Extreme vol.	nominal: 3.85VDC

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
EUT1	HA0TYAHZ(23)	Lenovo Tablet TB-7504F	TB-7504F_RF01_170712

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	SN	Remarks
AE1	Battery	/	/
AE2	Battery	/	/
AE3	Charger	/	/
AE4	Charger	/	/
AE14	USB Cable	/	/
AE15	USB Cable	/	/

AE1

Model	SB18C15123
Manufacturer	Sunwoda
Capacitance	3500mAh
Nominal voltage	3.85V

AE2

Model	SB18C15124
Manufacturer	SCUD
Capacitance	3500mAh
Nominal voltage	3.85V

AE3

Model	C-P56
Manufacturer	Huntkey
Length of cable	/

AE4

Model	C-P57
Manufacturer	Acbel
Length of cable	/

AE14



Model	SWT-A064A
Manufacturer	Saibao
Length of cable	80cm

AE15

Model	WT59B1000100
Manufacturer	Fukangyuan
Length of cable	80cm

*AE ID: is used to identify the test sample in the lab internally.

Note: The USB cables are shielded.



3.4. EUT set-ups

EUT set-up No.	Combination of EUT and AE	Remarks
Set.17	EUT1+ AE3+ AE11/AE12	Charger
Set.23	EUT1+ AE4+ AE11/AE12	Charger
Set.25	EUT1+ AE11	USB



4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 15, Subpart B	Radio frequency devices - Unintentional Radiators	2016
ANSI C63.4	American National Standard for Methods of Measurement of Radio- Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2014
ICES-003	Information Technology Equipment(ITE)-Limits and methods of measurement	Issue 6

Note: The test methods have no deviation with standards.

5. LABORATORY ENVIRONMENT

Semi-anechoic chamber SAC-1 (23 meters×17meters×10meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω
Normalised site attenuation (NSA)	< ±4 dB, 10 m distance
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 6GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

Shielded room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz, >60dB; 1MHz—1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω



6. SUMMARY OF TEST RESULTS

Abbreviations used in this clause:		
Verdict Column	P	Pass
	NA	Not applicable
	F	Fail
Location Column	huayuan North Road	The test is performed in test location huayuan North Road which is described in section 1.1 of this report

Items	Test Name	Clause in FCC rules	Section in this report	Verdict	Test Location
1	Radiated Emission	15.109(a)	B.1	P	1
2	Conducted Emission	15.107(a)	B.2	P	1



7. Test Equipments Utilized

NO.	Description	TYPE	SERIES NUMBER	MANUFACTURE	CAL DUE DATE	CALIBRATION INTERVAL
1	Test Receiver	ESU26	100235	R&S	2018-03-01	1 year
2	Test Receiver	ESCI 7	100344	R&S	2018-03-15	1 year
3	Universal Radio Communication Tester	CMW500	143008	R&S	2017-12-01	1 year
4	Universal Radio Communication Tester	CMW500	155415	R&S	2018-02-15	1 year
5	LISN	ENV216	101200	R&S	2018-08-03	1 year
6	EMI Antenna	VULB 9163	9163-301	Schwarzbeck	2017-12-16	3 years
7	EMI Antenna	3115	6914	ETS-Lindgren	2017-12-15	3 years
8	PC	OPTIPLEX 380	2X1YV2X	DELL	N/A	N/A
9	Printer	P1606dn	VNC3L52122	HP	N/A	N/A
10	Keyboard	L100	CN0RH6596589 07ATOI40	DELL	N/A	N/A
11	Mouse	M-UAE119	LZ935220ZRC	Lenovo	N/A	N/A

Test Item	Test Software and Version	Software Vendor
Radiated Continuous Emission	EMC32 V9.01	R&S
Conducted Emission	EMC32 V8.52.0	R&S

ANNEX A: MEASUREMENT RESULTS

A.1 Radiated Emission

Reference

FCC: CFR Part 15.109(a).

IC: ICES-003 Section 5.

A.1.1 Method of measurement

The field strength of radiated emissions from the unintentional radiator (charging mode of MS) at distances of 3 meters (for 30MHz-1GHz) and 3 meters (for above 1GHz) is tested. Tested in accordance with the procedures of ANSI C63.4 – 2014, section 8.3.

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3/10 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

A.1.2 EUT Operating Mode:

The MS is operating in the charging mode. During the test MS is connected to a charger in the case of charging mode.

Note: I/O information: Printer – USB, Mouse – PS/2, Keyboard – USB.

A.1.3 Measurement Limit

Frequency range (MHz)	Field strength limit ($\mu\text{V}/\text{m}$)		
	Quasi-peak	Average	Peak
30-88	100		
88-216	150		
216-960	200		
960-1000	500		
>1000		500	5000

Note: the above limit is for 3 meters test distance. 10 meters' limit is got by converting.

A.1.4 Test Condition

Frequency range (MHz)	RBW/VBW	Sweep Time (s)	Detector
30-1000	120kHz (IF Bandwidth)	5	Peak/Quasi-peak
Above 1000	1MHz/1MHz	15	Peak, Average

A.1.5 Measurement Results

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss". It includes the antenna factor of receive antenna and the path loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{\text{Rpl}} = P_{\text{Mea}} + G_A + G_{\text{PL}}$$

Where

G_A : Antenna factor of receive antenna

G_{PL} : Path Loss

P_{Mea} : Measurement result on receiver.

Measurement uncertainty (worst case): 30MHz-1GHz: 4.86dB, 1GHz-18GHz: 5.26dB, $k=2$.

Measurement results for Set.17:

Charging Mode/Average detector

Frequency(MHz)	Result(dB μ V/m)	G_{PL} (dB)	G_A (dB/m)	P_{Mea} (dB μ V)	Polarity
17979.033	43.8	-17.7	45.6	15.900	H
17902.533	43.8	-18.5	45.6	16.700	H
17952.967	43.8	-17.7	45.6	15.900	V
17983.000	43.7	-17.7	45.6	15.800	H
17971.100	43.7	-17.7	45.6	15.800	H
17877.600	43.7	-18.5	45.6	16.600	H

Charging Mode/Peak detector

Frequency(MHz)	Result(dB μ V/m)	G_{PL} (dB)	G_A (dB/m)	P_{Mea} (dB μ V)	Polarity
17881.000	56.6	-18.5	45.6	29.500	H
17916.700	56.1	-17.7	45.6	28.200	H
17856.067	55.2	-18.5	45.6	28.100	V
17878.167	55.1	-18.5	45.6	28.000	H
17856.633	55.1	-18.5	45.6	28.000	H
17986.400	55.1	-17.7	45.6	27.200	H

Sample calculation: Peak detector, 17986.400MHz

$$\text{Result} = P_{\text{Mea}} (27.2\text{dB}\mu\text{V}) + G_A (45.6\text{dB/m}) + G_{\text{PL}}(-17.7 \text{ dB}) = 55.1\text{dB}\mu\text{V/m}$$

Measurement results for Set.23:

Charging Mode/Average detector

Frequency(MHz)	Result(dB μ V/m)	G_{PL} (dB)	G_A (dB/m)	P_{Mea} (dB μ V)	Polarity
17956.933	44.1	-17.7	45.6	16.200	H
17921.233	44.1	-17.7	45.6	16.200	H
17933.700	43.9	-17.7	45.6	16.000	V
17952.400	43.9	-17.7	45.6	16.000	H
17945.600	43.9	-17.7	45.6	16.000	H
17911.600	43.8	-18.5	45.6	16.700	H

Charging Mode/Peak detector

Frequency(MHz)	Result(dB μ V/m)	G _{PL} (dB)	G _A (dB/m)	P _{Mea} (dB μ V)	Polarity
17986.400	60.6	-17.7	45.6	32.700	H
17900.550	60.1	-18.5	45.6	33.000	H
17994.050	60.1	-17.7	45.6	32.200	H
17941.350	60.1	-17.7	45.6	32.200	V
17977.900	60.1	-17.7	45.6	32.200	H
17956.650	60.0	-17.7	45.6	32.100	V

Sample calculation: Peak detector, 17977.900MHz

$$\text{Result} = P_{\text{Mea}} (32.2\text{dB}\mu\text{V}) + G_A (45.6\text{dB/m}) + G_{\text{PL}}(-17.7 \text{ dB}) = 60.1\text{dB}\mu\text{V/m}$$

Measurement results for Set.25:

USB Mode/Average detector

Frequency(MHz)	Result(dB μ V/m)	G _{PL} (dB)	G _A (dB/m)	P _{Mea} (dB μ V)	Polarity
17945.600	44.0	-17.7	45.6	16.100	H
17948.433	43.9	-17.7	45.6	16.000	H
17925.200	43.9	-17.7	45.6	16.000	V
17944.467	43.9	-17.7	45.6	16.000	H
17923.500	43.9	-17.7	45.6	16.000	H
17935.967	43.8	-17.7	45.6	15.900	H

USB Mode/Peak detector

Frequency(MHz)	Result(dB μ V/m)	G _{PL} (dB)	G _A (dB/m)	P _{Mea} (dB μ V)	Polarity
17939.650	60.9	-17.7	45.6	33.000	H
17976.200	60.6	-17.7	45.6	32.700	V
17945.600	60.5	-17.7	45.6	32.600	H
17992.350	60.1	-17.7	45.6	32.200	H
17993.200	60.0	-17.7	45.6	32.100	V
17948.150	60.0	-17.7	45.6	32.100	H

Sample calculation: Peak detector, 17948.150MHz

$$\text{Result} = P_{\text{Mea}} (32.1\text{dB}\mu\text{V}) + G_A (45.6\text{dB/m}) + G_{\text{PL}}(-17.7 \text{ dB}) = 60.0\text{dB}\mu\text{V/m}$$

Note: The measurement results of Set.17, Set.23 and Set.25 showed here are worst cases of the combinations of different batteries and USB cables.

Charging Mode, Set.17

Normal RE_30M-1GHz_10m

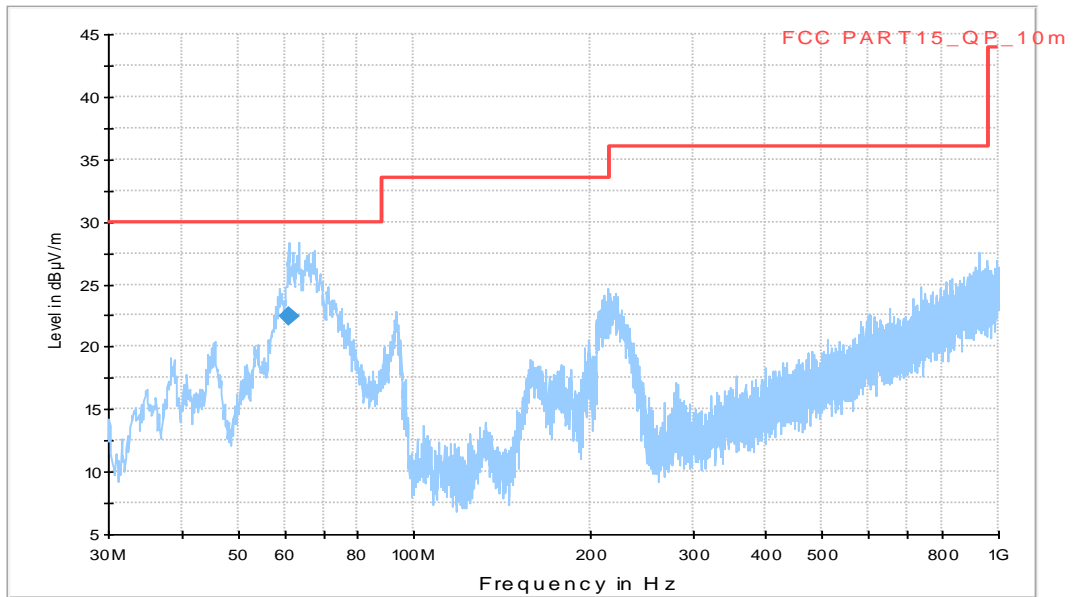


Figure A.1 Radiated Emission from 30MHz to 1GHz

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Height (cm)	PoI	Azimuth (deg)
61.183000	22.4	30.00	7.6	1000.	120.000	125.0	V	30.0

Normal RE_1G-18GHz_directly

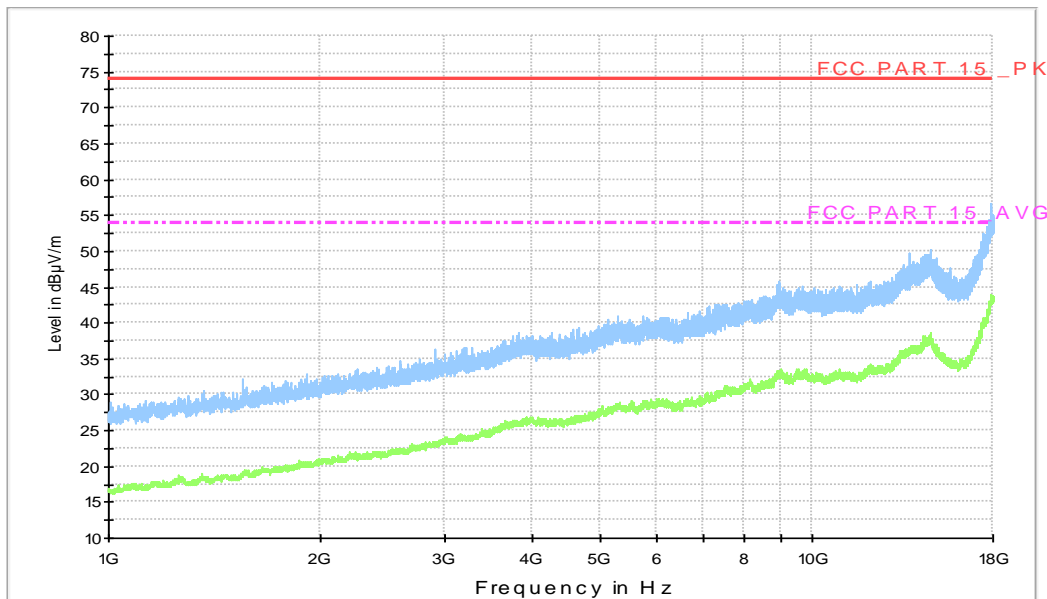


Figure A.2 Radiated Emission from 1GHz to 18GHz

Charging Mode, Set.23

Normal RE_30M-1GHz_10m

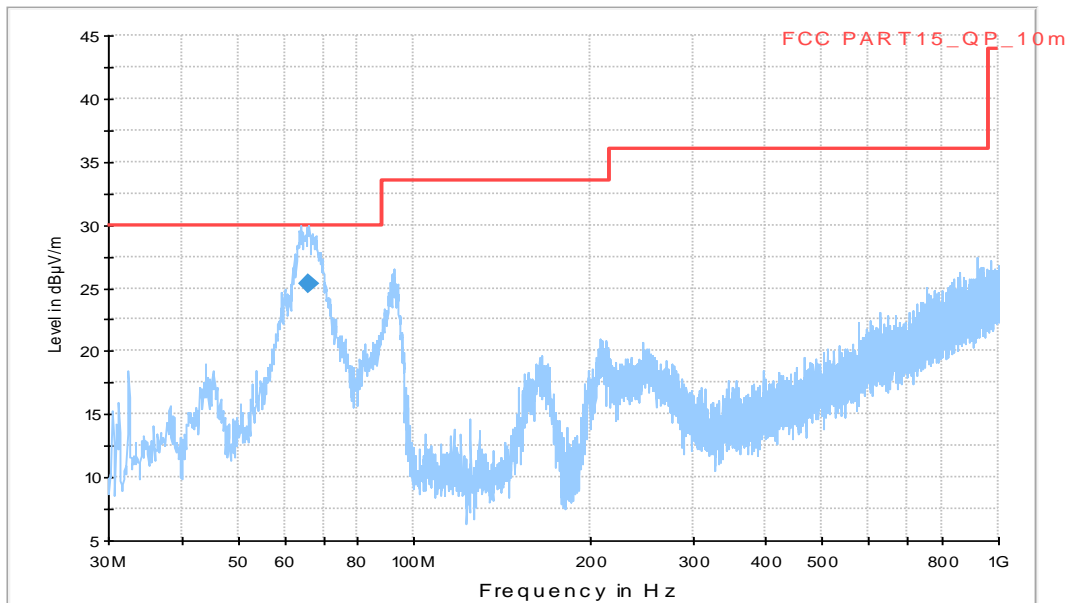


Figure A.3 Radiated Emission from 30MHz to 1GHz

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
66.227000	25.4	30.00	4.6	1000.	120.000	125.0	V	196.0

Normal RE_1G-18GHz_directly

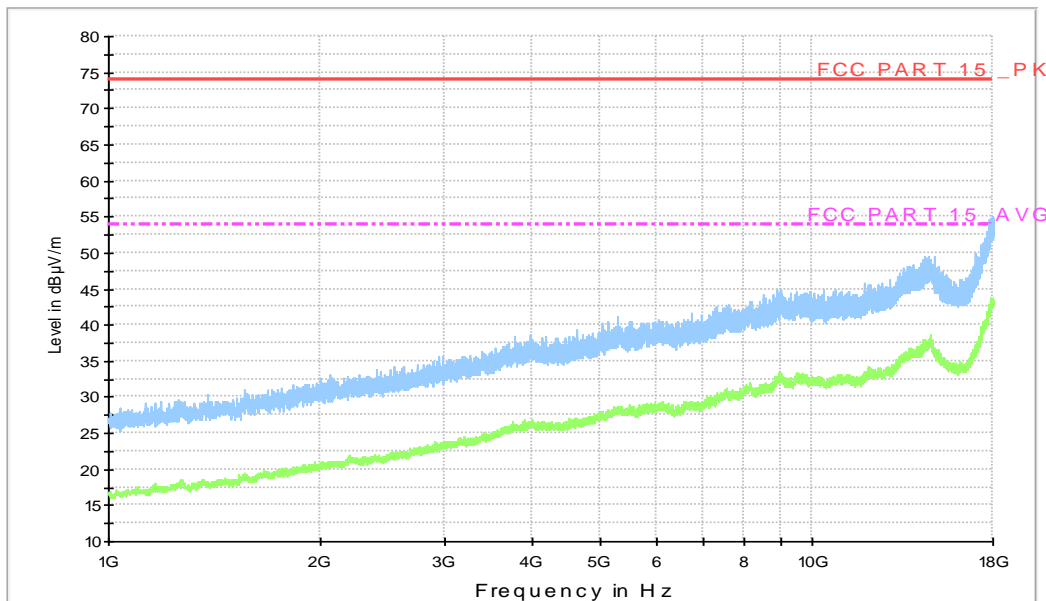


Figure A.4 Radiated Emission from 1GHz to 18GHz

USB Mode, Set.25

Normal RE_30M-1GHz_10m

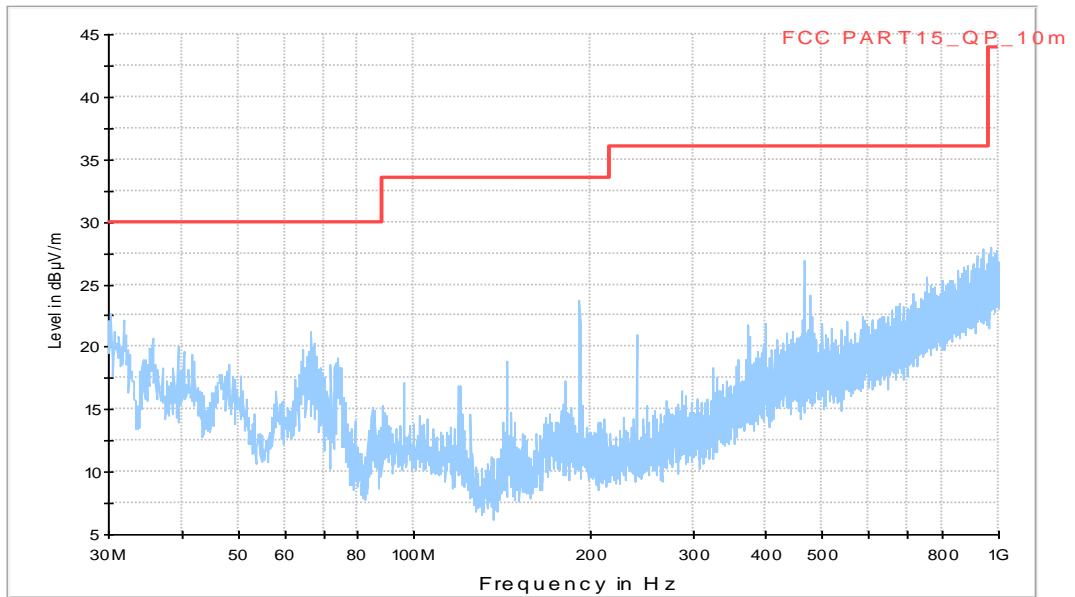


Figure A.5 Radiated Emission from 30MHz to 1GHz

Normal RE_1G-18GHz_directly

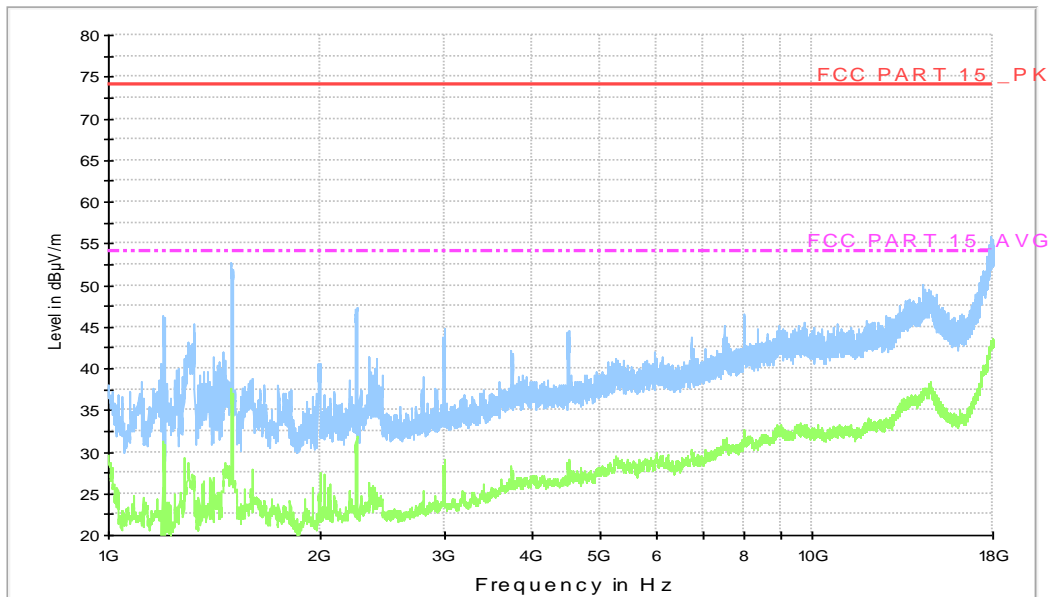


Figure A.6 Radiated Emission from 1GHz to 18GHz

A.2 Conducted Emission

Reference

FCC: CFR Part 15.107(a).

IC: ICES-003 Section 5.

A.2.1 Method of measurement

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits. Tested in accordance with the procedures of ANSI C63.4 – 2014, section 7.3.

A.2.2 EUT Operating Mode

The MS is operating in the charging mode. During the test MS is connected to a charger in the case of charging mode.

A.2.3 Measurement Limit

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency

A.2.4 Test Condition in charging mode

Voltage (V)	Frequency (Hz)
120	60

RBW/IF bandwidth	Sweep Time(s)
9kHz	1

A.2.5 Measurement Results

Measurement uncertainty: $U= 3.38\text{dB}$, $k=2$.

Charging Mode, Set.17

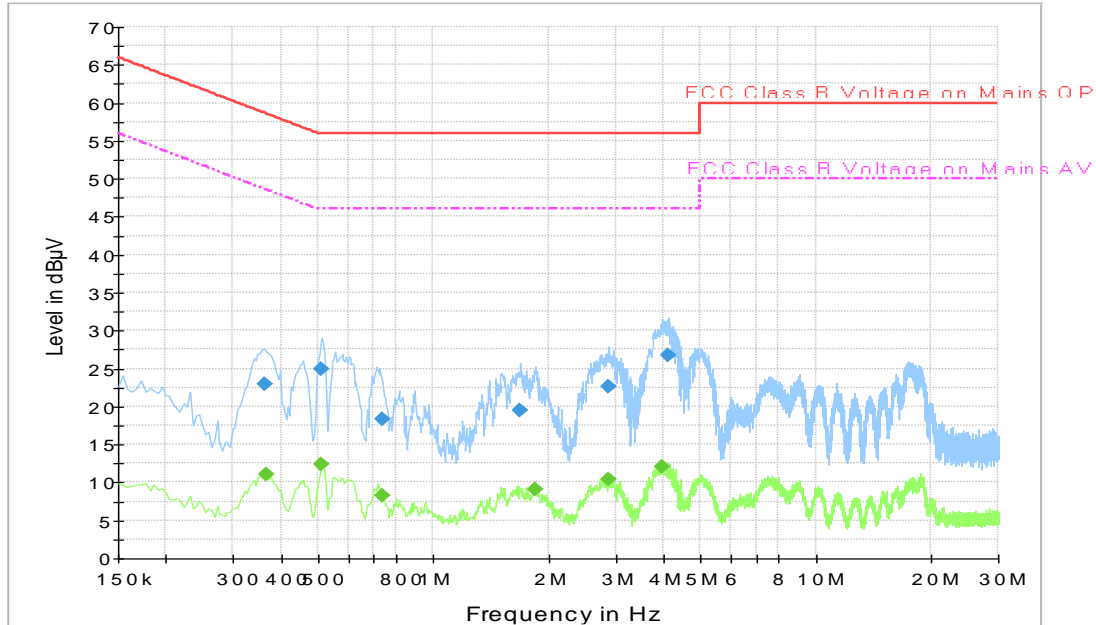


Figure A.7 Conducted Emission

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.361500	22.9	2000.0	9.000	On	L1	19.6	35.8	58.7
0.510000	24.9	2000.0	9.000	On	L1	19.6	31.1	56.0
0.739500	18.2	2000.0	9.000	On	L1	19.6	37.8	56.0
1.689000	19.4	2000.0	9.000	On	L1	19.6	36.6	56.0
2.877000	22.6	2000.0	9.000	On	L1	19.6	33.4	56.0
4.105500	26.7	2000.0	9.000	On	L1	19.7	29.3	56.0

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.366000	11.0	2000.0	9.000	On	L1	19.6	37.5	48.6
0.510000	12.3	2000.0	9.000	On	L1	19.6	33.7	46.0
0.739500	8.3	2000.0	9.000	On	L1	19.6	37.7	46.0
1.842000	9.2	2000.0	9.000	On	L1	19.6	36.8	46.0
2.868000	10.3	2000.0	9.000	On	L1	19.6	35.7	46.0
3.979500	12.1	2000.0	9.000	On	L1	19.7	33.9	46.0

Note: The measurement results showed here are worst cases of the combinations of different batteries and USB cables.

Charging Mode, Set.23

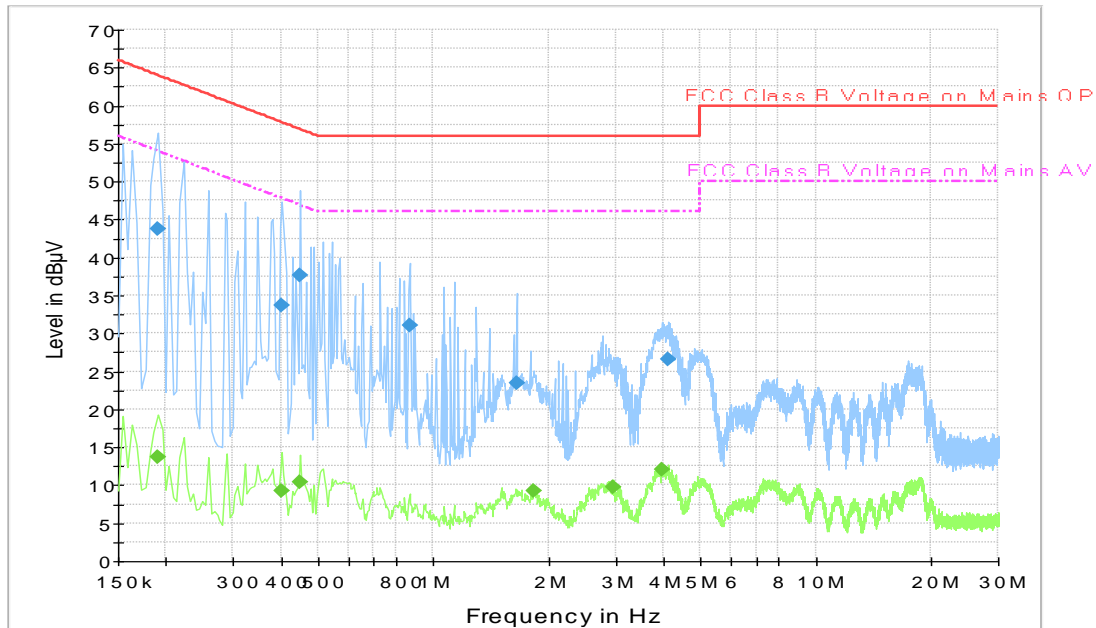


Figure A.8 Conducted Emission

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.190500	43.8	2000.0	9.000	On	N	19.6	20.3	64.0
0.402000	33.7	2000.0	9.000	On	N	19.6	24.1	57.8
0.447000	37.7	2000.0	9.000	On	N	19.6	19.2	56.9
0.865500	31.1	2000.0	9.000	On	N	19.6	24.9	56.0
1.648500	23.5	2000.0	9.000	On	N	19.6	32.5	56.0
4.101000	26.6	2000.0	9.000	On	L1	19.7	29.4	56.0

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.190500	13.7	2000.0	9.000	On	N	19.6	40.3	54.0
0.402000	9.3	2000.0	9.000	On	N	19.6	38.6	47.8
0.447000	10.3	2000.0	9.000	On	N	19.6	36.6	46.9
1.837500	9.2	2000.0	9.000	On	L1	19.6	36.8	46.0
2.953500	9.7	2000.0	9.000	On	L1	19.6	36.3	46.0
3.979500	12.0	2000.0	9.000	On	L1	19.7	34.0	46.0

Note: The measurement results showed here are worst cases of the combinations of different batteries and USB cables.

USB Mode, Set.25

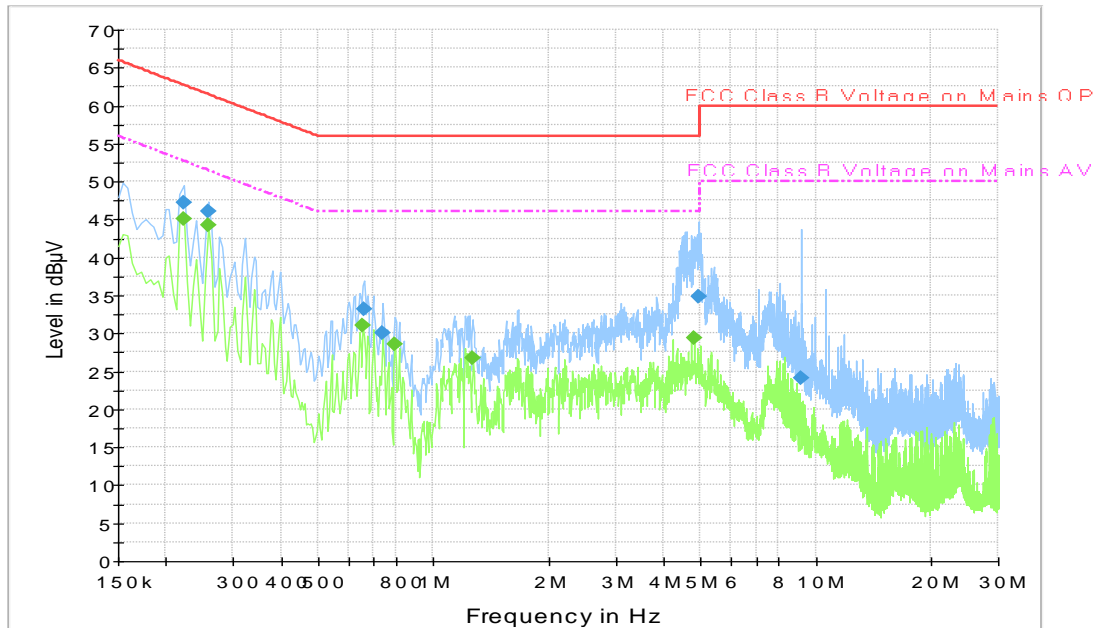


Figure A.9 Conducted Emission

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.222000	47.2	2000.0	9.000	On	N	19.6	15.5	62.7
0.258000	46.1	2000.0	9.000	On	N	19.6	15.4	61.5
0.658500	33.2	2000.0	9.000	On	N	19.6	22.8	56.0
0.739500	30.1	2000.0	9.000	On	N	19.6	25.9	56.0
4.938000	34.8	2000.0	9.000	On	L1	19.7	21.2	56.0
9.154500	24.1	2000.0	9.000	On	L1	19.8	35.9	60.0

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.222000	45.1	2000.0	9.000	On	N	19.6	7.7	52.7
0.258000	44.2	2000.0	9.000	On	N	19.6	7.3	51.5
0.654000	31.0	2000.0	9.000	On	N	19.6	15.0	46.0
0.793500	28.5	2000.0	9.000	On	L1	19.6	17.5	46.0
1.270500	26.8	2000.0	9.000	On	N	19.6	19.2	46.0
4.821000	29.4	2000.0	9.000	On	N	19.7	16.6	46.0

Note: The measurement results showed here are worst cases of the combinations of different batteries and USB cables.

United States Department of Commerce
National Institute of Standards and Technology



Certificate of Accreditation to ISO/IEC 17025:2005

NVLAP LAB CODE: 600118-0

Telecommunication Technology Labs, CAICT

Beijing
China

*is accredited by the National Voluntary Laboratory Accreditation Program for specific services,
listed on the Scope of Accreditation, for:*

Electromagnetic Compatibility & Telecommunications

*This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005.
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality
management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).*

2016-09-29 through 2017-09-30

Effective Dates




For the National Voluntary Laboratory Accreditation Program

END OF REPORT