



# TEST REPORT

No. I17D00023-SRD03

*For*

**Client : Lenovo(Shanghai) Electronics  
Technology Co., Ltd**

**Production : Portable Tablet Computer**

**Model Name : Lenovo TB-8504F**

**FCC ID: O57TB8504F**

**IC ID: 10407A-TB8504F**

**Standard: FCC Part 15 Subpart C §15.247/  
RSS-247/ ANSI C63.10**

**Hardware Version: Lenovo Tablet TB-8504F**

**Software Version: TB-8504F\_RF01\_170208**

**Issued date: 2017-04-27**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of ECIT Shanghai.

**Test Laboratory:**

ECIT Shanghai, East China Institute of Telecommunications

Add: 7-8F, G Area, No.668, Beijing East Road, Huangpu District, Shanghai, P. R. China

Tel: (+86)-021-63843300, E-Mail: [welcome@ecit.org.cn](mailto:welcome@ecit.org.cn)

**About EUT**

EUT Description	Portable Tablet Computer
Model name	Lenovo TB-8504F
Bluetooth Frequency	2402MHz-2483.5MHz
BLE Frequency	2402MHz-2480MHz
WLAN Frequency	2.4G: 2412MHz-2462MHz;
GPS Frequency Band	1575.42MHz(L1)
Nominal Voltage	3.85V
Extreme High Voltage	4.4V
Extreme Low Voltage	3.65V

**Revision Version**

Report Number	Revision	Date	Memo
I17D00023-SRD03	00	2017-04-10	Initial creation of test report
I17D00023-SRD03	01	2017-04-27	Second creation of test report

**CONTENTS**

<b>1.</b>	<b>TEST LABORATORY</b> .....	<b>6</b>
<b>1.1.</b>	<b>TESTING LOCATION</b> .....	<b>6</b>
<b>1.2.</b>	<b>TESTING ENVIRONMENT</b> .....	<b>6</b>
<b>1.3.</b>	<b>PROJECT DATA</b> .....	<b>6</b>
<b>1.4.</b>	<b>SIGNATURE</b> .....	<b>6</b>
<b>2.</b>	<b>CLIENT INFORMATION</b> .....	<b>7</b>
<b>2.1.</b>	<b>APPLICANT INFORMATION</b> .....	<b>7</b>
<b>2.2.</b>	<b>MANUFACTURER INFORMATION</b> .....	<b>7</b>
<b>3.</b>	<b>EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)</b> .....	<b>8</b>
<b>3.1.</b>	<b>ABOUT EUT</b> .....	<b>8</b>
<b>3.2.</b>	<b>INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST</b> .....	<b>8</b>
<b>3.3.</b>	<b>INTERNAL IDENTIFICATION OF AE USED DURING THE TEST</b> .....	<b>9</b>
<b>3.4.</b>	<b>THE DIFFERENCE BETWEEN TWO PROVIDE EUT</b> .....	<b>9</b>
<b>4.</b>	<b>REFERENCE DOCUMENTS</b> .....	<b>11</b>
<b>4.1.</b>	<b>REFERENCE DOCUMENTS FOR TESTING</b> .....	<b>11</b>
<b>5.</b>	<b>SUMMARY OF TEST RESULTS</b> .....	<b>12</b>
<b>5.1.</b>	<b>NOTES</b> .....	<b>13</b>
<b>5.2.</b>	<b>STATEMENTS</b> .....	<b>13</b>
<b>6.</b>	<b>TEST RESULT</b> .....	<b>14</b>
<b>6.1.</b>	<b>MAXIMUM OUTPUT POWER</b> .....	<b>14</b>
<b>6.2.</b>	<b>PEAK POWER SPECTRAL DENSITY</b> .....	<b>16</b>
<b>6.3.</b>	<b>OCCUPIED 6DB BANDWIDTH</b> .....	<b>22</b>
<b>6.4.</b>	<b>BAND EDGES COMPLIANCE</b> .....	<b>28</b>
<b>6.5.</b>	<b>TRANSMITTER SPURIOUS EMISSION-CONDUCTED</b> .....	<b>32</b>
<b>6.6.</b>	<b>TRANSMITTER SPURIOUS EMISSION-RADIATED</b> .....	<b>43</b>



## ***RF Test Report***

Report No.: I17D00023-SRD03

---

<b>6.7.</b>	<b>AC POWERLINE CONDUCTED EMISSION.....</b>	<b>72</b>
<b>7.</b>	<b>TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS .....</b>	<b>77</b>
<b>8.</b>	<b>TEST ENVIRONMENT .....</b>	<b>78</b>
<b>ANNEX A.</b>	<b>DEVIATIONS FROM PRESCRIBED TEST METHODS .....</b>	<b>80</b>
<b>ANNEX B.</b>	<b>ACCREDITATION CERTIFICATE .....</b>	<b>81</b>

## 1. Test Laboratory

### 1.1. Testing Location

Company Name:	ECIT Shanghai, East China Institute of Telecommunications
Address:	7-8F, G Area, No. 668, Beijing East Road, Huangpu District, Shanghai, P. R. China
Postal Code:	200001
Telephone:	(+86)-021-63843300
Fax:	(+86)-021-63843301
IC OAT'S Test Site Registration Number	10766A-1


### 1.2. Testing Environment

Normal Temperature:	15-35°C
Extreme Temperature:	-10/+55°C
Relative Humidity:	20-75%

### 1.3. Project data

Project Leader:	Xu Yuting
Testing Start Date:	2017-02-23
Testing End Date:	2017-04-04


### 1.4. Signature



**Shi Hongqi**  
(Prepared this test report)



**Ding Li**  
(Reviewed this test report)



**Zheng Zhongbin**  
Director of the laboratory  
(Approved this test report)

## 2. Client Information

### 2.1. Applicant Information

Company Name: Lenovo(Shanghai) Electronics Technology Co., Ltd.  
Address: NO.68 BUILDING, 199 FENJU RD, China (Shanghai) Pilot Free  
Trade Zone, 200131, CHINA  
Telephone: 18116117205  
Email: Jiazz1@lenovo.com

### 2.2. Manufacturer Information

Company Name: Lenovo PC HK Limited  
Address: 23/F, Lincoln House, Taikoo Place  
979 King's Road, Quarry Bay, Hong Kong  
Telephone: 18116117205  
Email: Jiazz1@lenovo.com

### 3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

#### 3.1. About EUT

EUT Description	Portable Tablet Computer
Model name	Lenovo TB-8504F
WLAN Frequency	2412MHz-2462MHz
WLAN Channel	Channel1-Channel11
WLAN type of modulation	802.11b:DSSS 802.11g/n: OFDM
Extreme Temperature	-10/+55 °C
Nominal Voltage	3.85
Extreme High Voltage	4.4
Extreme Low Voltage	3.65

Note: Photographs of EUT are shown in ANNEX A of this test report.

#### 3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version	Date of receipt
N03 (Main Supply 3+32G)	HGAD85M2	Lenovo Tablet TB-8504F	TB-8504F_RF01_1 70208	2017-03-24
N13 (Main Supply 3+32G)	HGAD85JG	Lenovo Tablet TB-8504F	TB-8504F_RF01_1 70208	2017-02-22
N19 (Main Supply 3+32G)	HGAD85JY	Lenovo Tablet TB-8504F	TB-8504F_RF01_1 70208	2017-02-22
N47 (Main Supply 2+16G)	HGAD85C5	Lenovo Tablet TB-8504F	TB-8504F_RF01_1 70208	2017-02-22
N32 (second Supply 3+32G)	HGAD85NP	Lenovo Tablet TB-8504F	TB-8504F_RF01_1 70208	2017-02-22
N47 (second Supply 2+16G)	HGAD85JY	Lenovo Tablet TB-8504F	TB-8504F_RF01_1 70208	2017-02-22

\*EUT ID: is used to identify the test sample in the lab internally.



### 3.3. Internal Identification of AE used during the test

AE ID*	Description	SN
AE1	RF cable	---
AE2	---	---

\*AE ID: is used to identify the test sample in the lab internally.

### 3.4. The difference between two provide EUT

Main Supply 3+32G

Part Name	Model Name	supplier	Remark
LCD+TP	8" WXGA On-cell +0.7mm sodalime cover glass,White	AUO	White
	8" WXGA On-cell +0.7mm sodalime cover glass,Black	AUO	Black
Flash	KMRX1000BM-B614	SAMSUNG	
Speaker	QS171219AW00	KEYSOUND	
Front Camera	PC0KE0039A	Sunrise	
Back Camera	CCM F5695AV 5M OV5695 COB 30PIN BtoB	Qtech	
Battery	L16D1P34	Suwnoda	
USB Cable	DL1_MICRO5_1M2A_B LK_HL1	Saibao	
Earphone	N/A	N/A	
Charger	C-P56	Acbel	US
	C-P60	Huntkey	Argentina

Main Supply 2+16G

Part Name	Model Name	supplier	Remark
LCD+TP	8" WXGA On-cell +0.7mm sodalime cover glass,White	AUO	White
	8" WXGA On-cell +0.7mm sodalime cover glass,Black	AUO	Black
Flash	KMQE10013M-B318	Samsung	
Speaker	QS171219AW00	KEYSOUND	
Front Camera	PC0KE0039A	Sunrise	
Back Camera	CCM F5695AV 5M OV5695 COB 30PIN BtoB	Qtech	



## RF Test Report

Report No.: I17D00023-SRD03

Battery	L16D1P34	Suwnoda	
USB Cable	DL1_MICRO5_1M2A_B LK_HL1	Saibao	
Charger	C-P56	Acbel	US
	C-P60	Huntkey	Argentina

### Secondary Supply 3+32G

Part Name	Model Name	supplier	Remark
LCD+TP	8" WXGA In-cell +0.7mm sodalime cover glass,White	INX	White
	8" WXGA In-cell +0.7mm sodalime cover glass,Black	INX	Black
Flash	H9TQ26ADFTBCUR-KUM	Hynix	
Speaker	QS171219AW00	KEYSOUND	
Front Camera	H7P2-P3588FHQ	Kingcome	
Back Camera	CCM F5V08B 5M OV5695 COB 30PIN BtoB	Sunny	
Battery	L16D1P34	SCUD	
USB Cable	DL1_MICRO5_0.7M_BLK_ HL1	Jieye	
Charger	C-P56	Huntkey	US

### Secondary Supply2+16G

Part Name	Model Name	supplier	Remark
LCD+TP	8" WXGA In-cell +0.7mm sodalime cover glass,White	INX	White
	8" WXGA In-cell +0.7mm sodalime cover glass,Black	INX	Black
Flash	H9TQ17ABJTBCUR-KUM	Hynix	
Speaker	QS171219AW00	KEYSOUND	
Front Camera	H7P2-P3588FHQ	Kingcome	
Back Camera	CCM F5V08B 5M OV5695 COB 30PIN BtoB	Sunny	
Battery	L16D1P34	SCUD	
USB Cable	DL1_MICRO5_0.7M_BLK_ _HL1	Jieye	
Charger	C-P56	Huntkey	US

## 4. Reference Documents

### 4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part15	FCC CFR 47, Part 15,Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.	Oct,2009 Edition
ANSI C63.10	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices	2013
RSS-247	Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices	2015

## 5. Summary of Test Results

A brief summary of the tests carried out is shown as following.

Measurement Items	Sub-clause of Part15C	Sub-clause of IC	Verdict
Maximum Peak Output Power	15.247(a)	RSS-247 5.4	P
Peak Power Spectral Density	15.247(e)	RSS-247 5.2	P
Occupied 6dB Bandwidth	15.247(d)	RSS-247 5.2	P
Band Edges Compliance	15.247(b)	RSS-247 5.5	P
Transmitter Spurious Emission-Conducted	15.247	RSS-247 5.5	P
Transmitter Spurious Emission-Radiated	15.247,15.209,	RSS-247 5.5	P
AC Powerline Conducted Emission	15.107,15.207	RSS-247 Gen 3.2	P

Please refer to part 5 for detail.

The measurements are according to Public notice KDB558074 and ANSI C63.4.

Terms used in Verdict column

P	Pass, the EUT complies with the essential requirements in the standard.
NP	Not Perform, the test was not performed by ECIT.
NA	Not Applicable, the test was not applicable.
F	Fail, the EUT does not comply with the essential requirements in the standard.

## Test Conditions

Tnom	Normal temperature
Tmin	Low Temperature
Tmax	High Temperature
Vnom	Normal Voltage
Vmin	Low Voltage
Vmax	High Voltage
Hnom	Norm Humidity
Anom	Norm Air Pressure

For this report, all the test case listed above are tested under Normal Temperature and Normal Voltage, and also under norm humidity, the specific conditions as following:

Temperature	Tnom	22°C
Voltage	Vnom	3.7V
Humidity	Hnom	32%
Air Pressure	Anom	1010hPa

### 5.1. Notes

All reported tests were carried out on a sample equipment to demonstrate limited compliance with section 3.

The test results of this test report relate exclusively to the item(s) tested as specified in section 5.

The following deviation from, additions to, or exclusions from the test specifications have been made. See section 3.

### 5.2. Statements

The product name Lenovo TB-8504F, supporting BT/BLE/WLAN/GPS/FM, manufactured by Lenovo PC HK Limited is a new product for testing.

ECIT has verified that the compliance of the tested device specified in section 5 of this test report is successfully evaluated according to the procedure and test methods as defined in type certification requirement listed in section 5 of this test report.

## 6. Test result

### 6.1. Maximum Output Power

#### 6.1.1 Measurement Limit and method:

Standard	Limit(dBm)
FCC CRF 15.247(b)	< 30

#### 6.1.2 Test procedure

The measurement is according to ANSI C63.10 clause 11.2

1. The output power of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Enable EUT transmitter maximum power continuously.
3. Set RBW  $\geq$  OBW, VBW  $\geq$  3RBW.
4. Detector : Peak.
5. Trace mode: Max Hold

#### 6.1.3 Measurement Uncertainty:

Measurement Uncertainty	0.75dB
-------------------------	--------

#### 6.1.4 Maximum Peak Output Power-conducted

##### Measurement Results:

##### 802.11b/g mode

Mode	Data Rate(Mbps)	Teat Result(dBm)		
		2412MHz(Ch1)	2437MHz(Ch6)	2462MHz(Ch11)
802.11b	1	17.91	18.75	19.03
	2	18.06	18.66	19.12
	5.5	18.17	18.73	19.23
	11	18.18	18.34	19.17
802.11g	6	22.17	22.67	22.23
	9	22.57	22.36	22.86
	12	22.10	22.57	23.67
	18	22.45	23.01	23.11

	24	22.09	22.11	22.65
	36	22.37	23.10	23.22
	48	22.44	22.17	22.96
	54	22.37	22.15	22.69

The data rate 2Mbps and 48Mbps are selected as worse condition, and the following cases are performed with this condition.

### 802.11n mode

Mode	Data Rate(Index)	Teat Result(dBm)		
		2412MHz(Ch1)	2437MHz(Ch6)	2462MHz(Ch11)
802.11n(20MHz)	MCS0	22.54	21.96	22.16
	MCS1	22.40	22.03	22.41
	MCS2	22.46	22.32	21.86
	MCS3	22.24	22.54	21.95
	MCS4	22.71	22.16	22.17
	MCS5	22.49	22.32	21.76
	MCS6	22.50	22.43	22.13
	MCS7	22.54	21.96	22.16
802.11n(40MHz)	MCS0	/	/	/
	MCS1	/	/	/
	MCS2	/	/	/
	MCS3	/	/	/
	MCS4	/	/	/
	MCS5	/	/	/
	MCS6	/	/	/
	MCS7	/	/	/

The data rate MCS0 is selected as worse condition, and the following case are performed with this condition.

**6.1.5 Maximum Average Output Power-conducted**
**802.11b/g mode**

Mode	Test Result(dBm)		
	2412MHz(Ch1)	2437MHz(Ch6)	2462MHz(Ch11)
802.11b	15.47	15.77	16.01
802.11g	13.31	13.29	13.71

**802.11n mode**

Mode	Test Result(dBm)		
	2412MHz(Ch1)	2437MHz(Ch6)	2462MHz(Ch11)
802.11n(20MHz)	13.61	15.52	13.91
802.11n(40MHz)	/	/	/

**Conclusion: PASS**
**6.2. Peak Power Spectral Density**
**6.2.1 Measurement Limit:**

Standard	Limit
FCC CFR Part 15.247(e)	< 8dBm/3 KHz

**6.2.2 Test procedures**

The measurement is according to ANSI C63.10 clause 11.10.

1. The output power of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Enable EUT transmitter maximum power continuously.
3. Set analyzer center frequency to DTS channel center frequency.
4. Set the span to 1.5 times the DTS bandwidth.
5. Set the RBW to  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
6. Set the VBW  $\geq [3 \times \text{RBW}]$ .
7. Detector = peak.
8. Sweep time = auto couple.
9. Trace mode = max hold.
10. Allow trace to fully stabilize.
11. Use the peak marker function to determine the maximum amplitude level within the



RBW.

12. If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.

**6.2.3 Measurement Uncertainty:**

Measurement Uncertainty	0.75dB
-------------------------	--------


**6.2.4 Measurement Results:**
**802.11b/g mode**

Mode	Channel	Power Spectral Density(dBm/3kHz)		Conclusion
802.11b	1	Fig.1	-11.69	P
	6	Fig.2	-11.853	P
	11	Fig.3	-11.808	P
802.11g	1	Fig.4	-15.265	P
	6	Fig.5	-15.86	P
	11	Fig.6	-15.843	P

**802.11n mode**


Mode	Channel	Power Spectral Density(dBm/3kHz)		Conclusion
802.11n(20MHz)	1	Fig.7	-14.25	P
	6	Fig.8	-15.486	P
	11	Fig.9	-14.841	P
802.11g(40MHz)	1	/	/	/
	6	/	/	/
	11	/	/	/

**Conclusion: PASS**
**Test graphs as below:**

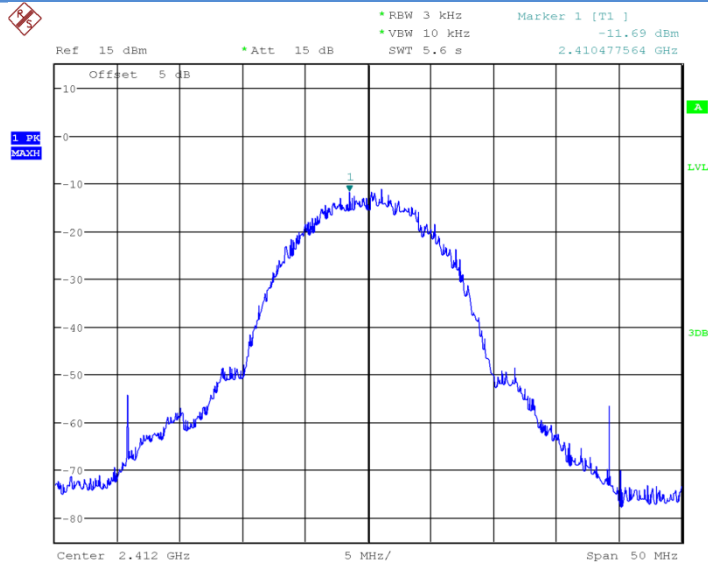


Date: 3.MAR.2017 08:50:14

**Fig.1 Power Spectral Density (802.1b,Ch1)**

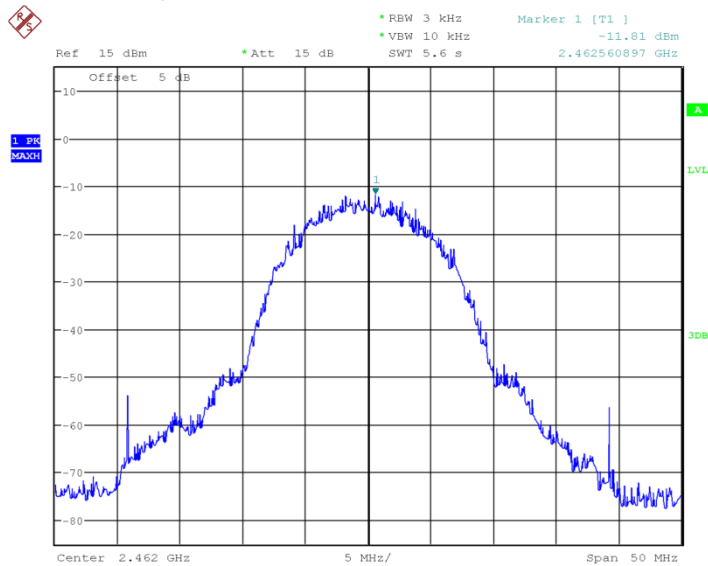


Date: 3.MAR.2017 08:52:05

**Fig.2 Power Spectral Density (802.1b,Ch6)**

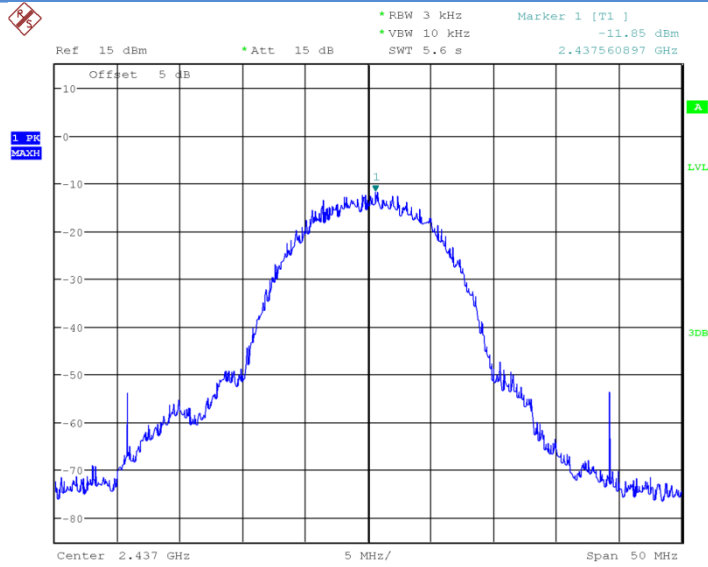


Date: 3.MAR.2017 08:50:52

**Fig.3 Power Spectral Density (802.1b,Ch11)**

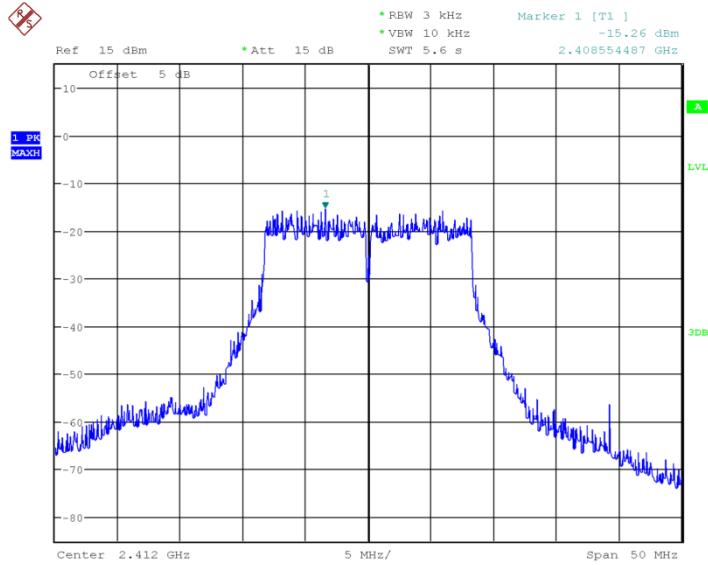


Date: 3.MAR.2017 08:52:52

**Fig.4 Power Spectral Density (802.1g,Ch1)**

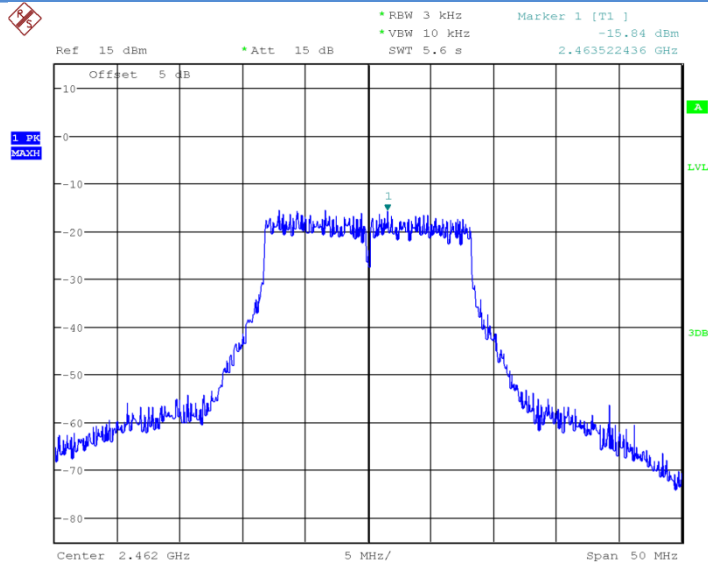

Date: 3.MAR.2017 08:54:24


**Fig.5 Power Spectral Density (802.1g,Ch6)**

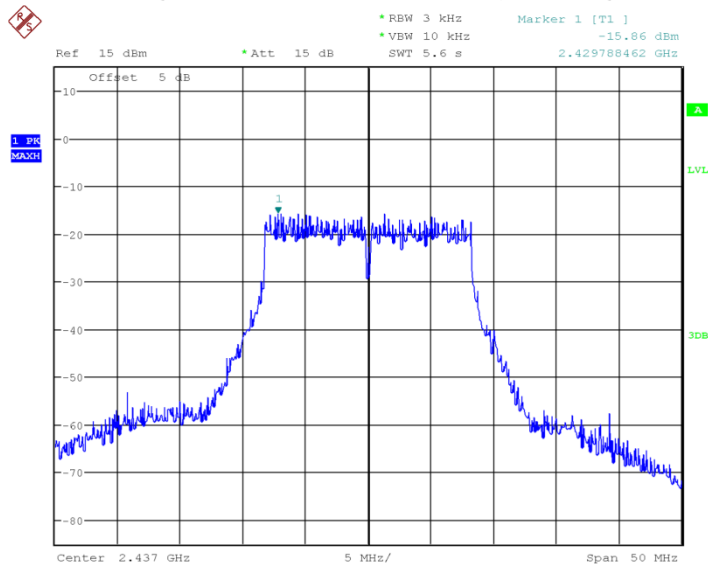

Date: 3.MAR.2017 08:53:40

**Fig.6 Power Spectral Density (802.1g,Ch11)**



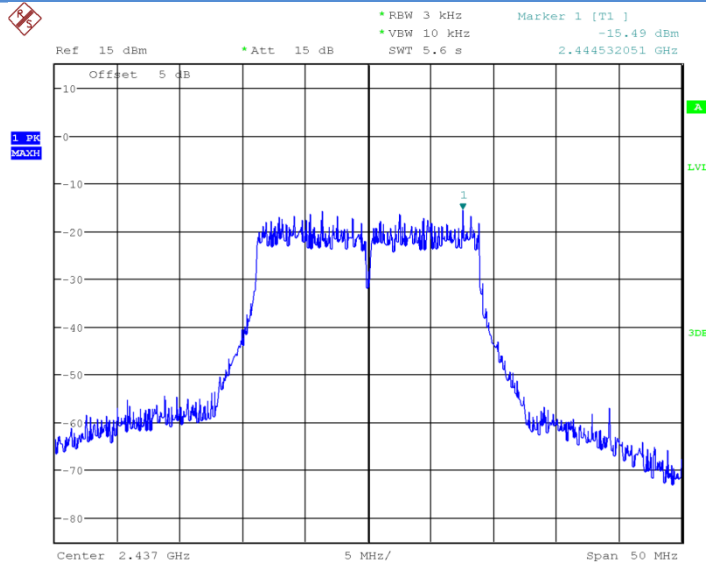

Date: 3.MAR.2017 08:55:42

**Fig.9 Power Spectral Density (802.1n-20MHz,Ch11)**

### 6.3. Occupied 6dB Bandwidth

#### 6.3.1 Measurement Limit:

Standard	Limit(KHz)
FCC 47 CFR Part 15.247(a)	≥500

#### 6.3.2 Test procedure

The measurement is according to ANSI C63.10 clause 11.8.

1. The output power of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Enable EUT transmitter maximum power continuously.
3. Set RBW = 100 kHz.
4. Set the VBW  $\geq [3 \times \text{RBW}]$ .
5. Detector = peak.
6. Trace mode = max hold.
7. Sweep = auto couple.
8. Allow the trace to stabilize.
9. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

#### 6.3.4 Measurement Uncertainty:

Measurement Uncertainty	60.80Hz
-------------------------	---------


**6.3.5 Measurement Result:**
**802.11b/g mode**

Mode	Channel	Occupied 6dB Bandwidth(MHz)		Conclusion
802.11b	1	Fig.10	9.696	P
	6	Fig.11	9.936	P
	11	Fig.12	9.135	P
802.11g	1	Fig.13	16.506	P
	6	Fig.14	16.426	P
	11	Fig.15	15.346	P

**802.11n mode**


Mode	Channel	Occupied 6dB Bandwidth(MHz)		Conclusion
802.11n(20MHz)	1	Fig.16	17.788	P
	6	Fig.17	17.708	P
	11	Fig.18	17.788	P
802.11n(40MHz)	1	/	/	/
	6	/	/	/
	11	/	/	/

**Conclusion: PASS**
**Test graphs as below:**

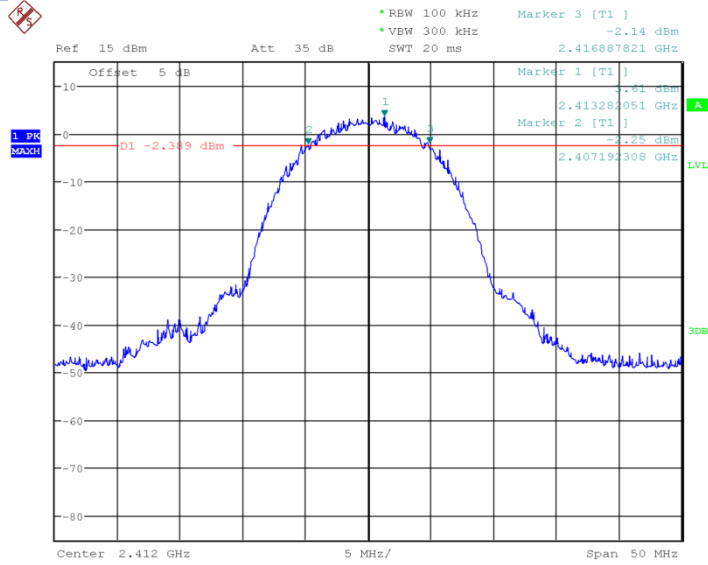

Date: 3.MAR.2017 09:00:21


**Fig.10 Occupied 6dB Bandwidth (802.11b, Ch1)**

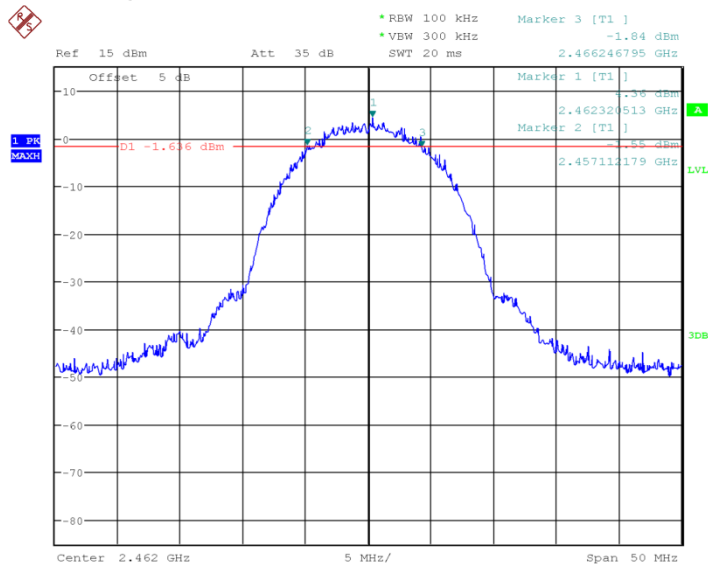

Date: 3.MAR.2017 09:01:21


**Fig.11 Occupied 6dB Bandwidth (802.11b, Ch6)**



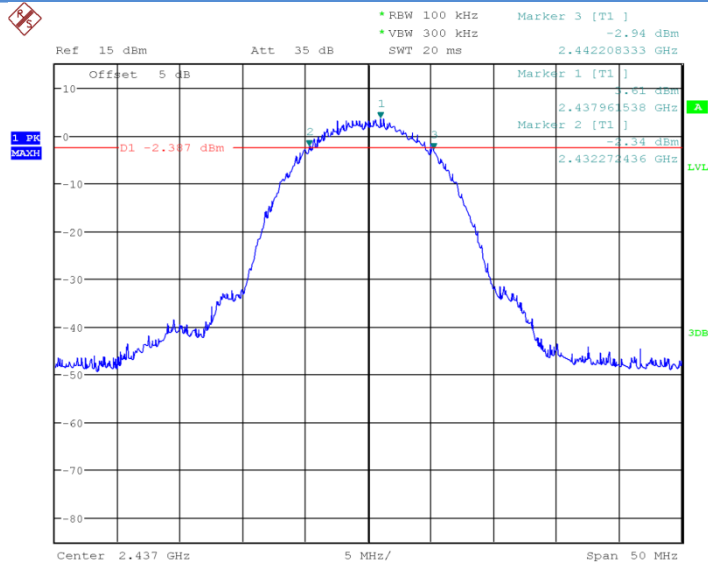


Date: 3.MAR.2017 09:00:53

**Fig.12 Occupied 6dB Bandwidth (802.11b, Ch11)**

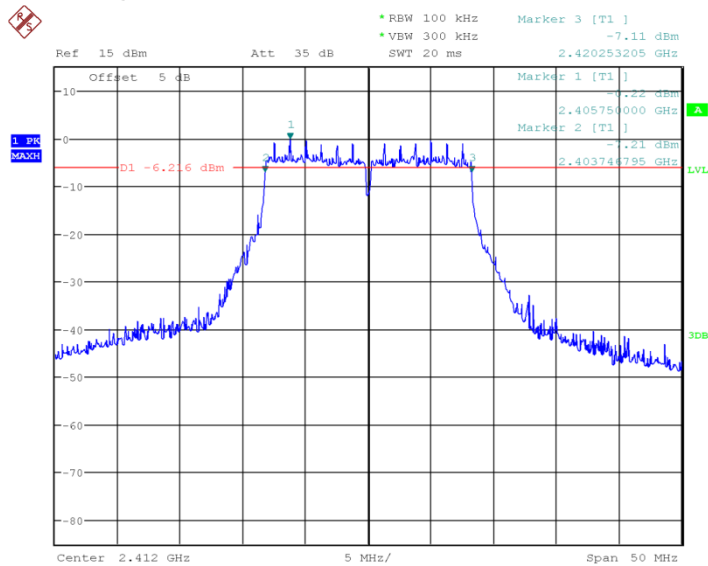


Date: 3.MAR.2017 09:01:53

**Fig.13 Occupied 6dB Bandwidth (802.11g, Ch1)**

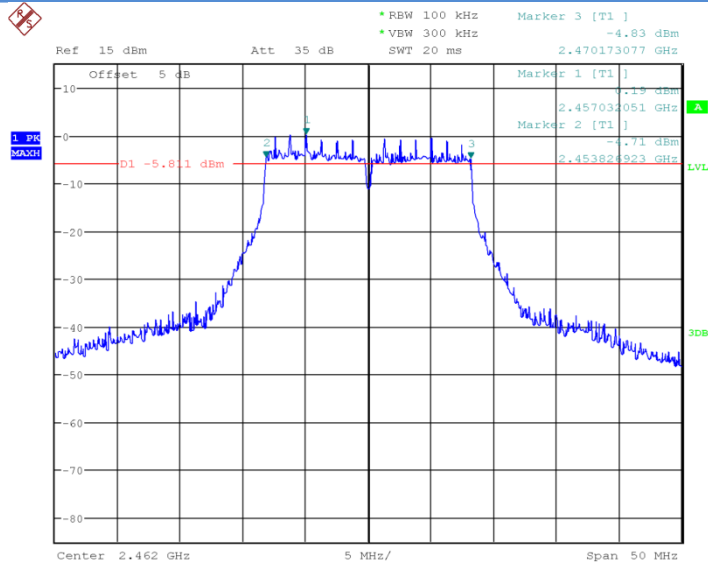


Date: 3.MAR.2017 09:03:05

**Fig.14 Occupied 6dB Bandwidth (802.11g, Ch6)**

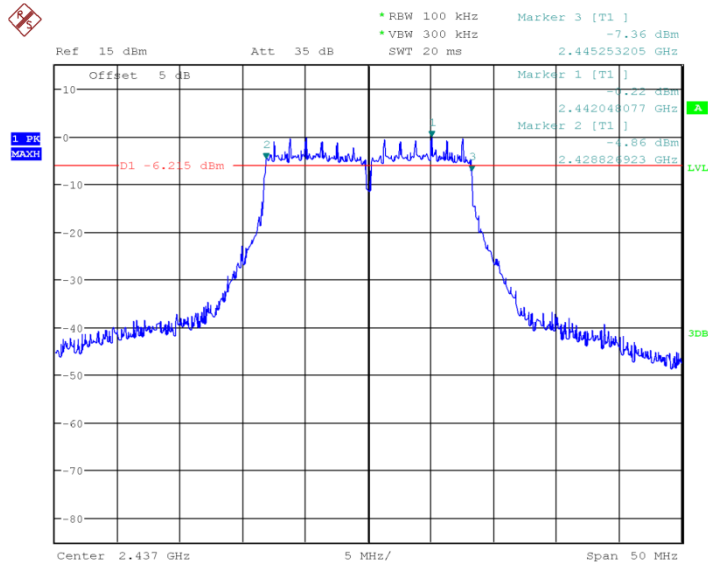


Date: 3.MAR.2017 09:02:25

**Fig.15 Occupied 6dB Bandwidth (802.11g, Ch11)**

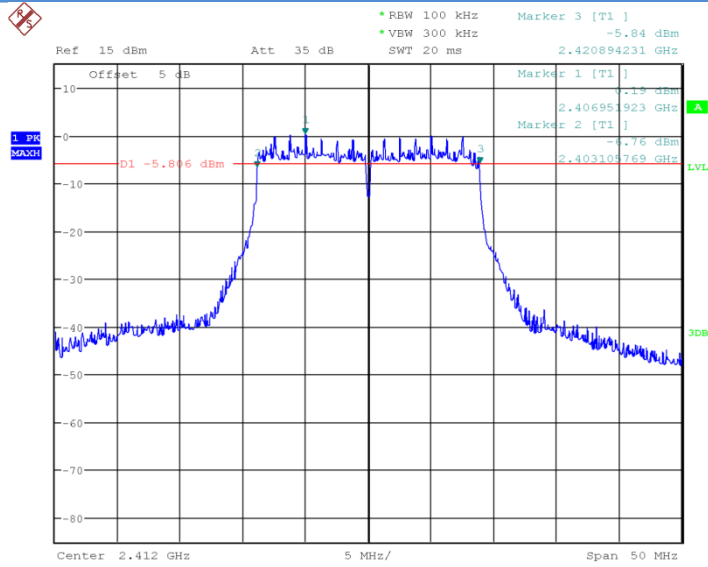


Date: 3.MAR.2017 09:03:42

**Fig.16 Occupied 6dB Bandwidth (802.11n-20MHz, Ch1)**

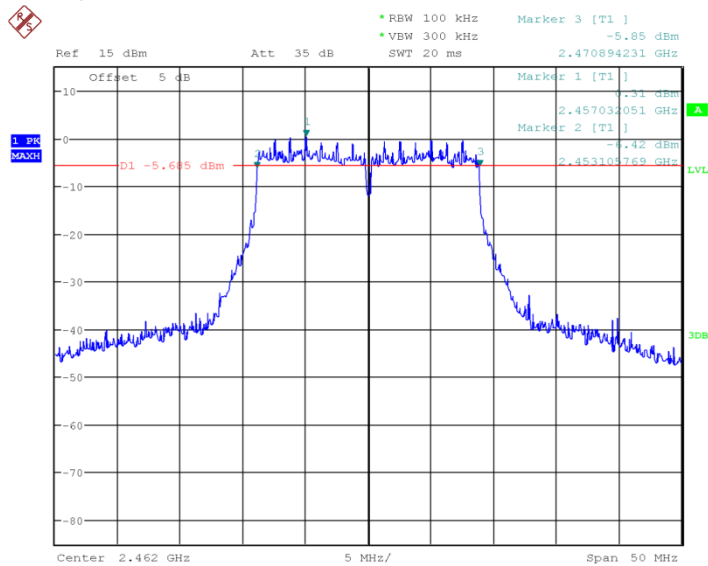

Date: 3.MAR.2017 09:05:30

**Fig.17 Occupied 6dB Bandwidth (802.11n-20MHz, Ch6)**

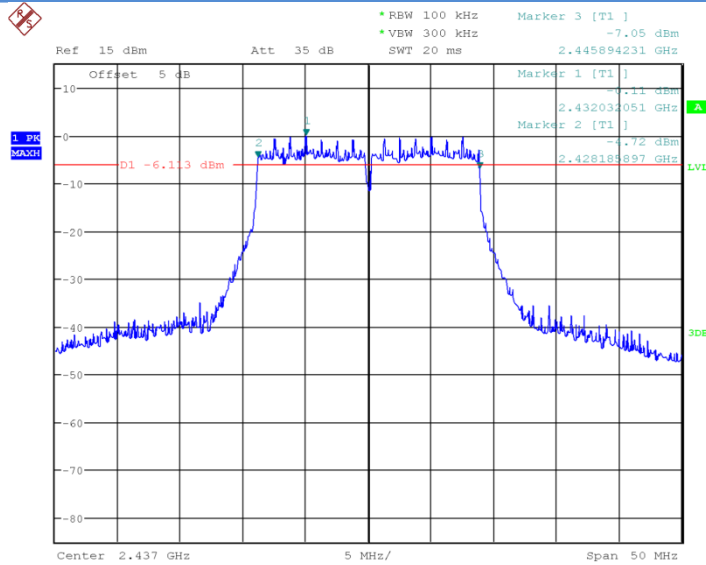

Date: 3.MAR.2017 09:04:26

**Fig.18 Occupied 6dB Bandwidth (802.11n-20MHz, Ch11)**

## 6.4. Band Edges Compliance

### 6.4.1 Measurement Limit:

Standard	Limited(dBc)
FCC 47 CFR Part 15.247(d)	>20

### 6.4.2 Test procedures

The measurement is according to ANSI C63.10 clause 11.13.

1. The output power of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Enable EUT transmitter maximum power continuously.
3. Set instrument center frequency to the frequency of the emission to be measured (must be within 2MHz of the authorized band edge).
4. Set span to 2 MHz.
5. RBW = 100 kHz.
6.  $VBW \geq [3 \times RBW]$ .
7. Detector = peak.
8. Sweep time = auto.
9. Trace mode = max hold.
10. Allow sweep to continue until the trace stabilizes

### 6.4.3 Measurement Uncertainty:

Measurement Uncertainty	0.75dB
-------------------------	--------

## 6.4.4 Measurement results

### 802.11b/g mode


Mode	Channel	Test Results	Conclusion
802.11b	1	Fig.19	P
	11	Fig.20	P
802.11g	1	Fig.21	P
	11	Fig.22	P

### 802.11n mode

Mode	Channel	Test Results	Conclusion
802.11n(20MHz)	1	Fig.23	P
	11	Fig.24	P
802.11(40MHz)	/	/	/
	/	/	/


**Conclusion: PASS**

Test graphs as blew:

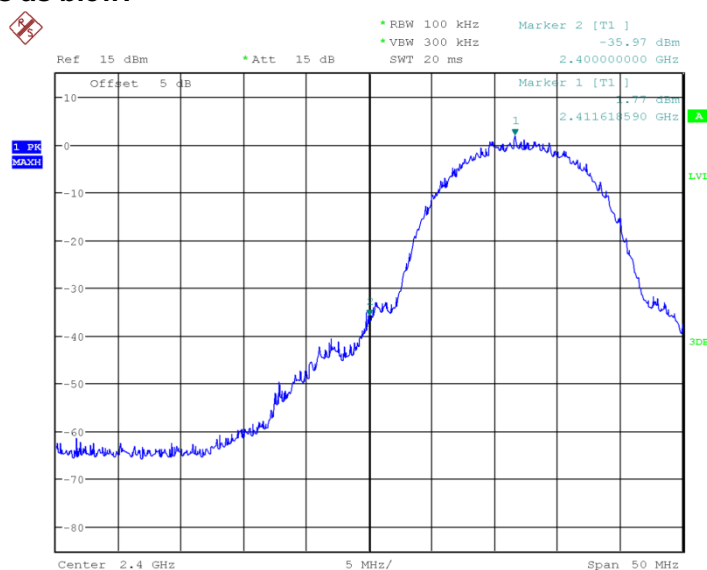


Date: 25.MAR.2017 12:43:16

**Fig.19 Band Edges (802.11b, Ch1)**

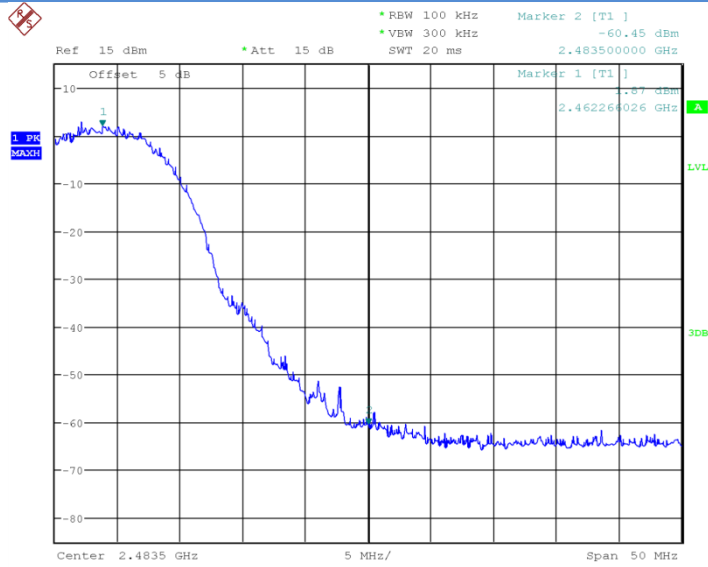


Date: 25.MAR.2017 12:44:49

**Fig.20 Band Edges (802.11b, Ch11)**

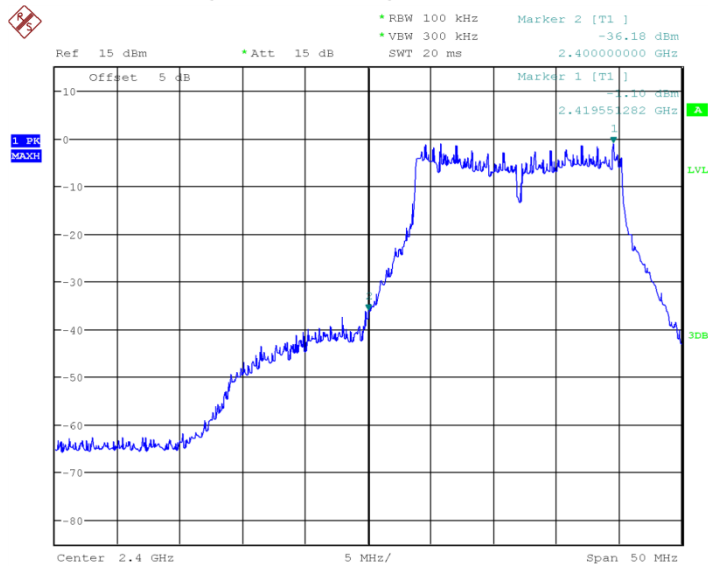


Date: 25.MAR.2017 12:45:50

**Fig.21 Band Edges (802.11g, Ch1)**

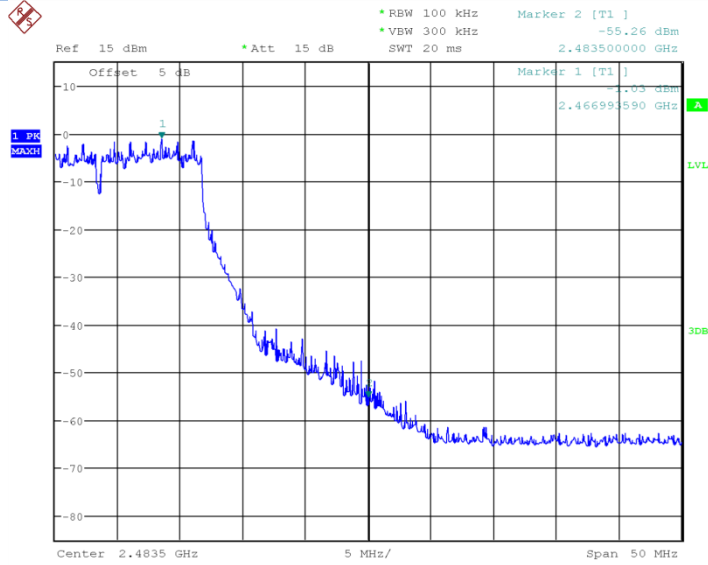


Date: 25.MAR.2017 12:48:37

**Fig.22 Band Edges (802.11g, Ch11)**

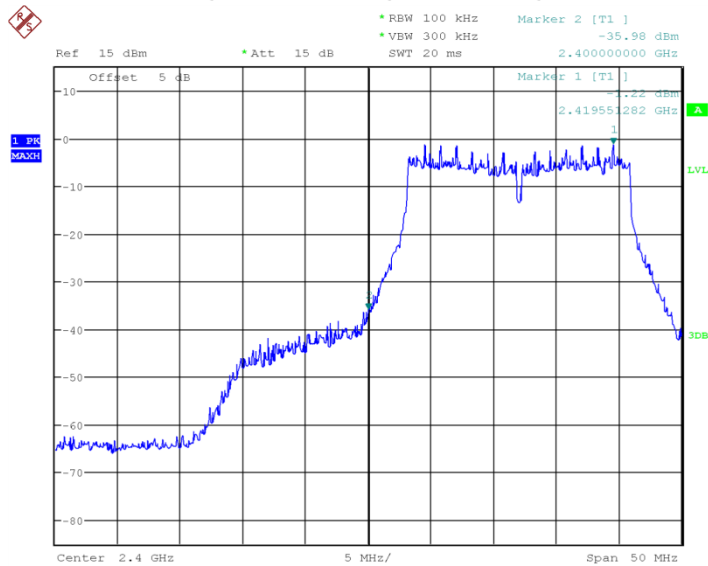

Date: 25.MAR.2017 12:49:45

**Fig.23 Band Edges (802.11n-20MHz, Ch1)**

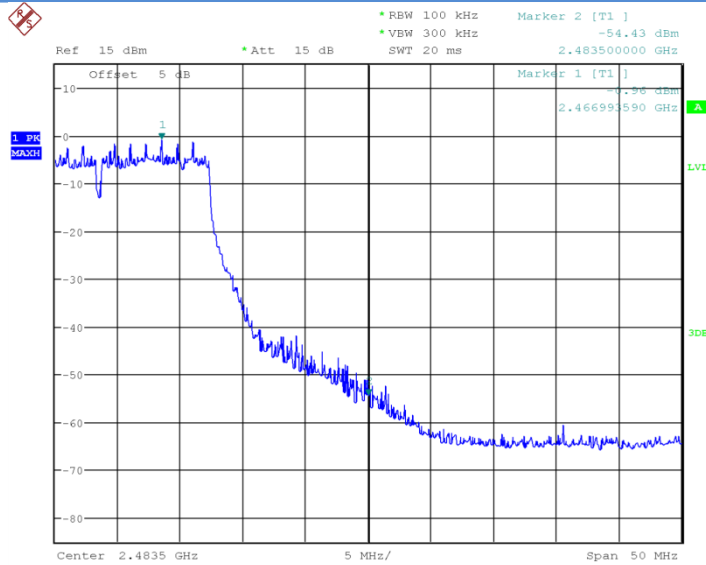

Date: 25.MAR.2017 12:50:08

**Fig.24 Band Edges (802.11b-20MHz, Ch11)**

## 6.5. Transmitter Spurious Emission-conducted

### 6.5.1 Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(d)	20dB below peak output power in 100KHz bandwidth

### 6.5.2 Test procedures

This measurement is according to ANSI C63.10 clause 11.11.

1. The output power of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Enable EUT transmitter maximum power continuously.

Reference level measurement

3. Set instrument center frequency to DTS channel center frequency.
4. Set the span to  $\geq 1.5$  times the DTS bandwidth.
5. Set the RBW = 100 kHz.
6. Set the VBW  $\geq [3 \times \text{RBW}]$ .
7. Detector = peak.
8. Sweep time = auto couple.
9. Trace mode = max hold.
10. Allow trace to fully stabilize.
11. Use the peak marker function to determine the maximum PSD level.

Emission level measurement

12. Set the center frequency and span to encompass frequency range to be measured.
13. Set the RBW = 100 kHz.



14. Set the VBW  $\geq [3 \times \text{RBW}]$ .
15. Detector = peak.
16. Sweep time = auto couple.
17. Trace mode = max hold.
18. Allow trace to fully stabilize.
19. Use the peak marker function to determine the maximum amplitude level.

**6.5.3 Measurement Uncertainty:**

Frequency Range	Uncertainty
$30\text{MHz} \leq f \leq 2\text{GHz}$	0.63
$2\text{GHz} \leq f \leq 3.6\text{GHz}$	0.82
$3.6\text{GHz} \leq f \leq 8\text{GHz}$	1.55
$8\text{GHz} \leq f \leq 20\text{GHz}$	1.86
$20\text{GHz} \leq f \leq 22\text{GHz}$	1.90
$22\text{GHz} \leq f \leq 26\text{GHz}$	2.20

**6.5.4 Measurement Result:**
**802.11b/g mode**


Mode	Channel	Frequency Range	Test Results	Conclusion
802.11b	1	2.412GHz	Fig.25	P
		30MHz~26GHz	Fig.26	P
	6	2.437GHz	Fig.27	P
		30MHz~26GHz	Fig.28	P
	11	2.462GHz	Fig.29	P
		30MHz~26GHz	Fig.30	P
802.11g	1	2.412GHz	Fig.31	P
		30MHz~26GHz	Fig.32	P
	6	2.437GHz	Fig.33	P
		30MHz~26GHz	Fig.34	P
	11	2.462GHz	Fig.35	P
		30MHz~26GHz	Fig.36	P

## 802.11n mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n(20MHz)	1	2.412GHz	Fig.37	P
		30MHz~26GHz	Fig.38	P
	6	2.437GHz	Fig.39	P
		30MHz~26GHz	Fig.40	P
	11	2.462GHz	Fig.41	P
		30MHz~26GHz	Fig.42	P
802.11n(40MHz)	1	/	/	/
		/	/	/
	6	/	/	/
		/	/	/
	11	/	/	/
		/	/	/


**Conclusion: PASS**

Test graphs as below:

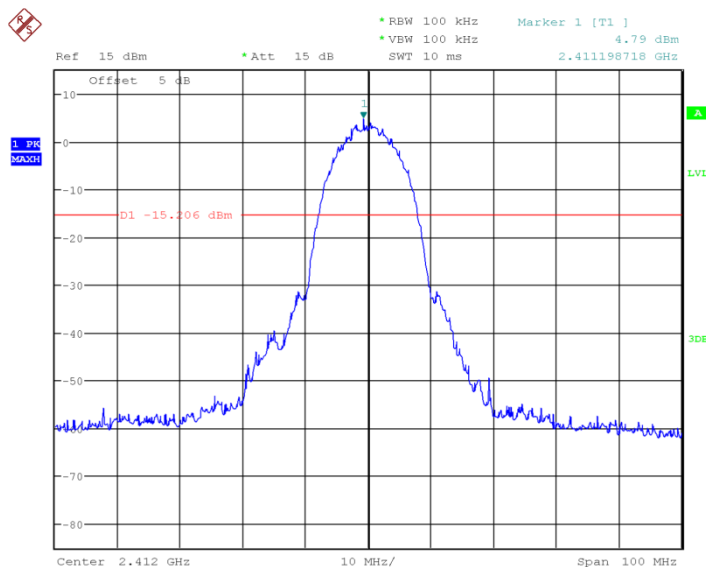


Date: 3.MAR.2017 09:16:08

**Fig.25 Conducted Spurious Emission (802.11b, Ch1)**

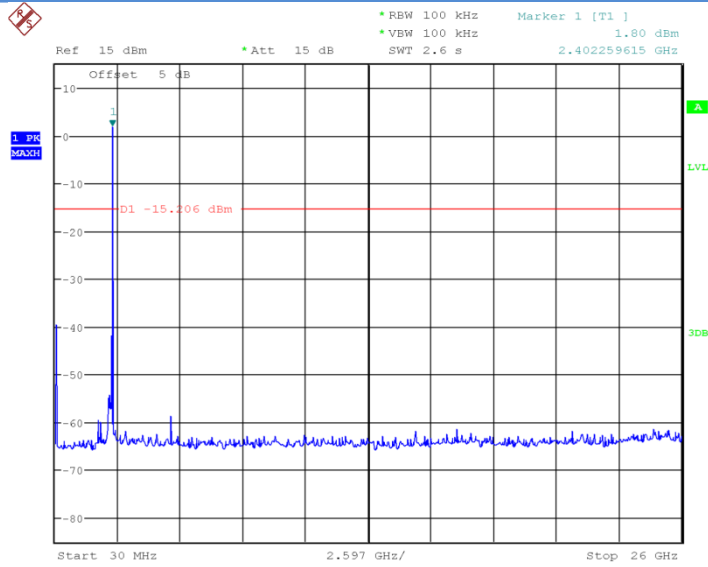


Date: 3.MAR.2017 09:16:31

**Fig.26 Conducted Spurious Emission (802.11b, Ch1, 30MHz~26GHz)**

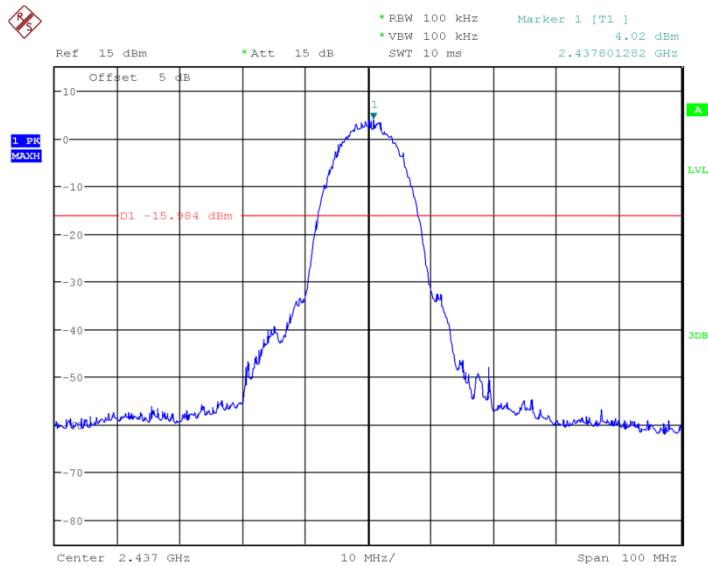


Date: 3.MAR.2017 09:18:00

**Fig.27 Conducted Spurious Emission (802.11b, Ch6)**

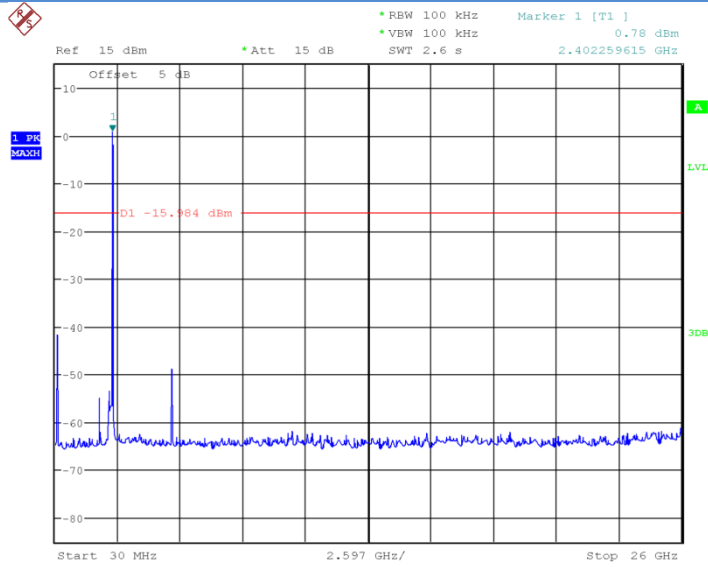


Date: 3.MAR.2017 09:18:24

**Fig.28 Conducted Spurious Emission (802.11b, Ch6, 30MHz~26GHz)**

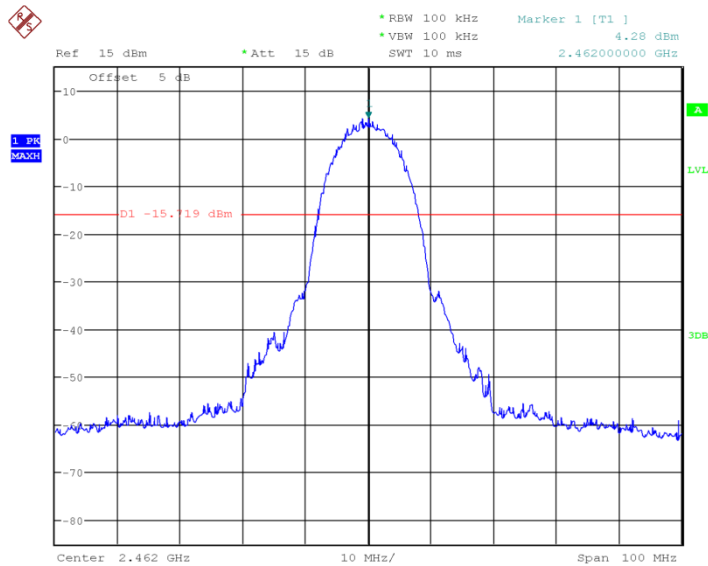


Date: 3.MAR.2017 09:18:56

**Fig.29 Conducted Spurious Emission (802.11b, Ch11)**

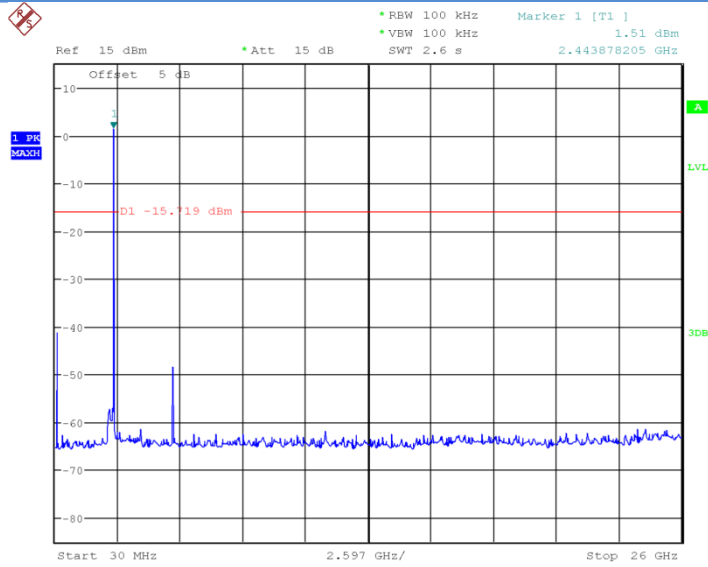


Date: 3.MAR.2017 09:19:19

**Fig.30 Conducted Spurious Emission (802.11b, Ch11, 30MHz~26GHz)**

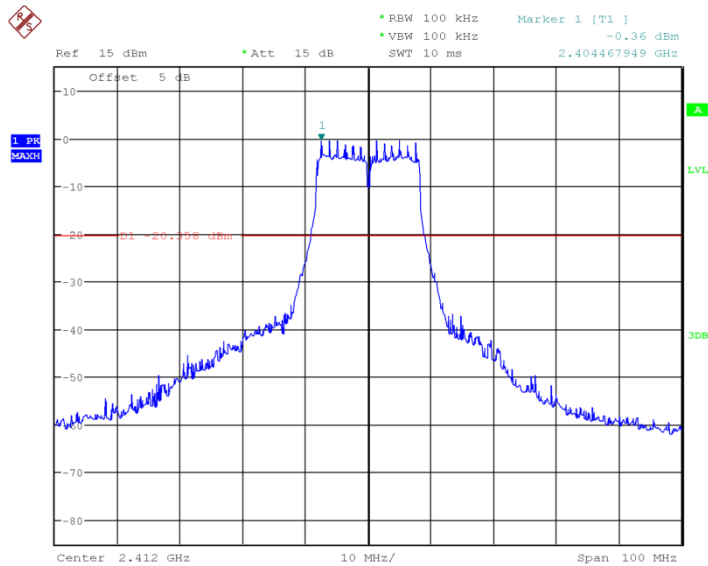


Date: 3.MAR.2017 09:26:55

**Fig.31 Conducted Spurious Emission (802.11g, Ch1)**

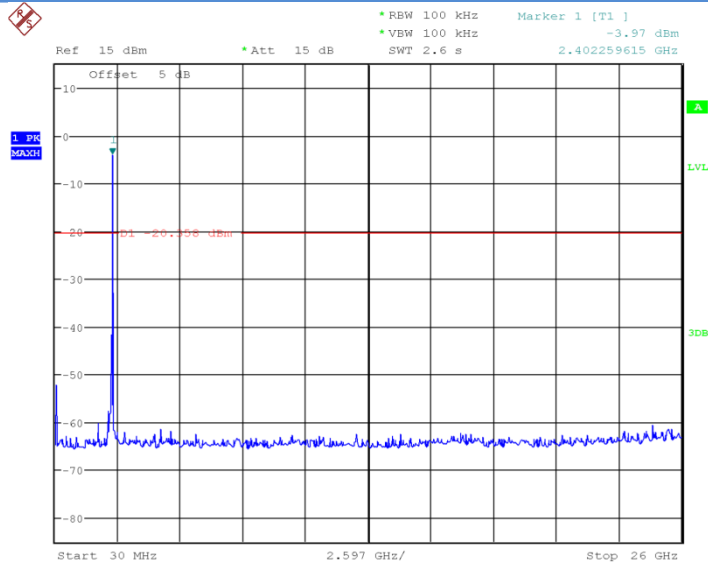


Date: 3.MAR.2017 09:27:18

**Fig.32 Conducted Spurious Emission (802.11g, Ch1, 30MHz~26GHz)**

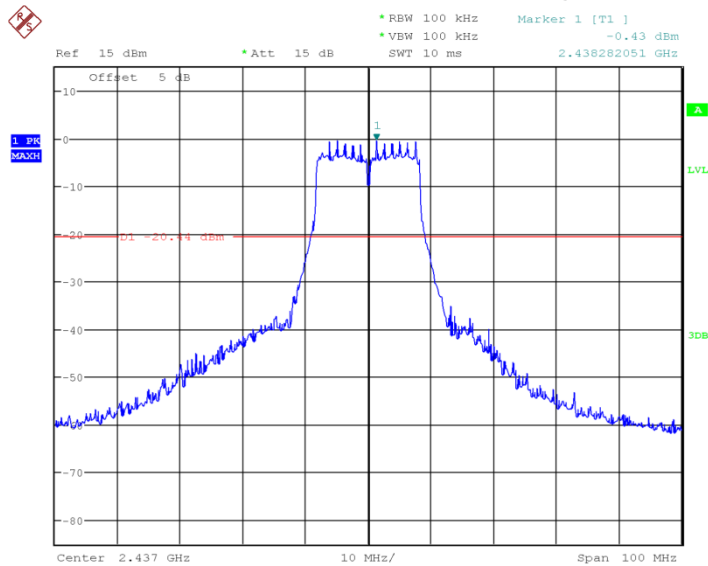


Date: 3.MAR.2017 09:27:47

**Fig.33 Conducted Spurious Emission (802.11g, Ch6)**

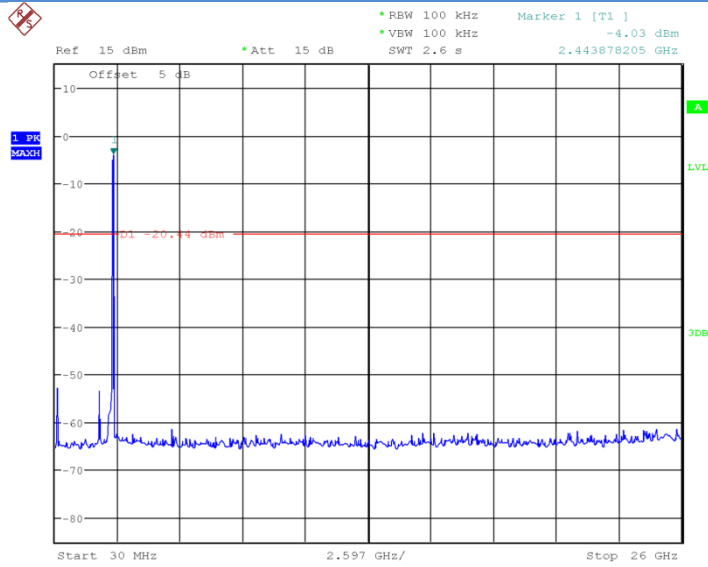


Date: 3.MAR.2017 09:28:10

**Fig.34 Conducted Spurious Emission (802.11g, Ch6, 30MHz~26GHz)**

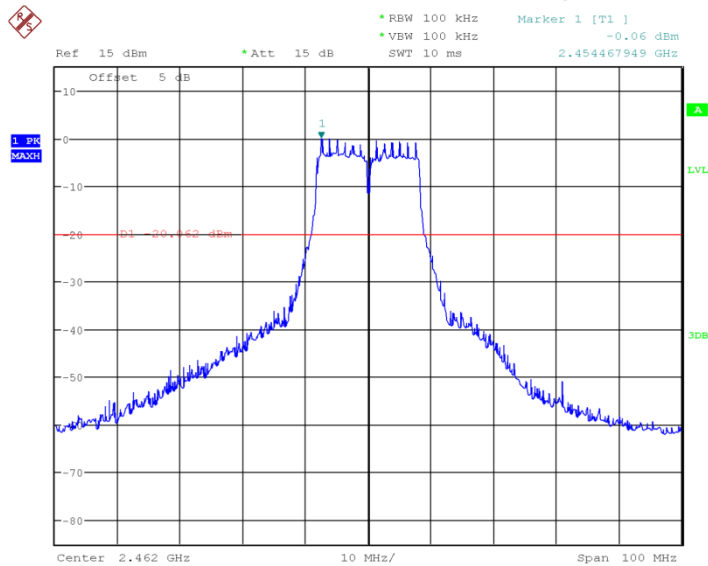


Date: 3.MAR.2017 09:28:37

**Fig.35 Conducted Spurious Emission (802.11g, Ch11)**

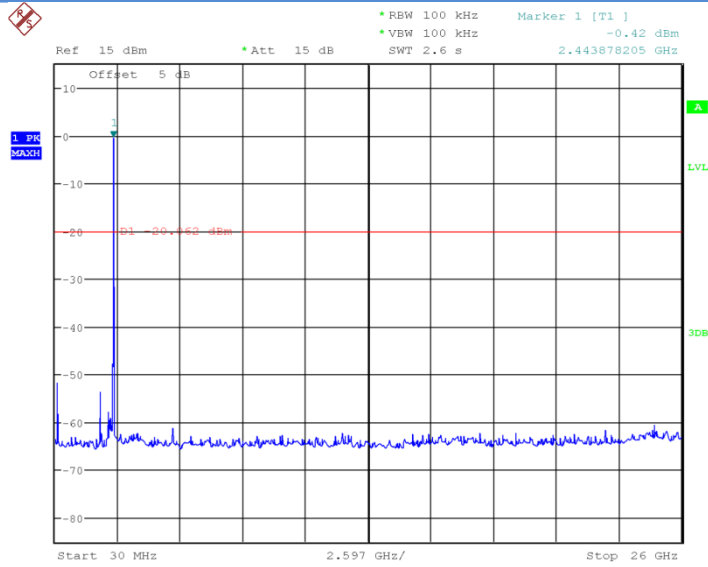

Date: 3.MAR.2017 09:29:01


**Fig.36 Conducted Spurious Emission (802.11g, Ch11, 30MHz~26GHz)**

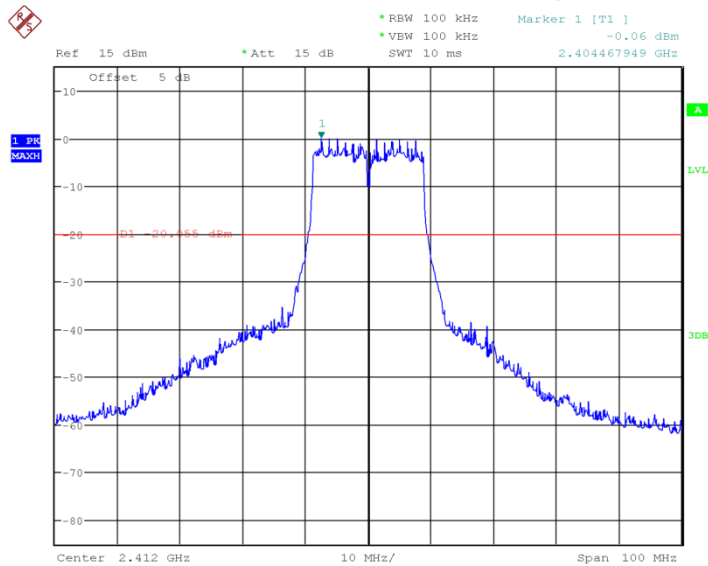

Date: 3.MAR.2017 09:29:34


**Fig.37 Conducted Spurious Emission (802.11n-20MHz, Ch1)**



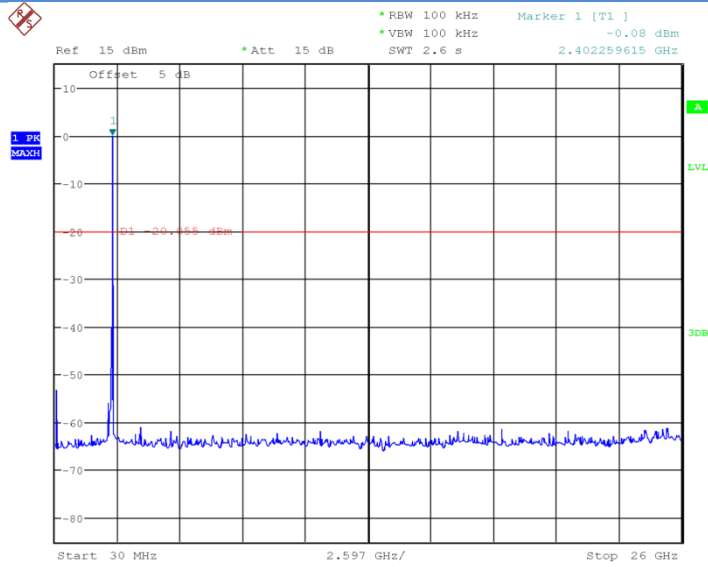


Date: 3.MAR.2017 09:29:58

**Fig.38 Conducted Spurious Emission (802.11n-20MHz, Ch1, 30MHz~26GHz)**

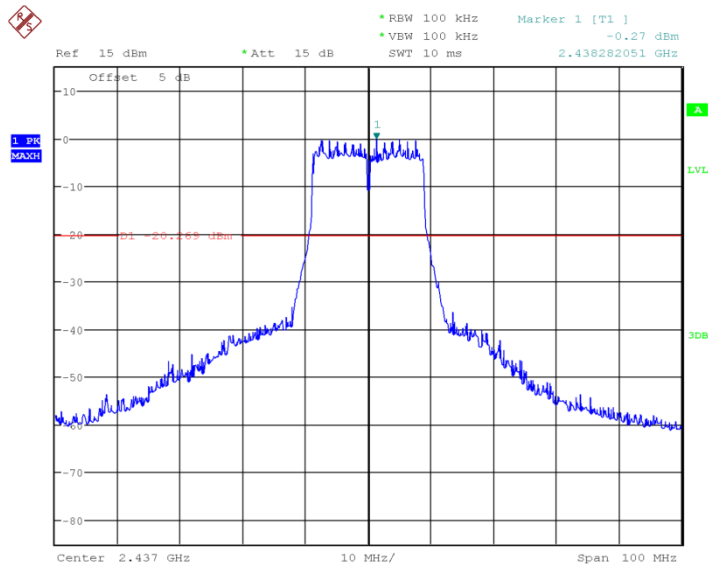


Date: 3.MAR.2017 09:30:25

**Fig.39 Conducted Spurious Emission (802.11n-20MHz, Ch6)**

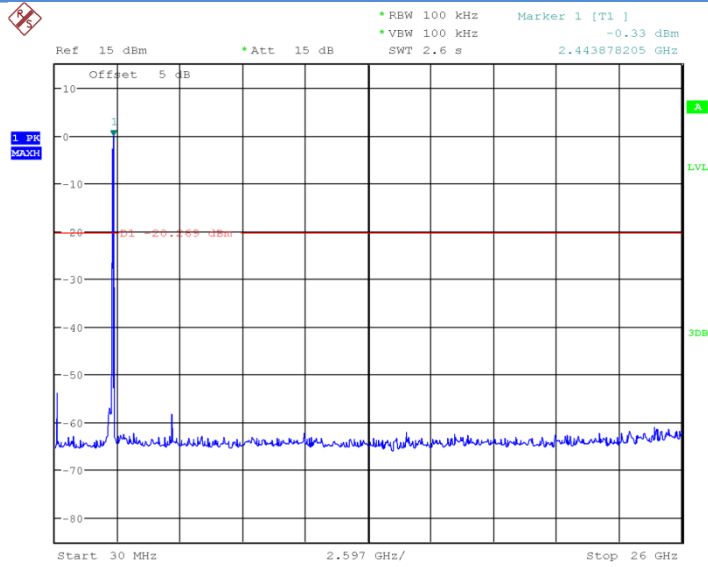


Date: 3.MAR.2017 09:30:48

**Fig.40 Conducted Spurious Emission (802.11n-20MHz, Ch6, 30MHz~26GHz)**

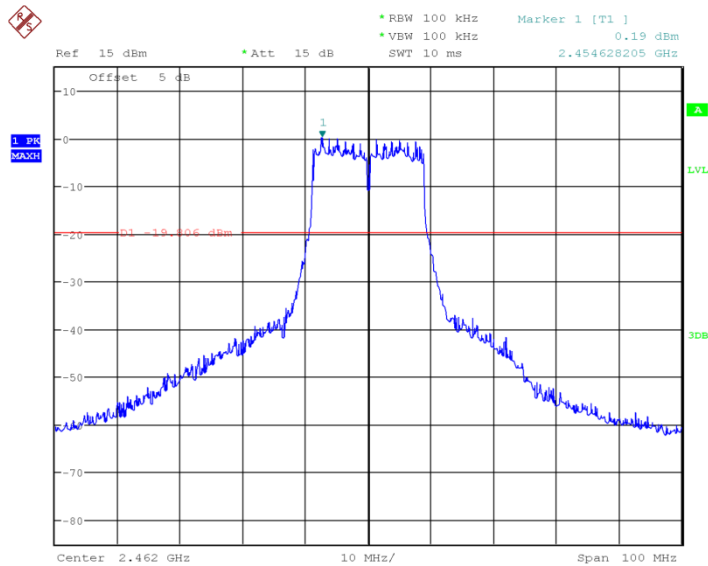

Date: 3.MAR.2017 09:31:16

**Fig.41 Conducted Spurious Emission (802.11n-20MHz, Ch11)**

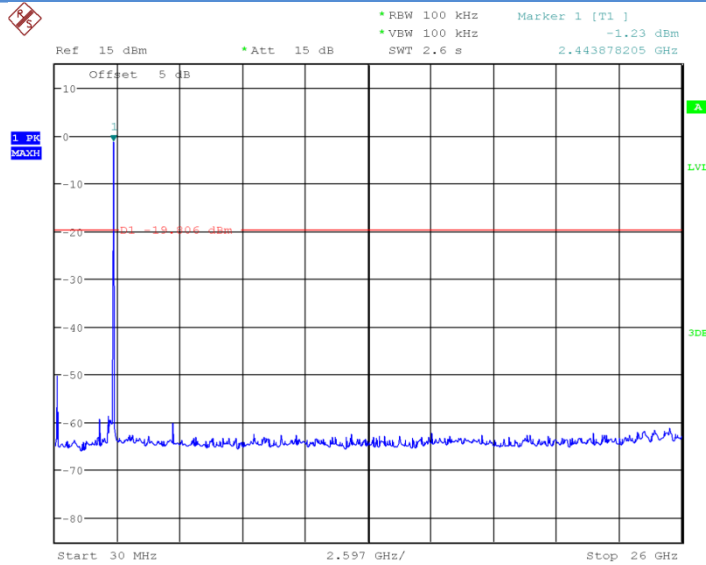

Date: 3.MAR.2017 09:31:39

**Fig.42 Conducted Spurious Emission (802.11n-20MHz, Ch11, 30MHz~26GHz)**

## 6.6. Transmitter Spurious Emission-Radiated

### 6.6.1 Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247,15.205,15.209	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in 25.205(a), must also comply with the radiated emission limits specified in 15.209(a)(see 15.205(c)). The measurement is according to ANSI C63.10 clause 11.11 and 11.12.

### 6.6.2 Limit in restricted band:

Frequency of emission(MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30~88	100	40
88~216	150	43.5
216~960	200	46
Above 960	500	54

### 6.6.3 Test procedures

Portable, small, lightweight, or modular devices that may be handheld, worn on the body, or placed on a table during operation shall be positioned on a nonconducting platform, the

top of which is 80 cm above the reference ground plane. The preferred area occupied by the EUT arrangement is 1 m by 1.5 m, but it may be larger or smaller to accommodate various sized EUTs. For testing purposes, ceiling- and wall-mounted devices also shall be positioned on a tabletop (see also ANSI C63.4-2014 section 6.3.4 and 6.3.5). In making any tests involving handheld, body-worn, or ceiling-mounted equipment, it is essential to recognize that the measured levels may be dependent on the orientation (attitude) of the three orthogonal axes of the EUT. Thus, exploratory tests as specified in 8.3.1 shall be carried out for various axes orientations to determine the attitude having maximum or near-maximum emission level.

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During testing, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emission from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW	Sweep Times (s)
30~1000	100KHz/300KHz	5
1000~4000	1MHz/1MHz	15
4000~18000	1MHz/1MHz	40
18000~26500	1MHz/1MHz	20

### Main Supply(3+32G)

#### 802.11b/g mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11b	Power	2.38GHz~2.45GHz	Fig.43	P
	Power	2.45GHz~2.5GHz	Fig.44	P
	1	30MHz~1GHz	Fig.45	P
		1GHz~3GHz	Fig.46	P
		3GHz~18GHz	Fig.47	P
802.11g	Power	2.38GHz~2.45GHz	Fig.48	P
	Power	2.45GHz~2.5GHz	Fig.49	P
	1	30MHz~1GHz	Fig.50	P
		1GHz~3GHz	Fig.51	P

		3GHz~18GHz	Fig.52	P
--	--	------------	--------	---

**802.11n mode**

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n(20MHz)	Power	2.38GHz~2.45GHz	Fig.53	P
	Power	2.45GHz~2.5GHz	Fig.54	P
	1	30MHz~1GHz	Fig.55	P
		1GHz~3GHz	Fig.56	P
		3GHz~18GHz	Fig.57	P

**Main Supply(2+16)**
**802.11g mode**

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n(20MHz)	Power	2.38GHz~2.45GHz	Fig.58	P
	Power	2.45GHz~2.5GHz	Fig.59	P
	1	30MHz~1GHz	Fig.60	P
		1GHz~3GHz	Fig.61	P
		3GHz~18GHz	Fig.62	P

**Second Supply(3+32G)**
**802.11g mode**

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n(20MHz)	Power	2.38GHz~2.45GHz	Fig.63	P
	Power	2.45GHz~2.5GHz	Fig.64	P
	1	30MHz~1GHz	Fig.65	P
		1GHz~3GHz	Fig.66	P
		3GHz~18GHz	Fig.67	P

## Second Supply(2+16G)

### 802.11g mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n(20MHz)	Power	2.38GHz~2.45GHz	Fig.68	P
	Power	2.45GHz~2.5GHz	Fig.69	P
	1	30MHz~1GHz	Fig.70	P
		1GHz~3GHz	Fig.71	P
		3GHz~18GHz	Fig.72	P

**Conclusion: PASS**

**Note:**

A "reference path loss" is established and  $A_{Rpi}$  is the attenuation of "reference path loss", and including the gain of receive antenna , the gain of the preamplifier, the cable loss.

$P_{Mea}$  is the field strength recorded from the instrument.

The measurement results are obtained as described below:

$AR_{pi}$  = Cable loss + Antenna Gain-Preamplifier gain

Result =  $P_{Mea}$  + Cable loss + Antenna Gain-Preamplifier gain =  $P_{Mea}$  +  $AR_{pi}$  .

## Main Supply(3G+32G)

### 802.11b mode

#### Ch1 30MHz~1GHz

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
34.62336	13.32	-26.7	40.02	V
95.153444	6.37	-24.5	30.87	H
177.363752	4.85	-25.8	30.65	V
228.181144	6.13	-23.5	29.63	V
785.765164	17.75	-11.3	29.05	H

#### Ch1 1GHz~3GHz

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
2677.127116	52.68	9.4	43.28	H
2809.945192	52.7	10	42.7	H
2885.8925	53.47	10.7	42.77	V

2908.744039	53.66	10.6	43.06	V
2947.191538	53.75	10.5	43.25	H
2990.462308	53.77	11.1	42.67	H

**Ch1 3GHz~18GHz**

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
14307.7466	55.08	20.7	34.38	H
15398.99027	56.64	23.2	33.44	H
15908.80733	58.19	24.7	33.49	V
16487.1432	59.98	26.8	33.18	V
16795.4982	60.07	27.3	32.77	V
17549.74833	62.51	29.3	33.21	V

**Average:**

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
14307.7466	42.64	20.7	21.94	H
15398.99027	44.26	23.2	21.06	H
15908.80733	46.21	24.7	21.51	V
16487.1432	47.15	26.8	20.35	V
16795.4982	47.68	27.3	20.38	V
17549.74833	49.93	29.3	20.63	V

**802.11g mode**
**Ch1 30MHz~1GHz**

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
34.193508	13.06	-26.8	39.86	V
46.476592	5.25	-25.8	31.05	V
103.06924	6.25	-24.9	31.15	H
240.468176	6.73	-23.4	30.13	H

442.259488	12.05	-16.8	28.85	V
924.453096	21.57	-7.7	29.27	V

**Ch1 1GHz~3GHz**

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
2670.013462	52.53	9.4	43.13	V
2779.605	52.94	9.6	43.34	V
2831.554615	53.21	10.4	42.81	V
2897.201923	53.34	10.8	42.54	V
2949.213846	53.18	10.7	42.48	H
2990.484039	53.80	11.3	42.5	V

**Ch1 3GHz~18GHz**

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
8308.789467	46.12	7.3	38.82	V
11294.4192	50.63	13.7	36.93	H
13280.775	53.87	17.2	36.67	H
15084.9874	55.5	21.3	34.2	H
17594.66853	61.85	29.5	32.35	V

**Average:**

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
15084.9874	47.35	21.3	26.05	H
17594.66853	61.85	29.5	32.35	V

**802.11n-20MHz**
**Ch1 30MHz~1GHz**

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
33.857816	13.53	-26.8	40.33	V
104.964168	5.01	-24.7	29.71	H
305.20034	8.44	-20.8	29.24	V





## RF Test Report

Report No.: I17D00023-SRD03

489.410344	13.48	-15.7	29.18	H
673.897108	16.66	-12.4	29.06	V
927.41514	21.6	-7.6	29.2	V

### Ch1 1GHz~3GHz

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
2278.3728	49.36	6	43.36	V
2548.911923	52.1	8.4	43.7	V
2716.701731	52.04	9.4	42.64	H
2774.962885	52.16	9.6	42.56	V
2896.572307	53.49	10.8	42.69	V
2994.431923	53.31	11.3	42.01	H

### Ch1 3GHz~18GHz

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
11465.211	51.99	14.4	37.59	H
12854.52913	52.48	16.6	35.88	V
14304.98613	54.62	20.7	33.92	H
15456.20033	56.85	23.3	33.55	H
16020.8778	59.15	25.2	33.95	V
17299.81333	61.73	28.4	33.33	H

### Average:

14304.98613	46.03	20.7	25.33	H
15456.20033	46.06	23.3	22.76	H
16020.8778	47.65	25.2	22.45	V
17299.81333	49.78	28.4	21.38	H

### Main Supply(2+16G)

802.11g

Ch1 30MHz~1GHz

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
34.543444	12.17	-26.7	38.87	V
37.567348	10.59	-25.1	35.69	V
621.624288	15.62	-13.5	29.12	H
743.42554	20.25	-12	32.25	H
862.640608	19.15	-9.9	29.05	V
918.193164	20.11	-8.9	29.01	H

Ch1 1GHz~3GHz

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
2681.9675	52.34	9.4	42.94	V
2789.038461	52.44	9.7	42.74	H
2838.168653	52.43	10.5	41.93	V
2883.059808	53.13	10.7	42.43	H
2916.71423	53.6	10.6	43	H
2957.220385	53.49	10.6	42.89	H

Ch1 3GHz~18GHz

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
13403.7664	55.58	17.7	37.88	H
14264.97233	55.49	20.3	35.19	V
14899.27607	56.57	22.2	34.37	H
15819.62387	58.44	24.7	33.74	H
16842.4124	60.74	27.3	33.44	V
17570.5088	62.06	29.4	32.66	V

**Average:**

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity



## RF Test Report

Report No.: I17D00023-SRD03

13403.7664	41.69	17.7	23.99	H
14264.97233	42.42	20.3	22.12	V
14899.27607	44.45	22.2	22.25	H
15819.62387	45.74	24.7	21.04	H
16842.4124	48.02	27.3	20.72	V
17570.5088	49.94	29.4	20.54	V

### Second Supply(3G+32G)

802.11g

#### Ch1 30MHz~1GHz

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
34.019476	11.19	-26.6	37.79	V
98.067096	7.01	-24	31.01	H
247.806032	13.98	-22.7	36.68	V
528.798844	13.67	-15.4	29.07	H
683.489116	16.29	-12.8	29.09	V
934.317796	20.36	-8.6	28.96	H

#### Ch1 1GHz~3GHz

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
2617.992692	51.81	9	42.81	V
2683.724616	52.07	9.4	42.67	V
2744.29077	51.93	9.4	42.53	V
2839.692884	53.05	10.6	42.45	V
2943.013077	52.92	10.5	42.42	V
2978.717692	52.98	10.9	42.08	V

#### Ch1 3GHz~18GHz

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
----------------	----------------	-----------	--------------	----------



## RF Test Report

Report No.: I17D00023-SRD03

14304.32513	55.35	20.7	34.65	V
14945.24947	56.65	21.9	34.75	H
15401.32993	56.33	23.2	33.13	V
16213.91873	60.6	25.6	35	H
16780.41067	59.38	26.9	32.48	V
17578.92193	62.06	29.5	32.56	H

### Average:

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
14304.32513	42.63	20.7	21.93	V
14945.24947	44.00	21.9	22.1	H
15401.32993	44.63	23.2	21.43	V
16213.91873	46.68	25.6	21.08	H
16780.41067	47.32	26.9	20.42	V
17578.92193	50.04	29.5	20.54	H

### Second Supply(2G+16G)

802.11g

Ch1 30MHz~1GHz

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
34.543444	12.17	-26.7	38.87	V
37.567348	10.59	-25.1	35.69	V
621.624288	15.62	-13.5	29.12	H
743.42554	20.25	-12	32.25	H
862.640608	19.15	-9.9	29.05	V
918.193164	20.11	-8.9	29.01	H

### Ch1 1GHz~3GHz

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
2681.9675	52.34	9.4	42.94	V

2789.038461	52.44	9.7	42.74	H
2838.168653	52.43	10.5	41.93	V
2883.059808	53.13	10.7	42.43	H
2916.71423	53.6	10.6	43	H
2957.220385	53.49	10.6	42.89	H


**Ch1 3GHz~18GHz**

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
13403.7664	55.58	17.7	37.88	H
14264.97233	55.49	20.3	35.19	V
14899.27607	56.57	22.2	34.37	H
15819.62387	58.44	24.7	33.74	H
16842.4124	60.74	27.3	33.44	V
17570.5088	62.06	29.4	32.66	V


**Average:**

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
13403.7664	41.69	17.7	23.99	H
14264.97233	42.42	20.3	22.12	V
14899.27607	44.45	22.2	22.25	H
15819.62387	45.74	24.7	21.04	H
16842.4124	48.02	27.3	20.72	V
17570.5088	49.94	29.4	20.54	V

**Test graphs as below:**

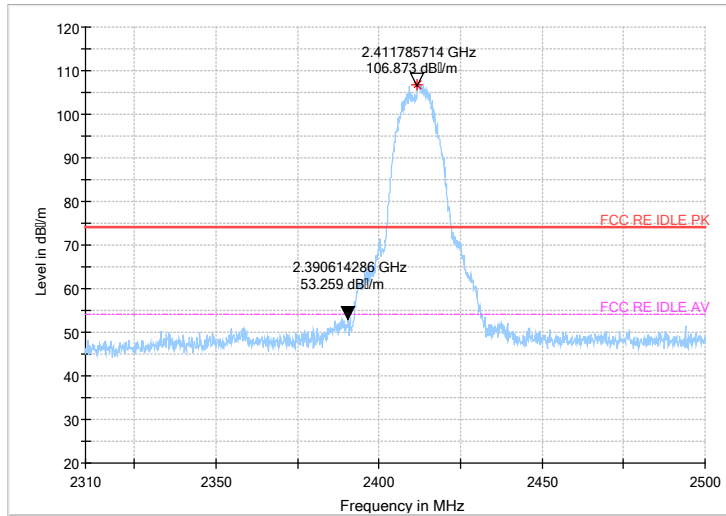


**Peak detector**

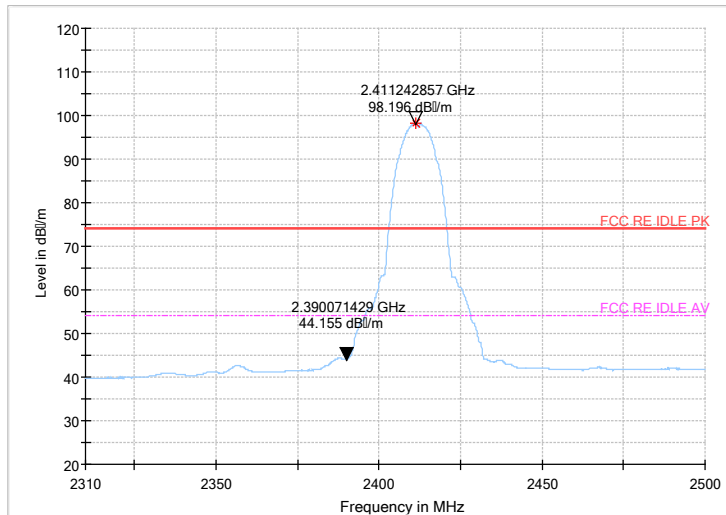


**AV detector**

**Fig.43 Radiated emission (Power): 802.11b, low channel**

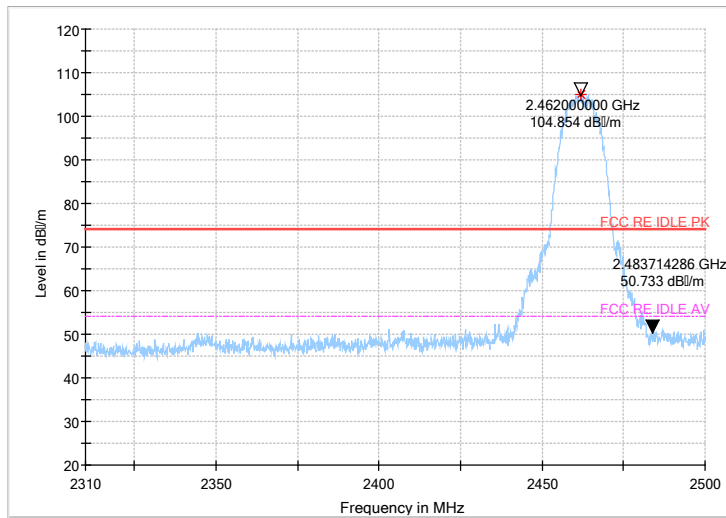


**Peak detector**

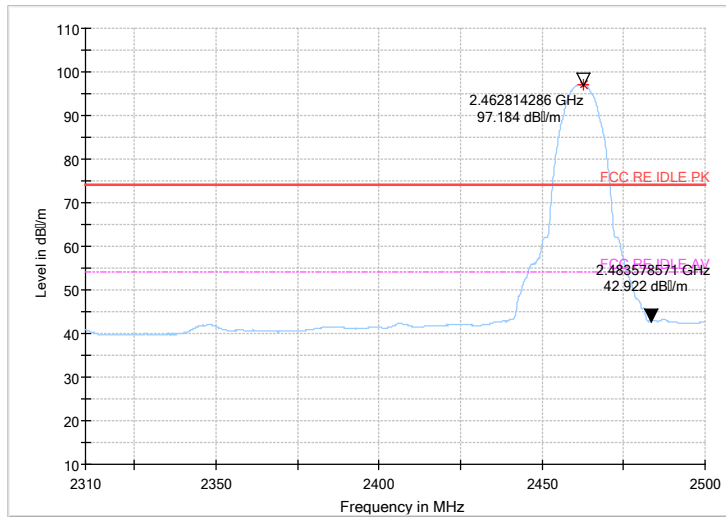


**AV detector**


**Fig.44 Radiated emission (Power): 802.11b, high channel**

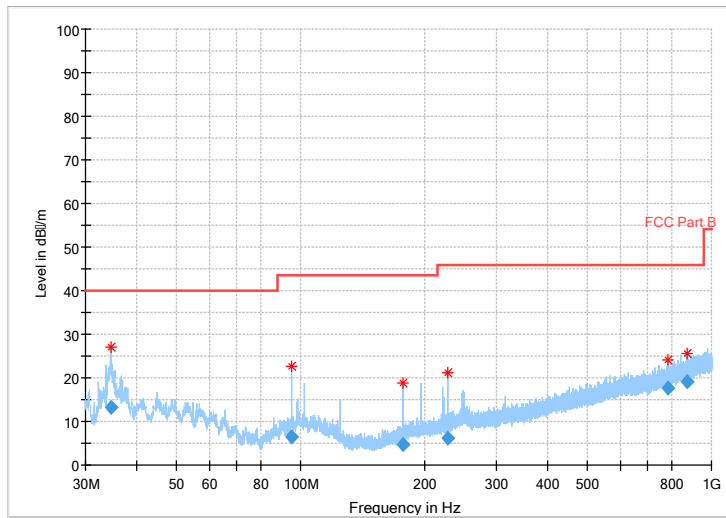

**Fig.45 Radiated Spurious Emission (802.11b,Ch1,30MHz~1GHz)**

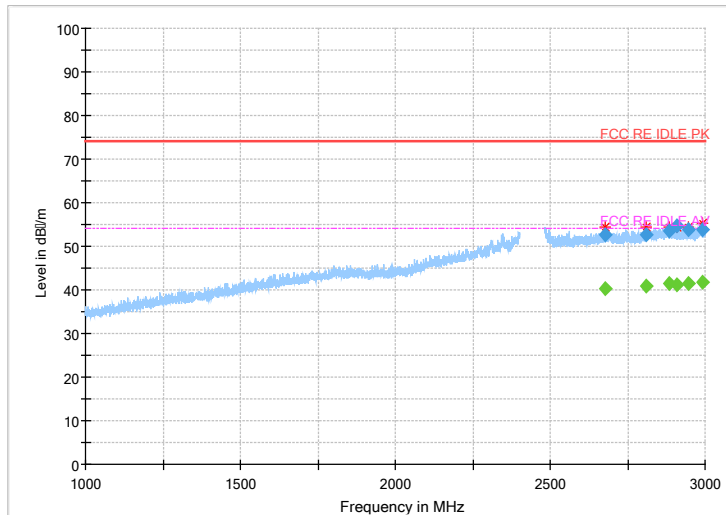


**Fig.46 Radiated Spurious Emission (802.11b,Ch1,1GHz~3GHz)**

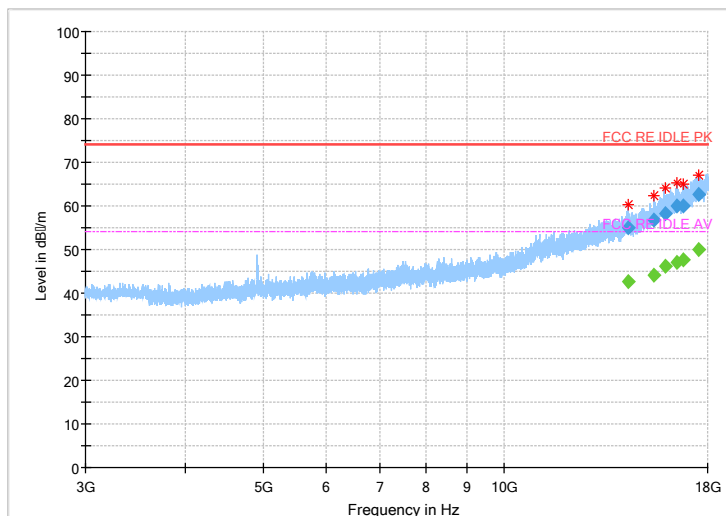




**Fig.47 Radiated Spurious Emission (802.11b,Ch1,3GHz~18GHz)**

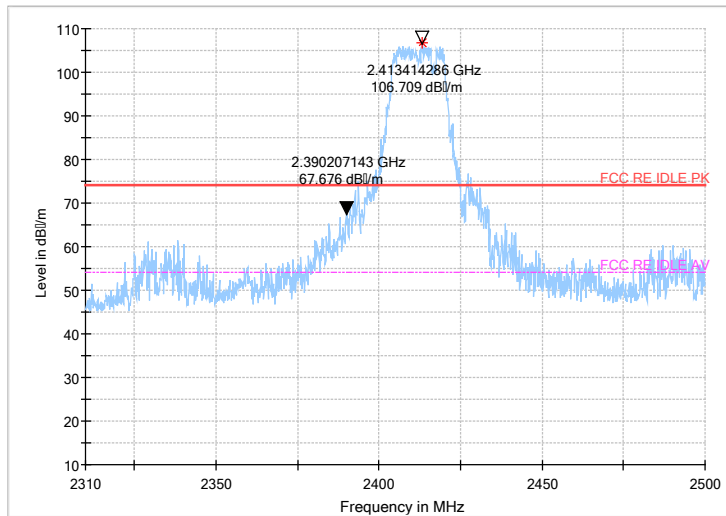


**Peak detector**

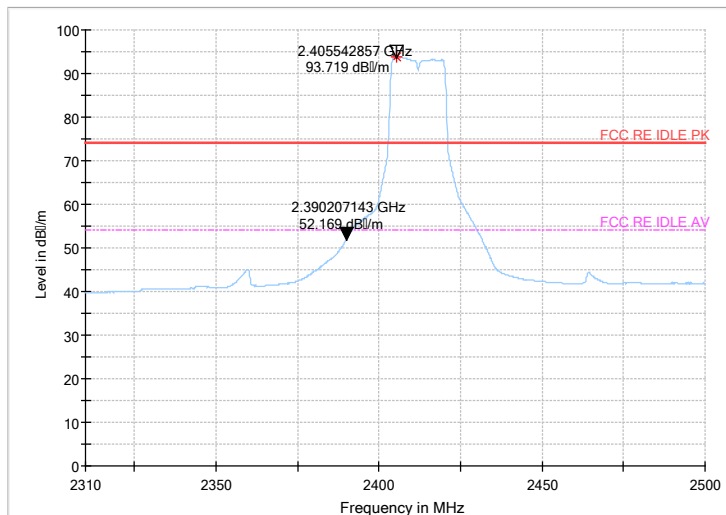


**AV detector**

**Fig.48 Radiated emission (Power): 802.11g, low channel**

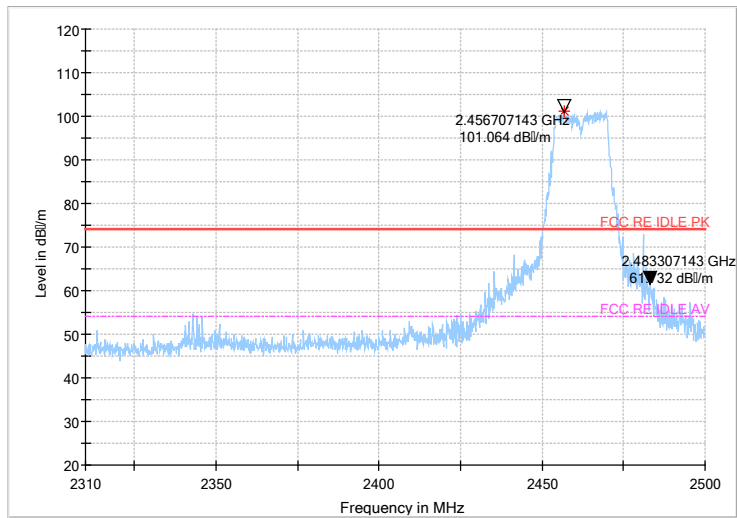


**Peak detector**

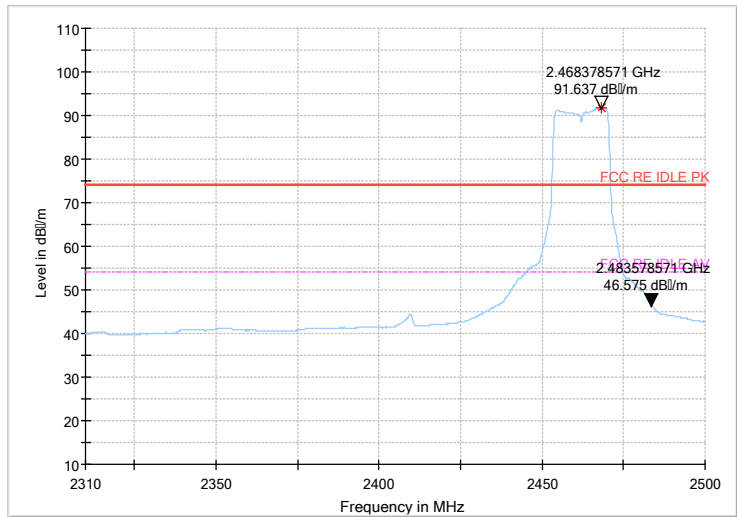


**AV detector**


**Fig.49 Radiated emission (Power): 802.11g, high channel**

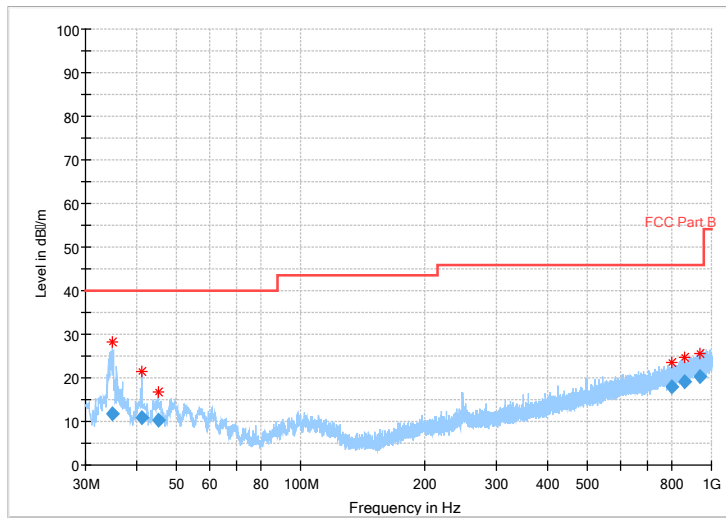


**Fig.50 Radiated Spurious Emission (802.11g,Ch1,30MHz~1GHz)**

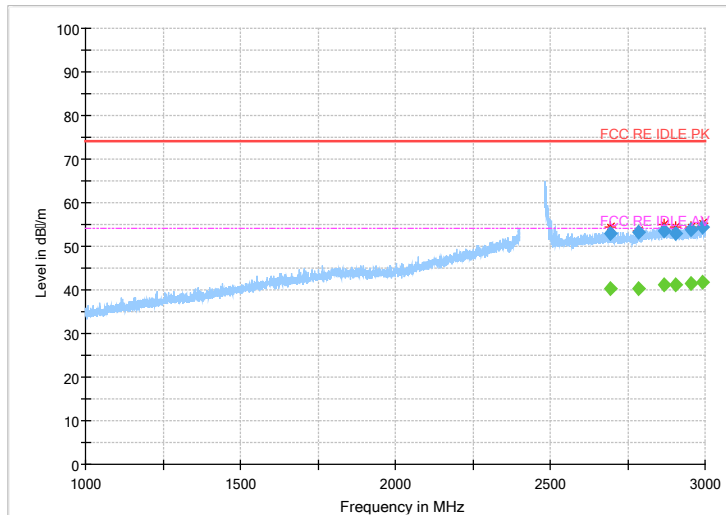


**Fig.51 Radiated Spurious Emission (802.11g,Ch1,1GHz~3GHz)**

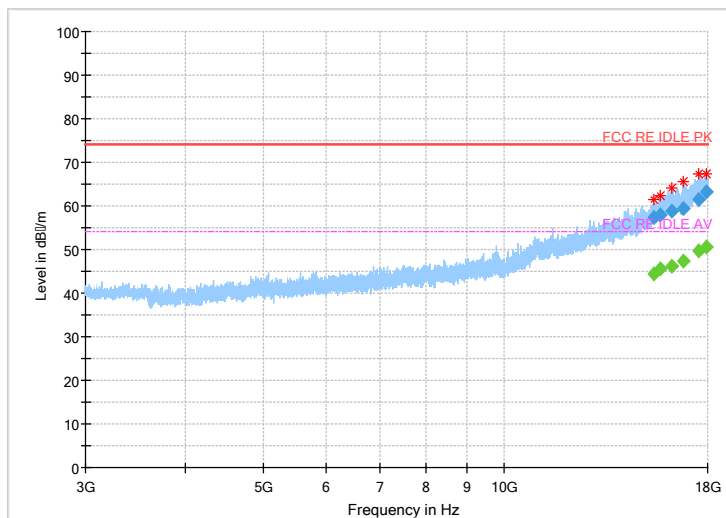

**Fig.52 Radiated Spurious Emission (802.11g,Ch1,3GHz~18GHz)**

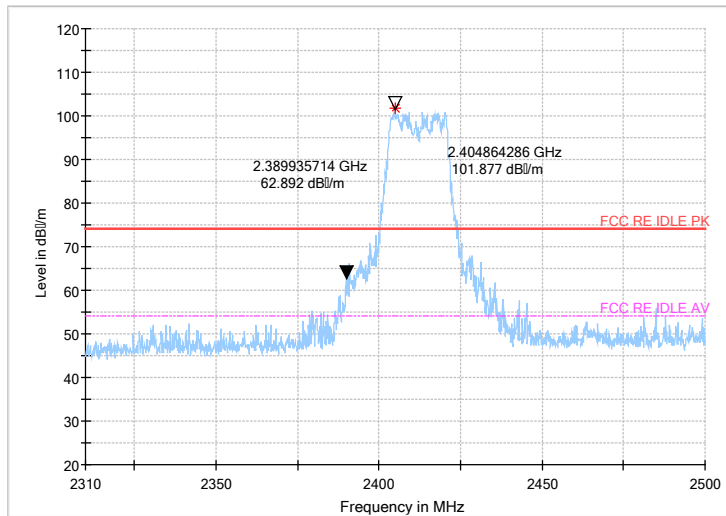


**Peak detector**

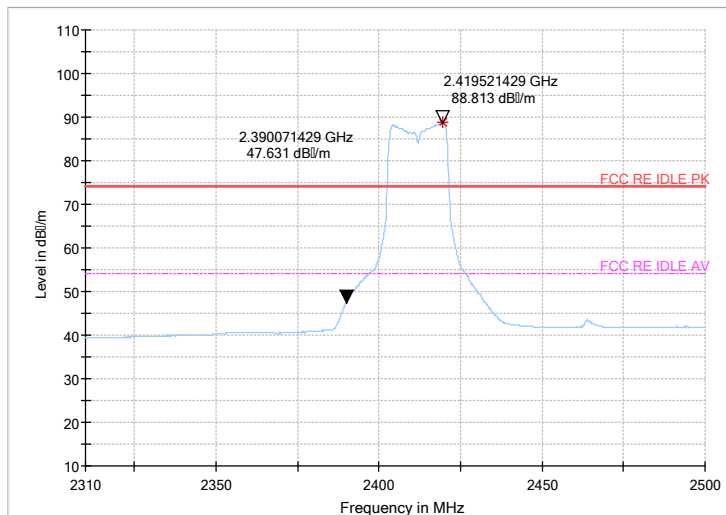


**AV detector**

**Fig.53 Radiated emission (Power): 802.11n, low channel**

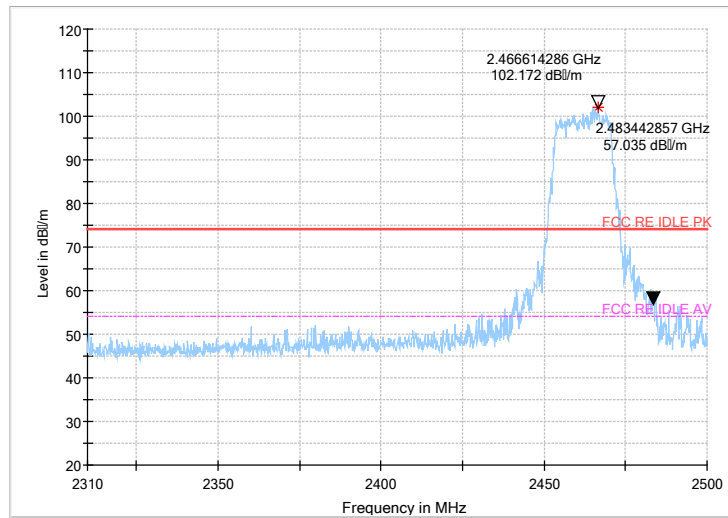


**Peak detector**

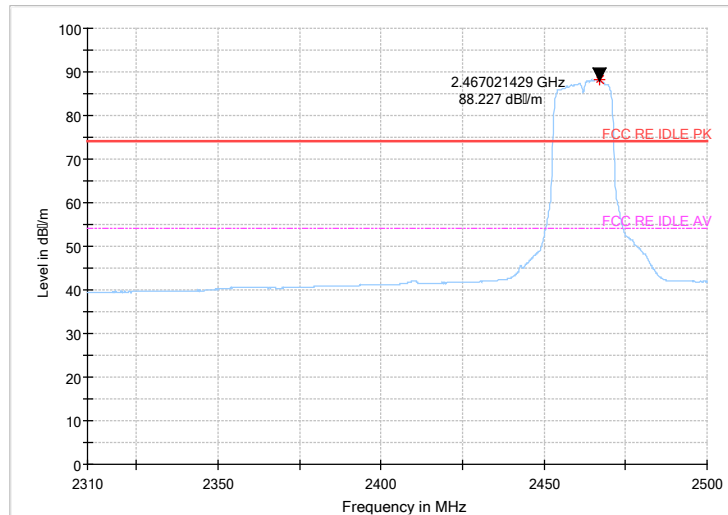


**AV detector**


**Fig.54 Radiated emission (Power): 802.11n, high channel**

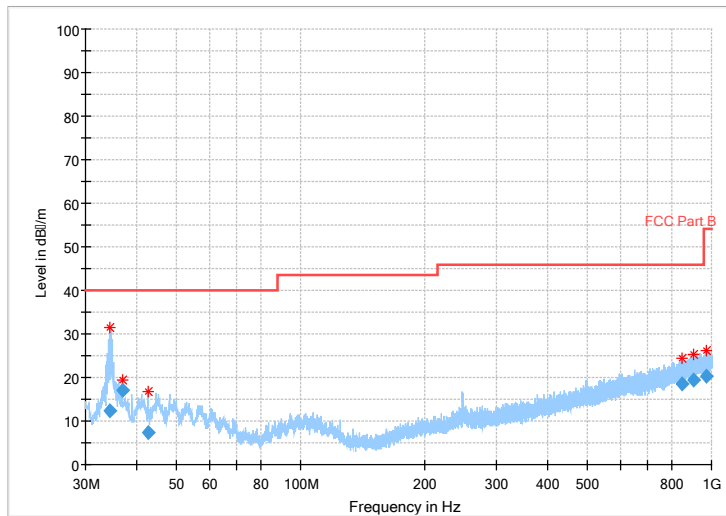

**Fig.55 Radiated Spurious Emission (802.11 n-20MHz,Ch1,30MHz~1GHz)**

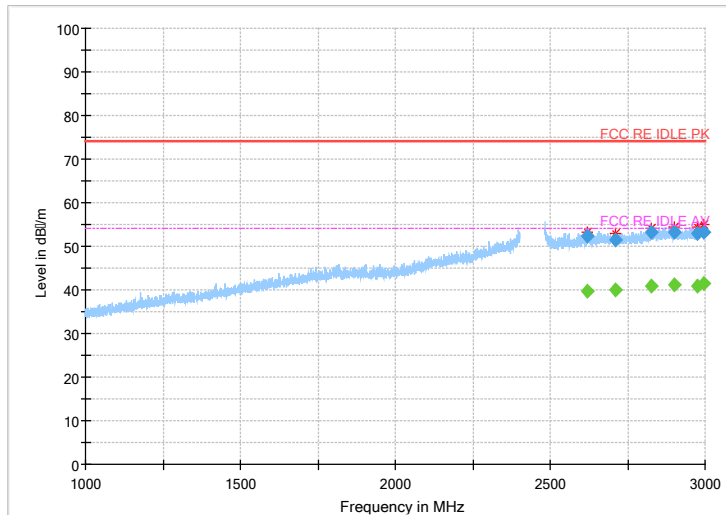


**Fig.56 Radiated Spurious Emission (802.11 n-20MHz,Ch1,1GHz~3GHz)**

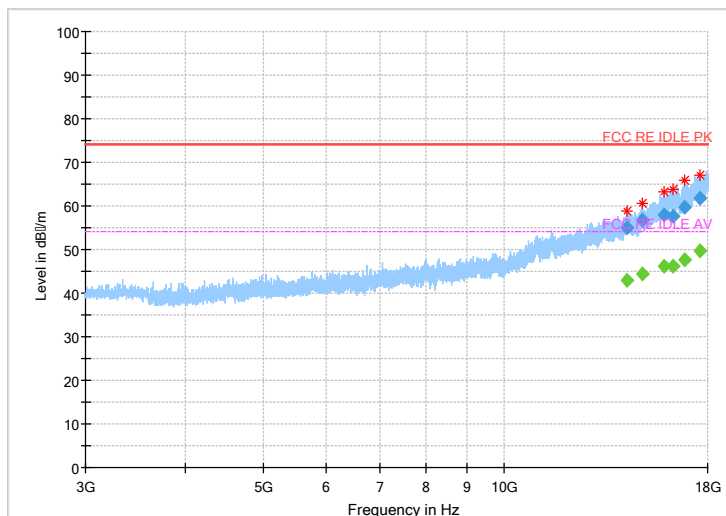


**Fig.57 Radiated Spurious Emission (802.11 n-20MHz,Ch1,3GHz~18GHz)**

**Second Supply(3+32G)**

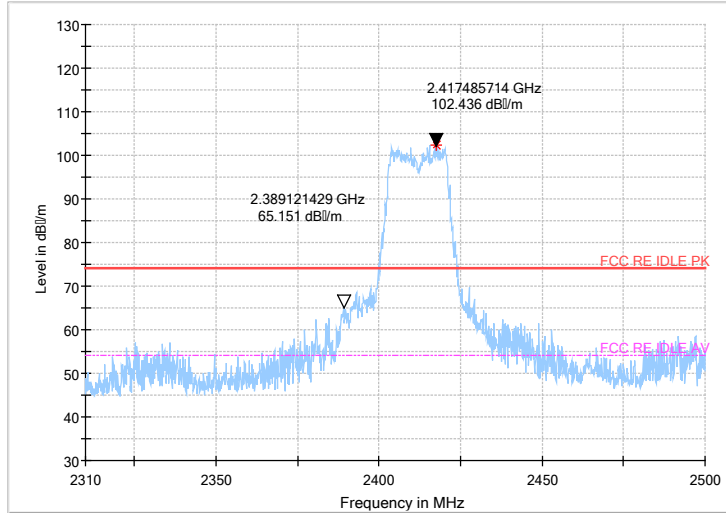


**Peak detector**

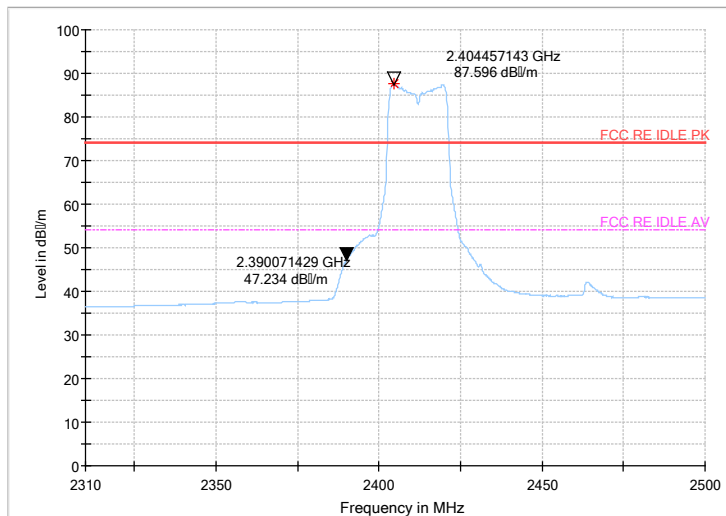


**AV detector**

**Fig.58 Radiated emission (Power): 802.11g, Low channel**

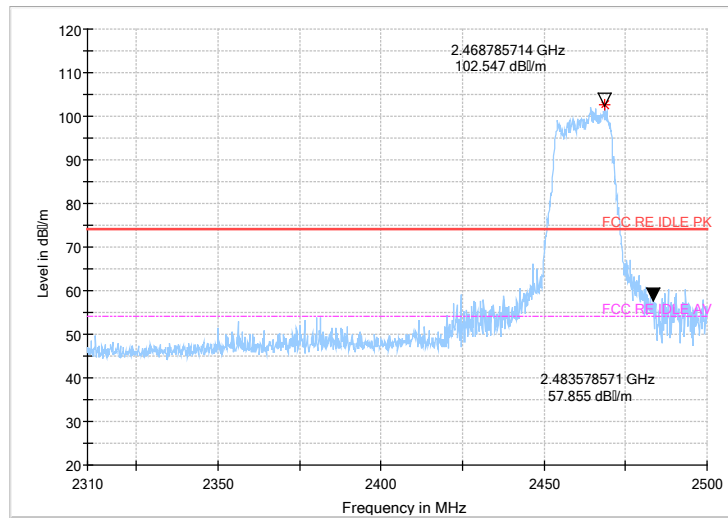


**Peak detector**

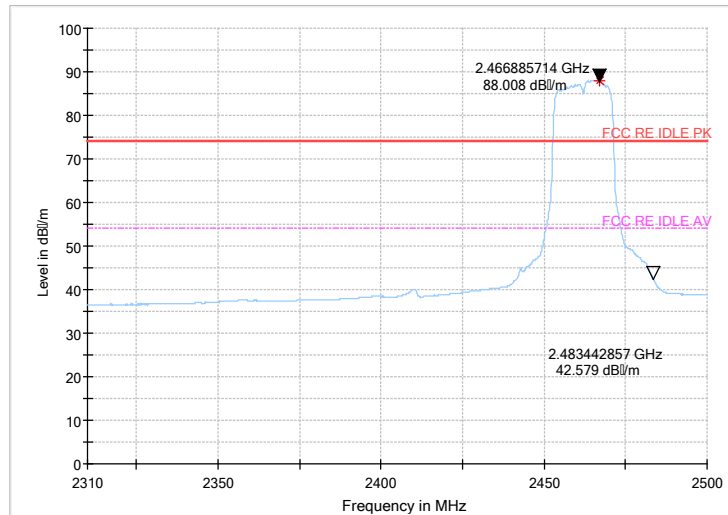


**AV detector**

**Fig.59 Radiated emission (Power): 802.11g, high channel**




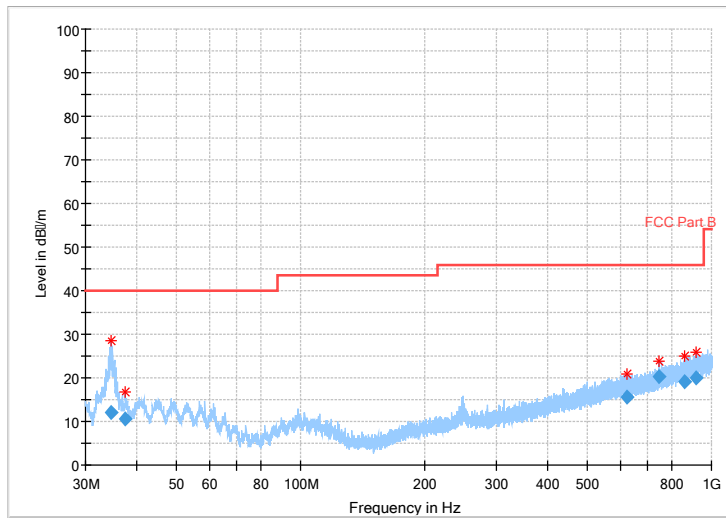

**Fig.60 Radiated Spurious Emission (802.11g,Ch1,30MHz~1GHz)**

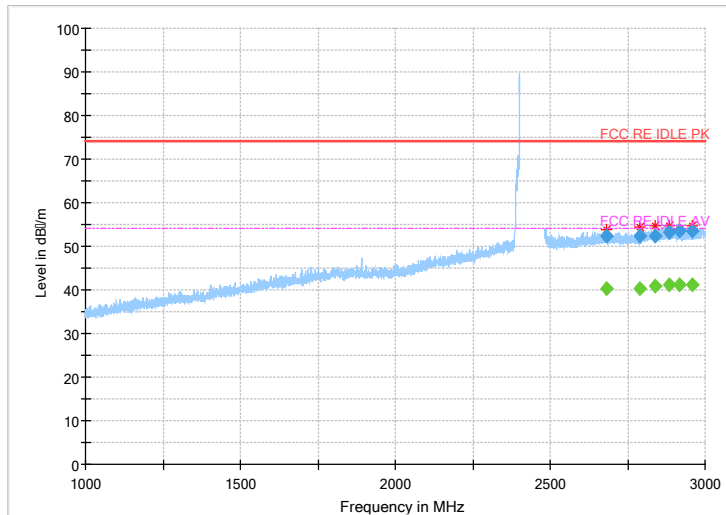


**Fig.61 Radiated Spurious Emission (802.11g,Ch1,1GHz~3GHz)**

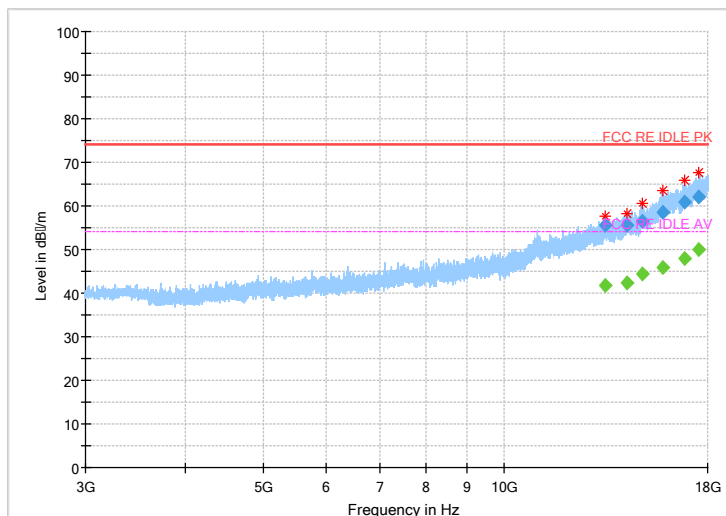


**Fig.62 Radiated Spurious Emission (802.11g,Ch1,3GHz~18GHz)**

**Second Supply(3G+32G)**

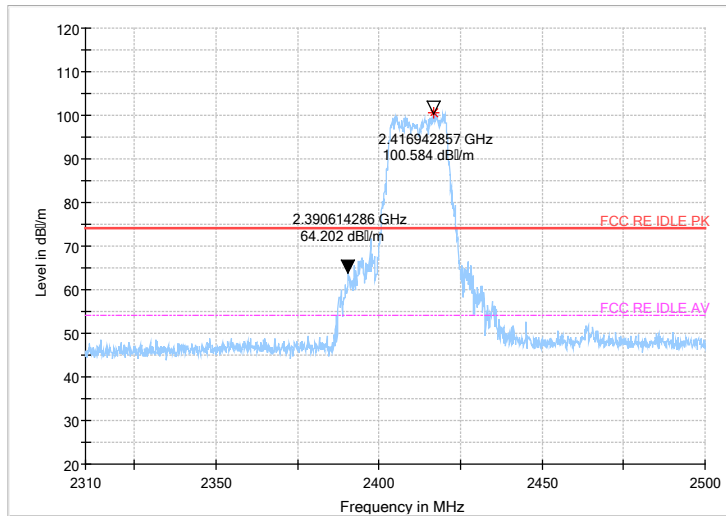


**Peak detector**

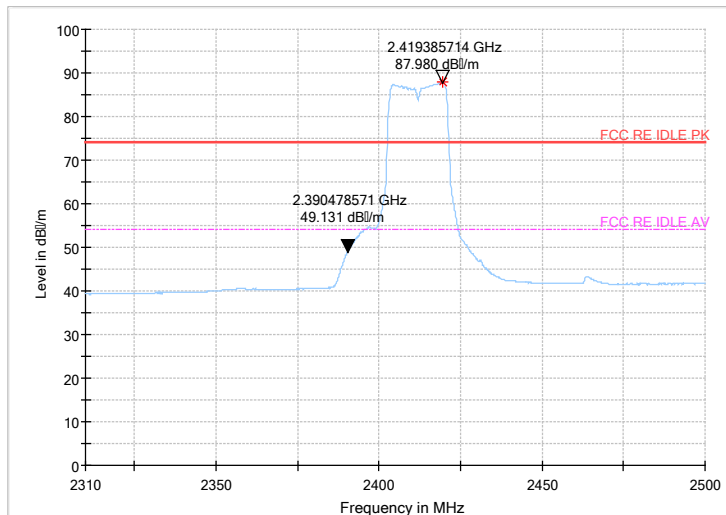


**AV detector**

**Fig.63 Radiated emission (Power): 802.11g, Low channel**

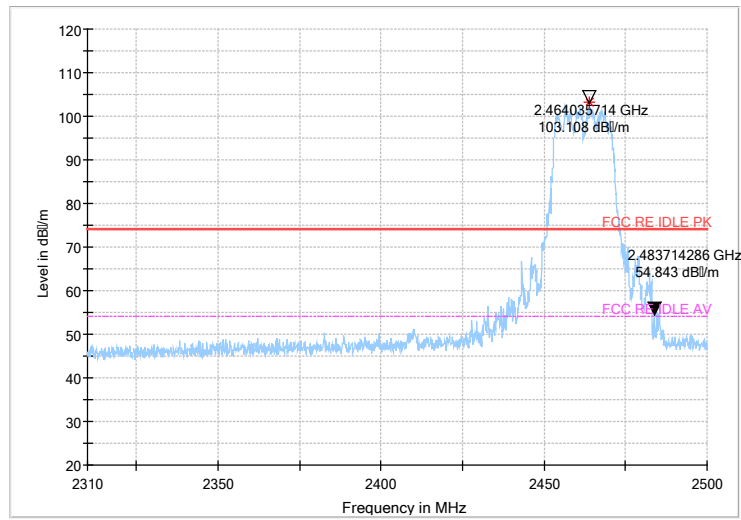


**Peak detector**

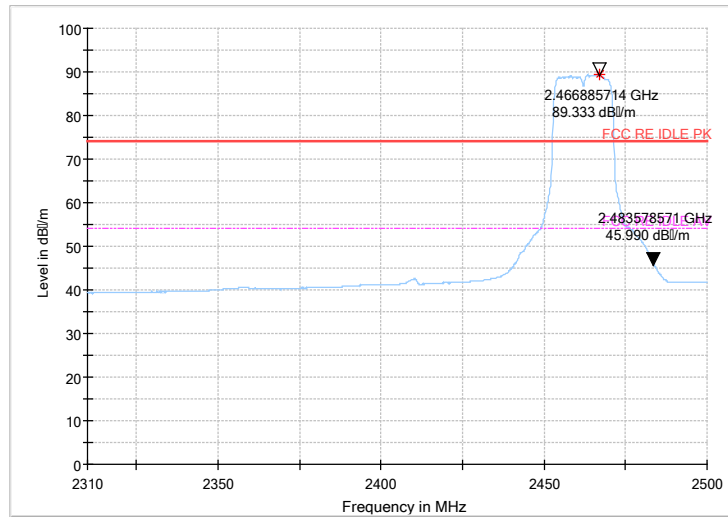


**AV detector**


**Fig.64 Radiated emission (Power): 802.11g, high channel**

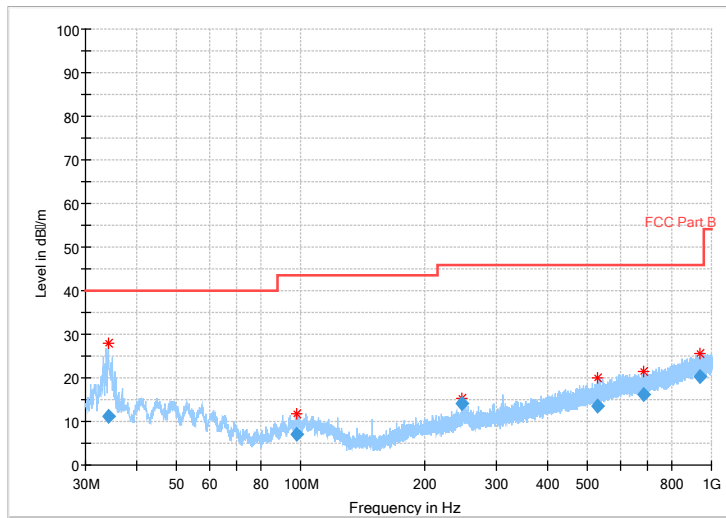

**Fig.65 Radiated Spurious Emission (802.11g,Ch1,30MHz~1GHz)**

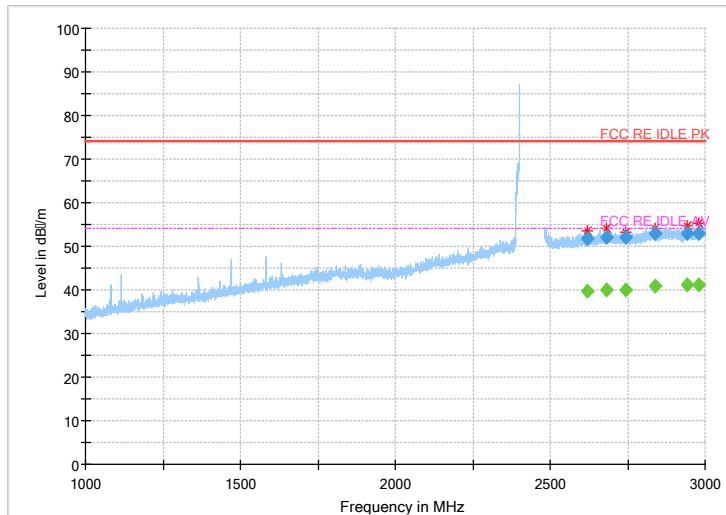


**Fig.66 Radiated Spurious Emission (802.11g,Ch1,1GHz~3GHz)**

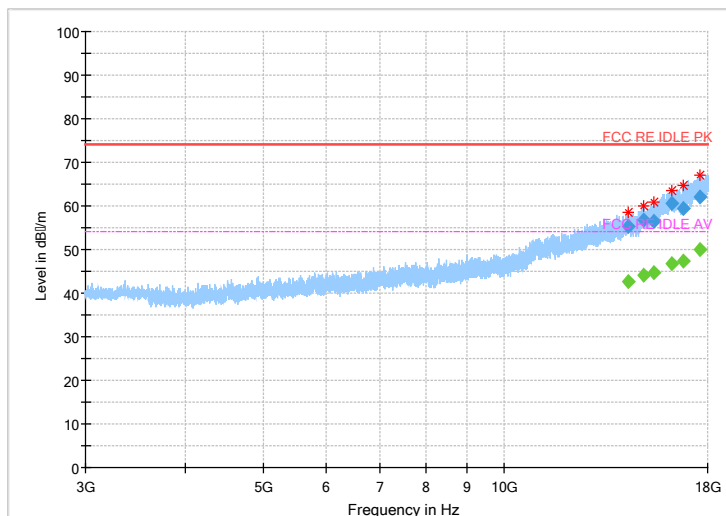


**Fig.67 Radiated Spurious Emission (802.11g,Ch1,3GHz~18GHz)**

**Second Supply (2+16G)**

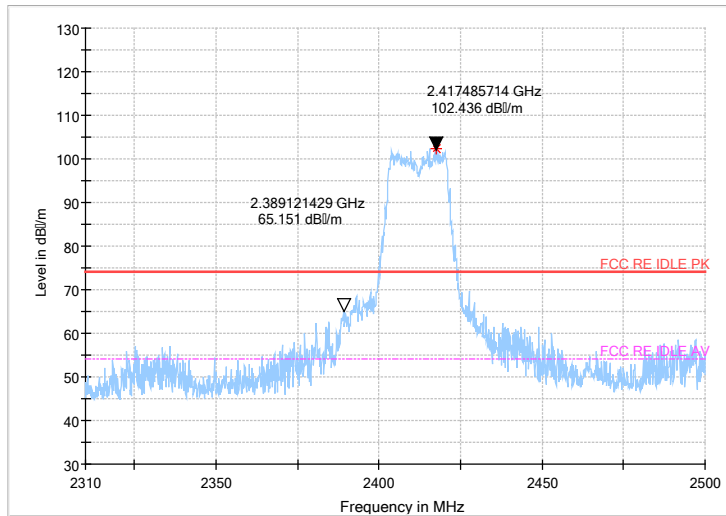


**Peak detector**

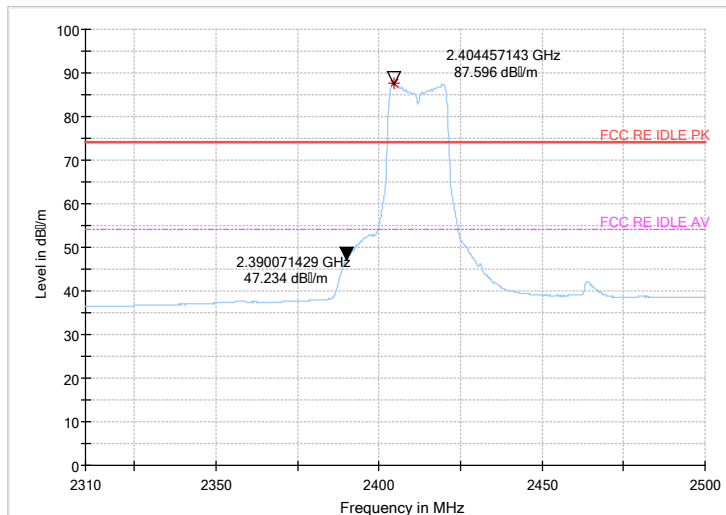


**AV detector**

**Fig.68 Radiated emission (Power): 802.11g, Low channel**

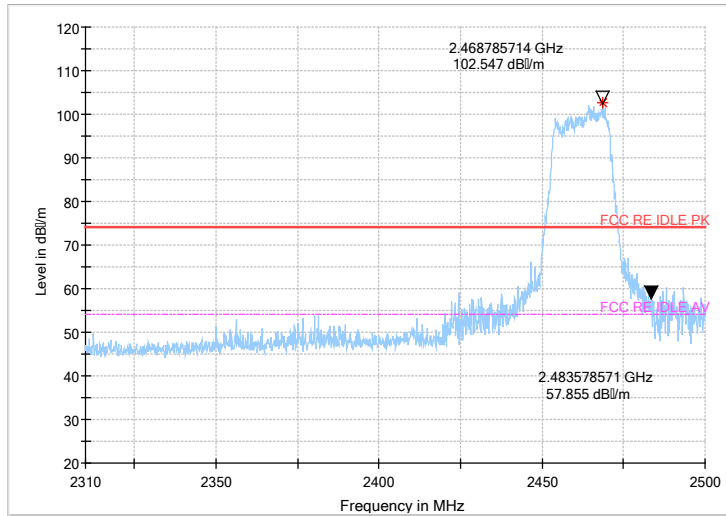


**Peak detector**

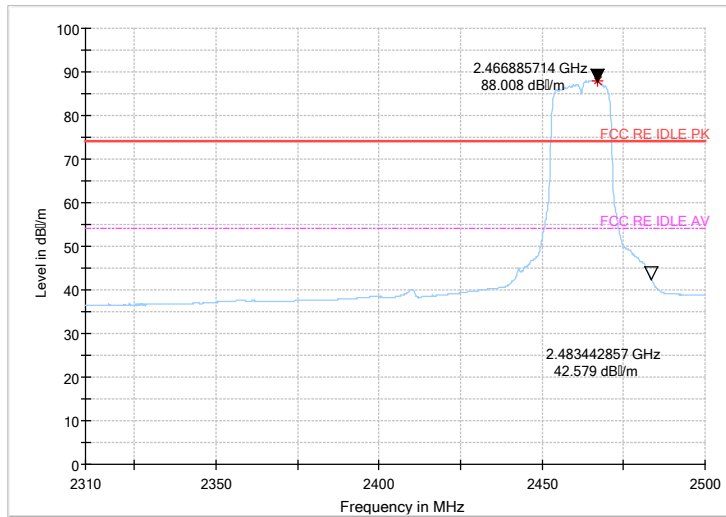


**AV detector**


**Fig.69 Radiated emission (Power): 802.11g, High channel**

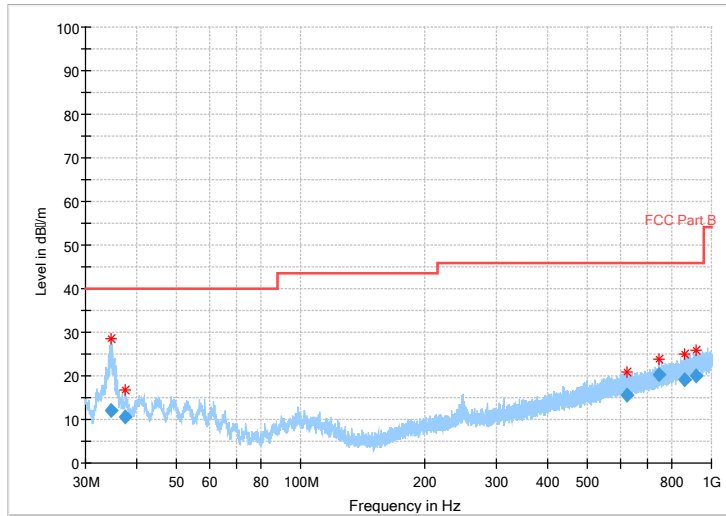

**Fig.70 Radiated Spurious Emission (802.11g,Ch1,30MHz~1GHz)**

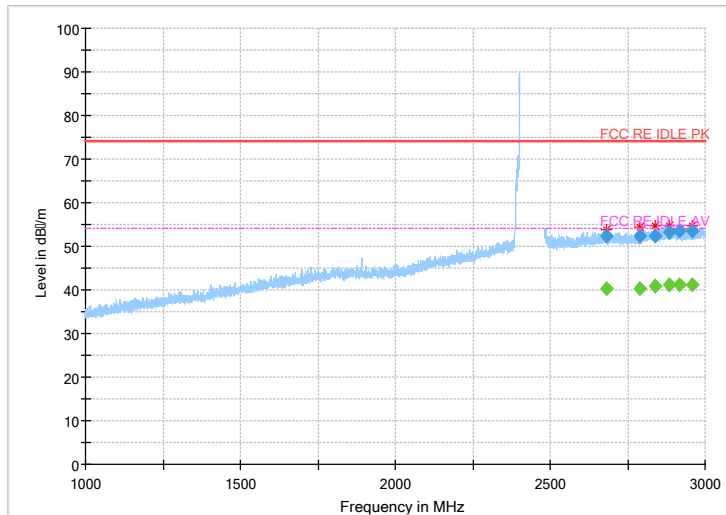

**Fig.71 Radiated Spurious Emission (802.11g,Ch1,1GHz~3GHz)**

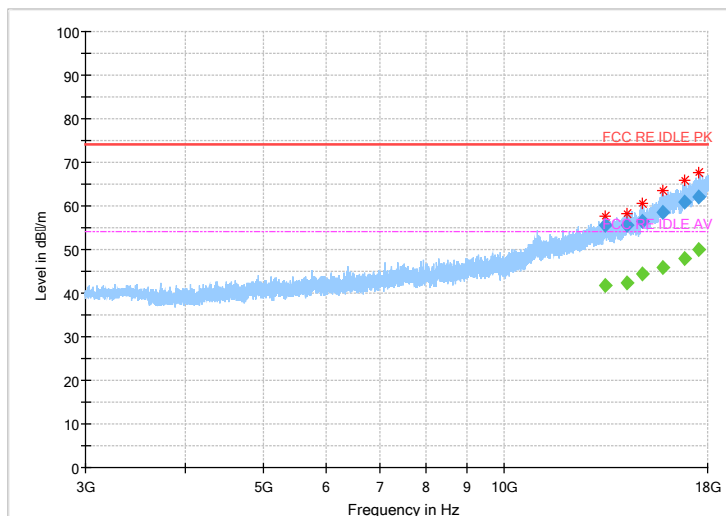

**6.7. AC Powerline Conducted Emission**

**Method of Measurement: See ANSI C63.10-2013-clause 6.2**

- 1 The one EUT cable configuration and arrangement and mode of operation that produced the emission with the highest amplitude relative to the limit is selected for the final measurement, while applying the appropriate modulating signal to the EUT.
- 2 If the EUT is relocated from an exploratory test site to a final test site, the highest emissions shall be remaximized at the final test location before final ac power-line conducted emission measurements are performed.
- 3 The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) is then performed for the full frequency range for which the EUT is being tested for compliance without further variation of the EUT arrangement, cable positions, or EUT mode of operation.
- 4 If the EUT is comprised of equipment units that have their own separate ac power connections, e.g., floor-standing equipment with independent power cords for each shelf that are able to connect directly to the ac power network, each current-carrying conductor of one unit is measured while the other units are connected to a second (or more) LISN(s). All units shall be separately measured. If a power strip is provided by the manufacturer, to supply all of the units making up the EUT, only the conductors in the power cord of the power strip shall be measured.

If the EUT uses a detachable antenna, these measurements shall be made with a suitable dummy load connected to the antenna output terminals; otherwise, the tests shall be made with the antenna connected and, if adjustable, fully extended. When measuring the ac conducted emissions from a device that operates between 150 kHz and 30 MHz a non-detachable antenna may be replaced with a dummy load for the measurements within the fundamental emission band of the transmitter, but only for those measurements.<sup>36</sup> Record the six highest EUT emissions relative to the limit of each of the current-carrying conductors of the power cords of the equipment that comprises the EUT over the frequency range specified by the procuring or regulatory agency. Diagram or photograph the test setup that was used. See Clause 8 for full reporting requirements.

**Test Condition:**

<b>Voltage (V)</b>	<b>Frequency (Hz)</b>
120	60

**Measurement Result and limit:**

(Quasi-peak-average Limit)


**First Supply**

Frequency range (MHz)	Quasi-peak Limit (dBμV)	Average Limit (dBμV)	Result (dBμV)	Conclusion
			With charger	



			<b>802.11b</b>
0.15 to 0.5	66 to 56	56 to 46	<b>Fig.73</b>
0.5 to 5	56	46	
5 to 30	60	50	
NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.			

**Conclusion: Pass**  
**Main Supply(3+32G)**

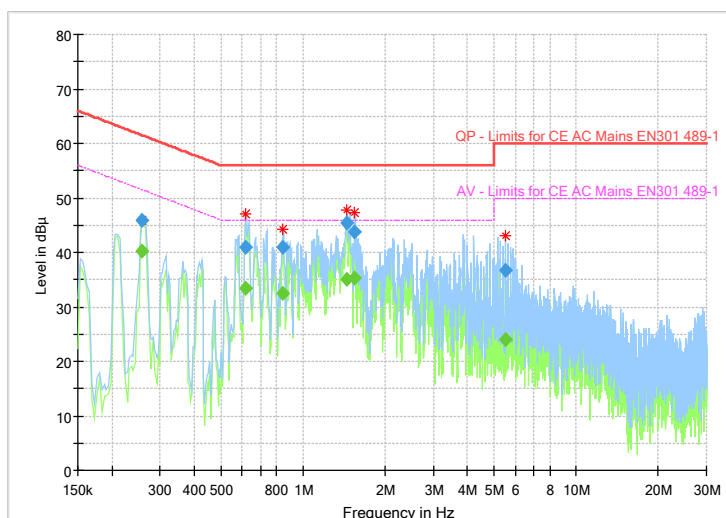

**Fig.73 AC Powerline Conducted Emission**


Frequency (MHz)	QuasiPeak (dB µ V)	Average (dB µ V)	Limit (dB µ)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.258206	45.77	---	61.49	15.72	1000.0	9.000	N	ON	9.7
0.258206	---	40.25	51.49	11.24	1000.0	9.000	N	ON	9.7
0.616406	---	33.33	46.00	12.67	1000.0	9.000	N	ON	9.7
0.616406	40.83	---	56.00	15.17	1000.0	9.000	N	ON	9.7
0.844012	---	32.52	46.00	13.48	1000.0	9.000	L1	ON	9.7
0.844012	41.04	---	56.00	14.96	1000.0	9.000	L1	ON	9.7
1.448475	45.44	---	56.00	10.56	1000.0	9.000	L1	ON	9.7
1.448475	---	34.95	46.00	11.05	1000.0	9.000	L1	ON	9.7
1.549219	---	35.24	46.00	10.76	1000.0	9.000	L1	ON	9.7
1.549219	43.78	---	56.00	12.22	1000.0	9.000	L1	ON	9.7
5.504344	---	24.02	50.00	25.98	1000.0	9.000	L1	ON	9.7
5.504344	36.80	---	60.00	23.20	1000.0	9.000	L1	ON	9.7

**Main Supply(2+16G)**

Frequency range (MHz)	Quasi-peak Limit (dB $\mu$ V)	Average Limit (dB $\mu$ V)	Result (dB $\mu$ V)	Conclusion
			With charger	
			802.11b	
0.15 to 0.5	67 to 56	56 to 46	<b>Fig.74</b>	<b>P</b>
0.5 to 5	56	46		
5 to 30	60	50		

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

**Conclusion: Pass**

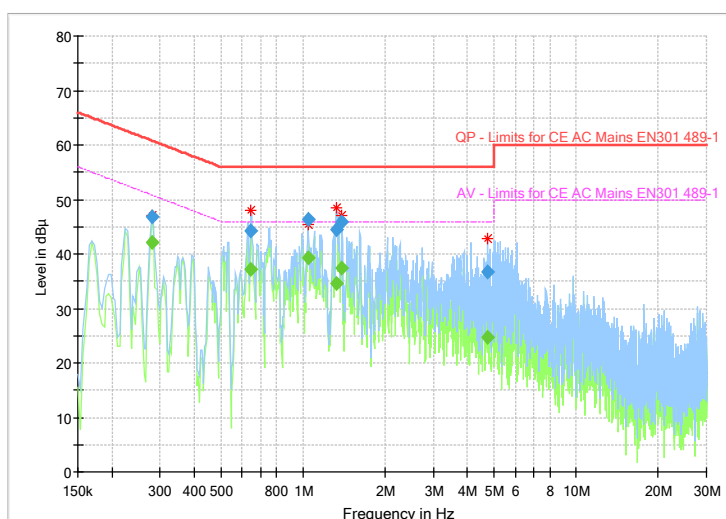

**Fig.74 AC Powerline Conducted Emission**


Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Average (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.280594	---	42.10	50.80	8.70	1000.0	9.000	N	ON	9.7
0.280594	46.76	---	60.80	14.04	1000.0	9.000	N	ON	9.7
0.646256	---	37.10	46.00	8.90	1000.0	9.000	N	ON	9.7
0.646256	44.26	---	56.00	11.74	1000.0	9.000	N	ON	9.7
1.045500	46.25	---	56.00	9.75	1000.0	9.000	N	ON	9.7
1.045500	---	39.26	46.00	6.74	1000.0	9.000	N	ON	9.7
1.325344	---	34.58	46.00	11.42	1000.0	9.000	L1	ON	9.7
1.325344	44.55	---	56.00	11.45	1000.0	9.000	L1	ON	9.7
1.388775	---	37.33	46.00	8.67	1000.0	9.000	L1	ON	9.7
1.388775	45.80	---	56.00	10.20	1000.0	9.000	L1	ON	9.7
4.724512	36.71	---	56.00	19.29	1000.0	9.000	L1	ON	9.7
4.724512	---	24.76	46.00	21.24	1000.0	9.000	L1	ON	9.7

**Second Supply (3+32G)**

Frequency range (MHz)	Quasi-peak Limit (dB $\mu$ V)	Average Limit (dB $\mu$ V)	Result (dB $\mu$ V)	Conclusion
			With charger	

			<b>802.11b</b>
0.15 to 0.5	68 to 56	56 to 46	<b>Fig.75</b>
0.5 to 5	56	46	
5 to 30	60	50	
NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.			

**Conclusion: Pass**

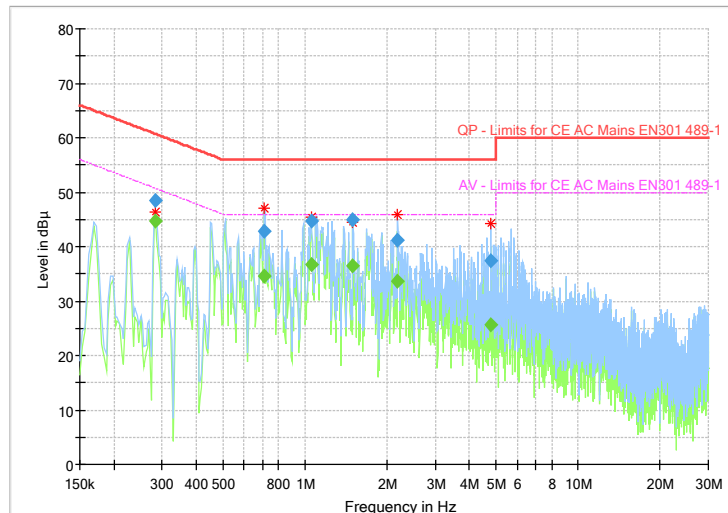

**Fig.75 AC Powerline Conducted Emission**


Frequency (MHz)	QuasiPeak (dB µ V)	Average (dB µ V)	Limit (dB µ)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.284325	48.39	---	60.69	12.30	1000.0	9.000	N	ON	9.7
0.284325	---	44.78	50.69	5.91	1000.0	9.000	N	ON	9.7
0.709688	42.93	---	56.00	13.07	1000.0	9.000	L1	ON	9.7
0.709688	---	34.65	46.00	11.35	1000.0	9.000	L1	ON	9.7
1.056694	44.66	---	56.00	11.34	1000.0	9.000	N	ON	9.7
1.056694	---	36.63	46.00	9.37	1000.0	9.000	N	ON	9.7
1.500712	44.91	---	56.00	11.09	1000.0	9.000	L1	ON	9.7
1.500712	---	36.43	46.00	9.57	1000.0	9.000	L1	ON	9.7
2.190994	---	33.66	46.00	12.34	1000.0	9.000	L1	ON	9.7
2.190994	41.13	---	56.00	14.87	1000.0	9.000	L1	ON	9.7
4.784212	---	25.56	46.00	20.44	1000.0	9.000	L1	ON	9.7
4.784212	37.43	---	56.00	18.57	1000.0	9.000	L1	ON	9.7

**Second Supply (2+16G)**

Frequency range (MHz)	Quasi-peak Limit (dBµV)	Average Limit (dBµV)	Result (dBµV)	Conclusion
			With charger	
			802.11b	
0.15 to 0.5	69 to 56	56 to 46	<b>Fig.76</b>	<b>P</b>
0.5 to 5	56	46		

5 to 30	60	50	
NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.			

**Conclusion: Pass**

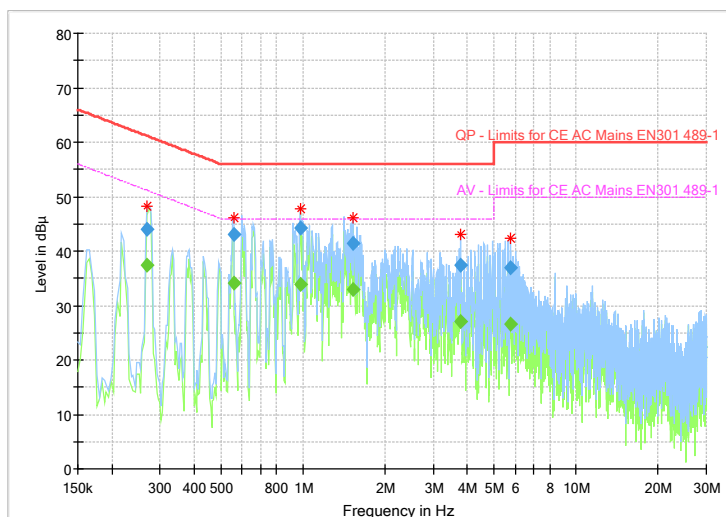

**Fig.76 AC Powerline Conducted Emission**

Frequency (MHz)	QuasiPeak (dB µ V)	Average (dB µ V)	Limit (dB µ)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.269400	44.10	---	61.14	17.04	1000.0	9.000	N	ON	9.7
0.269400	---	37.45	51.14	13.69	1000.0	9.000	N	ON	9.7
0.556706	43.03	---	56.00	12.97	1000.0	9.000	L1	ON	9.6
0.556706	---	34.11	46.00	11.89	1000.0	9.000	L1	ON	9.6
0.978338	44.32	---	56.00	11.68	1000.0	9.000	L1	ON	9.7
0.978338	---	33.88	46.00	12.12	1000.0	9.000	L1	ON	9.7
1.519369	---	32.88	46.00	13.12	1000.0	9.000	L1	ON	9.7
1.519369	41.36	---	56.00	14.64	1000.0	9.000	L1	ON	9.7
3.776775	37.47	---	56.00	18.53	1000.0	9.000	L1	ON	9.7
3.776775	---	27.00	46.00	19.00	1000.0	9.000	L1	ON	9.7
5.754338	---	26.49	50.00	23.51	1000.0	9.000	N	ON	9.7
5.754338	36.94	---	60.00	23.06	1000.0	9.000	N	ON	9.7

## 7. Test Equipment and Ancillaries Used For Tests

The test equipment and ancillaries used are as follows.

### Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration date	Cal.interval
1	Vector Signal	FSQ26	101096	R&S	2016-05-12	1 Year
2	DC Power Supply	ZUP60-14	LOC-22 0Z006	TDL-Lambda	2016-05-12	1 Year

### Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration date	Cal.interval
1	Universal Radio Communication Tester	CMU200	123101	R&S	2016-05-12	1 Year
3	Test Receiver	ESU40	100307	R&S	2016-05-12	1 Year
4	Trilog Antenna	VULB9163	VULB9163-515	Schwarzbeck	2014-11-05	3 Year
5	Double Ridged Guide Antenna	ETS-3117	135885	ETS	2014-05-06	3 Year
8	2-Line V-Network	ENV216	101380	R&S	2016-05-12	1 Year

### Anechoic chamber

Fully anechoic chamber by Frankonia German.

**Software**

Name	Version
Eagle FCC WLAN auto test system	V2.0
EMC32	V9.15

## 8. Test Environment

**Shielding Room1** (6.0 metersx3.0 metersx2.7 meters) did not exceed following limits along the conducted RF performance testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 25 %, Max. = 75 %
Shielding effectiveness	> 110 dB
Ground system resistance	< 0.5 Ω

**Control room** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. =25 %, Max. = 75 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

**Fully-anechoic chamber1** (6.9 metersx10.9 metersx5.4 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 25 %, Max. = 75 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
VSWR	Between 0 and 6 dB, from 1GHz to 18GHz
Site Attenuation Deviation	Between -4 and 4 dB,30MHz to 1GHz



## ***RF Test Report***

Report No.: I17D00023-SRD03

Uniformity of field strength	Between 0 and 6 dB, from 80MHz to 3000 MHz
------------------------------	--

**ANNEX A. Deviations from Prescribed Test Methods**

No deviation from Prescribed Test Methods.



**ANNEX B. Accreditation Certificate**

**Accredited Laboratory**

A2LA has accredited

**EAST CHINA INSTITUTE OF TELECOMMUNICATIONS**  
*Shanghai, People's Republic of China*

for technical competence in the field of  
**Electrical Testing**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).



Presented this 15<sup>th</sup> day of March 2017.



President and CEO  
For the Accreditation Council  
Certificate Number 3682.01  
Valid to February 28, 2019

*For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.*

\*\*\*\*\*End The Report\*\*\*\*\*