



The Photos of SAR test

No. I20Z61670-SEM01

For

Lenovo PC HK Limited

Portable Tablet Computer

Model name: Lenovo TB-J606L

With

Hardware Version: Lenovo TB-J606L

Software Version: TB-J606L_RF01_200908

FCC ID: O57TBJ606L



Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.


Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT

No. 51, Xueyuan Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504


Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn

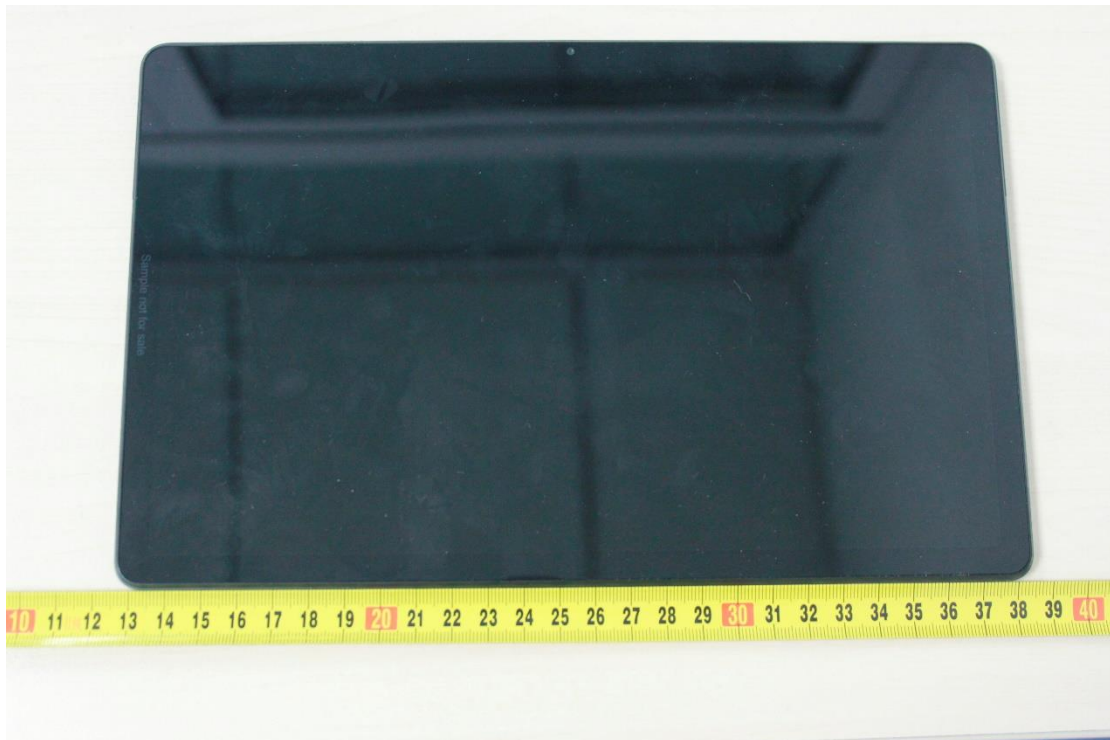


Picture 1: Constituents of the sample

Test positions for body:


The Body SAR is tested at the following 6 test positions all with the distance =0/24/7/26/6/10mm between the EUT and the phantom bottom:

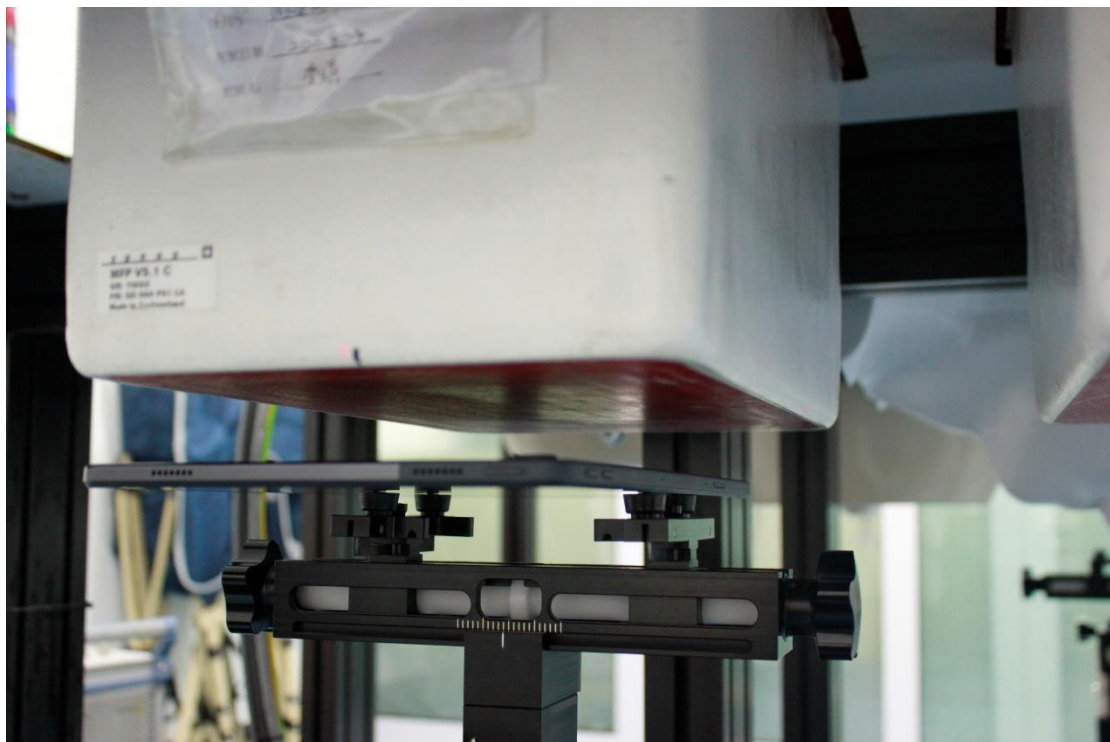

Picture 1: Rear with 24mm

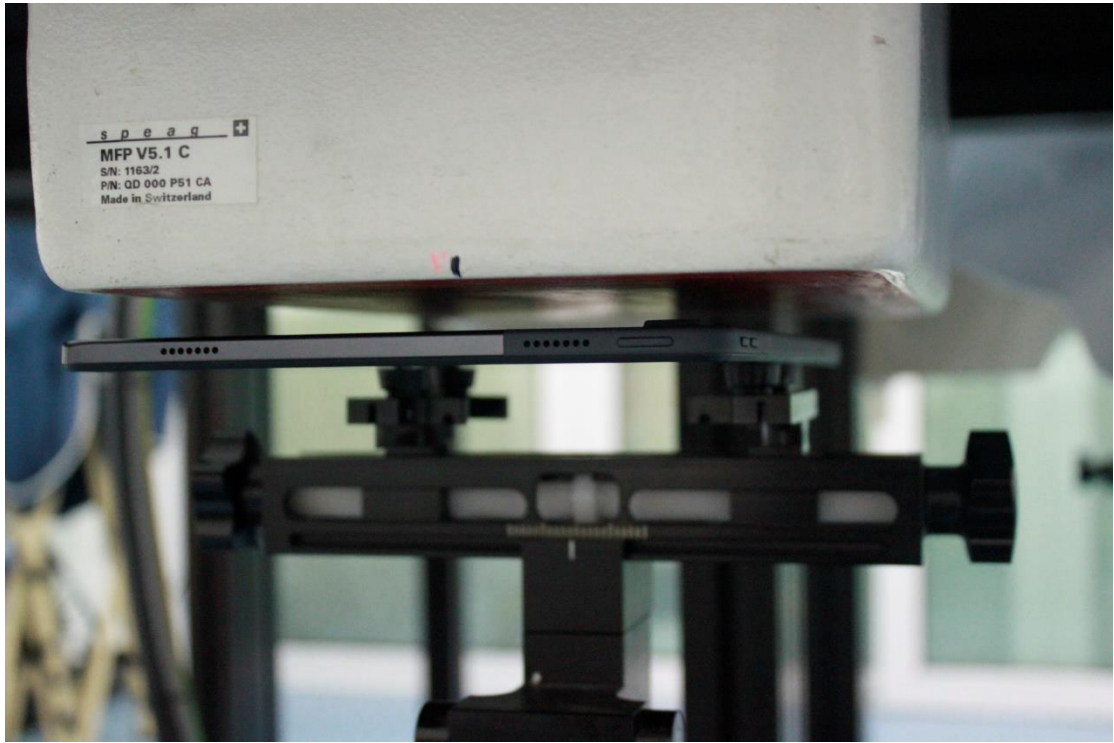

Picture 2: Rear with 10mm

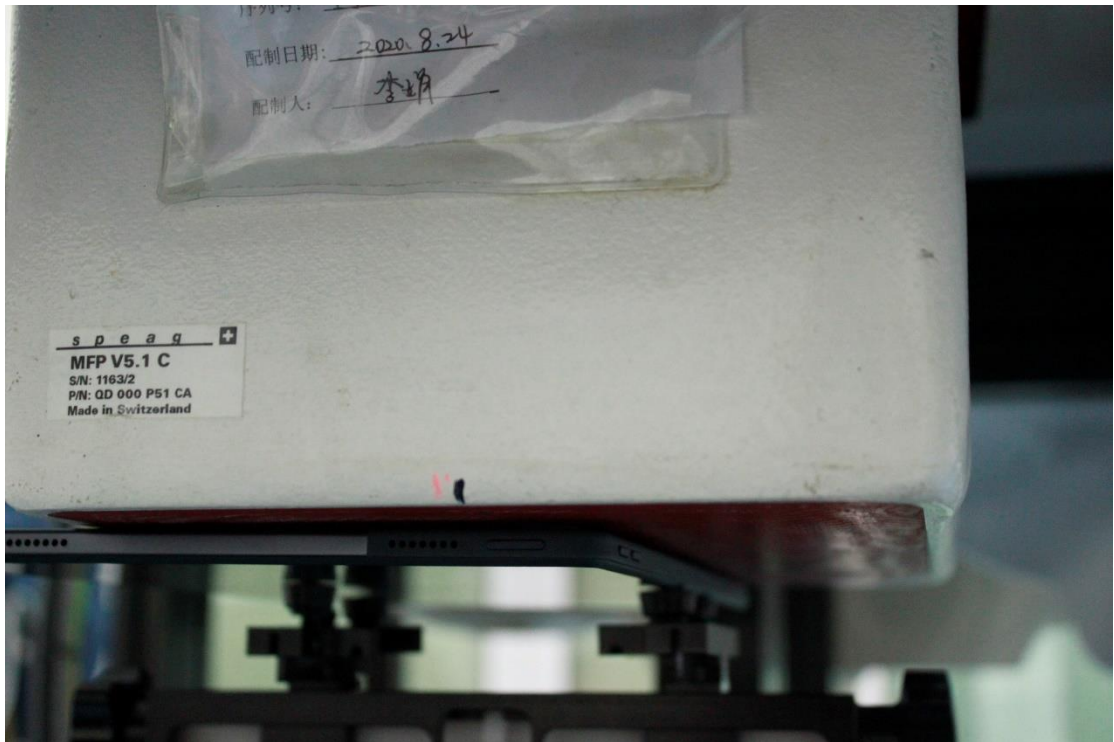


Picture 3: Rear with 0mm



Picture 4: Right with 7mm




Picture 5: Right with 0mm

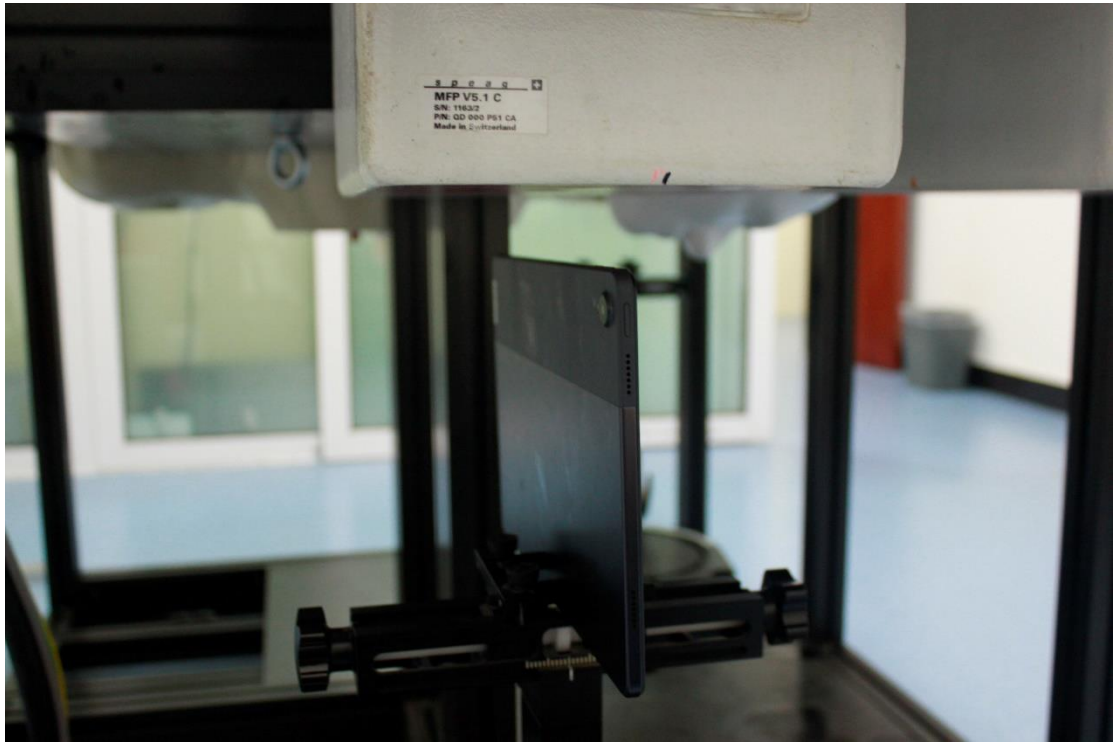


Picture 6: Top edge with 26mm



Picture 7: Top edge with 6mm

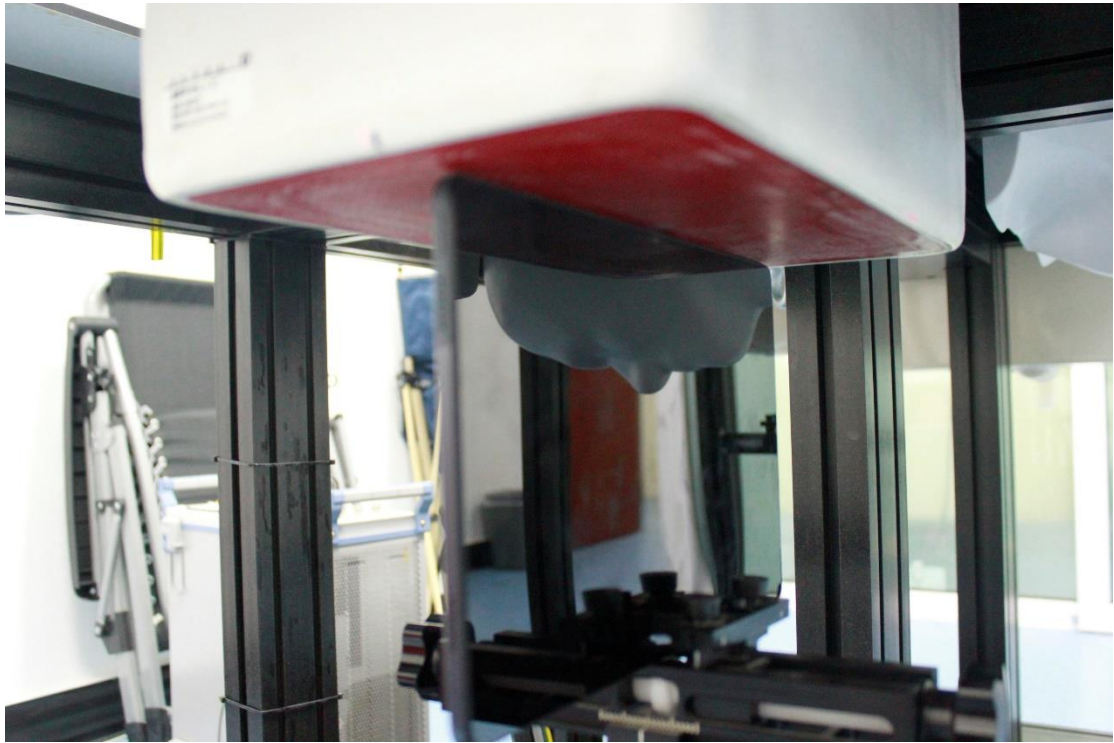

Picture 8: Top edge with 0mm

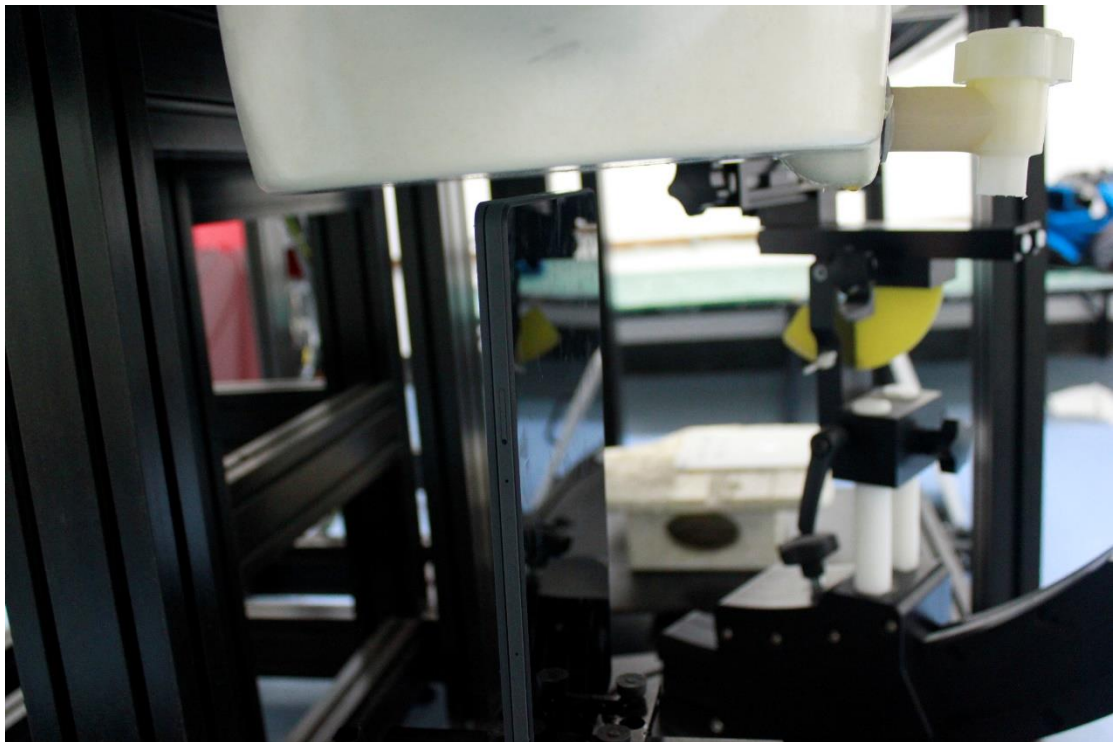

Picture 9: Right 7mm with holder