

Fig.A.6.1.21 Transmitter Spurious Emission - Conducted (802.11b, Ch11, 7.5 GHz-10 GHz)

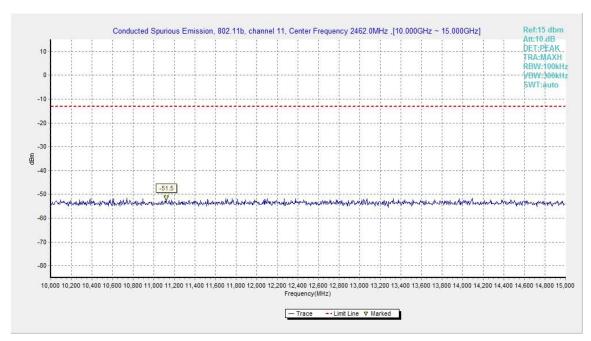


Fig.A.6.1.22 Transmitter Spurious Emission - Conducted (802.11b, Ch11, 10 GHz-15 GHz)



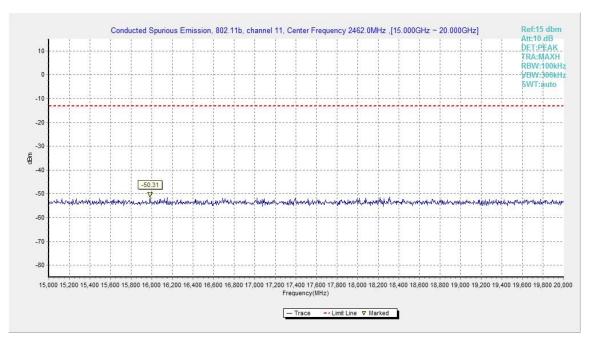


Fig.A.6.1.23 Transmitter Spurious Emission - Conducted (802.11b, Ch11, 15 GHz-20 GHz)

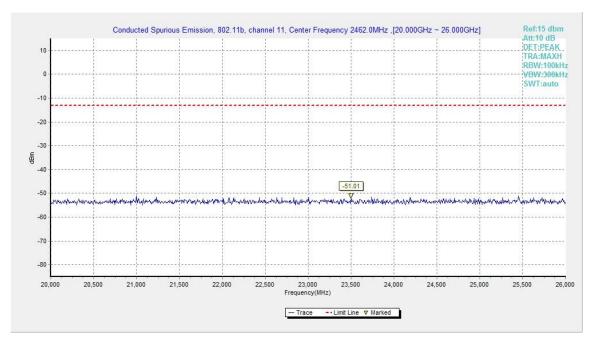


Fig.A.6.1.24 Transmitter Spurious Emission - Conducted (802.11b, Ch11, 20 GHz-26 GHz)

No. I16Z42314-SRD08 Page48 of 82



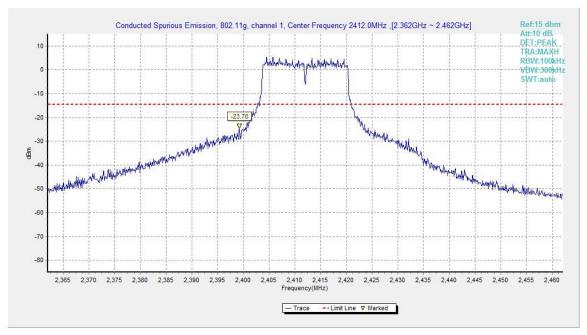


Fig.A.6.1.25 Transmitter Spurious Emission - Conducted (802.11g, Ch1, Center Frequency)

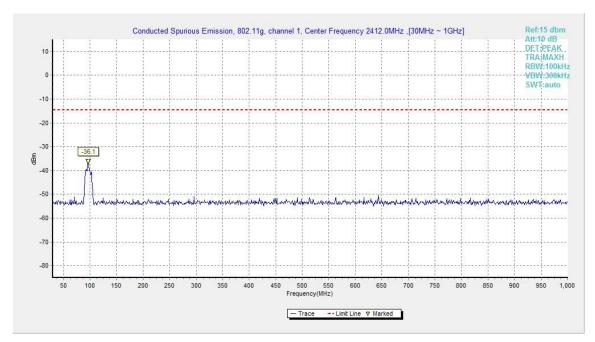


Fig.A.6.1.26 Transmitter Spurious Emission - Conducted (802.11g, Ch1, 30 MHz-1 GHz)



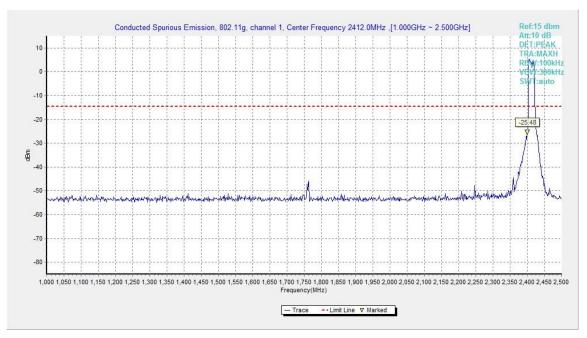


Fig.A.6.1.27 Transmitter Spurious Emission - Conducted (802.11g, Ch1, 1 GHz-2.5 GHz)

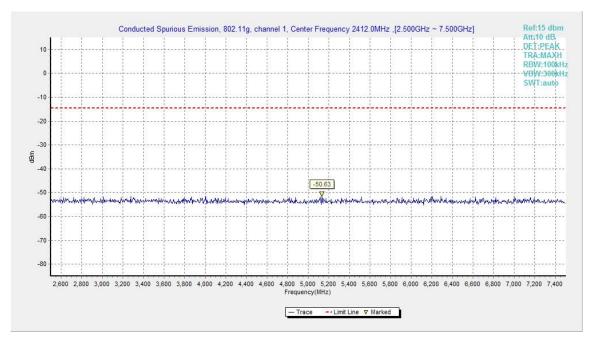



Fig.A.6.1.28 Transmitter Spurious Emission - Conducted (802.11g, Ch1, 2.5 GHz-7.5 GHz)





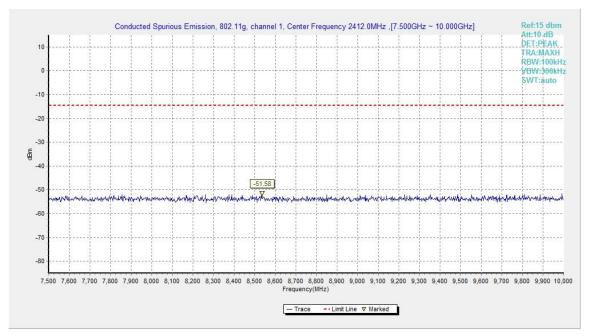


Fig.A.6.1.29 Transmitter Spurious Emission - Conducted (802.11g, Ch1, 7.5 GHz-10 GHz)

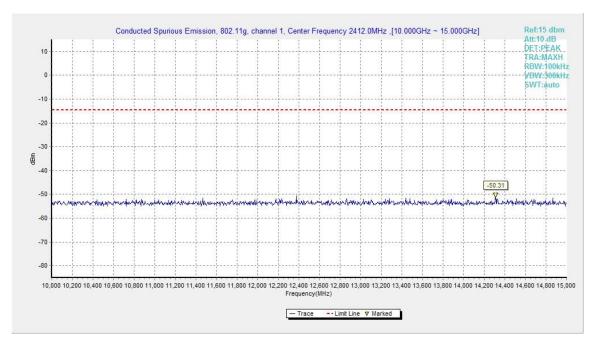



Fig.A.6.1.30 Transmitter Spurious Emission - Conducted (802.11g, Ch1, 10 GHz-15 GHz)





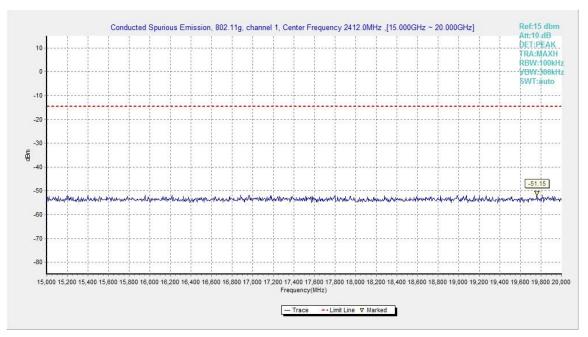


Fig.A.6.1.31 Transmitter Spurious Emission - Conducted (802.11g, Ch1, 15 GHz-20 GHz)

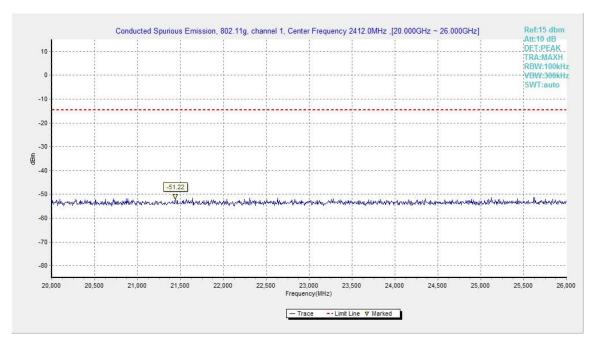


Fig.A.6.1.32 Transmitter Spurious Emission - Conducted (802.11g, Ch1, 20 GHz-26 GHz)

No. I16Z42314-SRD08 Page52 of 82



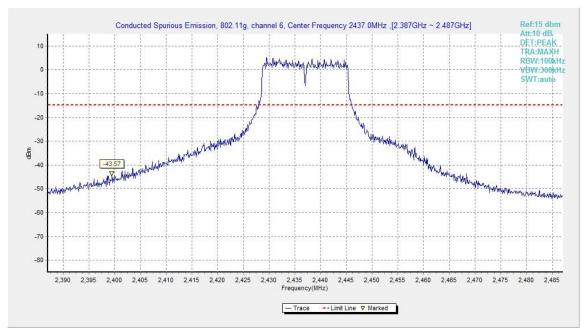


Fig.A.6.1.33 Transmitter Spurious Emission - Conducted (802.11g, Ch6, Center Frequency)

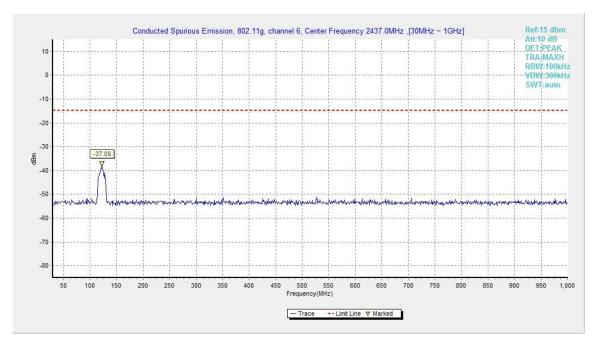


Fig.A.6.1.34 Transmitter Spurious Emission - Conducted (802.11g, Ch6, 30 MHz-1 GHz)



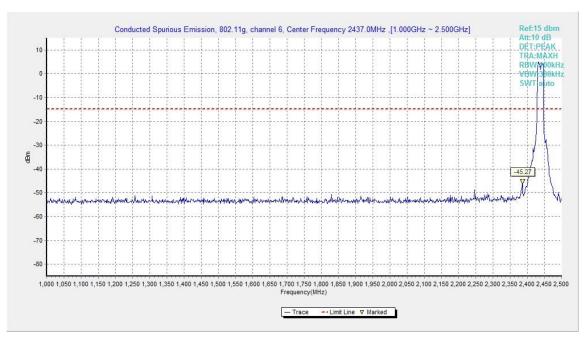


Fig.A.6.1.35 Transmitter Spurious Emission - Conducted (802.11g, Ch6, 1 GHz-2.5 GHz)

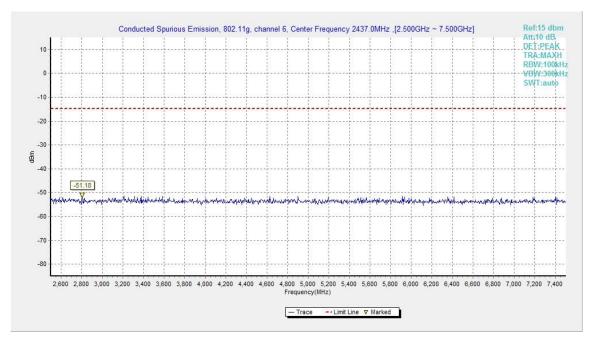


Fig.A.6.1.36 Transmitter Spurious Emission - Conducted (802.11g, Ch6, 2.5 GHz-7.5 GHz)



No. I16Z42314-SRD08 Page54 of 82

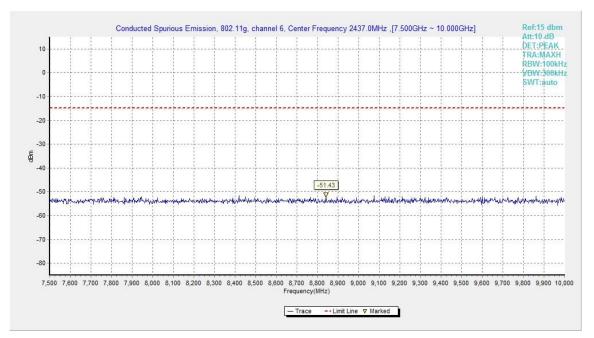


Fig.A.6.1.37 Transmitter Spurious Emission - Conducted (802.11g, Ch6, 7.5 GHz-10 GHz)

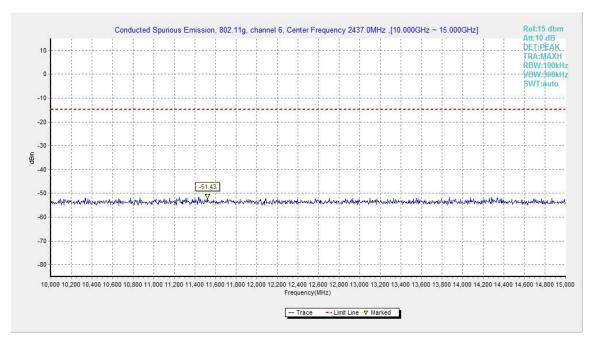



Fig.A.6.1.38 Transmitter Spurious Emission - Conducted (802.11g, Ch6, 10 GHz-15 GHz)





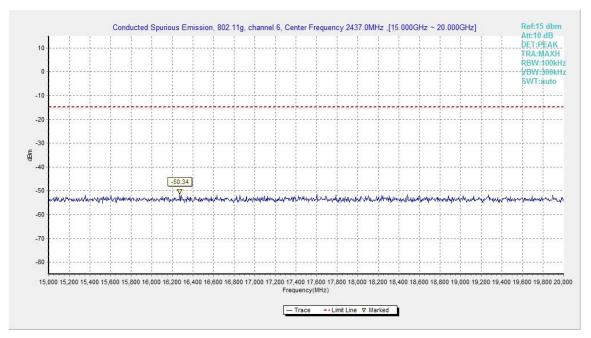


Fig.A.6.1.39 Transmitter Spurious Emission - Conducted (802.11g, Ch6, 15 GHz-20 GHz)

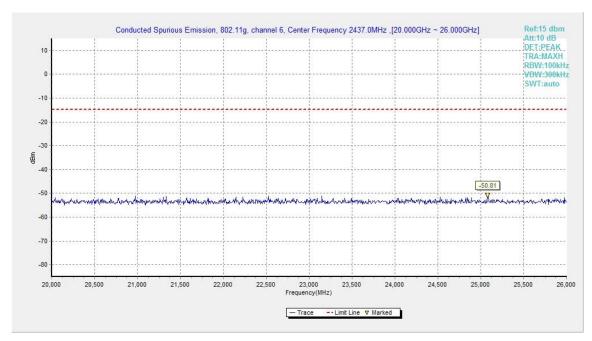


Fig.A.6.1.40 Transmitter Spurious Emission - Conducted (802.11g, Ch6, 20 GHz-26 GHz)

No. I16Z42314-SRD08 Page56 of 82



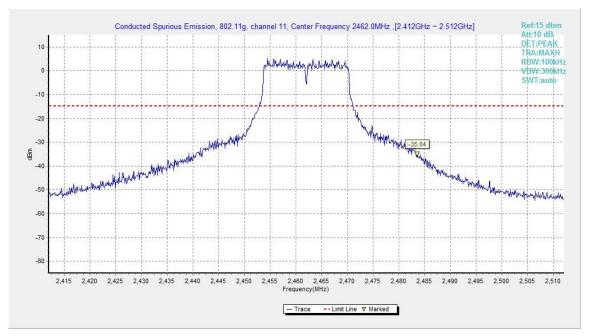


Fig.A.6.1.41 Transmitter Spurious Emission - Conducted (802.11g, Ch11, Center Frequency)

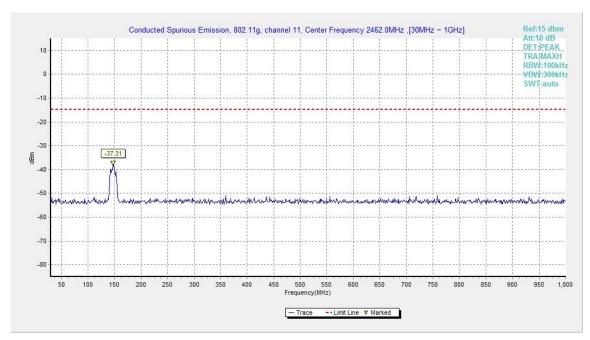


Fig.A.6.1.42 Transmitter Spurious Emission - Conducted (802.11g, Ch11, 30 MHz-1 GHz)



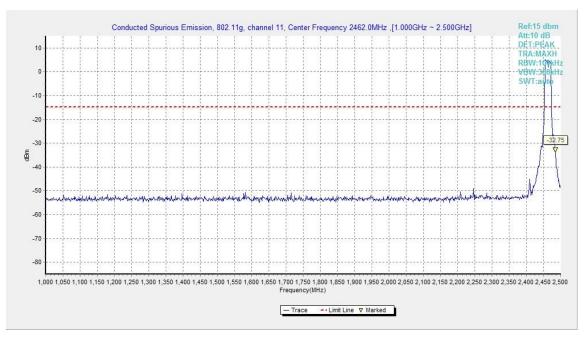


Fig.A.6.1.43 Transmitter Spurious Emission - Conducted (802.11g, Ch11, 1 GHz-2.5 GHz)

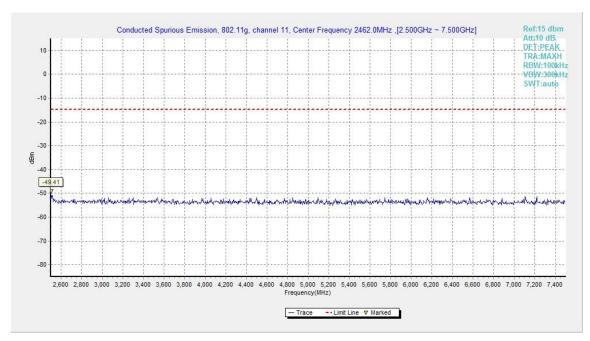


Fig.A.6.1.44 Transmitter Spurious Emission - Conducted (802.11g, Ch11, 2.5 GHz-7.5 GHz)



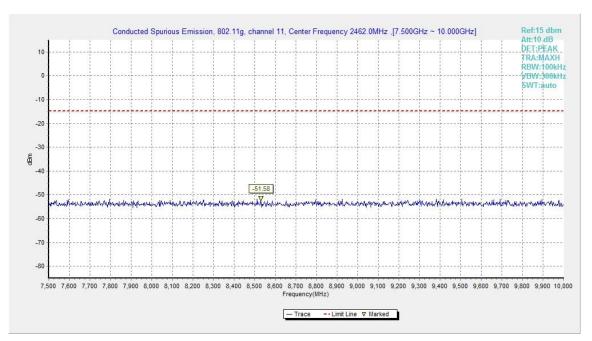


Fig.A.6.1.45 Transmitter Spurious Emission - Conducted (802.11g, Ch11, 7.5 GHz-10 GHz)

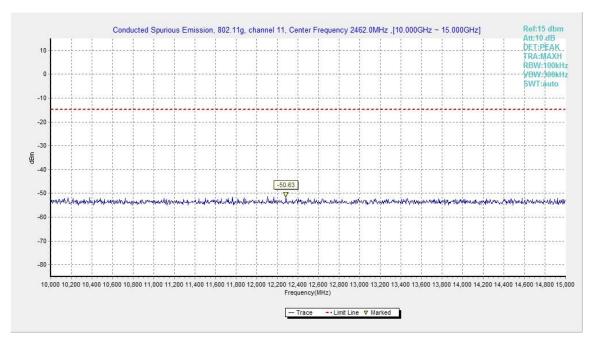


Fig.A.6.1.46 Transmitter Spurious Emission - Conducted (802.11g, Ch11, 10 GHz-15 GHz)



No. I16Z42314-SRD08 Page59 of 82

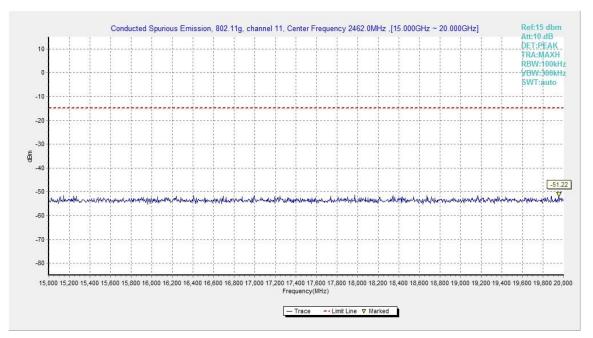


Fig.A.6.1.47 Transmitter Spurious Emission - Conducted (802.11g, Ch11, 15 GHz-20 GHz)

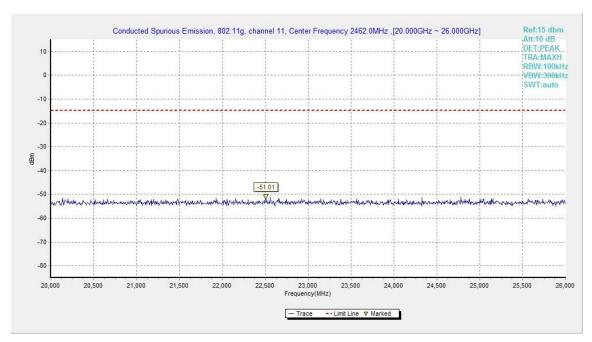


Fig.A.6.1.48 Transmitter Spurious Emission - Conducted (802.11g, Ch11, 20 GHz-26 GHz)



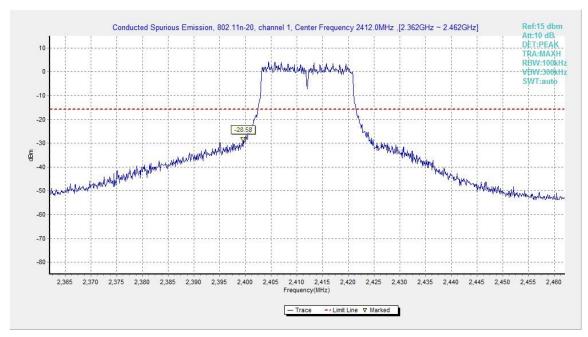


Fig.A.6.1.49 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch1, Center Frequency)

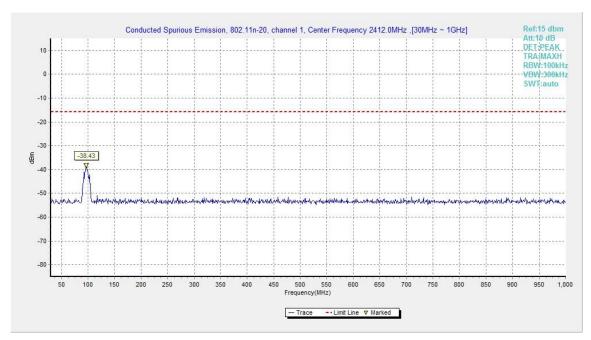


Fig.A.6.1.50 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch1, 30 MHz-1 GHz)



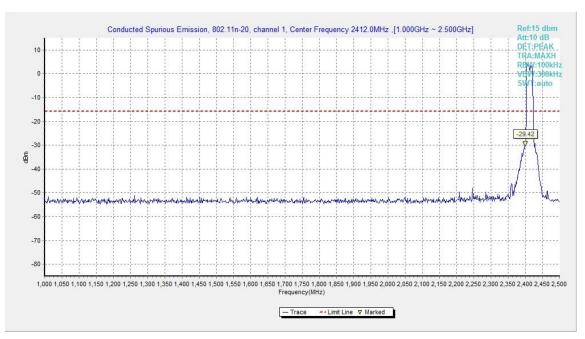


Fig.A.6.1.51 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch1, 1 GHz-2.5 GHz)

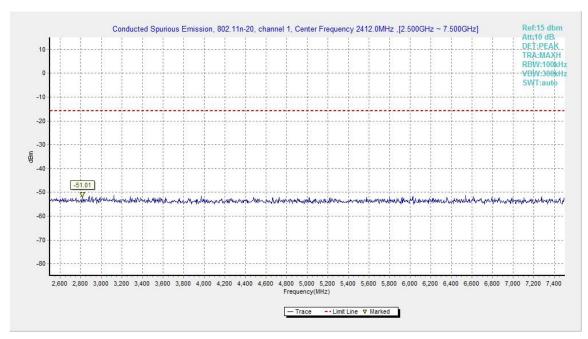


Fig.A.6.1.52 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch1, 2.5 GHz-7.5 GHz)



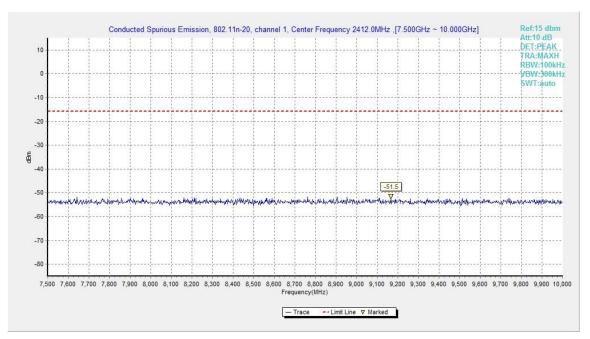


Fig.A.6.1.53 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch1, 7.5 GHz-10 GHz)

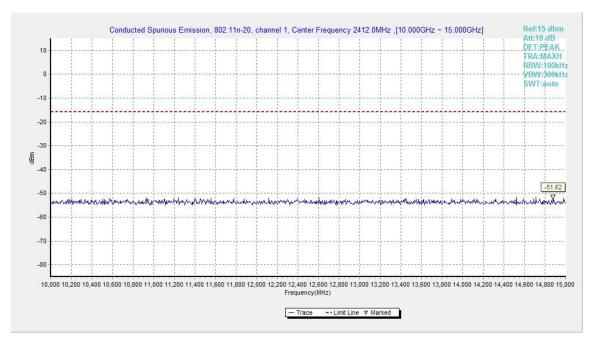


Fig.A.6.1.54 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch1, 10 GHz-15 GHz)



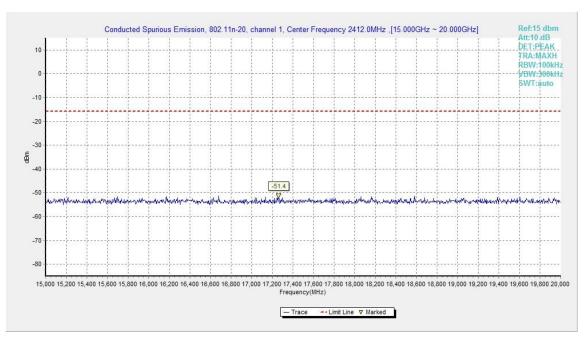


Fig.A.6.1.55 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch1, 15 GHz-20 GHz)

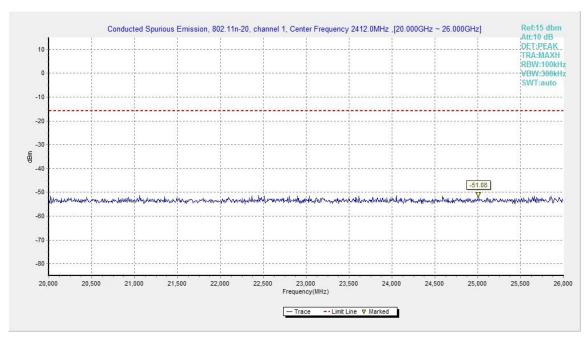


Fig.A.6.1.56 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch1, 20 GHz-26 GHz)

No. I16Z42314-SRD08 Page64 of 82



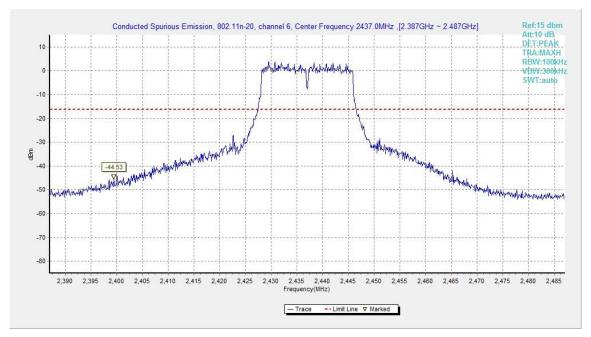


Fig.A.6.1.57 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch6, Center Frequency)

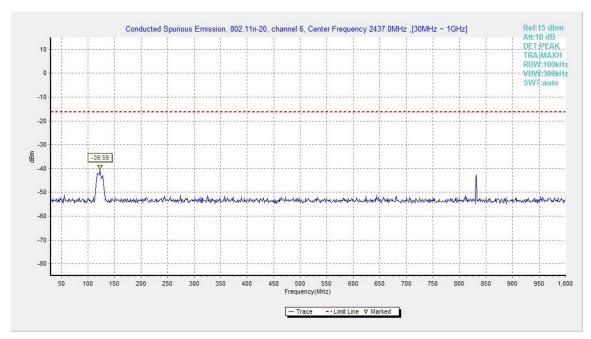


Fig.A.6.1.58 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch6, 30 MHz-1 GHz)



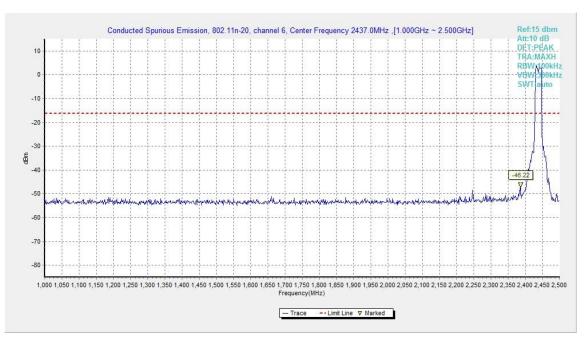


Fig.A.6.1.59 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch6, 1 GHz-2.5 GHz)

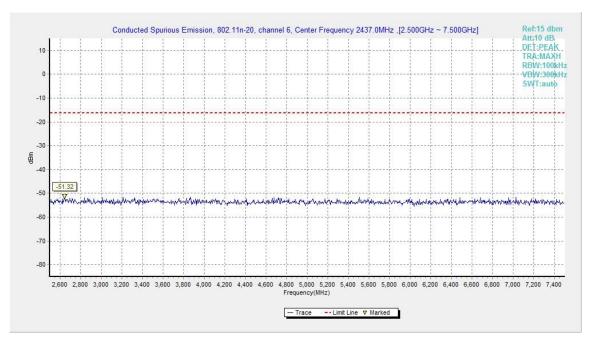


Fig.A.6.1.60 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch6, 2.5 GHz-7.5 GHz)



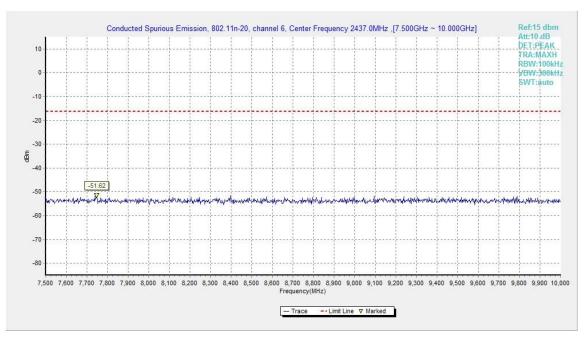


Fig.A.6.1.61 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch6, 7.5 GHz-10 GHz)

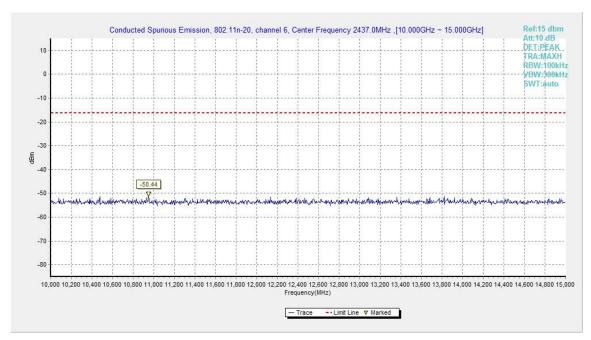


Fig.A.6.1.62 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch6, 10 GHz-15 GHz)



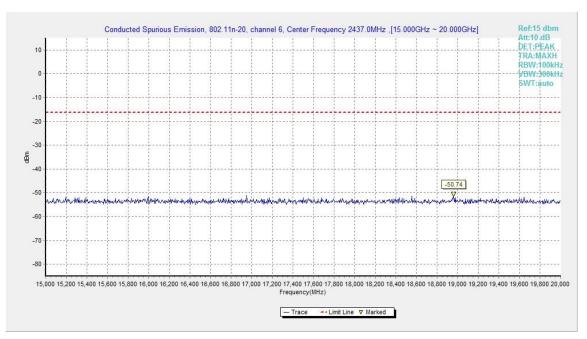


Fig.A.6.1.63 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch6, 15 GHz-20 GHz)

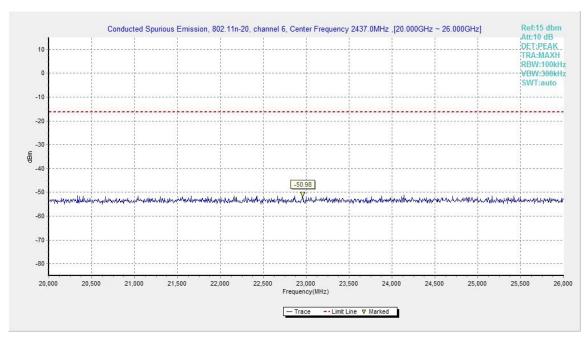


Fig.A.6.1.64 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch6, 20 GHz-26 GHz)

No. I16Z42314-SRD08 Page68 of 82



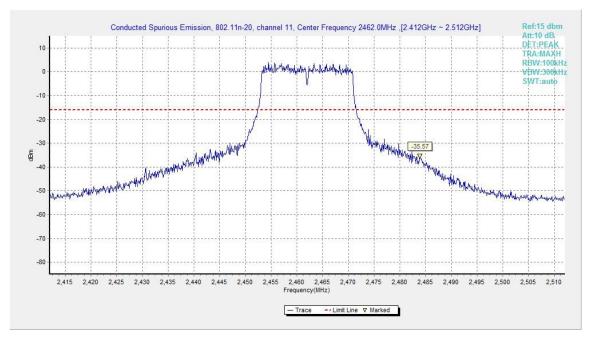


Fig.A.6.1.65 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, Center Frequency)

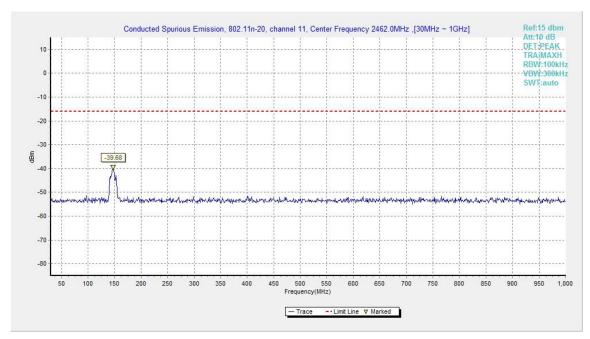


Fig.A.6.1.66 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, 30 MHz-1 GHz)



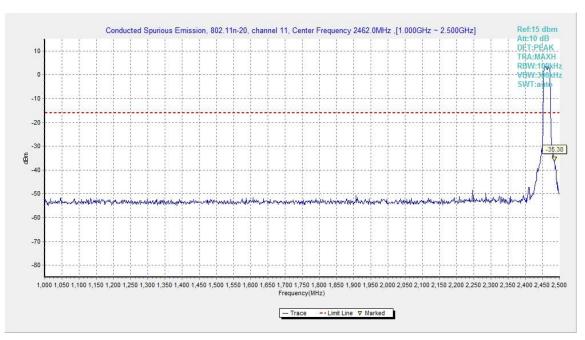


Fig.A.6.1.67 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, 1 GHz-2.5 GHz)

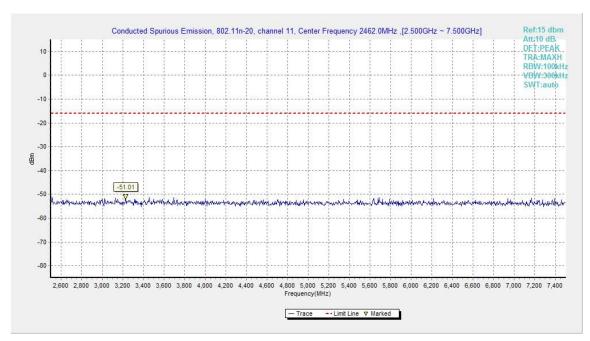


Fig.A.6.1.68 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, 2.5 GHz-7.5 GHz)



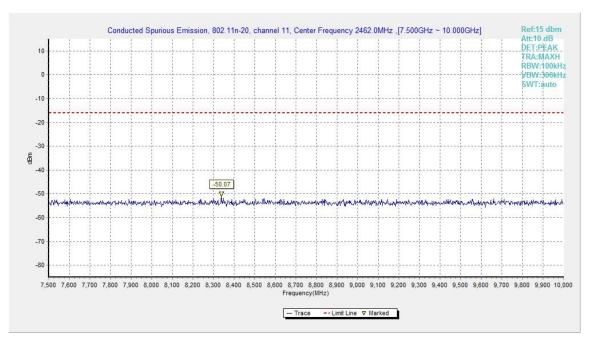


Fig.A.6.1.69 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, 7.5 GHz-10 GHz)

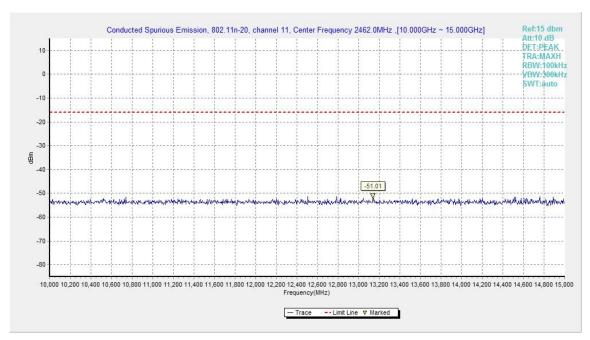


Fig.A.6.1.70 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, 10 GHz-15 GHz)



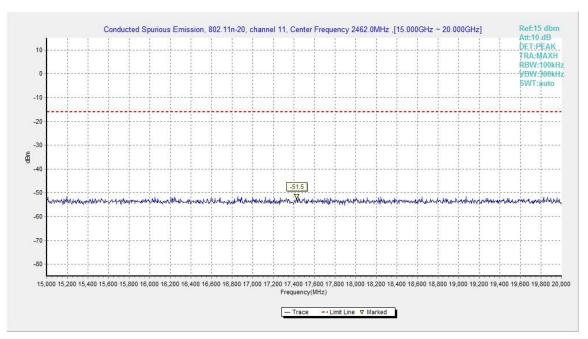


Fig.A.6.1.71 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, 15 GHz-20 GHz)

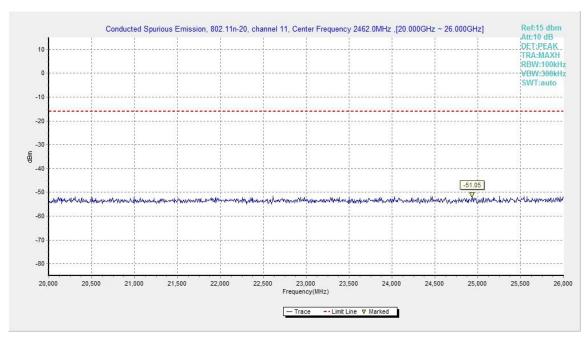


Fig.A.6.1.72 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, 20 GHz-26 GHz)



A.6.2 Transmitter Spurious Emission - Radiated

Method of Measurement: See ANSI C63.10-2013-clause 6.4 & 6.5 & 6.6 Measurement Limit:

Standard	Limit	
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power	

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit in restricted band:

Frequency of emission	Field strength(uV/m)	Field strength(dBuV/m)
(MHz)		
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Frequency (MHz)	Field strength(µV/m)	Measurement distance
		(m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30

Test Condition

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission	RBW/VBW	Sweep Time(s)
(MHz)		
30-1000	100KHz/300KHz	5
1000-4000	1MHz/1MHz	15
4000-18000	1MHz/1MHz	40
18000-26500	1MHz/1MHz	20

EUT ID: EUT1



Measurement Results:

802.11b mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11b	Power	2.38GHz ~2.43GHz	Fig.A.6.2.1	Р
002.11D	Power	2.45GHz ~2.5GHz	Fig.A.6.2.2	Р

802.11g mode

Mode	Channel	Frequency Range	Test Results	Conclusion
902 11 a	Power	2.38GHz ~2.43GHz	Fig.A.6.2.3	Р
802.11g	Power	2.45GHz ~2.5GHz	Fig.A.6.2.4	Р

802.11n mode

Mode	Channel	Frequency Range	Test Results	Conclusion
902 11 a	Power	2.38GHz ~2.43GHz	Fig.A.6.2.5	Р
802.11g	Power	2.45GHz ~2.5GHz	Fig.A.6.2.6	Р

Conclusion: Pass

Note:

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

 $\mathsf{P}_{\mathsf{Mea}}$ is the field strength recorded from the instrument.

The measurement results are obtained as described below:

Result=P_{Mea}+A_{Rpl=} P_{Mea}+Cable Loss+Antenna Factor

Ch	1	
U.	11	

Frequency(MHz)	Result	Cable	Antenna	P _{Mea}	Polarization
	(dBuV/m)	Loss(dB)	Factor	(dBuV/m)	
2384.375	69.9	-38.8	27.7	81.000	Н
17906.500	57.3	-18.5	45.6	30.200	Н
17917.500	57.1	-17.7	45.6	29.200	Н
17939.000	56.9	-17.7	45.6	29.000	V
17908.500	56.8	-18.5	45.6	29.700	V
17922.500	56.8	-17.7	45.6	28.900	Н



Ch6

	Result	Cable	Antenna	P _{Mea}	Polarization
Frequency(MHz)	(dBuV/m)	Loss(dB)	Factor	(dBuV/m)	
17843.000	56.6	-18.5	45.6	29.500	Н
17935.500	56.4	-17.7	45.6	28.500	Н
17997.500	56.4	-17.7	45.6	28.500	V
17931.000	56.3	-17.7	45.6	28.400	Н
17842.000	56.3	-18.5	45.6	29.200	V
17899.500	56.3	-18.5	45.6	29.200	Н

Ch11

	Result	Cable	Antenna	P _{Mea}	Polarization
Frequency(MHz)	(dBuV/m)	Loss(dB)	Factor	(dBuV/m)	
2484.350	66.7	-38.9	27.7	77.900	Н
17937.000	57.6	-17.7	45.6	29.700	Н
17850.500	57.3	-18.5	45.6	30.200	Н
17954.000	57.0	-17.7	45.6	29.100	Н
17905.500	57.0	-18.5	45.6	29.900	V
17961.000	56.9	-17.7	45.6	29.000	Н

802.11g

Ch1

	Result	Cable	Antenna	P _{Mea}	Polarization
Frequency(MHz)	(dBuV/m)	Loss(dB)	Factor	(dBuV/m)	
2382.720	64.1	-38.8	27.7	75.200	V
17903.000	57.1	-18.5	45.6	30.000	Н
17821.000	57.0	-18.5	45.6	29.900	V
17983.500	56.9	-17.7	45.6	29.000	Н
17945.500	56.8	-17.7	45.6	28.900	V
17986.500	56.8	-17.7	45.6	28.900	Н

Ch6

	Result	Cable	Antenna	P _{Mea}	Polarization
Frequency(MHz)	(dBuV/m)	Loss(dB)	Factor	(dBuV/m)	
17927.500	57.4	-17.7	45.6	29.500	Н
17807.500	57.1	-18.5	45.6	30.000	Н
17838.500	57	-18.5	45.6	29.900	V
17894.500	56.8	-18.5	45.6	29.700	V
17910.500	56.6	-18.5	45.6	29.500	Н
17851.500	56.6	-18.5	45.6	29.500	Н



Ch11

	Result	Cable	Antenna	P _{Mea}	Polarization
Frequency(MHz)	(dBuV/m)	Loss(dB)	Factor	(dBuV/m)	
2483.985	63.9	-38.9	27.7	75.100	Н
17913.500	57.3	-18.5	45.6	30.200	Н
17826.500	56.6	-18.5	45.6	29.500	V
17923.000	56.5	-17.7	45.6	28.600	Н
18000.000	56.4	-45.6	44.5	57.466	Н
17919.500	56.3	-17.7	45.6	28.400	Н

802.11n-HT20

Ch1

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
2388.955	68.0	-38.8	27.7	79.100	Н
17939.500	57.8	-17.7	45.6	29.900	V
17812.500	56.9	-18.5	45.6	29.800	Н
17910.500	56.8	-18.5	45.6	29.700	V
17956.000	56.7	-17.7	45.6	28.800	V
17827.000	56.6	-18.5	45.6	29.500	Н

Ch6

Frequency(MHz)	Result	Cable	Antenna	P _{Mea}	Polarization
	(dBuV/m)	Loss(dB)	Factor	(dBuV/m)	
17891.500	56.8	-18.5	45.6	29.700	V
17953.500	56.7	-17.7	45.6	28.800	Н
17936.500	56.7	-17.7	45.6	28.800	Н
17928.000	56.6	-17.7	45.6	28.700	Н
17932.500	56.6	-17.7	45.6	28.700	V
17971.000	56.6	-17.7	45.6	28.700	Н

Ch11

Frequency(MHz)	Result		Antenna Factor	P _{Mea} (dBuV/m)	Polarization
	(dBuV/m)	Loss(dB)	Factor	(ubuv/iii)	
2483.880	68.6	-38.9	27.7	79.800	Н
17916.000	57.2	-17.7	45.6	29.300	Н
17908.500	57.0	-18.5	45.6	29.900	Н
17984.000	57.0	-17.7	45.6	29.100	Н
17919.500	56.9	-17.7	45.6	29.000	V
17817.000	56.7	-18.5	45.6	29.600	Н



Test graphs as below:

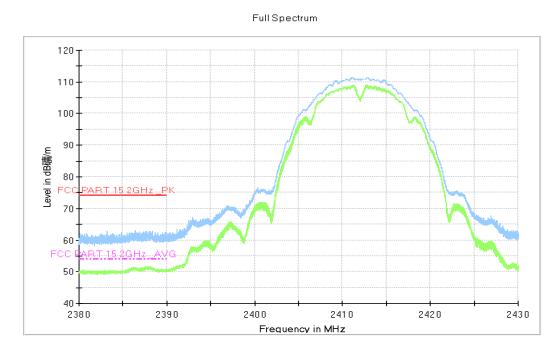


Fig.A.6.2.1 Transmitter Spurious Emission - Radiated (Power): 802.11b, ch1, 2.38 GHz – 2.43GHz

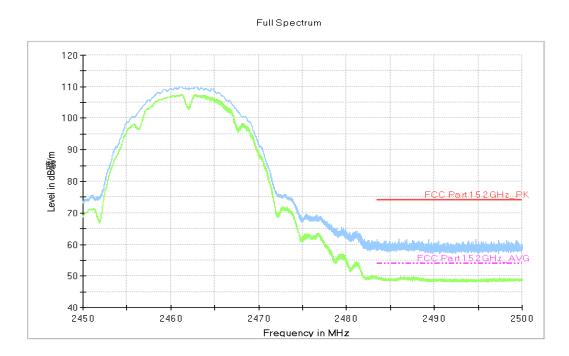


Fig.A.6.2.2 Transmitter Spurious Emission - Radiated (Power): 802.11b, ch11, 2.45 GHz - 2.50GHz

No. I16Z42314-SRD08 Page77 of 82



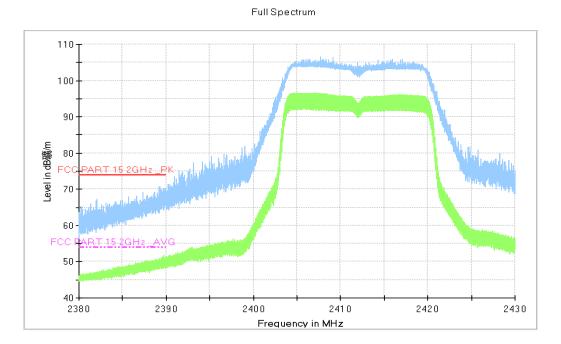


Fig.A.6.2.3 Transmitter Spurious Emission - Radiated (Power): 802.11g, ch1, 2.38 GHz - 2.43GHz

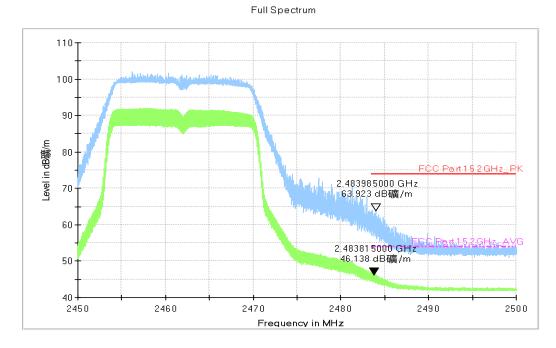


Fig.A.6.2.4 Transmitter Spurious Emission - Radiated (Power): 802.11g, ch11, 2.45 GHz - 2.50GHz

No. I16Z42314-SRD08 Page78 of 82



Full Spectrum

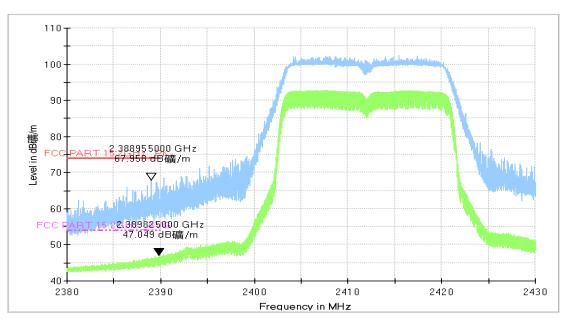


Fig.A.6.2.5 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT20, ch1, 2.38 GHz - 2.45GHz

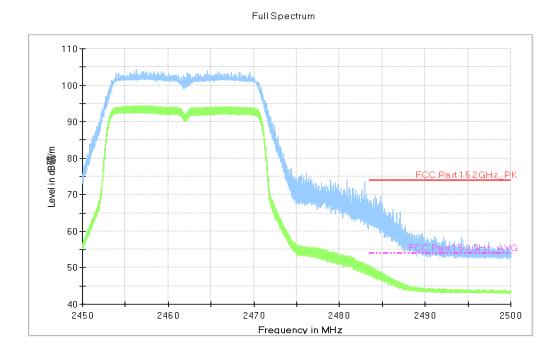


Fig.A.6.2.6 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT20, ch11, 2.45 GHz - 2.50GHz



A.7. AC Power-line Conducted Emission

Method of Measurement: See ANSI C63.10-2013-clause 6.2

- 1 The one EUT cable configuration and arrangement and mode of operation that produced the emission with the highest amplitude relative to the limit is selected for the final measurement, while applying the appropriate modulating signal to the EUT.
- 2 If the EUT is relocated from an exploratory test site to a final test site, the highest emissions shall be remaximized at the final test location before final ac power-line conducted emission measurements are performed.
- 3 The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) is then performed for the full frequency range for which the EUT is being tested for compliance without further variation of the EUT arrangement, cable positions, or EUT mode of operation.
- 4 If the EUT is comprised of equipment units that have their own separate ac power connections, e.g., floor-standing equipment with independent power cords for each shelf that are able to connect directly to the ac power network, each current-carrying conductor of one unit is measured while the other units are connected to a second (or more) LISN(s). All units shall be separately measured. If a power strip is provided by the manufacturer, to supply all of the units making up the EUT, only the conductors in the power cord of the power strip shall be measured.
- 5 If the EUT uses a detachable antenna, these measurements shall be made with a suitable dummy load connected to the antenna output terminals; otherwise, the tests shall be made with the antenna connected and, if adjustable, fully extended. When measuring the ac conducted emissions from a device that operates between 150 kHz and 30 MHz a non-detachable antenna may be replaced with a dummy load for the measurements within the fundamental emission band of the transmitter, but only for those measurements.36 Record the six highest EUT emissions relative to the limit of each of the current-carrying conductors of the power cords of the equipment that comprises the EUT over the frequency range specified by the procuring or regulatory agency. Diagram or photograph the test setup that was used. See Clause 8 for full reporting requirements.

Test Condition:

Voltage (V)	Frequency (Hz)
120	60



Measurement Result and limit:

WLAN (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dBµV)	Result (With ch	• •	Conclusion
(11112)		802.11b	ldle	
0.15 to 0.5	66 to 56			
0.5 to 5	56	Fig.A.7.1	Fig.A.7.2	Р
5 to 30	60			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)

F		Result	(dBµV)	
Frequency range	Average Limit	With cl	harger	Conclusion
(MHz)	(dBµV)	802.11b	Idle	
0.15 to 0.5	56 to 46			
0.5 to 5	46	Fig.A.7.1	Fig.A.7.2	Р
5 to 30	50			
NOTE: The limit dec	creases linearly w	vith the logarithm of t	he frequency in the	range 0.15 MHz

to 0.5 MHz.

Conclusion: Pass

Test graphs as below:

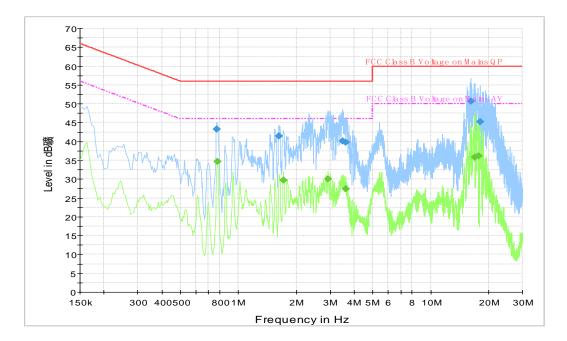


Fig.A.7.1 AC Powerline Conducted Emission-802.11b

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.



Final Result 1

Frequency	QuasiPeak	Meas. Time	Bandwidth	Filte	Line	Corr.	Margin	Limit
(MHz)	(dBµV)	(ms)	(kHz)	r		(dB)	(dB)	(dBµV)
0.771000	43.3	2000.0	9.000	On	L1	19.8	12.7	56.0
1.621500	41.5	2000.0	9.000	On	L1	19.7	14.5	56.0
3.471000	40.1	2000.0	9.000	On	L1	19.4	15.9	56.0
3.606000	39.7	2000.0	9.000	On	L1	19.5	16.3	56.0
16.179000	50.7	2000.0	9.000	On	Ν	19.8	9.3	60.0
18.118500	45.2	2000.0	9.000	On	L1	19.9	14.8	60.0

Final Result 2

Frequency	QuasiPeak	Meas. Time	Bandwidth	Filte	Line	Corr.	Margin	Limit
(MHz)	(dBµV)	(ms)	(kHz)	r		(dB)	(dB)	(dBµV)
0.775500	34.6	2000.0	9.000	On	Ν	19.8	11.4	46.0
1.716000	29.7	2000.0	9.000	On	L1	19.7	16.3	46.0
2.917500	30.0	2000.0	9.000	On	L1	19.0	16.0	46.0
3.606000	27.4	2000.0	9.000	On	L1	19.5	18.6	46.0
16.957500	35.8	2000.0	9.000	On	Ν	19.8	14.2	50.0
17.727000	36.1	2000.0	9.000	On	L1	19.9	13.9	50.0



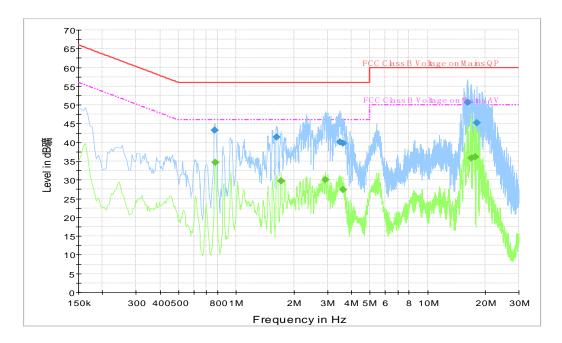


Fig.A.7.1 AC Powerline Conducted Emission-Idle
--

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final	Result 1
-------	----------

Frequency	QuasiPeak	Meas. Time	Bandwidt	Filter	Line	Corr.	Margin	Limit
(MHz)	(dBµV)	(ms)	h			(dB)	(dB)	(dBµV)
0.226500	55.2	2000.0	9.000	On	Ν	19.8	7.4	62.6
0.402000	49.3	2000.0	9.000	On	Ν	19.9	8.5	57.8
0.519000	45.8	2000.0	9.000	On	Ν	19.9	10.2	56.0
0.816000	42.6	2000.0	9.000	On	Ν	19.8	13.4	56.0
3.597000	40.0	2000.0	9.000	On	Ν	19.5	16.0	56.0
4.024500	41.2	2000.0	9.000	On	Ν	19.5	14.8	56.0

Final Result 2

Frequency	QuasiPeak	Meas. Time	Bandwidt	Filter	Line	Corr.	Margin	Limit
(MHz)	(dBµV)	(ms)	h			(dB)	(dB)	(dBµV)
0.771000	29.5	2000.0	9.000	On	L1	19.8	16.5	46.0
1.626000	27.4	2000.0	9.000	On	Ν	19.7	18.6	46.0
2.233500	25.8	2000.0	9.000	On	L1	19.3	20.2	46.0
3.615000	26.8	2000.0	9.000	On	L1	19.5	19.2	46.0
17.209500	27.8	2000.0	9.000	On	Ν	19.9	22.2	50.0
18.064500	23.6	2000.0	9.000	On	Ν	19.9	26.4	50.0

END OF REPORT