




**BUREAU
VERITAS**

Test Report No.: RFA210218W001-4


LTE Band26

Channel Bandwidth: 10MHz 16QAM

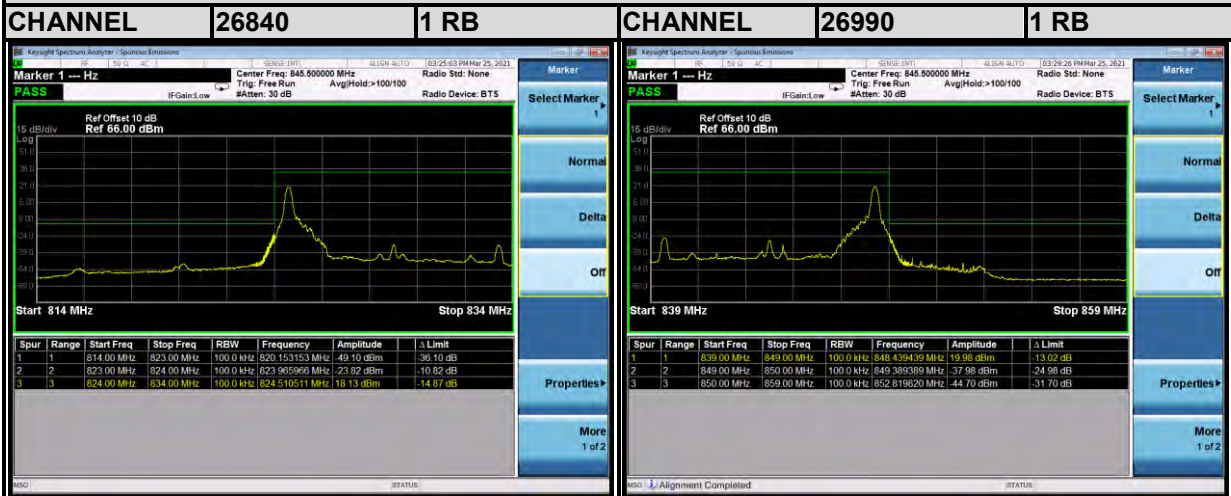

LTE Band26

Channel Bandwidth: 10MHz 16QAM

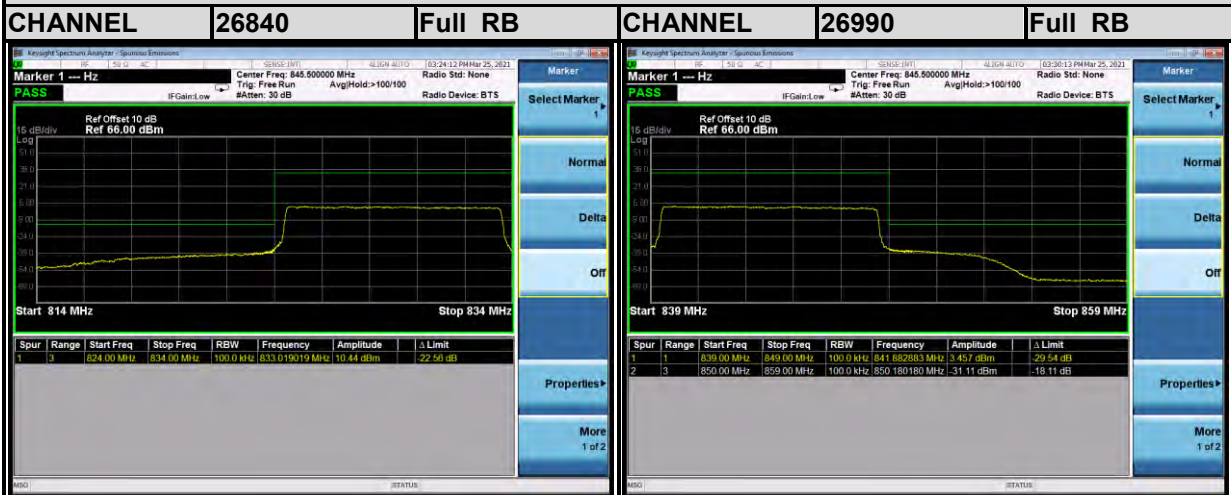




BUREAU VERITAS

Test Report No.: RFA210218W001-4


LTE Band26

Channel Bandwidth: 15MHz QPSK

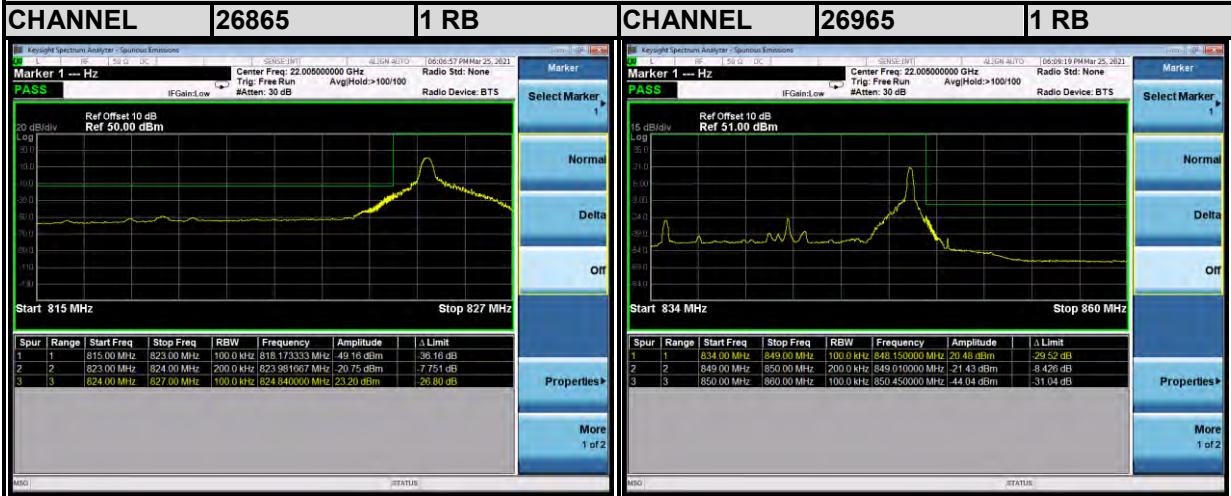

LTE Band26



Channel Bandwidth: 15MHz QPSK

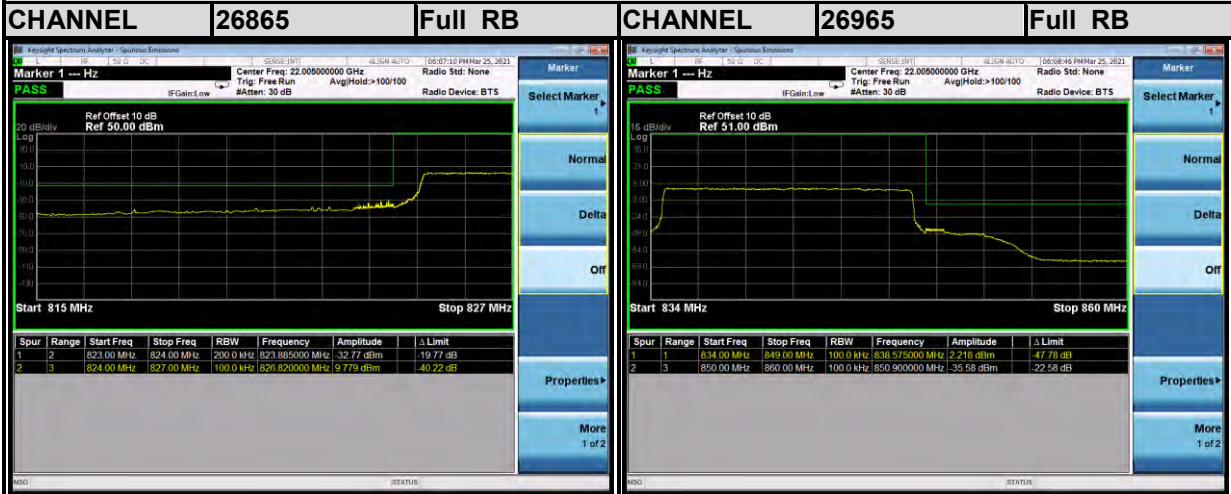



**BUREAU
VERITAS**

Test Report No.: RFA210218W001-4

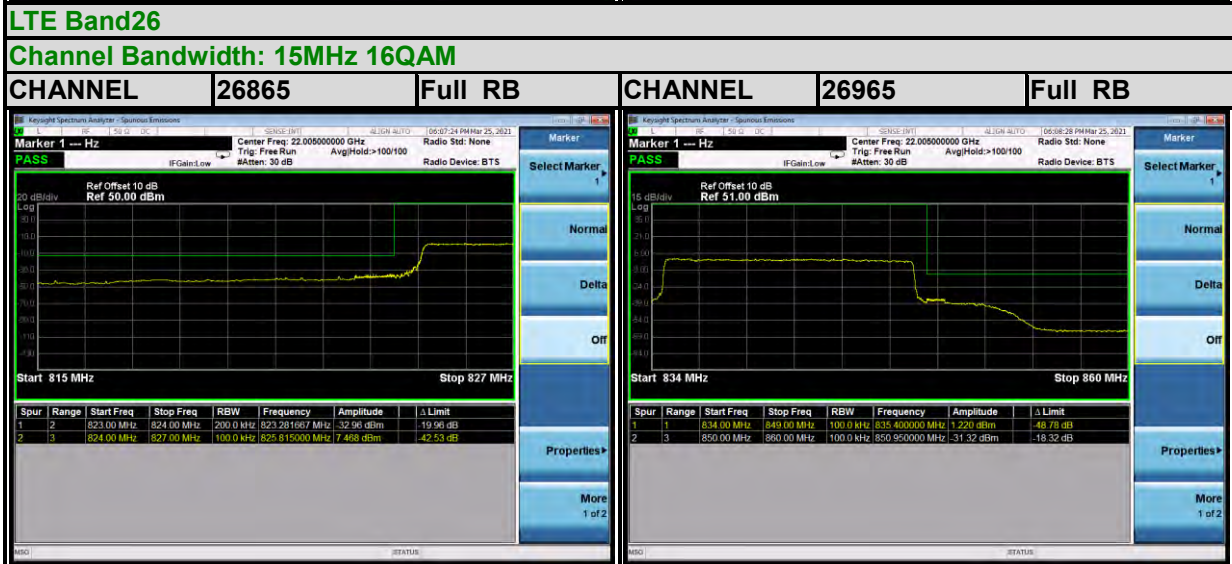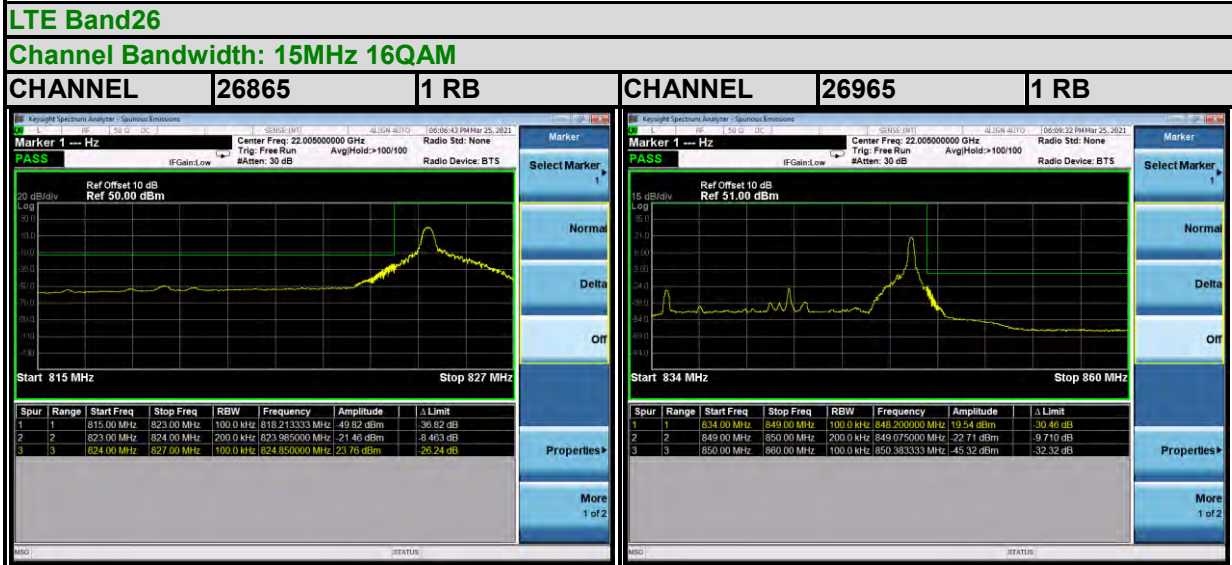



3.5 CONDUCTED SPURIOUS EMISSIONS


3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

3.5.2 TEST PROCEDURE

- a. The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- b. Measuring frequency range is from 9 kHz to 9GHz. 10dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz is used for conducted emission measurement.

3.5.3 TEST SETUP

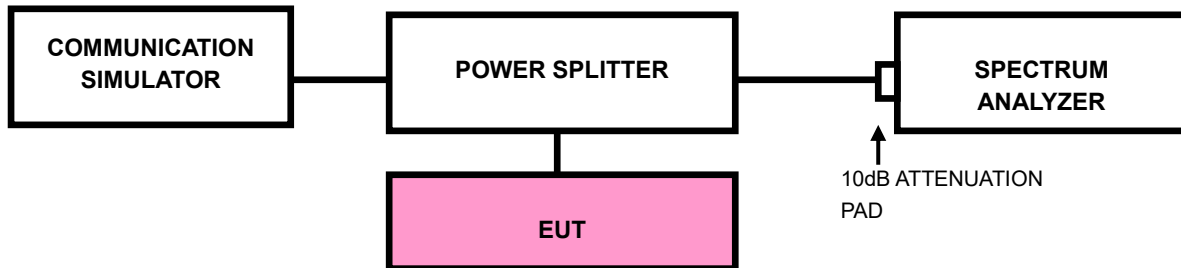




BUREAU VERITAS

Test Report No.: RFA210218W001-4


3.5.4 TEST RESULTS

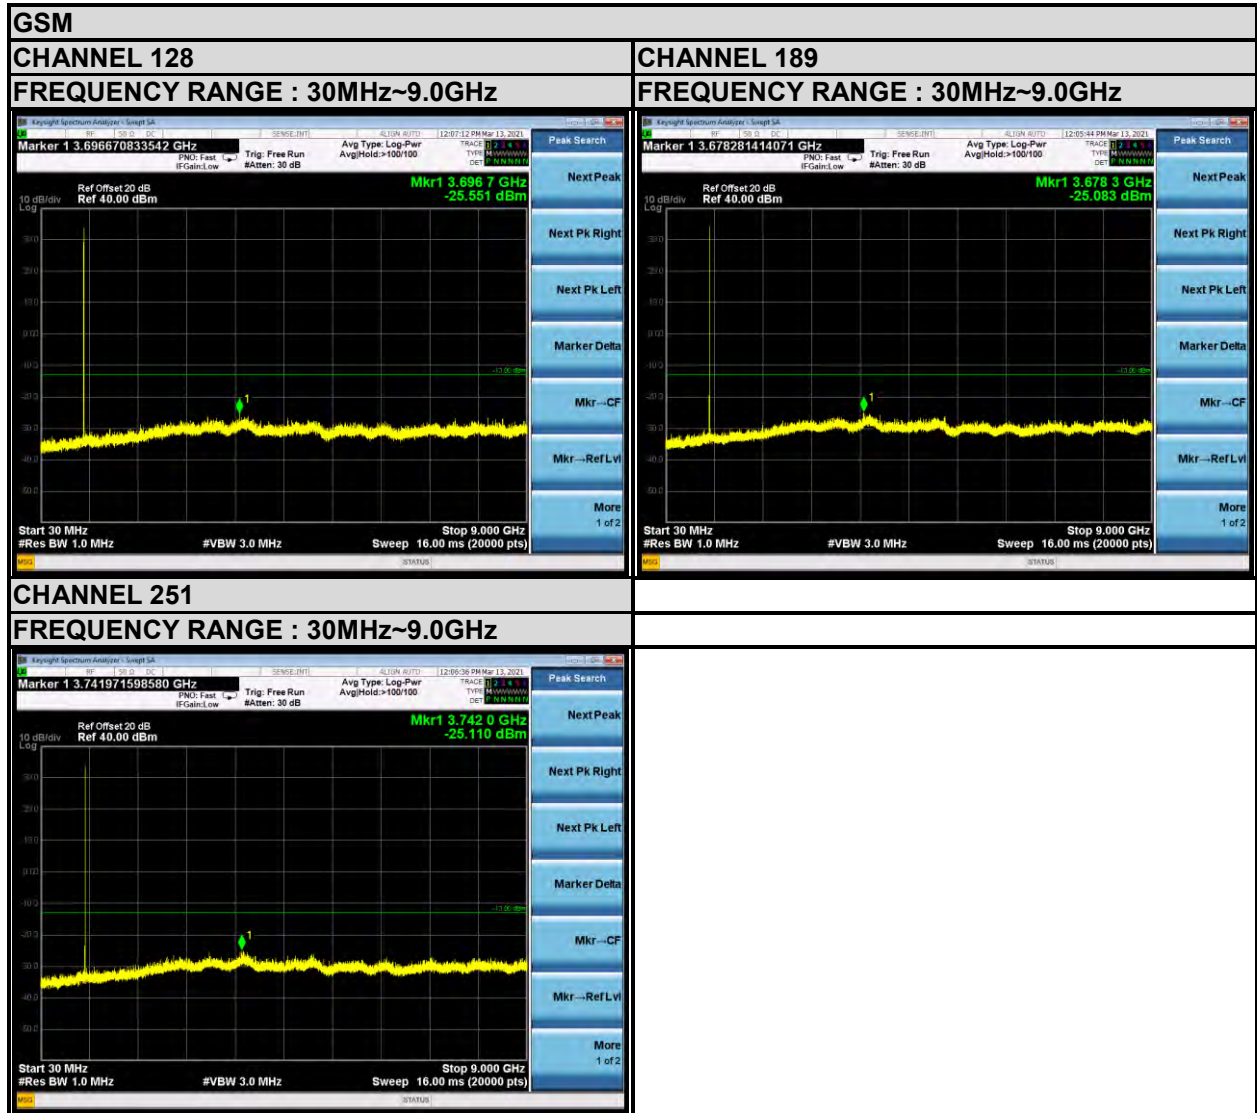



BUREAU VERITAS


Test Report No.: RFA210218W001-4

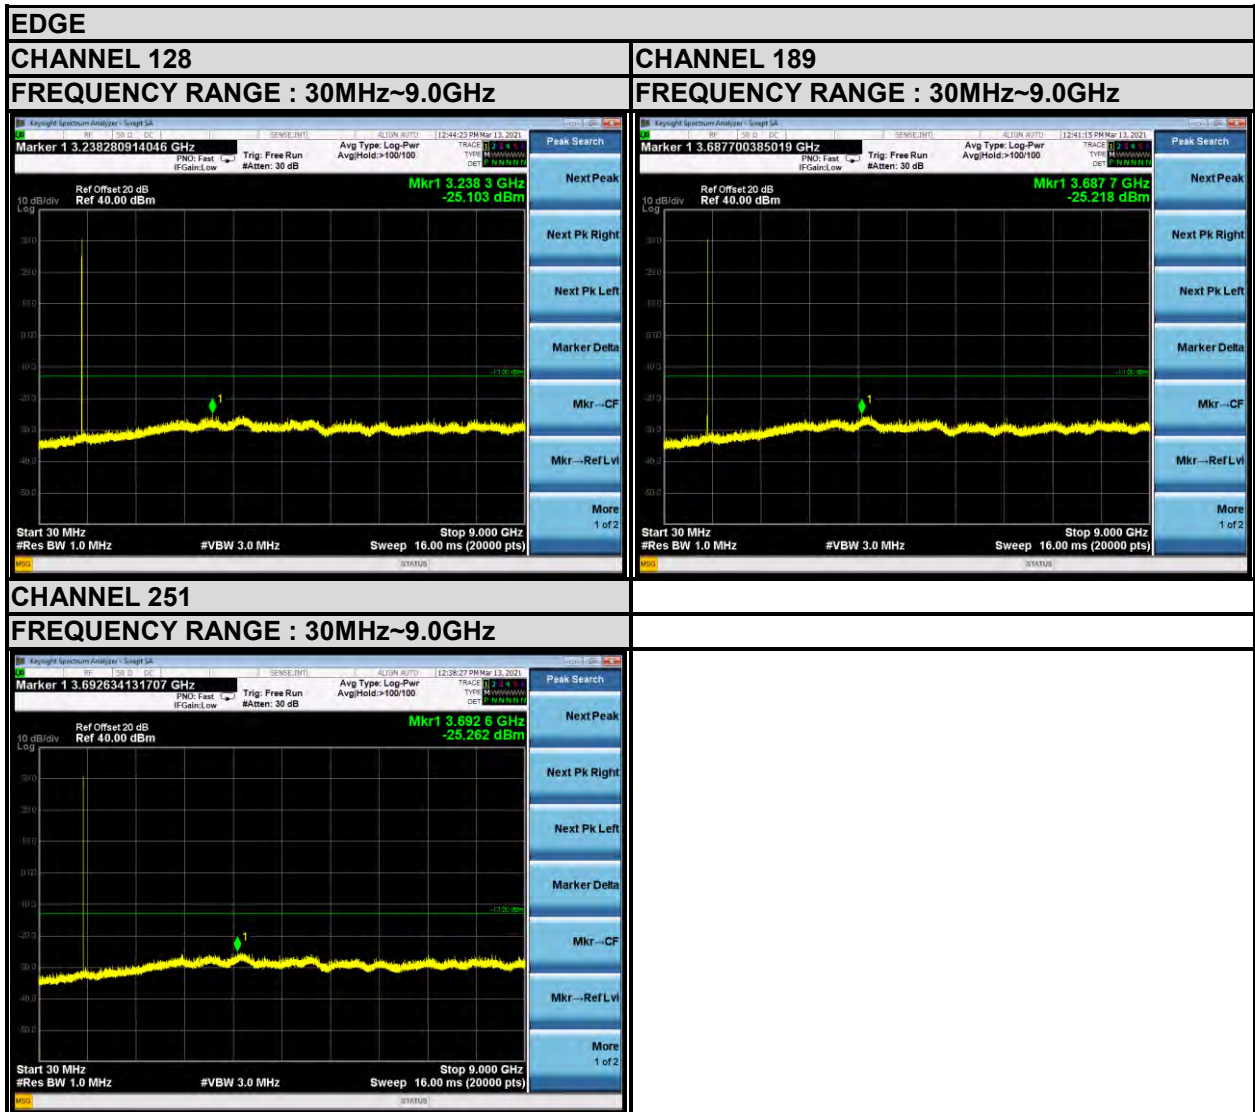



BUREAU VERITAS


Test Report No.: RFA210218W001-4

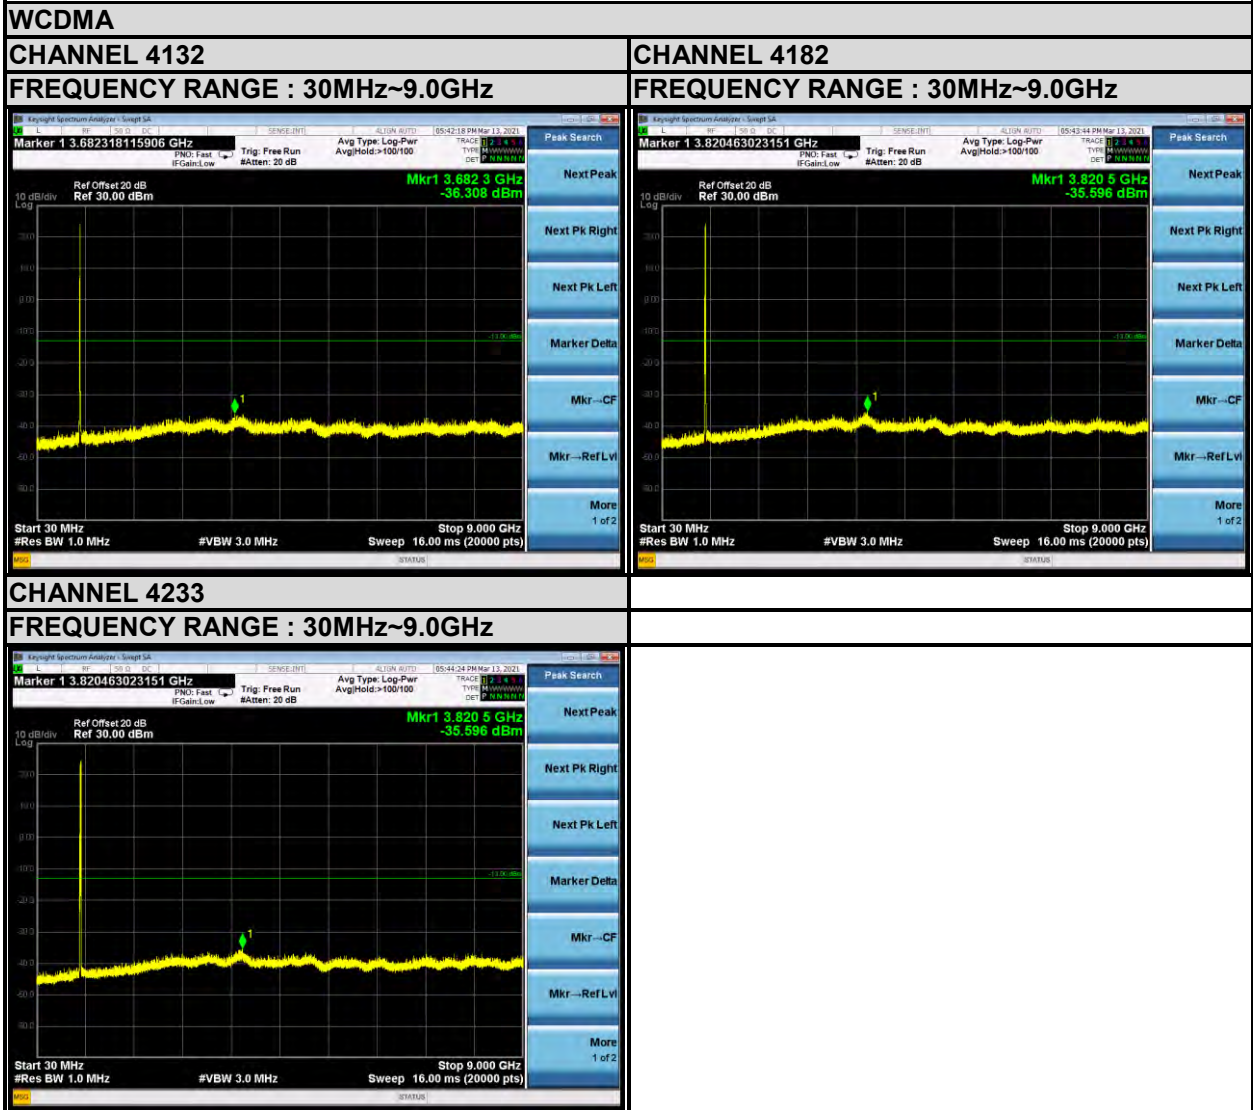



BUREAU VERITAS

Test Report No.: RFA210218W001-4

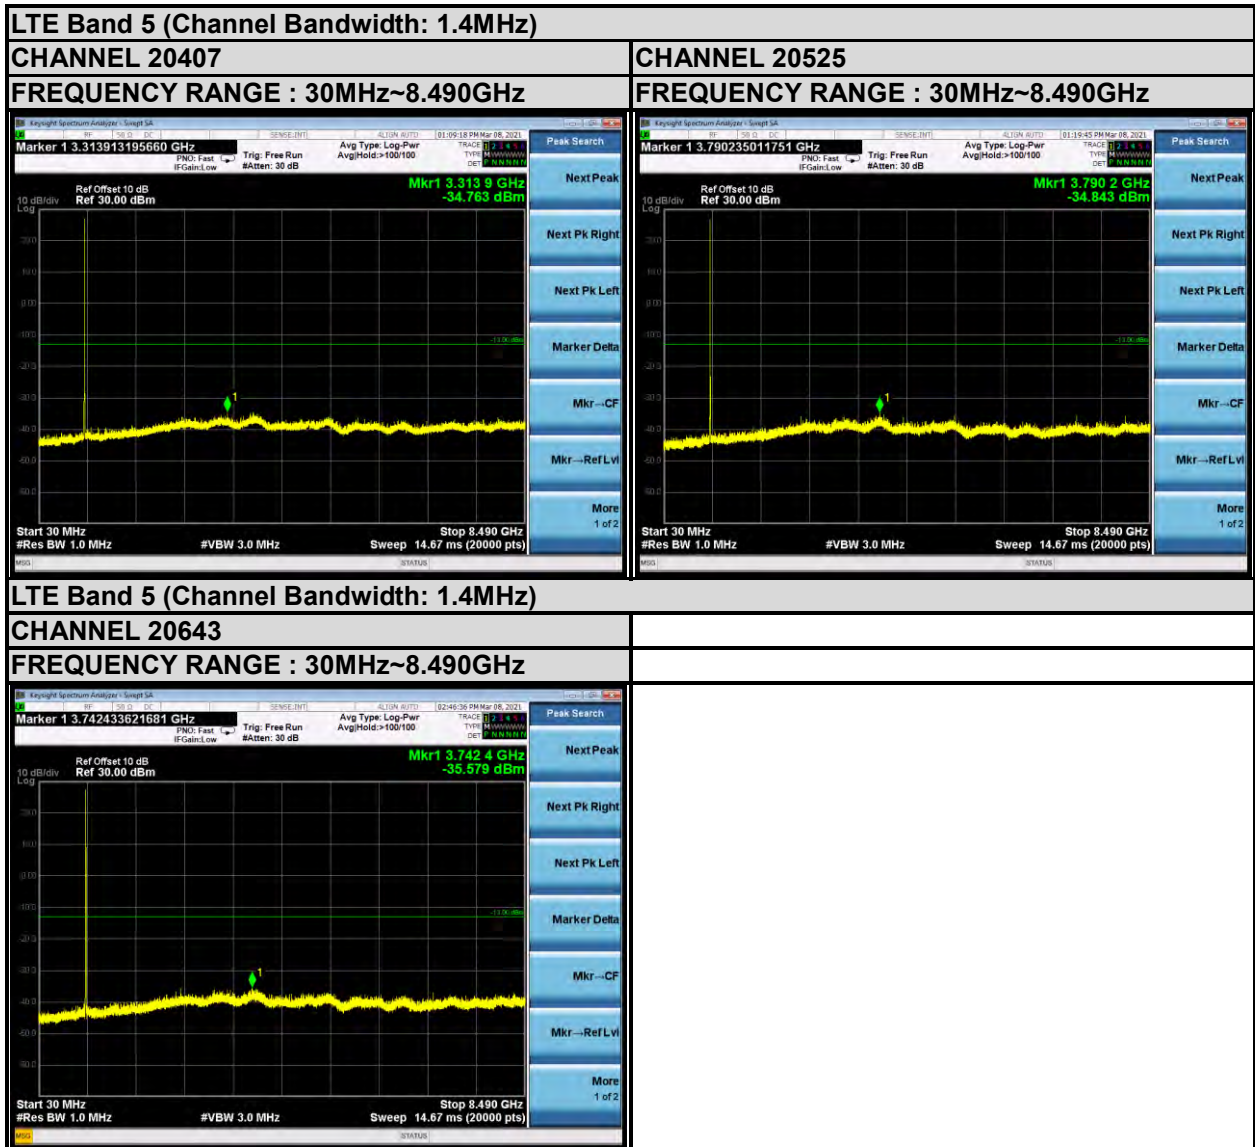




BUREAU VERITAS

Test Report No.: RFA210218W001-4

LTE Band 5 (Channel Bandwidth: 3MHz)


CHANNEL 20415

FREQUENCY RANGE : 30MHz~8.490GHz

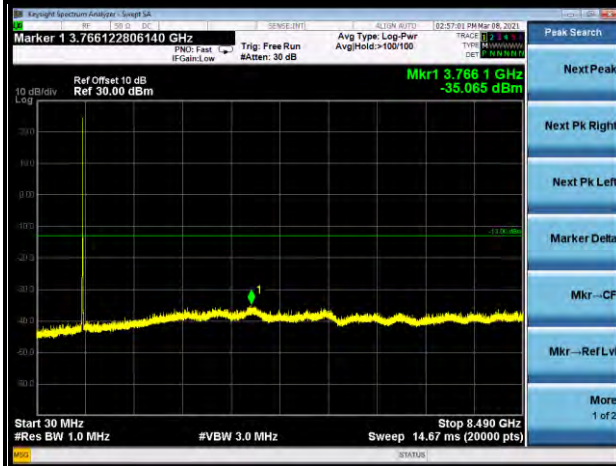



CHANNEL 20525

FREQUENCY RANGE : 30MHz~8.490GHz

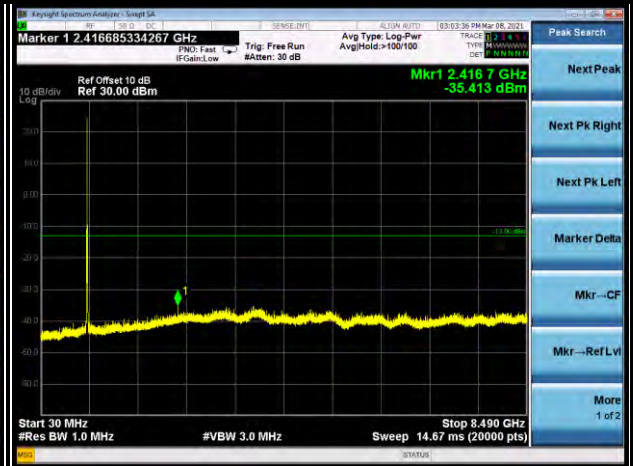

CHANNEL 20635


FREQUENCY RANGE : 30MHz~8.490GHz

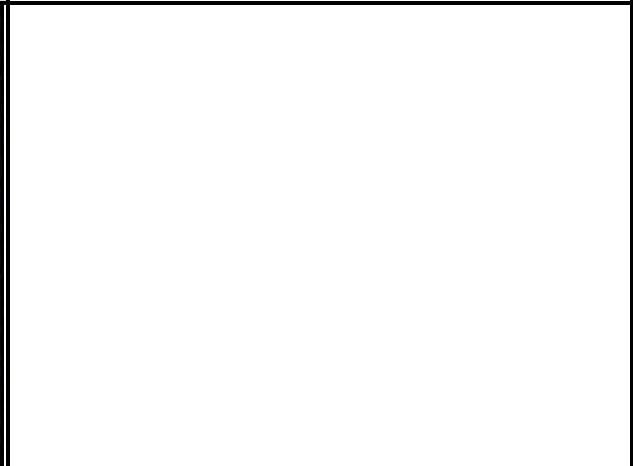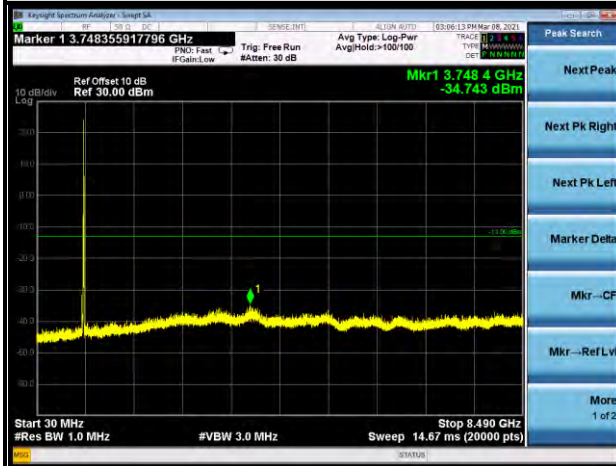



BUREAU VERITAS

Test Report No.: RFA210218W001-4

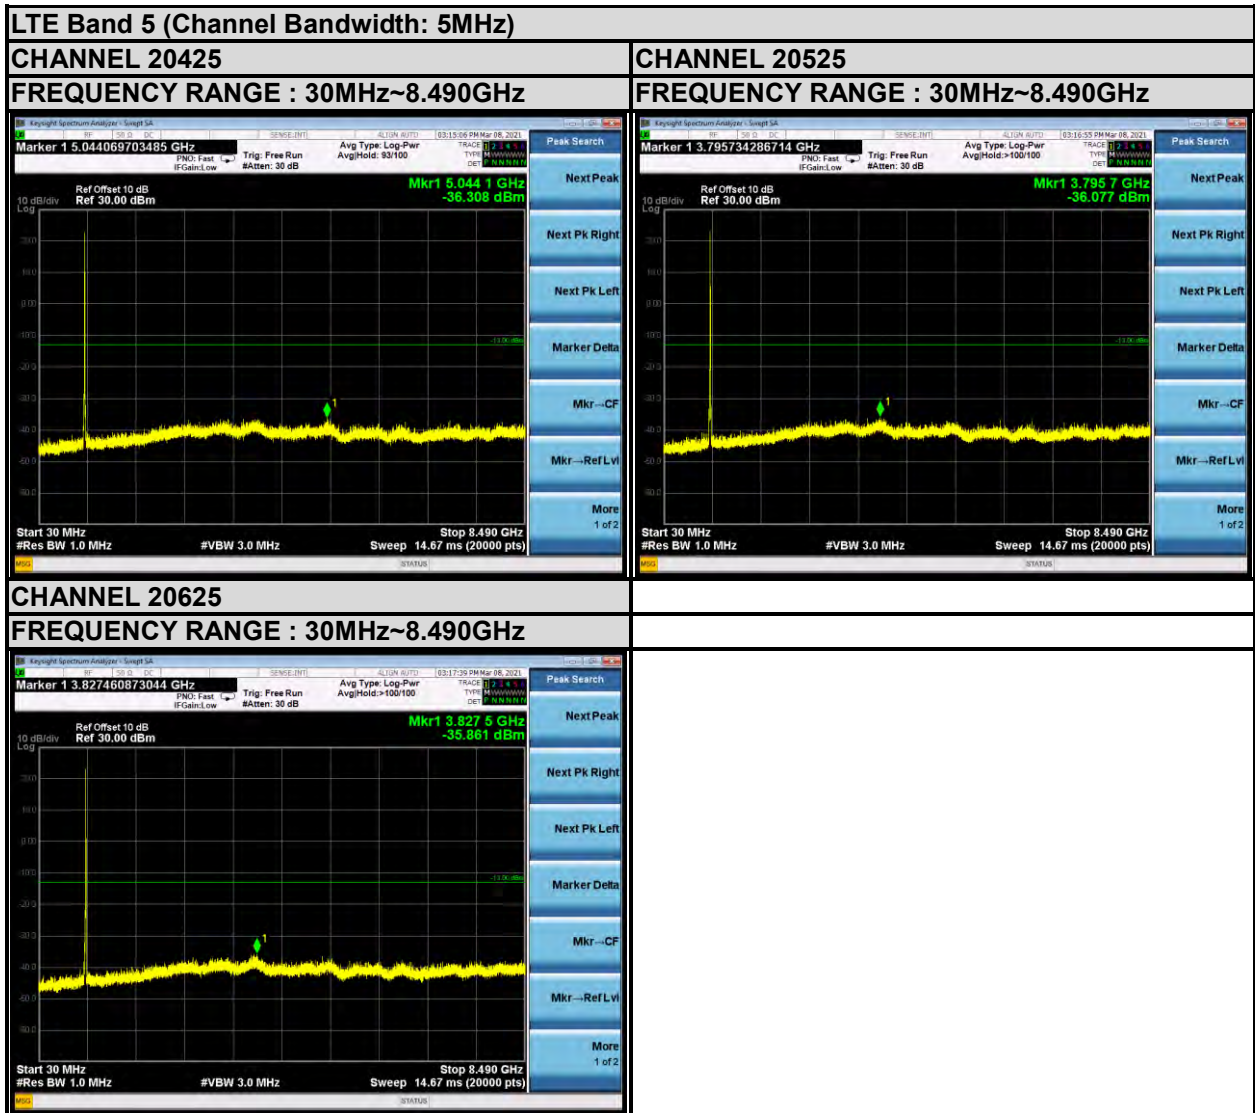




BUREAU VERITAS

Test Report No.: RFA210218W001-4

LTE Band 5 (Channel Bandwidth: 10MHz)


CHANNEL 20450

FREQUENCY RANGE : 30MHz~8.490GHz

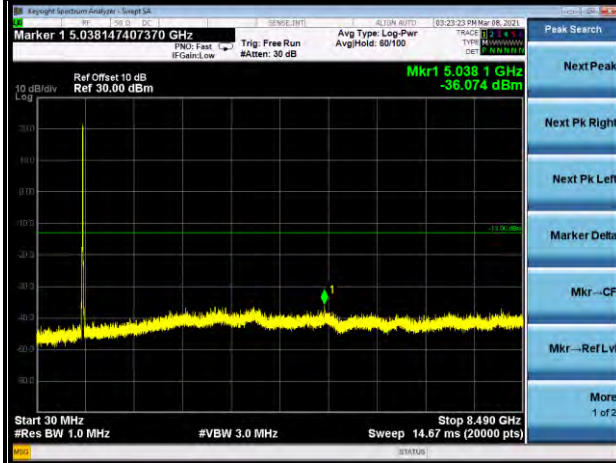


CHANNEL 20525

FREQUENCY RANGE : 30MHz~8.490GHz

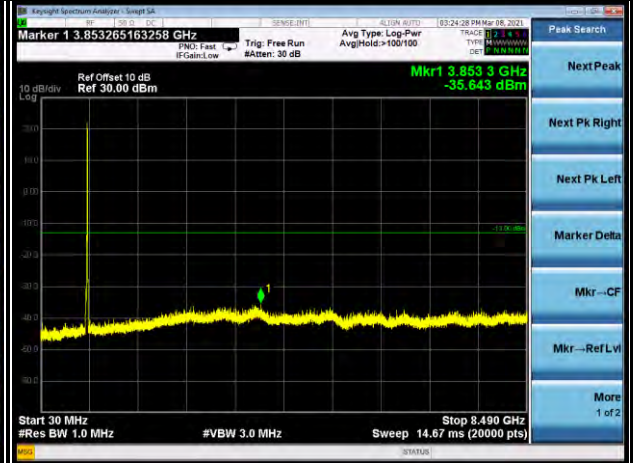

CHANNEL 20600

FREQUENCY RANGE : 30MHz~8.490GHz

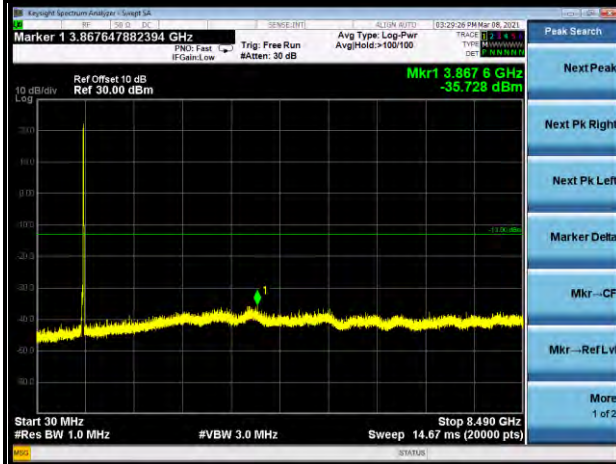




BUREAU VERITAS

Test Report No.: RFA210218W001-4

LTE Band 26 (Channel Bandwidth: 1.4MHz)

CHANNEL 26797

FREQUENCY RANGE : 30MHz~9.0GHz

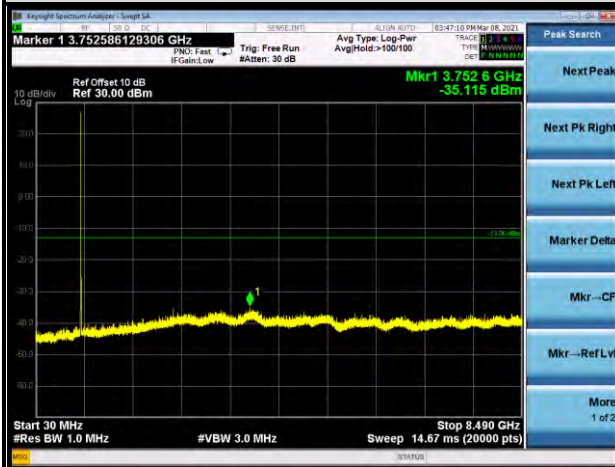

CHANNEL 26865



FREQUENCY RANGE : 30MHz~9.0GHz



LTE Band 26 (Channel Bandwidth: 1.4MHz)

CHANNEL 27033

FREQUENCY RANGE : 30MHz~9.0GHz

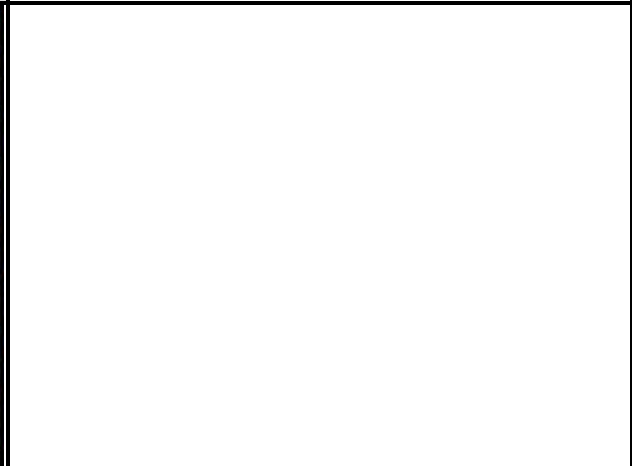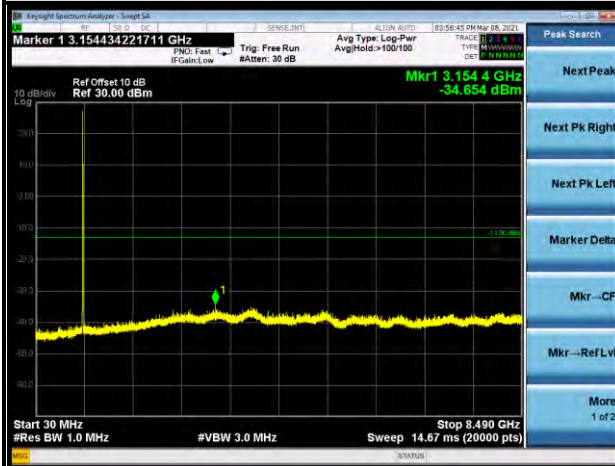



**BUREAU
VERITAS**

Test Report No.: RFA210218W001-4





BUREAU VERITAS

Test Report No.: RFA210218W001-4





BUREAU VERITAS

Test Report No.: RFA210218W001-4





BUREAU VERITAS

Test Report No.: RFA210218W001-4





3.6 RADIATED EMISSION MEASUREMENT

3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

3.6.2 TEST PROCEDURES

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G
- c. $\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$.
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $\text{E.R.P power} = \text{E.I.P.R power} - 2.15\text{dBi}$.

NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.


3.6.3 DEVIATION FROM TEST STANDARD

No deviation




3.6.4 TEST SETUP

< Frequency Range 30MHz~1GHz >

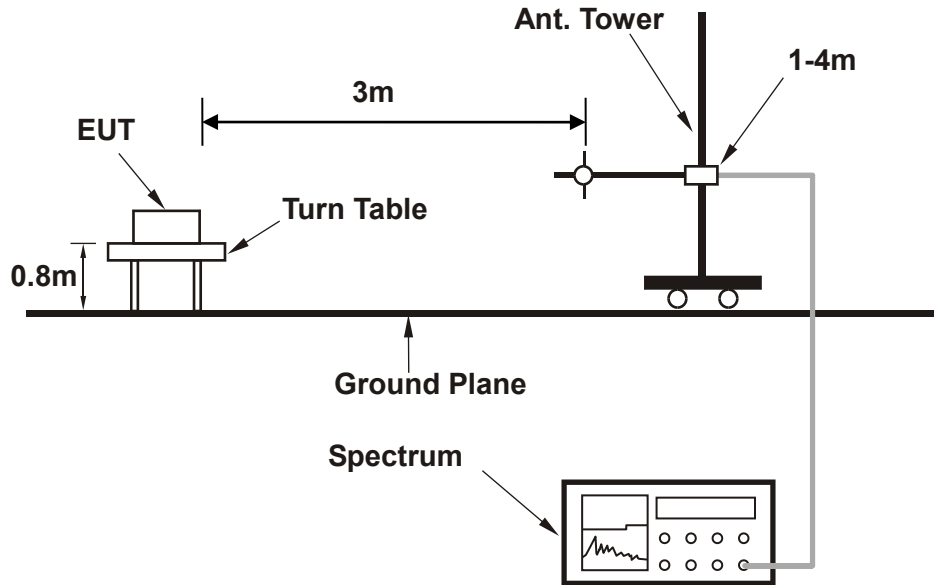

<Frequency Range above 1GHz>

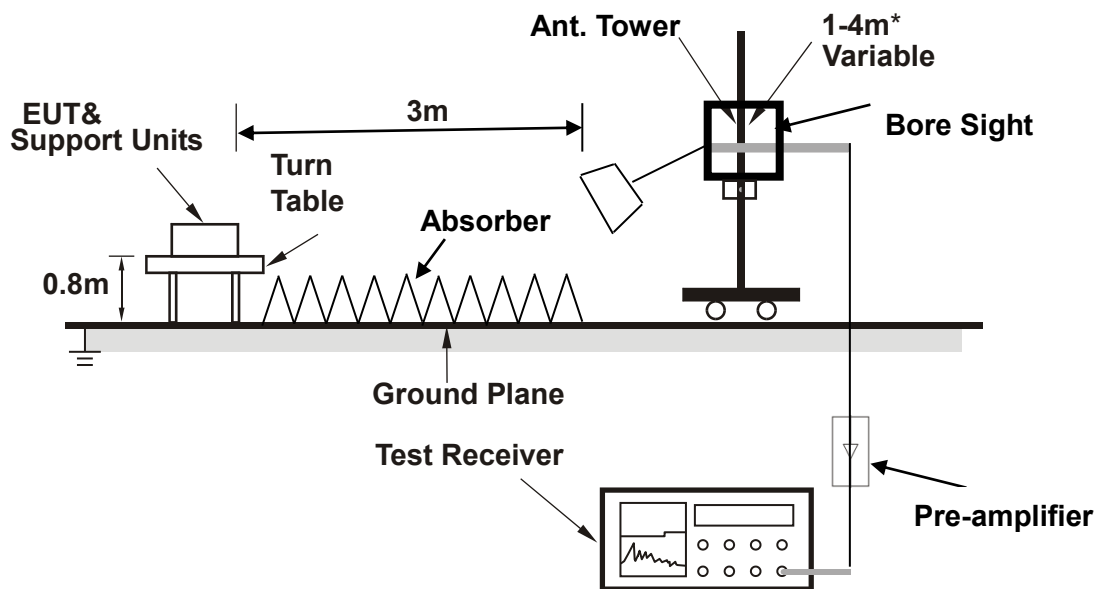

Note: Above 1G is a directional antenna

Depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

For the actual test configuration, please refer to the attached file (Test Setup Photo).



3.6.5 TEST RESULTS

BELOW 1GHz WORST-CASE DATA


30 MHz – 1GHz data:

LTE Band 5

CHANNEL BANDWIDTH: 1.4MHz / QPSK

MODE	TX channel 20525	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	31.000	-41.49	-61.89	-13.00	-28.49	20.40	Peak	Horizontal
2	68.000	-33.11	-40.27	-13.00	-20.11	7.16	Peak	Horizontal
3	168.000	-36.83	-47.21	-13.00	-23.83	10.38	Peak	Horizontal
4	223.000	-34.86	-46.47	-13.00	-21.86	11.61	Peak	Horizontal
5 PP	254.000	-28.88	-42.39	-13.00	-15.88	13.51	Peak	Horizontal
6	364.000	-39.48	-55.13	-13.00	-26.48	15.65	Peak	Horizontal

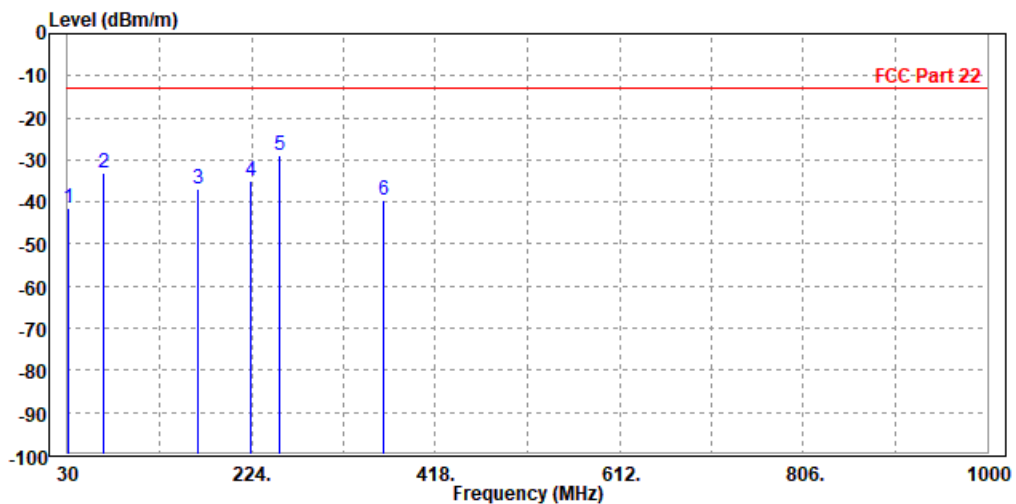




**BUREAU
VERITAS**

Test Report No.: RFA210218W001-4

MODE	TX channel 20525	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	31.000	-29.63	-50.03	-13.00	-16.63	20.40	Peak	Vertical
2 PP	69.000	-25.17	-32.30	-13.00	-12.17	7.13	Peak	Vertical
3	169.000	-42.08	-52.42	-13.00	-29.08	10.34	Peak	Vertical
4	234.000	-38.33	-50.71	-13.00	-25.33	12.38	Peak	Vertical
5	385.000	-39.58	-55.90	-13.00	-26.58	16.32	Peak	Vertical
6	400.000	-39.28	-56.08	-13.00	-26.28	16.80	Peak	Vertical

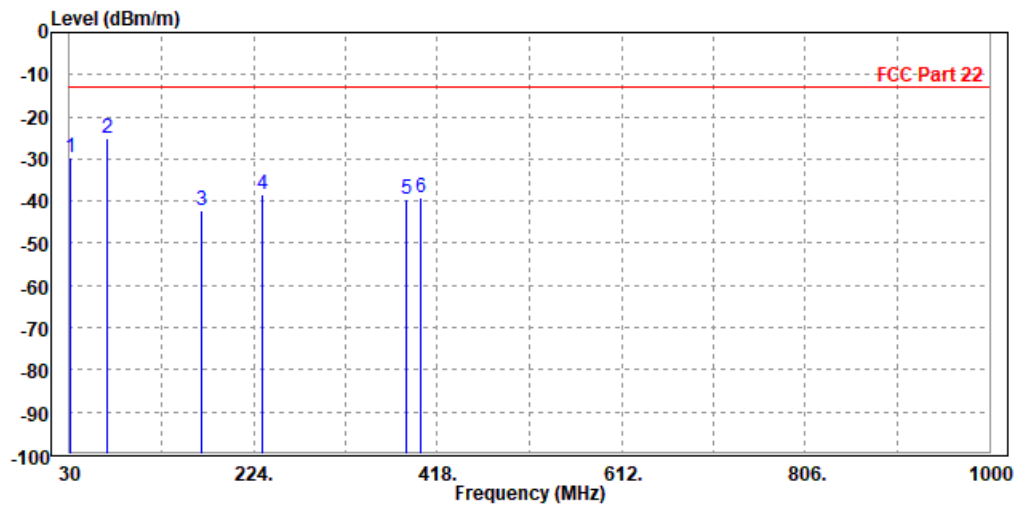



**BUREAU
VERITAS**

Test Report No.: RFA210218W001-4

ABOVE 1GHz DATA


Note: For higher frequency, the emission is too low to be detected.

GSM 850

CH 128:

MODE	TX channel 128	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1648.000	-28.88	-32.13	-13.00	-15.88	3.25	Peak	Horizontal
2 PP	2472.600	-21.12	-29.14	-13.00	-8.12	8.02	Peak	Horizontal

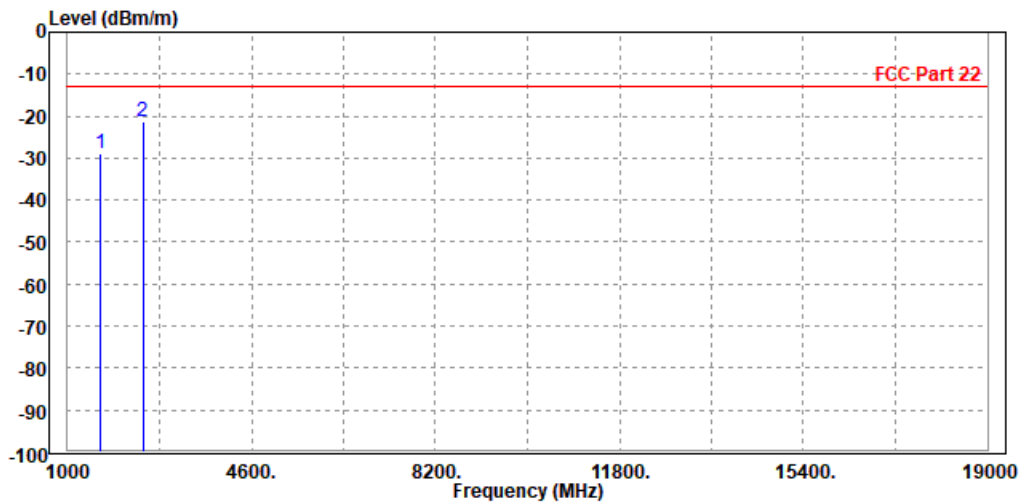




**BUREAU
VERITAS**

Test Report No.: RFA210218W001-4

MODE	TX channel 128	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1648.000	-28.47	-31.85	-13.00	-15.47	3.38	Peak	Vertical
2 PP	2472.600	-23.81	-30.85	-13.00	-10.81	7.04	Peak	Vertical

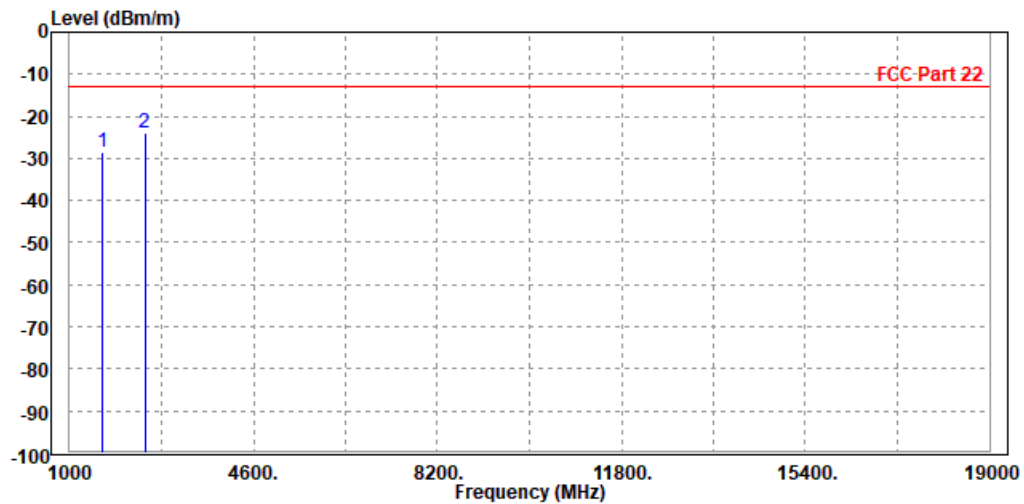




**BUREAU
VERITAS**

Test Report No.: RFA210218W001-4

CH 189:

MODE	TX channel 189	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1666.000	-30.89	-34.36	-13.00	-17.89	3.47	Peak	Horizontal
2	PP 2509.200	-26.20	-34.26	-13.00	-13.20	8.06	Peak	Horizontal

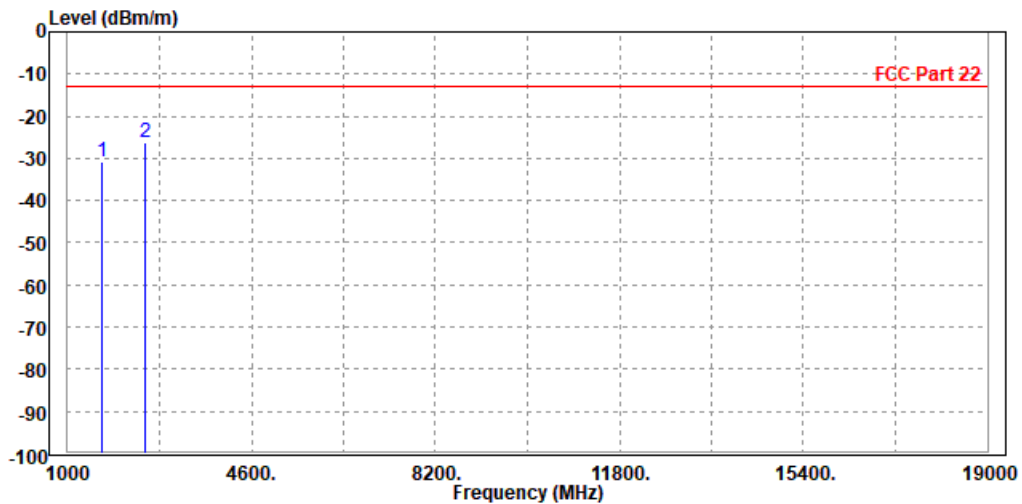




**BUREAU
VERITAS**

Test Report No.: RFA210218W001-4

MODE	TX channel 189	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1666.000	-37.76	-41.30	-13.00	-24.76	3.54	Peak	Vertical
2	PP 2509.200	-28.56	-35.66	-13.00	-15.56	7.10	Peak	Vertical

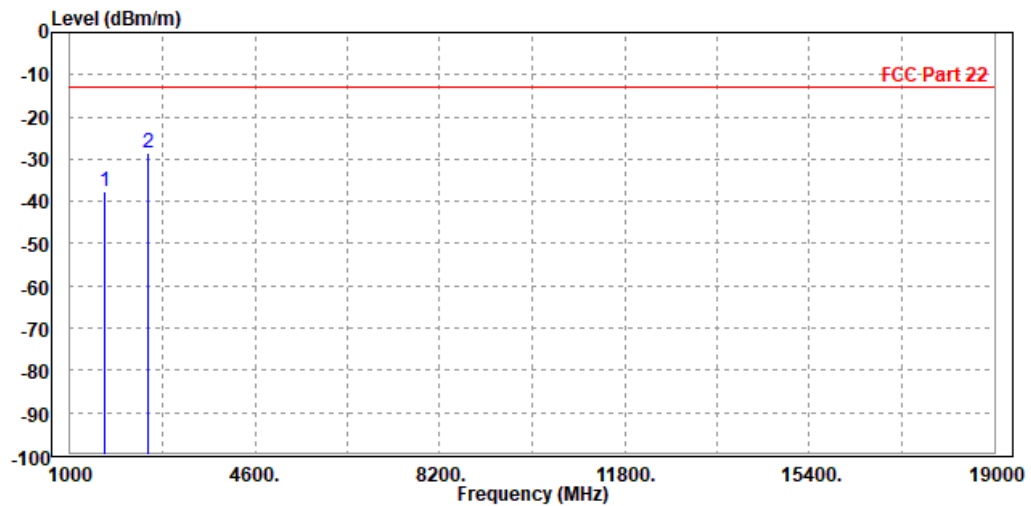




**BUREAU
VERITAS**

Test Report No.: RFA210218W001-4

CH 251:

MODE	TX channel 251	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1702.000	-33.01	-36.92	-13.00	-20.01	3.91	Peak	Horizontal
2 PP	2546.400	-21.45	-29.56	-13.00	-8.45	8.11	Peak	Horizontal

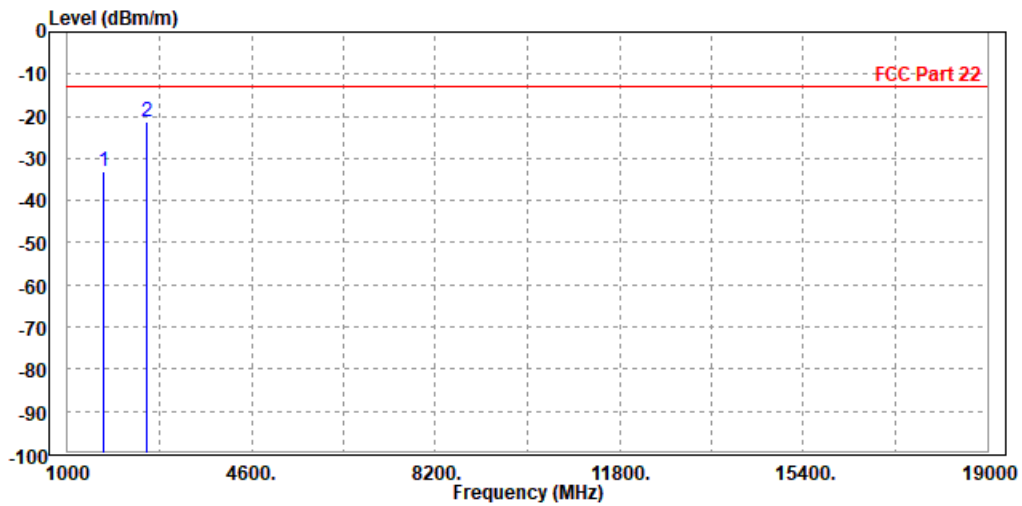



BUREAU
VERITAS


Test Report No.: RFA210218W001-4

MODE	TX channel 251	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			



**BUREAU
VERITAS**

Test Report No.: RFA210218W001-4

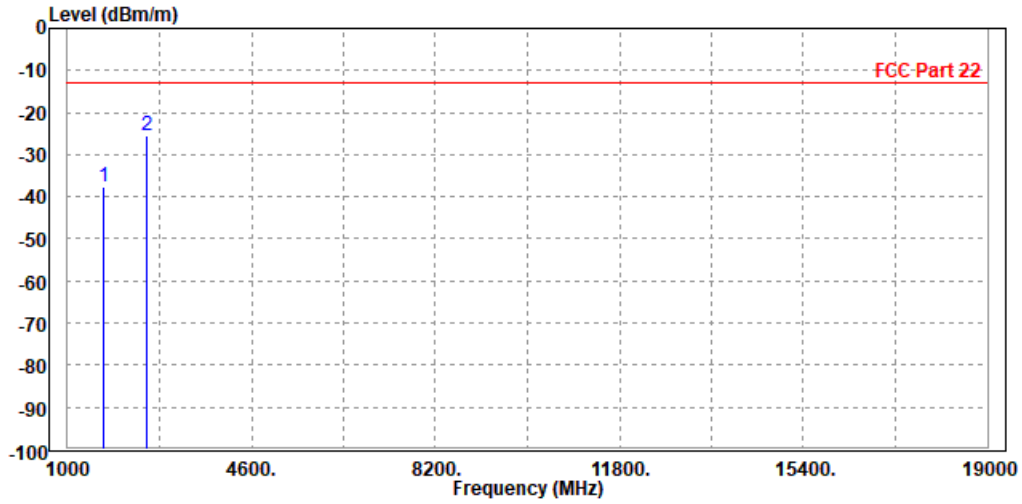

Condition : FCC Part 22 3m Vertical
 EUT : Lenovo TB-X6C6X
 Mode : GSM 850 High Ch 251
 Plan : Y
 Remark : IMEI:866565050034672
 Temperature(°C): 23 Humidity(%):70
 Test By : Jace.hu
 Reviewer By : Simon.wang

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1702.000	-37.51	-41.38	-13.00	-24.51	3.87	Peak	Vertical
2 PP	2546.400	-25.45	-32.67	-13.00	-12.45	7.22	Peak	Vertical



**BUREAU
VERITAS**


Test Report No.: RFA210218W001-4

EDGE 850:

CH 128:

MODE	TX channel 128	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1648.000	-36.37	-39.62	-13.00	-23.37	3.25	Peak	Horizontal
2 PP	2472.600	-32.76	-40.78	-13.00	-19.76	8.02	Peak	Horizontal

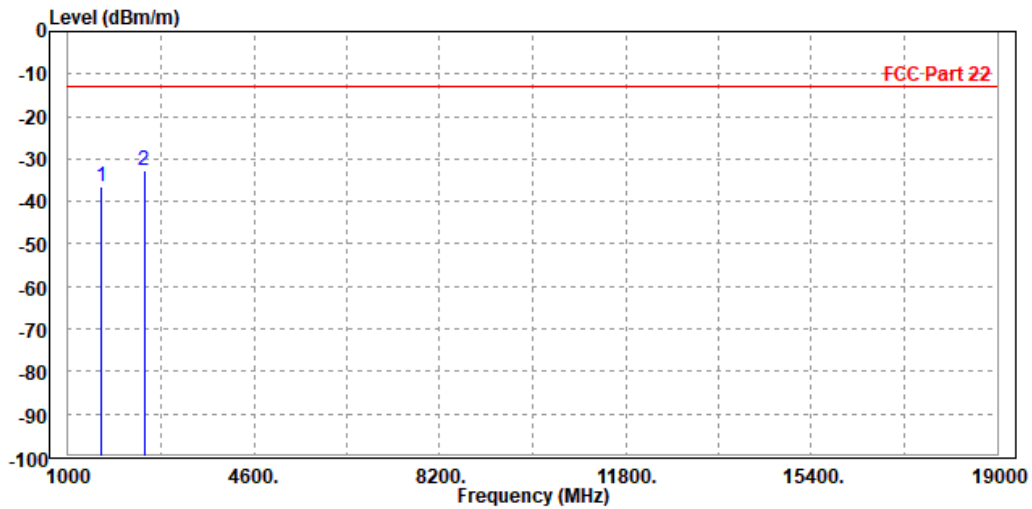




**BUREAU
VERITAS**

Test Report No.: RFA210218W001-4

MODE	TX channel 128	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1648.000	-35.49	-38.87	-13.00	-22.49	3.38	Peak	Vertical
2	2472.600	-36.05	-43.09	-13.00	-23.05	7.04	Peak	Vertical

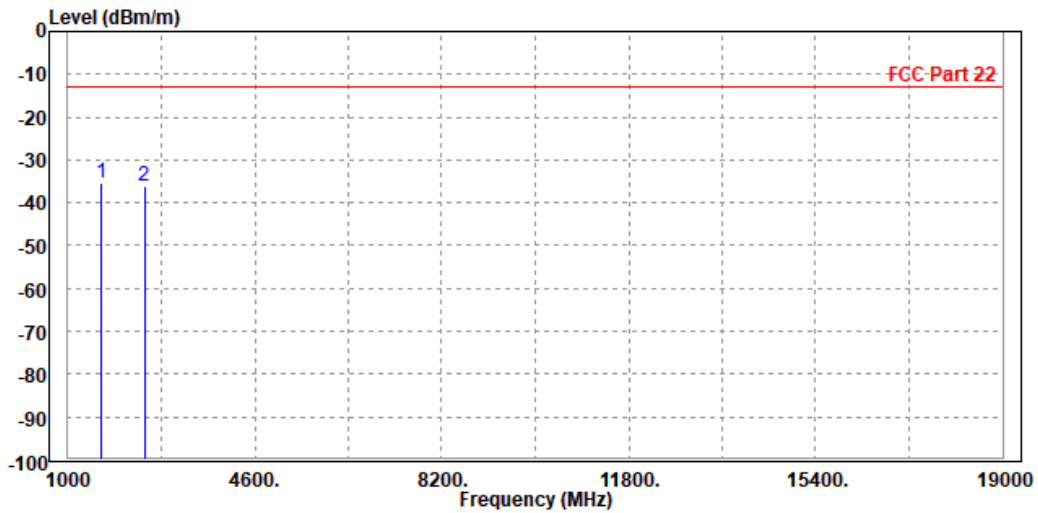




**BUREAU
VERITAS**

Test Report No.: RFA210218W001-4

CH 189:

MODE	TX channel 189	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1666.000	-36.67	-40.14	-13.00	-23.67	3.47	Peak	Horizontal
2	PP 2509.200	-31.54	-39.60	-13.00	-18.54	8.06	Peak	Horizontal

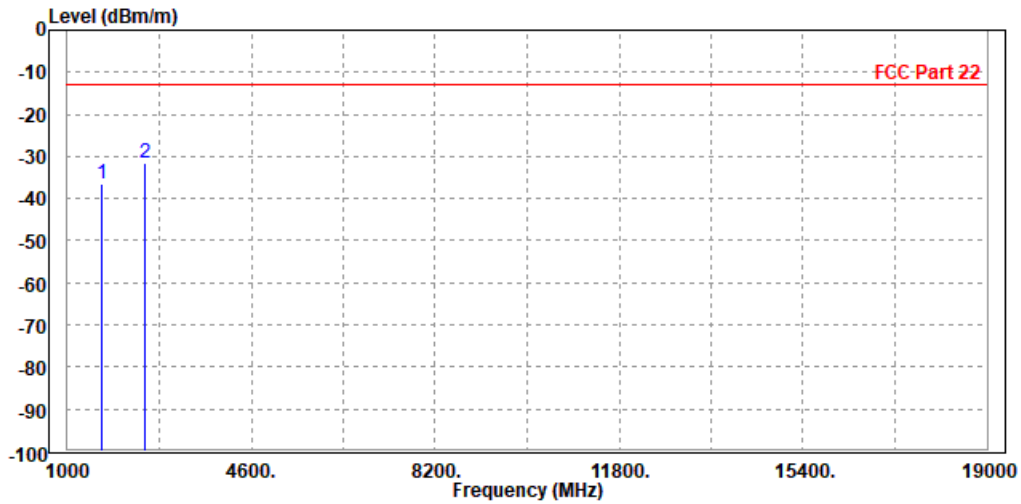




**BUREAU
VERITAS**

Test Report No.: RFA210218W001-4

MODE	TX channel 189	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1666.000	-40.16	-43.70	-13.00	-27.16	3.54	Peak	Vertical
2 PP	2509.200	-28.29	-35.39	-13.00	-15.29	7.10	Peak	Vertical

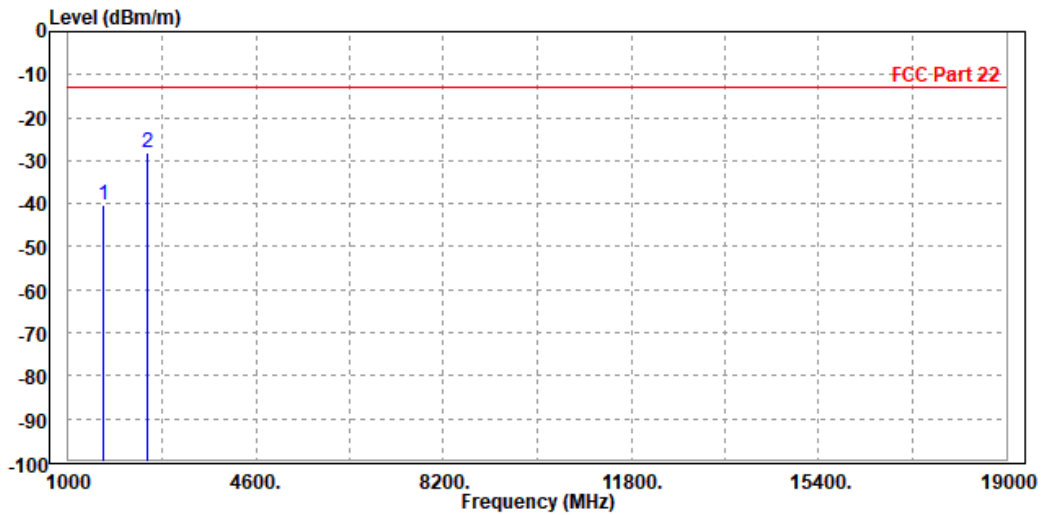




**BUREAU
VERITAS**

Test Report No.: RFA210218W001-4

CH 251:

MODE	TX channel 251	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1702.000	-37.87	-41.78	-13.00	-24.87	3.91	Peak	Horizontal
2	PP 2546.400	-33.96	-42.07	-13.00	-20.96	8.11	Peak	Horizontal

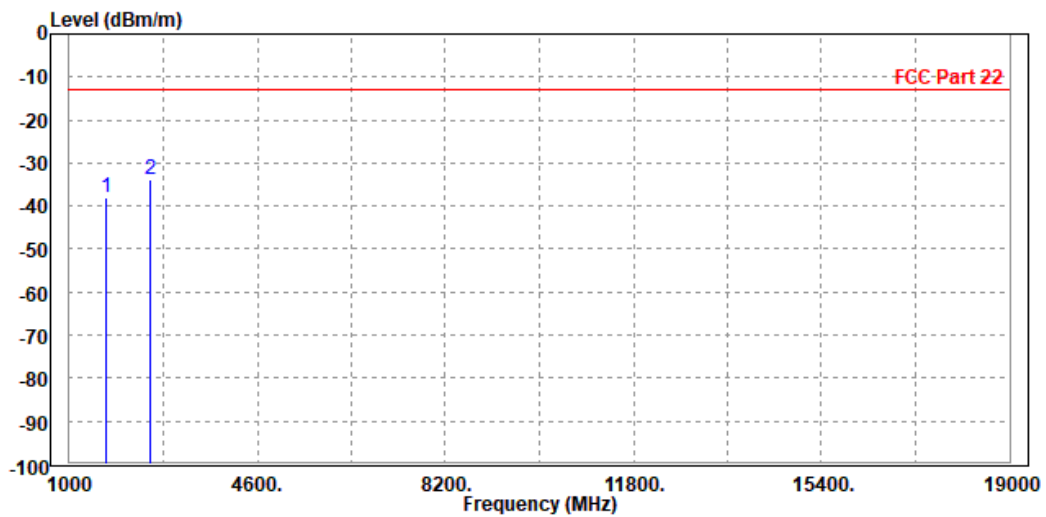




**BUREAU
VERITAS**

Test Report No.: RFA210218W001-4

MODE	TX channel 251	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1702.000	-36.16	-40.03	-13.00	-23.16	3.87	Peak	Vertical
2 PP	2546.400	-35.05	-42.27	-13.00	-22.05	7.22	Peak	Vertical

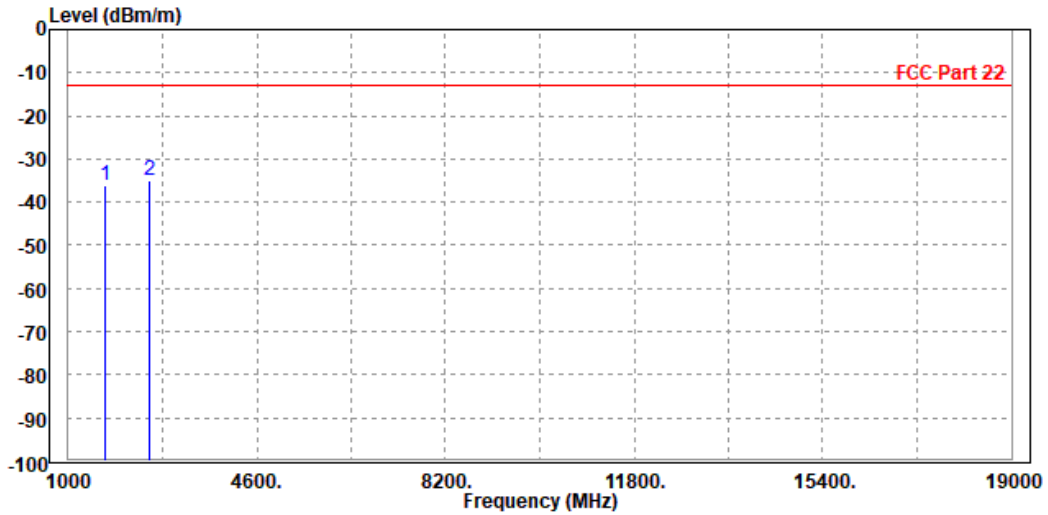



**BUREAU
VERITAS**


Test Report No.: RFA210218W001-4

WCDMA Band V:

CH 4132:

MODE	TX channel 4132	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Rose Ma		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1648.000	-43.75	-47.00	-13.00	-30.75	3.25	Peak	Horizontal
2	PP 2479.200	-30.21	-38.24	-13.00	-17.21	8.03	Peak	Horizontal

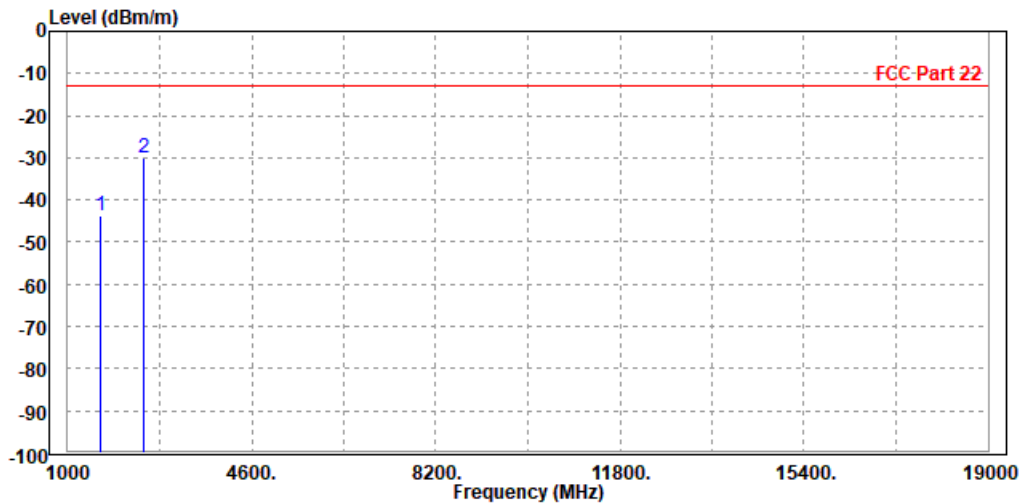




BUREAU VERITAS

Test Report No.: RFA210218W001-4

MODE	TX channel 4132	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Rose Ma		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1648.000	-46.85	-50.23	-13.00	-33.85	3.38	Peak	Vertical
2 PP	2479.200	-33.99	-41.04	-13.00	-20.99	7.05	Peak	Vertical

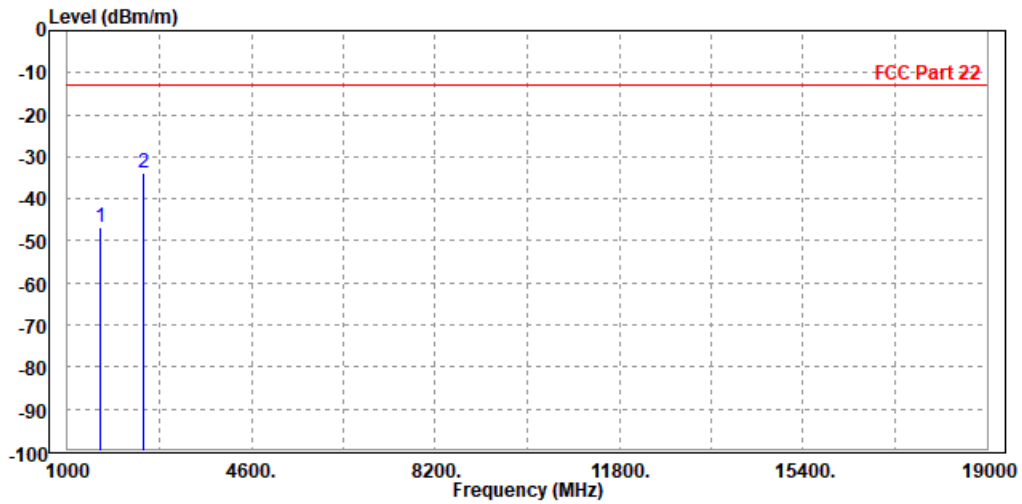




**BUREAU
VERITAS**

Test Report No.: RFA210218W001-4

CH 4182:

MODE	TX channel 4182	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Rose Ma		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1666.000	-51.34	-54.81	-13.00	-38.34	3.47	Peak	Horizontal
2	PP 2509.200	-33.15	-41.21	-13.00	-20.15	8.06	Peak	Horizontal

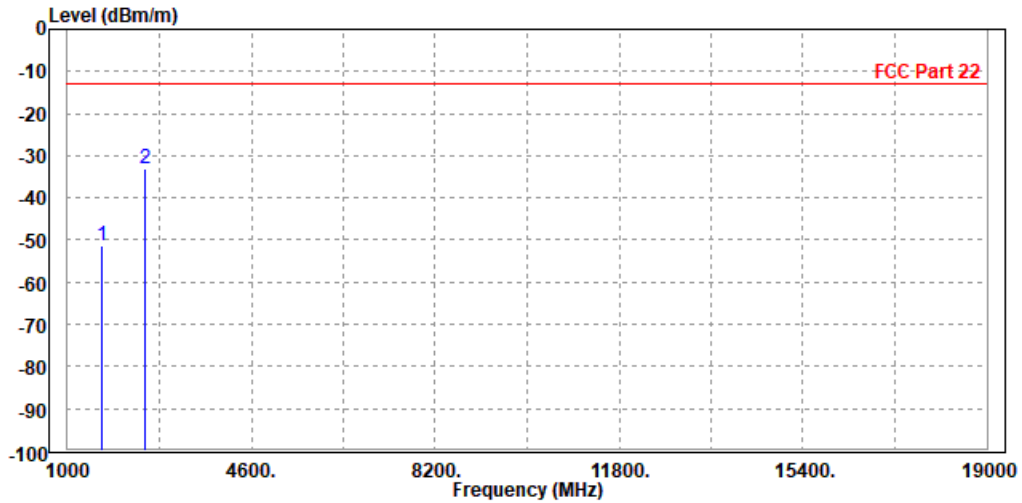




**BUREAU
VERITAS**

Test Report No.: RFA210218W001-4

MODE	TX channel 4182	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Rose Ma		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1666.000	-51.58	-55.12	-13.00	-38.58	3.54	Peak	Vertical
2 PP	2509.200	-32.25	-39.35	-13.00	-19.25	7.10	Peak	Vertical

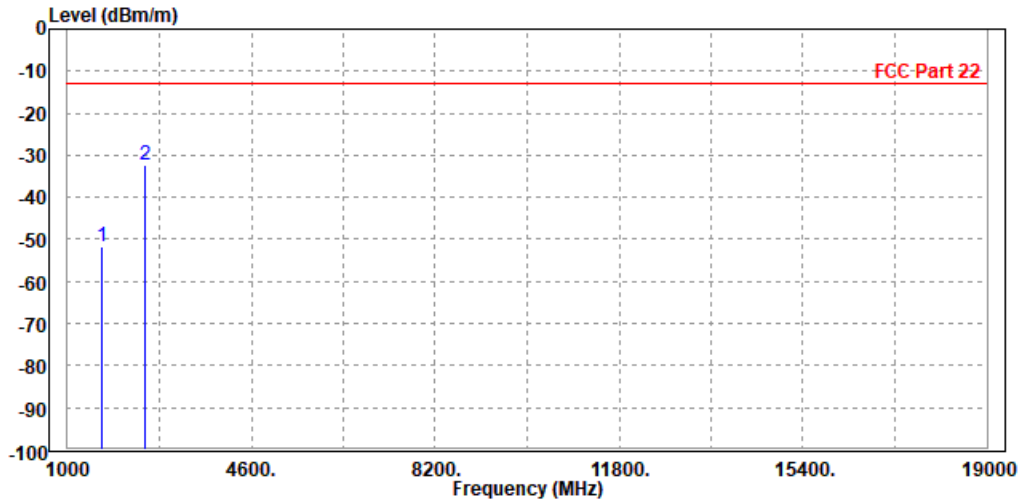




**BUREAU
VERITAS**

Test Report No.: RFA210218W001-4

CH 4233:

MODE	TX channel 4233	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Rose Ma		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1702.000	-46.61	-50.52	-13.00	-33.61	3.91	Peak	Horizontal
2	PP 2539.800	-28.01	-36.11	-13.00	-15.01	8.10	Peak	Horizontal

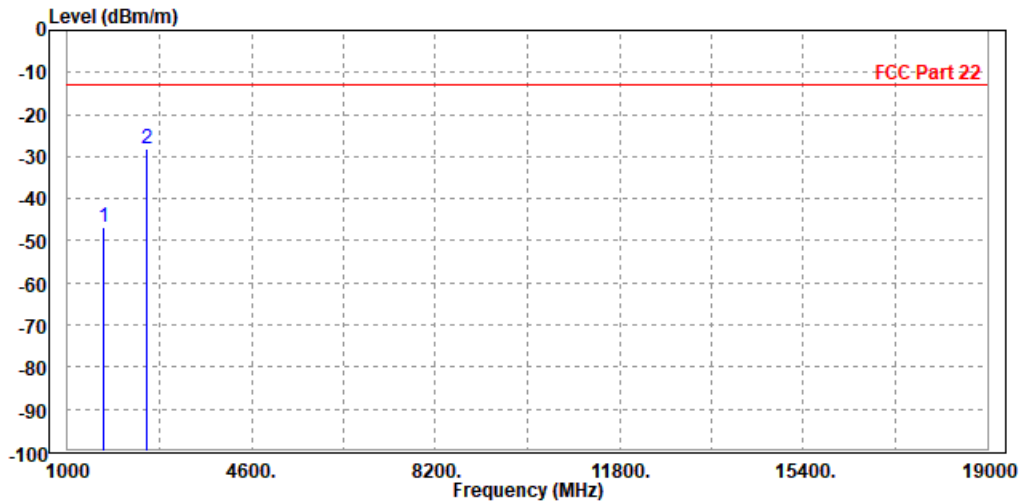




**BUREAU
VERITAS**

Test Report No.: RFA210218W001-4

MODE	TX channel 4233	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Rose Ma		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1702.000	-51.17	-55.04	-13.00	-38.17	3.87	Peak	Vertical
2 PP	2548.000	-31.87	-39.09	-13.00	-18.87	7.22	Peak	Vertical

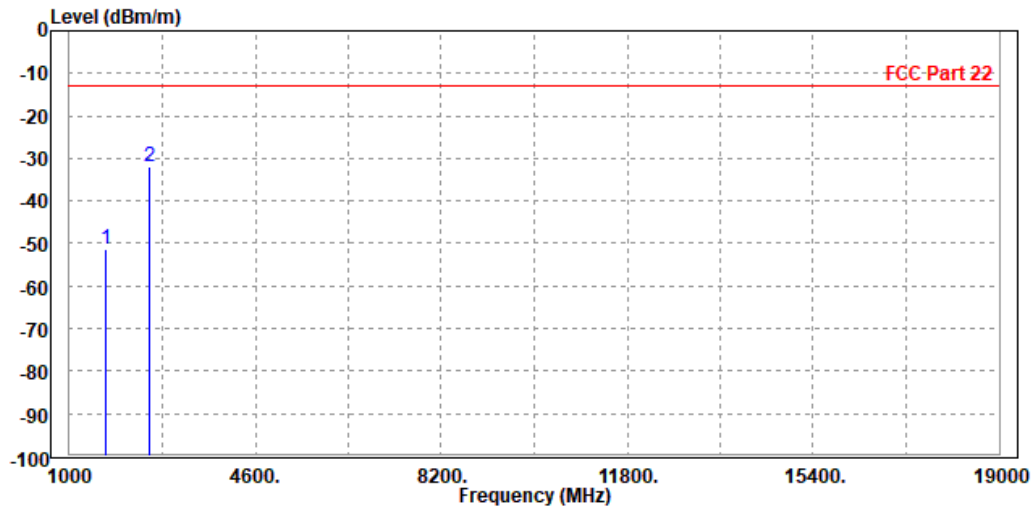



**BUREAU
VERITAS**


Test Report No.: RFA210218W001-4

LTE Band 5

CHANNEL BANDWIDTH: 1.4MHz / QPSK

MODE	TX channel 20525	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1666.000	-44.10	-47.57	-13.00	-31.10	3.47	Peak	Horizontal
2 PP	2509.500	-20.59	-28.65	-13.00	-7.59	8.06	Peak	Horizontal

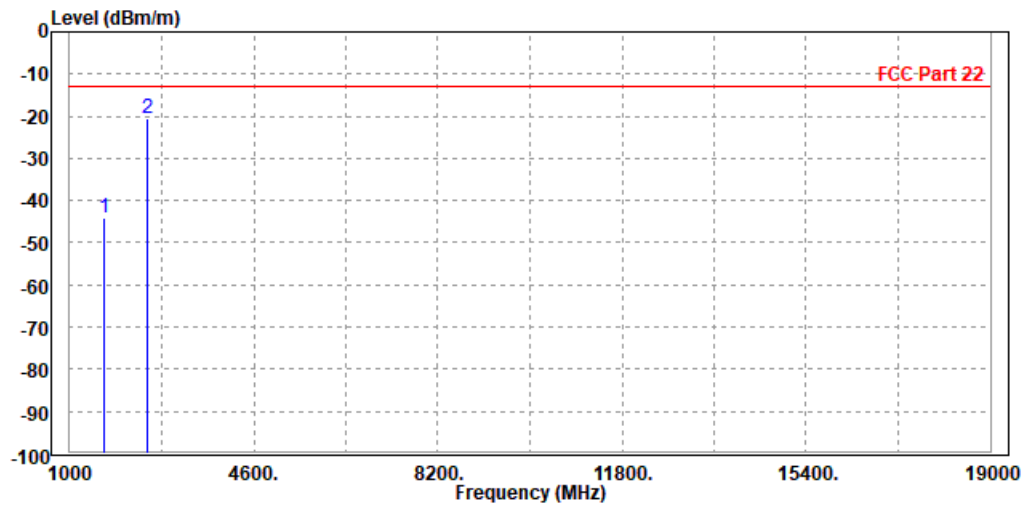




**BUREAU
VERITAS**

Test Report No.: RFA210218W001-4

MODE	TX channel 20525	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1666.000	-45.79	-49.33	-13.00	-32.79	3.54	Peak	Vertical
2 PP	2509.500	-23.32	-30.42	-13.00	-10.32	7.10	Peak	Vertical

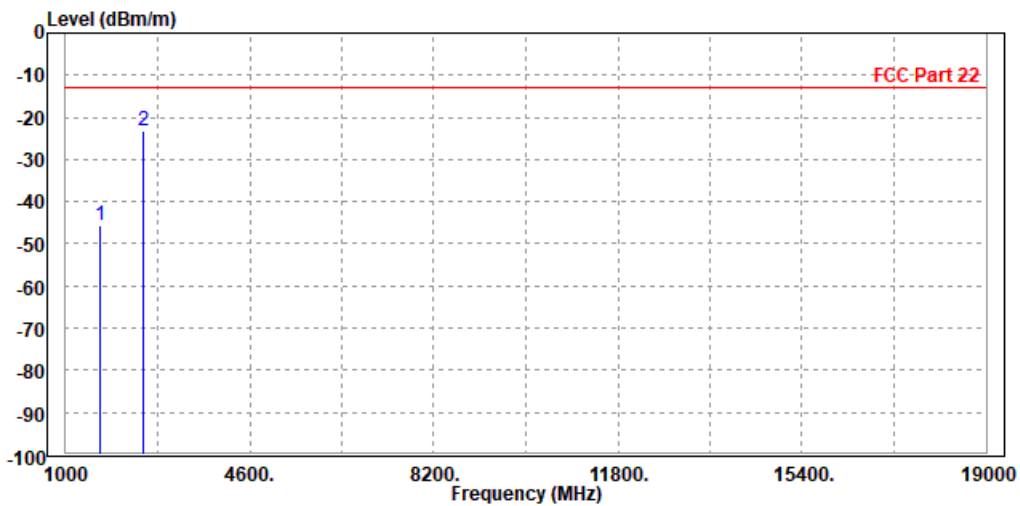




Test Report No.: RFA210218W001-4

CHANNEL BANDWIDTH: 3MHz / QPSK

CH 20415

MODE	TX channel 20415	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Read Level	Limit Level	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m	
1	1648.000	-42.36	-45.61	-13.00	-29.36	3.25 Peak	Horizontal
2 PP	2476.500	-24.10	-32.13	-13.00	-11.10	8.03 Peak	Horizontal

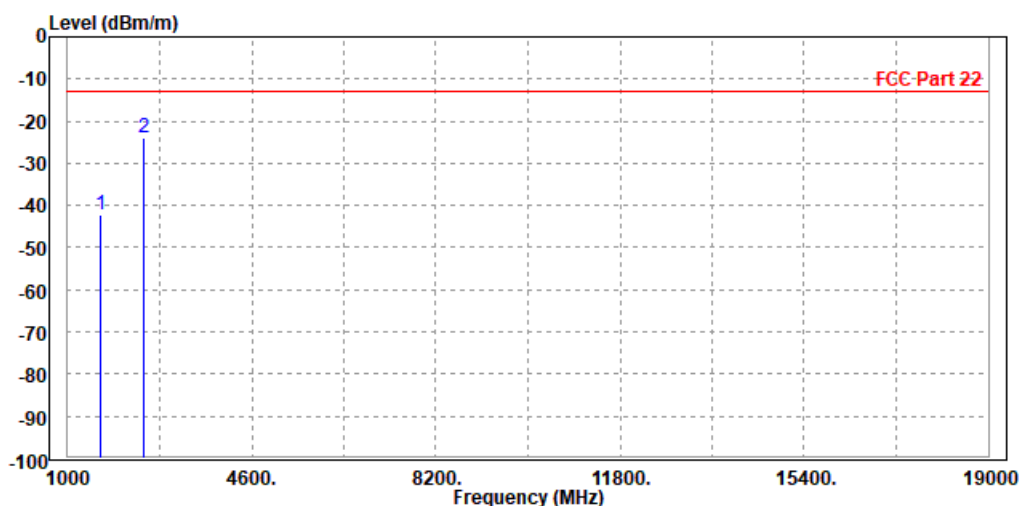




**BUREAU
VERITAS**

Test Report No.: RFA210218W001-4

MODE	TX channel 20415	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1648.000	-47.95	-51.33	-13.00	-34.95	3.38	Peak	Vertical
2	PP 2476.500	-25.02	-32.06	-13.00	-12.02	7.04	Peak	Vertical

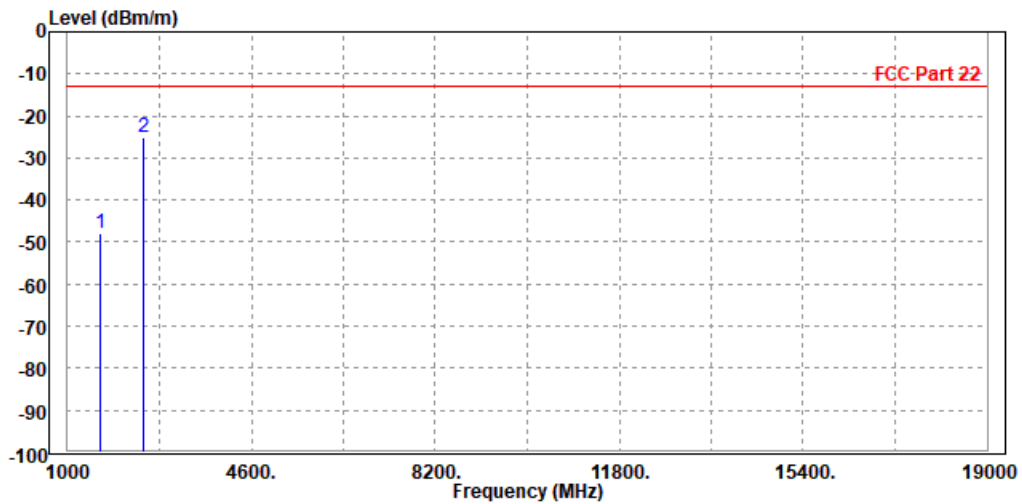




**BUREAU
VERITAS**

Test Report No.: RFA210218W001-4

CH 20635

MODE	TX channel 20635	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1702.000	-46.82	-50.73	-13.00	-33.82	3.91	Peak	Horizontal
2 PP	2542.500	-29.40	-37.50	-13.00	-16.40	8.10	Peak	Horizontal

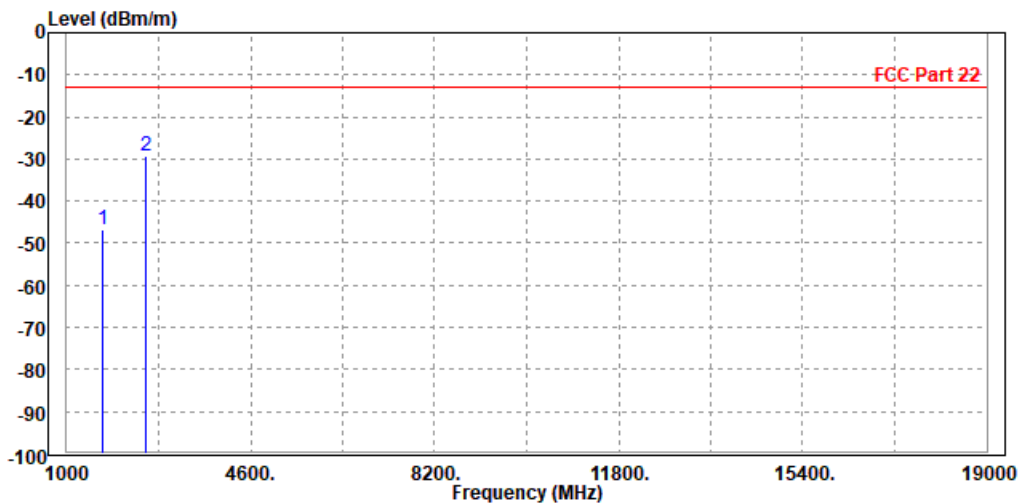




**BUREAU
VERITAS**

Test Report No.: RFA210218W001-4

MODE	TX channel 20635	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1702.000	-38.59	-42.46	-13.00	-25.59	3.87	Peak	Vertical
2 PP	2542.500	-35.97	-43.18	-13.00	-22.97	7.21	Peak	Vertical

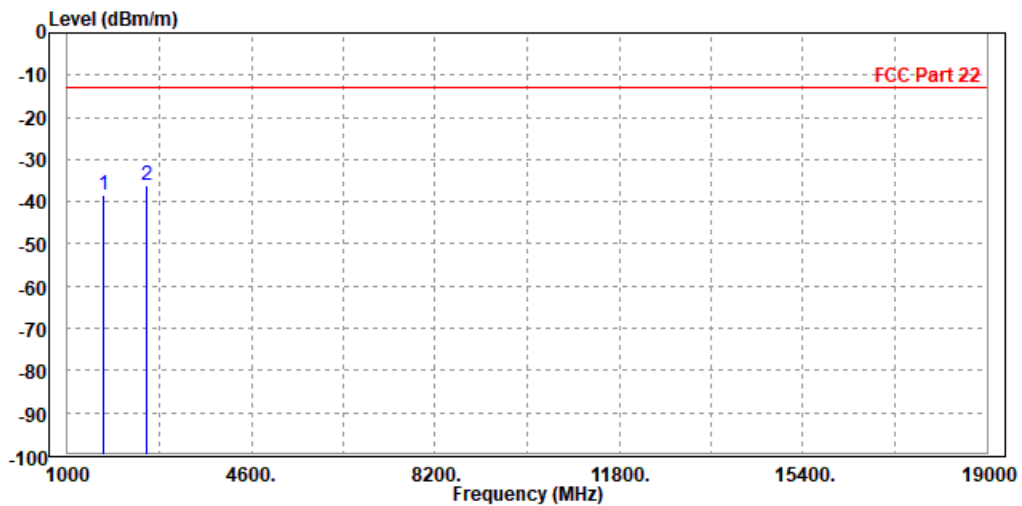




**BUREAU
VERITAS**

Test Report No.: RFA210218W001-4

CHANNEL BANDWIDTH: 5MHz / QPSK

MODE	TX channel 20525	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1666.000	-41.06	-44.53	-13.00	-28.06	3.47	Peak	Horizontal
2	2509.500	-48.74	-56.80	-13.00	-35.74	8.06	Peak	Horizontal

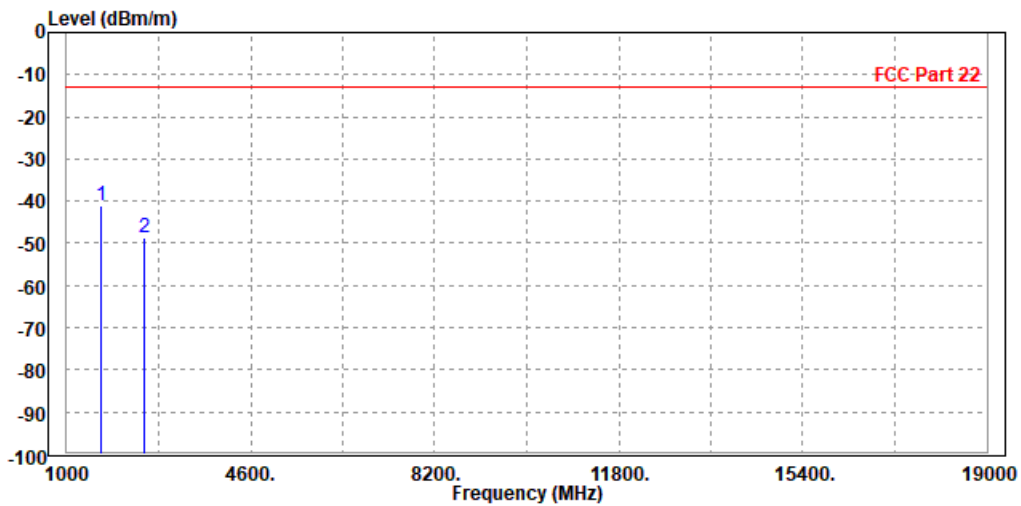




**BUREAU
VERITAS**

Test Report No.: RFA210218W001-4

MODE	TX channel 20525	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1666.000	-43.21	-46.75	-13.00	-30.21	3.54	Peak	Vertical
2	2509.500	-49.13	-56.23	-13.00	-36.13	7.10	Peak	Vertical

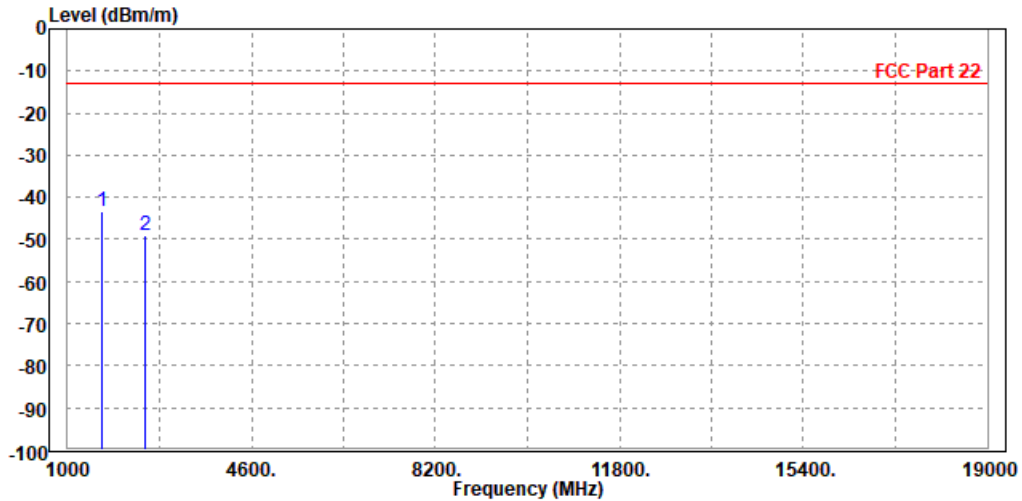




**BUREAU
VERITAS**

Test Report No.: RFA210218W001-4

CHANNEL BANDWIDTH: 10MHz / QPSK

MODE	TX channel 20525	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1666.000	-41.91	-45.38	-13.00	-28.91	3.47	Peak	Horizontal
2	2509.500	-48.18	-56.24	-13.00	-35.18	8.06	Peak	Horizontal

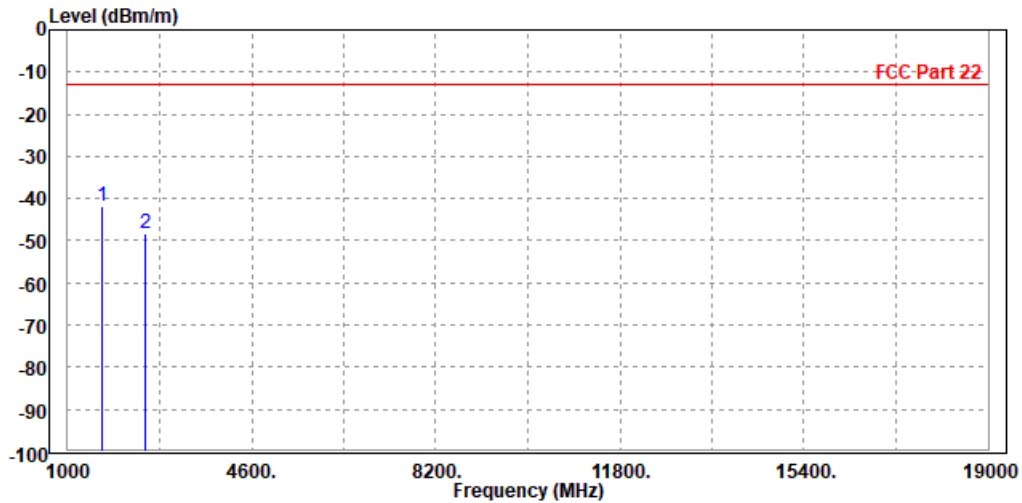




**BUREAU
VERITAS**

Test Report No.: RFA210218W001-4

MODE	TX channel 20525	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1666.000	-47.91	-51.45	-13.00	-34.91	3.54	Peak	Vertical
2	2509.500	-49.54	-56.64	-13.00	-36.54	7.10	Peak	Vertical

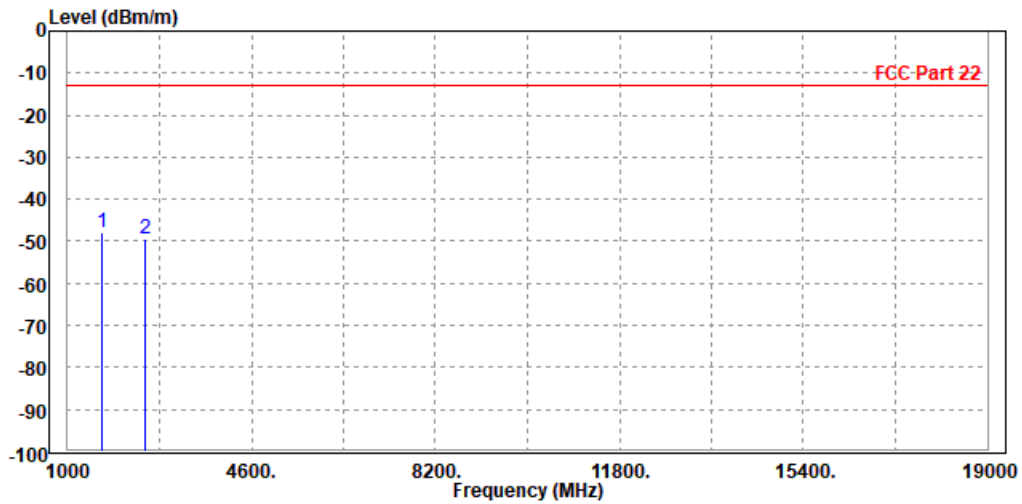



BUREAU VERITAS

Test Report No.: RFA210218W001-4


LTE Band 26

CHANNEL BANDWIDTH: 1.4MHz / QPSK

CH 26797

MODE	TX channel 26797	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Rose Ma		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1648.000	-44.35	-47.60	-13.00	-31.35	3.25	Peak	Horizontal
2	PP 2474.100	-36.32	-44.34	-13.00	-23.32	8.02	Peak	Horizontal

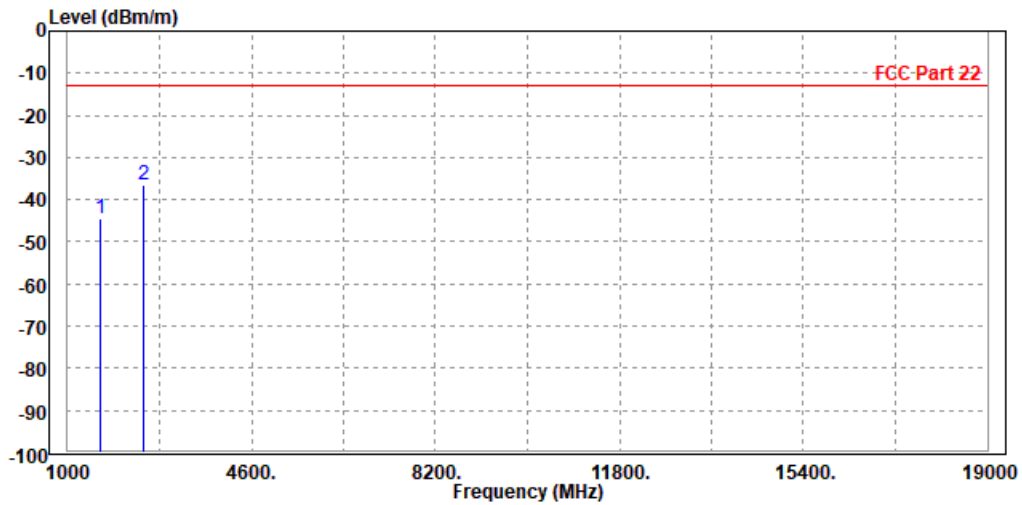




BUREAU
VERITAS

Test Report No.: RFA210218W001-4

MODE	TX channel 26797	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Rose Ma		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1648.000	-47.38	-50.76	-13.00	-34.38	3.38	Peak	Vertical
2 PP	2474.100	-37.18	-44.22	-13.00	-24.18	7.04	Peak	Vertical

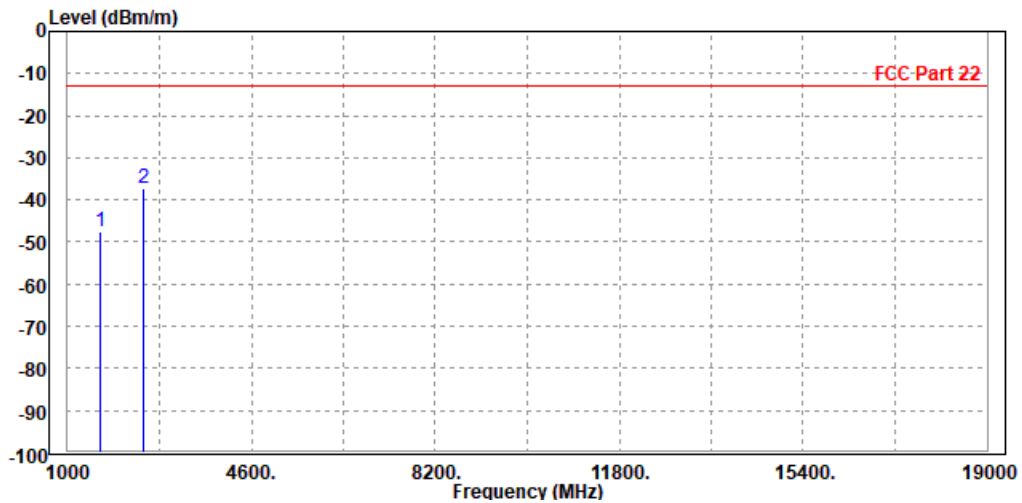




**BUREAU
VERITAS**

Test Report No.: RFA210218W001-4

CH 26915

MODE	TX channel 26915	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Rose Ma		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1666.000	-41.66	-45.13	-13.00	-28.66	3.47	Peak	Horizontal
2 PP	2509.200	-31.07	-39.13	-13.00	-18.07	8.06	Peak	Horizontal

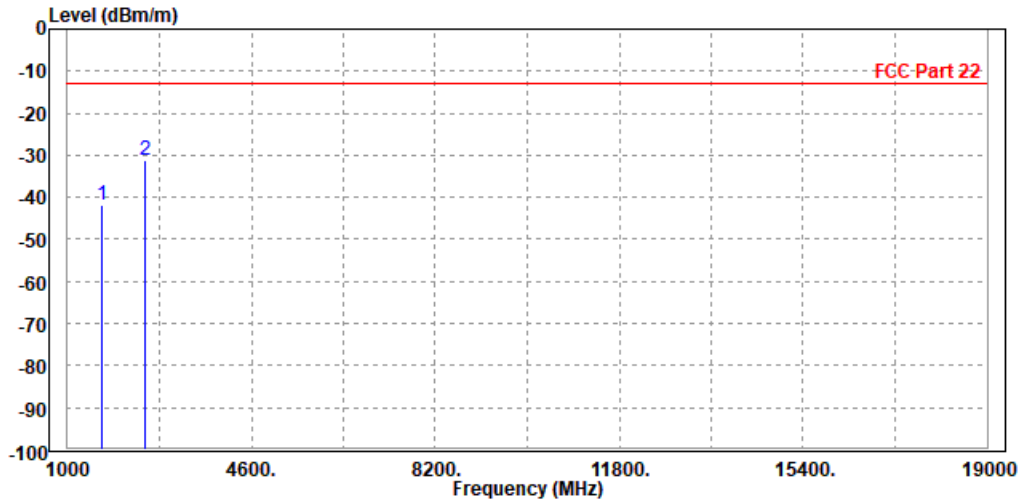




**BUREAU
VERITAS**

Test Report No.: RFA210218W001-4

MODE	TX channel 26915	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Rose Ma		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1666.000	-41.39	-44.93	-13.00	-28.39	3.54	Peak	Vertical
2	PP 2509.200	-37.19	-44.29	-13.00	-24.19	7.10	Peak	Vertical

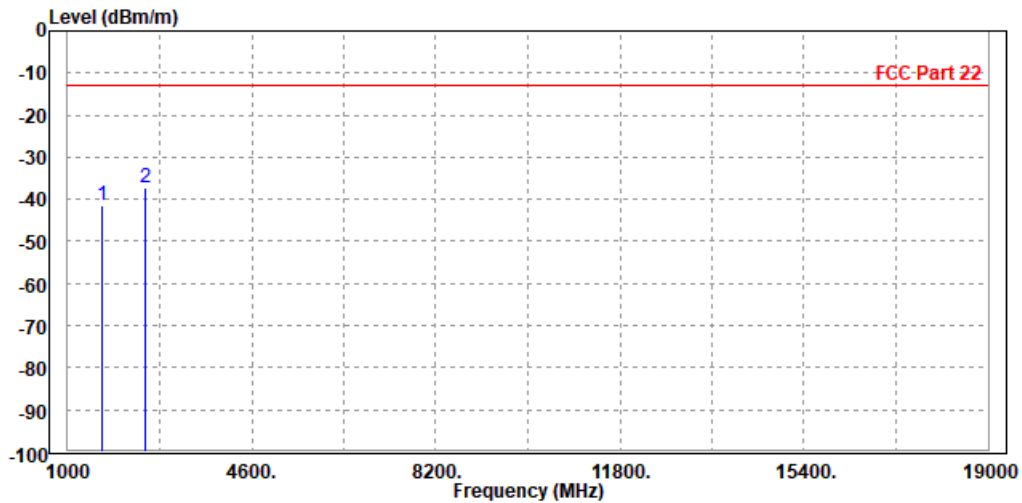




BUREAU
VERITAS

Test Report No.: RFA210218W001-4

CH 27033

MODE	TX channel 27033	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Rose Ma		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1702.000	-45.74	-49.65	-13.00	-32.74	3.91	Peak	Horizontal
2 PP	2544.900	-31.45	-39.56	-13.00	-18.45	8.11	Peak	Horizontal

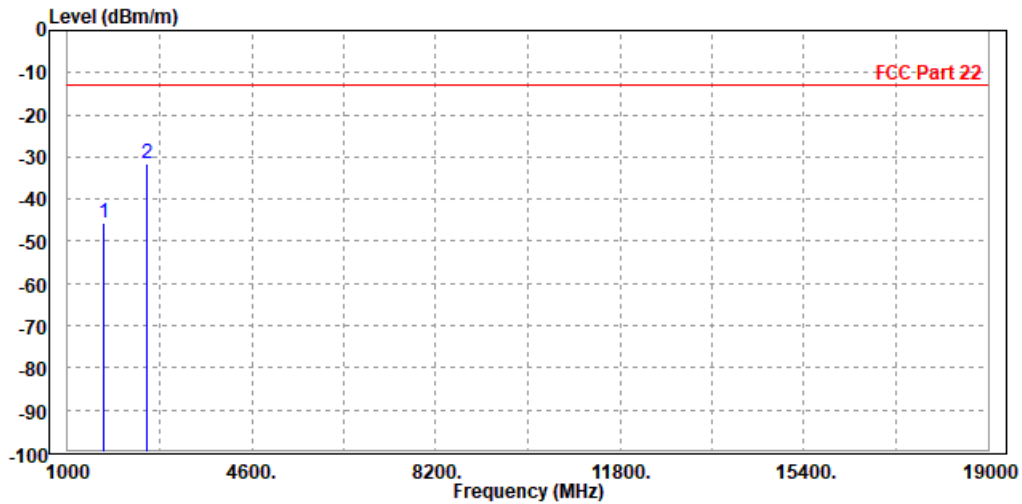




**BUREAU
VERITAS**

Test Report No.: RFA210218W001-4

MODE	TX channel 27033	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Rose Ma		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1702.000	-43.81	-47.68	-13.00	-30.81	3.87	Peak	Vertical
2 PP	2544.900	-33.21	-40.42	-13.00	-20.21	7.21	Peak	Vertical

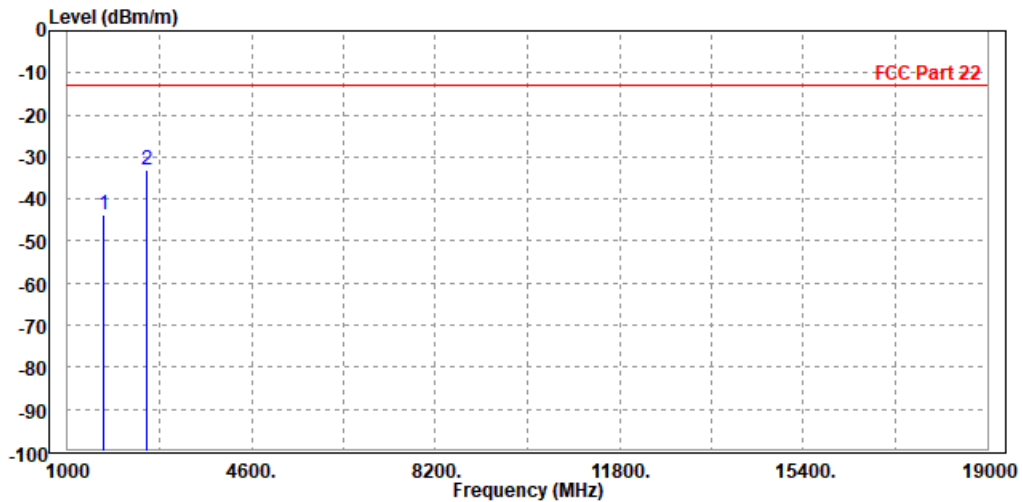




**BUREAU
VERITAS**

Test Report No.: RFA210218W001-4

CHANNEL BANDWIDTH: 3MHz / QPSK

MODE	TX channel 26915	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Rose Ma		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1666.000	-47.53	-51.00	-13.00	-34.53	3.47	Peak	Horizontal
2 PP	2509.200	-38.63	-46.69	-13.00	-25.63	8.06	Peak	Horizontal

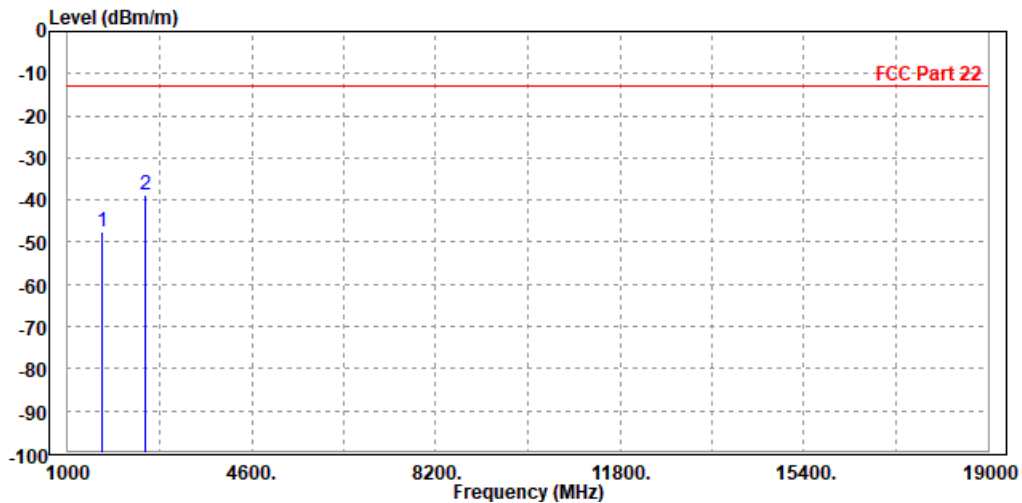




**BUREAU
VERITAS**

Test Report No.: RFA210218W001-4

MODE	TX channel 26915	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Rose Ma		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1666.000	-50.60	-54.14	-13.00	-37.60	3.54	Peak	Vertical
2 PP	2509.200	-42.87	-49.97	-13.00	-29.87	7.10	Peak	Vertical

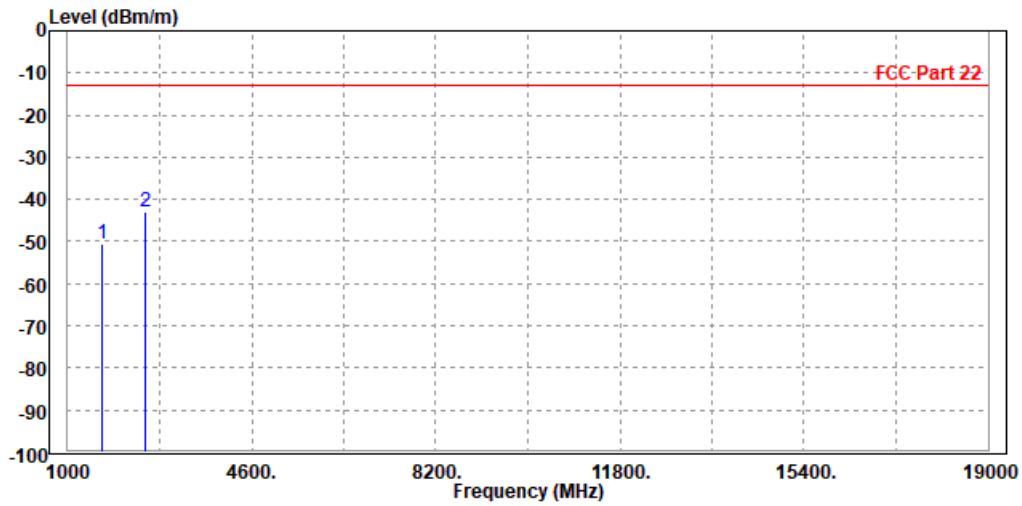




**BUREAU
VERITAS**

Test Report No.: RFA210218W001-4

CHANNEL BANDWIDTH: 5MHz / QPSK

MODE	TX channel 26915	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Rose Ma		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1666.000	-41.59	-45.06	-13.00	-28.59	3.47	Peak	Horizontal
2 PP	2509.200	-33.36	-41.42	-13.00	-20.36	8.06	Peak	Horizontal

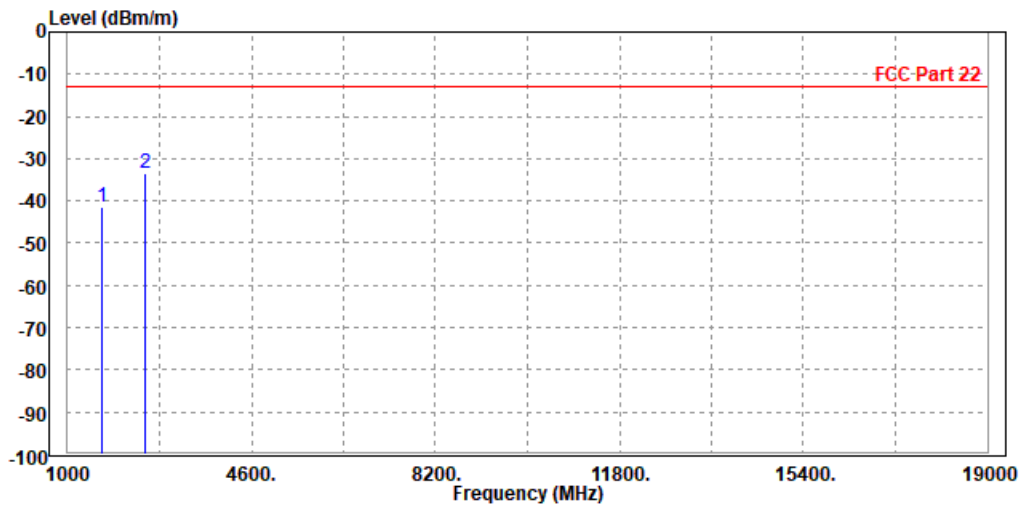




**BUREAU
VERITAS**

Test Report No.: RFA210218W001-4

MODE	TX channel 26915	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Rose Ma		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1666.000	-42.13	-45.67	-13.00	-29.13	3.54	Peak	Vertical
2 PP	2509.200	-39.47	-46.57	-13.00	-26.47	7.10	Peak	Vertical

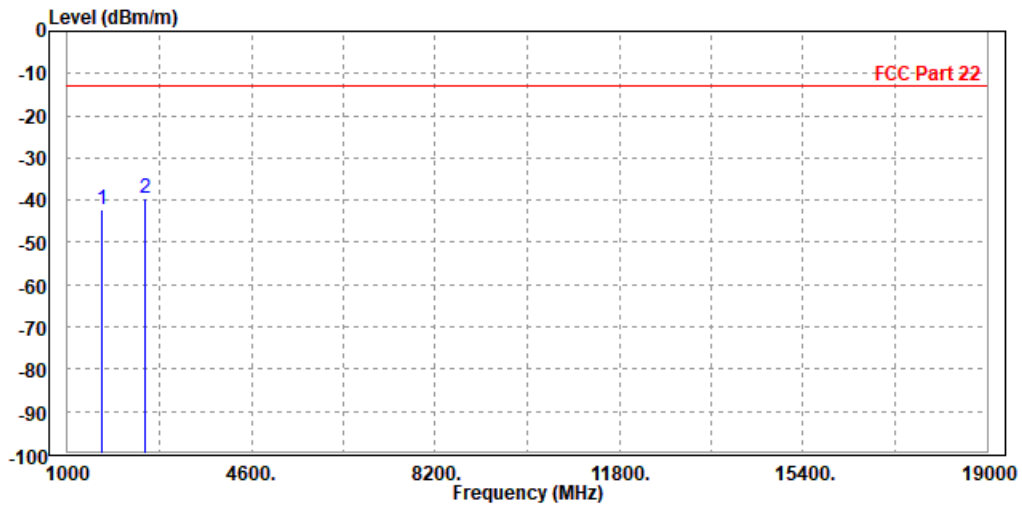




**BUREAU
VERITAS**

Test Report No.: RFA210218W001-4

CHANNEL BANDWIDTH: 10MHz / QPSK

MODE	TX channel 26915	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Rose Ma		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Read Level	Limit Level	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m	
1	1666.000	-48.62	-52.09	-13.00	-35.62	3.47 Peak	Horizontal
2 PP	2509.200	-47.70	-55.76	-13.00	-34.70	8.06 Peak	Horizontal

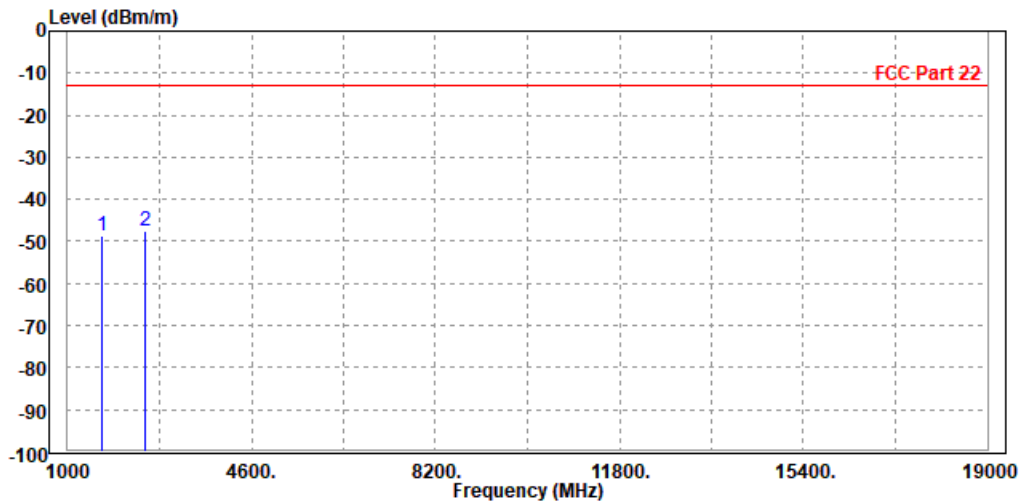




**BUREAU
VERITAS**

Test Report No.: RFA210218W001-4

MODE	TX channel 26915	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Rose Ma		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1666.000	-43.20	-46.74	-13.00	-30.20	3.54	Peak	Vertical
2	2509.200	-49.39	-56.49	-13.00	-36.39	7.10	Peak	Vertical

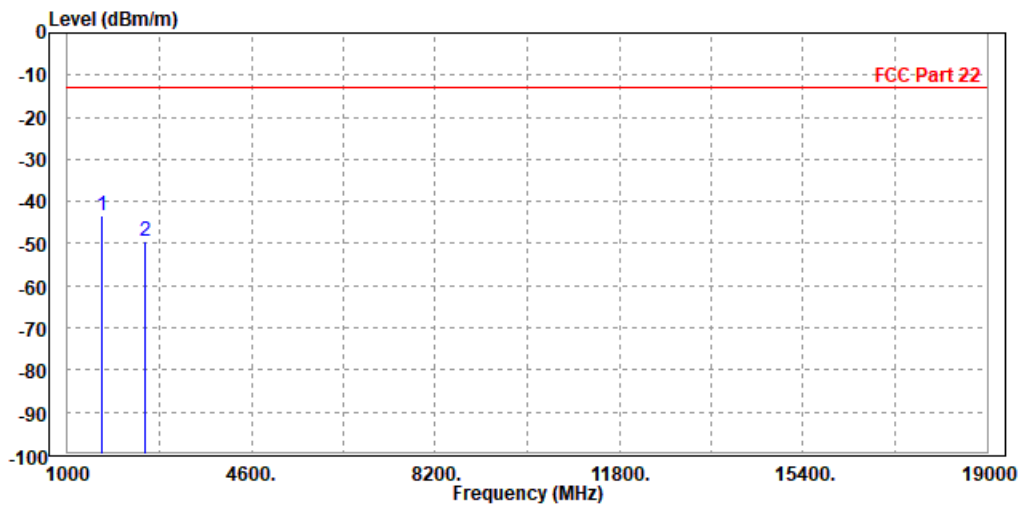




**BUREAU
VERITAS**

Test Report No.: RFA210218W001-4

CHANNEL BANDWIDTH: 15MHz / QPSK

MODE	TX channel 26915	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Rose Ma		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1666.000	-36.79	-40.26	-13.00	-23.79	3.47	Peak	Horizontal
2	2509.200	-47.92	-55.98	-13.00	-34.92	8.06	Peak	Horizontal

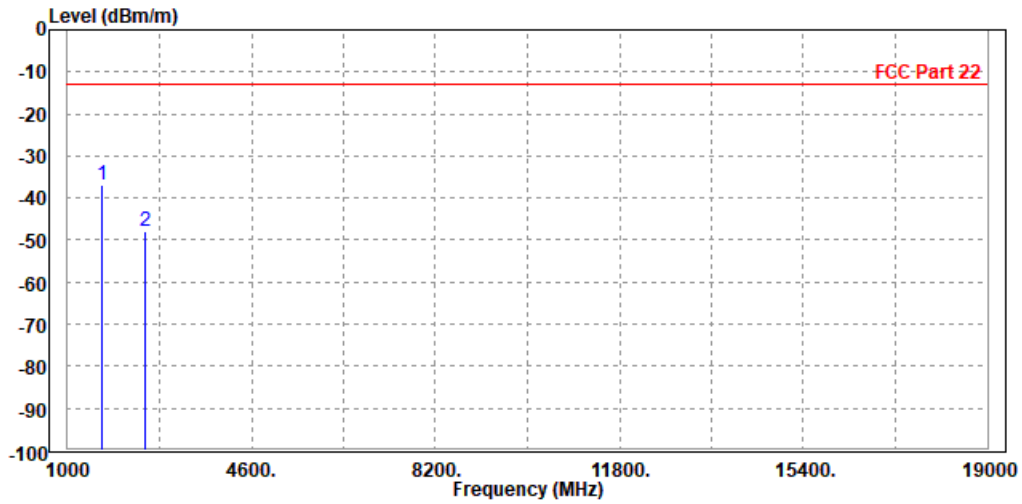




**BUREAU
VERITAS**

Test Report No.: RFA210218W001-4

MODE	TX channel 26915	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Rose Ma		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1666.000	-40.56	-44.10	-13.00	-27.56	3.54	Peak	Vertical
2	2509.200	-48.44	-55.54	-13.00	-35.44	7.10	Peak	Vertical

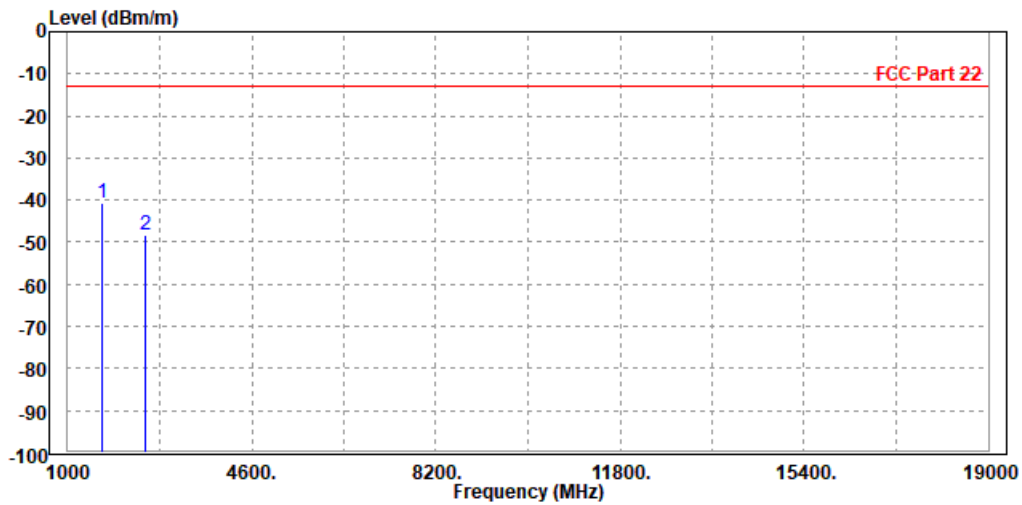


3.7 PEAK TO AVERAGE RATIO

3.7.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB

3.7.2 TEST SETUP

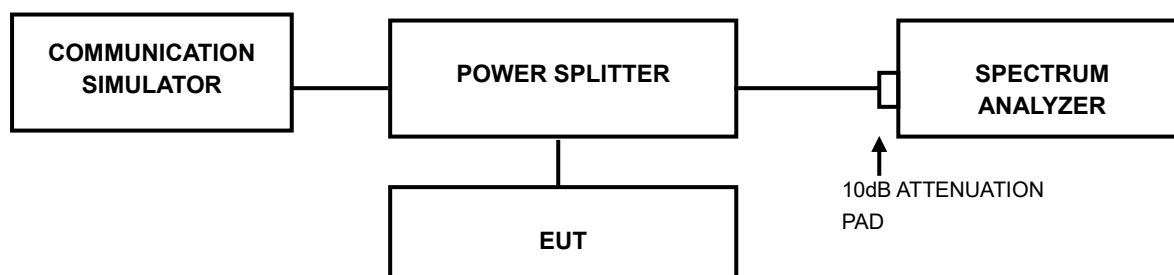

3.7.3 TEST PROCEDURES

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.




**BUREAU
VERITAS**

Test Report No.: RFA210218W001-4

3.7.4 TEST RESULTS

GSM


CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
128	824.2	2.66

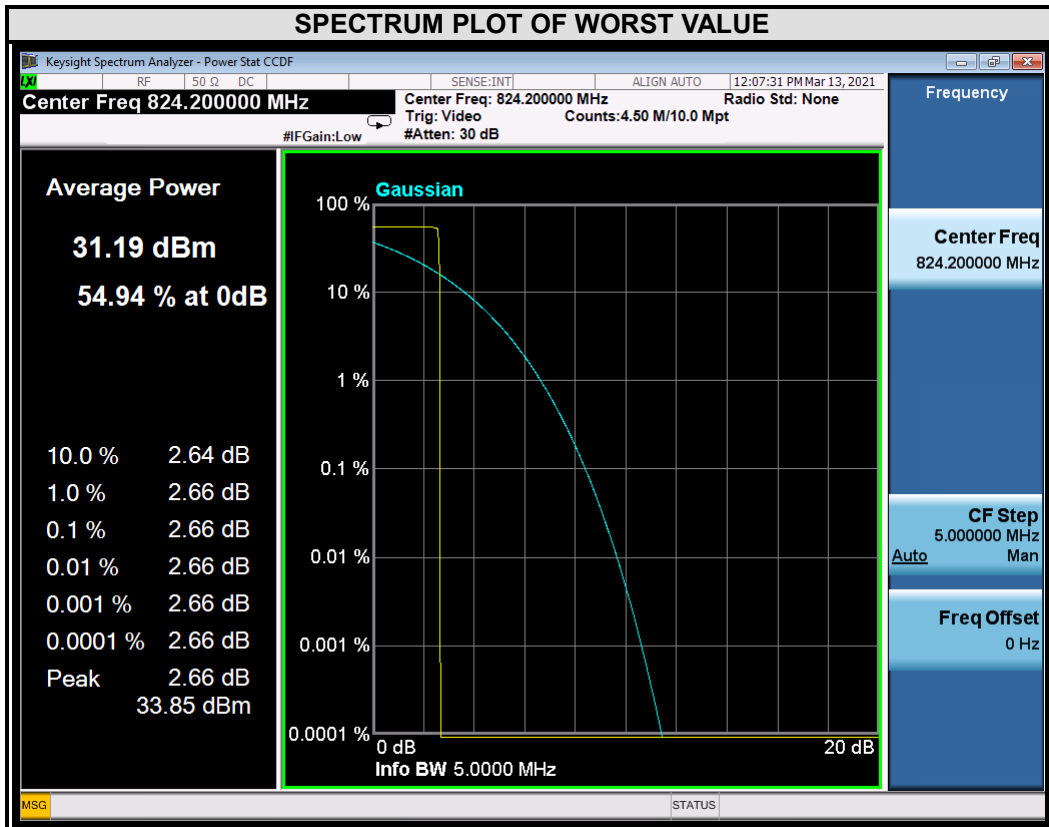



Test Report No.: RFA210218W001-4


CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
189	836.4	2.66

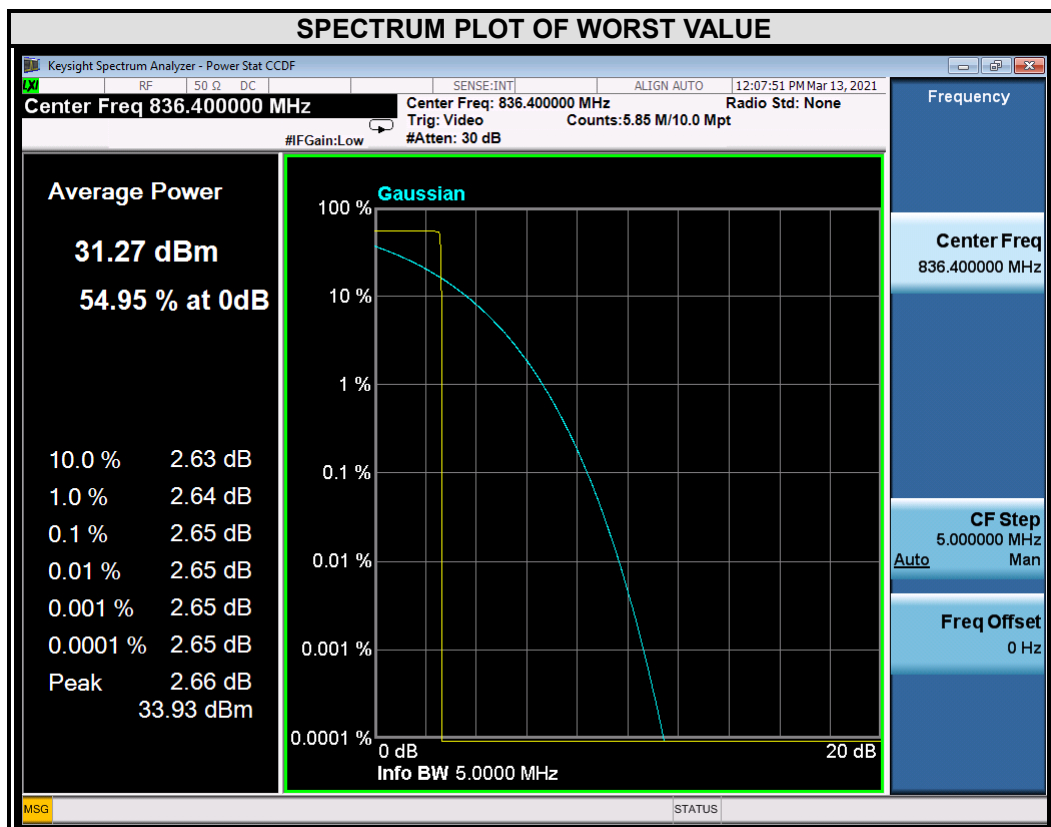



Test Report No.: RFA210218W001-4

CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
251	848.8	2.65

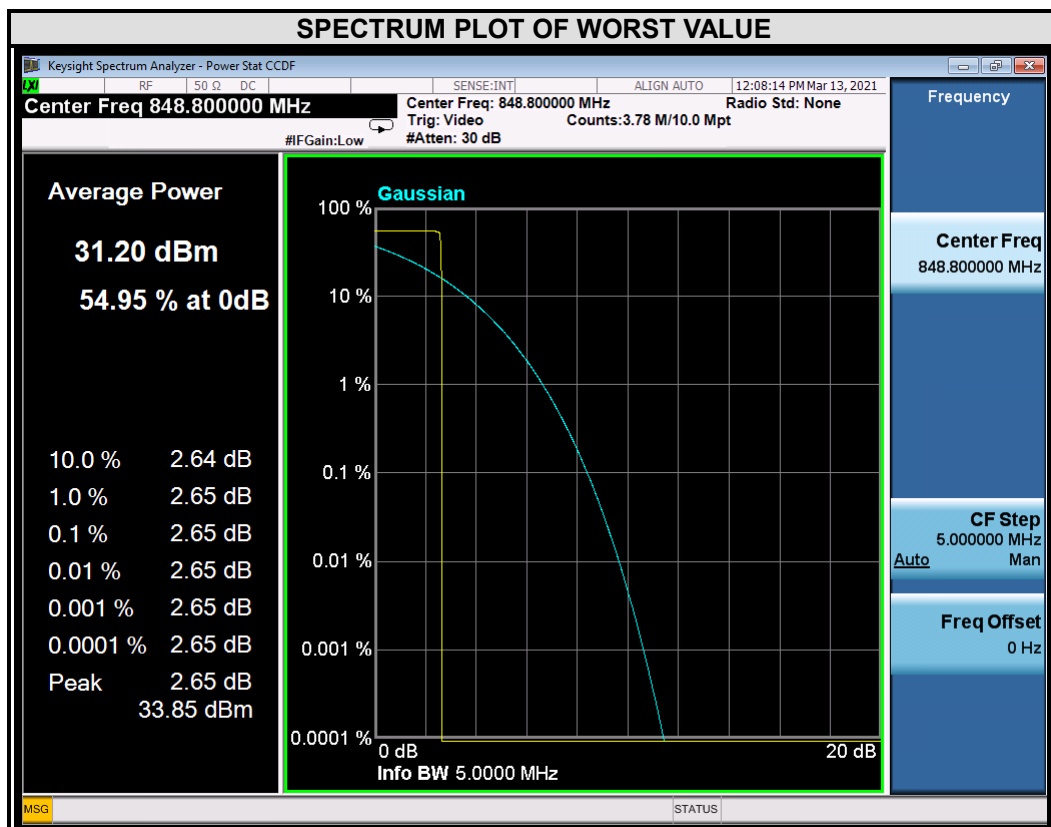




**BUREAU
VERITAS**

Test Report No.: RFA210218W001-4

EDGE


CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
128	824.2	5.90

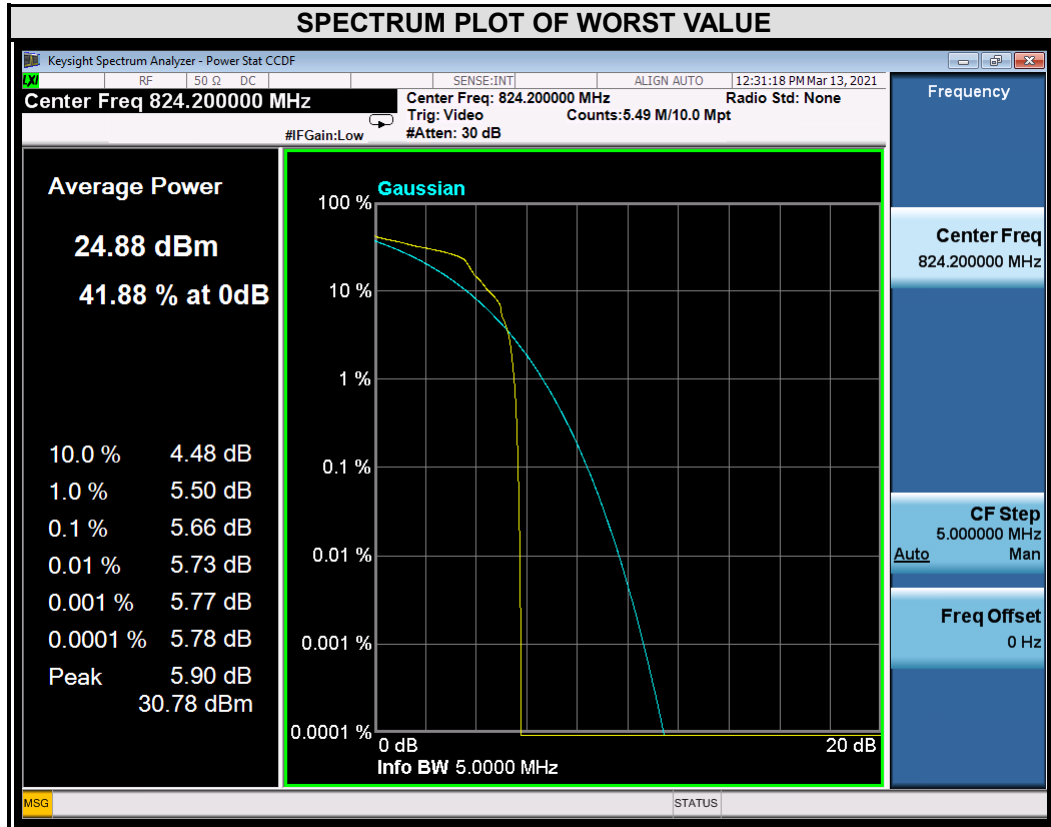



Test Report No.: RFA210218W001-4


CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
189	836.4	5.92

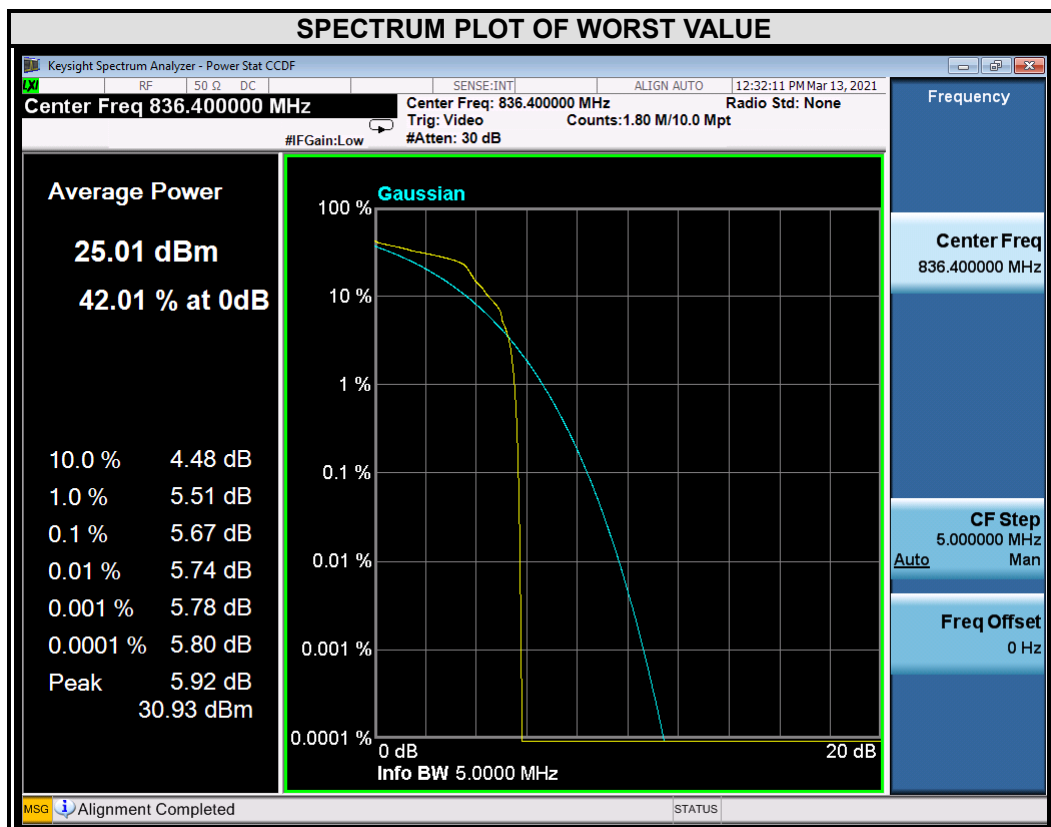



Test Report No.: RFA210218W001-4

CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
251	848.8	5.92

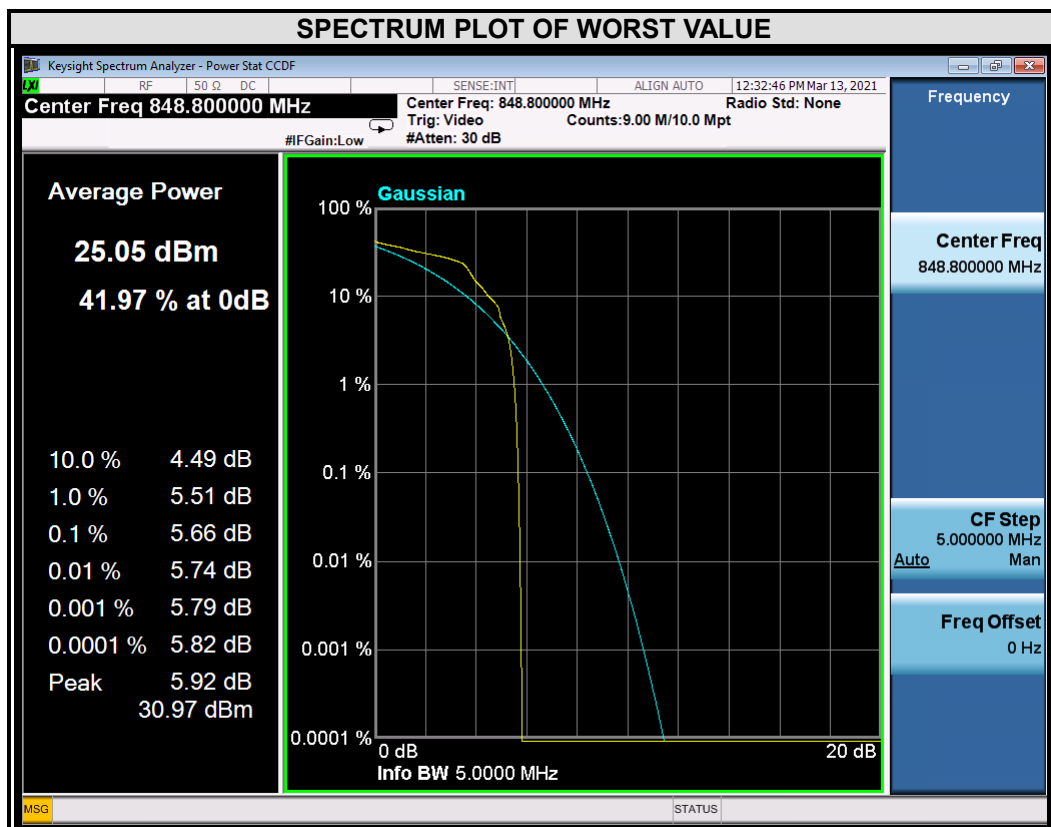




BUREAU
VERITAS

Test Report No.: RFA210218W001-4

WCDMA


CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
4132	826.4	5.59

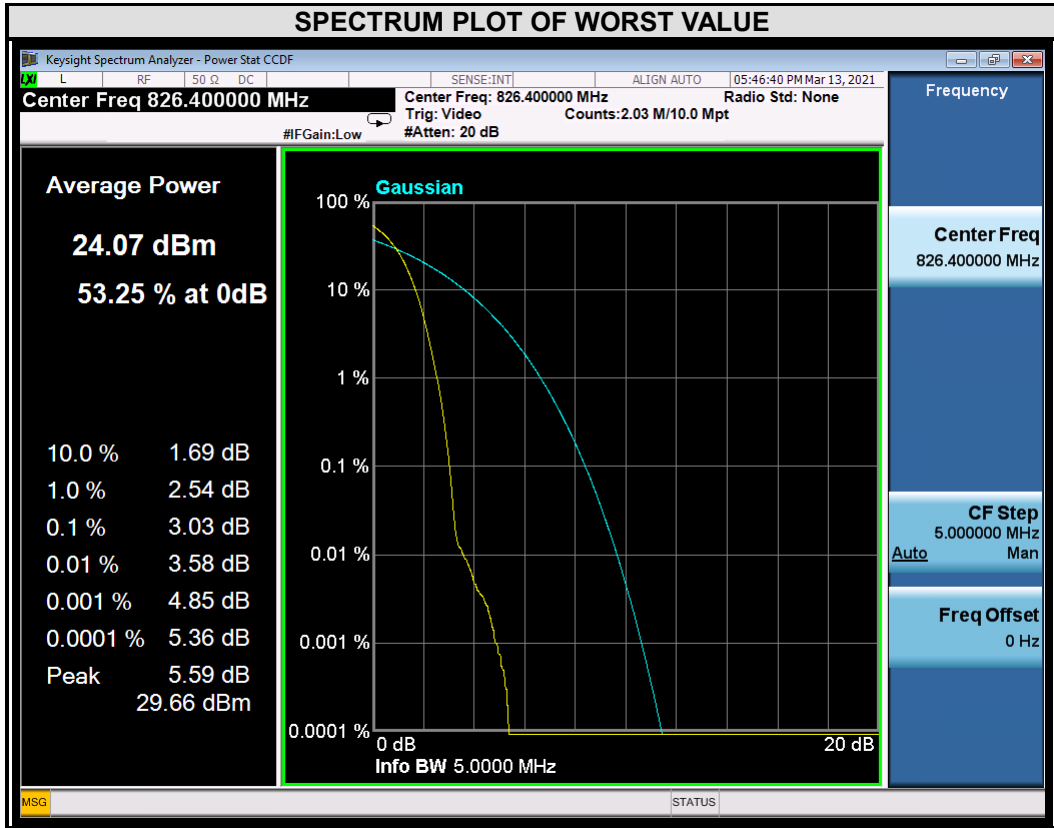



Test Report No.: RFA210218W001-4

CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
4182	836.4	3.62

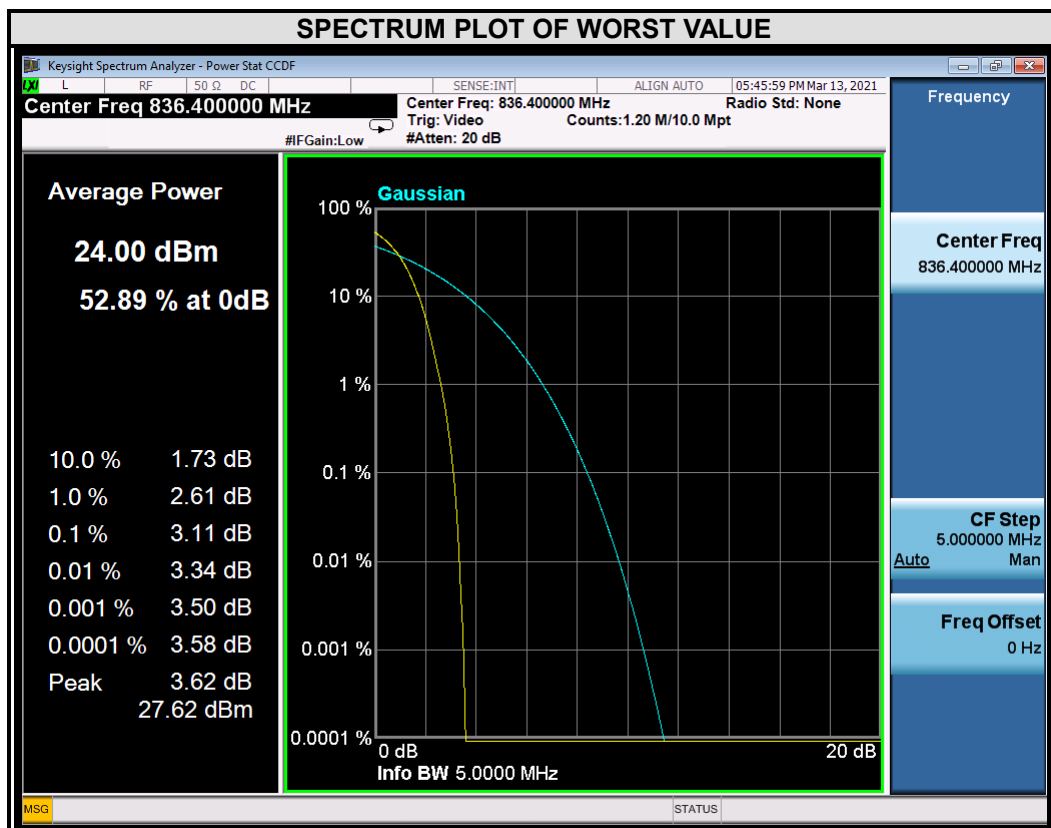




**BUREAU
VERITAS**

Test Report No.: RFA210218W001-4

CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
4233	846.6	3.61

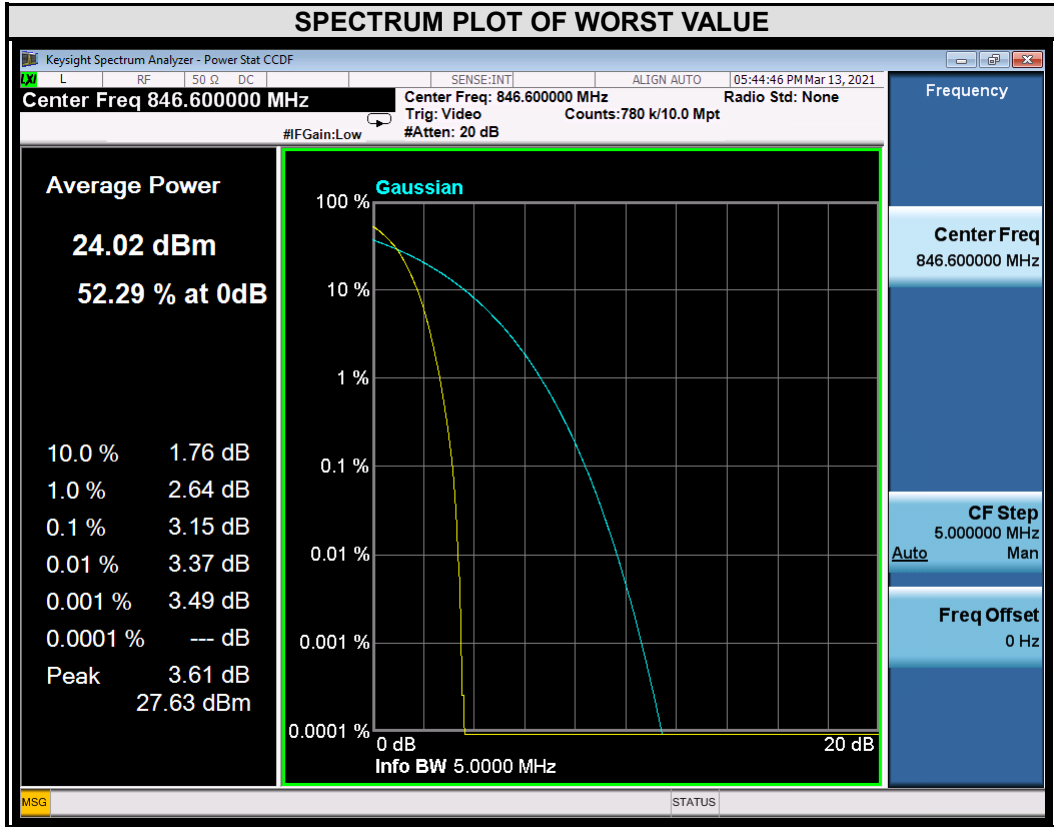




**BUREAU
VERITAS**

Test Report No.: RFA210218W001-4

LTE BAND 5

CHANNEL BANDWIDTH: 1.4MHz				
CHANNEL	Frequency (MHz)	PEAK TO AVERAGE RATIO (dB)		
		QPSK	16QAM	64QAM
20407	824.7	5.84	6.84	/
20525	836.5	6.74	7.51	/
20643	848.3	7.17	7.47	/

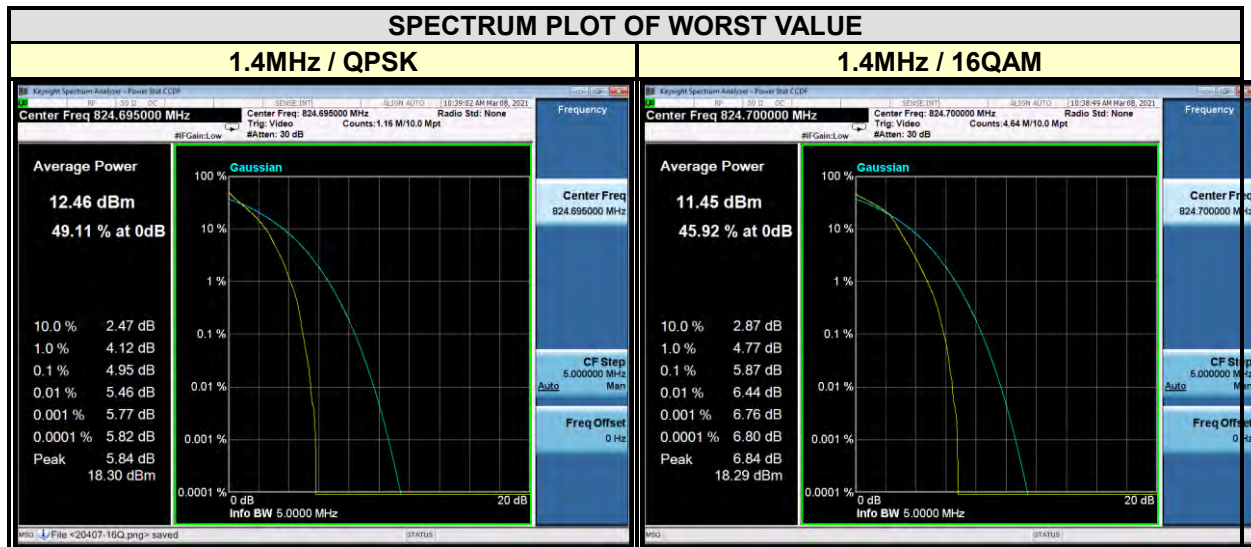




**BUREAU
VERITAS**

Test Report No.: RFA210218W001-4

CHANNEL BANDWIDTH: 3MHz				
CHANNEL	Frequency (MHz)	PEAK TO AVERAGE RATIO (dB)		
		QPSK	16QAM	64QAM
20415	825.5	5.97	7.17	/
20525	836.5	6.90	7.65	/
20635	847.5	7.05	7.91	/

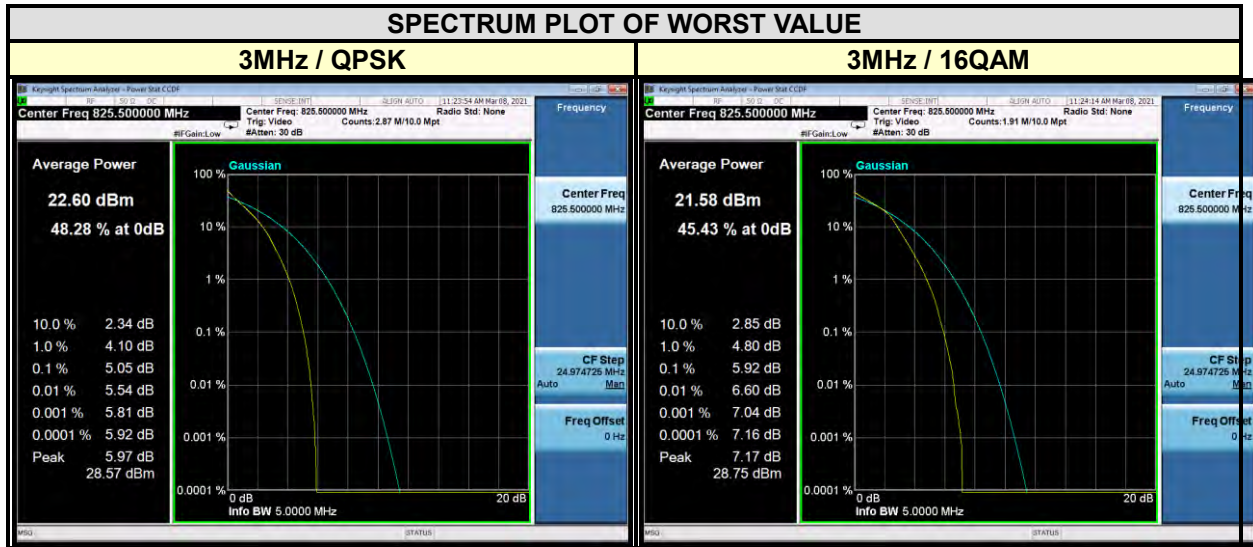




**BUREAU
VERITAS**

Test Report No.: RFA210218W001-4

CHANNEL BANDWIDTH: 5MHz				
CHANNEL	Frequency (MHz)	PEAK TO AVERAGE RATIO (dB)		
		QPSK	16QAM	64QAM
20425	826.5	6.96	7.62	/
20525	836.5	6.91	7.81	/
20625	846.5	7.02	8.04	/

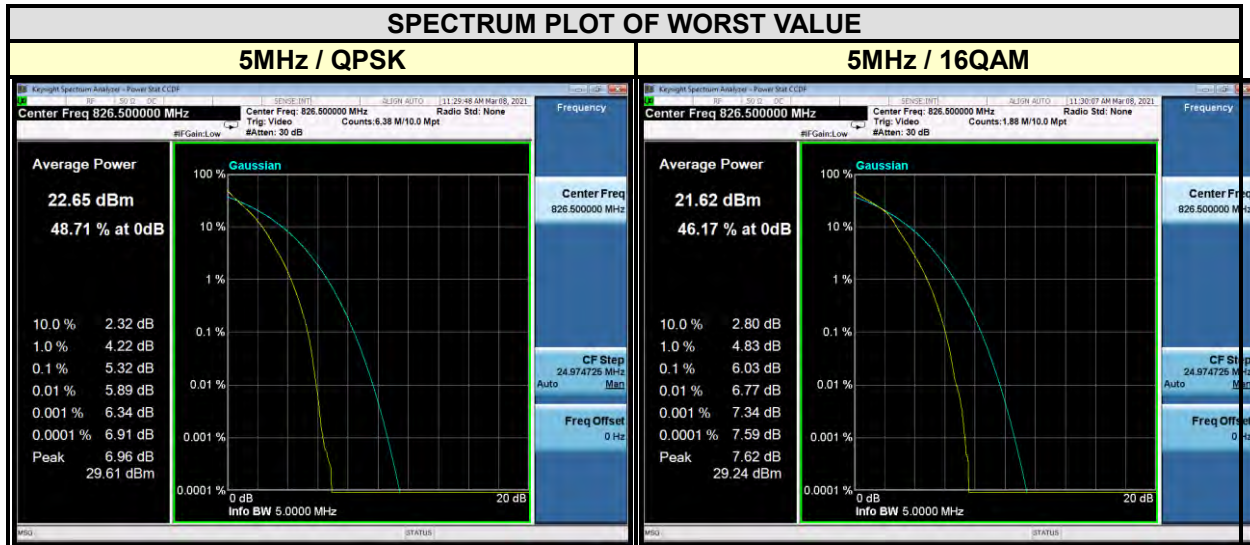




**BUREAU
VERITAS**

Test Report No.: RFA210218W001-4

CHANNEL BANDWIDTH: 10MHz				
CHANNEL	Frequency (MHz)	PEAK TO AVERAGE RATIO (dB)		
		QPSK	16QAM	64QAM
20450	829	7.14	7.06	/
20525	836.5	8.17	8.07	/
20600	844	7.09	7.81	/

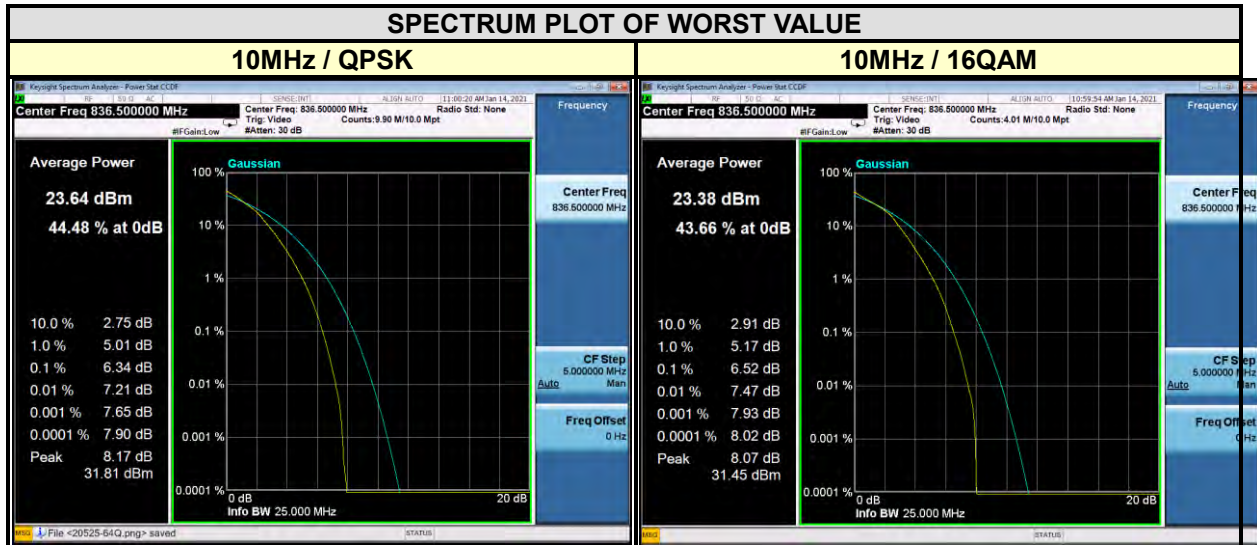




**BUREAU
VERITAS**

Test Report No.: RFA210218W001-4

LTE BAND 26

CHANNEL BANDWIDTH: 1.4MHz				
CHANNEL	Frequency (MHz)	PEAK TO AVERAGE RATIO (dB)		
		QPSK	16QAM	64QAM
26797	824.7	6.80	7.53	/
26915	836.5	5.83	6.64	/
27033	848.3	5.89	6.62	/

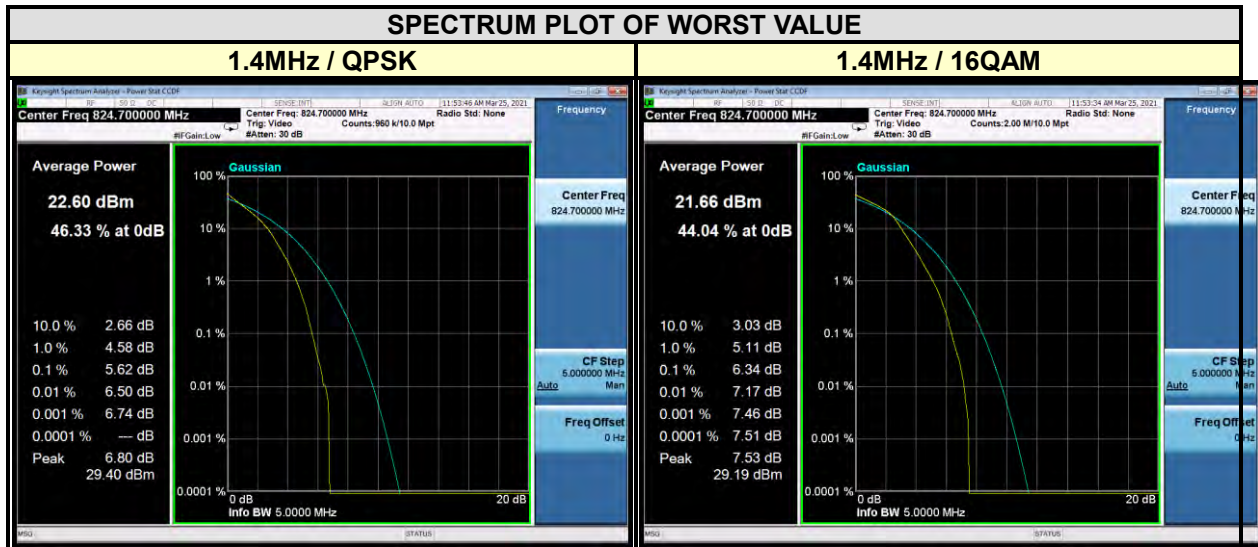




**BUREAU
VERITAS**

Test Report No.: RFA210218W001-4

CHANNEL BANDWIDTH: 3MHz				
CHANNEL	Frequency (MHz)	PEAK TO AVERAGE RATIO (dB)		
		QPSK	16QAM	64QAM
26805	825.5	7.01	8.08	/
26915	836.5	5.82	6.67	/
27025	847.5	5.89	6.76	/

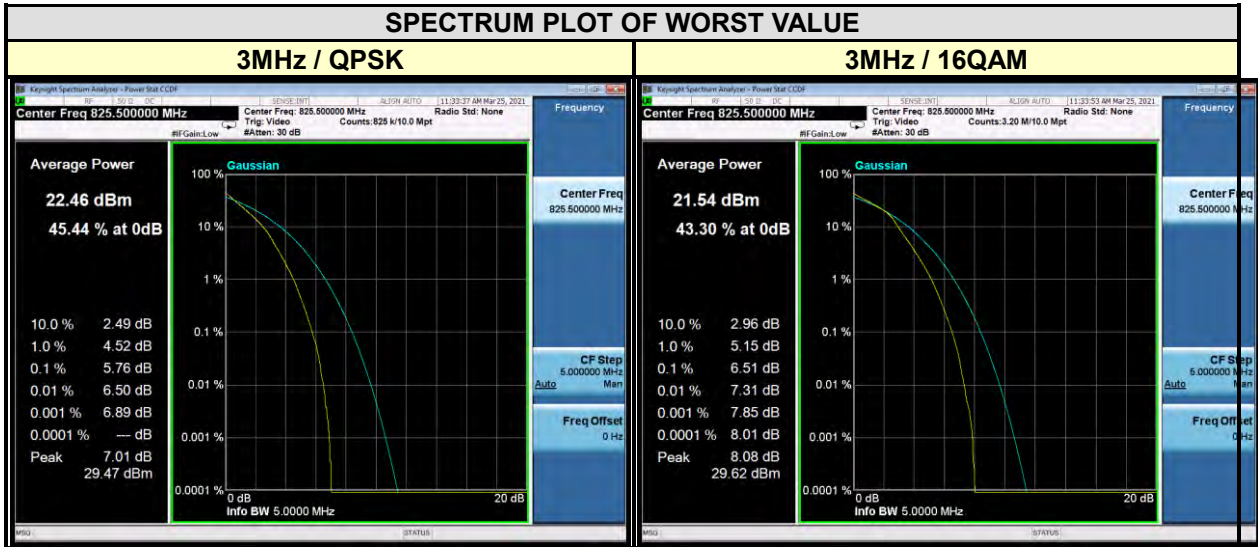




**BUREAU
VERITAS**

Test Report No.: RFA210218W001-4

CHANNEL BANDWIDTH: 5MHz				
CHANNEL	Frequency (MHz)	PEAK TO AVERAGE RATIO (dB)		
		QPSK	16QAM	64QAM
26815	826.5	7.69	8.25	/
26915	836.5	5.91	6.61	/
27015	846.5	6.02	6.66	/

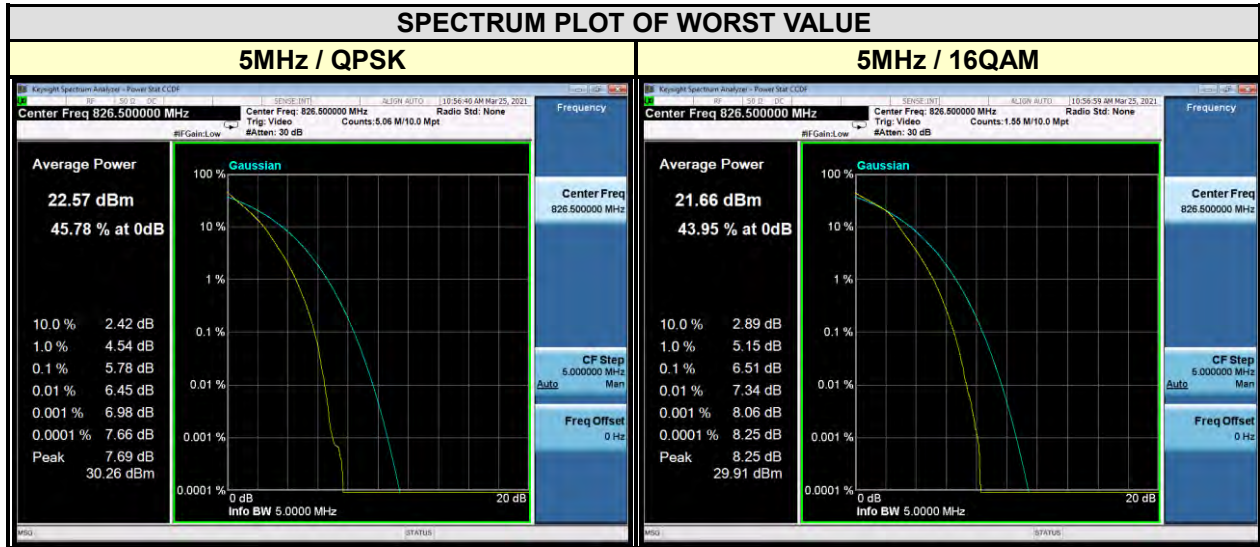




**BUREAU
VERITAS**

Test Report No.: RFA210218W001-4

CHANNEL BANDWIDTH: 10MHz				
CHANNEL	Frequency (MHz)	PEAK TO AVERAGE RATIO (dB)		
		QPSK	16QAM	64QAM
26840	829	5.86	7.58	/
26915	836.5	5.89	6.65	/
26990	844	5.90	6.69	/

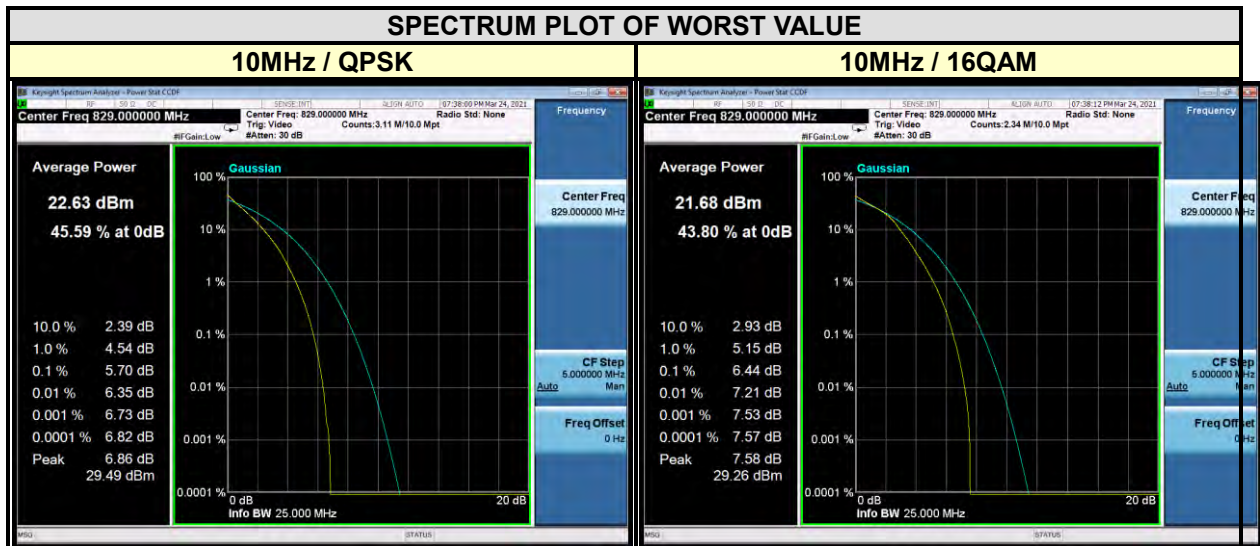



**BUREAU
VERITAS**

Test Report No.: RFA210218W001-4

CHANNEL BANDWIDTH: 15MHz				
CHANNEL	Frequency (MHz)	PEAK TO AVERAGE RATIO (dB)		
		QPSK	16QAM	64QAM
26865	831.5	7.45	8.63	/
26915	836.5	6.20	6.71	/
26965	841.5	6.18	6.67	/





BUREAU
VERITAS

Test Report No.: RFA210218W001-4

4 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



Test Report No.: RFA210218W001-4

5 INFORMATION ON THE TESTING LABORATORIES

We, BV 7LAYERS COMMUNICATIONS TECHNOLOGY (SHENZHEN) CO. LTD., were founded in 2015 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Shenzhen EMC/RF Lab:

Tel: +86-755-88696566

Fax: +86-755-88696577

Email: customerservice.dg@cn.bureauveritas.com

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



Test Report No.: RFA210218W001-4

6 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---