

FCC TEST REPORT

(PART 22)



Applicant:	Lenovo (Shanghai) Electronics Technology Co., Ltd.
Address:	Section 304-305, Building No. 4, # 222, Meiyue Road, China (Shanghai) Pilot Free Trade Zone

Manufacturer or Supplier:	Lenovo PC HK Limited
Address:	23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay, Hong Kong, P.R.China
Product:	Portable Tablet Computer
Brand Name:	Lenovo
Model Name:	Lenovo TB-X6C6X
FCC ID:	O57TBX6C6X
Date of tests:	Mar. 05, 2021 ~ Mar. 30, 2021

The tests have been carried out according to the requirements of the following standard:

- | | |
|--|--|
| <input checked="" type="checkbox"/> FCC PART 22, Subpart H | <input checked="" type="checkbox"/> FCC Part 2 |
| <input checked="" type="checkbox"/> ANSI/TIA/EIA-603-D | <input checked="" type="checkbox"/> ANSI C63.26-2015 |
| <input checked="" type="checkbox"/> ANSI/TIA/EIA-603-E | |

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Simon Wang Engineer / Mobile Department	Approved by Luke Lu Manager / Mobile Department
 Date: Apr. 7, 2021	 Date: Apr. 7, 2021

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



TABLE OF CONTENTS

RELEASE CONTROL RECORD4

1 SUMMARY OF TEST RESULTS.....5

* REFER TO KDB 971168 D01 POWER MEAS LICENSE DIGITAL SYSTEMS V03R01.....5

1.1 MEASUREMENT UNCERTAINTY5

1.2 TEST SITE AND INSTRUMENTS6

2 GENERAL INFORMATION7

2.1 GENERAL DESCRIPTION OF EUT7

2.2 CONFIGURATION OF SYSTEM UNDER TEST 10

2.3 DESCRIPTION OF SUPPORT UNITS 11

2.4 TEST ITEM AND TEST CONFIGURATION..... 11

2.5 EUT OPERATING CONDITIONS 16

2.6 GENERAL DESCRIPTION OF APPLIED STANDARDS 16

3 TEST TYPES AND RESULTS.....17

3.1 OUTPUT POWER MEASUREMENT 17

3.1.1 *LIMITS OF OUTPUT POWER MEASUREMENT*..... 17

3.1.2 *TEST PROCEDURES* 17

3.1.3 *TEST SETUP*..... 18

3.1.4 *TEST RESULTS* 18

3.2 FREQUENCY STABILITY MEASUREMENT 29

3.2.1 *LIMITS OF FREQUENCY STABILITY MEASUREMENT*..... 29

3.2.2 *TEST PROCEDURE*..... 29

3.2.3 *TEST SETUP*..... 29

3.2.4 *TEST RESULTS* 30

3.3 OCCUPIED BANDWIDTH MEASUREMENT 42

3.3.1 *TEST PROCEDURES* 42

3.3.2 *TEST SETUP*..... 42

3.3.3 *TEST RESULTS* 43

3.4 BAND EDGE MEASUREMENT 54

3.4.1 *LIMITS OF BAND EDGE MEASUREMENT*..... 54

3.4.2 *TEST SETUP*..... 54

3.4.3 *TEST PROCEDURES* 55

3.4.4 *TEST RESULTS* 56

3.5 CONDUCTED SPURIOUS EMISSIONS..... 75

3.5.1 *LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT*..... 75

3.5.2 *TEST PROCEDURE*..... 75

3.5.3 *TEST SETUP*..... 75

3.5.4 *TEST RESULTS* 76

3.6 RADIATED EMISSION MEASUREMENT 88

3.6.1 *LIMITS OF RADIATED EMISSION MEASUREMENT* 88

3.6.2 *TEST PROCEDURES* 88



**BUREAU
VERITAS**

Test Report No.: RFA210218W001-4

3.6.3	DEVIATION FROM TEST STANDARD	88
3.6.4	TEST SETUP.....	89
3.6.5	TEST RESULTS	90
3.7	PEAK TO AVERAGE RATIO.....	135
3.7.1	LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT.....	135
3.7.2	TEST SETUP.....	135
3.7.3	TEST PROCEDURES	135
3.7.4	TEST RESULTS	136
4	PHOTOGRAPHS OF THE TEST CONFIGURATION	154
5	INFORMATION ON THE TESTING LABORATORIES	155
6	APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	156



BUREAU
VERITAS

Test Report No.: RFA210218W001-4

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RFA210218W001-4	Original release	Apr. 7, 2021

1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 22 & Part 2		
STANDARD SECTION	TEST TYPE	RESULT
2.1046 22.913 (a)	Effective Radiated Power	Compliance
2.1055 22.355	Frequency Stability	Compliance
2.1049 22.917 (b)	Occupied Bandwidth	Compliance
22.913 (d)	Peak to average ratio*	Compliance
22.917	Band Edge Measurements	Compliance
2.1051 22.917	Conducted Spurious Emissions	Compliance
2.1053 22.917	Radiated Spurious Emissions	Compliance

* Refer to KDB 971168 D01 Power Meas License Digital Systems v03r01.

1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
Maximum Peak Output Power	±2.06dB
Frequency Stability	± 76.97Hz
Radiated emissions (30MHz~1GMHz)	±4.98dB
Radiated emissions (1GMHz ~6GMHz)	±4.70dB
Radiated emissions (6GMHz ~18GMHz)	±4.60dB
Radiated emissions (18GMHz ~40GMHz)	±4.12dB
Conducted emissions	±4.01dB
Occupied Channel Bandwidth	±43.58KHz
Band Edge Measurements	±4.70dB
Peak to average ratio	±0.76dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



1.2 TEST SITE AND INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Apr. 27,20	Apr. 26,21
EXA Signal Analyzer	KEYSIGHT	N9010A-526	MY54510322	Feb. 25,21	Feb. 24,22
Bilog Antenna	ETS-LINDGREN	3143B	00161965	Mar. 26,21	Mar. 25,22
Bilog Antenna	ETS-LINDGREN	3143B	00161965	Mar. 27,20	Mar. 26,21
Horn Antenna (1GHz-18GHz)	ETS-LINDGREN	3117	00168692	Mar. 26,21	Mar. 25,22
Horn Antenna (1GHz-18GHz)	ETS-LINDGREN	3117	00168692	Mar. 27,20	Mar. 26,21
Horn Antenna (18GHz-40GHz)	N/A	QWH-SL-18-40 -K-SG/QMS-00 361	15433	Nov. 24, 20	Nov. 23, 21
Radio Communication Analyzer	ANRITSU	MT8820C	6201465426	Feb. 26,21	Feb. 25,22
Signal Pre-Amplifier	EMSI	EMC 9135	980249	Jun. 02,20	Jun. 01,21
Signal Pre-Amplifier	EMSI	EMC 012645B	980257	Jun. 02,20	Jun. 01,21
Signal Pre-Amplifier	EMSI	EMC 184045B	980259	Apr. 30,20	Apr. 29,21
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	Euroshieldpn- CT0001143-1216	May. 19,20	May. 19,21
Test Software	E3	V 9.160323	N/A	N/A	N/A
Test Software	ADT	ADT_Radiated V7.6.15.9.2	N/A	N/A	N/A
10dB Attenuator	JFW/USA	50HF-010-SM A	1505	Jun. 03,20	Jun. 02,21
Power Meter	Anritsu	ML2495A	1506002	Feb. 25,21	Feb. 24,22
Power Sensor	Anritsu	MA2411B	1339352	Feb. 25,21	Feb. 24,22
Humid & Temp Programmable Tester	Juyi	ITH-120-45-CP -AR	IAA1504-001	Jun. 02,20	Jun. 01,21
MXG Analog Microvave Signal Generator	KEYSIGHT	N5183A	MY50143024	Mar. 10,21	Mar. 09,22
MXG Analog Microvave Signal Generator	KEYSIGHT	N5183A	MY50143024	Mar. 11,20	Mar. 10,21
Power Divider	MCLI/USA	PS2-15	24880	N/A	N/A

- NOTE:**
1. The calibration interval of the above test instruments is 12 months or 24 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
 2. The test was performed in 3m Semi-anechoic Chamber and RF Oven Room.
 3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 525120; The Designation No. is CN1171.



2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Portable Tablet Computer	
BRAND NAME	Lenovo	
MODEL NAME	Lenovo TB-X6C6X	
NOMINAL VOLTAGE	5.0Vdc (adapter or host equipment) 3.86Vdc (Li-ion, battery)	
MODULATION TYPE	GSM/GPRS/EDGE	GMSK, 8PSK
	WCDMA	HSDPA,HSUPA,DC-HSDPA
	LTE	QPSK, 16QAM
FREQUENCY RANGE	GSM/GPRS/EDGE	824.2MHz ~ 848.8MHz
	WCDMA	826.4MHz ~ 846.6MHz
	LTE Band 5 (Channel Bandwidth: 1.4MHz)	824.7MHz ~ 848.3MHz
	LTE Band 5 (Channel Bandwidth: 3MHz)	825.5MHz ~ 847.5MHz
	LTE Band 5 (Channel Bandwidth: 5MHz)	826.5MHz ~ 846.5MHz
	LTE Band 5 (Channel Bandwidth: 10MHz)	829MHz ~ 844MHz
	LTE Band 26 (Channel Bandwidth: 1.4MHz)	824.7MHz ~ 848.3MHz
	LTE Band 26 (Channel Bandwidth: 3MHz)	825.5MHz ~ 847.5MHz
	LTE Band 26 (Channel Bandwidth: 5MHz)	826.5MHz ~ 846.5MHz
	LTE Band 26 (Channel Bandwidth: 10MHz)	829MHz ~ 844MHz
	LTE Band 26 (Channel Bandwidth: 15MHz)	831.5MHz ~ 841.5MHz
	MAX. ERP POWER	GSM
EDGE		269.15mW
WCDMA		125.03mW
LTE Band 5 (Channel Bandwidth: 1.4MHz)		116.68mW
LTE Band 5 (Channel Bandwidth: 3MHz)		115.88mW
LTE Band 5 (Channel Bandwidth: 5MHz)		115.88mW
LTE Band 5 (Channel Bandwidth: 10MHz)		116.41mW



MAX. ERP POWER	LTE Band 26 (Channel Bandwidth: 1.4MHz)	115.35mW
	LTE Band 26 (Channel Bandwidth: 3MHz)	115.35mW
	LTE Band 26 (Channel Bandwidth: 5MHz)	115.35mW
	LTE Band 26 (Channel Bandwidth: 10MHz)	115.61mW
	LTE Band 26 (Channel Bandwidth: 15MHz)	115.88mW
EMISSION DESIGNATORGOGN	GSM	240KGXW
	EDGE	250KG7W
	WCDMA	4M17F9W
	LTE Band 5 (Channel Bandwidth: 1.4MHz)	QPSK: 1M08G7D
		16QAM: 1M08W7D
	LTE Band 5 (Channel Bandwidth: 3MHz)	QPSK: 2M68G7D
		16QAM: 2M68W7D
	LTE Band 5 (Channel Bandwidth: 5MHz)	QPSK: 4M47G7D
		16QAM: 4M47W7D
	LTE Band 5 (Channel Bandwidth: 10MHz)	QPSK: 8M93G7D
		16QAM: 8M94W7D
	LTE Band 26 (Channel Bandwidth: 1.4MHz)	QPSK: 1M08G7D
		16QAM: 1M08W7D
	LTE Band 26 (Channel Bandwidth: 3MHz)	QPSK: 2M68G7D
		16QAM: 2M68W7D
LTE Band 26 (Channel Bandwidth: 5MHz)	QPSK: 4M47G7D	
	16QAM: 4M47W7D	
LTE Band 26 (Channel Bandwidth: 10MHz)	QPSK: 8M93G7D	
	16QAM: 8M93W7D	
LTE Band 26 (Channel Bandwidth: 15MHz)	QPSK: 13M4G7D	
	16QAM: 13M4W7D	
ANTENNA TYPE	PIFA Antenna with 0.3dBi gain	
HW VERSION	Lenovo TB-X6C6X	
SW VERSION	TB-X6C6X_RF01_210430	
I/O PORTS	Refer to user's manual	
CABLE SUPPLIED	USB cable: shielded, detachable, 1meter	
EXTREME TEMPERATURE	-10-55 °C	
EXTREME VOLTAGE	3.6-4.4 V	



NOTE:

1. For a more detailed features description, please refer to the manufacturer’s specifications or the user’s manual.
2. The EUT incorporates a SISO function. Physically, the EUT provides one completed transmitter and one receiver.


MODULATION MODE	TX FUNCTION
GSM/GPRS/EDGE	1TX/1RX
WCDMA	1TX/1RX
LTE	1TX/1RX

3. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.

List of Accessory:

ACCESSORIES	BRAND	MODEL	SPECIFICATION
Battery 1	Sunwoda	L20D1P32	Capacity : 3.86vdc 7500mAh
Battery 2	SCUD	L20D1P32	Capacity : 3.86vdc 7500mAh
AC Adapter 1	Salom	SC-41	I/P:100-240Vac, 0.3A O/P: 5Vdc, 2A
AC Adapter 2	AcBel	SC-41	I/P:100-240Vac, 0.3A O/P: 5Vdc, 2A
USB Cable 1	BRL	GSZ-209H-A3120	Shielded, 1.0meter
USB Cable 2	Leagtech	CDG-203T-A05WF	Shielded, 1.0meter

2.2 CONFIGURATION OF SYSTEM UNDER TEST FOR RADIATION EMISSION

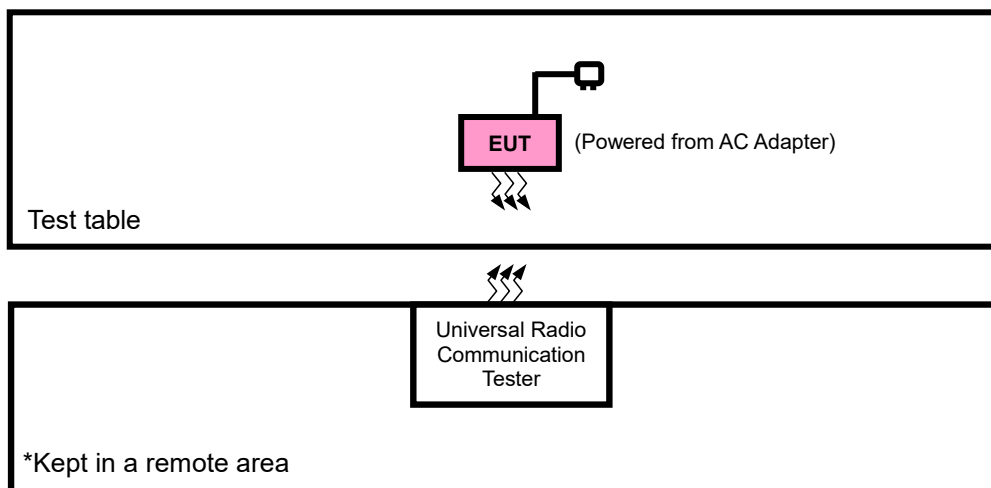



2.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	DC source	LONG WEI	PS-6403D	010934269	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	DC Line: Unshielded, Detachable 1.8m

2.4 TEST ITEM AND TEST CONFIGURATION

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case in ERP and radiated emission was found when positioned on X-plane for GSM /EDGE /LTE. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	DESCRIPTION
A	EUT + Adapter + USB Cable with GSM or LTE or WCDMA link
B	EUT + Battery with GSM or LTE or WCDMA link



GSM MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	MODE
B	ERP	128 to 251	128, 189, 251	GSM, EDGE
B	FREQUENCY STABILITY	128 to 251	128, 251	GSM, EDGE
B	OCCUPIED BANDWIDTH	128 to 251	128, 189, 251	GSM, EDGE
B	BAND EDGE	128 to 251	128, 251	GSM, EDGE
B	CONDCUETED EMISSION	128 to 251	128, 189, 251	GSM, EDGE
A	RADIATED EMISSION	128 to 251	128, 189, 251	GSM, EDGE
B	PEAK TO AVERAGE RATIO	128 to 251	128, 189, 251	GSM, EDGE

WCDMA MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	MODE
B	ERP	4132 to 4233	4132, 4182, 4233	WCDMA
B	FREQUENCY STABILITY	4132 to 4233	4132, 4233	WCDMA
B	OCCUPIED BANDWIDTH	4132 to 4233	4132, 4182, 4233	WCDMA
B	BAND EDGE	4132 to 4233	4132, 4182, 4233	WCDMA
B	CONDCUETED EMISSION	4132 to 4233	4132, 4233	WCDMA
A	RADIATED EMISSION	4132 to 4233	4132, 4182, 4233	WCDMA
B	PEAK TO AVERAGE RATIO	4132 to 4233	4132, 4182, 4233	WCDMA

LTE BAND 5 MODE

TEST ITEM	Available Channel	Tested Channel	Channel bandwidth	modulation	mode
ERP	20407 to 20643	20407, 20525, 20643	1.4MHz	QPSK,16QAM	1 RB / 0 RB Offset
	20415 to 20635	20415, 20525, 20635	3MHz	QPSK,16QAM	1 RB / 0 RB Offset
	20425 to 20625	20425, 20525, 20625	5MHz	QPSK,16QAM	1 RB / 0 RB Offset
	20450 to 20600	20450, 20525, 20600	10MHz	QPSK,16QAM	1 RB / 0 RB Offset
FREQUENCY STABILITY	20407 to 20643	20407, 20643	1.4MHz	QPSK	1 RB / 0 RB Offset
	20415 to 20635	20415, 20635	3MHz	QPSK	1 RB / 0 RB Offset
	20425 to 20625	20425, 20625	5MHz	QPSK	1 RB / 0 RB Offset
	20450 to 20600	20450, 20600	10MHz	QPSK	1 RB / 0 RB Offset



**BUREAU
VERITAS**

Test Report No.: RFA210218W001-4

OCCUPIED BANDWIDTH	20407 to 20643	20407, 20525, 20643	1.4MHz	QPSK,16QAM	6 RB / 0 RB Offset
	20415 to 20635	20415, 20525, 20635	3MHz	QPSK,16QAM	15 RB / 0 RB Offset
	20425 to 20625	20425, 20525, 20625	5MHz	QPSK,16QAM	25 RB / 0 RB Offset
	20450 to 20600	20450, 20525, 20600	10MHz	QPSK,16QAM	50 RB / 0 RB Offset
BAND EDGE	20407 to 20643	20407	1.4 MHz	QPSK,16QAM	1 RB / 0 RB Offset
					6 RB / 0 RB Offset
	20407 to 20643	20643	1.4 MHz	QPSK,16QAM	1 RB / 5 RB Offset
					6 RB / 0 RB Offset
	20415 to 20635	20415	3 MHz	QPSK,16QAM	1 RB / 0 RB Offset
					15 RB / 0 RB Offset
	20415 to 20635	20635	3 MHz	QPSK,16QAM	1 RB / 14 RB Offset
					15 RB / 0 RB Offset
	20425 to 20625	20425	5MHz	QPSK,16QAM	1 RB / 0 RB Offset
					25 RB / 0 RB Offset
	20425 to 20625	20625	5MHz	QPSK,16QAM	1 RB / 24 RB Offset
					25 RB / 0 RB Offset
20450 to 20600	20450	10MHz	QPSK,16QAM	1 RB / 0 RB Offset	
				50 RB / 0 RB Offset	
20450 to 20600	20600	10MHz	QPSK,16QAM	1 RB / 49 RB Offset	
				50 RB / 0 RB Offset	
CONDCUDED EMISSION	20407 to 20643	20407, 20525, 20643	1.4MHz	QPSK	1 RB / 0 RB Offset
	20415 to 20635	20415, 20525, 20635	3MHz	QPSK	1 RB / 0 RB Offset
	20425 to 20625	20425, 20525, 20625	5MHz	QPSK	1 RB / 0 RB Offset
	20450 to 20600	20450, 20525, 20600	10MHz	QPSK	1 RB / 0 RB Offset
RADIATED EMISSION	20407 to 20643	20407, 20525, 20643	1.4MHz	QPSK	1 RB / 0 RB Offset
	20415 to 20635	20525	3MHz	QPSK	1 RB / 0 RB Offset
	20425 to 20625	20525	5MHz	QPSK	1 RB / 0 RB Offset
	20450 to 20600	20525	10MHz	QPSK	1 RB / 0 RB Offset
PEAK TO AVERAGE RATIO	20407 to 20643	20407, 20525, 20643	1.4MHz	QPSK,16QAM	1 RB / 0 RB Offset
	20415 to 20635	20415, 20525, 20635	3MHz	QPSK,16QAM	1 RB / 0 RB Offset
	20425 to 20625	20425, 20525, 20625	5MHz	QPSK,16QAM	1 RB / 0 RB Offset
	20450 to 20600	20450, 20525, 20600	10MHz	QPSK,16QAM	1 RB / 0 RB Offset



LTE BAND 26 MODE

TEST ITEM	Available Channel	Tested Channel	Channel bandwidth	modulation	mode
ERP	26797 to 27033	26797, 26915, 27033	1.4MHz	QPSK,16QAM	1 RB / 0 RB Offset
	26805 to 27025	26805, 26915, 27025	3MHz	QPSK,16QAM	1 RB / 0 RB Offset
	26815 to 27015	26815, 26915, 27015	5MHz	QPSK,16QAM	1 RB / 0 RB Offset
	26840 to 26990	26840, 26915, 26990	10MHz	QPSK,16QAM	1 RB / 0 RB Offset
	26865 to 26965	26865, 26915, 26965	15MHz	QPSK,16QAM	1 RB / 0 RB Offset
FREQUENCY STABILITY	26797 to 27033	26797, 27033	1.4MHz	QPSK	1 RB / 0 RB Offset
	26805 to 27025	26805, 27025	3MHz	QPSK	1 RB / 0 RB Offset
	26815 to 27015	26815, 27015	5MHz	QPSK	1 RB / 0 RB Offset
	26840 to 26990	26840, 26990	10MHz	QPSK	1 RB / 0 RB Offset
	26865 to 26965	26865, 26965	15MHz	QPSK	1 RB / 0 RB Offset
OCCUPIED BANDWIDTH	26797 to 27033	26797, 26915, 27033	1.4MHz	QPSK,16QAM	6 RB / 0 RB Offset
	26805 to 27025	26805, 26915, 27025	3MHz	QPSK,16QAM	15 RB / 0 RB Offset
	26815 to 27015	26815, 26915, 27015	5MHz	QPSK,16QAM	25 RB / 0 RB Offset
	26840 to 26990	26840, 26915, 26990	10MHz	QPSK,16QAM	50 RB / 0 RB Offset
	26865 to 26965	26865, 26915, 26965	15MHz	QPSK,16QAM	75 RB / 0 RB Offset



BAND EDGE	26797 to 27033	26797	1.4 MHz	QPSK	1 RB / 0 RB Offset
					6 RB / 0 RB Offset
	26797 to 27033	27033	1.4 MHz	QPSK	1 RB / 5 RB Offset
					6 RB / 0 RB Offset
	26805 to 27025	26805	3 MHz	QPSK	1 RB / 0 RB Offset
					15 RB / 0 RB Offset
	26805 to 27025	27025	3 MHz	QPSK	1 RB / 14 RB Offset
					15 RB / 0 RB Offset
	26815 to 27015	26815	5MHz	QPSK	1 RB / 0 RB Offset
					25 RB / 0 RB Offset
	26815 to 27015	27015	5MHz	QPSK	1 RB / 24 RB Offset
				25 RB / 0 RB Offset	
	26840 to 26990	26840	10MHz	QPSK	1 RB / 0 RB Offset
				50 RB / 0 RB Offset	
	26840 to 26990	26990	10MHz	QPSK	1 RB / 49 RB Offset
				50 RB / 0 RB Offset	
	26865 to 26965	26865	15MHz	QPSK	1 RB / 0 RB Offset
				75 RB / 0 RB Offset	
	26865 to 26965	26965	15MHz	QPSK	1 RB / 74 RB Offset
				75 RB / 0 RB Offset	
CONDCUDED EMISSION	26797 to 27033	26797, 26915, 27033	1.4MHz	QPSK	1 RB / 0 RB Offset
	26805 to 27025	26805, 26915, 27025	3MHz	QPSK	1 RB / 0 RB Offset
	26815 to 27015	26815, 26915, 27015	5MHz	QPSK	1 RB / 0 RB Offset
	26840 to 26990	26840, 26915, 26990	10MHz	QPSK	1 RB / 0 RB Offset
	26865 to 26965	26865, 26915, 26965	15MHz	QPSK	1 RB / 0 RB Offset
RADIATED EMISSION	26797 to 27033	26797, 26915, 27033	1.4MHz	QPSK	1 RB / 0 RB Offset
	26805 to 27025	26915	3MHz	QPSK	1 RB / 0 RB Offset
	26815 to 27015	26915	5MHz	QPSK	1 RB / 0 RB Offset
	26840 to 26990	26915	10MHz	QPSK	1 RB / 0 RB Offset
	26865 to 26965	26915	15MHz	QPSK	1 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.



TEST CONDITION:

TEST ITEM	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
ERP	23deg. C, 70%RH	DC 5V By Adapter	Jace Hu
FREQUENCY STABILITY	23deg. C, 70%RH	DC 3.6V/3.8V/4.4V	Chase Zhou
OCCUPIED BANDWIDTH	23deg. C, 70%RH	DC 3.86V By Battery	Chase Zhou
BAND EDGE	23deg. C, 70%RH	DC 3.86V By Battery	Chase Zhou
CONDCUDETED EMISSION	23deg. C, 70%RH	DC 3.86V By Battery	Chase Zhou
RADIATED EMISSION	23deg. C, 70%RH	DC 5V By Adapter	Jace Hu
PEAK TO AVERAGE RATIO	23deg. C, 70%RH	DC 3.86V By Battery	Chase Zhou

2.5 EUT OPERATING CONDITIONS

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

2.6 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 22

KDB 971168 D01 Power Meas License Digital Systems v03r01

ANSI/TIA/EIA-603-D

ANSI/TIA/EIA-603-E

ANSI C63.26-2015

NOTE: All test items have been performed and recorded as per the above standards.



3 TEST TYPES AND RESULTS

3.1 OUTPUT POWER MEASUREMENT

3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

Mobile / Portable station are limited to 7 watts e.r.p.

3.1.2 TEST PROCEDURES

EIRP / ERP MEASUREMENT:

Per KDB 971168 D01 Power Meas License Digital Systems v03r01 or subclause 5.2.5.5 of ANSI C63.26-2015, the relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_{\text{T}} - L_{\text{C}}$$

Where:

ERP or EIRP = effective radiated power or equivalent isotropically radiated power, respectively

(expressed in the same units as P_{Meas} , typically dBW or dBm);

P_{Meas} = measured transmitter output power or PSD, in dBm or dBW;

G_{T} = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

L_{C} = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

CONDUCTED POWER MEASUREMENT:


The EUT was set up for the maximum power with WCDMA link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.



3.1.3 TEST SETUP

EIRP / ERP Measurement:

CONDUCTED POWER MEASUREMENT:



3.1.4 TEST RESULTS

CONDUCTED OUTPUT POWER (dBm)

Band	GSM850			Max. Tune-up Power
	128	189	251	
Channel	128	189	251	
Frequency	824.2	836.4	848.8	
GSM (GMSK, 1Tx-slot)	32.88	33.02	32.99	33.50
GPRS (GMSK, 1Tx-slot)	32.91	33.06	33.02	33.50
GPRS (GMSK, 2Tx-slot)	32.23	32.33	32.27	33.00
GPRS (GMSK, 3Tx-slot)	30.38	30.47	30.49	31.00
GPRS (GMSK, 4Tx-slot)	29.19	29.28	29.31	30.00
EDGE (8PSK, 1Tx-slot)	26.53	26.61	26.68	27.50
EDGE (8PSK, 2Tx-slot)	25.26	25.33	25.42	26.50
EDGE (8PSK, 3Tx-slot)	23.29	23.37	23.44	24.50
EDGE (8PSK, 4Tx-slot)	21.91	21.99	22.06	23.50

Band	WCDMA V			Max. Tune-up Power
	4132	4182	4233	
Channel	4132	4182	4233	
Frequency	826.4	836.4	846.6	
RMC 12.2K	22.78	22.82	22.80	24.5
HSDPA Subtest-1	21.95	21.96	22.00	23.5
HSDPA Subtest-2	21.87	21.97	21.98	23.5
HSDPA Subtest-3	21.50	21.52	21.55	23.5
HSDPA Subtest-4	21.52	21.54	21.51	23.5
DC-HSDPA Subtest-1	21.93	21.93	21.92	23.5
DC-HSDPA Subtest-2	21.91	21.92	21.88	23.5
DC-HSDPA Subtest-3	21.36	21.36	21.41	23.5
DC-HSDPA Subtest-4	21.42	21.42	21.43	23.5
HSUPA Subtest-1	21.09	21.17	21.06	21.5
HSUPA Subtest-2	21.10	21.13	21.15	21.5
HSUPA Subtest-3	20.29	20.11	20.23	20.5
HSUPA Subtest-4	19.85	19.95	19.86	21.0
HSUPA Subtest-5	19.31	19.19	19.23	19.5
HSPA+ Subtest-1	21.69	21.70	21.60	22.5



LTE Band 5

Band/BW	Modulation	RB Size	RB Offset	Low CH 20407	Mid CH 20525	High CH 20643	MPR
				Frequency 824.7 MHz	Frequency 836.5 MHz	Frequency 848.3 MHz	
5/ 1.4	QPSK	1	0	22.41	22.49	22.51	0
		1	2	22.54	22.55	22.62	0
		1	5	22.49	22.48	22.53	0
		3	0	22.60	22.62	22.71	0
		3	1	22.54	22.57	22.54	0
		3	3	22.39	22.40	22.45	0
		6	0	21.55	21.54	21.61	1
	16QAM	1	0	21.72	21.74	21.79	1
		1	2	21.87	21.85	21.94	1
		1	5	21.75	21.76	21.86	1
		3	0	21.66	21.69	21.72	1
		3	1	21.54	21.65	21.64	1
		3	3	21.46	21.49	21.56	1
		6	0	20.59	20.67	20.67	2

Band/BW	Modulation	RB Size	RB Offset	Low CH 20415	Mid CH 20525	High CH 20635	MPR
				Frequency 825.5 MHz	Frequency 836.5 MHz	Frequency 847.5 MHz	
5/ 3	QPSK	1	0	22.43	22.51	22.50	0
		1	7	22.50	22.56	22.62	0
		1	14	22.45	22.48	22.53	0
		8	0	21.59	21.65	21.71	1
		8	3	21.47	21.57	21.56	1
		8	7	21.36	21.47	21.49	1
		15	0	21.52	21.55	21.55	1
	16QAM	1	0	21.69	21.80	21.82	1
		1	7	21.84	21.88	21.92	1
		1	14	21.78	21.76	21.86	1
		8	0	20.62	20.70	20.72	2
		8	3	20.59	20.60	20.67	2
		8	7	20.48	20.47	20.52	2
		15	0	20.59	20.61	20.70	2



Band/BW	Modulation	RB Size	RB Offset	Low CH 20425	Mid CH 20525	High CH 20625	MPR
				Frequency 826.5 MHz	Frequency 836.5 MHz	Frequency 846.5 MHz	
5/ 5	QPSK	1	0	22.44	22.46	22.51	0
		1	12	22.55	22.53	22.62	0
		1	24	22.46	22.47	22.57	0
		12	0	21.62	21.65	21.68	1
		12	6	21.47	21.58	21.57	1
		12	13	21.40	21.43	21.50	1
		25	0	21.50	21.58	21.58	1
	16QAM	1	0	21.70	21.76	21.82	1
		1	12	21.81	21.91	21.91	1
		1	24	21.78	21.76	21.85	1
		12	0	20.62	20.68	20.69	2
		12	6	20.56	20.64	20.63	2
		12	13	20.43	20.49	20.55	2
		25	0	20.59	20.62	20.67	2

Band/BW	Modulation	RB Size	RB Offset	Low CH 20450	Mid CH 20525	High CH 20600	MPR
				Frequency 829 MHz	Frequency 836.5 MHz	Frequency 844 MHz	
5/ 10	QPSK	1	0	22.49	22.53	22.56	0
		1	24	22.57	22.61	22.64	0
		1	49	22.51	22.55	22.58	0
		25	0	21.66	21.70	21.73	1
		25	12	21.55	21.59	21.62	1
		25	25	21.44	21.48	21.51	1
		50	0	21.56	21.60	21.63	1
	16QAM	1	0	21.77	21.81	21.84	1
		1	24	21.89	21.93	21.96	1
		1	49	21.80	21.84	21.87	1
		25	0	20.70	20.74	20.77	2
		25	12	20.62	20.66	20.69	2
		25	25	20.50	20.54	20.57	2
		50	0	20.65	20.69	20.72	2



LTE BAND 26

Band/BW	Modulation	RB Size	RB Offset	Low CH 26797	Mid CH 26915	High CH 27033	MPR
				Frequency 824.7 MHz	Frequency 836.5 MHz	Frequency 848.3 MHz	
26/ 1.4	QPSK	1	0	22.14	22.15	22.23	0
		1	2	22.40	22.34	22.47	0
		1	5	22.16	22.08	22.19	0
		3	0	22.22	22.17	22.32	0
		3	1	22.31	22.27	22.30	0
		3	3	22.14	22.08	22.19	0
		6	0	21.20	21.12	21.25	1
	16QAM	1	0	21.41	21.36	21.47	1
		1	2	21.69	21.60	21.75	1
		1	5	21.45	21.39	21.55	1
		3	0	21.25	21.21	21.30	1
		3	1	21.23	21.27	21.32	1
		3	3	21.15	21.11	21.24	1
		6	0	20.19	20.20	20.26	2

Band/BW	Modulation	RB Size	RB Offset	Low CH 26805	Mid CH 26915	High CH 27025	MPR
				Frequency 825.5 MHz	Frequency 836.5 MHz	Frequency 847.5 MHz	
26/ 3	QPSK	1	0	22.16	22.17	22.22	0
		1	7	22.36	22.35	22.47	0
		1	14	22.12	22.08	22.19	0
		8	0	21.21	21.20	21.32	1
		8	3	21.24	21.27	21.32	1
		8	7	21.11	21.15	21.23	1
		15	0	21.17	21.13	21.19	1
	16QAM	1	0	21.38	21.42	21.50	1
		1	7	21.66	21.63	21.73	1
		1	14	21.48	21.39	21.55	1
		8	0	20.21	20.22	20.30	2
		8	3	20.28	20.22	20.35	2
		8	7	20.17	20.09	20.20	2
		15	0	20.19	20.14	20.29	2



Band/BW	Modulation	RB Size	RB Offset	Low CH 26815	Mid CH 26915	High CH 27015	MPR
				Frequency 826.5 MHz	Frequency 836.5 MHz	Frequency 846.5 MHz	
26/ 5	QPSK	1	0	22.17	22.12	22.23	0
		1	12	22.41	22.32	22.47	0
		1	24	22.13	22.07	22.23	0
		12	0	21.24	21.20	21.29	1
		12	6	21.24	21.28	21.33	1
		12	13	21.15	21.11	21.24	1
		25	0	21.15	21.16	21.22	1
	16QAM	1	0	21.39	21.38	21.50	1
		1	12	21.63	21.66	21.72	1
		1	24	21.48	21.39	21.54	1
		12	0	20.21	20.20	20.27	2
		12	6	20.25	20.26	20.31	2
		12	13	20.12	20.11	20.23	2
		25	0	20.19	20.15	20.26	2

Band/BW	Modulation	RB Size	RB Offset	Low CH 26840	Mid CH 26915	High CH 26990	MPR
				Frequency 829 MHz	Frequency 836.5 MHz	Frequency 844 MHz	
26/10	QPSK	1	0	22.14	22.15	22.23	0
		1	24	22.41	22.32	22.48	0
		1	49	22.10	22.11	22.19	0
		25	0	21.25	21.19	21.32	1
		25	12	21.30	21.22	21.33	1
		25	25	21.13	21.08	21.23	1
		50	0	21.20	21.16	21.19	1
	16QAM	1	0	21.39	21.35	21.46	1
		1	24	21.68	21.62	21.75	1
		1	49	21.48	21.40	21.51	1
		25	0	20.23	20.18	20.33	2
		25	12	20.29	20.20	20.36	2
		25	25	20.11	20.12	20.20	2
		50	0	20.23	20.14	20.30	2



**BUREAU
VERITAS**

Test Report No.: RFA210218W001-4

Band/BW	Modulation	RB Size	RB Offset	Low CH 26697	Mid CH 26865	High CH 27033	MPR
				Frequency 814.7 MHz	Frequency 831.5 MHz	Frequency 848.3 MHz	
26/ 15	QPSK	1	0	22.22	22.19	22.28	0
		1	37	22.43	22.40	22.49	0
		1	74	22.18	22.15	22.24	0
		36	0	21.28	21.25	21.34	1
		36	19	21.32	21.29	21.38	1
		36	39	21.19	21.16	21.25	1
		75	0	21.21	21.18	21.27	1
	16QAM	1	0	21.46	21.43	21.52	1
		1	37	21.71	21.68	21.77	1
		1	74	21.50	21.47	21.56	1
		36	0	20.29	20.26	20.35	2
		36	19	20.31	20.28	20.37	2
		36	39	20.19	20.16	20.25	2
		75	0	20.25	20.22	20.31	2



ERP POWER (dBm)

GSM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
128	824.2	32.85	0.3	31.0	1258.93	7
189	836.4	32.95	0.3	31.1	1288.25	7
251	848.8	32.91	0.3	31.06	1276.44	7

REMARKS: ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).

EDGE

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
128	824.2	26.01	0.3	24.16	260.62	7
189	836.4	26.15	0.3	24.3	269.15	7
251	848.8	26.1	0.3	24.25	266.07	7

REMARKS: ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).

WCDMA

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
4132	826.4	22.78	0.3	20.93	123.88	7
4182	836.4	22.82	0.3	20.97	125.03	7
4233	846.6	22.8	0.3	20.95	124.45	7

REMARKS: ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).

LTE BAND 5

CHANNEL BANDWIDTH: 1.4MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20407	824.7	22.43	0.3	20.58	114.29	7
20525	836.5	22.44	0.3	20.59	114.55	7
20643	848.3	22.52	0.3	20.67	116.68	7



CHANNEL BANDWIDTH: 1.4MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20407	824.7	22.47	0.3	20.62	115.35	7
20525	836.5	22.49	0.3	20.64	115.88	7
20643	848.3	22.51	0.3	20.66	116.41	7

CHANNEL BANDWIDTH: 3MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20415	825.5	22.39	0.3	20.54	113.24	7
20525	836.5	22.44	0.3	20.59	114.55	7
20635	847.5	22.49	0.3	20.64	115.88	7

CHANNEL BANDWIDTH: 3MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20415	825.5	21.68	0.3	19.83	96.16	7
20525	836.5	21.71	0.3	19.86	96.83	7
20635	847.5	21.74	0.3	19.89	97.5	7

CHANNEL BANDWIDTH: 5MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20425	826.5	22.44	0.3	20.59	114.55	7
20525	836.5	22.41	0.3	20.56	113.76	7
20625	846.5	22.49	0.3	20.64	115.88	7

CHANNEL BANDWIDTH: 5MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20425	826.5	21.65	0.3	19.8	95.5	7
20525	836.5	21.74	0.3	19.89	97.5	7
20625	846.5	21.73	0.3	19.88	97.27	7



CHANNEL BANDWIDTH: 10MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20450	829.0	22.46	0.3	20.61	115.08	7
20525	836.5	22.49	0.3	20.64	115.88	7
20600	844.0	22.51	0.3	20.66	116.41	7

CHANNEL BANDWIDTH: 10MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20450	829.0	21.73	0.3	19.88	97.27	7
20525	836.5	21.76	0.3	19.91	97.95	7
20600	844.0	21.78	0.3	19.93	98.4	7

REMARKS: ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).

LTE BAND 26

CHANNEL BANDWIDTH: 1.4MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
26797	824.7	22.4	0.3	20.55	113.5	7
26915	836.5	22.34	0.3	20.49	111.94	7
27033	848.3	22.47	0.3	20.62	115.35	7

CHANNEL BANDWIDTH: 1.4MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
26797	824.7	21.69	0.3	19.84	96.38	7
26915	836.5	21.6	0.3	19.75	94.41	7
27033	848.3	21.75	0.3	19.9	97.72	7

CHANNEL BANDWIDTH: 3MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
26805	825.5	22.36	0.3	20.51	112.46	7
26915	836.5	22.35	0.3	20.5	112.2	7
27025	847.5	22.47	0.3	20.62	115.35	7



CHANNEL BANDWIDTH: 3MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
26805	825.5	21.66	0.3	19.81	95.72	7
26915	836.5	21.63	0.3	19.78	95.06	7
27025	847.5	21.73	0.3	19.88	97.27	7

CHANNEL BANDWIDTH: 5MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
26815	826.5	22.41	0.3	20.56	113.76	7
26915	836.5	22.32	0.3	20.47	111.43	7
27015	846.5	22.47	0.3	20.62	115.35	7

CHANNEL BANDWIDTH: 5MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
26815	826.5	21.63	0.3	19.78	95.06	7
26915	836.5	21.66	0.3	19.81	95.72	7
27015	846.5	21.72	0.3	19.87	97.05	7

CHANNEL BANDWIDTH: 10MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
26840	829	22.41	0.3	20.56	113.76	7
26915	836.5	22.32	0.3	20.47	111.43	7
26990	844	22.48	0.3	20.63	115.61	7

CHANNEL BANDWIDTH: 10MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
26840	829	21.68	0.3	19.83	96.16	7
26915	836.5	21.62	0.3	19.77	94.84	7
26990	844	21.75	0.3	19.9	97.72	7



CHANNEL BANDWIDTH: 15MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
26865	831.5	22.43	0.3	20.58	114.29	7
26915	836.5	22.4	0.3	20.55	113.5	7
26965	841.5	22.49	0.3	20.64	115.88	7

CHANNEL BANDWIDTH: 15MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
26865	831.5	21.71	0.3	19.86	96.83	7
26915	836.5	21.68	0.3	19.83	96.16	7
26965	841.5	21.77	0.3	19.92	98.17	7

REMARKS: ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).

3.2 FREQUENCY STABILITY MEASUREMENT

3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT


1.5 ppm is for base and fixed station. 2.5 ppm is for mobile station.

3.2.2 TEST PROCEDURE

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

3.2.3 TEST SETUP

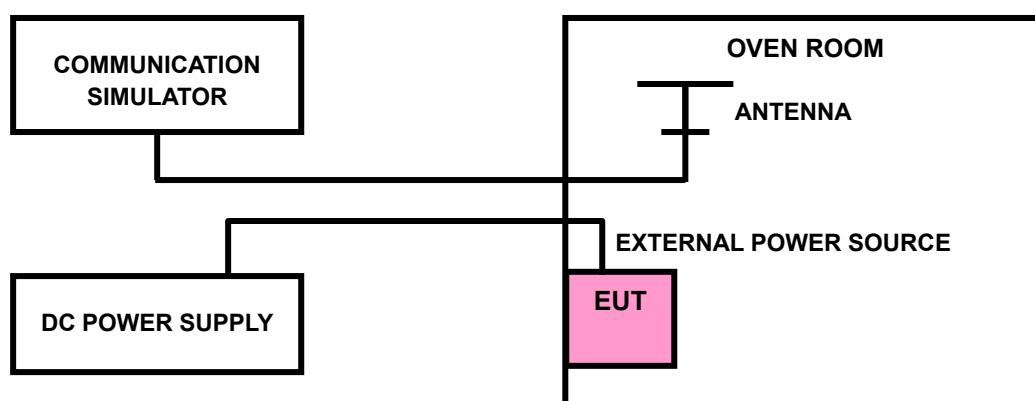



3.2.4 TEST RESULTS

GSM 850

FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	FREQUENCY ERROR (ppm)		LIMIT (ppm)
	Low Channel	High Channel	
V_{nor}	0.0021	0.0024	2.5
V_{min}	-0.0024	-0.003	2.5
V_{max}	0.0021	0.0021	2.5

NOTE: The applicant defined the normal working voltage of the battery is from V_{min} to V_{max} .

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	FREQUENCY ERROR (ppm)		LIMIT (ppm)
	Low Channel	High Channel	
-30	-0.0119	-0.0121	2.5
-20	-0.0107	-0.0108	2.5
-10	-0.0086	-0.0086	2.5
0	-0.0076	-0.0077	2.5
10	-0.0047	-0.0047	2.5
20	-0.004	-0.004	2.5
30	-0.0026	-0.0025	2.5
40	-0.002	-0.0019	2.5
50	-0.0003	-0.0001	2.5



EDGE 850

FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	FREQUENCY ERROR (ppm)		LIMIT (ppm)
	Low Channel	High Channel	
V _{nor}	0.0021	0.0025	2.5
V _{min}	-0.0026	-0.0027	2.5
V _{max}	0.0019	0.0021	2.5

NOTE: The applicant defined the normal working voltage of the battery is from V_{min} to V_{max}.

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	FREQUENCY ERROR (ppm)		LIMIT (ppm)
	Low Channel	High Channel	
-30	-0.0117	-0.0111	2.5
-20	-0.0113	-0.0089	2.5
-10	-0.0084	-0.0076	2.5
0	-0.0076	-0.006	2.5
10	-0.0052	-0.0046	2.5
20	-0.0043	-0.0032	2.5
30	-0.0028	-0.0023	2.5
40	-0.0016	-0.0008	2.5
50	-0.0002	-0.0058	2.5



WCDMA Band V

FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	FREQUENCY ERROR (ppm)		LIMIT (ppm)
	Low Channel	High Channel	
V _{nor}	0.0018	0.0018	2.5
V _{min}	-0.0022	-0.0021	2.5
V _{max}	0.0019	0.0017	2.5

NOTE: The applicant defined the normal working voltage of the battery is from 3.4Vdc to 4.2Vdc.

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	FREQUENCY ERROR (ppm)		LIMIT (ppm)
	Low Channel	High Channel	
-30	-0.0130	-0.0122	2.5
-20	-0.0109	-0.0110	2.5
-10	-0.0109	-0.0096	2.5
0	-0.0087	-0.0078	2.5
10	-0.0076	-0.0073	2.5
20	-0.0061	-0.0062	2.5
30	-0.0052	-0.0056	2.5
40	-0.0034	-0.0050	2.5
50	0.0009	0.0009	2.5

LTE Band 5

FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	1.4MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
V _{nor}	0.0019	0.0025	2.5
V _{min}	-0.0031	-0.003	2.5
V _{max}	0.0022	0.0021	2.5



**BUREAU
VERITAS**

Test Report No.: RFA210218W001-4

NOTE: The applicant defined the normal working voltage of the battery is V_{\min} to V_{\max} .

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	1.4MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.0115	-0.0111	2.5
-20	-0.0104	-0.0096	2.5
-10	-0.0082	-0.008	2.5
0	-0.0074	-0.0072	2.5
10	-0.0052	-0.0053	2.5
20	-0.0045	-0.004	2.5
30	-0.003	-0.003	2.5
40	-0.0021	-0.0022	2.5
50	-0.0003	-0.0003	2.5



FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	3MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
V _{nor}	0.0021	0.0021	2.5
V _{min}	-0.0021	-0.0025	2.5
V _{max}	0.0018	0.0018	2.5

NOTE: The applicant defined the normal working voltage of the battery is V_{min} to V_{max}.

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	3MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.012	-0.0113	2.5
-20	-0.0103	-0.0099	2.5
-10	-0.0083	-0.008	2.5
0	-0.0078	-0.0073	2.5
10	-0.0049	-0.0053	2.5
20	-0.004	-0.0039	2.5
30	-0.003	-0.0041	2.5
40	-0.0022	-0.0017	2.5
50	-0.0002	-0.0002	2.5



FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	5MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
V _{nor}	0.0021	0.0024	2.5
V _{min}	-0.0024	-0.003	2.5
V _{max}	0.0022	0.0021	2.5

NOTE: The applicant defined the normal working voltage of the battery is from V_{min} to V_{max}.

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	5MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.012	-0.011	
-20	-0.0107	-0.0098	2.5
-10	-0.0086	-0.0081	2.5
0	-0.0075	-0.0074	2.5
10	-0.0046	-0.0047	2.5
20	-0.0038	-0.004	2.5
30	-0.0033	-0.0039	2.5
40	-0.0018	-0.002	2.5
50	-0.0003	-0.0005	2.5



FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	10MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
V _{nor}	0.0024	0.0024	2.5
V _{min}	-0.003	-0.003	2.5
V _{max}	0.0026	0.0025	2.5

NOTE: The applicant defined the normal working voltage of the battery is from V_{min} to V_{max}.

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	10MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.0121	-0.0118	2.5
-20	-0.0112	-0.0107	2.5
-10	-0.0083	-0.0082	2.5
0	-0.0078	-0.0076	2.5
10	-0.0045	-0.0046	2.5
20	-0.0038	-0.0037	2.5
30	-0.0029	-0.0024	2.5
40	-0.0021	-0.0019	2.5
50	-0.0004	-0.0003	2.5



LTE Band 26

FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	1.4MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
V _{nor}	0.002	0.0024	2.5
V _{min}	-0.0031	-0.003	2.5
V _{max}	0.0021	0.0021	2.5

NOTE: The applicant defined the normal working voltage of the battery is from 3.4Vdc to 4.2Vdc.

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	1.4MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.0117	-0.0114	2.5
-20	-0.0107	-0.0106	2.5
-10	-0.0084	-0.0082	2.5
0	-0.0078	-0.0076	2.5
10	-0.005	-0.0052	2.5
20	-0.0038	-0.0037	2.5
30	-0.0026	-0.0033	2.5
40	-0.0022	-0.0021	2.5
50	-0.0001	-0.0004	2.5



FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	3MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
V _{nor}	0.0021	-0.0019	2.5
V _{min}	-0.0022	-0.0025	2.5
V _{max}	0.0018	0.0018	2.5

NOTE: The applicant defined the normal working voltage of the battery is from 3.4Vdc to 4.2Vdc.

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	3MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.0118	-0.0111	2.5
-20	-0.0103	-0.0104	2.5
-10	-0.0081	-0.0082	2.5
0	-0.0076	-0.0073	2.5
10	-0.0052	-0.0045	2.5
20	-0.0042	-0.0042	2.5
30	-0.0041	-0.0028	2.5
40	-0.0023	-0.0017	2.5
50	-0.0005	-0.0004	2.5



FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	5MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
V _{nor}	0.0021	0.0024	2.5
V _{min}	-0.0023	-0.003	2.5
V _{max}	0.0022	0.0021	2.5

NOTE: The applicant defined the normal working voltage of the battery is from 3.4Vdc to 4.2Vdc.

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	5MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.0118	-0.0111	2.5
-20	-0.0098	-0.0103	2.5
-10	-0.0084	-0.0082	2.5
0	-0.0076	-0.0072	2.5
10	-0.0046	-0.0048	2.5
20	-0.0044	-0.0039	2.5
30	-0.0041	-0.0033	2.5
40	-0.0022	-0.0015	2.5
50	-0.0004	-0.0002	2.5



FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	10MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
V _{nor}	0.0026	0.0024	2.5
V _{min}	-0.0031	-0.0031	2.5
V _{max}	0.0026	0.0023	2.5

NOTE: The applicant defined the normal working voltage of the battery is from 3.4Vdc to 4.2Vdc.

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	10MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.0113	-0.0115	2.5
-20	-0.0104	-0.0097	2.5
-10	-0.0084	-0.0083	2.5
0	-0.0075	-0.0076	2.5
10	-0.0051	-0.0051	2.5
20	-0.0042	-0.0038	2.5
30	-0.0032	-0.0031	2.5
40	-0.0023	-0.002	2.5
50	-0.0004	-0.0004	2.5



FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	15MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
V _{nor}	0.0028	0.0029	2.5
V _{min}	-0.0032	-0.0029	2.5
V _{max}	0.0025	0.0022	2.5

NOTE: The applicant defined the normal working voltage of the battery is from 3.4Vdc to 4.2Vdc.

FREQUENCY ERROR vs. TEMPERATURE.


TEMP. (°C)	15MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.0104	-0.0113	2.5
-20	-0.0099	-0.0096	2.5
-10	-0.0062	-0.0082	2.5
0	-0.0065	-0.0079	2.5
10	-0.0019	-0.0058	2.5
20	-0.0041	-0.0035	2.5
30	-0.0032	-0.0027	2.5
40	-0.0018	-0.0014	2.5
50	-0.0011	-0.0009	2.5

3.3 OCCUPIED BANDWIDTH MEASUREMENT

3.3.1 TEST PROCEDURES

The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

3.3.2 TEST SETUP

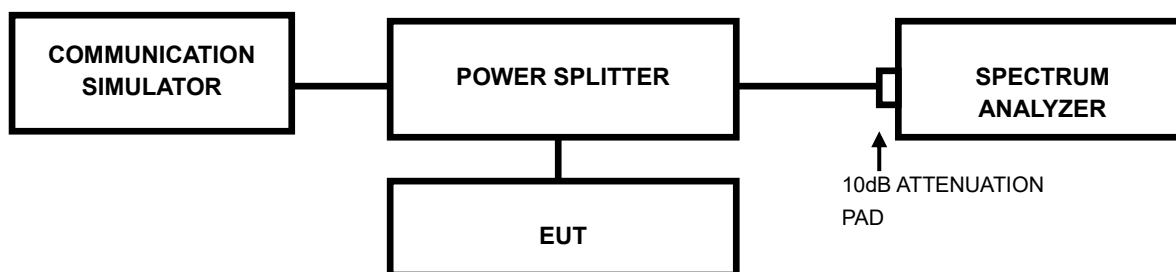




**BUREAU
VERITAS**

Test Report No.: RFA210218W001-4

3.3.3 TEST RESULTS

CHANNEL	Frequency (MHz)	99% OCCUPIED Bandwidth (kHz)		CHANNEL	Frequency (MHz)	26dB Bandwidth (kHz)	
		GSM	EDGE			GSM	EDGE
128	824.2	240.0	240.0	128	824.2	316.7	321.0
189	836.4	240.0	240.0	189	836.4	322.6	317.4
251	848.8	240.0	250.0	251	848.8	307.2	310.1

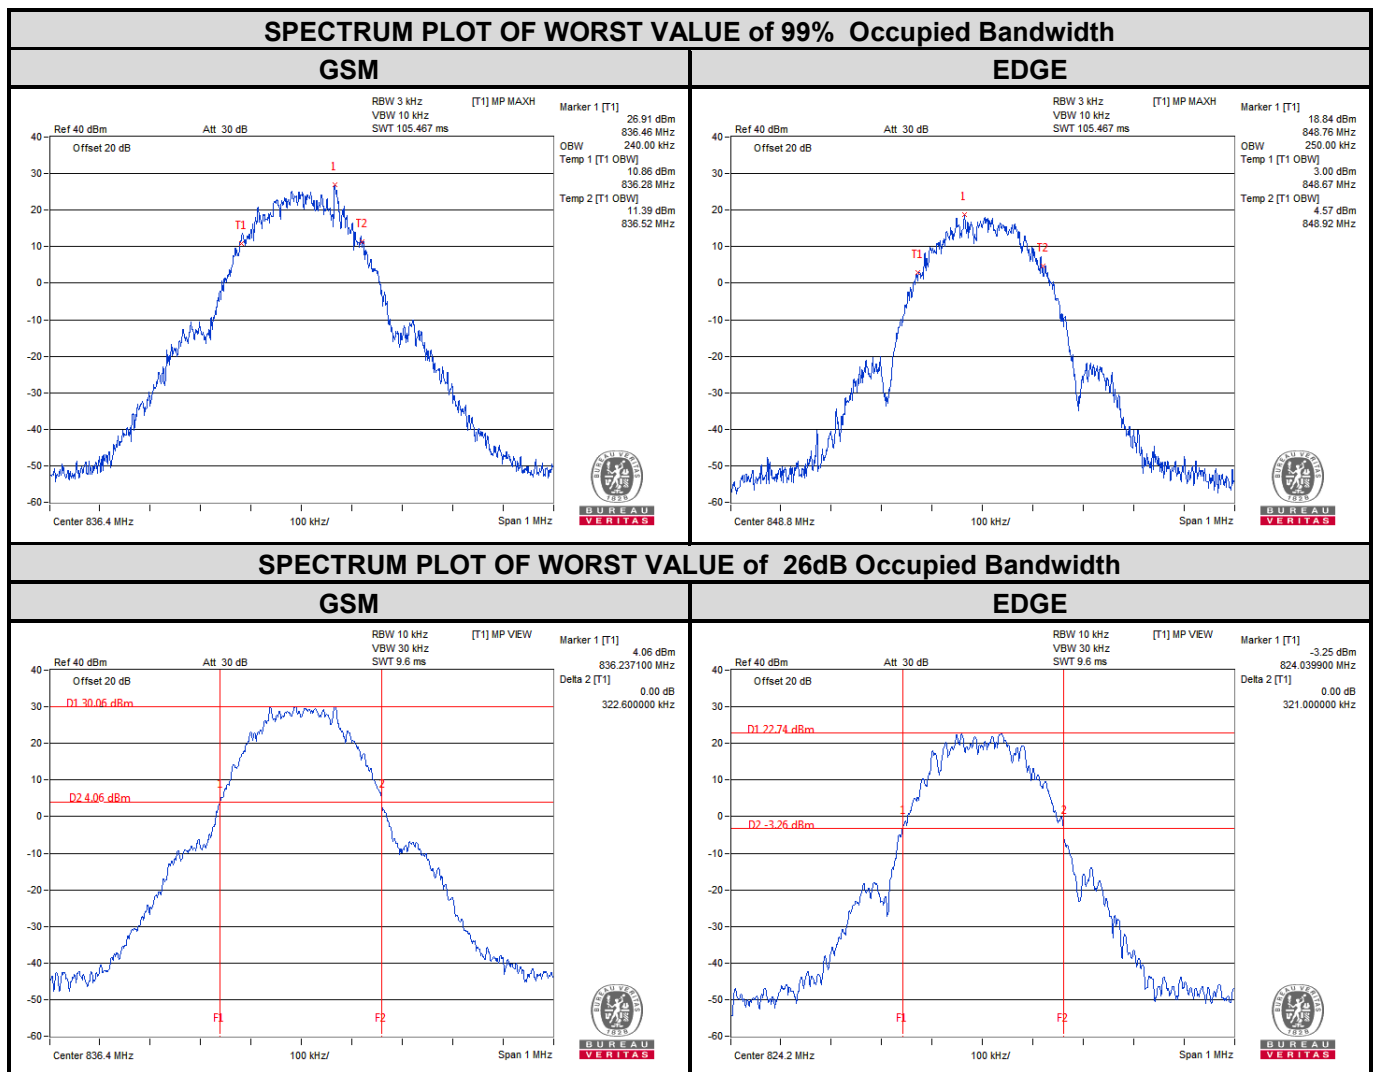




**BUREAU
VERITAS**


Test Report No.: RFA210218W001-4

CHANNEL	Frequency (MHz)	99% OCCUPIED Bandwidth (MHz)	CHANNEL	Frequency (MHz)	26dB Bandwidth (MHz)
		WCDMA V			WCDMA V
4132	826.4	4.17	4132	826.4	4.74
4182	836.4	4.16	4182	836.4	4.71
4233	846.6	4.16	4233	846.6	4.72

SPECTRUM PLOT OF WORST VALUE of 99% Occupied Bandwidth

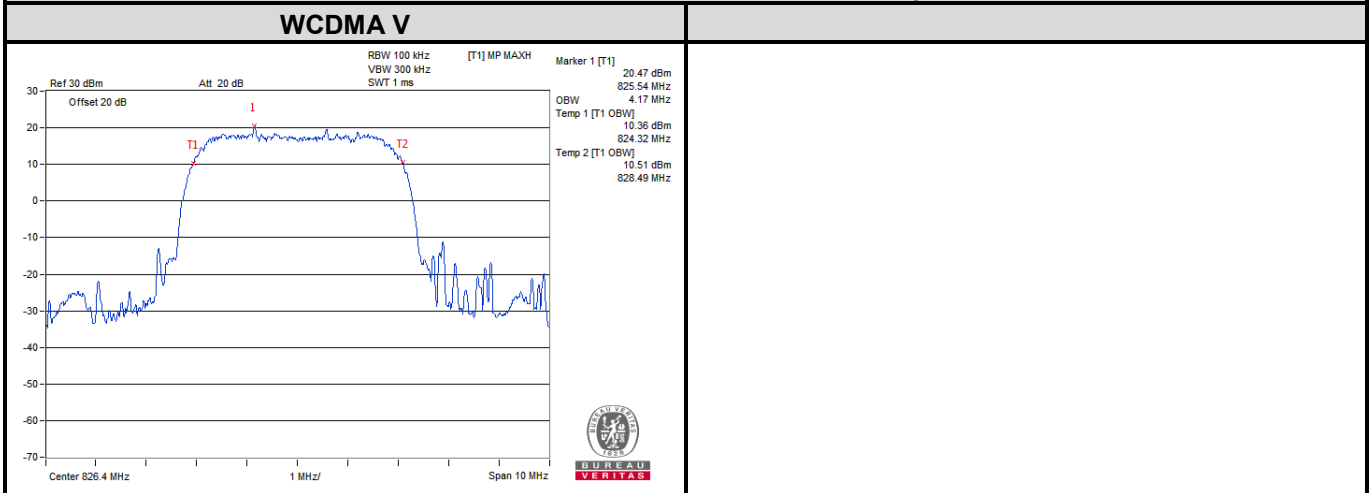


SPECTRUM PLOT OF WORST VALUE of 26dB Occupied Bandwidth

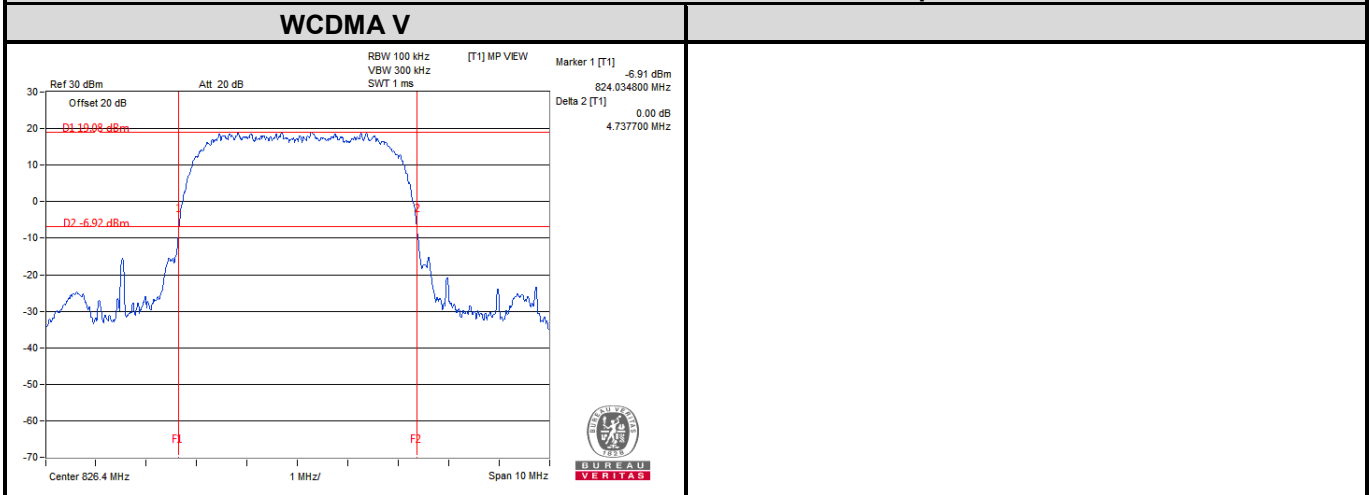




LTE BAND 5

CHANNEL BANDWIDTH: 1.4MHz							
CHANNEL	Frequency (MHz)	99% OCCUPIED Bandwidth (MHz)			26 dB bandwidth (MHz)		
		QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
20407	824.7	1.08	1.08	/	1.24	1.25	/
20525	836.5	1.08	1.08	/	1.23	1.23	/
20643	848.3	1.08	1.08	/	1.23	1.24	/

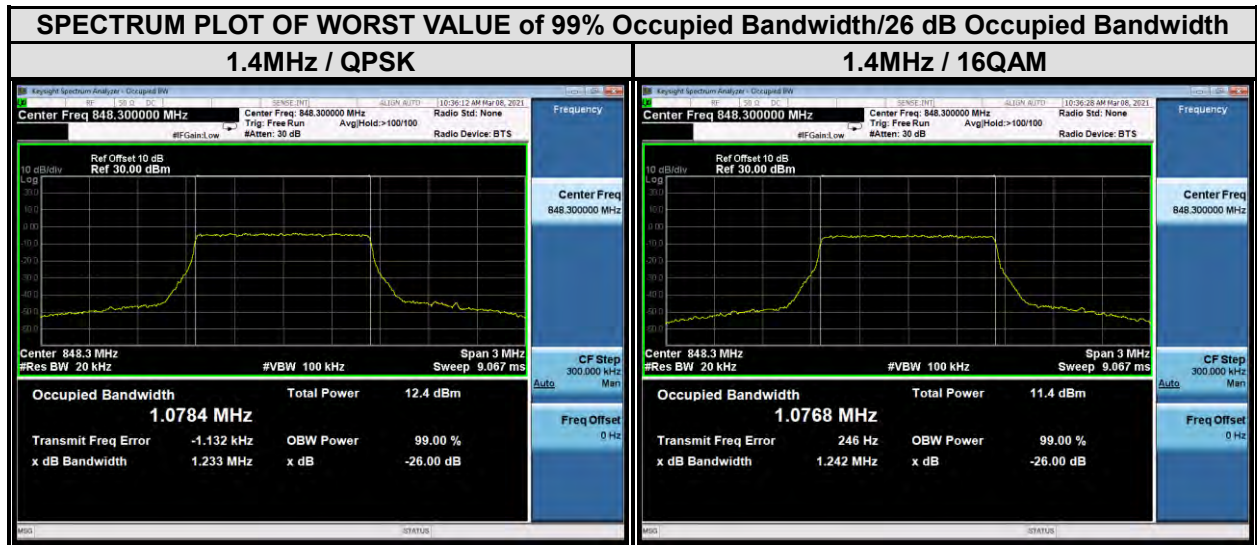



CHANNEL BANDWIDTH: 3MHz							
CHANNEL	Frequency (MHz)	99% OCCUPIED Bandwidth (MHz)			26 dB bandwidth (MHz)		
		QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
20415	825.5	2.67	2.68	/	2.82	2.82	/
20525	836.5	2.68	2.67	/	2.83	2.81	/
20635	847.5	2.68	2.68	/	2.83	2.82	/

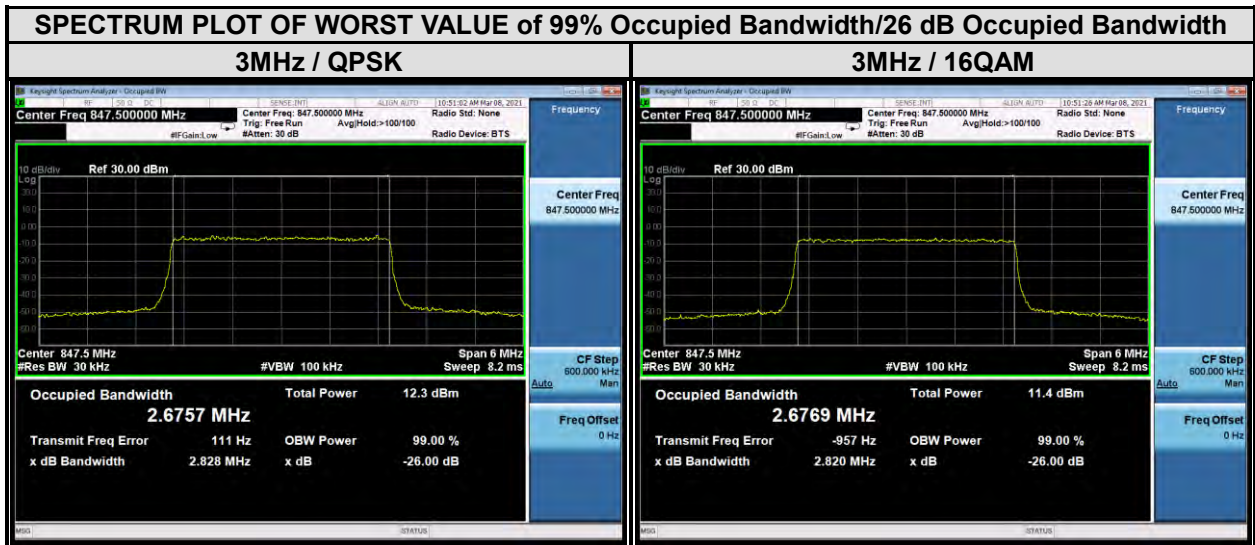



**BUREAU
VERITAS**

Test Report No.: RFA210218W001-4

CHANNEL BANDWIDTH: 5MHz							
CHANNEL	Frequency (MHz)	99% OCCUPIED Bandwidth (MHz)			26 dB bandwidth (MHz)		
		QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
20425	826.5	4.46	4.46	/	4.68	4.72	/
20525	836.5	4.47	4.46	/	4.71	4.71	/
20625	846.5	4.46	4.47	/	4.70	4.69	/






**BUREAU
VERITAS**

Test Report No.: RFA210218W001-4

CHANNEL BANDWIDTH: 10MHz							
CHANNEL	Frequency (MHz)	99% OCCUPIED Bandwidth (MHz)			26 dB bandwidth (MHz)		
		QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
20450	829	8.92	8.92	/	9.31	9.30	/
20525	836.5	8.93	8.94	/	9.30	9.28	/
20600	844	8.91	8.92	/	9.28	9.29	/

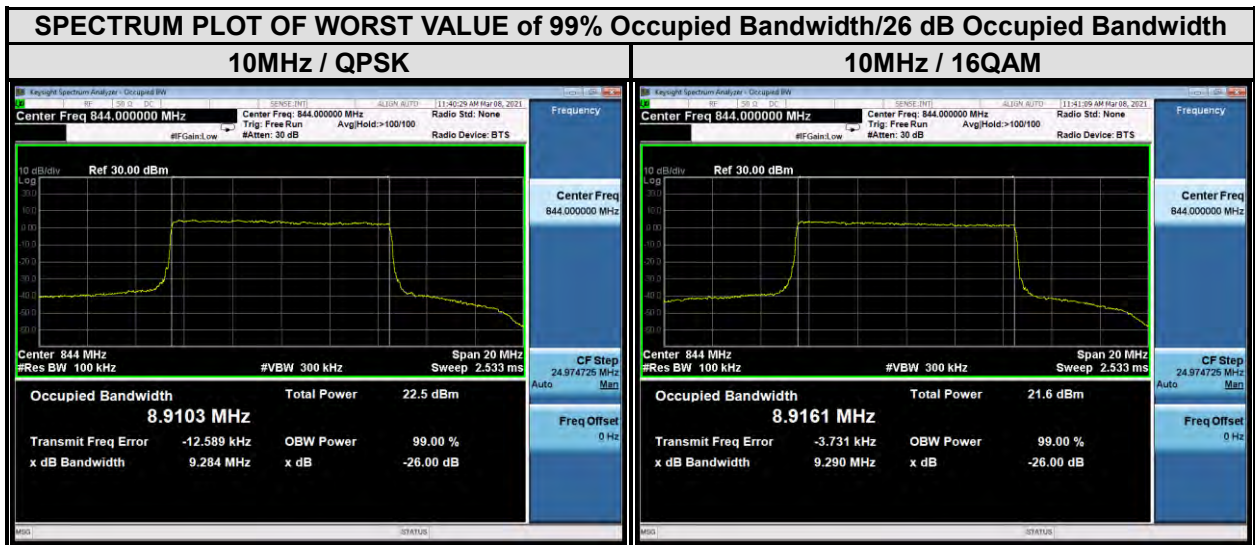




**BUREAU
VERITAS**

Test Report No.: RFA210218W001-4

LTE BAND 26

CHANNEL BANDWIDTH: 1.4MHz							
CHANNEL	Frequency (MHz)	99% OCCUPIED Bandwidth (MHz)			26 dB bandwidth (MHz)		
		QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
26797	824.7	1.08	1.08	/	1.24	1.24	/
26915	836.5	1.08	1.08	/	1.23	1.24	/
27033	848.3	1.08	1.08	/	1.22	1.23	/

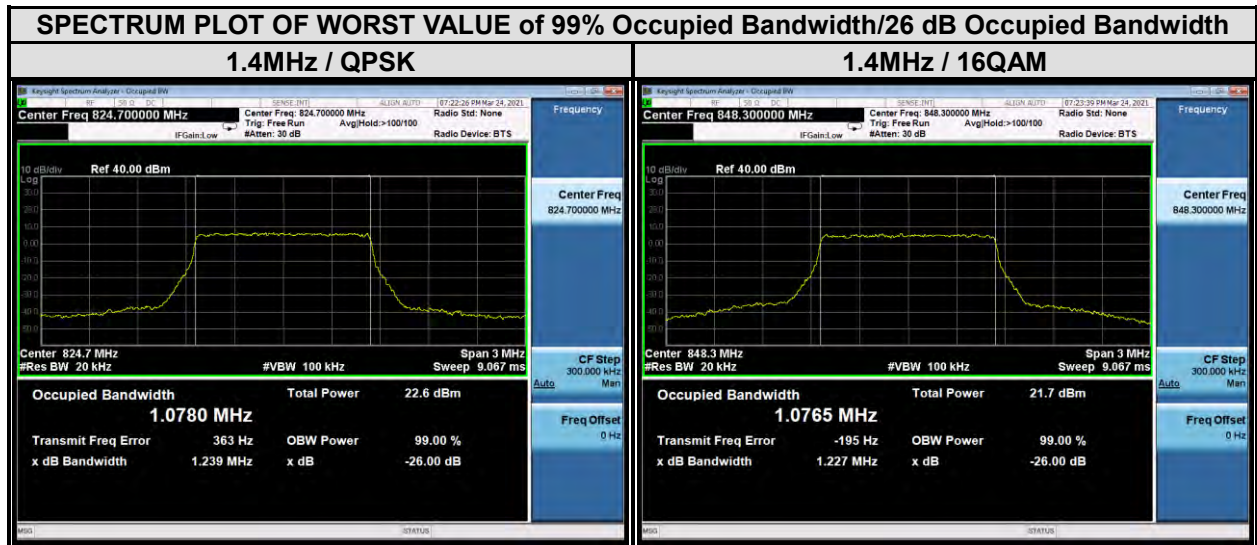




**BUREAU
VERITAS**

Test Report No.: RFA210218W001-4

CHANNEL BANDWIDTH: 3MHz							
CHANNEL	Frequency (MHz)	99% OCCUPIED Bandwidth (MHz)			26 dB bandwidth (MHz)		
		QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
26805	825.5	2.67	2.67	/	2.82	2.83	/
26915	836.5	2.68	2.67	/	2.82	2.82	/
27025	847.5	2.67	2.68	/	2.82	2.82	/

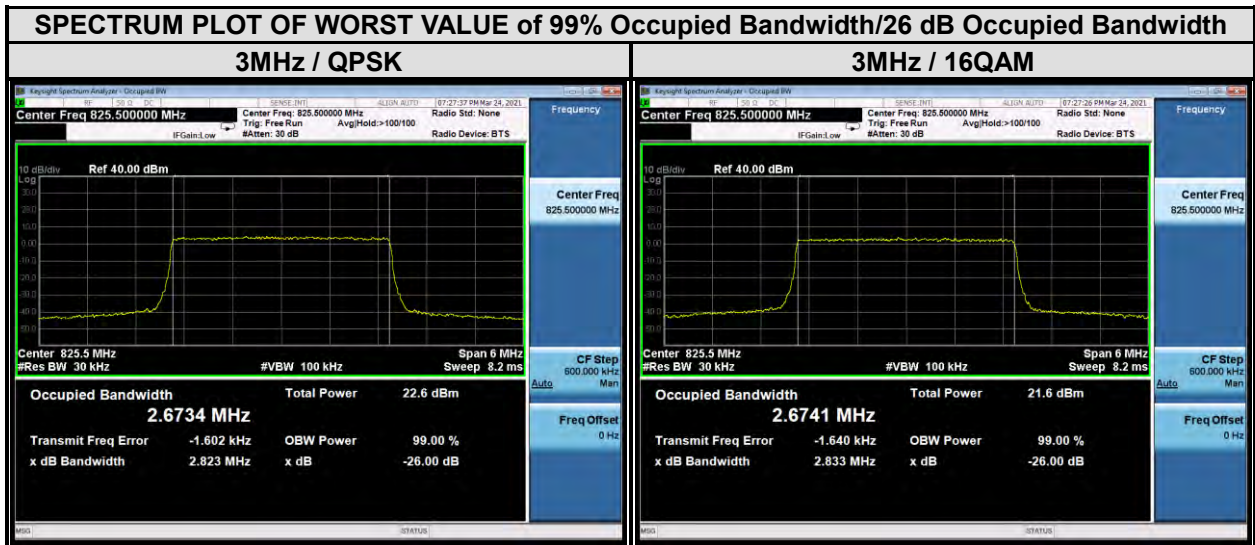




**BUREAU
VERITAS**

Test Report No.: RFA210218W001-4

CHANNEL BANDWIDTH: 5MHz							
CHANNEL	Frequency (MHz)	99% OCCUPIED Bandwidth (MHz)			26 dB bandwidth (MHz)		
		QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
26815	826.5	4.46	4.46	/	4.70	4.70	/
26915	836.5	4.46	4.46	/	4.69	4.72	/
27015	846.5	4.47	4.47	/	4.70	4.67	/

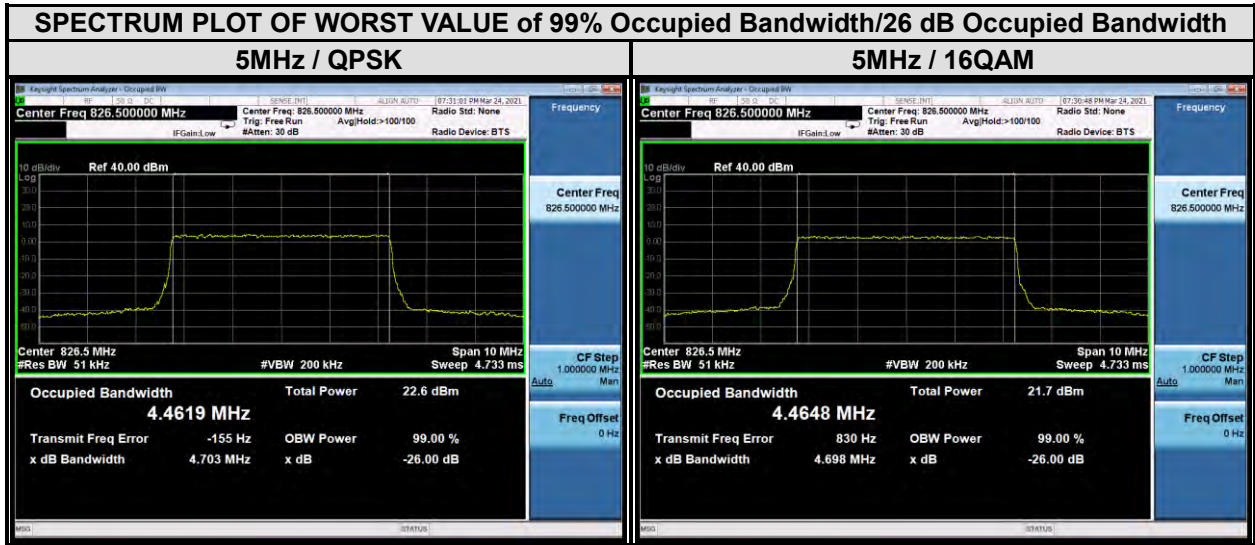




**BUREAU
VERITAS**

Test Report No.: RFA210218W001-4

CHANNEL BANDWIDTH: 10MHz							
CHANNEL	Frequency (MHz)	99% OCCUPIED Bandwidth (MHz)			26 dB bandwidth (MHz)		
		QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
26840	829	8.93	8.93	/	9.32	9.32	/
26915	836.5	8.91	8.93	/	9.30	9.31	/
26990	844	8.92	8.92	/	9.30	9.30	/

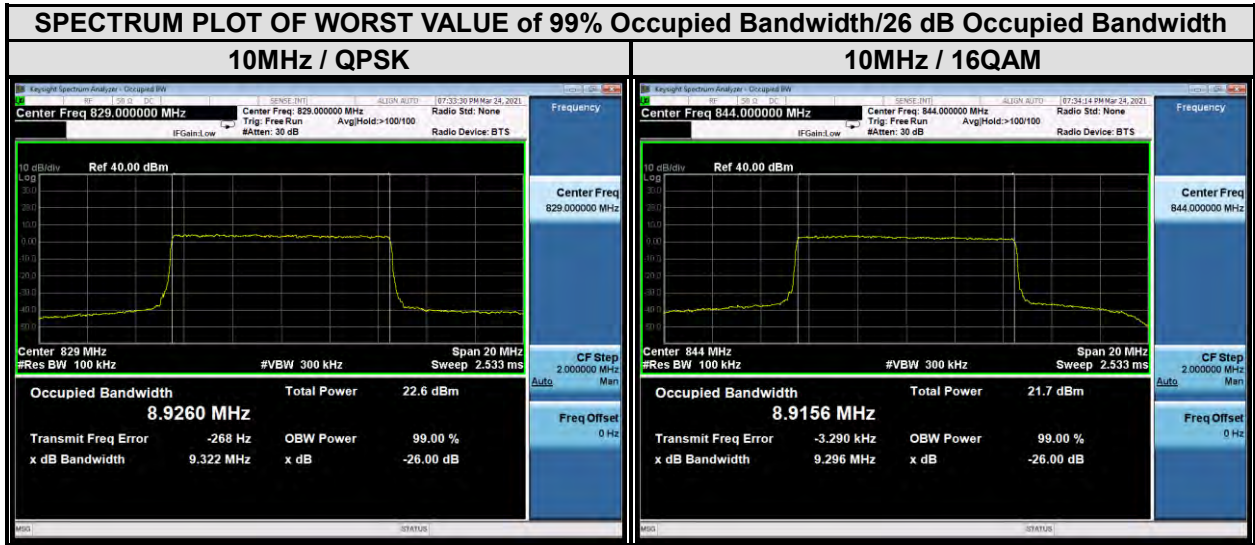




**BUREAU
VERITAS**

Test Report No.: RFA210218W001-4

CHANNEL BANDWIDTH: 15MHz							
CHANNEL	Frequency (MHz)	99% OCCUPIED Bandwidth (MHz)			26 dB bandwidth (MHz)		
		QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
26865	831.5	13.41	13.40	/	14.41	14.21	/
26915	836.5	13.39	13.42	/	14.27	14.25	/
26965	841.5	13.38	13.40	/	14.36	14.20	/

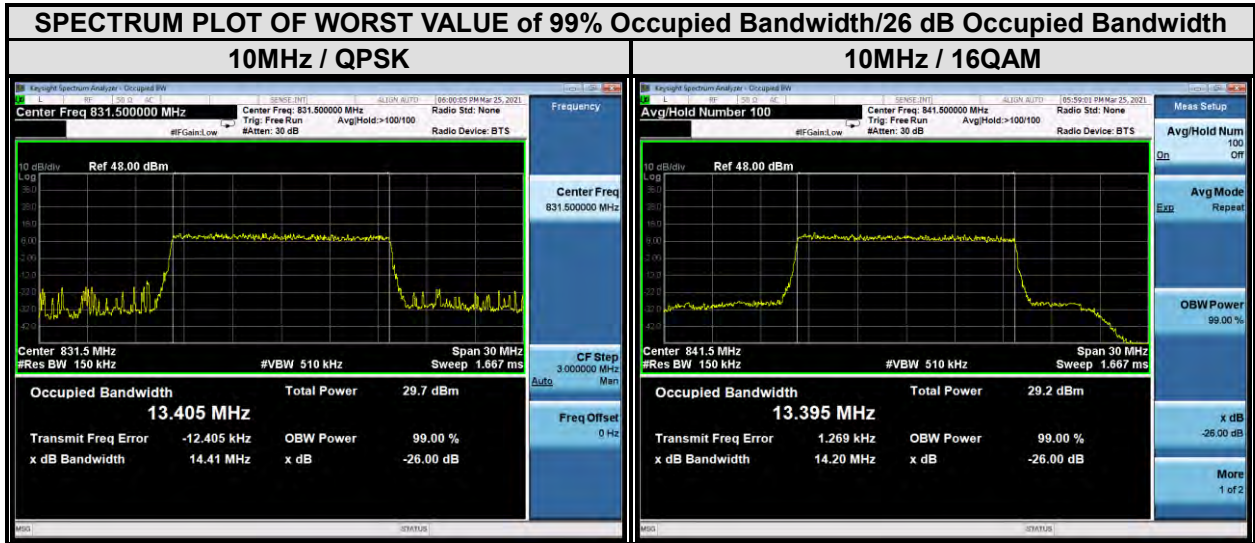




3.4 BAND EDGE MEASUREMENT

3.4.1 LIMITS OF BAND EDGE MEASUREMENT

Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

3.4.2 TEST SETUP

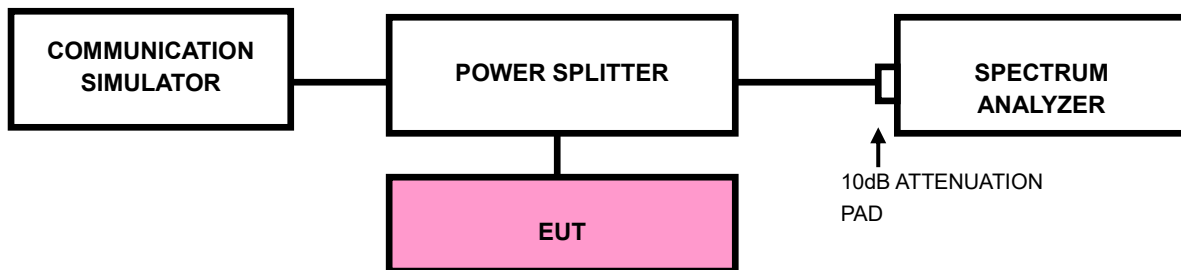



3.4.3 TEST PROCEDURES


- a. All measurements were done at low and high operational frequency range.
- b. The center frequency of spectrum is the band edge frequency and span is 1.5MHz. RBW of the spectrum is 10kHz and VBW of the spectrum is 30kHz (GSM/GPRS/EDGE).
- c. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 20kHz and VBW of the spectrum is 100 kHz. (LTE bandwidth 1.4MHz).
- d. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 30kHz and VBW of the spectrum is 100kHz. (LTE bandwidth 3MHz)
- e. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 50kHz and VBW of the spectrum is 200kHz. (LTE bandwidth 5MHz)
- f. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 100kHz and VBW of the spectrum is 300kHz. (LTE bandwidth 10MHz)
- g. Record the max trace plot into the test report.



BUREAU VERITAS

Test Report No.: RFA210218W001-4

3.4.4 TEST RESULTS

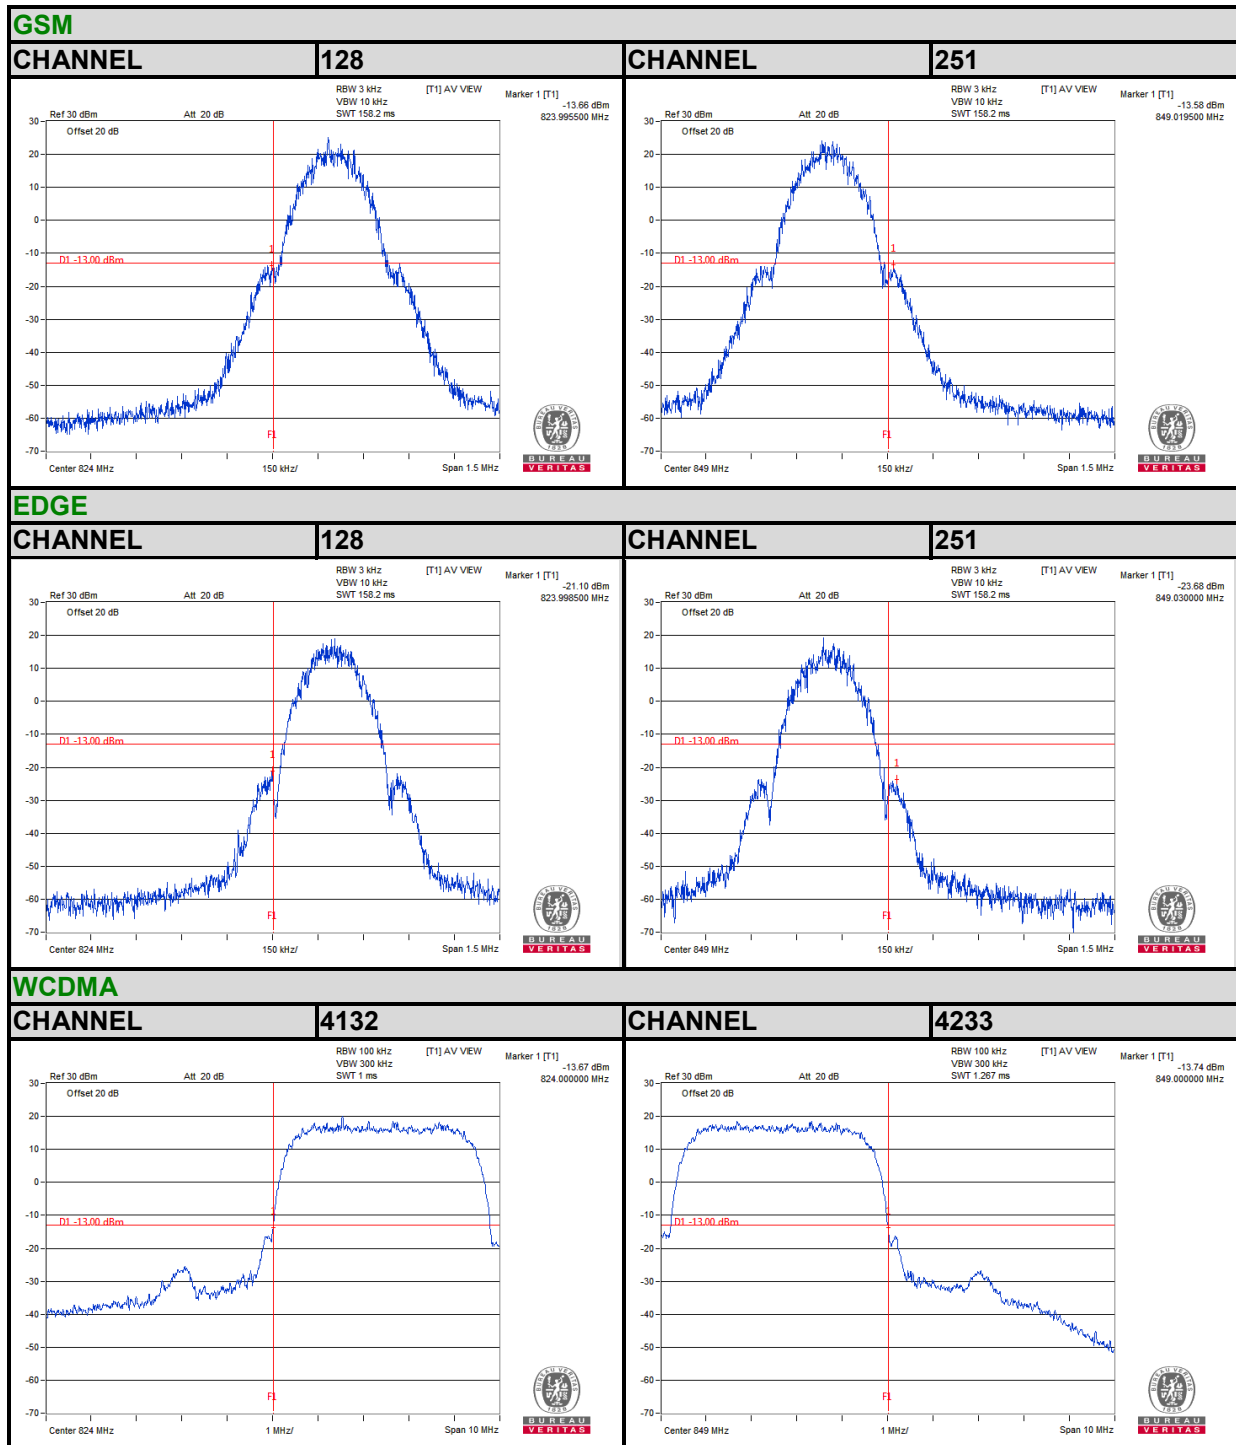



**BUREAU
VERITAS**

Test Report No.: RFA210218W001-4






BUREAU VERITAS

Test Report No.: RFA210218W001-4


LTE Band5

Channel Bandwidth: 1.4MHz 16QAM

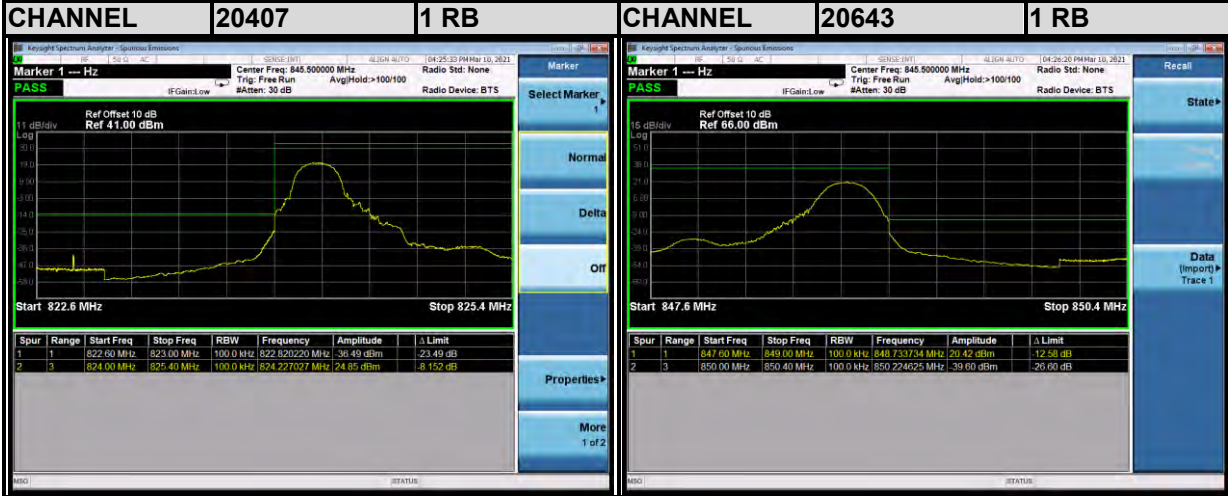

LTE Band5



Channel Bandwidth: 1.4MHz 16QAM

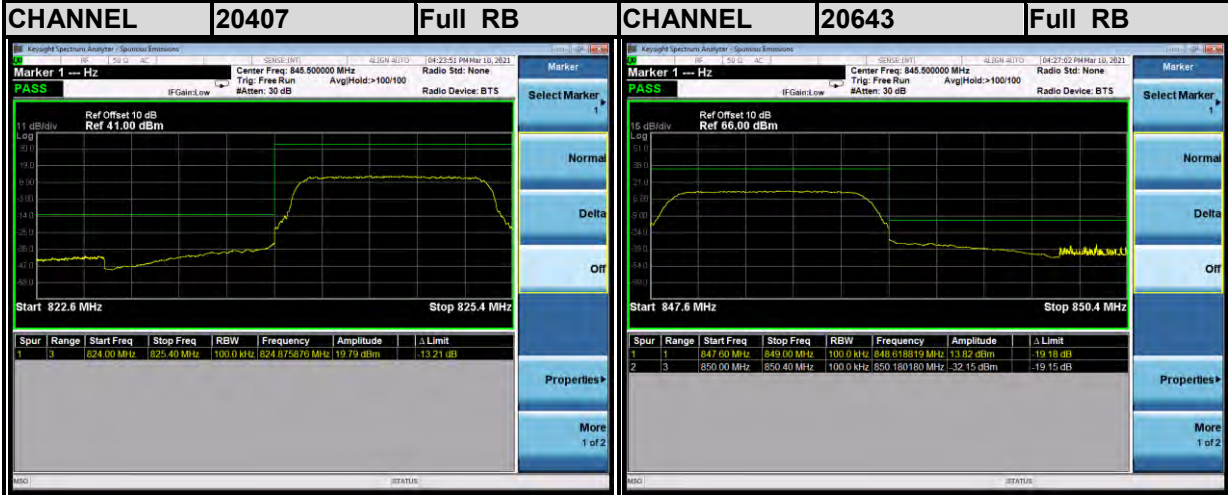



**BUREAU
VERITAS**

Test Report No.: RFA210218W001-4

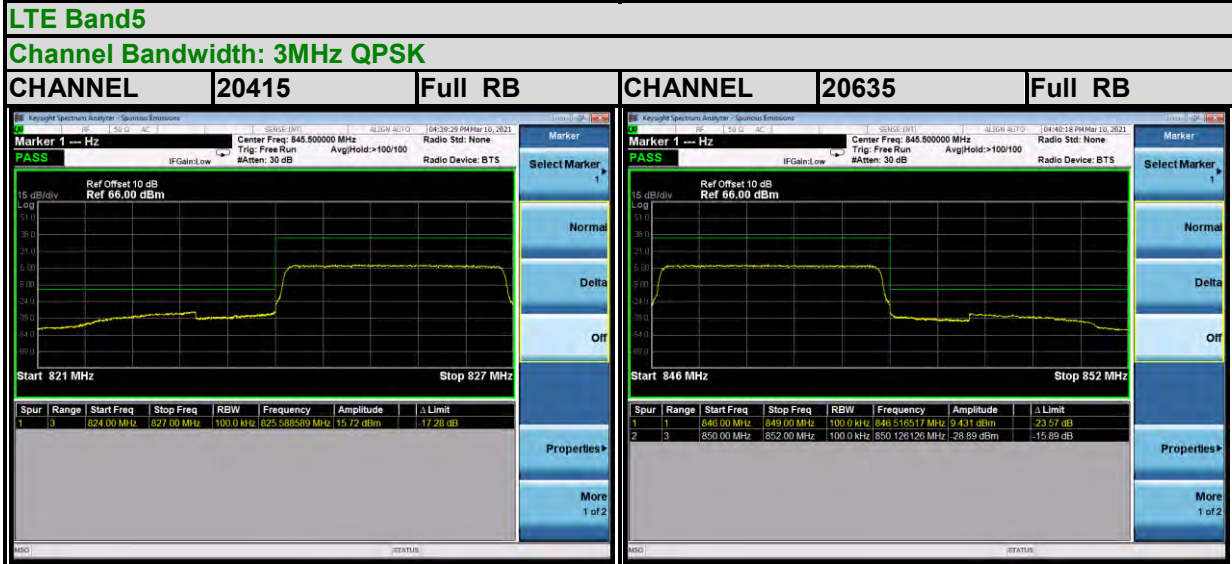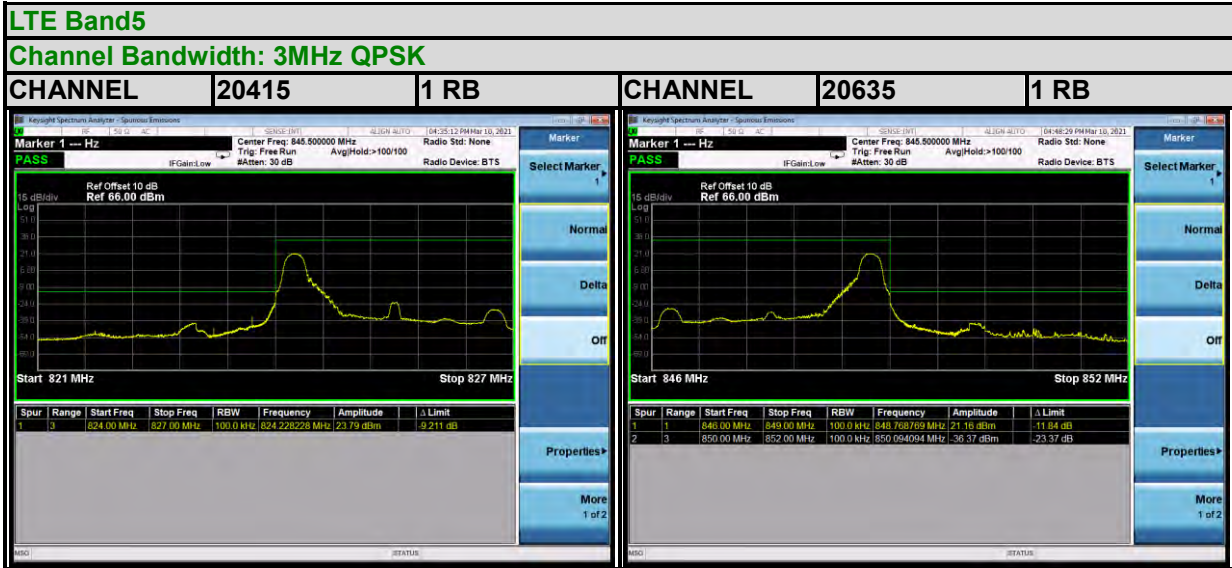




**BUREAU
VERITAS**

Test Report No.: RFA210218W001-4


LTE Band5

Channel Bandwidth: 3MHz 16QAM

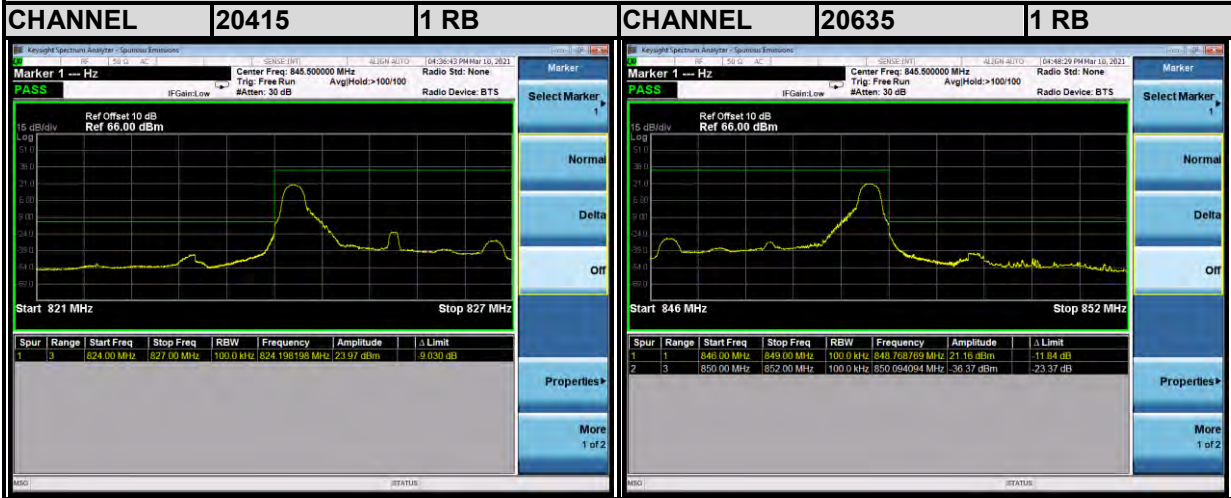

LTE Band5



Channel Bandwidth: 3MHz 16QAM

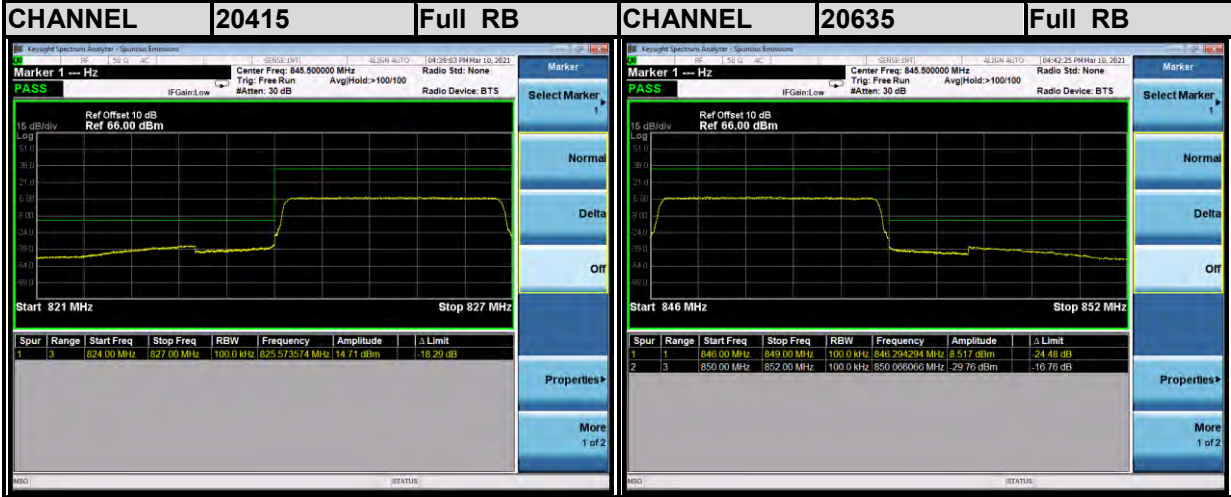



BUREAU VERITAS

Test Report No.: RFA210218W001-4

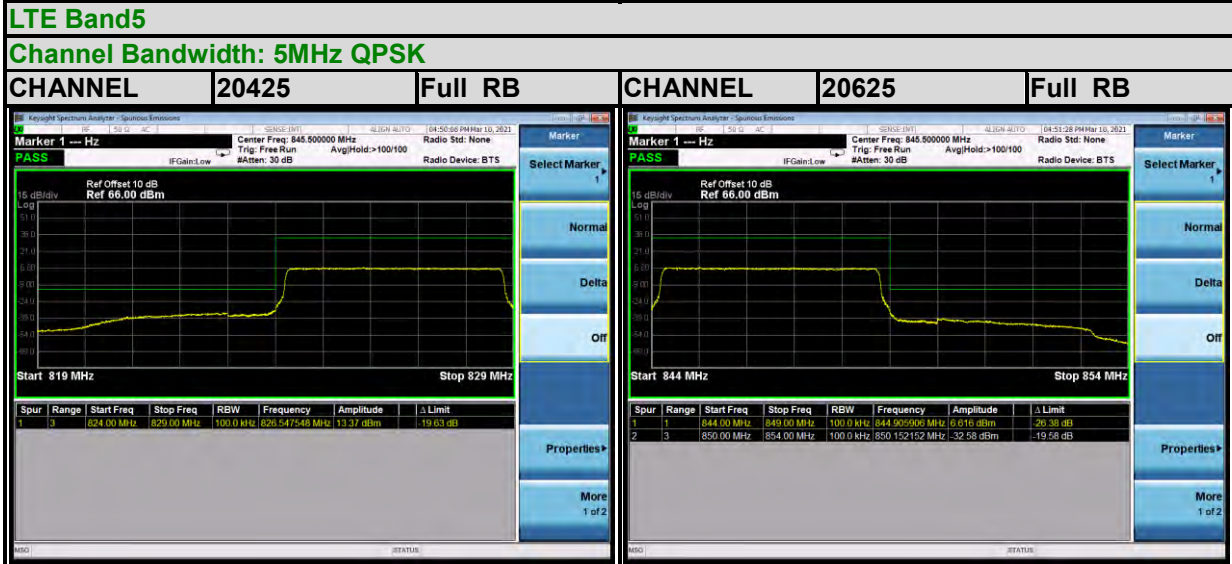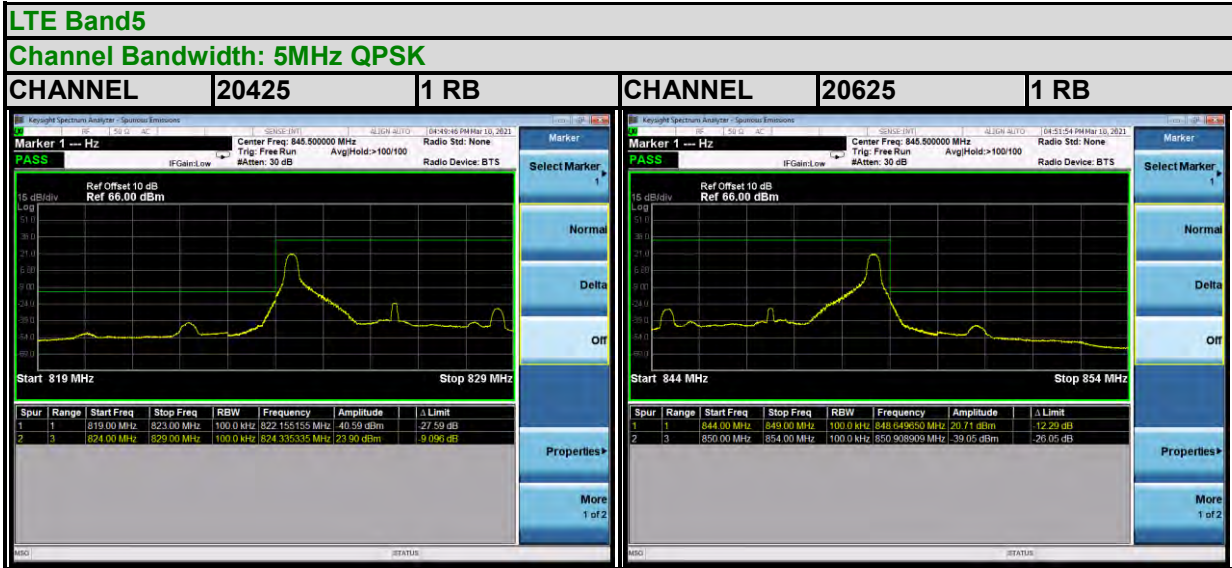




BUREAU VERITAS

Test Report No.: RFA210218W001-4


LTE Band5

Channel Bandwidth: 5MHz 16QAM

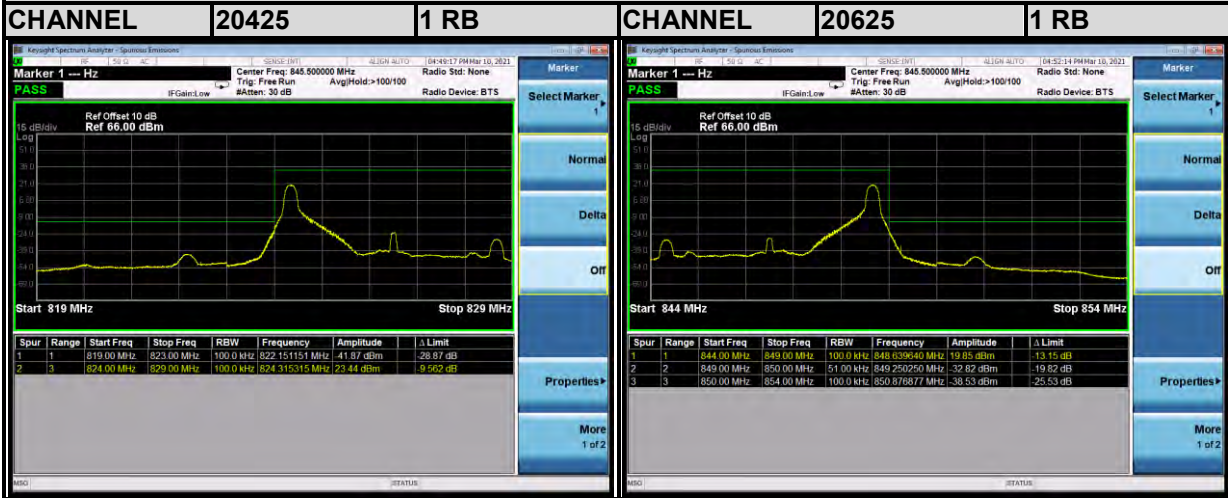

LTE Band5

Channel Bandwidth: 5MHz 16QAM

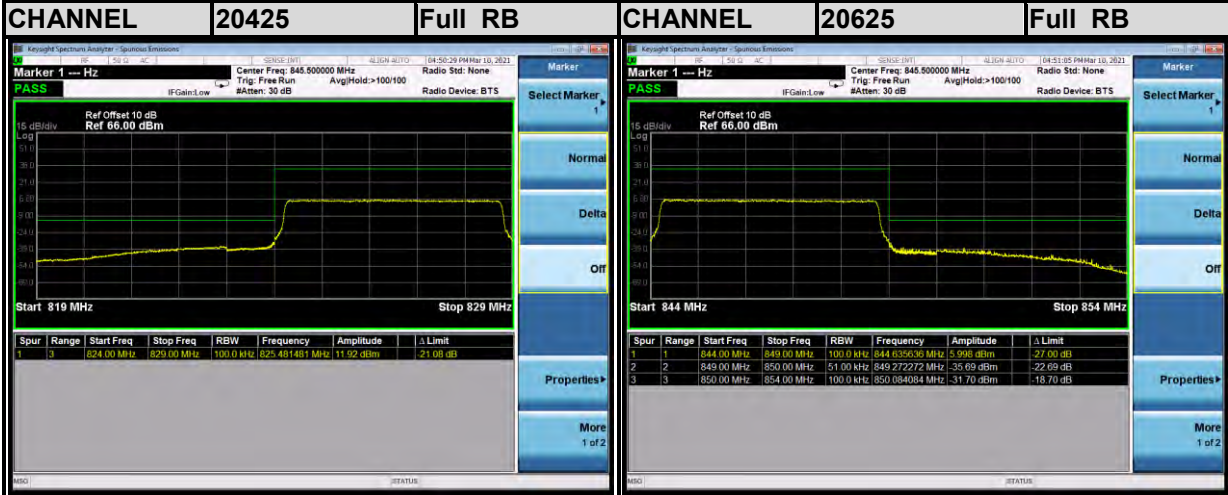




BUREAU
VERITAS

Test Report No.: RFA210218W001-4


LTE Band5

Channel Bandwidth: 10MHz QPSK

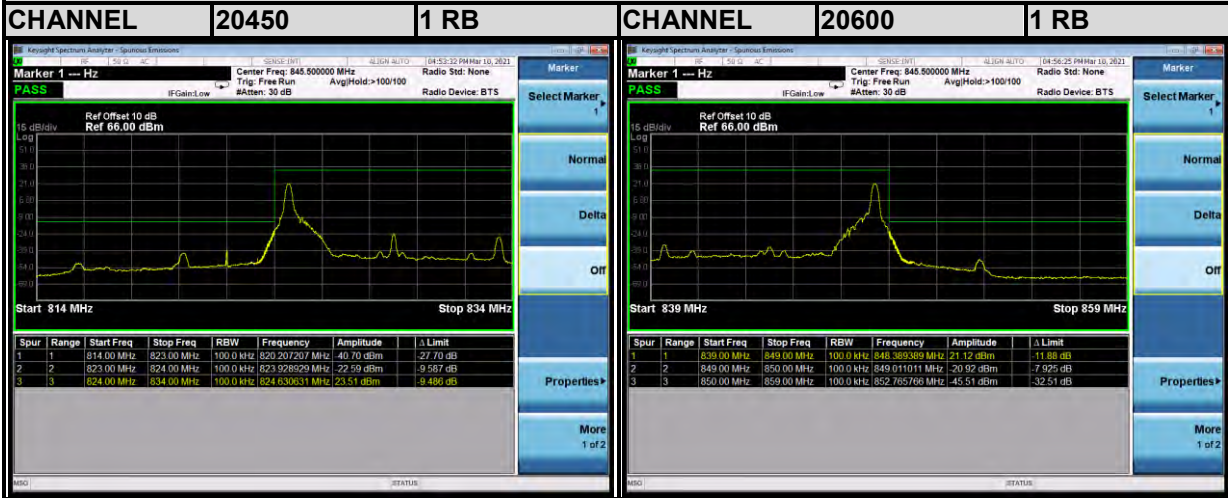

LTE Band5


Channel Bandwidth: 10MHz QPSK

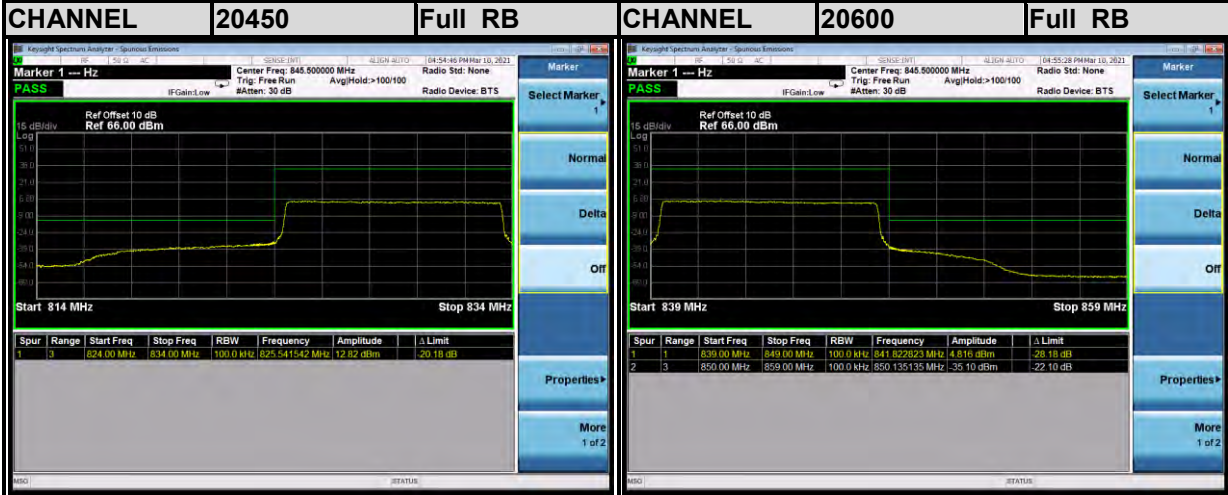



**BUREAU
VERITAS**



Test Report No.: RFA210218W001-4

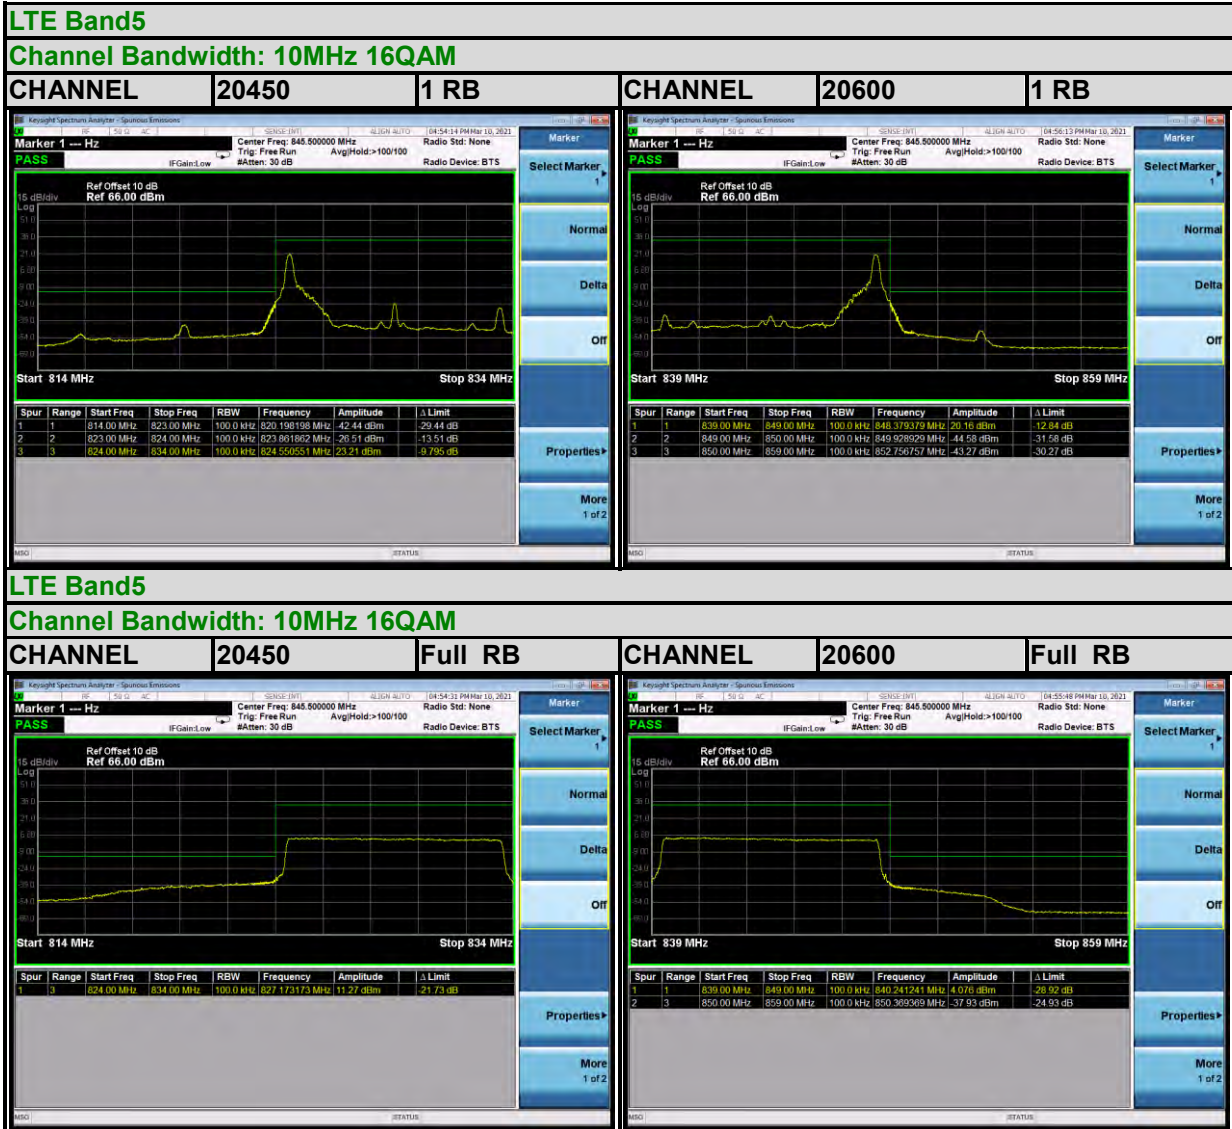



BUREAU VERITAS

Test Report No.: RFA210218W001-4

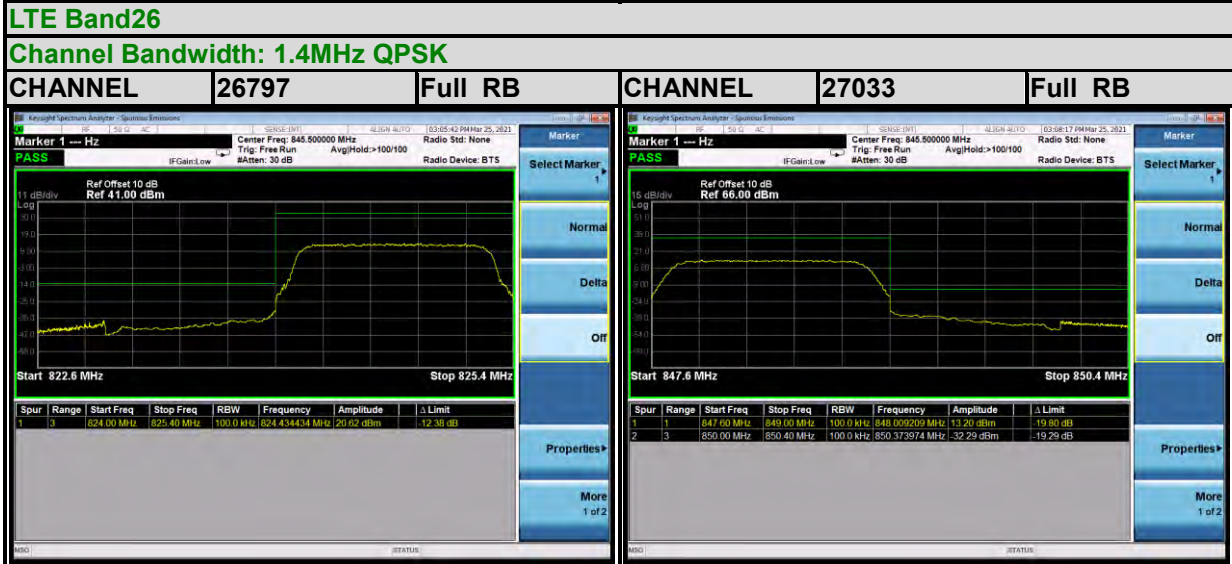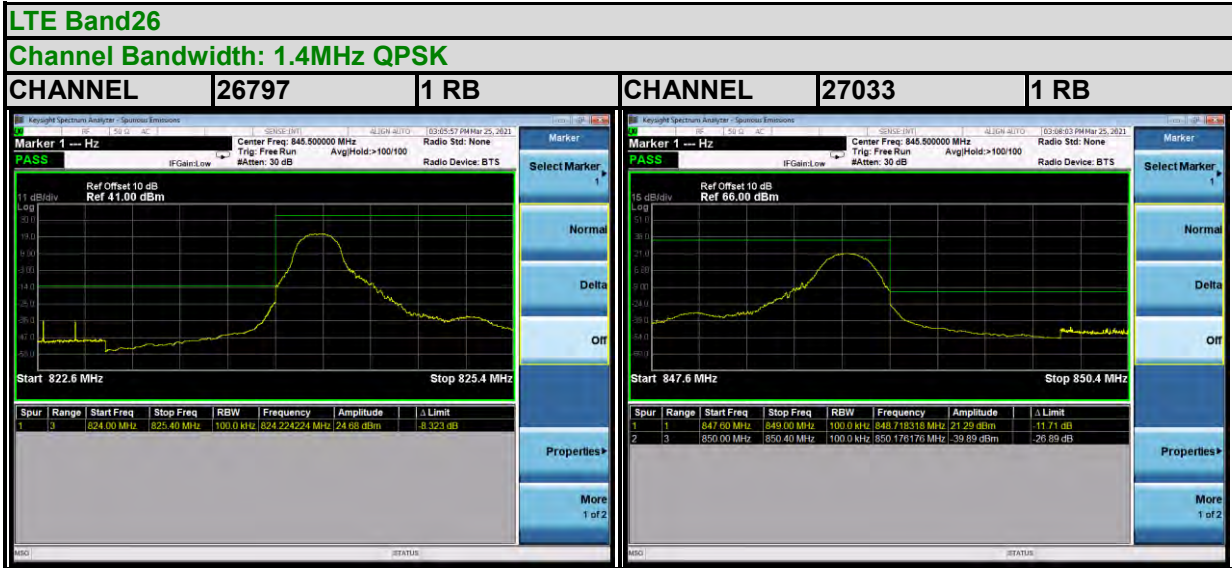



**BUREAU
VERITAS**

Test Report No.: RFA210218W001-4


LTE Band26

Channel Bandwidth: 1.4MHz 16QAM



LTE Band26

Channel Bandwidth: 1.4MHz 16QAM

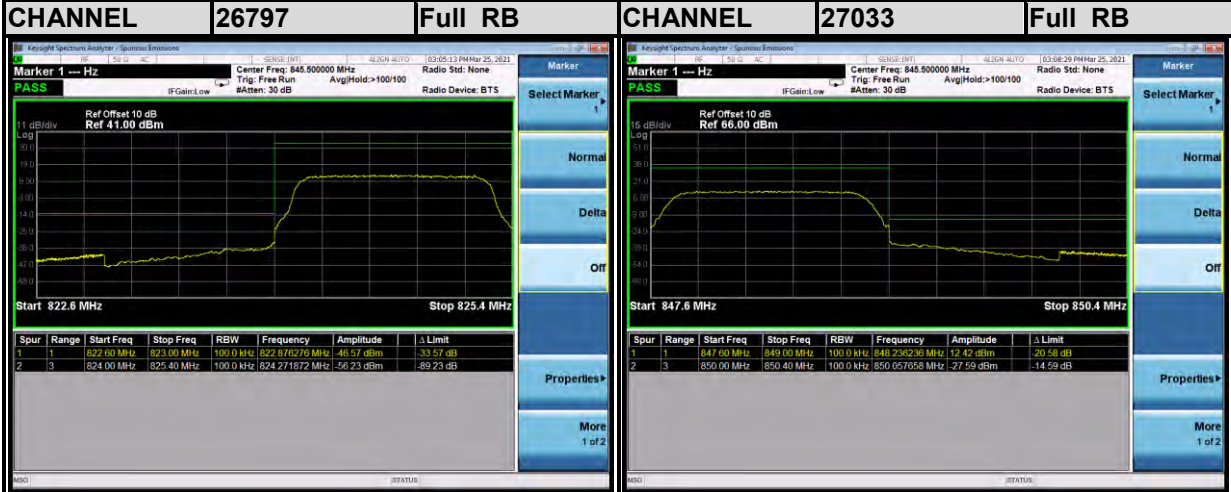




LTE Band26

Channel Bandwidth: 3MHz QPSK


CHANNEL 26805 1 RB CHANNEL 27025 1 RB

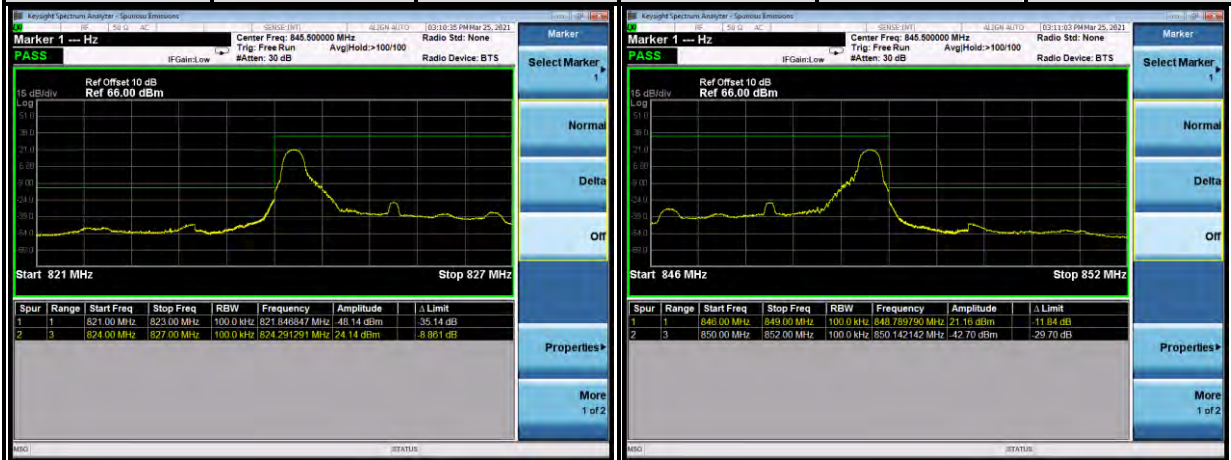

LTE Band26

Channel Bandwidth: 3MHz QPSK


CHANNEL 26805 Full RB CHANNEL 27025 Full RB

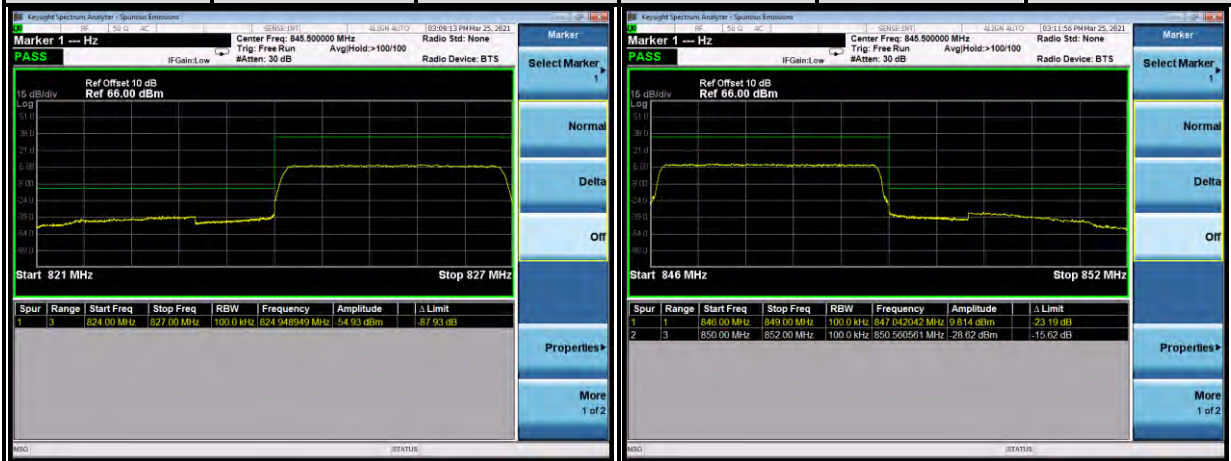




LTE Band26

Channel Bandwidth: 3MHz 16QAM

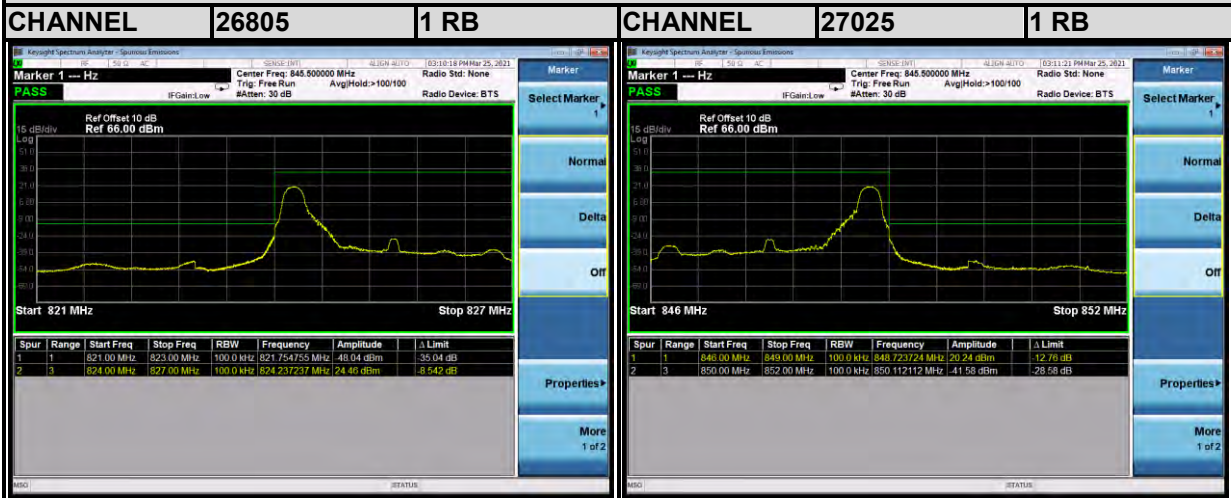

LTE Band26



Channel Bandwidth: 3MHz 16QAM

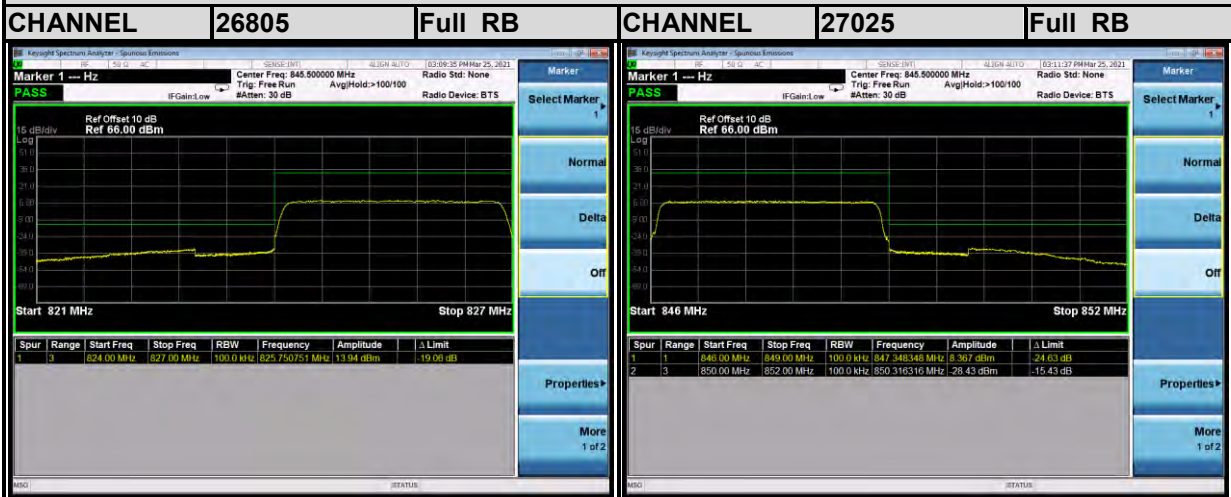



BUREAU VERITAS

Test Report No.: RFA210218W001-4

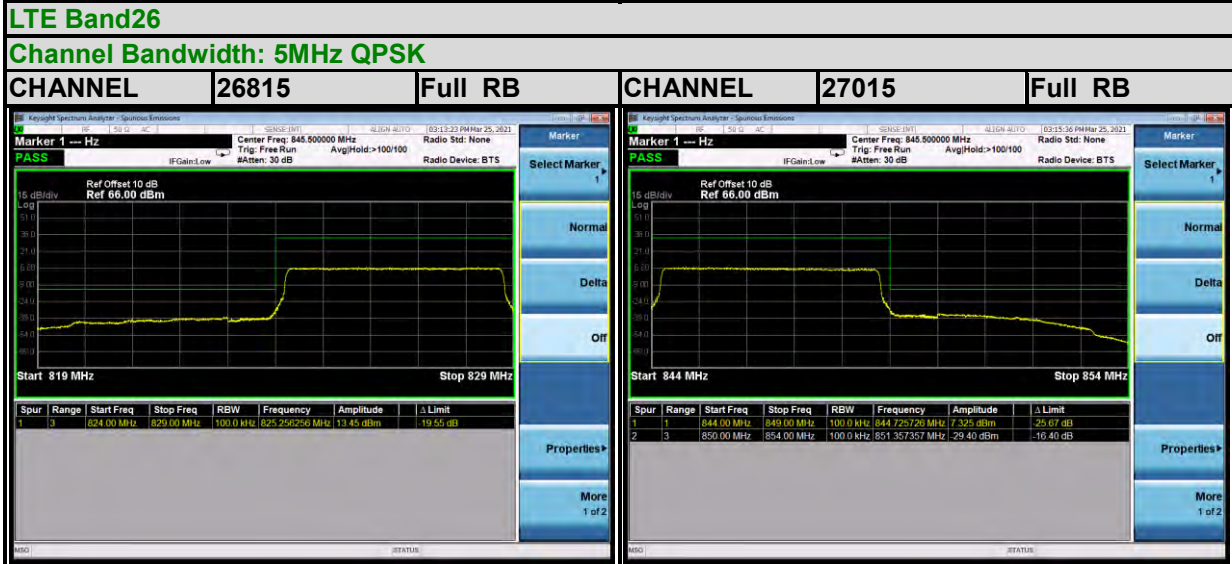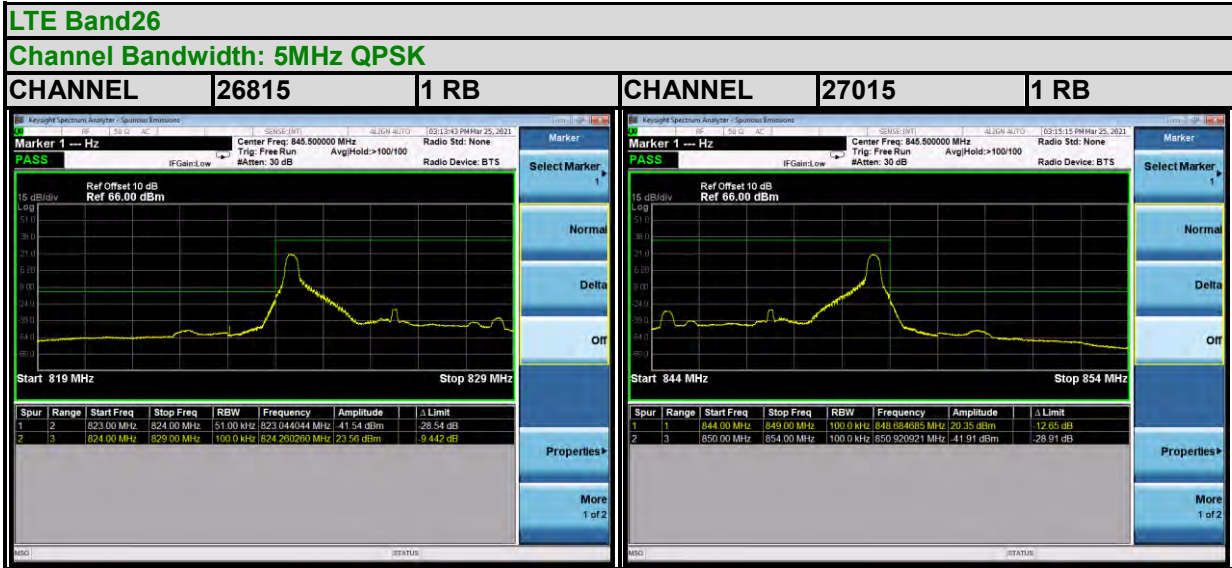




BUREAU VERITAS

Test Report No.: RFA210218W001-4


LTE Band26

Channel Bandwidth: 5MHz 16QAM

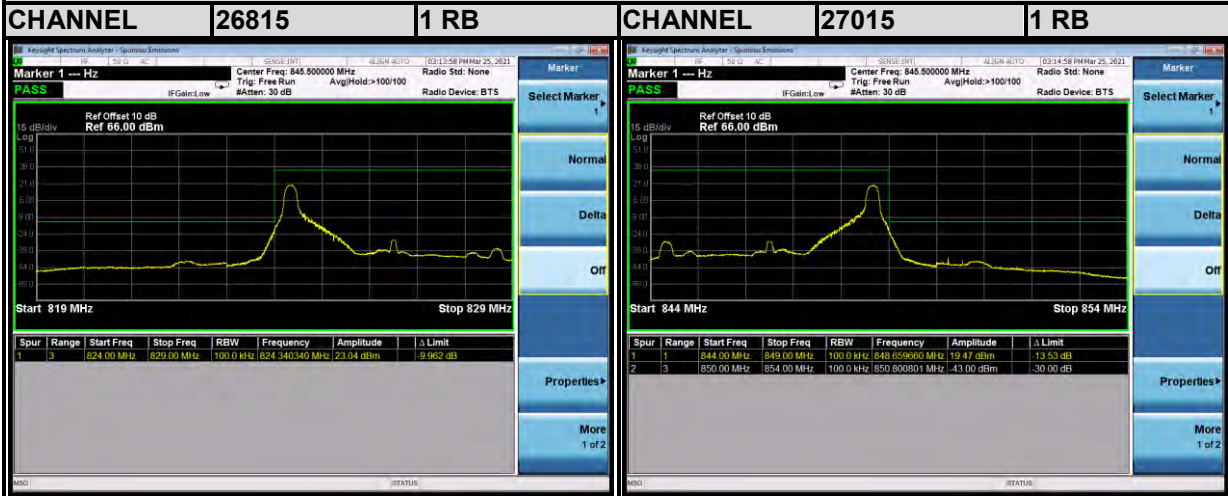

LTE Band26

Channel Bandwidth: 5MHz 16QAM

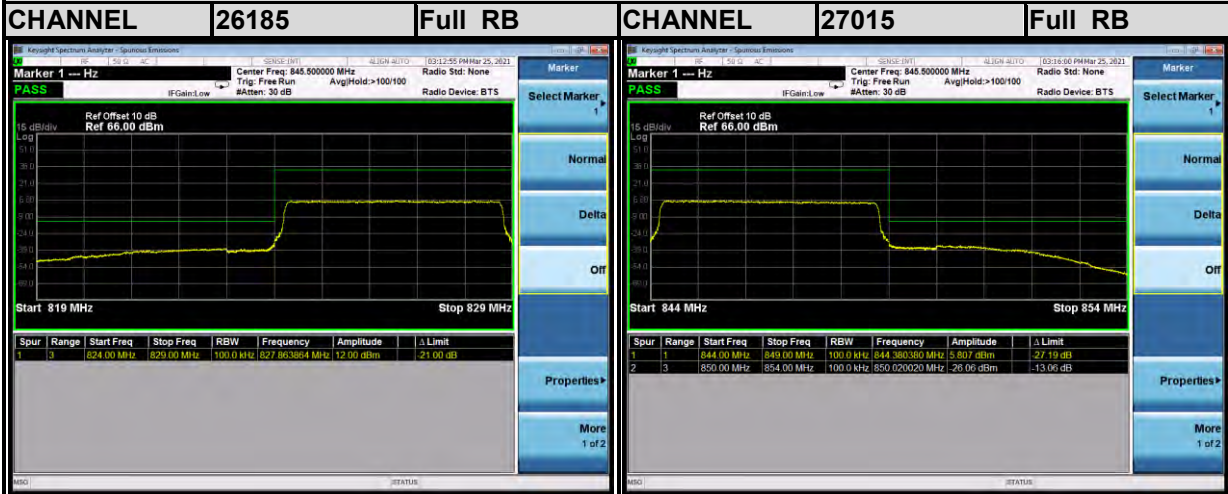



BUREAU VERITAS

Test Report No.: RFA210218W001-4

