



BUREAU
VERITAS

Test Report No.: RF180827W002-2



FCC TEST REPORT (Part 15, Subpart C)



Applicant:	Lenovo(Shanghai) Electronics Technology Co., Ltd.
Address:	NO.68 BUILDING, 199 FENJU RD, China (Shanghai) Pilot Free Trade Zone, 200131, CHINA

Manufacturer or Supplier	Lenovo PC HK Limited
Address	23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay, Hong Kong
Product	Portable Tablet Computer
Brand Name	Lenovo
Model Name	Lenovo TB-X705F
FCC ID	O57TBX705F
Date of tests	Aug. 28, 2018 ~ Sep. 25, 2018

The tests have been carried out according to the requirements of the following standard:

- FCC Part 15, Subpart C, Section 15.247
- ANSI C63.10-2013

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Roger Li Engineer / Mobile Department	Approved by Sam Tung Manager / Mobile Department
	
Date: Sep. 26, 2018	Date: Sep. 26, 2018

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1 SUMMARY OF TEST RESULTS.....	5
1.1 MEASUREMENT UNCERTAINTY	5
2 GENERAL INFORMATION	6
2.1 GENERAL DESCRIPTION OF EUT	6
2.2 DESCRIPTION OF TEST MODES	8
2.2.1 CONFIGURATION OF SYSTEM UNDER TEST	9
2.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	9
2.3 DUTY CYCLE OF TEST SIGNAL	11
2.4 GENERAL DESCRIPTION OF APPLIED STANDARDS	12
2.5 DESCRIPTION OF SUPPORT UNITS	12
3 TEST TYPES AND RESULTS.....	13
3.1 CONDUCTED EMISSION MEASUREMENT	13
3.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	13
3.1.2 TEST INSTRUMENTS.....	13
3.1.3 TEST PROCEDURES	14
3.1.4 DEVIATION FROM TEST STANDARD	14
3.1.5 TEST SETUP.....	15
3.1.6 EUT OPERATING CONDITIONS.....	15
3.1.7 TEST RESULTS	15
3.2 RADIATED EMISSION MEASUREMENT	16
3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	16
3.2.2 TEST INSTRUMENTS.....	17
3.2.3 TEST PROCEDURES	18
3.2.4 DEVIATION FROM TEST STANDARD	18
3.2.5 TEST SETUP.....	19
3.2.6 EUT OPERATING CONDITIONS.....	20
3.2.7 TEST RESULTS	21
3.3 6 DB BANDWIDTH MEASUREMENT	40
3.3.1 LIMITS OF 6DB BANDWIDTH MEASUREMENT	40
3.3.2 TEST INSTRUMENTS.....	40
3.3.3 TEST PROCEDURE.....	40
3.3.4 DEVIATION FROM TEST STANDARD	41
3.3.5 TEST SETUP.....	41



3.3.6	EUT OPERATING CONDITIONS	41
3.3.7	EUT OPERATING CONDITIONS	41
3.4	CONDUCTED OUTPUT POWER.....	42
3.4.1	LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT	42
3.4.2	TEST SETUP	42
3.4.3	TEST INSTRUMENTS.....	42
3.4.4	TEST PROCEDURES	42
3.4.5	DEVIATION FROM TEST STANDARD	42
3.4.6	EUT OPERATING CONDITIONS	42
3.4.7	TEST RESULTS	43
3.4.7.1	MAXIMUM PEAK OUTPUT POWER	43
3.4.7.2	AVERAGE OUTPUT POWER (FOR REFERENCE).....	45
3.5	POWER SPECTRAL DENSITY MEASUREMENT	47
3.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	47
3.5.2	TEST SETUP	47
3.5.3	TEST INSTRUMENTS.....	47
3.5.4	TEST PROCEDURE	47
3.5.5	DEVIATION FROM TEST STANDARD	47
3.5.6	EUT OPERATING CONDITION	47
3.5.7	TEST RESULTS	47
3.6	OUT OF BAND EMISSION MEASUREMENT	48
3.6.1	LIMITS OF OUT OF BAND EMISSION MEASUREMENT	48
3.6.2	TEST SETUP	48
3.6.3	TEST INSTRUMENTS.....	48
3.6.4	TEST PROCEDURE	48
3.6.5	DEVIATION FROM TEST STANDARD	49
3.6.6	EUT OPERATING CONDITION	49
3.6.7	TEST RESULTS	49
4	PHOTOGRAPHS OF THE TEST CONFIGURATION	50
5	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	51



BUREAU
VERITAS

Test Report No.: RF180827W002-2

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF180528C19-1 RF180528C19-3	Original release	Jun. 25, 2018
RF180827W002-2	Based on the original report RF180528C19-1 & RF180528C19-3 change the structure of Earphone port & Box trough, add alloy stents and remove patch & sheet steel.	Sep. 26, 2018



1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Recorded in Report No.:RF180528C19-1.
15.205 15.209	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -5.16dB at 2390MHz.
15.247(d)	Out of band Emission Measurement	PASS	Recorded in Report No.:RF180528C19-1.
15.247(a)(2)	6dB bandwidth	PASS	Recorded in Report No.:RF180528C19-1.
15.247(b)	Conducted Output power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Recorded in Report No.:RF180528C19-1.
15.203	Antenna Requirement	PASS	Recorded in Report No.:RF180528C19-1.

1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in ETSI TR 100 028-2001:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.66dB
Radiated emissions	9KHz ~ 30MHz	2.68dB
	30MHz ~ 1GMHz	3.26dB
	1GHz ~ 18GHz	4.48dB
	18GHz ~ 40GHz	4.12dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.



2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Portable Tablet Computer
BRAND NAME	Lenovo
MODEL NAME	Lenovo TB-X705F
NOMINAL VOLTAGE	5.0Vdc (adapter or host equipment) 3.85V (Li-ion, battery)
MODULATION TECHNOLOGY	DSSS, OFDM, DTS
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM BT-LE(GFSK) for DTS
TRANSMISSION RATE	802.11b: 11/ 5.5/ 2.0 / 1.0 Mbps 802.11g: 54/ 48/ 36 / 24 / 18 / 9/ 6 Mbps 802.11n: up to 135 Mbps BT_LE: 1 Mbps
OPERATING FREQUENCY	2412-2462MHz for 11b/g/n(HT20) 2422-2452MHz for 11n(HT40) 2402-2480MHz for BT-LE(GFSK)
MAX. OUTPUT POWER	WLAN: 147.571mW (Maximum) BT-LE: 1.000mW (Maximum)
ANTENNA TYPE	monopole Antenna with -2.47dBi gain
HW VERSION	Lenovo Tablet TB-X705F
SW VERSION	TB-X705F_RF01_20180518
I/O PORTS	Refer to user's manual
CABLE SUPPLIED	USB cable: non-shielded, detachable, 1.0m

NOTE:

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- The EUT incorporates a SISO function. Physically, the EUT provides one transmitter and one receiver.

MODULATION MODE	TX/RX FUNCTION
802.11b	1TX /1RX
802.11g	1TX /1RX
802.11n (20MHz)	1TX /1RX
802.11n (40MHz)	1TX /1RX
BT_LE	1TX /1RX



3. There were Sample A, B, C and D for this project, the difference is as below:

SAMPLE	EUT CONFIGURATION INFORMATION
A	LCD Panel 1+Photo Camera 1+Photo Camera 3+CPU1+EMMC1+DDR1+speaker
B	LCD Panel 1+Photo Camera 1+Photo Camera 3+CPU1+EMMC3+DDR3+speaker
C	LCD Panel 2+Photo Camera 2+Photo Camera 4+CPU 1+EMMC2+DDR2+speaker
D	LCD Panel 2+Photo Camera 2+Photo Camera 4+CPU 1+EMMC4+DDR4+speaker

4. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.

LIST OF ACCESSORIES:

ACCESSORIES	BRAND	MODEL	SPECIFICATION
AC Adapter 1	Salom	SC-41	I/P:100-240Vac, 300mA O/P: 5Vdc, 2000mA
AC Adapter 2	AcBel	SC-41	I/P:100-240Vac, 300mA O/P: 5Vdc, 2000mA
Battery 1	SCUD	L16D2P31	Rating: 3.85Vdc, 7000mAh
Battery 2	Celxpert	L16D2P31	Rating: 3.85Vdc, 7000mAh
USB Cable 1(White)	LiQi	LQ-02300039	1.0m shielded cable w/o core
USB Cable 2(Black)	LiQi	LQ-02300040	1.0m shielded cable w/o core
LCD Panel1	BOE	TV101WUM-LL0/TV101WUM-LL1	10.1 "
LCD Panel2	INNOLUX	P101KZD-AF0/P101KZD-AF1	10.1 "
EMMC1+DDR1	SAMSUNG	KMGD6001BM-B421(3+32)	32G
EMMC2+DDR2	HYNIX	H9TQ26ADFTBCUR-KUM(3+32)	32G
EMMC3+DDR3	SAMSUNG	KMRH60014A-B614(4+64)	64G
EMMC4+DDR4	HYNIX	H9TQ52ACLTMCUR-KUM(4+64)	64G
Speaker	Keysound	QM171219AM48	-
motor1	AWA	YK2455R	-
Motor2	Baolong	BLX-431320S	-
Photo Camera 1	O-film	L8856A00	8M AF
Photo Camera 2	Q-tech	F8856CB	8M AF
Photo Camera 3	Lcetron	LE5132FM	5M AF
Photo Camera 4	Holitech	MF80G	5M AF
CPU	Qualcomm	SDA-450-A-792NSP-TR-01-0-AA	792nsp
Main Broad 1	huashen	W92ME1B3-3-03	-
Main Broad 2	yilianda	W92ME1B3-3-05	-
BT/WLAN Module	Qualcomm	WCN-3680B-0-79BWLNSP	-

Remark: USB cable 1 and USB cable 2 is identical, difference models are for color distinguished. Therefore, only USB cable 1 is as a representative for final test.

**2.2 DESCRIPTION OF TEST MODES**

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

7 channels are provided for 802.11n (HT40):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

40 channels are provided for BT-LE (GFSK):

CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480



2.2.1 CONFIGURATION OF SYSTEM UNDER TEST

Please see section 5 photographs of the test configuration for reference.

2.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case was found when positioned on Y axis for radiated emission. Following test modes were selected for the final test, and the final worst case is marked in boldface and recorded in the report:

EUT CONFIGURE MODE	APPLICABLE TO				MODE
	RE<1G	RE≥1G	PLC	APCM	
-	√	√	√	√	-

Where **RE<1G**: Radiated Emission below 1GHz **RE≥1G**: Radiated Emission above 1GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

NOTE: No need to concern of Conducted Emission due to the EUT is powered by battery.

RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11n HT40	3 to 9	9	OFDM	BPSK	13.5
BT-LE	0 to 39	0	DTS	GFSK	1

**RADIATED EMISSION TEST (ABOVE 1GHz):**

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	CCK	DBPSK	1.0
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
802.11n HT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n HT40	3 to 9	3, 6, 9	OFDM	BPSK	13.5
BT-LE	0 to 39	0,19, 39	DTS	GFSK	1

POWER LINE CONDUCTED EMISSION TEST:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11n HT40	3 to 9	9	OFDM	BPSK	13.5

BANDEDGE MEASUREMENT:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 11	CCK	DBPSK	1.0
802.11g	1 to 11	1, 11	OFDM	BPSK	6.0
802.11n HT20	1 to 11	1, 11	OFDM	BPSK	6.5
802.11n HT40	3 to 9	3, 9	OFDM	BPSK	13.5
BT-LE	0 to 39	0, 39	DTS	GFSK	1



ANTENNA PORT CONDUCTED MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	CCK	DBPSK	1.0
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
802.11n HT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n HT40	3 to 9	3,6, 9	OFDM	BPSK	13.5
BT-LE	0 to 39	0, 19, 39	DTS	GFSK	1

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	TEST VOLTAGE	TESTED BY
RE<1G	22deg. C, 54%RH	DC 5V from adaptor	Rose Ma
RE≥1G	22deg. C, 54%RH	DC 5V from adaptor	Rose Ma
PLC	24deg. C, 55%RH	DC 5V from adaptor	John Wen
APCM	25deg. C, 60%RH	3.85Vdc from battery	Bert Ma

2.3 Duty Cycle of Test Signal

The test results was recorded in Report No.:RF180528C19-1.



2.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C, Section 15.247

KDB 558074 D01 DTS Meas Guidance v04

ANSI C63.10-2013

Note:

1. All test items have been performed and recorded as per the above standards.
2. The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (Certification). The test report has been issued separately.

2.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	PC	HP	A6608CN	3CR83825X3	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	AC Line: Unshielded, Detachable 1.5m



3 TEST TYPES AND RESULTS

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBµV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

3.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR3	101900	Mar. 15,18	Mar. 14,19
EMC32 test software	Rohde&Schwarz	EMC32	NA	NA	NA
LISN network	Rohde&Schwarz	ENV216	101922	Mar. 15,18	Mar. 14,19

- NOTE:**
1. The test was performed in CE shielded room.
 2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.



3.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.


NOTE: All modes of operation were investigated and the worst-case emissions are reported.

3.1.4 DEVIATION FROM TEST STANDARD

No deviation.



3.1.5 TEST SETUP

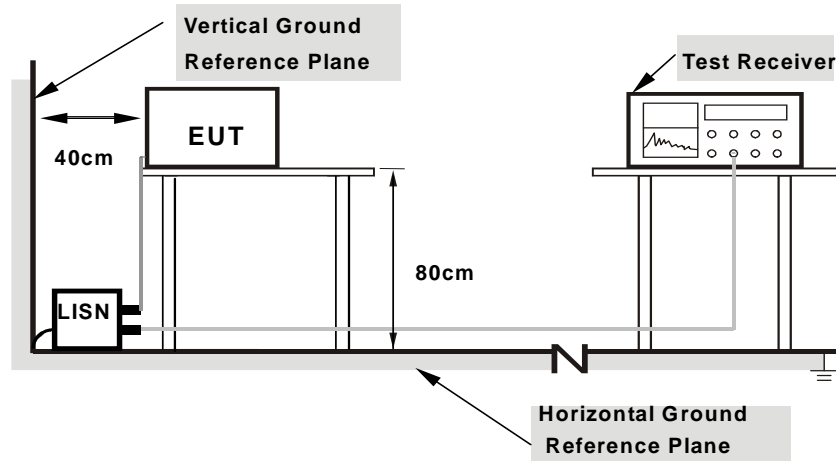

- Note:**
- 1.Support units were connected to second LISN.
 - 2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.1.6 EUT OPERATING CONDITIONS

- a. Turned on the power and connected of all equipment.
- b. EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.

3.1.7 TEST RESULTS

The test results was recorded in Report No.:RF180528C19-1.



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

**3.2.2 TEST INSTRUMENTS**

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	Euroshieldpn-CT0001143-1216	Apr. 21,18	Apr. 20,19
Bilog Antenna	ETS-LINDGREN	3143B	00161965	Nov. 26,16	Nov. 25,18
Horn Antenna	ETS-LINDGREN	3117	00168728	Nov. 26,16	Nov. 25,18
Loop antenna	Daze	ZN30900A	0708	Nov. 20,17	Nov. 19,18
Horn Antenna (18GHz-40GHz)	N/A	QWH-SL-18-40-K-SG/QMS-00361	15433	Dec. 16,16	Dec. 15,18
Test Software	E3	V 9.160323	N/A	N/A	N/A
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A	N/A
10dB Attenuator	JFW/USA	50HF-010-SMA	1505	Jul. 09,18	Jul. 08,19
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Mar. 16,18	Mar. 15,19
Signal Pre-Amplifier	EMSI	EMC 9135	980249	Jul. 09,18	Jul. 08,19
Signal Pre-Amplifier	EMSI	EMC 012645B	980257	Jul. 09,18	Jul. 08,19
Signal Pre-Amplifier	EMSI	EMC 184045B	980259	Jul. 09,18	Jul. 08,19

- NOTE:**
1. The calibration interval of the above test instruments is 12 months or 24 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
 2. The test was performed in 3m Chamber.
 3. The FCC Site Registration No. is 525120.



3.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ($10 \log(1/\text{duty cycle})$).
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (Duty cycle \geq 98%) for Average detection (AV) at frequency above 1GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.


3.2.4 DEVIATION FROM TEST STANDARD

No deviation




3.2.5 TEST SETUP

< Frequency Range below 30MHz >

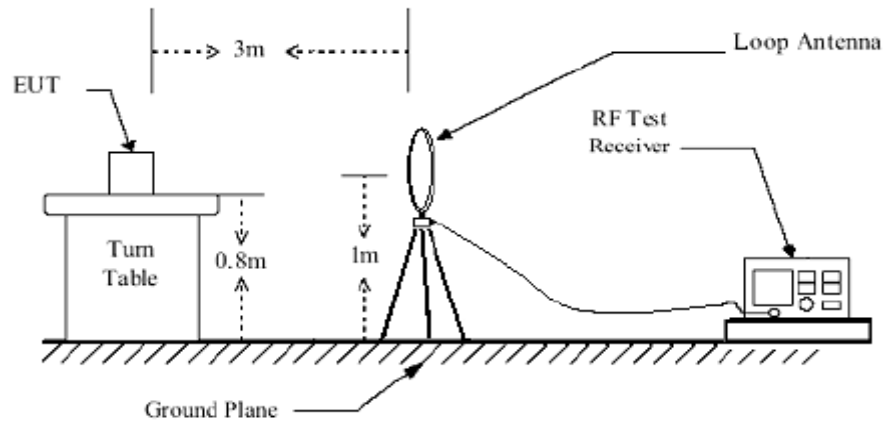


< Frequency Range 30MHz~1GHz >

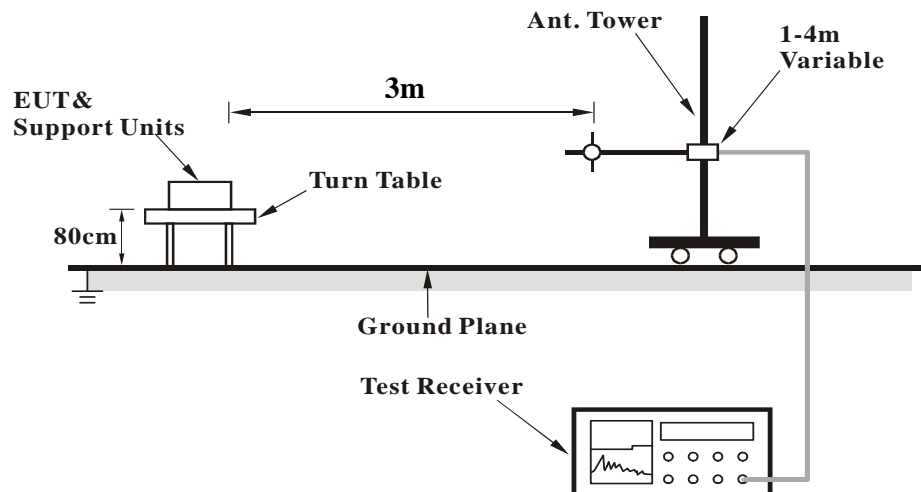



<Frequency Range above 1GHz>

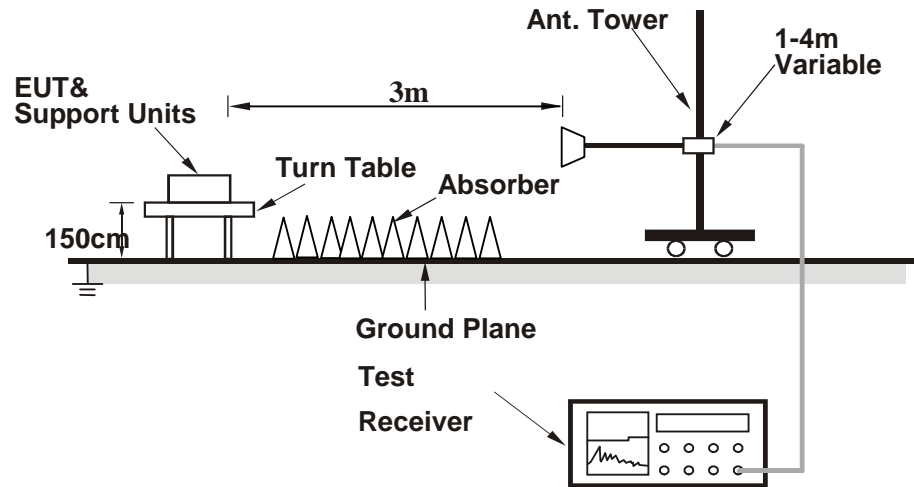

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.2.6 EUT OPERATING CONDITIONS

- Set the EUT under full load condition and placed them on a testing table.
- Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the EUT in full functions.



3.2.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA:

9 KHz – 30 MHz data: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

30 MHz – 1GHz data:


802.11n (40MHz)

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
150.28	22.36	48.36	43.5	-21.14	9.23	1.56	36.79	100	360	QP
250.19	26.6	48.68	46	-19.4	12.4	2.04	36.52	100	360	QP
302.89	18.31	39.48	46	-27.69	13.12	2.22	36.51	100	360	QP
395.69	26.62	43.71	46	-19.38	17.02	2.6	36.71	100	360	QP
450.01	26.26	42.49	46	-19.74	17.8	2.81	36.84	100	360	QP
528.59	21.5	36.56	46	-24.5	18.94	3.04	37.04	100	360	QP

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.

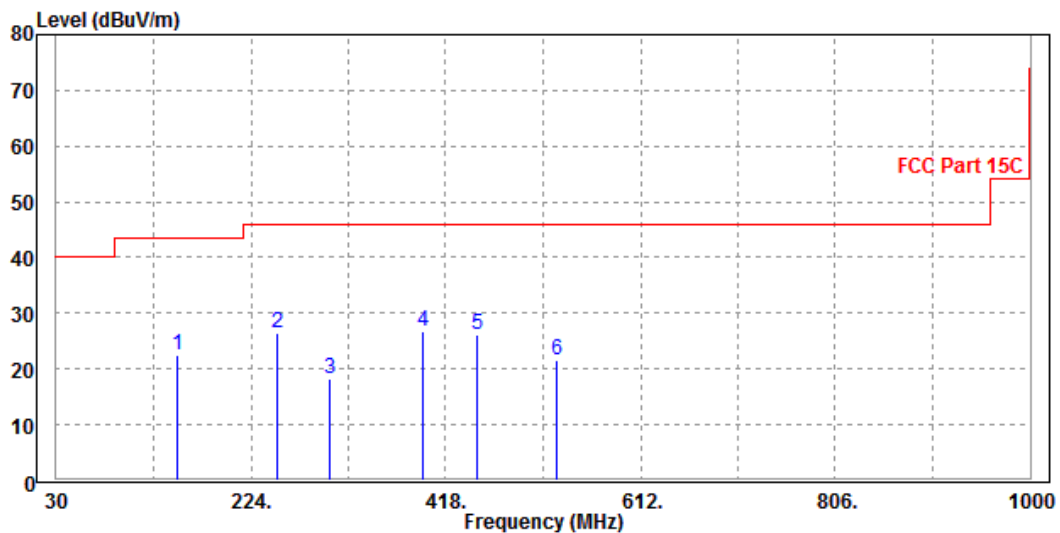




CHANNEL	TX Channel 9	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
33.25	22.48	44.3	40	-17.52	14.86	0.85	37.53	100	0	QP
84.32	19.42	48.38	40	-20.58	6.73	1.41	37.1	100	0	QP
150.28	26.2	51.88	43.5	-17.3	9.23	1.88	36.79	100	0	QP
214.3	25.4	48.92	43.5	-18.1	10.76	2.25	36.53	100	0	QP
250.19	31.61	53.28	46	-14.39	12.4	2.45	36.52	100	0	QP
337.49	23.07	42.2	46	-22.93	14.57	2.88	36.58	100	0	QP

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.

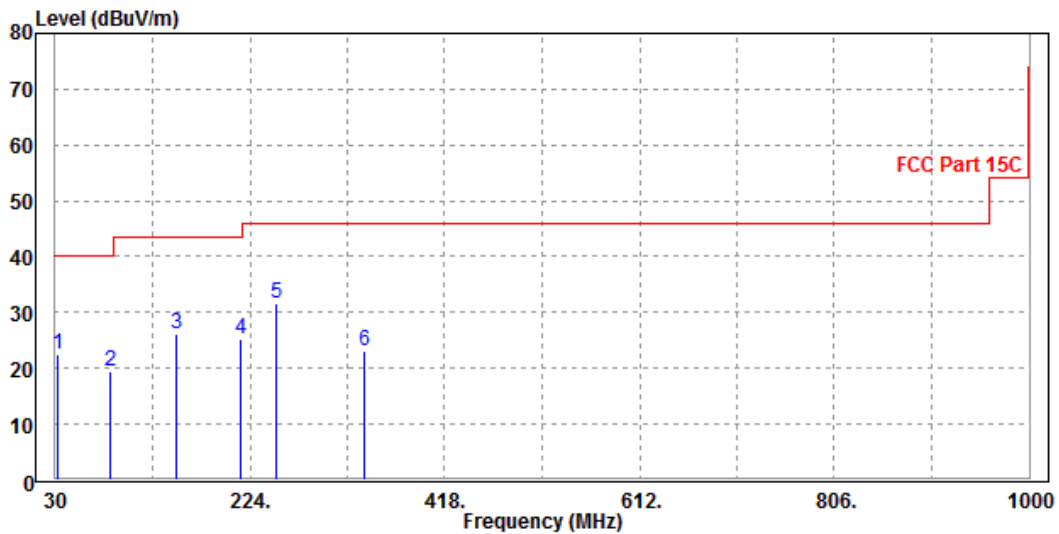

**ABOVE 1GHz WORST-CASE DATA:****Note:** For higher frequency, the emission is too low to be detected.**802.11b**

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	42.36	50.53	54	-11.64	32.87	4.88	45.92	112	68	Average
2390	55.08	63.25	74	-18.92	32.87	4.88	45.92	112	68	Peak
2412	103.85	111.97			32.89	4.9	45.91	112	68	Average
2412	106.75	114.87			32.89	4.9	45.91	112	68	Peak
2483.5	42.34	50.27	54	-11.66	32.98	4.98	45.89	112	68	Average
2483.5	54.34	62.27	74	-19.66	32.98	4.98	45.89	112	68	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	42.28	50.45	54	-11.72	32.87	4.88	45.92	104	113	Average
2390	54.25	62.42	74	-19.75	32.87	4.88	45.92	104	113	Peak
2412	102.04	110.16			32.89	4.9	45.91	104	113	Average
2412	104.39	112.51			32.89	4.9	45.91	104	113	Peak
2483.5	42.22	50.15	54	-11.78	32.98	4.98	45.89	104	113	Average
2483.5	54.39	62.32	74	-19.61	32.98	4.98	45.89	104	113	Peak

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2412MHz: Fundamental frequency.



CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	42.07	50.24	54	-11.93	32.87	4.88	45.92	113	69	Average
2390	53.88	62.05	74	-20.12	32.87	4.88	45.92	113	69	Peak
2437	104.39	112.45			32.92	4.93	45.91	113	69	Average
2437	106.66	114.72			32.92	4.93	45.91	113	69	Peak
2483.5	42.91	50.84	54	-11.09	32.98	4.98	45.89	113	69	Average
2483.5	54.64	62.57	74	-19.36	32.98	4.98	45.89	113	69	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	41.95	50.12	54	-12.05	32.87	4.88	45.92	103	116	Average
2390	53.58	61.75	74	-20.42	32.87	4.88	45.92	103	116	Peak
2437	103.24	111.3			32.92	4.93	45.91	103	116	Average
2437	105.72	113.78			32.92	4.93	45.91	103	116	Peak
2483.5	42.83	50.76	54	-11.17	32.98	4.98	45.89	103	116	Average
2483.5	54.88	62.81	74	-19.12	32.98	4.98	45.89	103	116	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2437MHz: Fundamental frequency.



CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	42.04	50.21	54	-11.96	32.87	4.88	45.92	112	82	Average
2390	54.02	62.19	74	-19.98	32.87	4.88	45.92	112	82	Peak
2462	104.19	112.18			32.95	4.96	45.9	112	82	Average
2462	106.89	114.88			32.95	4.96	45.9	112	82	Peak
2483.5	42.98	50.91	54	-11.02	32.98	4.98	45.89	112	82	Average
2483.5	53.96	61.89	74	-20.04	32.98	4.98	45.89	112	82	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	41.89	50.06	54	-12.11	32.87	4.88	45.92	100	118	Average
2390	54.01	62.18	74	-19.99	32.87	4.88	45.92	100	118	Peak
2462	101.25	109.24			32.95	4.96	45.9	100	118	Average
2462	104.08	112.07			32.95	4.96	45.9	100	118	Peak
2483.5	42.84	50.77	54	-11.16	32.98	4.98	45.89	100	118	Average
2483.5	55.18	63.11	74	-18.82	32.98	4.98	45.89	100	118	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2462MHz: Fundamental frequency.



802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	47.34	55.51	54	-6.66	32.87	4.88	45.92	113	74	Average
2390	63	71.17	74	-11	32.87	4.88	45.92	113	74	Peak
2412	97.41	105.53			32.89	4.9	45.91	113	74	Average
2412	106.83	114.95			32.89	4.9	45.91	113	74	Peak
2483.5	42.35	50.28	54	-11.65	32.98	4.98	45.89	113	74	Average
2483.5	54.22	62.15	74	-19.78	32.98	4.98	45.89	113	74	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	43.65	51.82	54	-10.35	32.87	4.88	45.92	103	119	Average
2390	54.74	62.91	74	-19.26	32.87	4.88	45.92	103	119	Peak
2412	94.33	102.45			32.89	4.9	45.91	103	119	Average
2412	105.15	113.27			32.89	4.9	45.91	103	119	Peak
2483.5	42.3	50.23	54	-11.7	32.98	4.98	45.89	103	119	Average
2483.5	54.55	62.48	74	-19.45	32.98	4.98	45.89	103	119	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2412MHz: Fundamental frequency.



CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	42.56	50.73	54	-11.44	32.87	4.88	45.92	112	71	Average
2390	52.18	60.35	74	-21.82	32.87	4.88	45.92	112	71	Peak
2437	98.23	106.29			32.92	4.93	45.91	112	71	Average
2437	108.13	116.19			32.92	4.93	45.91	112	71	Peak
2483.5	45.75	53.68	54	-8.25	32.98	4.98	45.89	112	71	Average
2483.5	55.68	63.61	74	-18.32	32.98	4.98	45.89	112	71	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	42.81	50.98	54	-11.19	32.87	4.88	45.92	100	119	Average
2390	52.94	61.11	74	-21.06	32.87	4.88	45.92	100	119	Peak
2437	95.61	103.67			32.92	4.93	45.91	100	119	Average
2437	106.79	114.85			32.92	4.93	45.91	100	119	Peak
2483.5	45.18	53.11	54	-8.82	32.98	4.98	45.89	100	119	Average
2483.5	55.65	63.58	74	-18.35	32.98	4.98	45.89	100	119	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2437MHz: Fundamental frequency.



CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	43.4	51.57	54	-10.6	32.87	4.88	45.92	113	85	Average
2390	52.24	60.41	74	-21.76	32.87	4.88	45.92	113	85	Peak
2462	96.02	104.01			32.95	4.96	45.9	113	85	Average
2462	106.47	114.46			32.95	4.96	45.9	113	85	Peak
2483.5	44.78	52.71	54	-9.22	32.98	4.98	45.89	113	85	Average
2483.5	61.33	69.26	74	-12.67	32.98	4.98	45.89	113	85	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	43.71	51.88	54	-10.29	32.87	4.88	45.92	100	126	Average
2390	54.44	62.61	74	-19.56	32.87	4.88	45.92	100	126	Peak
2462	94.24	102.23			32.95	4.96	45.9	100	126	Average
2462	105.2	113.19			32.95	4.96	45.9	100	126	Peak
2483.5	46.33	54.26	54	-7.67	32.98	4.98	45.89	100	126	Average
2483.5	60.53	68.46	74	-13.47	32.98	4.98	45.89	100	126	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2462MHz: Fundamental frequency.



802.11n (20MHz)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	48.84	57.01	54	-5.16	32.87	4.88	45.92	113	75	Average
2390	64.75	72.92	74	-9.25	32.87	4.88	45.92	113	75	Peak
2412	96.64	104.76			32.89	4.9	45.91	113	75	Average
2412	106.99	115.11			32.89	4.9	45.91	113	75	Peak
2483.5	41.92	49.85	54	-12.08	32.98	4.98	45.89	113	75	Average
2483.5	53.68	61.61	74	-20.32	32.98	4.98	45.89	113	75	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	43.77	51.94	54	-10.23	32.87	4.88	45.92	103	119	Average
2390	54.48	62.65	74	-19.52	32.87	4.88	45.92	103	119	Peak
2412	93.92	102.04			32.89	4.9	45.91	103	119	Average
2412	103.83	111.95			32.89	4.9	45.91	103	119	Peak
2483.5	42.38	50.31	54	-11.62	32.98	4.98	45.89	103	119	Average
2483.5	53.78	61.71	74	-20.22	32.98	4.98	45.89	103	119	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2412MHz: Fundamental frequency.



CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	42.22	50.39	54	-11.78	32.87	4.88	45.92	113	94	Average
2390	52.77	60.94	74	-21.23	32.87	4.88	45.92	113	94	Peak
2437	94.87	102.93			32.92	4.93	45.91	113	94	Average
2437	105.22	113.28			32.92	4.93	45.91	113	94	Peak
2483.5	44	51.93	54	-10	32.98	4.98	45.89	113	94	Average
2483.5	54.86	62.79	74	-19.14	32.98	4.98	45.89	113	94	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	42.02	50.19	54	-11.98	32.87	4.88	45.92	100	97	Average
2390	53.54	61.71	74	-20.46	32.87	4.88	45.92	100	97	Peak
2437	94.08	102.14			32.92	4.93	45.91	100	97	Average
2437	104.6	112.66			32.92	4.93	45.91	100	97	Peak
2483.5	44.72	52.65	54	-9.28	32.98	4.98	45.89	100	97	Average
2483.5	56.01	63.94	74	-17.99	32.98	4.98	45.89	100	97	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2437MHz: Fundamental frequency.



CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	43.74	51.91	54	-10.26	32.87	4.88	45.92	113	93	Average
2390	55.48	63.65	74	-18.52	32.87	4.88	45.92	113	93	Peak
2462	94.44	102.43			32.95	4.96	45.9	113	93	Average
2462	105.54	113.53			32.95	4.96	45.9	113	93	Peak
2483.5	44.69	52.62	54	-9.31	32.98	4.98	45.89	113	93	Average
2483.5	62.03	69.96	74	-11.97	32.98	4.98	45.89	113	93	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	45.91	54.08	54	-8.09	32.87	4.88	45.92	100	102	Average
2390	52.98	61.15	74	-21.02	32.87	4.88	45.92	100	102	Peak
2462	93.79	101.78			32.95	4.96	45.9	100	102	Average
2462	104.37	112.36			32.95	4.96	45.9	100	102	Peak
2483.5	46.55	54.48	54	-7.45	32.98	4.98	45.89	100	102	Average
2483.5	61.78	69.71	74	-12.22	32.98	4.98	45.89	100	102	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2462MHz: Fundamental frequency.



802.11n (40MHz)

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	47.77	55.94	54	-6.23	32.87	4.88	45.92	112	93	Average
2390	61.24	69.41	74	-12.76	32.87	4.88	45.92	112	93	Peak
2422	90.19	98.27			32.91	4.92	45.91	112	93	Average
2422	102.1	110.18			32.91	4.92	45.91	112	93	Peak
2483.5	42.16	50.09	54	-11.84	32.98	4.98	45.89	112	93	Average
2483.5	54.36	62.29	74	-19.64	32.98	4.98	45.89	112	93	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	44.61	52.78	54	-9.39	32.87	4.88	45.92	100	97	Average
2390	58.54	66.71	74	-15.46	32.87	4.88	45.92	100	97	Peak
2422	87.77	95.85			32.91	4.92	45.91	100	97	Average
2422	99.54	107.62			32.91	4.92	45.91	100	97	Peak
2483.5	42.25	50.18	54	-11.75	32.98	4.98	45.89	100	97	Average
2483.5	55.03	62.96	74	-18.97	32.98	4.98	45.89	100	97	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2422MHz: Fundamental frequency.



CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	44.57	52.74	54	-9.43	32.87	4.88	45.92	100	175	Average
2390	55.69	63.86	74	-18.31	32.87	4.88	45.92	100	175	Peak
2437	92.13	100.19			32.92	4.93	45.91	100	175	Average
2437	103.5	111.56			32.92	4.93	45.91	100	175	Peak
2483.5	43.04	50.97	54	-10.96	32.98	4.98	45.89	100	175	Average
2483.5	55.98	63.91	74	-18.02	32.98	4.98	45.89	100	175	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	43.42	51.59	54	-10.58	32.87	4.88	45.92	100	215	Average
2390	53.52	61.69	74	-20.48	32.87	4.88	45.92	100	215	Peak
2437	89.91	97.97			32.92	4.93	45.91	100	215	Average
2437	102.72	110.78			32.92	4.93	45.91	100	215	Peak
2483.5	44.51	52.44	54	-9.49	32.98	4.98	45.89	100	215	Average
2483.5	60.43	68.36	74	-13.57	32.98	4.98	45.89	100	215	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2437MHz: Fundamental frequency.



CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	41.94	50.11	54	-12.06	32.87	4.88	45.92	109	170	Average
2390	54.95	63.12	74	-19.05	32.87	4.88	45.92	109	170	Peak
2452	94.38	102.39			32.94	4.95	45.9	109	170	Average
2452	105.94	113.95			32.94	4.95	45.9	109	170	Peak
2483.5	47.92	55.85	54	-6.08	32.98	4.98	45.89	109	170	Average
2483.5	61.68	69.61	74	-12.32	32.98	4.98	45.89	109	170	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	42.55	50.72	54	-11.45	32.87	4.88	45.92	100	214	Average
2390	54.9	63.07	74	-19.1	32.87	4.88	45.92	100	214	Peak
2452	89.14	97.15			32.94	4.95	45.9	100	214	Average
2452	101.74	109.75			32.94	4.95	45.9	100	214	Peak
2483.5	47.75	55.68	54	-6.25	32.98	4.98	45.89	100	214	Average
2483.5	66.95	74.88	74	-7.05	32.98	4.98	45.89	100	214	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2452MHz: Fundamental frequency.



BELOW 1GHz WORST-CASE DATA:

9 KHz – 30 MHz data: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

30 MHz – 1GHz data:


BT-LE (GFSK)

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
56.18	22.82	52.58	40	-17.18	6.44	1.14	37.34	200	0	QP
88.11	28	56.78	43.5	-15.5	6.84	1.44	37.06	200	0	QP
112.53	32.06	59.83	43.5	-11.44	7.56	1.63	36.96	200	0	QP
198.31	33.25	57.56	43.5	-10.25	10.08	2.16	36.55	200	0	QP
243.02	33.78	55.81	46	-12.22	12.08	2.41	36.52	200	0	QP
400.05	40.74	57.11	46	-5.26	17.2	3.15	36.72	200	0	QP

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

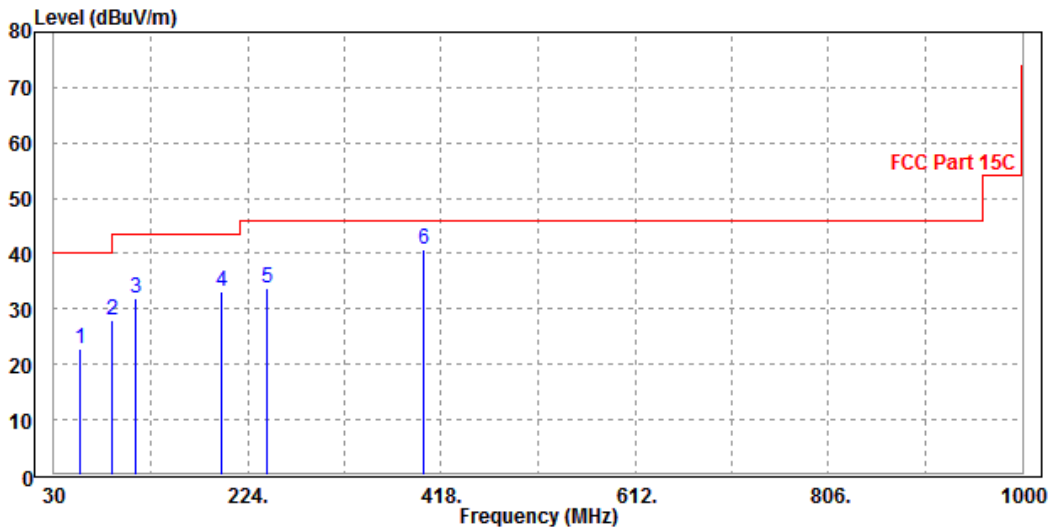




CHANNEL	TX Channel 0	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
38.91	29.51	55.13	40	-10.49	10.95	0.92	37.49	100	0	QP
89.71	28.19	56.88	43.5	-15.31	6.89	1.46	37.04	100	0	QP
124.56	27.02	54.79	43.5	-16.48	7.44	1.71	36.92	100	0	QP
178.21	33.53	58.24	43.5	-9.97	9.93	2.05	36.69	100	0	QP
223.79	32.37	55.41	46	-13.63	11.19	2.3	36.53	100	0	QP
389.1	37.7	54.56	46	-8.3	16.74	3.1	36.7	100	0	QP

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

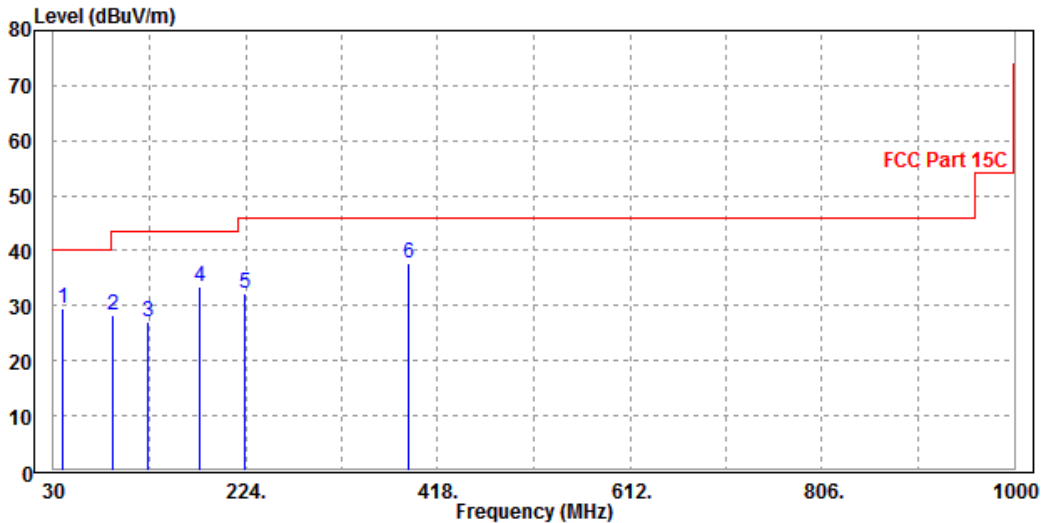

**ABOVE 1GHz TEST DATA:****Note:** For higher frequency, the emission is too low to be detected.**BT-LE (GFSK)**

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	42.26	50.88	54	-11.74	32.87	4.88	46.37	133	349	Average
2390	52.87	61.49	74	-21.13	32.87	4.88	46.37	133	349	Peak
2402	93.88	102.48			32.88	4.89	46.37	133	349	Average
2402	99.13	107.73			32.88	4.89	46.37	133	349	Peak
2483.5	42.04	50.45	54	-11.96	32.98	4.98	46.37	133	349	Average
2483.5	54.43	62.84	74	-19.57	32.98	4.98	46.37	133	349	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	41.65	50.27	54	-12.35	32.87	4.88	46.37	104	0	Average
2390	54.33	62.95	74	-19.67	32.87	4.88	46.37	104	0	Peak
2402	86.15	94.75			32.88	4.89	46.37	104	0	Average
2402	91.1	99.7			32.88	4.89	46.37	104	0	Peak
2483.5	42.02	50.43	54	-11.98	32.98	4.98	46.37	104	0	Average
2483.5	54.36	62.77	74	-19.64	32.98	4.98	46.37	104	0	Peak

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2402MHz: Fundamental frequency.



CHANNEL	TX Channel 19	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	41.67	50.29	54	-12.33	32.87	4.88	46.37	131	347	Average
2390	52.93	61.55	74	-21.07	32.87	4.88	46.37	131	347	Peak
2440	95.56	104.06			32.93	4.94	46.37	131	347	Average
2440	100.48	108.98			32.93	4.94	46.37	131	347	Peak
2483.5	41.85	50.26	54	-12.15	32.98	4.98	46.37	131	347	Average
2483.5	53.48	61.89	74	-20.52	32.98	4.98	46.37	131	347	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	41.81	50.43	54	-12.19	32.87	4.88	46.37	102	0	Average
2390	52.76	61.38	74	-21.24	32.87	4.88	46.37	102	0	Peak
2440	89.1	97.6			32.93	4.94	46.37	102	0	Average
2440	94	102.5			32.93	4.94	46.37	102	0	Peak
2483.5	42.13	50.54	54	-11.87	32.98	4.98	46.37	102	0	Average
2483.5	54.72	63.13	74	-19.28	32.98	4.98	46.37	102	0	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2440MHz: Fundamental frequency.



CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	41.69	50.31	54	-12.31	32.87	4.88	46.37	128	349	Average
2390	53.69	62.31	74	-20.31	32.87	4.88	46.37	128	349	Peak
2480	93.99	102.4			32.98	4.98	46.37	128	349	Average
2480	98.58	106.99			32.98	4.98	46.37	128	349	Peak
2483.5	41.78	50.19	54	-12.22	32.98	4.98	46.37	128	349	Average
2483.5	53.66	62.07	74	-20.34	32.98	4.98	46.37	128	349	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	41.19	49.81	54	-12.81	32.87	4.88	46.37	105	28	Average
2390	51.99	60.61	74	-22.01	32.87	4.88	46.37	105	28	Peak
2480	91.86	100.27			32.98	4.98	46.37	105	28	Average
2480	97.05	105.46			32.98	4.98	46.37	105	28	Average
2483.5	41.7	50.11	54	-12.3	32.98	4.98	46.37	105	28	Average
2483.5	53.31	61.72	74	-20.69	32.98	4.98	46.37	105	28	Peak

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2480MHz: Fundamental frequency.



3.3 6 dB BANDWIDTH MEASUREMENT

3.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

3.3.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Power Meter	ANRITSU	ML2495A	1506002	Mar. 02,18	Mar. 01,19
EXA Signal Analyzer	KEYSIGHT	N9010A-526	MY54510322	Mar. 16,18	Mar. 15,19
EXA Signal Analyzer	KEYSIGHT	N9010A-544	MY54510355	Mar. 16,18	Mar. 15,19
Power Sensor	ANRITSU	MA2411B	1339352	Mar. 16,18	Mar. 15,19

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
2. The test was performed in RF Oven room.

3.3.3 TEST PROCEDURE


1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



3.3.4 DEVIATION FROM TEST STANDARD

No deviation.

3.3.5 TEST SETUP

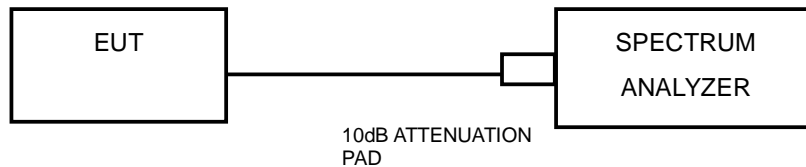

3.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

3.3.7 EUT OPERATING CONDITIONS

The test results was recorded in Reports No.:RF180528C19-1 and RF180528C19-3.




3.4 CONDUCTED OUTPUT POWER

3.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz band: 1 Watt (30dBm)

3.4.2 TEST SETUP

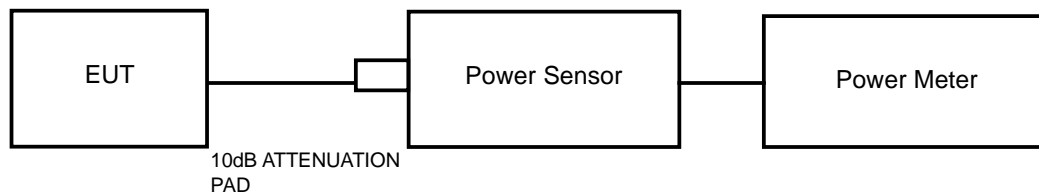

3.4.3 TEST INSTRUMENTS

Refer to section 3.3.2 to get information of above instrument.

3.4.4 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

3.4.5 DEVIATION FROM TEST STANDARD

No deviation.

3.4.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



3.4.7 TEST RESULTS

3.4.7.1 MAXIMUM PEAK OUTPUT POWER

802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT(W)	PASS/FAIL
1	2412	18.52	71.121	1	PASS
6	2437	19.92	98.175	1	PASS
11	2462	18.21	66.222	1	PASS

802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT(W)	PASS/FAIL
1	2412	20.66	116.413	1	PASS
6	2437	21.61	144.877	1	PASS
11	2462	20.11	102.565	1	PASS

802.11n (20MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT(W)	PASS/FAIL
1	2412	21.69	147.571	1	PASS
6	2437	21.57	143.549	1	PASS
11	2462	20.35	108.393	1	PASS

802.11n (40MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT(W)	PASS/FAIL
3	2422	20.84	121.339	1	PASS
6	2437	20.68	116.950	1	PASS
9	2452	21.63	145.546	1	PASS



BT-LE (GFSK)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT(W)	PASS/FAIL
0	2402	-1.28	0.745	1	PASS
19	2440	0.00	1.000	1	PASS
39	2480	-0.97	0.800	1	PASS

**3.4.7.2 AVERAGE OUTPUT POWER (FOR REFERENCE)**

The average power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	PASS/FAIL
1	2412	15.98	N/A
6	2437	16.11	N/A
11	2462	15.80	N/A

802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	PASS/FAIL
1	2412	13.25	N/A
6	2437	13.28	N/A
11	2462	13.44	N/A

802.11n (20MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	PASS/FAIL
1	2412	13.35	N/A
6	2437	13.18	N/A
11	2462	13.32	N/A

802.11n (40MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	PASS/FAIL
3	2422	13.95	N/A
6	2437	14.18	N/A
9	2452	14.13	N/A



BT-LE (GFSK)

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	PASS/FAIL
0	2402	-1.35	N/A
19	2440	-0.13	N/A
39	2480	-1.05	N/A




3.5 POWER SPECTRAL DENSITY MEASUREMENT

3.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm/3KHz.

3.5.2 TEST SETUP



3.5.3 TEST INSTRUMENTS

Refer to section 3.3.2 to get information of above instrument.

3.5.4 TEST PROCEDURE

1. Set the span to 1.5 times the DTS bandwidth
2. Set the RBW = 3 kHz, VBW $\geq 3 \times$ RBW, Detector = peak.
3. Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum amplitude level.

3.5.5 DEVIATION FROM TEST STANDARD

No deviation.

3.5.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

3.5.7 TEST RESULTS

The test results was recorded in Reports No.:RF180528C19-1 and RF180528C19-3.




3.6 OUT OF BAND EMISSION MEASUREMENT

3.6.1 LIMITS OF OUT OF BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

3.6.2 TEST SETUP

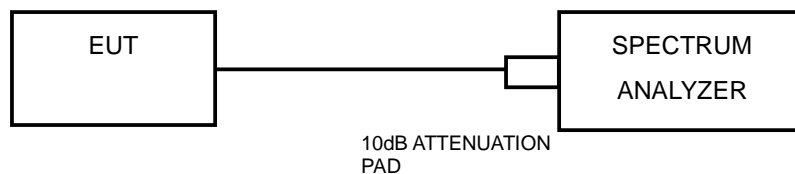

3.6.3 TEST INSTRUMENTS

Refer to section 3.3.2 to get information of above instrument.

3.6.4 TEST PROCEDURE

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.



MEASUREMENT PROCEDURE OOBE

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

3.6.5 DEVIATION FROM TEST STANDARD

No deviation.

3.6.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

3.6.7 TEST RESULTS

The spectrum plots are attached on the following images. D1 line indicates the highest level. D2 line indicates the 20dB offset below D1. It shows compliance to the requirement.

The test results was recorded in Reports No.:RF180528C19-1 and RF180528C19-3.



BUREAU
VERITAS Test Report No.: RF180827W002-2

4 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



Test Report No.: RF180827W002-2

5 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---