



BUREAU
VERITAS

Test Report No.: RF190610W002



FCC TEST REPORT (Part 15, Subpart C)



Applicant:	Lenovo(Shanghai) Electronics Technology Co., Ltd.
Address:	Section 304-305, Building No. 4, # 222, Meiyue Road, China (Shanghai) Pilot Free Trade Zone

Manufacturer or Supplier:	Lenovo PC HK Limited
Address:	23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay, Hong Kong
Product:	ThinkReality A6 Compute Box
Brand Name:	ThinkReality
Model Name:	ThinkReality A6 Compute Pack
FCC ID:	O57TRA6CP
Date of tests:	Jun. 11, 2019 ~ Jul. 11, 2019

The tests have been carried out according to the requirements of the following standard:

- FCC Part 15, Subpart C, Section 15.247
- ANSI C63.10-2013

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Alex Chen Engineer / Mobile Department	Approved by Luke Lu Manager / Mobile Department
 Date: Jul. 15, 2019	 Date: Jul. 15, 2019

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute you unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

BV 7Layers Communications Technology
(Shenzhen) Co. Ltd

No.B102, Dazu Chuangxin Mansion, North of Beihuan
Avenue, North Area, Hi-Tech Industrial Park, Nanshan
District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.dq@cn.bureauveritas.com



TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1 SUMMARY OF TEST RESULTS.....	5
1.1 MEASUREMENT UNCERTAINTY	5
2 GENERAL INFORMATION	6
2.1 GENERAL DESCRIPTION OF EUT	6
2.2 DESCRIPTION OF TEST MODES	8
2.2.1 CONFIGURATION OF SYSTEM UNDER TEST	9
2.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	9
2.3 DUTY CYCLE OF TEST SIGNAL	12
2.4 GENERAL DESCRIPTION OF APPLIED STANDARDS	15
2.5 DESCRIPTION OF SUPPORT UNITS	15
3 TEST TYPES AND RESULTS.....	16
3.1 CONDUCTED EMISSION MEASUREMENT	16
3.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	16
3.1.2 TEST INSTRUMENTS.....	16
3.1.3 TEST PROCEDURES	17
3.1.4 DEVIATION FROM TEST STANDARD	17
3.1.5 TEST SETUP	18
3.1.6 EUT OPERATING CONDITIONS	18
3.1.7 TEST RESULTS	19
3.2 RADIATED EMISSION MEASUREMENT	22
3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	22
3.2.2 TEST INSTRUMENTS.....	23
3.2.3 TEST PROCEDURES	24
3.2.4 DEVIATION FROM TEST STANDARD	24
3.2.5 TEST SETUP	25
3.2.6 EUT OPERATING CONDITIONS	25
3.2.7 TEST RESULTS	26
3.3 6 DB BANDWIDTH MEASUREMENT	50
3.3.1 LIMITS OF 6DB BANDWIDTH MEASUREMENT	50
3.3.2 TEST INSTRUMENTS.....	50
3.3.3 TEST PROCEDURE.....	50
3.3.4 DEVIATION FROM TEST STANDARD	51



3.3.5	TEST SETUP	51
3.3.6	EUT OPERATING CONDITIONS	51
3.3.7	TEST RESULTS	52
3.4	CONDUCTED OUTPUT POWER.....	58
3.4.1	LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT	58
3.4.2	TEST SETUP	58
3.4.3	TEST INSTRUMENTS.....	58
3.4.4	TEST PROCEDURES	58
3.4.5	DEVIATION FROM TEST STANDARD	58
3.4.6	EUT OPERATING CONDITIONS	58
3.4.7	TEST RESULTS	59
3.4.7.1	MAXIMUM PEAK OUTPUT POWER	59
3.4.7.2	AVERAGE OUTPUT POWER (FOR REFERENCE).....	61
3.5	POWER SPECTRAL DENSITY MEASUREMENT	63
3.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	63
3.5.2	TEST SETUP	63
3.5.3	TEST INSTRUMENTS.....	63
3.5.4	TEST PROCEDURE.....	63
3.5.5	DEVIATION FROM TEST STANDARD	63
3.5.6	EUT OPERATING CONDITION	63
3.5.7	TEST RESULTS	64
3.6	OUT OF BAND EMISSION MEASUREMENT	70
3.6.1	LIMITS OF OUT OF BAND EMISSION MEASUREMENT	70
3.6.2	TEST SETUP	70
3.6.3	TEST INSTRUMENTS.....	70
3.6.4	TEST PROCEDURE.....	70
3.6.5	DEVIATION FROM TEST STANDARD	71
3.6.6	EUT OPERATING CONDITION	71
3.6.7	TEST RESULTS	71
4	PHOTOGRAPHS OF THE TEST CONFIGURATION	84
5	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	85



BUREAU Test Report No.: RF190610W002
VERITAS

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF190610W002	Original release	Jul. 15, 2019



1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -15.47dB at 23.184000MHz.
15.205 15.209	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -13.37dB at 101.26MHz.
15.247(d)	Out of band Emission Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted Output power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used

1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
AC Power Conducted emissions	±2.70dB
All Radiated emissions	±4.48dB
Conducted emissions	±2 dB
Occupied Channel Bandwidth	±21.7KHz
Conducted Output power	±1.03 dB
Power Spectral Density	±0.95 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k = 2.



2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT	ThinkReality A6 Compute Box
BRAND NAME	ThinkReality
MODEL NAME	ThinkReality A6 Compute Pack
NOMINAL VOLTAGE	5.0/9Vdc (adapter) 3.85Vdc (Li-ion, battery)
MODULATION TECHNOLOGY	DSSS, OFDM, GFSK
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM BT-LE for GFSK
TRANSMISSION RATE	802.11b: 11/ 5.5/ 2.0 / 1.0 Mbps 802.11g: 54/ 48/ 36 / 24 / 18 / 9/ 6 Mbps 802.11n: up to 135 Mbps BT_LE: 1 Mbps/2 Mbps
OPERATING FREQUENCY	2412-2462MHz for 11b/g/n(HT20) 2422-2452MHz for 11n(HT40) 2402-2480MHz for BT-LE(GFSK)
MAX. OUTPUT POWER	WLAN: 248.01mW (Maximum) BT-LE(1M): 4.50mW (Maximum) BT-LE(2M): 4.91mW (Maximum)
ANTENNA TYPE	FPC Antenna 0 with 0.83dBi gain FPC Antenna 1 with 0.46dBi gain
HW VERSION	SKY_BLUE_BOX V04
SW VERSION	A6_user_S760001_2019051604343_sdm845_4G_ROW_US
I/O PORTS	Refer to user's manual
CABLE SUPPLIED	USB cable1: non-shielded, detachable, 1.0m USB cable2: non-shielded, detachable, 1.0m

NOTE:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. The EUT incorporates a SISO function with 802.11b/802.11g mode and a MIMO function with 802.11n(20MHz)/802.11n(40MHz) mode. Physically, the EUT provides two transmitters and two receivers.



MODULATION MODE	TX/RX FUNCTION
802.11b	1TX /1RX diversity
802.11g	1TX /1RX diversity
802.11n (20MHz)	2TX /2RX
802.11n (40MHz)	2TX /2RX
BT_LE	1TX /1RX

3. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.

4. List of Accessory:

ACCESSORIES	BRAND	MODEL	SPECIFICATION
CPU	Qualcomm	SDA-845-A-914BMPSP-TR-02-0-AA	914NPSP
LPDDR4x	SAMSUNG	K3UH5H50MM-AGCJ	4G
UFS	SAMSUNG	KLUCG2K1EA-B0C1	64G
BT/WLAN Module	Qualcomm	WCN-3990-0-116WLPSP-SR-0K-0	-
Battery	Lenovo	L19D2P31	Rating: 3.85Vdc, 6800mAh
AC Adapter	Lenovo	SC-31	I/P:100-240Vac, 0.8A O/P: 5Vdc, 3A/9Vdc, 3A
USB Cable 1	Lenovo	LGBUC001-CS-H	(red)1.0m shielded cable w/o core
USB Cable 2	Lenovo	LGBUC004-CS-H	(black)1.0m shielded cable w/o core
Glass	ThinkReality	ThinkReality A6 Headset	-
Controller	ThinkReality	ThinkReality A6 Controller	-



2.2 DESCRIPTION OF TEST MODES

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

7 channels are provided for 802.11n (HT40):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

40 channels are provided for BT-LE (GFSK):

CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480



2.2.1 CONFIGURATION OF SYSTEM UNDER TEST

Please see section 5 photographs of the test configuration for reference.

2.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case was found when positioned on Y axis for radiated emission. Following test modes were selected for the final test, and the final worst case is marked in boldface and recorded in the report:

EUT CONFIGURE MODE	APPLICABLE TO				MODE
	RE<1G	RE≥1G	PLC	APCM	
-	√	√	√	√	-

Where **RE<1G**: Radiated Emission below 1GHz **RE≥1G**: Radiated Emission above 1GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

NOTE: No need to concern of Conducted Emission due to the EUT is powered by battery.

RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11n HT20	1 to 11	11	OFDM	BPSK	6.5
BT-LE	0 to 39	19	GFSK	GFSK	1
BT-LE	0 to 39	39	GFSK	GFSK	2



RADIATED EMISSION TEST (ABOVE 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	CCK	DBPSK	1.0
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
802.11n HT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n HT40	3 to 9	3, 6, 9	OFDM	BPSK	13.5
BT-LE	0 to 39	0,19, 39	GFSK	GFSK	1
BT-LE	0 to 39	0,19, 39	GFSK	GFSK	2

POWER LINE CONDUCTED EMISSION TEST:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11n HT20	1 to 11	11	OFDM	BPSK	6.5

BANDEDGE MEASUREMENT:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 11	CCK	DBPSK	1.0
802.11g	1 to 11	1, 11	OFDM	BPSK	6.0
802.11n HT20	1 to 11	1, 11	OFDM	BPSK	6.5
802.11n HT40	3 to 9	3, 9	OFDM	BPSK	13.5
BT-LE	0 to 39	0, 39	DTS	GFSK	1
BT-LE	0 to 39	0, 39	DTS	GFSK	2



ANTENNA PORT CONDUCTED MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	CCK	DBPSK	1.0
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
802.11n HT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n HT40	3 to 9	3,6, 9	OFDM	BPSK	13.5
BT-LE	0 to 39	0, 19, 39	DTS	GFSK	1
BT-LE	0 to 39	0, 19, 39	DTS	GFSK	2

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	TEST VOLTAGE	TESTED BY
RE<1G	23deg. C, 70%RH	DC 5V/9V from adaptor	Star Le
RE≥1G	23deg. C, 70%RH	DC 5V/9V from adaptor	Star Le
PLC	23deg. C, 70%RH	DC 5V/9V from adaptor	John Wen
APCM	23deg. C, 70%RH	DC 3.85V from battery	Rain Wang



2.3 Duty Cycle of Test Signal


WIFI 2.4GHZ

802.11b: Duty cycle = 12.18/12.30 = 0.990 > 98%, Duty factor shall not be considered

802.11g: Duty cycle = 2.023/2.063 = 0.981 > 98%, Duty factor shall not be considered


802.11n (HT20): Duty cycle = 1.886/1.926 = 0.979 < 98%, Duty factor = 10 * log(1/0.979) = 0.091

802.11n (HT40): Duty cycle = 922/979 = 0.942 < 98%, Duty factor = 10 * log(1/0.942) = 0.261

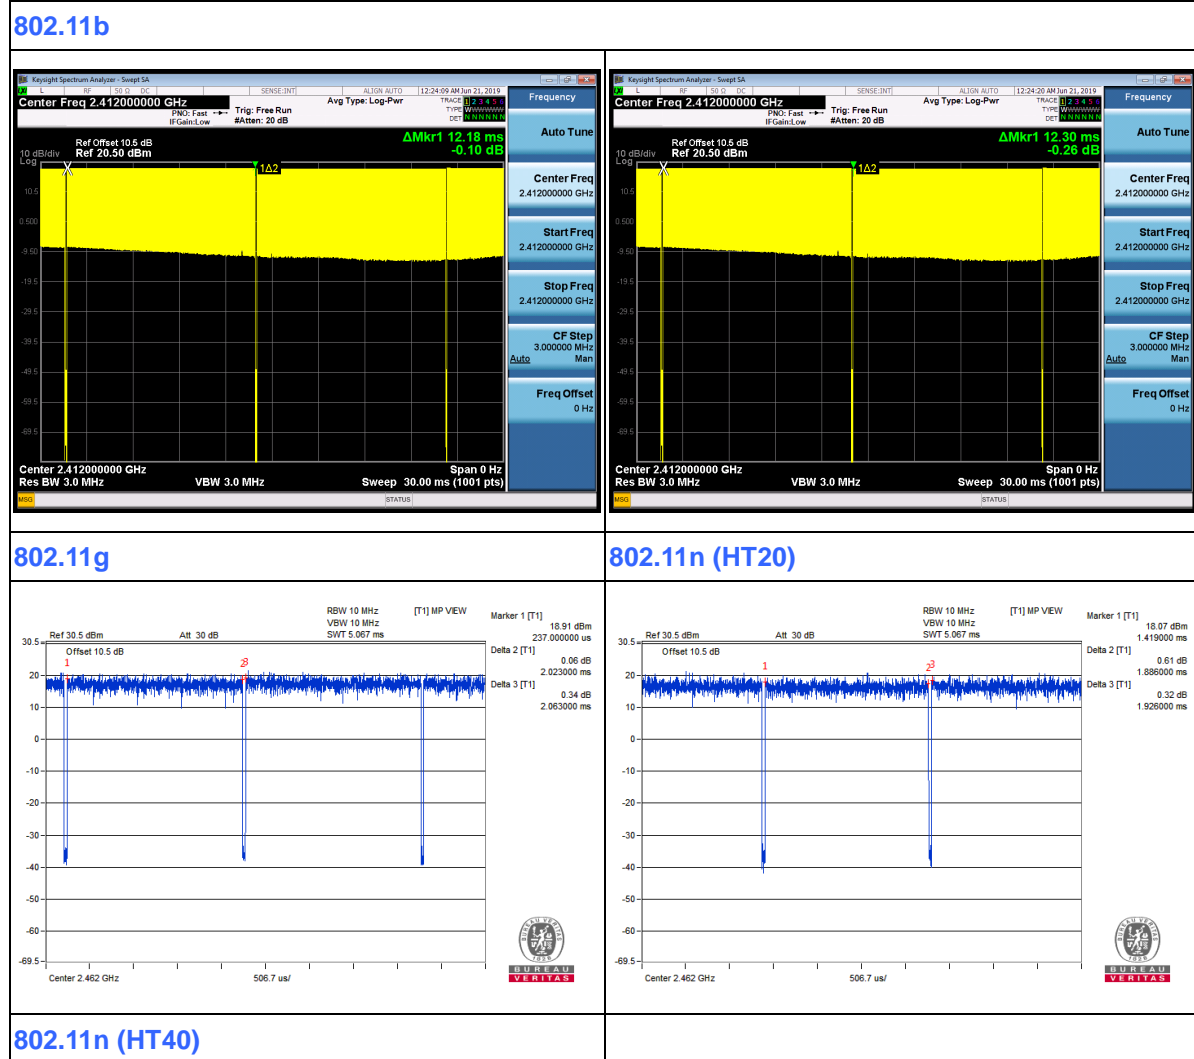



BUREAU VERITAS Test Report No.: RF190610W002

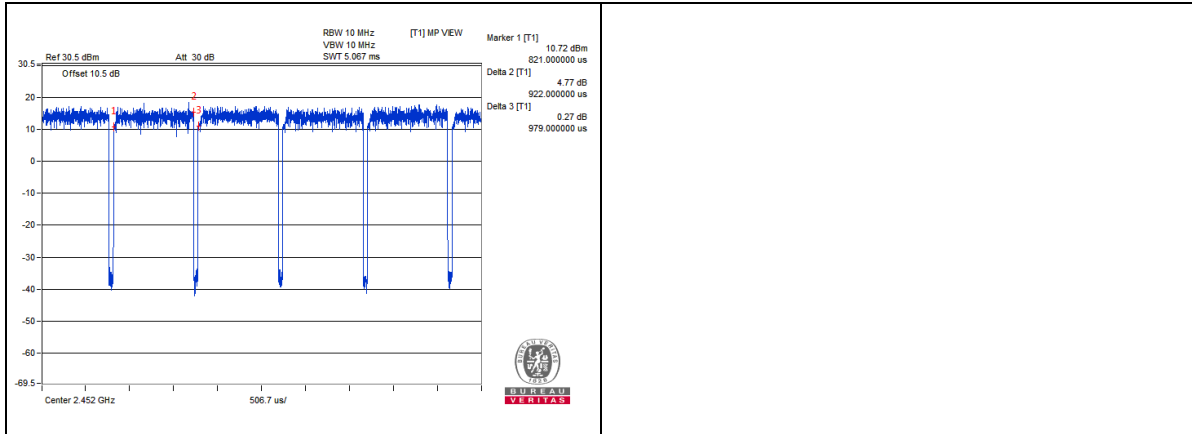




**BUREAU
VERITAS**

Test Report No.: RF190610W002

BT LE

BT 4.0: Duty cycle = 387/636 = 0.608 < 98%, Duty factor = 10 * log(1/0.608) = 2.157

BT 5.0: Duty cycle = 202/627 = 0.322 < 98%, Duty factor = 10 * log(1/0.322) = 4.919

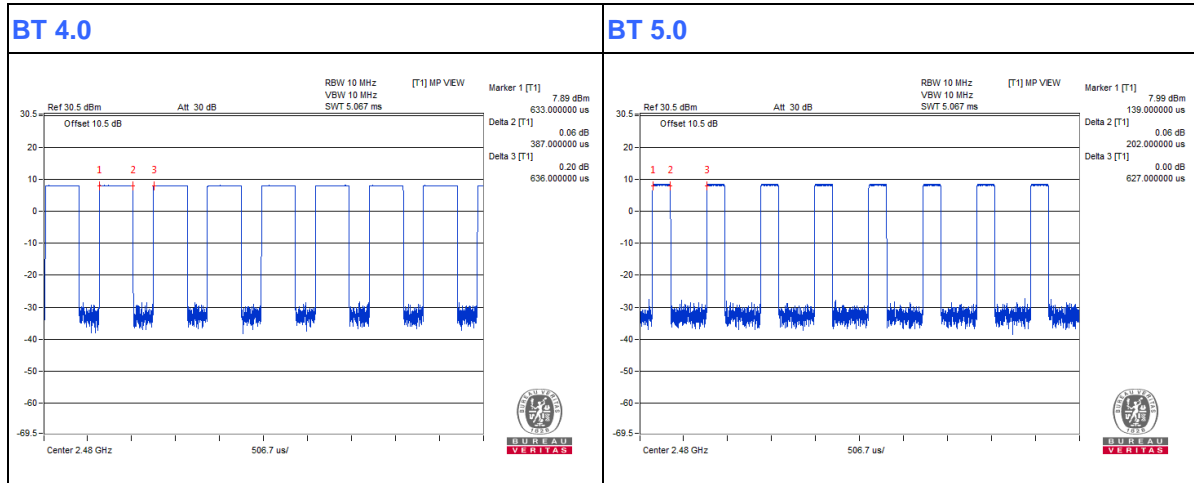



2.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C, Section 15.247

KDB 558074 D01 DTS Meas Guidance v05r02

ANSI C63.10-2013

Note :

1. All test items have been performed and recorded as per the above standards.
2. The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (Certification). The test report has been issued separately.

2.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	DC source	LONG WEI	PS-6403D	010934269	N/A
2	PC	HP	A6608CN	3CR83825X3	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	DC Line: Unshielded, Detachable 1.0m
2	AC Line: Unshielded, Detachable 1.5m



3 TEST TYPES AND RESULTS

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBµV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

3.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR3	101900	Feb. 26,19	Feb. 25,20
EMC32 test software	Rohde&Schwarz	EMC32	NA	NA	NA
LISN network	Rohde&Schwarz	ENV216	101922	Feb. 26,19	Feb. 25,20

- NOTE:**
1. The test was performed in CE shielded room.
 2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.



3.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.


NOTE: All modes of operation were investigated and the worst-case emissions are reported.

3.1.4 DEVIATION FROM TEST STANDARD

No deviation.



3.1.5 TEST SETUP

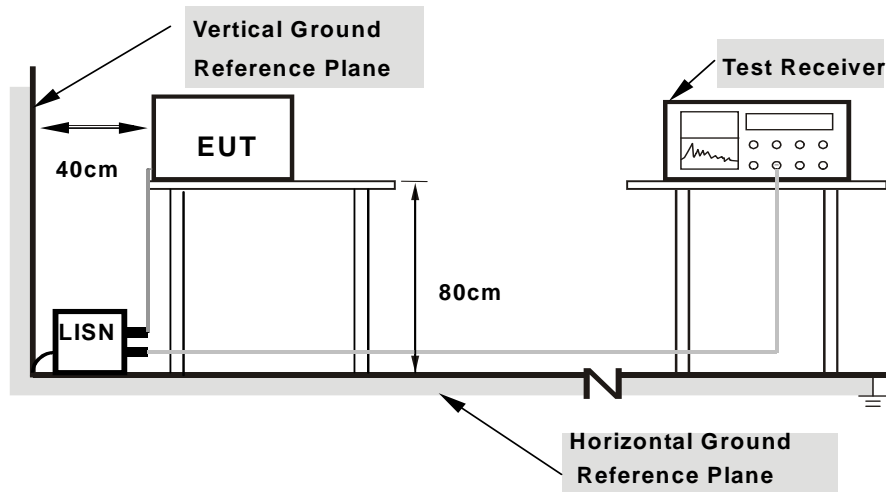

- Note: 1.Support units were connected to second LISN.**
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.1.6 EUT OPERATING CONDITIONS

- a. Turned on the power and connected of all equipment.
- b. EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.



3.1.7 TEST RESULTS

CONDUCTED WORST-CASE DATA FROM ANT 0:

Frequency Range	150KHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120Vac, 60Hz	Environmental Conditions	25deg. C, 52RH
Tested By	John Wen		

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.508000	---	29.94	46.00	-16.06	L1	ON	10.1
0.508000	36.81	---	56.00	-19.19	L1	ON	10.1
1.060000	---	25.65	46.00	-20.35	L1	ON	10.3
1.060000	34.62	---	56.00	-21.38	L1	ON	10.3
1.532000	---	26.45	46.00	-19.55	L1	ON	10.3
1.532000	33.77	---	56.00	-22.23	L1	ON	10.3
9.872000	---	33.98	50.00	-16.02	L1	ON	10.6
9.872000	39.95	---	60.00	-20.05	L1	ON	10.6
10.696000	---	34.09	50.00	-15.91	L1	ON	10.6
10.696000	40.02	---	60.00	-19.98	L1	ON	10.6
23.184000	---	34.53	50.00	-15.47	L1	ON	11.3
23.184000	40.20	---	60.00	-19.80	L1	ON	11.3


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.



**BUREAU
VERITAS**

Test Report No.: RF190610W002

Full Spectrum

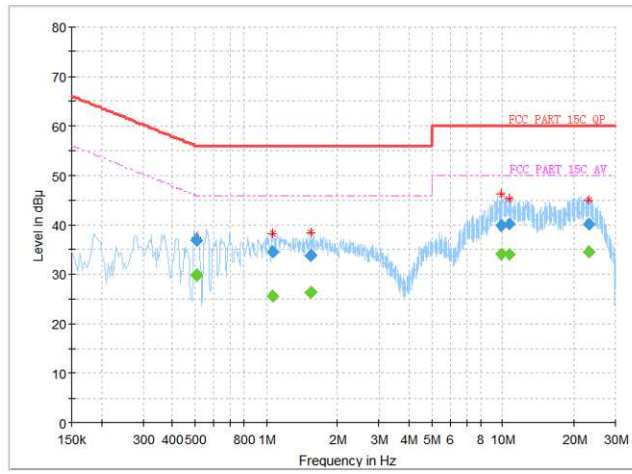




Frequency Range	150KHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120Vac, 60Hz	Environmental Conditions	25deg. C, 52RH
Tested By	John Wen		

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.512000	---	18.04	46.00	-27.96	N	ON	9.9
0.512000	35.48	---	56.00	-20.52	N	ON	9.9
0.984000	---	20.23	46.00	-25.77	N	ON	10.0
0.984000	31.38	---	56.00	-24.62	N	ON	10.0
1.740000	---	20.46	46.00	-25.54	N	ON	10.0
1.740000	30.71	---	56.00	-25.29	N	ON	10.0
9.900000	---	28.19	50.00	-21.81	N	ON	10.3
9.900000	35.80	---	60.00	-24.20	N	ON	10.3
10.486000	---	27.86	50.00	-22.14	N	ON	10.3
10.486000	35.13	---	60.00	-24.87	N	ON	10.3
20.204000	---	25.34	50.00	-24.66	N	ON	10.5
20.204000	32.34	---	60.00	-27.66	N	ON	10.5

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

Full Spectrum

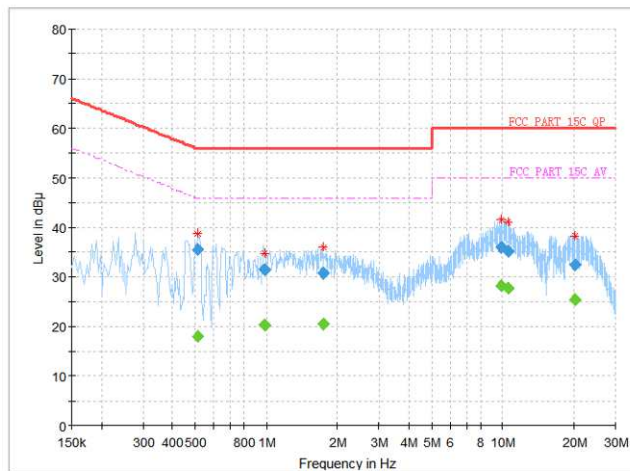



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



3.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	Euroshieldpn-CT0001143-1216	Feb. 26,19	Feb. 25,20
Bilog Antenna	ETS-LINDGREN	3143B	00161965	Feb. 26,19	Feb. 25,20
Horn Antenna	ETS-LINDGREN	3117	00168728	Feb. 26,19	Feb. 25,20
Horn Antenna (18GHz-40GHz)	N/A	QWH-SL-18-40-K-SG/QMS-00361	15433	Nov. 21, 18	Nov. 20, 19
Test Software	E3	V 9.160323	N/A	N/A	N/A
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A	N/A
10dB Attenuator	JFW/USA	50HF-010-SMA	1505	Jul. 09,19	Jul. 08,20
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Feb. 26,19	Feb. 25,20
Signal Pre-Amplifier	EMSI	EMC 9135	980249	Jun. 24,19	Jun. 23,20
Signal Pre-Amplifier	EMSI	EMC 012645B	980257	Jun. 24,19	Jun. 23,20
Signal Pre-Amplifier	EMSI	EMC 184045B	980259	Jun. 24,19	Jun. 23,20

- NOTE:**
1. The calibration interval of the above test instruments is 12 months or 24 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
 2. The test was performed in 3m Chamber.
 3. The FCC Site Registration No. is 525120; The Designation No. is CN1171.



3.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ($10 \log(1/\text{duty cycle})$).
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.


3.2.4 DEVIATION FROM TEST STANDARD

No deviation




3.2.5 TEST SETUP

< Frequency Range 30MHz~1GHz >

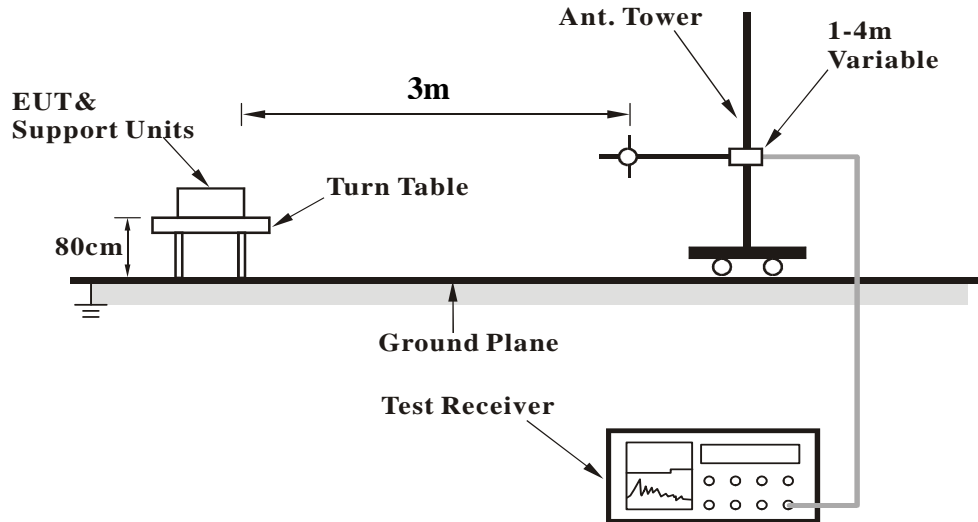

<Frequency Range above 1GHz>

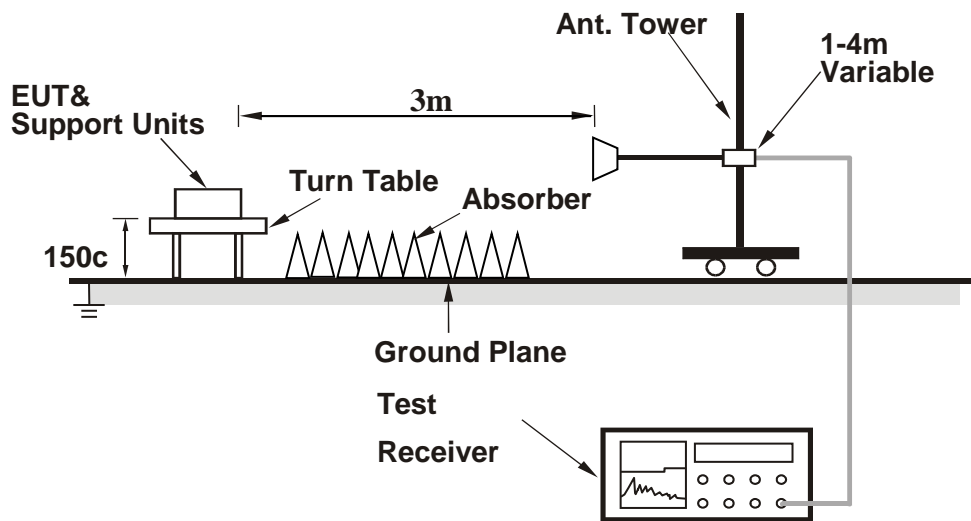

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.2.6 EUT OPERATING CONDITIONS

- Set the EUT under full load condition and placed them on a testing table.
- Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the EUT in full functions.



3.2.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA FROM ANT 0:

30 MHz – 1GHz data:


802.11n (20MHz)

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
46.69	22.28	51.27	40	-17.72	7.36	1.03	37.38	100	360	Peak
101.26	30.13	56.34	43.5	-13.37	9.62	1.32	37.15	100	360	Peak
178.59	27.84	52.48	43.5	-15.66	10.31	1.7	36.65	100	360	Peak
189.67	24.26	48.58	43.5	-19.24	10.54	1.74	36.6	100	360	Peak
215.46	22.09	45.32	43.5	-21.41	11.48	1.87	36.58	100	360	Peak
368.58	24.43	42.51	46	-21.57	16.23	2.49	36.8	100	360	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.

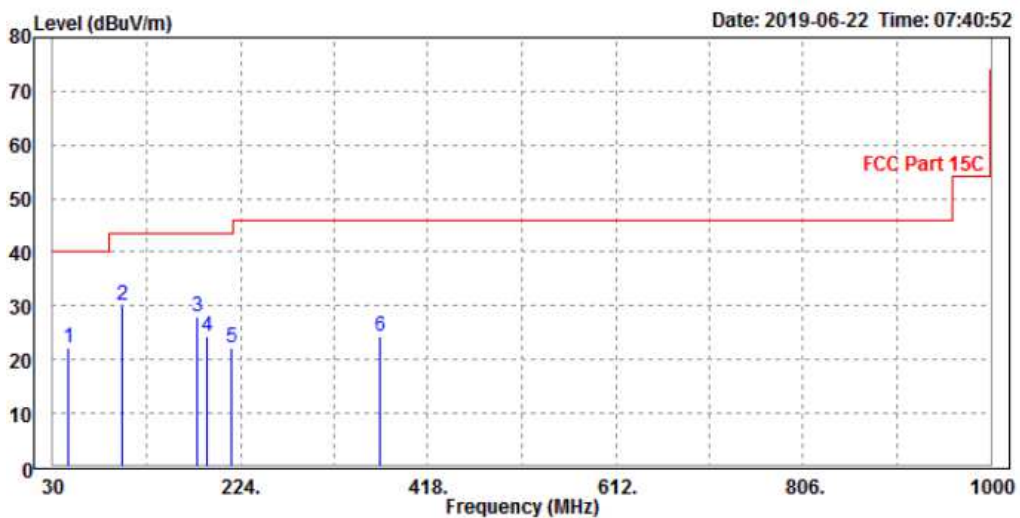




CHANNEL	TX Channel 11	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
51.23	24.26	53.24	40	-15.74	7.33	1.01	37.32	100	0	Peak
95.64	27.49	54.11	43.5	-16.01	9.28	1.3	37.2	100	0	Peak
185.45	20.85	45.24	43.5	-22.65	10.51	1.72	36.62	100	0	Peak
275.41	28.34	49.2	46	-17.66	13.71	2.13	36.7	100	0	Peak
368.45	30.73	48.72	46	-15.27	16.32	2.49	36.8	100	0	Peak
436.56	26.53	42.85	46	-19.47	17.81	2.76	36.89	100	0	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.

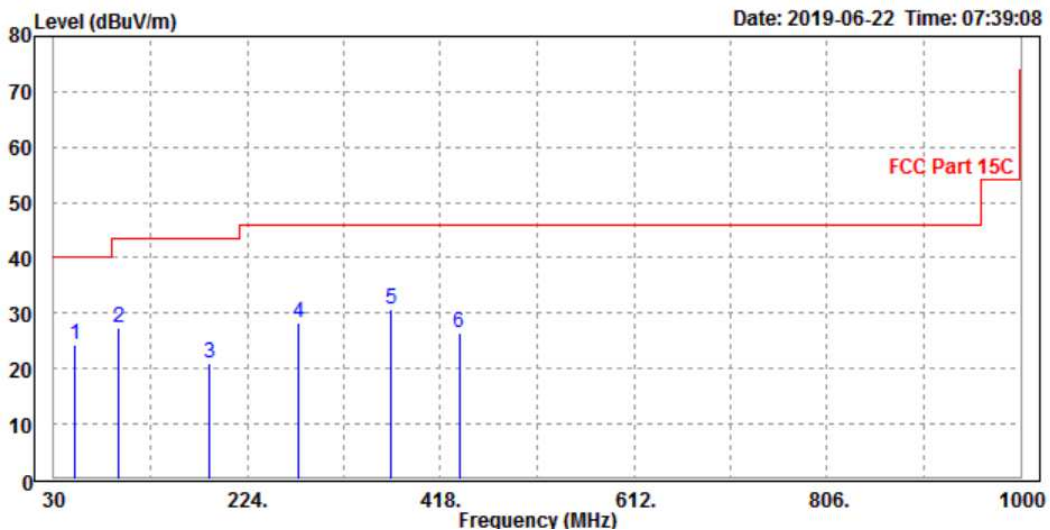



ABOVE 1GHz WORST-CASE DATA:

Note: For higher frequency, the emission is too low to be detected.

802.11b TEST DATA FROM ANT 0:

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	50.02	53.48	74	-23.98	33.1	4.88	41.44	165	5	Peak
2390	39.18	42.64	54	-14.82	33.1	4.88	41.44	165	5	Average
2412	94.12	97.53			33.14	4.9	41.45	165	5	Peak
2412	87.84	91.25			33.14	4.9	41.45	165	5	Average
2483.5	49.65	52.86	74	-24.35	33.27	4.98	41.46	165	5	Peak
2483.5	39.18	42.39	54	-14.82	33.27	4.98	41.46	165	5	Average

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	48.33	52.68	74	-25.67	32.21	4.88	41.44	122	140	Peak
2390	38.01	42.36	54	-15.99	32.21	4.88	41.44	122	140	Average
2412	89.18	93.46			32.27	4.9	41.45	122	140	Peak
2412	82.85	87.13			32.27	4.9	41.45	122	140	Average
2483.5	49.39	53.41	74	-24.61	32.46	4.98	41.46	122	140	Peak
2483.5	38.63	42.65	54	-15.37	32.46	4.98	41.46	122	140	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2412MHz: Fundamental frequency.



CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	49.17	52.63	74	-24.83	33.1	4.88	41.44	12	160	Peak
2390	39.69	43.15	54	-14.31	33.1	4.88	41.44	12	160	Average
2437	92.35	95.68			33.19	4.93	41.45	12	160	Peak
2437	85.19	88.52			33.19	4.93	41.45	12	160	Average
2483.5	49.28	52.49	74	-24.72	33.27	4.98	41.46	12	160	Peak
2483.5	38.06	41.27	54	-15.94	33.27	4.98	41.46	12	160	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	48.31	52.66	74	-25.69	32.21	4.88	41.44	125	142	Peak
2390	38.3	42.65	54	-15.7	32.21	4.88	41.44	125	142	Average
2437	89.46	93.64			32.34	4.93	41.45	125	142	Peak
2437	82.24	86.42			32.34	4.93	41.45	125	142	Average
2483.5	48.32	52.34	74	-25.68	32.46	4.98	41.46	125	142	Peak
2483.5	38.56	42.58	54	-15.44	32.46	4.98	41.46	125	142	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2437MHz: Fundamental frequency.



CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	48.7	52.16	74	-25.3	33.1	4.88	41.44	16	168	Peak
2390	38.21	41.67	54	-15.79	33.1	4.88	41.44	16	168	Average
2462	92.52	95.78			33.23	4.96	41.45	16	168	Peak
2462	84.35	87.61			33.23	4.96	41.45	16	168	Average
2483.5	49.94	53.15	74	-24.06	33.27	4.98	41.46	16	168	Peak
2483.5	39.15	42.36	54	-14.85	33.27	4.98	41.46	16	168	Average

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	48.01	52.36	74	-25.99	32.21	4.88	41.44	123	156	Peak
2390	38.16	42.51	54	-15.84	32.21	4.88	41.44	123	156	Average
2462	90.12	94.21			32.4	4.96	41.45	123	156	Peak
2462	82.66	86.75			32.4	4.96	41.45	123	156	Average
2483.5	48.65	52.67	74	-25.35	32.46	4.98	41.46	123	156	Peak
2483.5	38.22	42.24	54	-15.78	32.46	4.98	41.46	123	156	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2462MHz: Fundamental frequency.

**802.11g TEST DATA FROM ANT 0:**

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	48.88	52.34	74	-25.12	33.1	4.88	41.44	165	8	Peak
2390	38.89	42.35	54	-15.11	33.1	4.88	41.44	165	8	Average
2412	91.66	95.07			33.14	4.9	41.45	165	8	Peak
2412	83.48	86.89			33.14	4.9	41.45	165	8	Average
2483.5	48.48	51.69	74	-25.52	33.27	4.98	41.46	165	8	Peak
2483.5	38.36	41.57	54	-15.64	33.27	4.98	41.46	165	8	Average

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	48.13	52.48	74	-25.87	32.21	4.88	41.44	125	148	Peak
2390	39.3	43.65	54	-14.7	32.21	4.88	41.44	125	148	Average
2412	86.97	91.25			32.27	4.9	41.45	125	148	Peak
2412	78.88	83.16			32.27	4.9	41.45	125	148	Average
2483.5	47.62	51.64	74	-26.38	32.46	4.98	41.46	125	148	Peak
2483.5	37.21	41.23	54	-16.79	32.46	4.98	41.46	125	148	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2412MHz: Fundamental frequency.



CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	49.18	52.64	74	-24.82	33.1	4.88	41.44	167	12	Peak
2390	38.67	42.13	54	-15.33	33.1	4.88	41.44	167	12	Average
2437	93.09	96.42			33.19	4.93	41.45	167	12	Peak
2437	81.18	84.51			33.19	4.93	41.45	167	12	Average
2483.5	49.16	52.37	74	-24.84	33.27	4.98	41.46	167	12	Peak
2483.5	39.15	42.36	54	-14.85	33.27	4.98	41.46	167	12	Average

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	49.06	53.41	74	-24.94	32.21	4.88	41.44	126	151	Peak
2390	39.27	43.62	54	-14.73	32.21	4.88	41.44	126	151	Average
2437	86.84	91.02			32.34	4.93	41.45	126	151	Peak
2437	78.27	82.45			32.34	4.93	41.45	126	151	Average
2483.5	47.25	51.27	74	-26.75	32.46	4.98	41.46	126	151	Peak
2483.5	37.57	41.59	54	-16.43	32.46	4.98	41.46	126	151	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2437MHz: Fundamental frequency.



CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	49	52.46	74	-25	33.1	4.88	41.44	166	18	Peak
2390	39.05	42.51	54	-14.95	33.1	4.88	41.44	166	18	Average
2462	92.98	96.24			33.23	4.96	41.45	166	18	Peak
2462	84.08	87.34			33.23	4.96	41.45	166	18	Average
2483.5	50.29	53.5	74	-23.71	33.27	4.98	41.46	166	18	Peak
2483.5	39.67	42.88	54	-14.33	33.27	4.98	41.46	166	18	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	48.11	52.46	74	-25.89	32.21	4.88	41.44	122	156	Peak
2390	37.96	42.31	54	-16.04	32.21	4.88	41.44	122	156	Average
2462	86.97	91.06			32.4	4.96	41.45	122	156	Peak
2462	79.36	83.45			32.4	4.96	41.45	122	156	Average
2483.5	49.46	53.48	74	-24.54	32.46	4.98	41.46	122	156	Peak
2483.5	39.23	43.25	54	-14.77	32.46	4.98	41.46	122	156	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2462MHz: Fundamental frequency.



802.11n (20MHz) TEST DATA FROM ANT 0+ANT 1:

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	50.89	54.35	74	-23.11	33.1	4.88	41.44	169	18	Peak
2390	40.06	43.52	54	-13.94	33.1	4.88	41.44	169	18	Average
2412	92.82	96.23			33.14	4.9	41.45	169	18	Peak
2412	83.35	86.76			33.14	4.9	41.45	169	18	Average
2483.5	49.28	52.49	74	-24.72	33.27	4.98	41.46	169	18	Peak
2483.5	39.11	42.32	54	-14.89	33.27	4.98	41.46	169	18	Average

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	49.88	54.23	74	-24.12	32.21	4.88	41.44	123	145	Peak
2390	38.81	43.16	54	-15.19	32.21	4.88	41.44	123	145	Average
2412	88.09	92.37			32.27	4.9	41.45	123	145	Peak
2412	78.3	82.58			32.27	4.9	41.45	123	145	Average
2483.5	47.43	51.45	74	-26.57	32.46	4.98	41.46	123	145	Peak
2483.5	38.84	42.86	54	-15.16	32.46	4.98	41.46	123	145	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2412MHz: Fundamental frequency.



CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	48.88	52.34	74	-25.12	33.1	4.88	41.44	165	356	Peak
2390	37.79	41.25	54	-16.21	33.1	4.88	41.44	165	356	Average
2437	93.25	96.58			33.19	4.93	41.45	165	356	Peak
2437	83.21	86.54			33.19	4.93	41.45	165	356	Average
2483.5	49.44	52.65	74	-24.56	33.27	4.98	41.46	165	356	Peak
2483.5	38.03	41.24	54	-15.97	33.27	4.98	41.46	165	356	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	50.27	54.62	74	-23.73	32.21	4.88	41.44	136	154	Peak
2390	39.23	43.58	54	-14.77	32.21	4.88	41.44	136	154	Average
2437	87.96	92.14			32.34	4.93	41.45	136	154	Peak
2437	89.23	93.41			32.34	4.93	41.45	136	154	Average
2483.5	48.65	52.67	74	-25.35	32.46	4.98	41.46	136	154	Peak
2483.5	38.54	42.56	54	-15.46	32.46	4.98	41.46	136	154	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2437MHz: Fundamental frequency.



CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	49.18	52.64	74	-24.82	33.1	4.88	41.44	170	12	Peak
2390	38.9	42.36	54	-15.1	33.1	4.88	41.44	170	12	Average
2462	93.49	96.75			33.23	4.96	41.45	170	12	Peak
2462	84.25	87.51			33.23	4.96	41.45	170	12	Average
2483.5	51.49	54.7	74	-22.51	33.27	4.98	41.46	170	12	Peak
2483.5	40.38	43.59	54	-13.62	33.27	4.98	41.46	170	12	Average

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	48.07	52.42	74	-25.93	32.21	4.88	41.44	125	155	Peak
2390	36.99	41.34	54	-17.01	32.21	4.88	41.44	125	155	Average
2462	87.15	91.24			32.4	4.96	41.45	125	155	Peak
2462	77.44	81.53			32.4	4.96	41.45	125	155	Average
2483.5	50.59	54.61	74	-23.41	32.46	4.98	41.46	125	155	Peak
2483.5	39.85	43.87	54	-14.15	32.46	4.98	41.46	125	155	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2462MHz: Fundamental frequency.



802.11n (40MHz) TEST DATA FROM ANT 0 +ANT 1:

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	50.85	54.31	74	-23.15	33.1	4.88	41.44	165	2	Peak
2390	40.22	43.68	54	-13.78	33.1	4.88	41.44	165	2	Average
2422	88.98	92.35			33.16	4.92	41.45	165	2	Peak
2422	80.28	83.65			33.16	4.92	41.45	165	2	Average
2483.5	49.25	52.46	74	-24.75	33.27	4.98	41.46	165	2	Peak
2483.5	39.56	42.77	54	-14.44	33.27	4.98	41.46	165	2	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	50.34	54.69	74	-23.66	32.21	4.88	41.44	126	152	Peak
2390	39.17	43.52	54	-14.83	32.21	4.88	41.44	126	152	Average
2422	86.09	90.32			32.3	4.92	41.45	126	152	Peak
2422	77.42	81.65			32.3	4.92	41.45	126	152	Average
2483.5	48.32	52.34	74	-25.68	32.46	4.98	41.46	126	152	Peak
2483.5	38.1	42.12	54	-15.9	32.46	4.98	41.46	126	152	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2422MHz: Fundamental frequency.



CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	48.88	52.34	74	-25.12	33.1	4.88	41.44	123	156	Peak
2390	37.89	41.35	54	-16.11	33.1	4.88	41.44	123	156	Average
2437	89.32	92.65			33.19	4.93	41.45	123	156	Peak
2437	80.09	83.42			33.19	4.93	41.45	123	156	Average
2483.5	50.48	53.69	74	-23.52	33.27	4.98	41.46	123	156	Peak
2483.5	39.59	42.8	54	-14.41	33.27	4.98	41.46	123	156	Average

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	48.08	52.43	74	-25.92	32.21	4.88	41.44	125	155	Peak
2390	37.81	42.16	54	-16.19	32.21	4.88	41.44	125	155	Average
2437	85.6	89.78			32.34	4.93	41.45	125	155	Peak
2437	76.45	80.63			32.34	4.93	41.45	125	155	Average
2483.5	49.46	53.48	74	-24.54	32.46	4.98	41.46	125	155	Peak
2483.5	38.87	42.89	54	-15.13	32.46	4.98	41.46	125	155	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2437MHz: Fundamental frequency.



CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	49.19	52.65	74	-24.81	33.1	4.88	41.44	169	8	Peak
2390	39.19	42.65	54	-14.81	33.1	4.88	41.44	169	8	Average
2452	88.39	91.68			33.21	4.95	41.45	169	8	Peak
2452	79.35	82.64			33.21	4.95	41.45	169	8	Average
2483.5	51.58	54.79	74	-22.42	33.27	4.98	41.46	169	8	Peak
2483.5	40.32	43.53	54	-13.68	33.27	4.98	41.46	169	8	Average

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	49.27	53.62	74	-24.73	32.21	4.88	41.44	126	165	Peak
2390	38.23	42.58	54	-15.77	32.21	4.88	41.44	126	165	Average
2452	85.23	89.35			32.38	4.95	41.45	126	165	Peak
2452	77.11	81.23			32.38	4.95	41.45	126	165	Average
2483.5	50.87	54.89	74	-23.13	32.46	4.98	41.46	126	165	Peak
2483.5	39.65	43.67	54	-14.35	32.46	4.98	41.46	126	165	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2452MHz: Fundamental frequency.



BELOW 1GHz WORST-CASE DATA FROM ANT 0:

30 MHz – 1GHz data:


BT-LE (1MHz) (GFSK)

CHANNEL	TX Channel 19	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
45.32	19.8	48.69	40	-20.2	7.47	1.04	37.4	100	0	Peak
102.34	26.05	52.31	43.5	-17.45	9.56	1.33	37.15	100	0	Peak
210.02	25.08	48.57	43.5	-18.42	11.24	1.84	36.57	100	0	Peak
268.53	24.49	45.67	46	-21.51	13.41	2.1	36.69	100	0	Peak
355.64	22.72	41.25	46	-23.28	15.82	2.44	36.79	100	0	Peak
455.82	25.48	41.64	46	-20.52	17.93	2.83	36.92	100	0	Peak

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

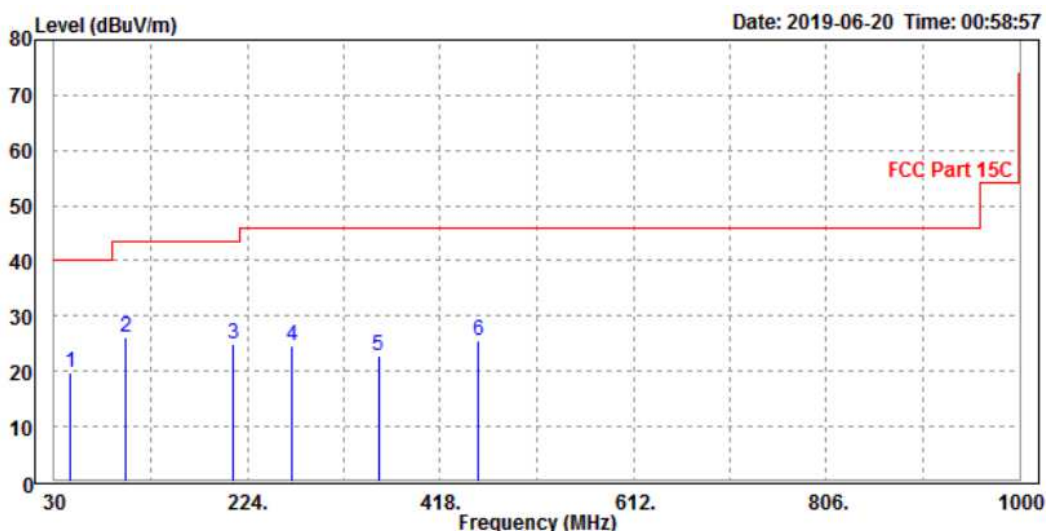




CHANNEL	TX Channel 19	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
52.34	24.16	53.2	40	-15.84	7.26	1.02	37.32	100	360	Peak
121.35	24.14	51.06	43.5	-19.36	8.7	1.45	37.07	100	360	Peak
175.12	26.65	51.22	43.5	-16.85	10.4	1.69	36.66	100	360	Peak
285.64	24.61	45.26	46	-21.39	13.91	2.16	36.72	100	360	Peak
378.42	27.61	45.26	46	-18.39	16.63	2.53	36.81	100	360	Peak
485.21	22.99	38.53	46	-23.01	18.49	2.94	36.97	100	360	Peak

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

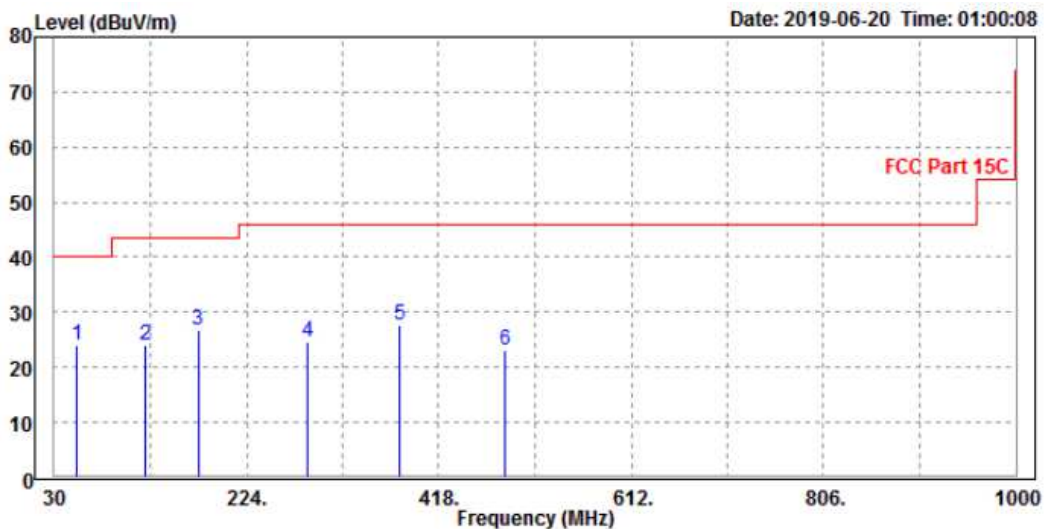




BT-LE (2MHz) (GFSK)

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
48.23	20.41	49.51	40	-19.59	7.24	1.01	37.35	100	0	Peak
100.23	24.86	51.02	43.5	-18.64	9.69	1.31	37.16	100	0	Peak
201.32	21.71	45.6	43.5	-21.79	10.86	1.8	36.55	100	0	Peak
255.46	20.87	42.35	46	-25.13	13.12	2.06	36.66	100	0	Peak
325.16	23.63	43.21	46	-22.37	14.88	2.31	36.77	100	0	Peak
48.23	20.41	49.51	40	-19.59	7.24	1.01	37.35	100	0	Peak

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

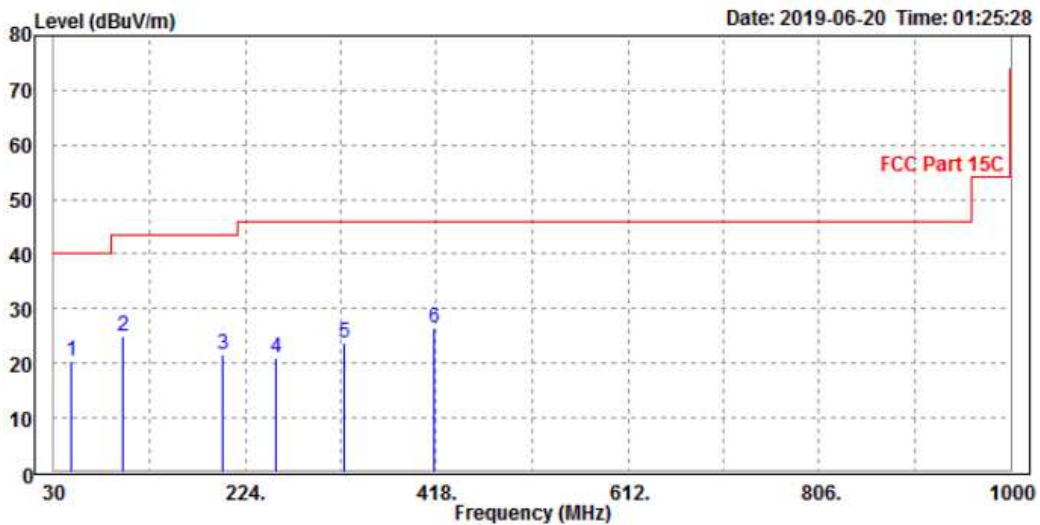




CHANNEL	TX Channel 39	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
56.48	24.96	54.23	40	-15.04	7.01	1.05	37.33	100	360	Peak
125.46	26.34	53.21	43.5	-17.16	8.7	1.47	37.04	100	360	Peak
189.25	28.97	53.24	43.5	-14.53	10.59	1.74	36.6	100	360	Peak
299.45	26.43	46.78	46	-19.57	14.19	2.21	36.75	100	360	Peak
355.48	27.88	46.31	46	-18.12	15.92	2.44	36.79	100	360	Peak
465.21	23.78	39.65	46	-22.22	18.21	2.86	36.94	100	360	Peak

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

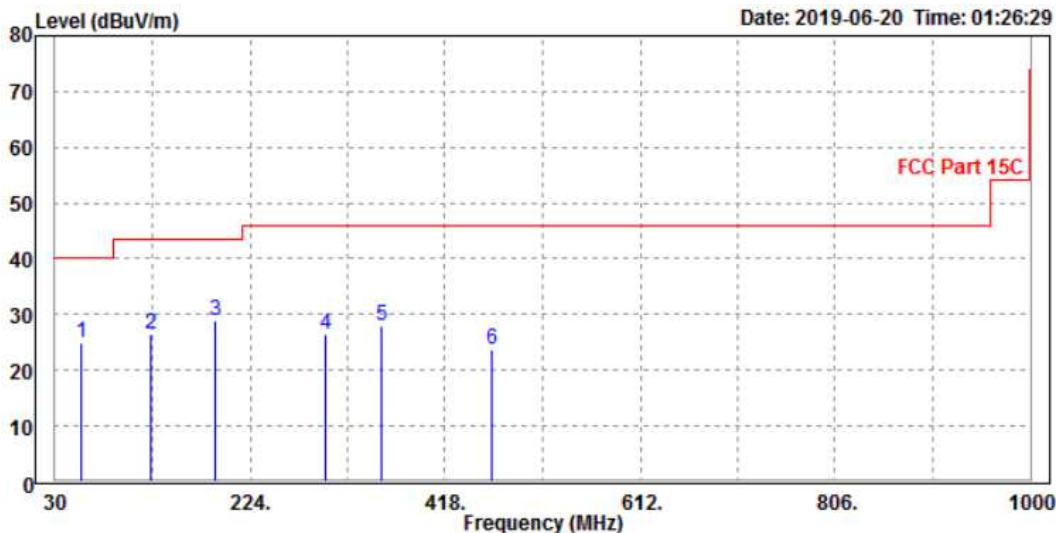



ABOVE 1GHz TEST DATA FROM ANT 0:

Note: For higher frequency, the emission is too low to be detected.

BT-LE (1MHz) (GFSK)

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	49.8	53.26	74	-24.2	33.1	4.88	41.44	100	91	Peak
2390	38.67	42.13	54	-15.33	33.1	4.88	41.44	100	91	Average
2402	95.2	98.63			33.12	4.89	41.44	100	91	Peak
2402	86.02	89.45			33.12	4.89	41.44	100	91	Average
2483.5	49.16	52.37	74	-24.84	33.27	4.98	41.46	100	91	Peak
2483.5	38.05	41.26	54	-15.95	33.27	4.98	41.46	100	91	Average

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	48.13	52.48	74	-25.87	32.21	4.88	41.44	100	125	Peak
2390	37.96	42.31	54	-16.04	32.21	4.88	41.44	100	125	Average
2402	93.38	97.68			32.25	4.89	41.44	100	125	Peak
2402	82.24	86.54			32.25	4.89	41.44	100	125	Average
2483.5	48.39	52.41	74	-25.61	32.46	4.98	41.46	100	125	Peak
2483.5	38.56	42.58	54	-15.44	32.46	4.98	41.46	100	125	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2402MHz: Fundamental frequency.



CHANNEL	TX Channel 19	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	49.7	53.16	74	-24.3	33.1	4.88	41.44	115	211	Peak
2390	39.07	42.53	54	-14.93	33.1	4.88	41.44	115	211	Average
2440	94.13	97.45			33.19	4.94	41.45	115	211	Peak
2440	84.2	87.52			33.19	4.94	41.45	115	211	Average
2483.5	50.03	53.24	74	-23.97	33.27	4.98	41.46	115	211	Peak
2483.5	39.34	42.55	54	-14.66	33.27	4.98	41.46	115	211	Average

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	48.34	52.69	74	-25.66	32.21	4.88	41.44	100	115	Peak
2390	37.77	42.12	54	-16.23	32.21	4.88	41.44	100	115	Average
2440	96.04	100.21			32.34	4.94	41.45	100	115	Peak
2440	85.5	89.67			32.34	4.94	41.45	100	115	Average
2483.5	48.44	52.46	74	-25.56	32.46	4.98	41.46	100	115	Peak
2483.5	37.83	41.85	54	-16.17	32.46	4.98	41.46	100	115	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2440MHz: Fundamental frequency.



CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	49.8	53.26	74	-24.2	33.1	4.88	41.44	100	236	Peak
2390	38.89	42.35	54	-15.11	33.1	4.88	41.44	100	236	Average
2480	96.47	99.69			33.26	4.98	41.46	100	236	Peak
2480	86.35	89.57			33.26	4.98	41.46	100	236	Average
2483.5	49.14	52.35	74	-24.86	33.27	4.98	41.46	100	211	Peak
2483.5	39.01	42.22	54	-14.99	33.27	4.98	41.46	100	236	Average

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	49.27	53.62	74	-24.73	32.21	4.88	41.44	100	125	Peak
2390	38.23	42.58	54	-15.77	32.21	4.88	41.44	100	125	Average
2480	95.61	99.64			32.45	4.98	41.46	100	125	Peak
2480	86.22	90.25			32.45	4.98	41.46	100	125	Average
2483.5	48.36	52.38	74	-25.64	32.46	4.98	41.46	100	125	Peak
2483.5	38.49	42.51	54	-15.51	32.46	4.98	41.46	100	125	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2480MHz: Fundamental frequency.



BT-LE (2MHz) (GFSK)

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	48.9	52.36	74	-25.1	33.1	4.88	41.44	100	35	Peak
2390	38.06	41.52	54	-15.94	33.1	4.88	41.44	100	35	Average
2402	95.08	98.51			33.12	4.89	41.44	100	35	Peak
2402	86.22	89.65			33.12	4.89	41.44	100	35	Average
2483.5	49.28	52.49	74	-24.72	33.27	4.98	41.46	100	35	Peak
2483.5	38.37	41.58	54	-15.63	33.27	4.98	41.46	100	35	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	48.28	52.63	74	-25.72	32.21	4.88	41.44	100	23	Peak
2390	37.8	42.15	54	-16.2	32.21	4.88	41.44	100	23	Average
2402	94.93	99.23			32.25	4.89	41.44	100	23	Peak
2402	85.95	90.25			32.25	4.89	41.44	100	23	Average
2483.5	48.32	52.34	74	-25.68	32.46	4.98	41.46	100	23	Peak
2483.5	38.29	42.31	54	-15.71	32.46	4.98	41.46	100	23	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2402MHz: Fundamental frequency.



CHANNEL	TX Channel 19	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	49.1	52.56	74	-24.9	33.1	4.88	41.44	100	45	Peak
2390	38.69	42.15	54	-15.31	33.1	4.88	41.44	100	45	Average
2440	94.99	98.31			33.19	4.94	41.45	100	45	Peak
2440	85.35	88.67			33.19	4.94	41.45	100	45	Average
2483.5	49.06	52.27	74	-24.94	33.27	4.98	41.46	100	45	Peak
2483.5	38.28	41.49	54	-15.72	33.27	4.98	41.46	100	45	Average

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	48	52.35	74	-26	32.21	4.88	41.44	100	36	Peak
2390	37.3	41.65	54	-16.7	32.21	4.88	41.44	100	36	Average
2440	95.68	99.85			32.34	4.94	41.45	100	36	Peak
2440	86.07	90.24			32.34	4.94	41.45	100	36	Average
2483.5	48.29	52.31	74	-25.71	32.46	4.98	41.46	100	36	Peak
2483.5	37.44	41.46	54	-16.56	32.46	4.98	41.46	100	36	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2440MHz: Fundamental frequency.



CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	48.67	52.13	74	-25.33	33.1	4.88	41.44	100	23	Peak
2390	37.89	41.35	54	-16.11	33.1	4.88	41.44	100	23	Average
2480	94.43	97.65			33.26	4.98	41.46	100	23	Peak
2480	86.35	89.57			33.26	4.98	41.46	100	23	Average
2483.5	50.92	54.13	74	-23.08	33.27	4.98	41.46	100	23	Peak
2483.5	40.06	43.27	54	-13.94	33.27	4.98	41.46	100	23	Average

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	47.99	52.34	74	-26.01	32.21	4.88	41.44	100	45	Peak
2390	36.92	41.27	54	-17.08	32.21	4.88	41.44	100	45	Average
2480	95.86	99.89			32.45	4.98	41.46	100	45	Peak
2480	87.2	91.23			32.45	4.98	41.46	100	45	Average
2483.5	49.66	53.68	74	-24.34	32.46	4.98	41.46	100	45	Peak
2483.5	38.49	42.51	54	-15.51	32.46	4.98	41.46	100	45	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2480MHz: Fundamental frequency.



3.3 6 dB BANDWIDTH MEASUREMENT

3.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

3.3.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Power Meter	ANRITSU	ML2495A	1506002	Feb. 26,19	Feb. 25,20
EXA Signal Analyzer	KEYSIGHT	N9010A-526	MY54510322	Feb. 26,19	Feb. 25,20
EXA Signal Analyzer	KEYSIGHT	N9010A-544	MY54510355	Feb. 26,19	Feb. 25,20
Power Sensor	ANRITSU	MA2411B	1339352	Feb. 26,19	Feb. 25,20

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
2. The test was performed in RF Oven room.

3.3.3 TEST PROCEDURE


1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



3.3.4 DEVIATION FROM TEST STANDARD

No deviation.

3.3.5 TEST SETUP

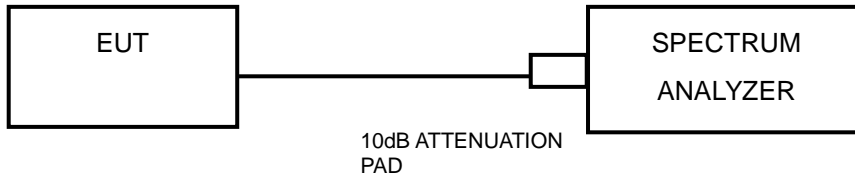

3.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.




3.3.7 TEST RESULTS

TEST DATA FROM ANT 0:

802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	9.01	0.5	PASS
6	2437	8.07	0.5	PASS
11	2462	9.04	0.5	PASS

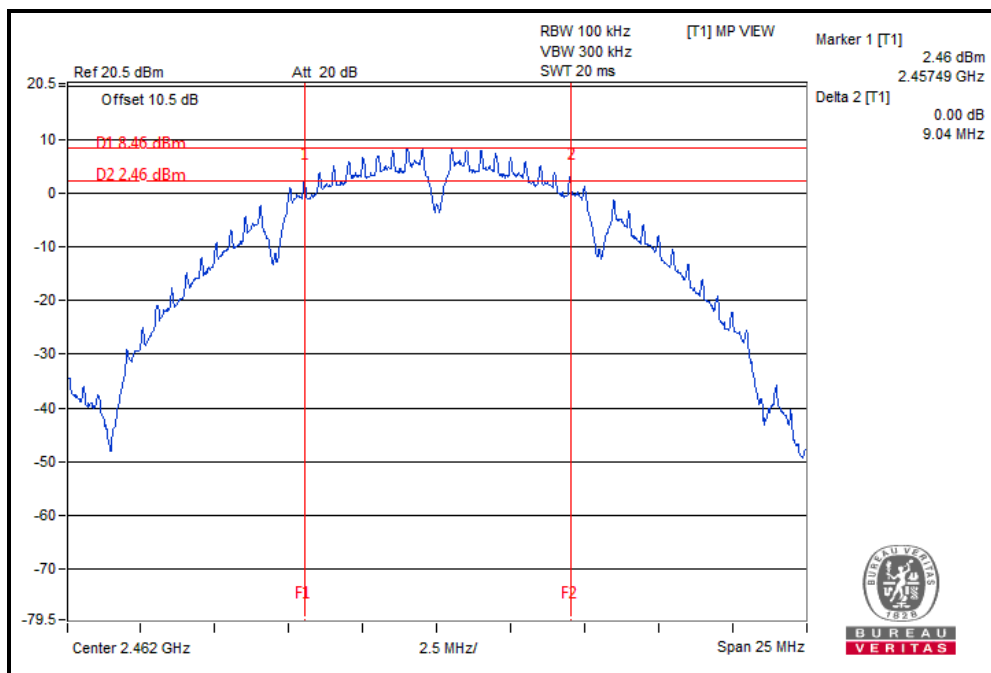




**BUREAU
VERITAS**

Test Report No.: RF190610W002

802.11g


CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	16.04	0.5	PASS
6	2437	16.26	0.5	PASS
11	2462	16.29	0.5	PASS

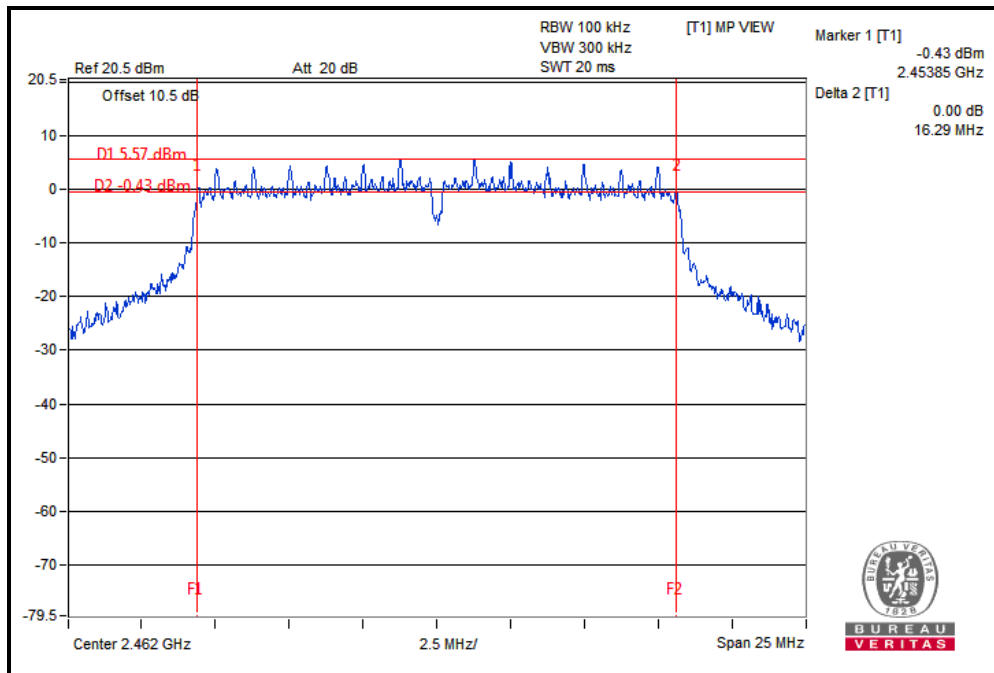



802.11n (20MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	16.52	0.5	PASS
6	2437	15.52	0.5	PASS
11	2462	16.91	0.5	PASS

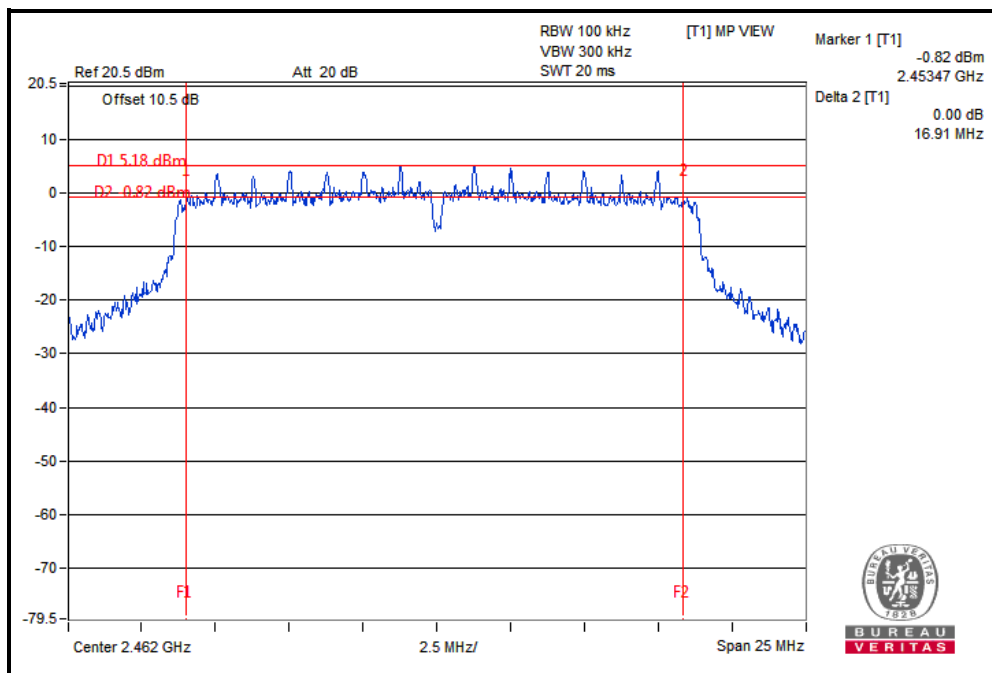




**BUREAU
VERITAS**

Test Report No.: RF190610W002

802.11n (40MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
3	2422	35.15	0.5	PASS
6	2437	35.12	0.5	PASS
9	2452	35.70	0.5	PASS

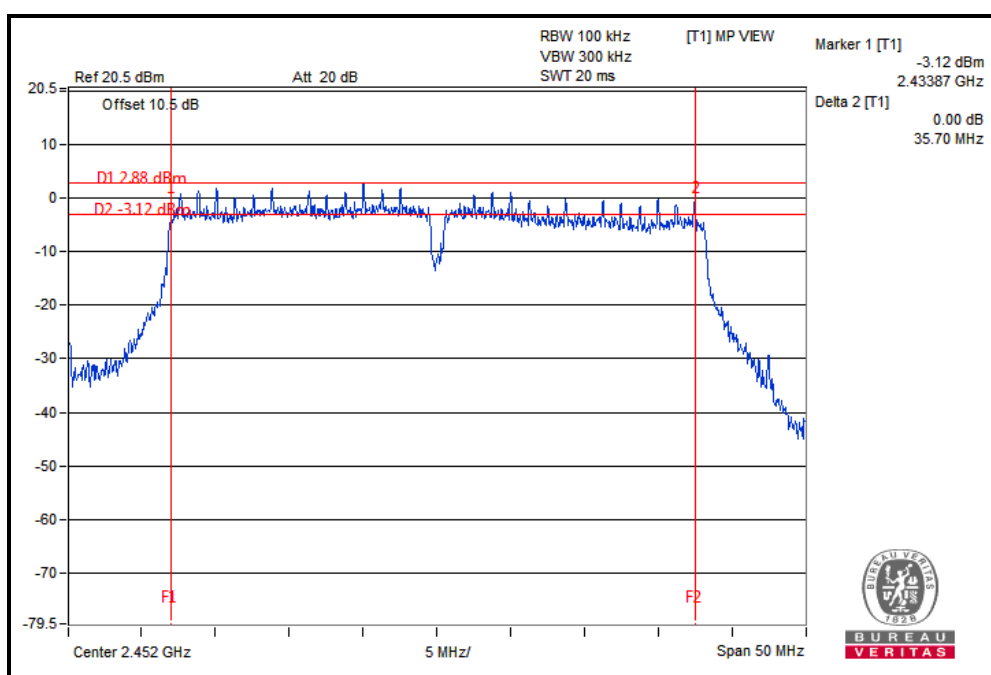




**BUREAU
VERITAS**

Test Report No.: RF190610W002

BT-LE (1MHz) (GFSK)


CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
0	2402	0.67	0.5	PASS
19	2440	0.67	0.5	PASS
39	2480	0.67	0.5	PASS

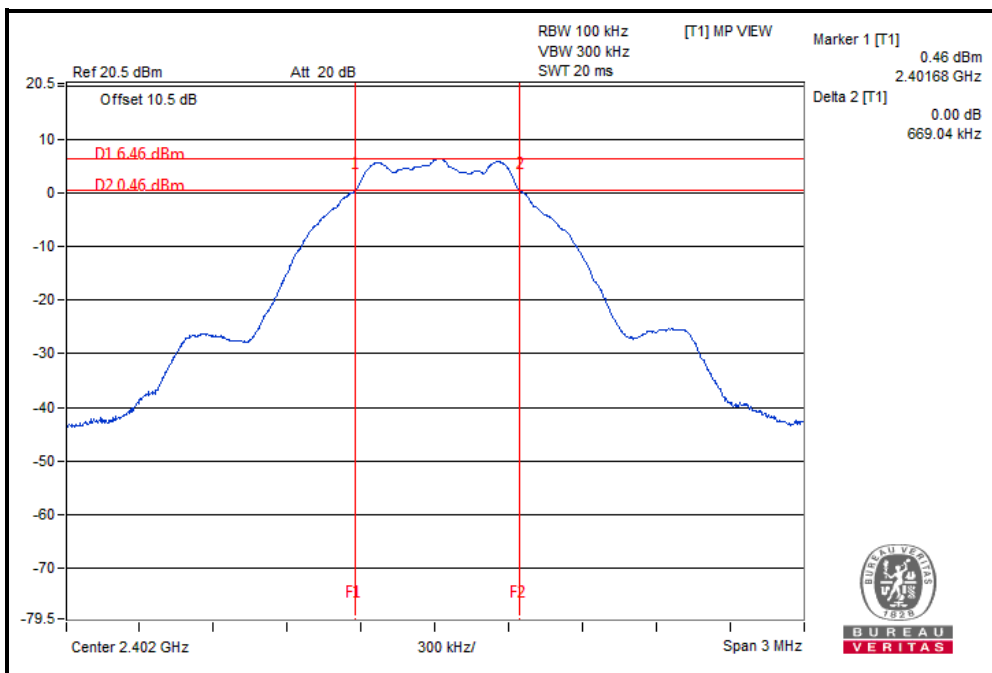



BT-LE (2MHz) (GFSK)

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
0	2402	1.14	0.5	PASS
19	2440	1.14	0.5	PASS
39	2480	1.14	0.5	PASS

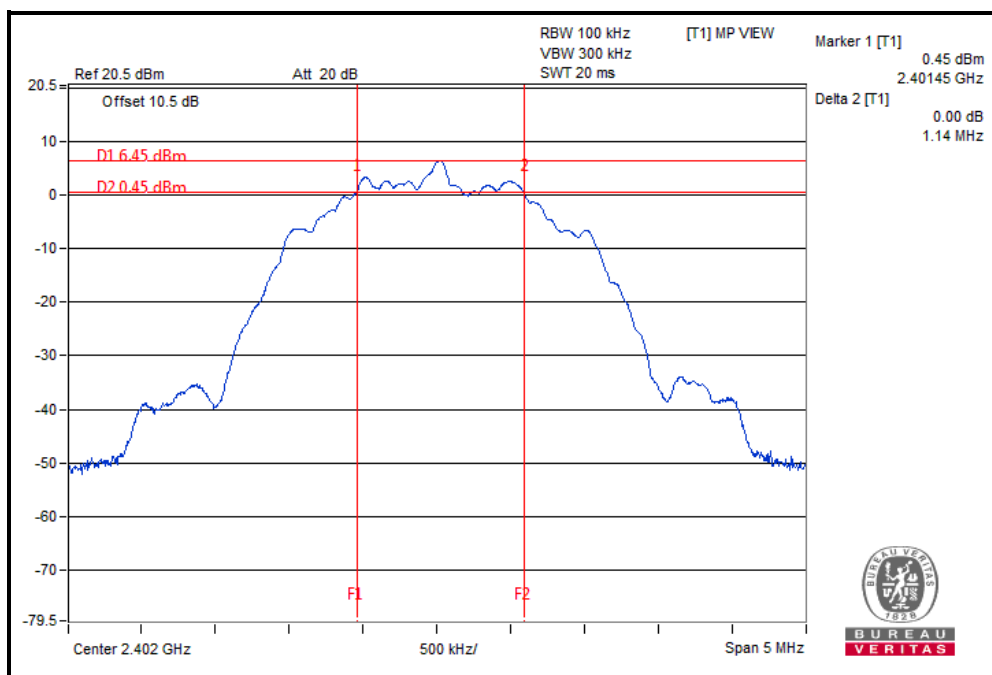




3.4 CONDUCTED OUTPUT POWER

3.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz band: 1 Watt (30dBm)

3.4.2 TEST SETUP

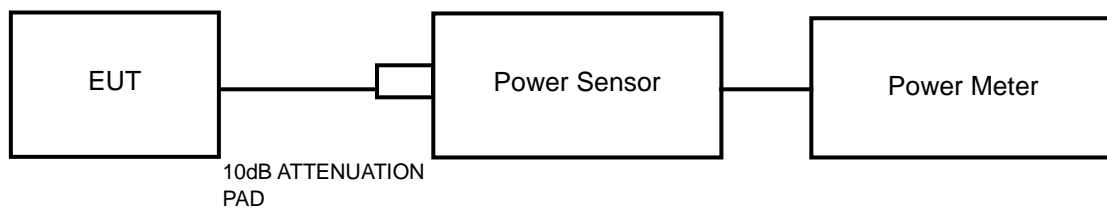

3.4.3 TEST INSTRUMENTS

Refer to section 3.3.2 to get information of above instrument.

3.4.4 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

3.4.5 DEVIATION FROM TEST STANDARD

No deviation.

3.4.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



3.4.7 TEST RESULTS

3.4.7.1 MAXIMUM PEAK OUTPUT POWER

802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER				PEAK POWER LIMIT(W)	PASS/FAIL
		ANT 0 (dBm)	ANT 1 (dBm)	ANT 0 (mW)	ANT 1 (mW)		
1	2412	18.84	19.75	76.56	94.41	1	PASS
6	2437	19.15	19.53	82.22	89.74	1	PASS
11	2462	18.76	19.32	75.16	85.51	1	PASS

802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER				PEAK POWER LIMIT(W)	PASS/FAIL
		ANT 0 (dBm)	ANT 1 (dBm)	ANT 0 (mW)	ANT 1 (mW)		
1	2412	19.63	20.27	91.83	106.41	1	PASS
6	2437	19.80	19.94	95.50	98.63	1	PASS
11	2462	19.41	19.93	87.30	98.40	1	PASS

802.11n (20MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER				PEAK POWER LIMIT(W)	PASS/FAIL
		ANT 0 (dBm)	ANT 1 (dBm)	Total (dBm)	Total (mW)		
1	2412	19.18	19.71	22.46	176.33	1	PASS
6	2437	19.38	19.35	22.28	168.89	1	PASS
11	2462	18.80	19.44	22.32	170.70	1	PASS

802.11n (40MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER				PEAK POWER LIMIT(W)	PASS/FAIL
		ANT 0 (dBm)	ANT 1 (dBm)	Total (dBm)	Total (mW)		
3	2422	20.64	21.21	23.94	248.01	1	PASS
6	2437	20.31	20.85	23.76	237.50	1	PASS
9	2452	20.43	21.07	23.87	243.82	1	PASS



BT-LE (1MHz) (GFSK)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT(W)	PASS/FAIL
0	2402	5.38	3.45	1	PASS
19	2440	5.00	3.16	1	PASS
39	2480	6.53	4.50	1	PASS

BT-LE (2MHz) (GFSK)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT(W)	PASS/FAIL
0	2402	5.66	3.68	1	PASS
19	2440	5.32	3.40	1	PASS
39	2480	6.91	4.91	1	PASS



3.4.7.2 AVERAGE OUTPUT POWER (FOR REFERENCE)

The average power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

802.11b

CHANNEL	CHANNEL FREQUENCY	AVERAGE POWER(dBm)			PASS/FAIL
		ANT 0	ANT 0	Total	
1	2412	16.68	17.18	/	N/A
6	2437	16.74	16.98	/	N/A
11	2462	16.55	16.75	/	N/A

802.11g

CHANNEL	CHANNEL FREQUENCY	AVERAGE POWER(dBm)			PASS/FAIL
		ANT 0	ANT 0	Total	
1	2412	14.60	15.50	/	N/A
6	2437	14.82	15.34	/	N/A
11	2462	14.56	15.25	/	N/A

802.11n (20MHz)

CHANNEL	CHANNEL FREQUENCY	AVERAGE POWER(dBm)			PASS/FAIL
		ANT 0	ANT 0	Total	
1	2412	14.01	14.88	17.48	N/A
6	2437	14.22	14.66	17.46	N/A
11	2462	13.90	14.59	17.27	N/A

802.11n (40MHz)

CHANNEL	CHANNEL FREQUENCY	AVERAGE POWER(dBm)			PASS/FAIL
		ANT 0	ANT 0	Total	
3	2412	14.86	15.46	18.18	N/A
6	2437	14.82	15.31	18.08	N/A
9	2462	14.48	15.05	17.78	N/A



BT-LE (1MHz) (GFSK)

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	PASS/FAIL
0	2402	5.24	N/A
19	2440	4.91	N/A
39	2480	6.42	N/A

BT-LE (2MHz) (GFSK)

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	PASS/FAIL
0	2402	5.24	N/A
19	2440	4.92	N/A
39	2480	6.49	N/A




3.5 POWER SPECTRAL DENSITY MEASUREMENT

3.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm/3KHz.

3.5.2 TEST SETUP



3.5.3 TEST INSTRUMENTS

Refer to section 3.3.2 to get information of above instrument.

3.5.4 TEST PROCEDURE

1. Set the span to 1.5 times the DTS bandwidth
2. Set the RBW = 3 kHz, VBW \geq 3 x RBW, Detector = peak.
3. Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum amplitude level.

3.5.5 DEVIATION FROM TEST STANDARD

No deviation.

3.5.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.




**BUREAU
VERITAS**

Test Report No.: RF190610W002

3.5.7 TEST RESULTS

802.11b

Channel	FREQ. (MHz)	ANT 0	ANT 1	Limit (dBm/3kHz)	PASS /FAIL
		PSD (dBm/3kHz)	PSD (dBm/3kHz)		
1	2412	-6.35	-5.10	8	PASS
6	2437	-4.59	-6.92	8	PASS
11	2462	-5.72	-4.91	8	PASS

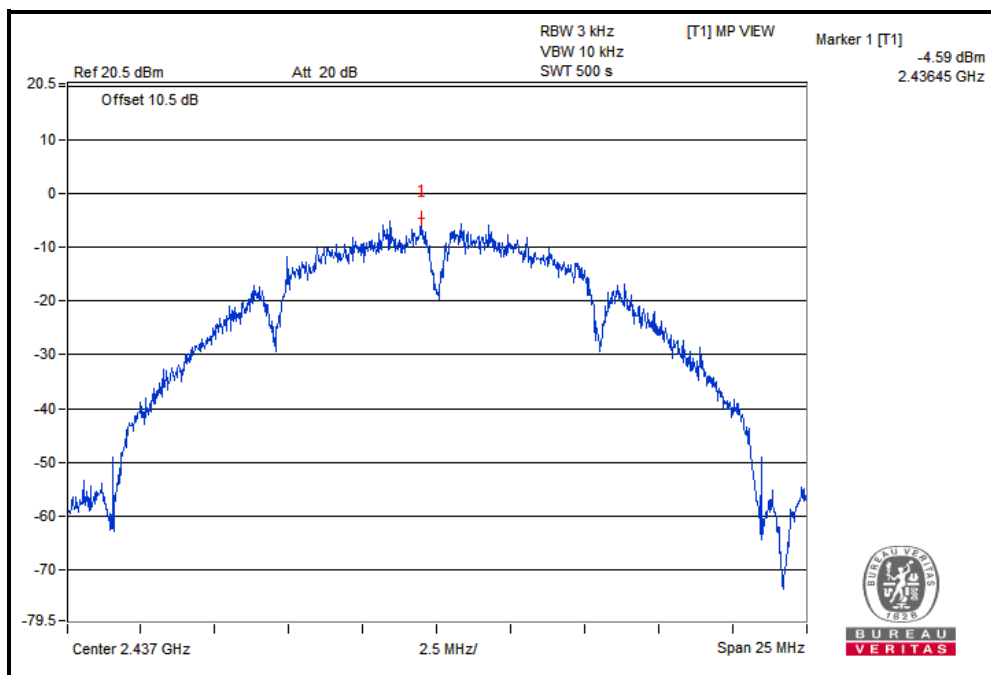




**BUREAU
VERITAS**

Test Report No.: RF190610W002

802.11g

Channel	FREQ. (MHz)	ANT 0	ANT 1	Limit (dBm/3kHz)	PASS /FAIL
		PSD (dBm/3kHz)	PSD (dBm/3kHz)		
1	2412	-10.81	-10.29	8	PASS
6	2437	-10.79	-9.08	8	PASS
11	2462	-11.25	-10.12	8	PASS

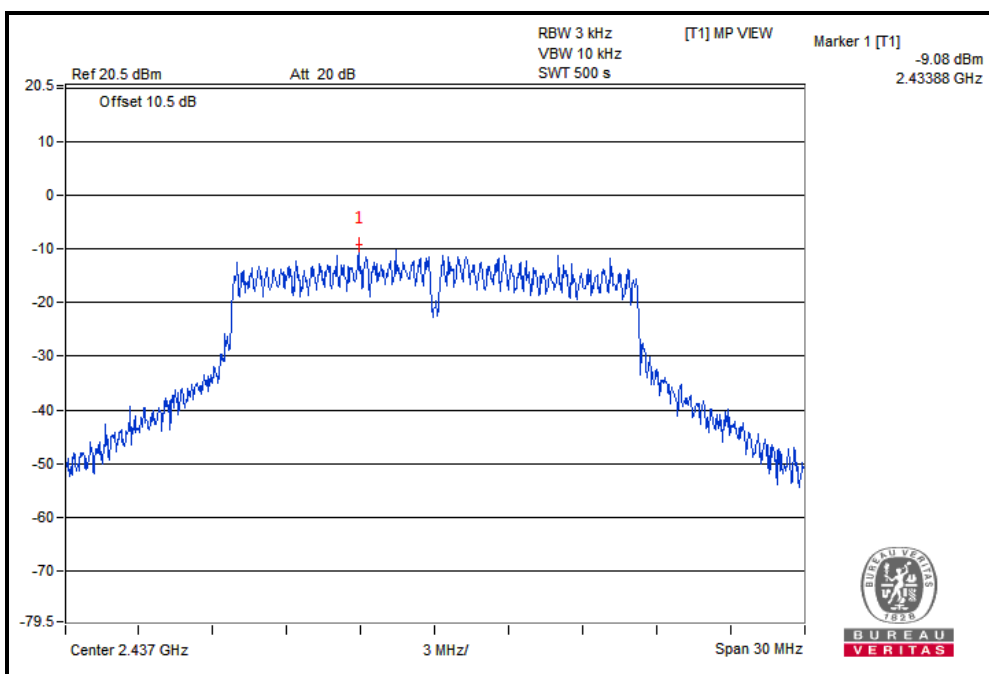




802.11n (20MHz)

Channel	FREQ. (MHz)	ANT 0	ANT 1	Total	Limit (dBm/3kHz)	PASS /FAIL
		PSD (dBm/3kHz)	PSD (dBm/3kHz)	PSD (dBm/3kHz)		
1	2412	-11.17	-11.35	-8.25	8	PASS
6	2437	-11.01	-11.05	-8.02	8	PASS
11	2462	-11.58	-10.96	-8.25	8	PASS

Note: $N_{ANT} = 2, N_{SS}=2$, Directional gain = $G_{ANT} + 10 \log(N_{ANT}/ N_{SS})$ dBi = 0.83dBi < 6dBi, density limit shall not be reduced.

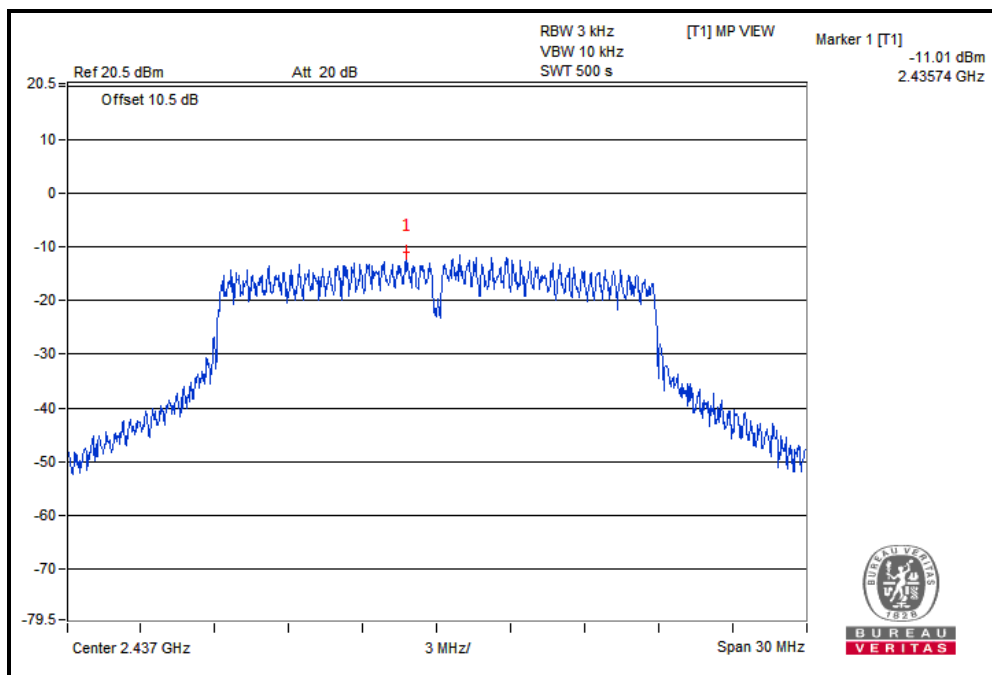




BUREAU VERITAS Test Report No.: RF190610W002

802.11n (40MHz)

Channel	FREQ. (MHz)	ANT 0	ANT 1	Total	Limit (dBm/3kHz)	PASS /FAIL
		PSD (dBm/3kHz)	PSD (dBm/3kHz)	PSD (dBm/3kHz)		
3	2422	-13.28	-13.72	-10.48	8	PASS
6	2437	-12.97	-13.10	-10.02	8	PASS
9	2452	-13.89	-13.67	-10.77	8	PASS

Note: $N_{ANT} = 2$, $N_{SS}=2$, Directional gain = $G_{ANT} + 10 \log(N_{ANT}/ N_{SS})$ dBi = 0.83dBi < 6dBi, density limit shall not be reduced.

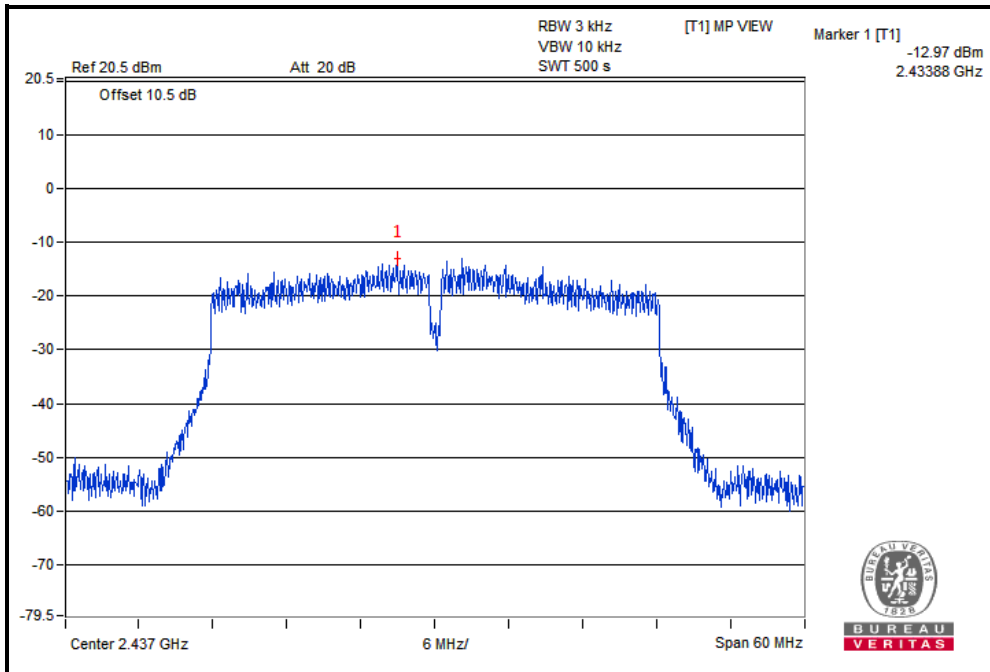




**BUREAU
VERITAS**

Test Report No.: RF190610W002

BT-LE (1MHz) (GFSK)

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	2402	-7.27	8	PASS
19	2440	-7.46	8	PASS
39	2480	-6.02	8	PASS

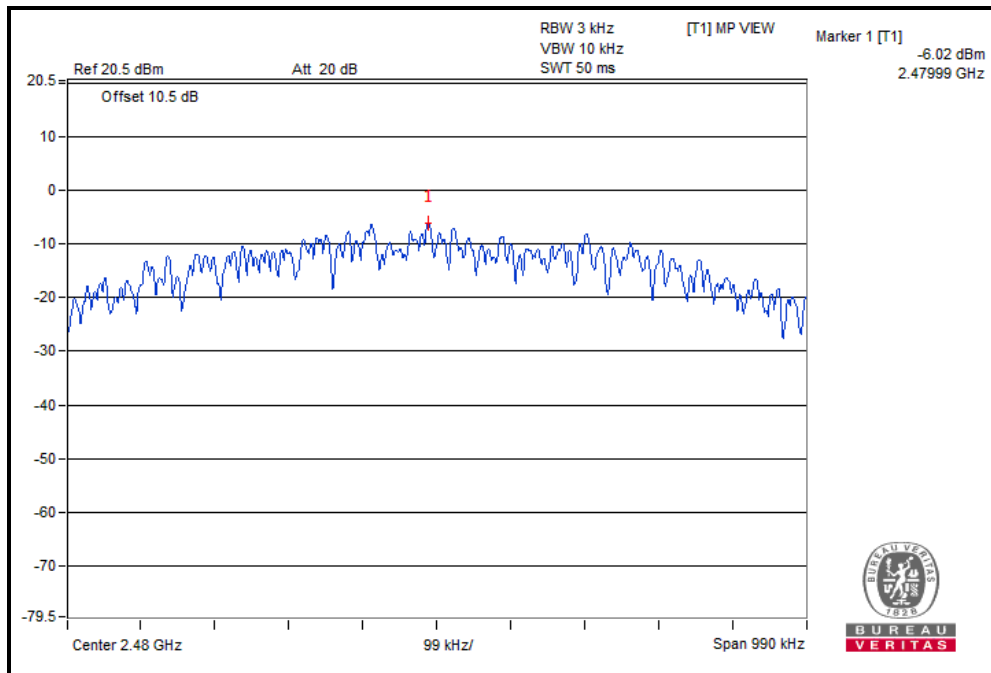




**BUREAU
VERITAS**

Test Report No.: RF190610W002

BT-LE (2MHz) (GFSK)

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	2402	-9.96	8	PASS
19	2440	-10.16	8	PASS
39	2480	-8.72	8	PASS

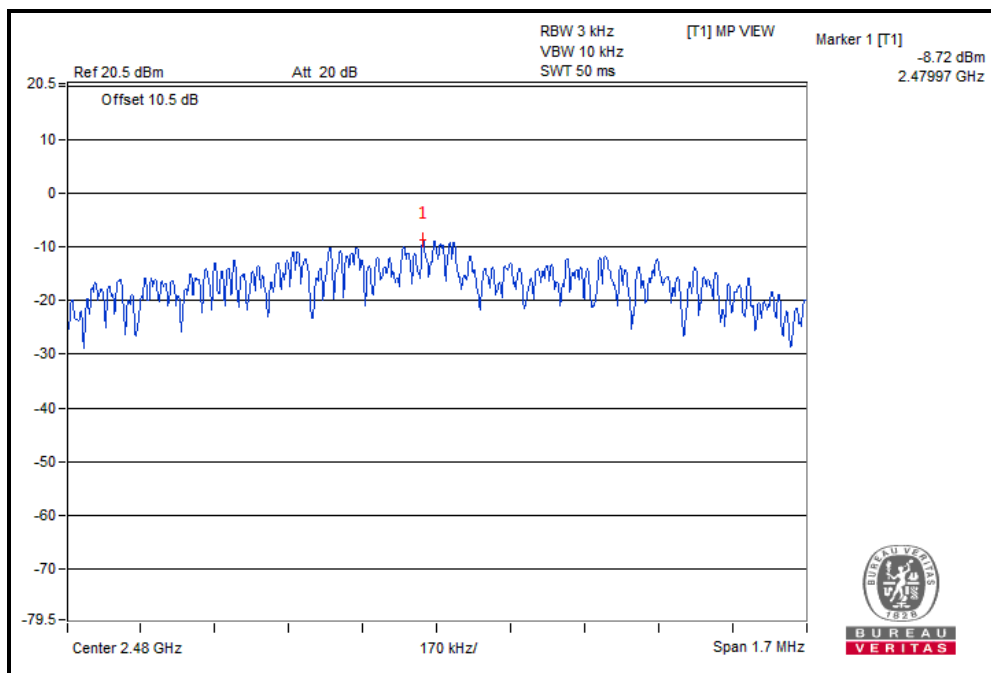




3.6 OUT OF BAND EMISSION MEASUREMENT

3.6.1 LIMITS OF OUT OF BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

3.6.2 TEST SETUP

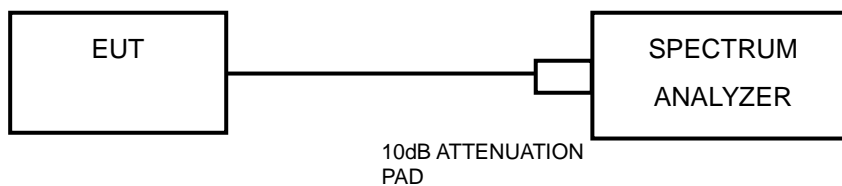

3.6.3 TEST INSTRUMENTS

Refer to section 3.3.2 to get information of above instrument.

3.6.4 TEST PROCEDURE

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.



MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

3.6.5 DEVIATION FROM TEST STANDARD

No deviation.

3.6.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.


3.6.7 TEST RESULTS

The spectrum plots are attached on the following images. D1 line indicates the highest level. D2 line indicates the 20dB offset below D1. It shows compliance to the requirement.




802.11b


CH 1

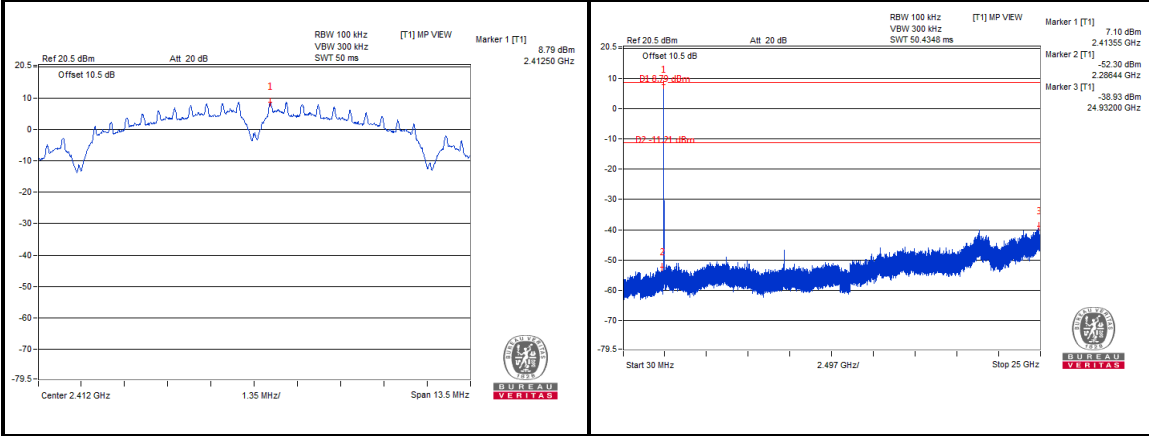

CH 6

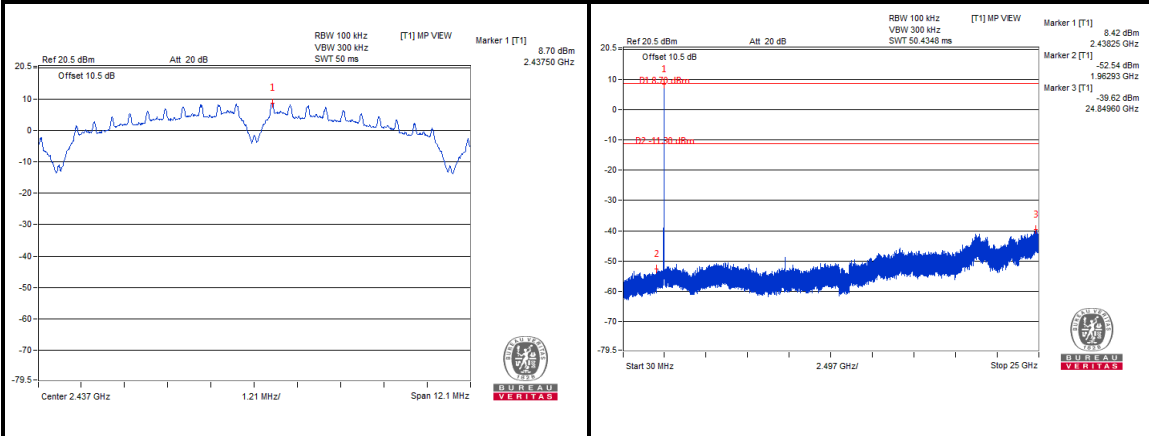

CH 11

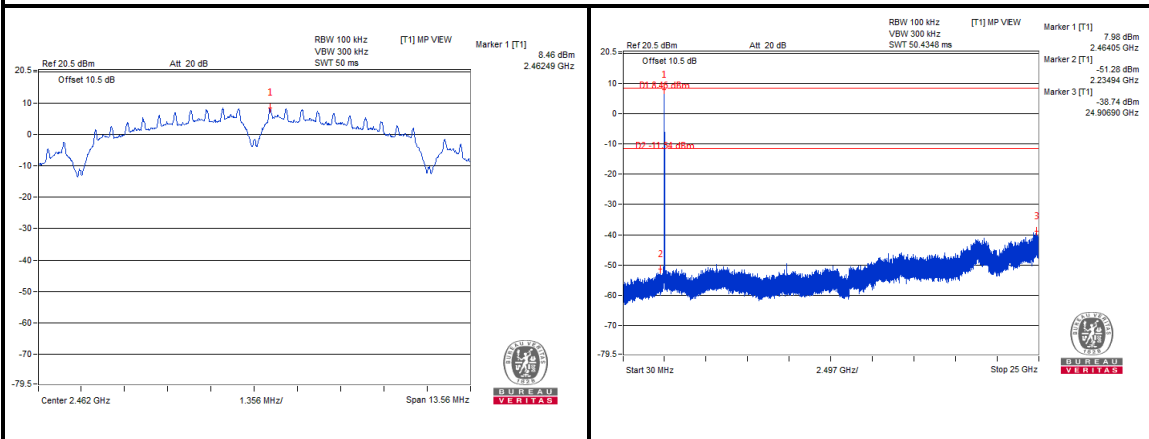





BUREAU VERITAS

Test Report No.: RF190610W002

CH 1 Band Edge



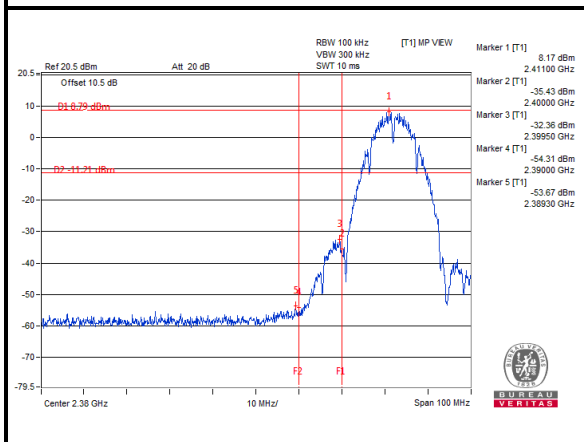


CH 11 Band Edge

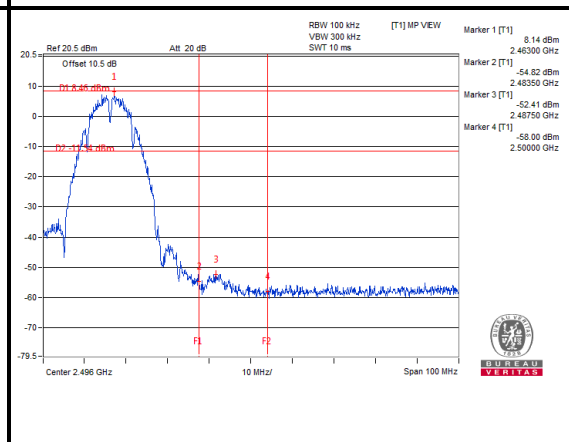



802.11g

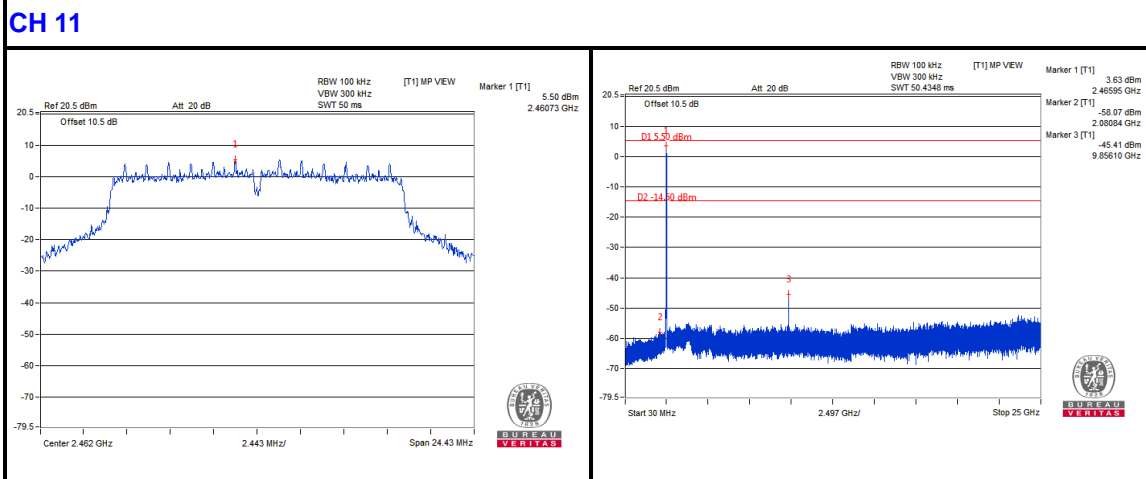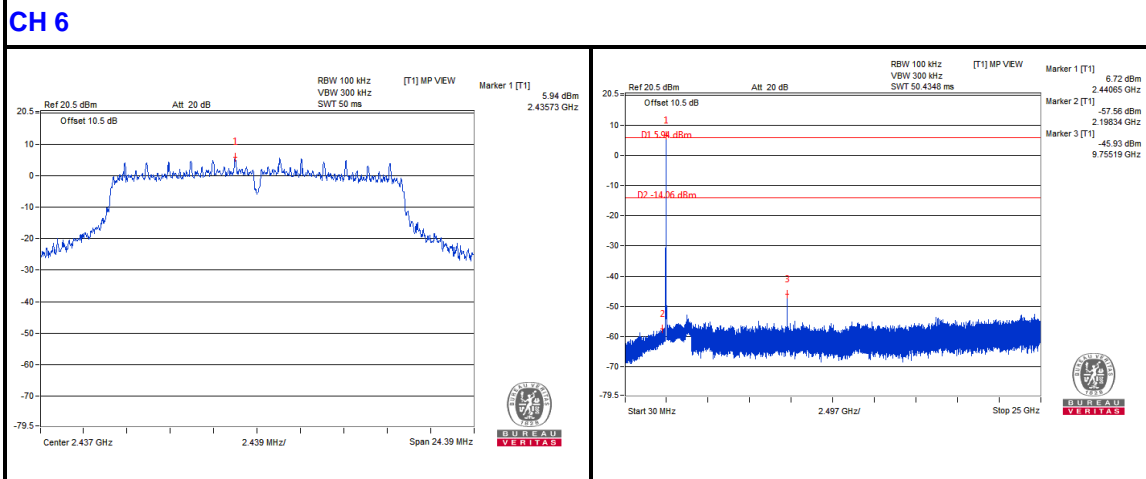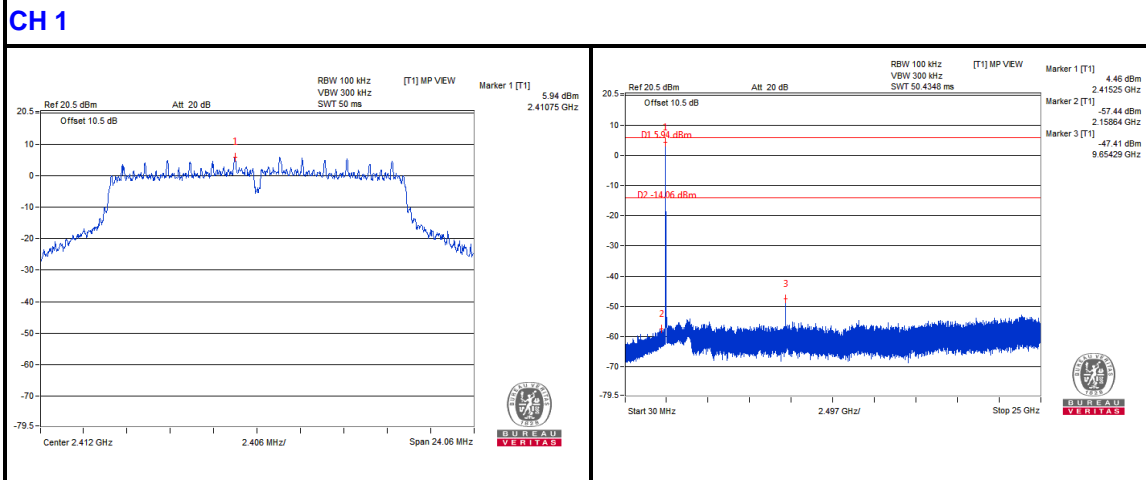





BUREAU VERITAS

Test Report No.: RF190610W002

CH 1 Band Edge

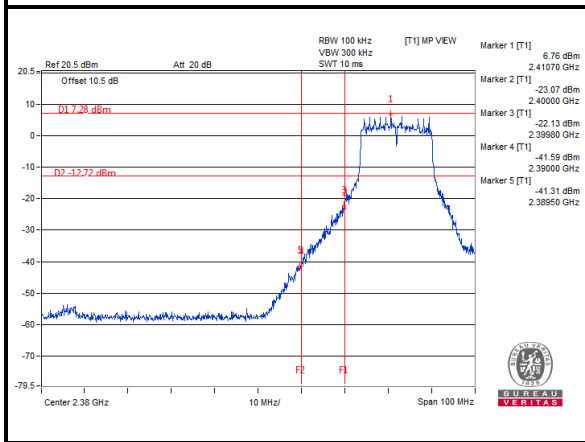


CH 11 Band Edge

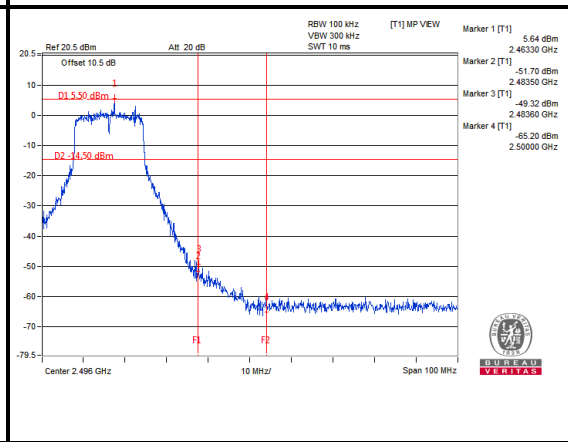




802.11n (20MHz)


CH 1

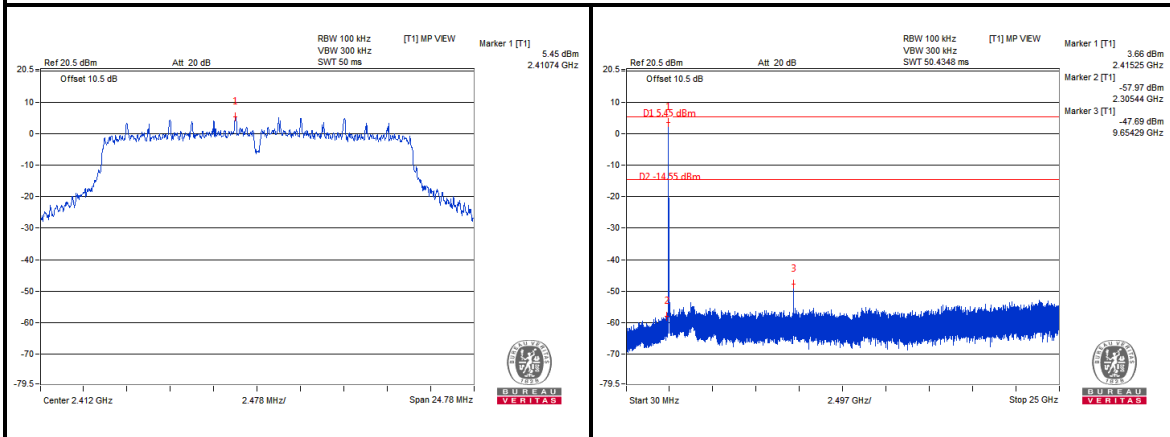

CH 6

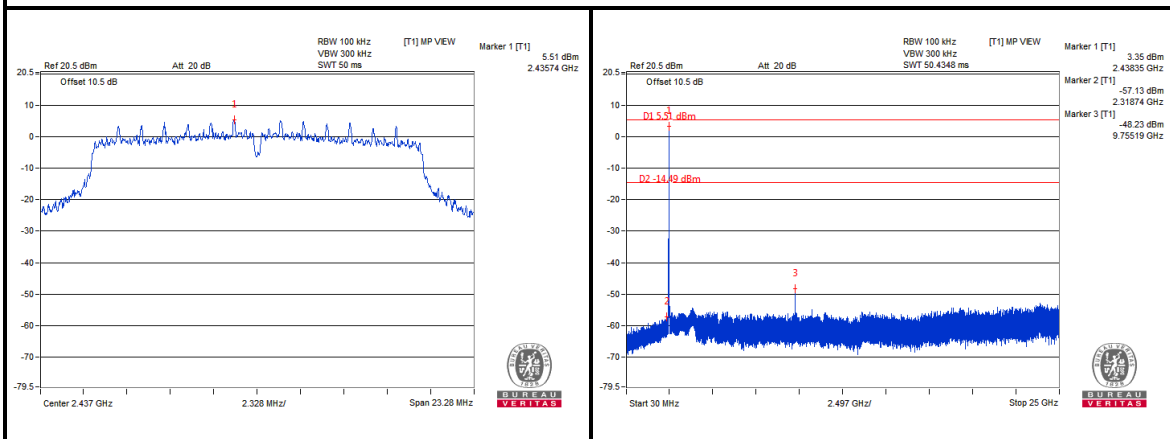


CH 11

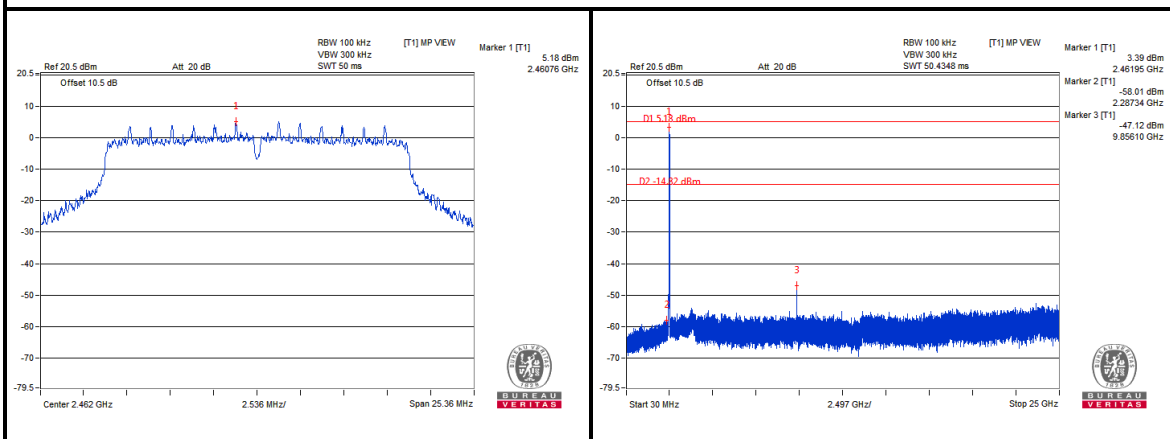



**BUREAU
VERITAS**


Test Report No.: RF190610W002

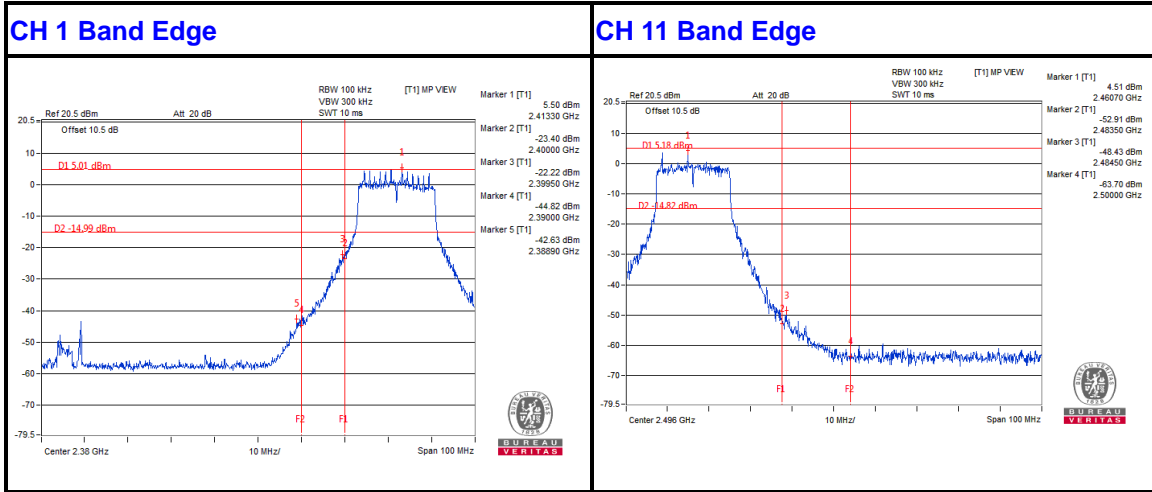




802.11n (40MHz)


CH 3

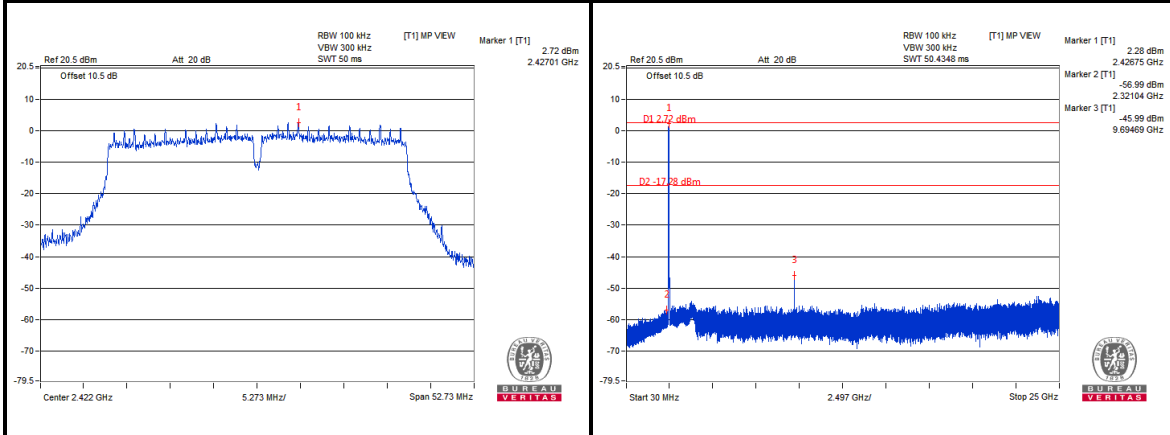

CH 6

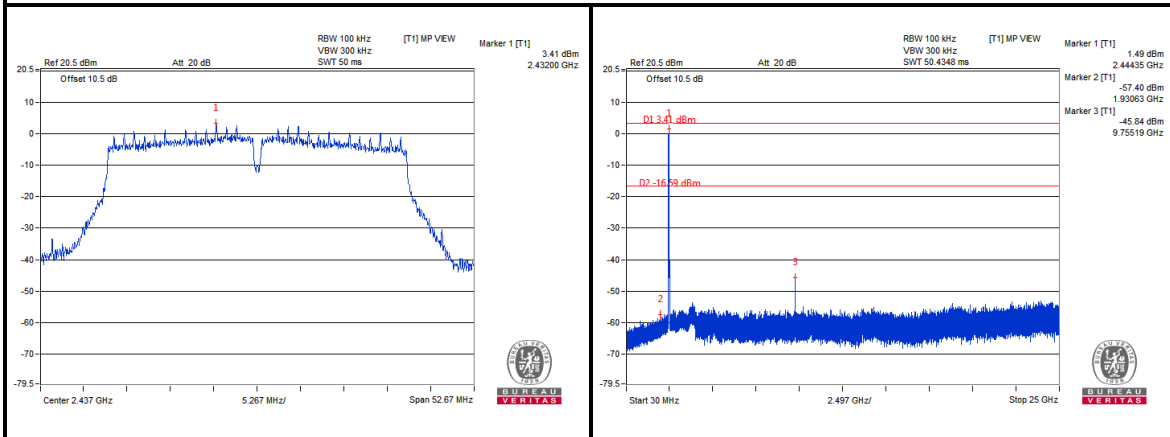

CH 9

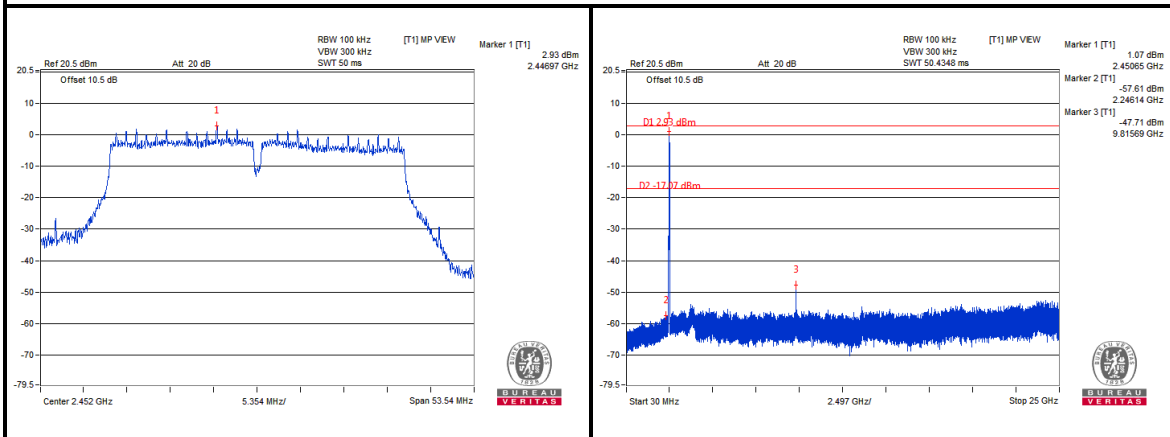





**BUREAU
VERITAS**

Test Report No.: RF190610W002

CH 3 Band Edge

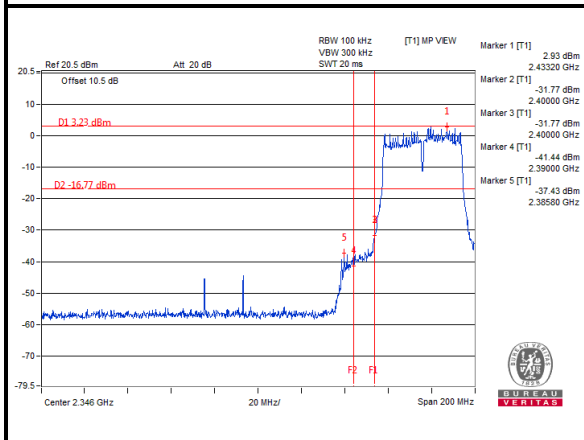


CH 9 Band Edge

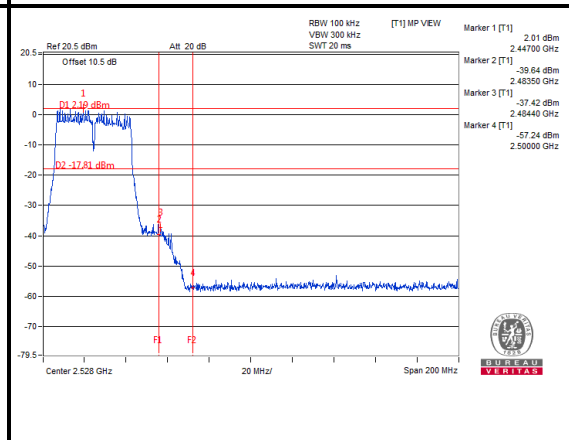




BT-LE (1MHz) (GFSK)


CH 0

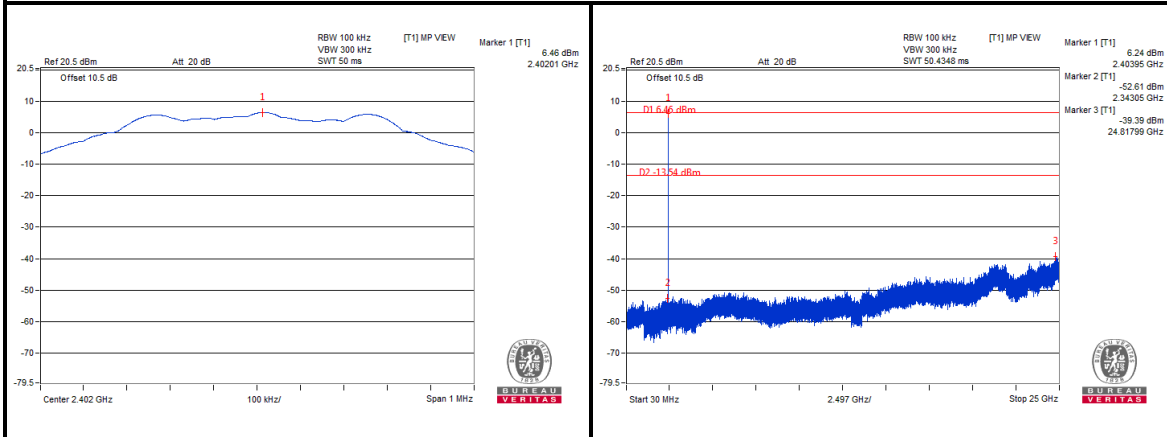

CH 19

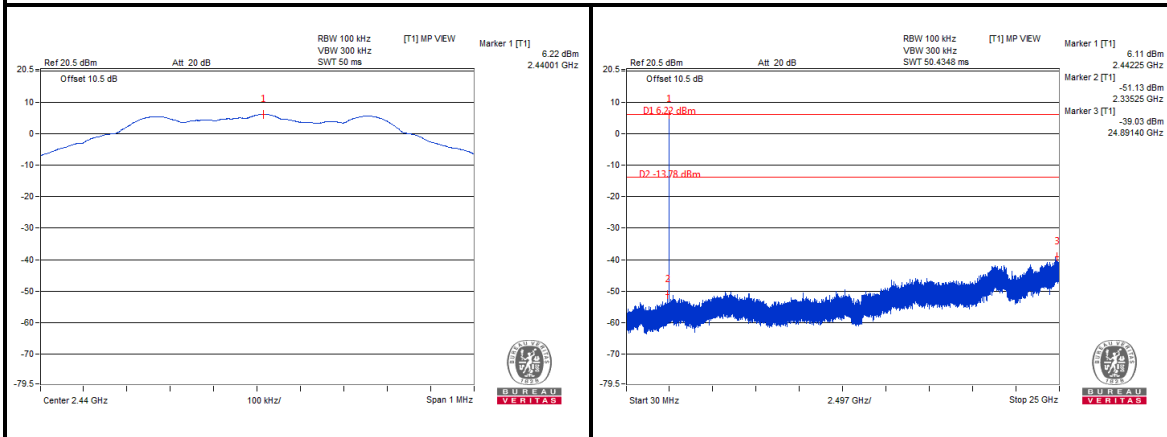

CH 39

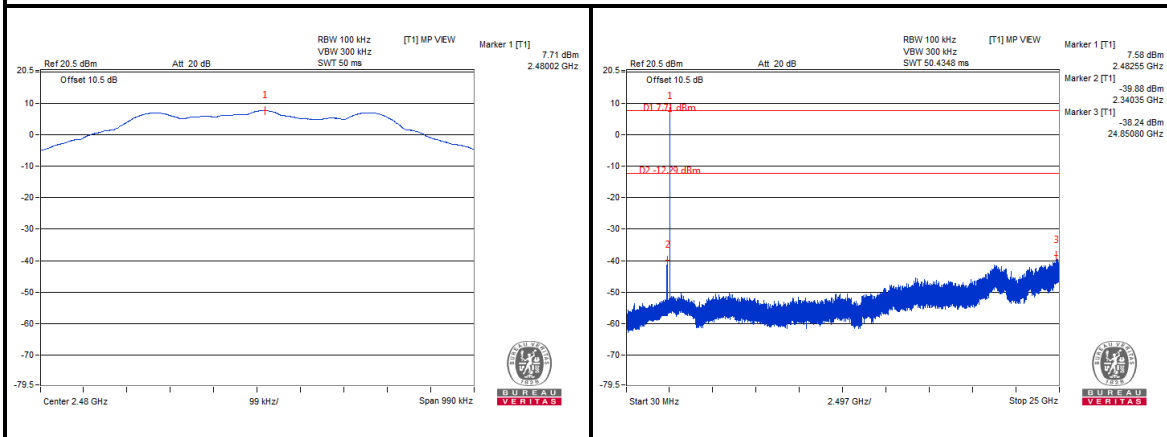





**BUREAU
VERITAS**

Test Report No.: RF190610W002

CH 0 Band Edge

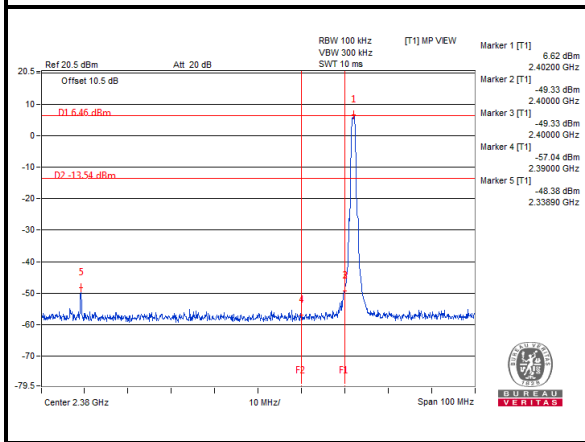


CH 39 Band Edge

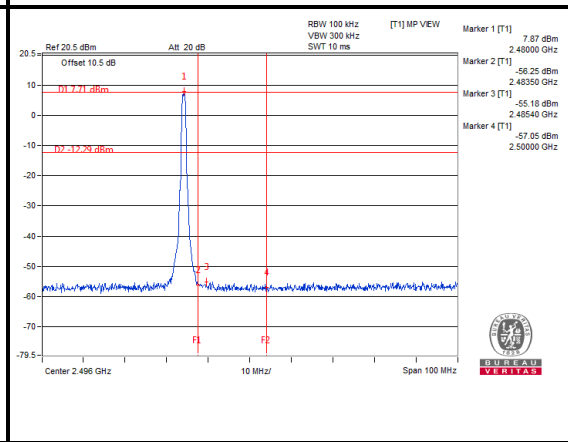




BT-LE (2MHz) (GFSK)


CH 0

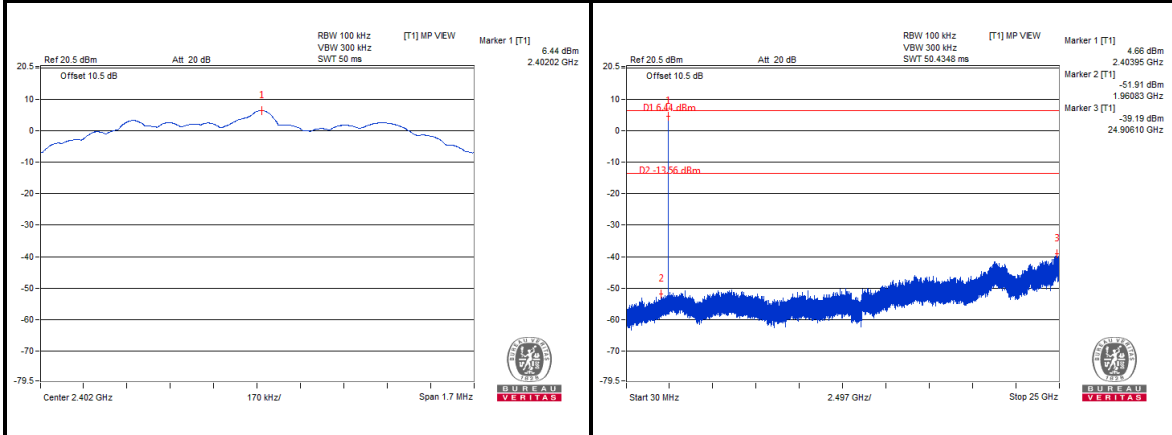

CH 19

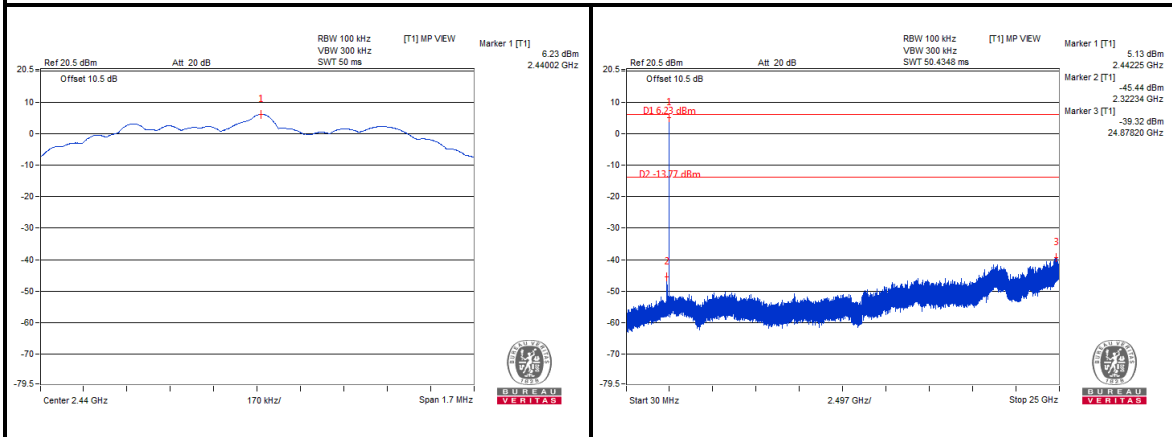

CH 39

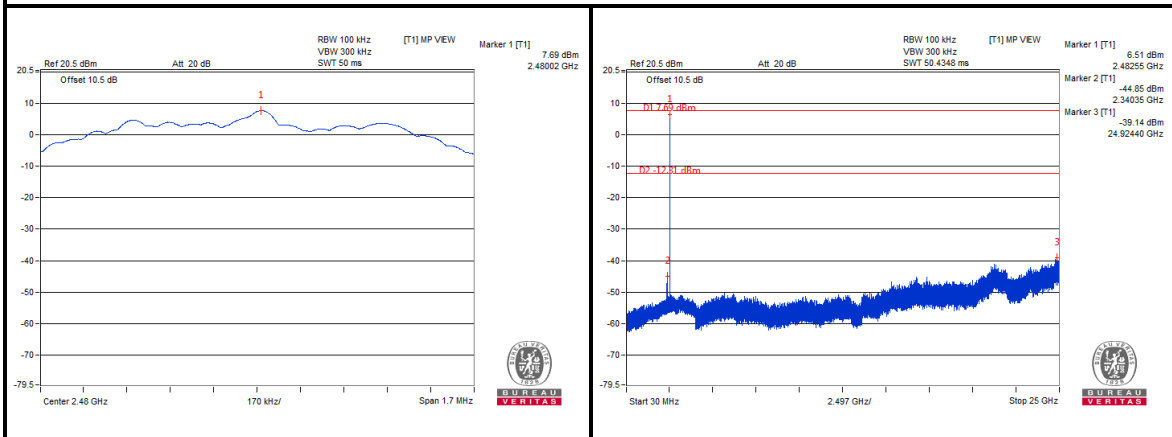





**BUREAU
VERITAS**

Test Report No.: RF190610W002

CH 0 Band Edge

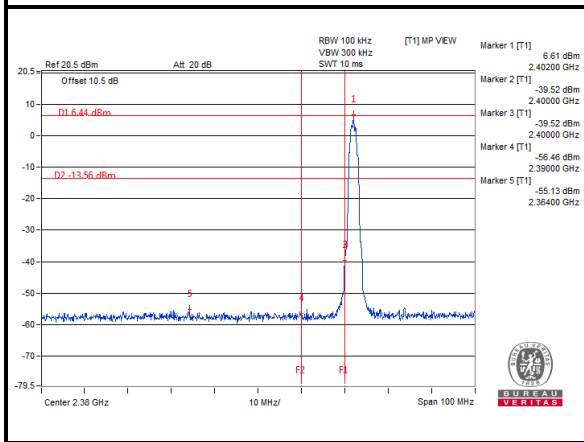

CH 39 Band Edge

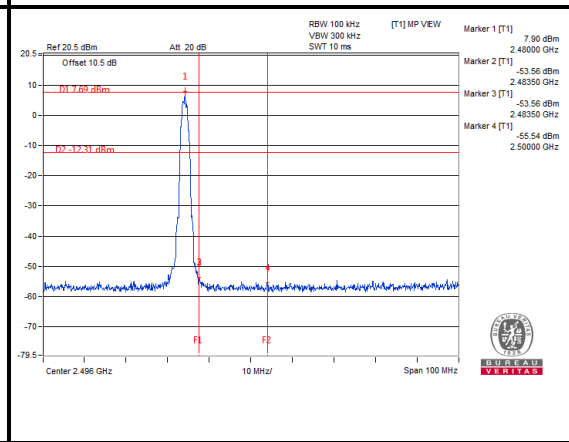



4 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



5 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---