

FCC TEST REPORT (WLAN)

Report No.: RF160817W003-2

FCC ID: O57YBQ501F

Test Model: Lenovo YB-Q501F

Received Date: Aug. 17, 2016

Test Date: Aug. 18, 2016 ~ Sep. 07, 2016

Issued Date: Sep. 08, 2016

Applicant: Lenovo(Shanghai) Electronics Technology Co., Ltd.

Address: NO.68 BUILDING, 199 FENJU RD, China (Shanghai) Pilot Free Trade Zone, 200131, CHINA

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Cau Vil., Lin Kou Dist., New Taipei City, Taiwan (R.O.C.)

Test Location: No. 19, Hwa Ya 2nd Rd., Wen Hwa Tsuen, Kwei Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

TABLE OF CONTENTS

RELEASE CONTROL RECORD 4

1 Certificate of Conformity..... 5

2 Summary of Test Results 6

 2.1 Measurement Uncertainty 6

3 General Information..... 7

 3.1 General Description of EUT 7

 3.2 Description of Test Modes 9

 3.2.1 Test Mode Applicability and Tested Channel Detail 10

 3.3 Duty Cycle of Test Signal 12

 3.4 Description of Support Units 13

 3.4.1 Configuration of System under Test 13

 3.5 General Description of Applied Standards 13

4 Test Types and Results 14

 4.1 Radiated Emission and Bandedge Measurement..... 14

 4.1.1 Limits of Radiated Emission and Bandedge Measurement 14

 4.1.2 Test Instruments 15

 4.1.3 Test Procedures..... 16

 4.1.4 Deviation from Test Standard 16

 4.1.5 Test Set Up 17

 4.1.6 EUT Operating Conditions..... 17

 4.1.7 Test Results 18

 4.2 Conducted Emission Measurement 29

 4.2.1 Limits of Conducted Emission Measurement 29

 4.2.2 Test Instruments 29

 4.2.3 Test Procedures..... 30

 4.2.4 Deviation from Test Standard 30

 4.2.5 Test Setup..... 30

 4.2.6 EUT Operating Conditions..... 30

 4.2.7 Test Results 31

 4.3 6dB Bandwidth Measurement 33

 4.3.1 Limits of 6dB Bandwidth Measurement 33

 4.3.2 Test Setup..... 33

 4.3.3 Test Instruments 33

 4.3.4 Test Procedure 33

 4.3.5 Deviation from Test Standard 33

 4.3.6 EUT Operating Conditions..... 34

 4.3.7 Test Result 34

 4.4 Conducted Output Power Measurement..... 36

 4.4.1 Limits of Conducted Output Power Measurement 36

 4.4.2 Test Setup..... 36

 4.4.3 Test Instruments 36

 4.4.4 Test Procedures..... 36

 4.4.5 Deviation from Test Standard 36

 4.4.6 EUT Operating Conditions..... 36

 4.4.7 Test Results 37

 4.4.7.1 Maximum Peak Output Power 37

 4.4.7.2 Average Output Power (For Reference) 38

 4.5 Power Spectral Density Measurement..... 39

 4.5.1 Limits of Power Spectral Density Measurement 39

 4.5.2 Test Setup..... 39

 4.5.3 Test Instruments 39

 4.5.4 Test Procedure 39

 4.5.5 Deviation from Test Standard 39

4.5.6 EUT Operating Condition	39
4.5.7 Test Results	40
4.6 Conducted Out of Band Emission Measurement	42
4.6.1 Limits of Conducted Out of Band Emission Measurement.....	42
4.6.2 Test Setup.....	42
4.6.3 Test Instruments	42
4.6.4 Test Procedure	42
4.6.5 Deviation from Test Standard	42
4.6.6 EUT Operating Condition	42
4.6.7 Test Results	43
5 Pictures of Test Arrangements.....	49
Appendix – Information on the Testing Laboratories	50



A D T

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF160817W003-2	Original release	Sep. 08, 2016



1 Certificate of Conformity

Product: Portable Tablet Computer
Brand: Lenovo
Test Model: Lenovo YB-Q501F
Sample Status: Production Unit
Applicant: Lenovo(Shanghai) Electronics Technology Co., Ltd.
Test Date: Aug. 18, 2016 ~ Sep. 07, 2016
Standards: **FCC Part 15, Subpart C (Section 15.247)**
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Yuqiang Yin , **Date:** Sep. 08, 2016
Yuqiang Yin / Engineer

Approved by : Bill Yao , **Date:** Sep. 08, 2016
Bill Yao / Manager

2 Summary of Test Results

FCC Part 15, Subpart C (SECTION 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is 13.16dB at 2.084000MHz.
15.205 & 15.209	Band Edge Emission Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -2.50dB at 2390MHz.
15.247(d)	Antenna Port Emission	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (\pm)
Conducted Emissions at mains ports	9kHz ~ 30MHz	2.44 dB
Radiated Emissions up to 1 GHz	9KHZ ~ 30MHZ	2.74 dB
	30MHz ~ 200MHz	2.93 dB
	200MHz ~1000MHz	2.95 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

3 General Information

3.1 General Description of EUT

Product	Portable Tablet Computer
Brand	Lenovo
Test Model	Lenovo YB-Q501F
Power Supply Rating	5.2Vdc (adapter or host equipment) 3.8Vdc (battery)
Modulation Technology	DSSS, OFDM
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
Transfer Rate	802.11b: 11/ 5.5/ 2.0 / 1.0 Mbps 802.11g: 54/ 48/ 36 / 24 / 18 / 9/ 6 Mbps 802.11n: up to 135 Mbps
Operating Frequency	2412 ~ 2462MHz for 11b/g/n(HT20)
Number of Channel	11 for 802.11b, 802.11g, 802.11n(20MHz)
Output Power	60.814mW
Antenna Type	PCB Antenna with -4dBi gain
Accessory Device	Refer to note as below
Data Cable Supplied	USB cable: non-shielded, detachable, 1.0m

Note:

- The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.
- There were Sample A, B, C and D for this project, the difference is as below:

SAMPLE	EUT CONFIGURATION INFORMATION
A	LCD 1+ Battery 1+(Emmc1+DDR1) (32+2G) +speaker 1+motor1+PCB1+ Camera 1
B	LCD 1+ Battery 1+(Emmc2+DDR1) (32+2G) +speaker 1+motor1+PCB2+ Camera 2
C	LCD 1+ Battery 1+(Emmc3+DDR2) (64+4G)+speaker 1+motor1+PCB1+ Camera 1
D	LCD 1+ Battery 1+(Emmc4+DDR3) (64+4G)+speaker 1+motor1+PCB2+ Camera 2

- The EUT incorporates a SISO function. Physically, the EUT provides one transmitter and one receiver.

MODULATION MODE	TX/RX FUNCTION
802.11b	1TX /1RX
802.11g	1TX /1RX
802.11n (20MHz)	1TX /1RX

- For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.

LIST OF ACCESSORIES:

ACCESSORIES	BRAND	MODEL	SPECIFICATION
AC Adapter 1	Acbel	SC-12	I/P:100-240Vac, 600mA O/P: 5.2Vdc, 2000mA 7Vdc, 2000mA 9Vdc, 2000mA 12Vdc, 2000mA
Battery 1	Sunwoda	Yogi A0	Rating: 3.8Vdc, 10500mAh
USB Cable 1	FUKANGYUAN	F45B-242000100	1.0m non-shielded cable w/o core
USB Cable 2	LIQI	L45B-242000100	1.0m non-shielded cable w/o core
LCD Panel1	BOE	TV122WXM-AL0	12.2"
Emmc 1	Samsung	KLMBG4WEBD-B031	32G
Emmc 2	Toshiba	THGBMFG8C2LBAIL	32G
Emmc 3	Samsung	KLMCG4JENB-B041	64G
Emmc 4	Toshiba	THGBMFG9C4LBAIR	64G
DDR1	Samsung	K3QF1F10EM-AGCE	2G
DDR2	Micron	MT52L256M64D2PP-107WT	4G
DDR3	Samsung	K3QF2F20EM-AGCE	4G
Speaker 1	HAOSHENG	XHB171215B08-08-B-RH	-
Speaker 2	KEYSOUND	QM171219AW06	-
motor1	AWA	LZ-C024	
Photo Camera 1	Chicony	CNFEH7221005802LH	1M
Photo Camera 2	Guangdong Lite Array Co.,Ltd	GNCH160076R	1M
CPU	Intel	Z8550	1380PIN
Main Broad 1	RED BOARD LTD	H103C	-
Main Broad 2	SHENZHEN WUZHU TECH CO LTD	WH-1	-
BT/WLAN Module	BROADCOM	BCM43438KUBG	-

3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

Channel	Frequency	Channel	Frequency
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where **RE≥1G**: Radiated Emission above 1GHz & Bandedge Measurement
RE<1G: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission
APCM: Antenna Port Conducted Measurement

NOTE: The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Y-plane**.
NOTE: “-” means no effect.

Radiated Emission Test (Above 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
-	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
-	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5

Radiated Emission Test (Below 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11n (20MHz)	1 to 11	1	OFDM	BPSK	6.5

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11n (20MHz)	1 to 11	1	OFDM	BPSK	6.5

BANDEDGE MEASUREMENT:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
-	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
-	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5

Antenna Port Conducted Measurement:

This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
-	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
-	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5

Test Condition:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE \geq 1G	25deg. C, 65%RH	120Vac, 60Hz	Alex Chen
RE $<$ 1G	25deg. C, 65%RH	120Vac, 60Hz	Alex Chen
PLC	25deg. C, 68%RH	120Vac, 60Hz	Yuqiang Yin
APCM	21deg. C, 60%RH	120Vac, 60Hz	Wenliang Wu


3.3 Duty Cycle of Test Signal

WIFI 2.4GHz

802.11b: Duty cycle = $8.406/8.509 = 0.988 > 98\%$, Duty factor is not required.

802.11g: Duty cycle = $1.393/1.496 = 0.931 < 98\%$, Duty factor = $10 * \log(1/0.931) = 0.311$

802.11n (HT20): Duty cycle = $1.306/1.425 = 0.916 < 98\%$, Duty factor = $10 * \log(1/0.916) = 0.379$

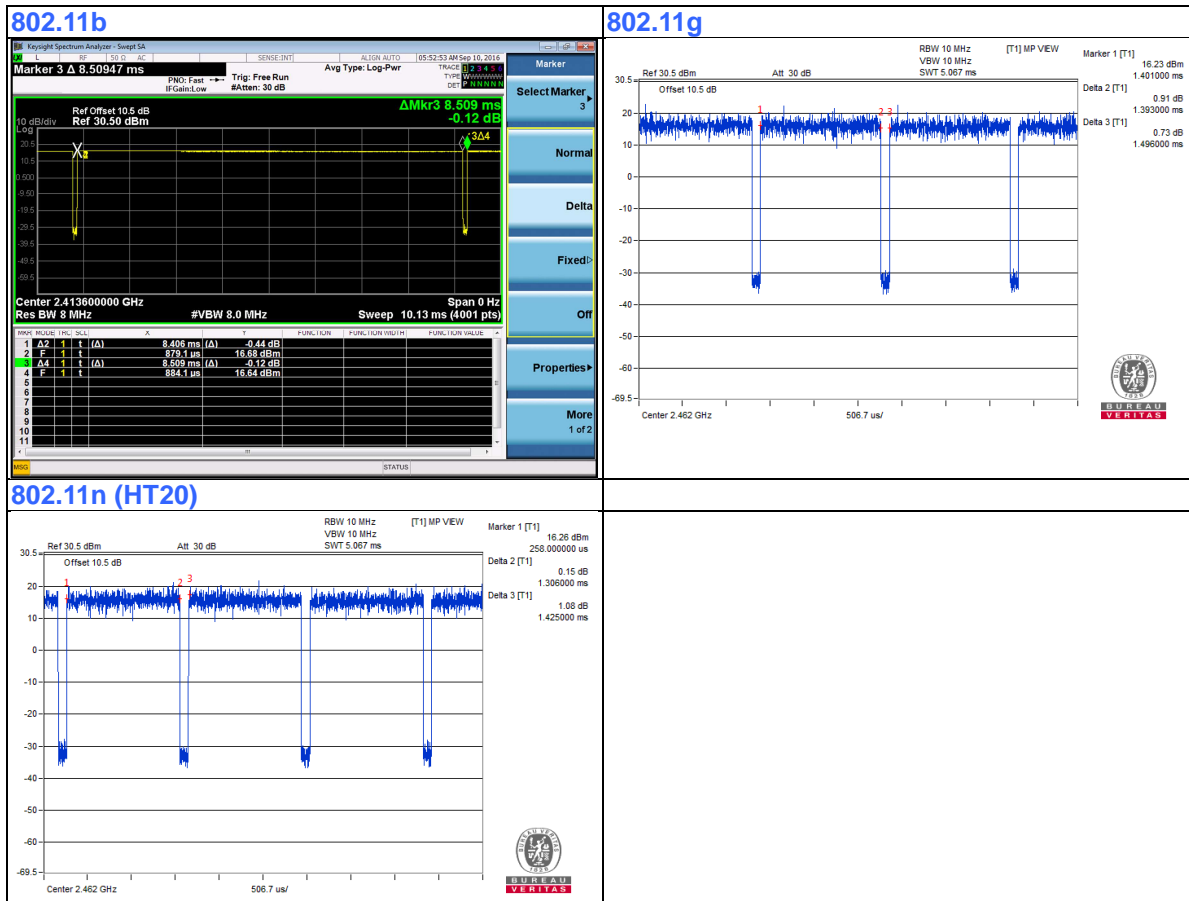


3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	DC source	LONG WEI	PS-6403D	010934269	N/A
2	PC	HP	A6608CN	3CR83825X3	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	DC Line: Unshielded, Detachable 1.0m
2	AC Line: Unshielded, Detachable 1.5m

3.4.1 Configuration of System under Test

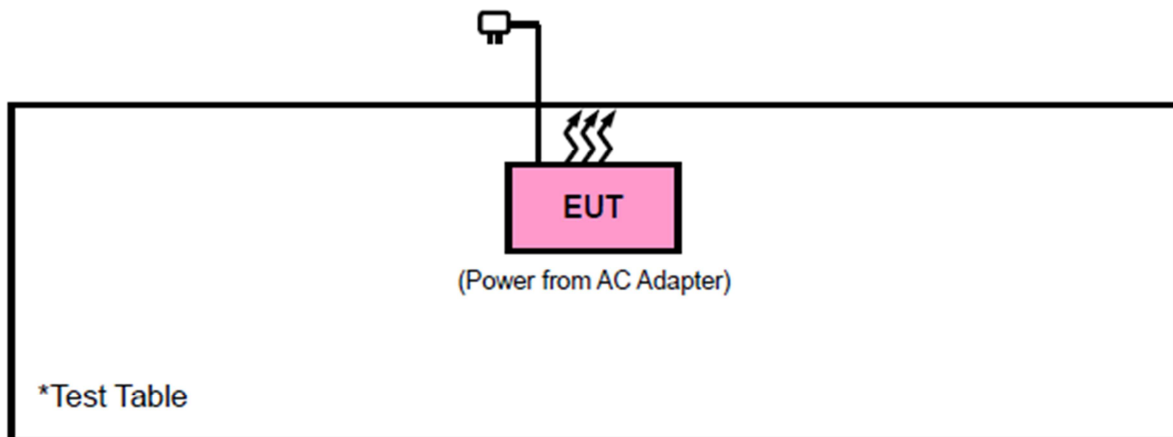

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

KDB 558074 D01 DTS Meas Guidance v03r05

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

NOTE: The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (Certification). The test report has been issued separately.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR7	101494	Apr. 05,16	Apr. 04,17
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV7	102331	Nov. 09,15	Nov. 08,16
Bilog Antenna	Teseq	CBL 6111D	30643	Jul. 14, 16	Jul. 13, 17
Horn Antenna (1GHz -18GHz)	ETS -Lindgren	3117	00062558	May 18,16	May 17,17
GPS Generator+ Antenna	TOJOIN	GNSS-5000A	E1-010119	Aug. 02, 15	Aug. 01, 17
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	NSEMC003	Mar. 12,16	Mar. 11,18
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A	N/A
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170242	Mar. 12,16	Mar. 11,17
Amplifier (9kHz-1GHz)	SONOMA	310D	186955	Mar. 04,16	Mar. 03, 17
Pre-Amplifier(1-18G)	HP	8449B	3008A00409	Apr. 25,16	Apr. 24,17
Pre-Amplifier (18GHz-40GHz)	EMCI	EMC 184045	980102	Nov. 20,15	Nov. 19,16
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A	N/A
BLUETOOTH TESTER	Rohde&Schwarz	CBT32	100811	Aug. 29,16	Aug. 28,17

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The calibration interval of the loop antenna is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
 3. The test was performed in HwaYa Chamber 4.
 4. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 5. The FCC Site Registration No. is 460141.
 6. The IC Site Registration No. is IC7450F-4.

4.1.3 Test Procedures

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ($10 \log(1/\text{duty cycle})$).
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Set Up

<Frequency Range below 1GHz>

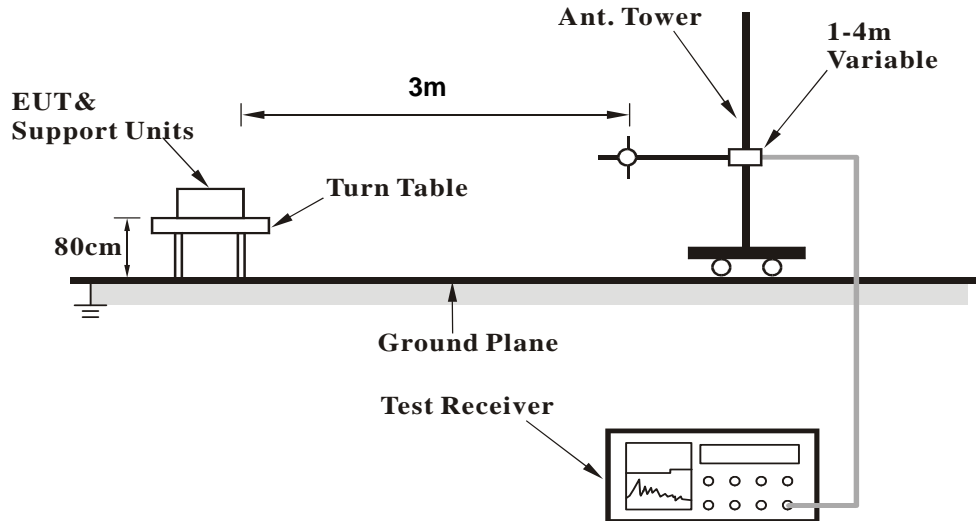

<Frequency Range above 1GHz>

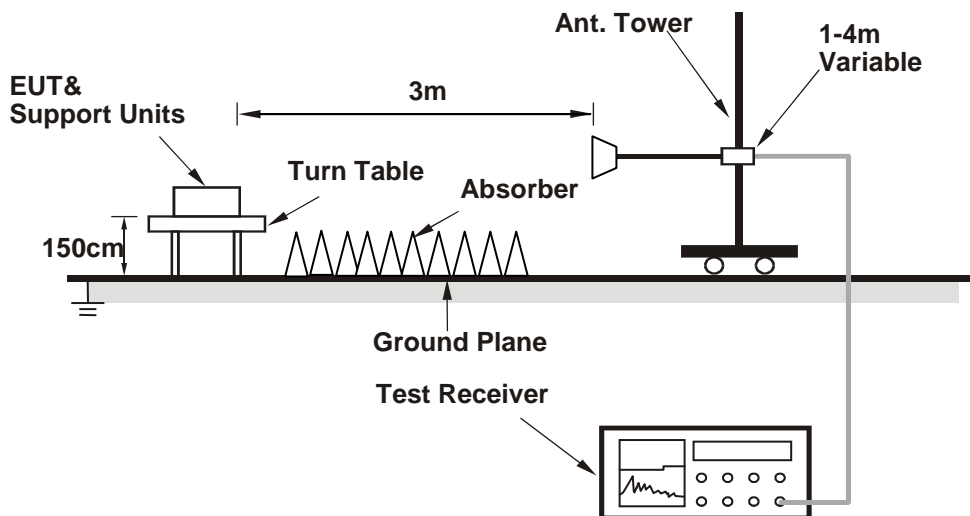

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- a. Placed the EUT on the testing table.
- b. Use the software to control the EUT under transmission condition continuously at specific channel frequency.

4.1.7 Test Results

BELOW 1GHz WORST-CASE DATA:

9 KHz – 30 MHz data: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

30 MHz – 1GHz data:


802.11n (20MHz)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
45.52	30.29	58.53	40.00	-9.71	8.16	1.03	37.43	200	56	QP
144.46	29.98	56.41	43.50	-13.52	8.54	1.85	36.82	200	98	QP
196.84	33.87	58.21	43.50	-9.63	10.07	2.15	36.56	200	118	QP
284.14	32.75	53.82	46.00	-13.25	12.81	2.63	36.51	200	196	QP
389.87	30.64	47.46	46.00	-15.36	16.77	3.11	36.70	200	280	QP
491.72	26.24	41.45	46.00	-19.76	18.30	3.43	36.94	200	45	QP

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.

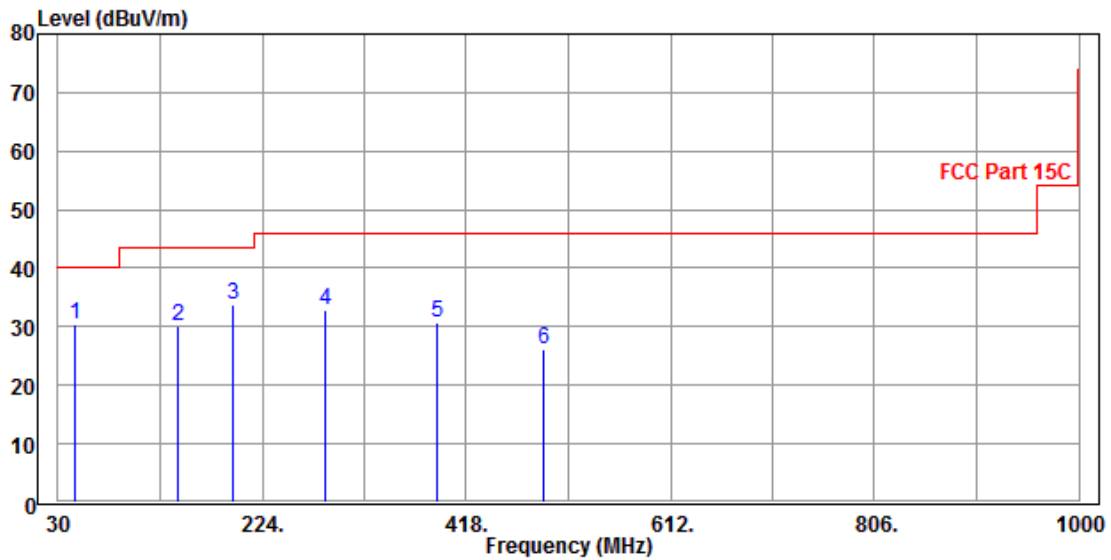


CHANNEL	TX Channel 1	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
46.49	36.53	65.12	40.00	-3.47	7.80	1.03	37.42	100	30	QP
59.10	32.41	62.16	40.00	-7.59	6.41	1.17	37.33	100	75	QP
148.34	23.75	49.68	43.50	-19.75	9.00	1.87	36.80	100	108	QP
233.70	27.30	49.82	46.00	-18.70	11.65	2.36	36.53	100	156	QP
305.48	33.12	53.66	46.00	-12.88	13.23	2.74	36.51	100	248	QP
394.72	32.58	49.18	46.00	-13.42	16.98	3.13	36.71	100	80	QP

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.

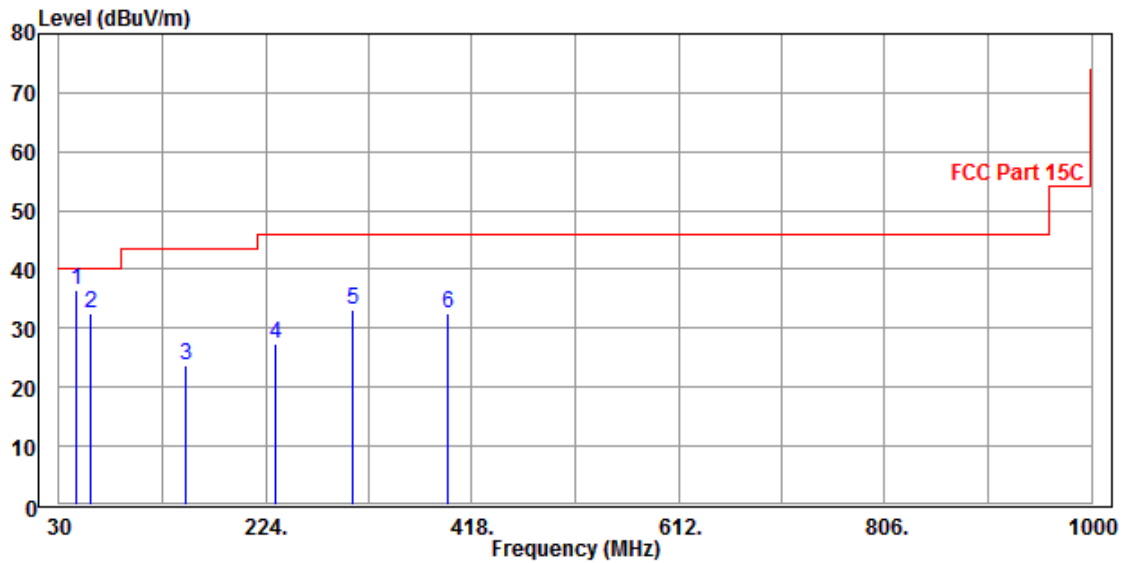

**ABOVE 1GHz WORST-CASE DATA:
802.11b**

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2385.7	43.13	51.01	54.00	-10.87	32.29	8.14	48.31	110	88	Average
2385.7	50.17	58.05	74.00	-23.83	32.29	8.14	48.31	110	88	Peak
2412	101.21	109.02			32.31	8.19	48.31	110	88	Average
2412	103.60	111.41			32.31	8.19	48.31	110	88	Peak
2483.7	36.62	44.22	54.00	-17.38	32.38	8.32	48.30	110	88	Average
2483.7	47.83	55.43	74.00	-26.17	32.38	8.32	48.30	110	88	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	43.16	51.03	54.00	-10.84	32.29	8.15	48.31	103	105	Average
2390	51.57	59.44	74.00	-22.43	32.29	8.15	48.31	103	105	Peak
2412	100.20	108.01			32.31	8.19	48.31	103	105	Average
2412	102.41	110.22			32.31	8.19	48.31	103	105	Peak
2483.5	36.15	43.75	54.00	-17.85	32.38	8.32	48.30	103	105	Average
2483.5	47.17	54.77	74.00	-26.83	32.38	8.32	48.30	103	105	Peak

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2412MHz: Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2388	38.76	46.63	54.00	-15.24	32.29	8.15	48.31	110	73	Average
2388	48.91	56.78	74.00	-25.09	32.29	8.15	48.31	110	73	Peak
2437	110.47	118.20			32.34	8.24	48.31	110	73	Average
2437	104.83	112.56			32.34	8.24	48.31	110	73	Peak
2486	38.63	46.22	54.00	-15.37	32.39	8.32	48.30	110	73	Average
2486	49.10	56.69	74.00	-24.90	32.39	8.32	48.30	110	73	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	38.14	46.01	54.00	-15.86	32.29	8.15	48.31	103	103	Average
2390	48.95	56.82	74.00	-25.05	32.29	8.15	48.31	103	103	Peak
2437	100.59	108.32			32.34	8.24	48.31	103	103	Average
2437	102.97	110.70			32.34	8.24	48.31	103	103	Peak
2486	38.13	45.72	54.00	-15.87	32.39	8.32	48.30	103	103	Average
2486	48.33	55.92	74.00	-25.67	32.39	8.32	48.30	103	103	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2437MHz: Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	35.58	43.45	54.00	-18.42	32.29	8.15	48.31	176	90	Average
2390	47.42	55.29	74.00	-26.58	32.29	8.15	48.31	176	90	Peak
2462	102.06	109.72			32.36	8.28	48.30	176	90	Average
2462	104.43	112.09			32.36	8.28	48.30	176	90	Peak
2489	42.22	49.80	54.00	-11.78	32.39	8.33	48.30	176	90	Average
2489	51.55	59.13	74.00	-22.45	32.39	8.33	48.30	176	90	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	35.25	43.12	54.00	-18.75	32.29	8.15	48.31	100	125	Average
2390	47.29	55.16	74.00	-26.71	32.29	8.15	48.31	100	125	Peak
2462	102.06	109.72			32.36	8.28	48.30	100	125	Average
2462	104.08	111.74			32.36	8.28	48.30	100	125	Peak
2488.7	43.10	50.68	54.00	-10.90	32.39	8.33	48.30	100	125	Average
2488.7	51.94	59.52	74.00	-22.06	32.39	8.33	48.30	100	125	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2462MHz: Fundamental frequency.

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	50.41	58.28	54.00	-3.59	32.29	8.15	48.31	110	80	Average
2390	68.16	76.03	74.00	-5.84	32.29	8.15	48.31	110	80	Peak
2412	95.94	103.75			32.31	8.19	48.31	110	80	Average
2412	104.94	112.75			32.31	8.19	48.31	110	80	Peak
2483.5	36.82	44.42	54.00	-17.18	32.38	8.32	48.30	110	80	Average
2483.5	48.89	56.49	74.00	-25.11	32.38	8.32	48.30	110	80	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	46.85	54.72	54.00	-7.15	32.29	8.15	48.31	105	121	Average
2390	68.32	76.19	74.00	-5.68	32.29	8.15	48.31	105	121	Peak
2412	93.95	101.76			32.31	8.19	48.31	105	121	Average
2412	103.76	111.57			32.31	8.19	48.31	105	121	Peak
2484	36.12	43.72	54.00	-17.88	32.38	8.32	48.30	105	121	Average
2484	48.35	55.95	74.00	-25.65	32.38	8.32	48.30	105	121	Peak

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2412MHz: Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	39.11	46.98	54.00	-14.89	32.29	8.15	48.31	110	86	Average
2390	51.16	59.03	74.00	-22.84	32.29	8.15	48.31	110	86	Peak
2437	97.65	105.38			32.34	8.24	48.31	110	86	Average
2437	107.31	115.04			32.34	8.24	48.31	110	86	Peak
2483.5	40.99	48.59	54.00	-13.01	32.38	8.32	48.30	110	86	Average
2483.5	53.10	60.70	74.00	-20.90	32.38	8.32	48.30	110	86	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	37.52	45.39	54.00	-16.48	32.29	8.15	48.31	100	120	Average
2390	47.98	55.85	74.00	-26.02	32.29	8.15	48.31	100	120	Peak
2437	96.32	104.05			32.34	8.24	48.31	100	120	Average
2437	106.36	114.09			32.34	8.24	48.31	100	120	Peak
2483.5	39.75	47.35	54.00	-14.25	32.38	8.32	48.30	100	120	Average
2483.5	50.97	58.57	74.00	-23.03	32.38	8.32	48.30	100	120	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2437MHz: Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	36.23	44.10	54.00	-17.77	32.29	8.15	48.31	110	89	Average
2390	47.71	55.58	74.00	-26.29	32.29	8.15	48.31	110	89	Peak
2462	96.32	103.98			32.36	8.28	48.30	110	89	Average
2462	105.86	113.52			32.36	8.28	48.30	110	89	Peak
2483.5	50.65	58.25	54.00	-3.35	32.38	8.32	48.30	110	89	Average
2483.5	68.06	75.66	74.00	-5.94	32.38	8.32	48.30	110	89	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	35.80	43.67	54.00	-18.20	32.29	8.15	48.31	100	125	Average
2390	47.55	55.42	74.00	-26.45	32.29	8.15	48.31	100	125	Peak
2462	97.00	104.66			32.36	8.28	48.30	100	125	Average
2462	106.82	114.48			32.36	8.28	48.30	100	125	Peak
2483.5	50.85	58.45	54.00	-3.15	32.38	8.32	48.30	100	125	Average
2483.5	68.97	76.57	74.00	-5.03	32.38	8.32	48.30	100	125	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2462MHz: Fundamental frequency.

802.11n (20MHz)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	51.50	59.37	54.00	-2.50	32.29	8.15	48.31	110	82	Average
2390	68.77	76.64	74.00	-5.23	32.29	8.15	48.31	110	82	Peak
2412	95.38	103.19			32.31	8.19	48.31	110	82	Average
2412	104.18	111.99			32.31	8.19	48.31	110	82	Peak
2483.8	36.89	44.49	54.00	-17.11	32.38	8.32	48.30	110	82	Average
2483.8	49.07	56.67	74.00	-24.93	32.38	8.32	48.30	110	82	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	51.00	58.87	54.00	-3.00	32.29	8.15	48.31	103	108	Average
2390	67.15	75.02	74.00	-6.85	32.29	8.15	48.31	103	108	Peak
2412	95.38	103.19			32.31	8.19	48.31	103	108	Average
2412	105.23	113.04			32.31	8.19	48.31	103	108	Peak
2483.5	36.54	44.14	54.00	-17.46	32.38	8.32	48.30	103	108	Average
2483.5	47.66	55.26	74.00	-26.34	32.38	8.32	48.30	103	108	Peak

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2412MHz: Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	40.07	47.94	54.00	-13.93	32.29	8.15	48.31	110	80	Average
2390	50.69	58.56	74.00	-23.31	32.29	8.15	48.31	110	80	Peak
2437	97.79	105.52			32.34	8.24	48.31	110	80	Average
2437	107.61	115.34			32.34	8.24	48.31	110	80	Peak
2483.5	40.78	48.38	54.00	-13.22	32.38	8.32	48.30	110	80	Average
2483.5	53.63	61.23	74.00	-20.37	32.38	8.32	48.30	110	80	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	37.41	45.28	54.00	-16.59	32.29	8.15	48.31	100	125	Average
2390	47.90	55.77	74.00	-26.10	32.29	8.15	48.31	100	125	Peak
2437	100.26	107.99			32.34	8.24	48.31	100	125	Average
2437	110.22	117.95			32.34	8.24	48.31	100	125	Peak
2483.5	40.69	48.29	54.00	-13.31	32.38	8.32	48.30	100	125	Average
2483.5	51.90	59.50	74.00	-22.10	32.38	8.32	48.30	100	125	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2437MHz: Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	36.11	43.98	54.00	-17.89	32.29	8.15	48.31	176	85	Average
2390	47.30	55.17	74.00	-26.70	32.29	8.15	48.31	176	85	Peak
2462	96.99	104.65			32.36	8.28	48.30	176	85	Average
2462	105.69	113.35			32.36	8.28	48.30	176	85	Peak
2483.5	51.10	58.70	54.00	-2.90	32.38	8.32	48.30	176	85	Average
2483.5	66.85	74.45	74.00	-7.15	32.38	8.32	48.30	176	85	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	35.88	43.75	54.00	-18.12	32.29	8.15	48.31	100	130	Average
2390	47.54	55.41	74.00	-26.46	32.29	8.15	48.31	100	130	Peak
2462	96.38	104.04			32.36	8.28	48.30	100	130	Average
2462	106.90	114.56			32.36	8.28	48.30	100	130	Peak
2483.5	50.70	58.30	54.00	-3.30	32.38	8.32	48.30	100	130	Average
2483.5	65.63	73.23	74.00	-8.37	32.38	8.32	48.30	100	130	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2462MHz: Fundamental frequency.

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

NOTE: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.2.2 Test Instruments

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR7	101588	Jan. 22,16	Jan. 21,17
Artificial Mains Network	Rohde&Schwarz	ENV216	101173	Mar. 04,16	Mar. 03,17
Artificial Mains Network	Rohde&Schwarz	ESH3-Z5	100317	Apr. 05,16	Apr. 04,17
Voltage probe	SCHWARZBECK	TK 9421	TK 9421-176	Jan. 08,16	Jan. 07,17
Test software	ADT	ADT_Cond_V7.3.7	N/A	N/A	N/A

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa Shielded Room 1.

3. The VCCI Site Registration No. is C-2040.

4.2.3 Test Procedures


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

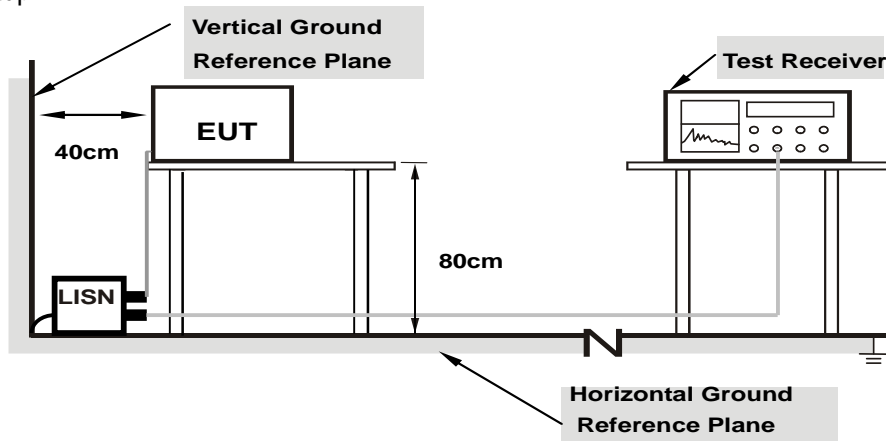

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.


4.2.7 Test Results

TEST VOLTAGE	DC 5.2V From Adapter Input 230 Vac, 50 Hz	6dB BANDWIDTH	9 kHz
ENVIRONMENTAL CONDITIONS	24deg. C, 55RH	TESTED BY	Eric

Frequency (MHz)	QuasiPeak (dB μ V)	CAverage (dB μ V)	Limit (dB μ V)	Margin (dB)	Line	Filter	Corr. (dB)
0.150000	---	32.87	56.00	23.13	L	ON	9.6
0.150000	47.87	---	66.00	18.13	L	ON	9.6
1.318000	---	31.46	46.00	14.54	L	ON	9.7
1.318000	36.38	---	56.00	19.62	L	ON	9.7
2.084000	---	32.84	46.00	13.16	L	ON	9.7
2.084000	37.78	---	56.00	18.22	L	ON	9.7
2.268000	---	32.57	46.00	13.43	L	ON	9.7
2.268000	37.54	---	56.00	18.46	L	ON	9.7
3.616000	---	25.55	46.00	20.45	L	ON	9.7
3.616000	30.69	---	56.00	25.31	L	ON	9.7
26.120000	---	32.20	50.00	17.80	L	ON	10.1
26.120000	37.62	---	60.00	22.38	L	ON	10.1

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

Full Spectrum

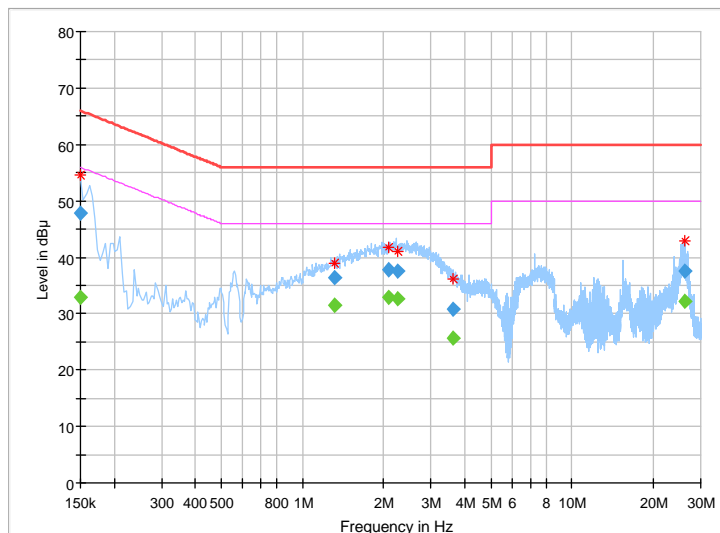


TEST VOLTAGE	DC 5.2V From Adapter Input 230 Vac, 50 Hz	6dB BANDWIDTH	9 kHz
ENVIRONMENTAL CONDITIONS	24deg. C, 55RH	TESTED BY	Eric

Frequency (MHz)	QuasiPeak (dB μ V)	CAverage (dB μ V)	Limit (dB μ V)	Margin (dB)	Line	Filter	Corr. (dB)
0.150000	---	26.63	56.00	29.37	N	ON	9.8
0.150000	40.45	---	66.00	25.55	N	ON	9.8
1.300000	---	29.88	46.00	16.12	N	ON	9.9
1.300000	35.04	---	56.00	20.96	N	ON	9.9
2.018000	---	31.89	46.00	14.11	N	ON	9.8
2.018000	36.79	---	56.00	19.21	N	ON	9.8
2.232000	---	31.68	46.00	14.32	N	ON	9.8
2.232000	36.64	---	56.00	19.36	N	ON	9.8
4.684000	---	22.55	46.00	23.45	N	ON	9.8
4.684000	27.28	---	56.00	28.72	N	ON	9.8
25.372000	---	36.14	50.00	13.86	N	ON	10.2
25.372000	39.23	---	60.00	20.77	N	ON	10.2

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

Full Spectrum

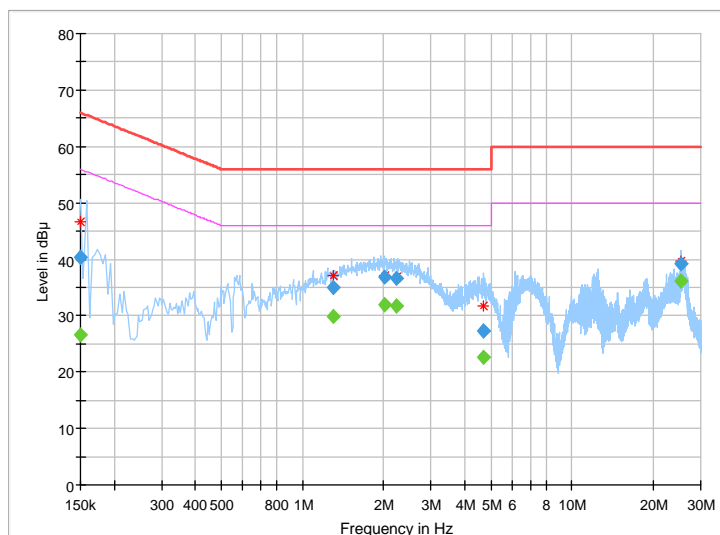

4.3 6dB Bandwidth Measurement

4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 Test Setup



4.3.3 Test Instruments

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Power Sensor	Keysight	U2021XA	MY55060016	May 04, 16	May 03, 17
Power Sensor	Keysight	U2021XA	MY55060018	May 04, 16	May 03, 17
10dB Attenuator	JFW/USA	50HF-010-SMA	1505	Jul. 27, 16	Jul. 26, 17
Digital Multimeter	FLUKE	15B	A1220010DG	Oct. 12, 15	Oct. 11, 16
Humid & Temp Programmable Tester	Haida	HD-2257	110807201	Sep. 05, 16	Sep. 04, 17
Oscilloscope	Agilent	DSO9254A	MY51260160	Nov. 28, 15	Nov. 27, 16
Signal Analyzer	Rohde & Schwarz	FSV7	102331	Nov. 09, 15	Nov. 08, 16
Signal Generator	Agilent	N5183A	MY50140980	Nov. 09, 15	Nov. 08, 16
Agile Signal Generator	Agilent	8645A	Agilent	Aug. 08, 16	Aug. 07, 17
ESG Vector Signal Generator	Agilent	E4438C	MY49072505	Apr. 22, 16	Apr. 21, 17
BLUETOOTH TESTER	Rohde&Schwarz	CBT32	100811	Aug. 08, 16	Aug. 07, 17

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
2. The test was performed in RF Oven room.

4.3.4 Test Procedure

- a. Set resolution bandwidth (RBW) = 100kHz
- b. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

802.11b

Channel	Frequency (MHz)	6db Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	8.55	0.5	PASS
6	2437	9.04	0.5	PASS
11	2462	8.57	0.5	PASS

802.11g


Channel	Frequency (MHz)	6db Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	15.33	0.5	PASS
6	2437	15.10	0.5	PASS
11	2462	15.34	0.5	PASS

802.11n (HT20)


Channel	Frequency (MHz)	6db Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	15.12	0.5	Pass
6	2437	15.12	0.5	Pass
11	2462	15.47	0.5	Pass

Spectrum Plot of Worst Value


802.11b

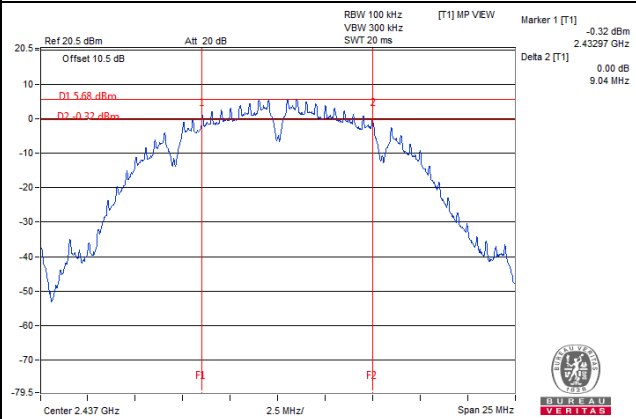

802.11g

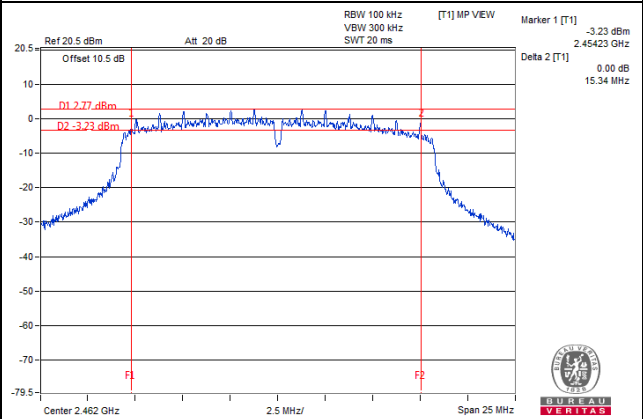

802.11n (HT20)

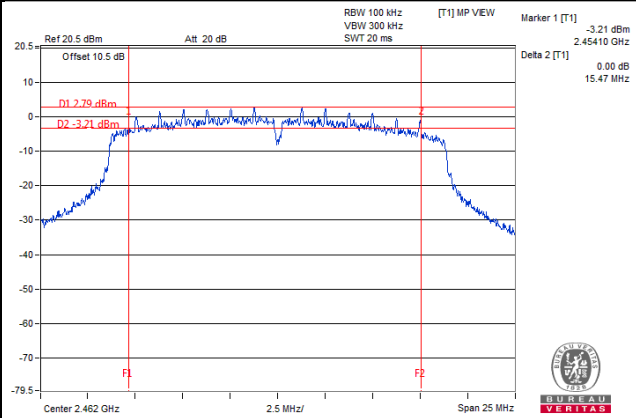


4.4 Conducted Output Power Measurement

4.4.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

4.4.2 Test Setup

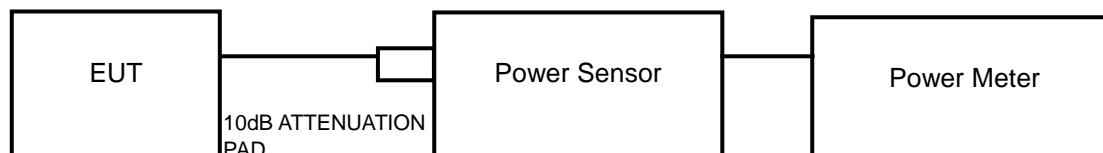

4.4.3 Test Instruments

Refer to section 4.3.3 to get information of above instrument.

4.4.4 Test Procedures

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

4.4.5 Deviation from Test Standard

No deviation.

4.4.6 EUT Operating Conditions

Same as Item 4.3.6.

4.4.7 Test Results

4.4.7.1 Maximum Peak Output Power

802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT (W)	PASS/FAIL
1	2412	13.98	25.003	1	PASS
6	2437	14.06	25.468	1	PASS
11	2462	13.71	23.496	1	PASS

802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT (W)	PASS/FAIL
1	2412	17.34	54.200	1	PASS
6	2437	17.84	60.814	1	PASS
11	2462	17.26	53.211	1	PASS

802.11n (20MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT (W)	PASS/FAIL
1	2412	17.45	55.590	1	PASS
6	2437	17.69	58.749	1	PASS
11	2462	17.16	52.000	1	PASS

4.4.7.2 Average Output Power (For Reference)

The average power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	PASS/FAIL
1	2412	11.79	N/A
6	2437	11.91	N/A
11	2462	11.51	N/A

802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	PASS/FAIL
1	2412	10.10	N/A
6	2437	10.36	N/A
11	2462	10.05	N/A

802.11n (20MHz)


CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	PASS/FAIL
1	2412	10.18	N/A
6	2437	10.45	N/A
11	2462	9.97	N/A

4.5 Power Spectral Density Measurement

4.5.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 Test Setup

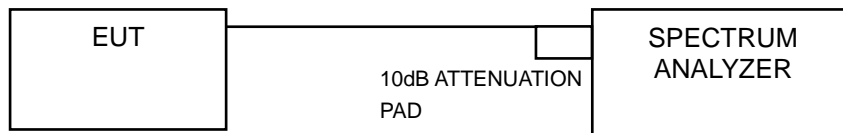

4.5.3 Test Instruments

Refer to section 4.3.3 to get information of above instrument.

4.5.4 Test Procedure

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set the VBW $\geq 3 \times \text{RBW}$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Condition

Same as Item 4.3.6

4.5.7 Test Results

802.11b




Channel	Freq. (MHz)	PSD (dBm/3kHz)	Limit (dBm)	Pass /Fail
1	2412	-8.60	8	Pass
6	2437	-8.21	8	Pass
11	2462	-7.62	8	Pass

802.11g

Channel	Freq. (MHz)	PSD (dBm/3kHz)	Limit (dBm)	Pass /Fail
1	2412	-10.72	8	Pass
6	2437	-10.41	8	Pass
11	2462	-11.92	8	Pass

802.11n (HT20)

Channel	Freq. (MHz)	PSD (dBm/3kHz)	Limit (dBm)	Pass /Fail
1	2412	-10.93	8	Pass
6	2437	-11.58	8	Pass
11	2462	-11.78	8	Pass

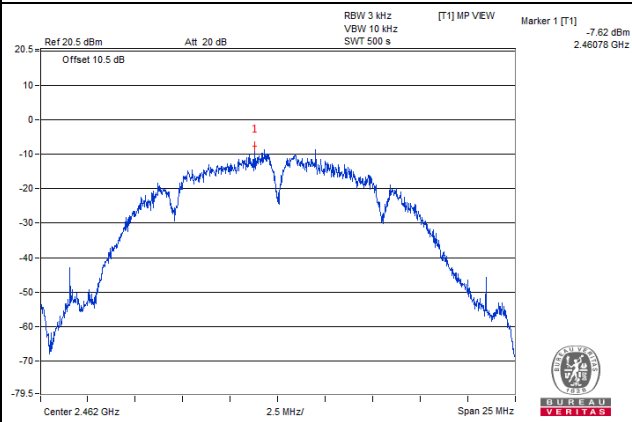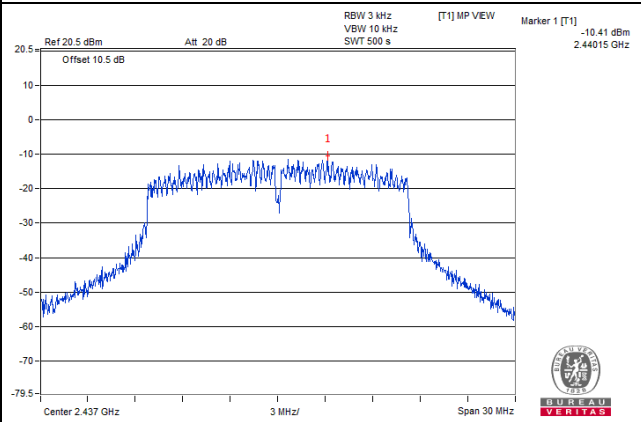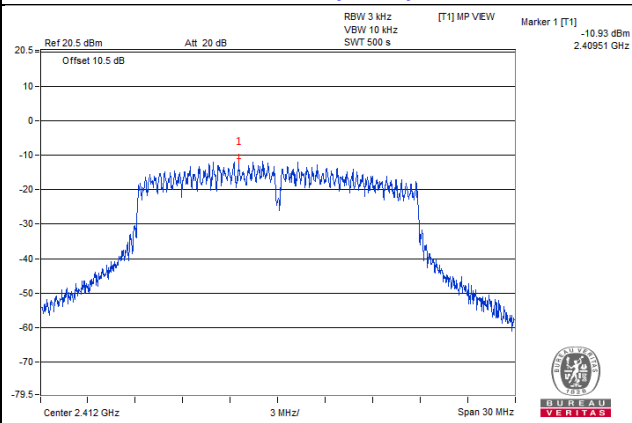
Spectrum Plot of Worst Value**802.11b****802.11g****802.11n (HT20)**

4.6 Conducted Out of Band Emission Measurement

4.6.1 Limits of Conducted Out of Band Emission Measurement

Below 20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 Test Setup

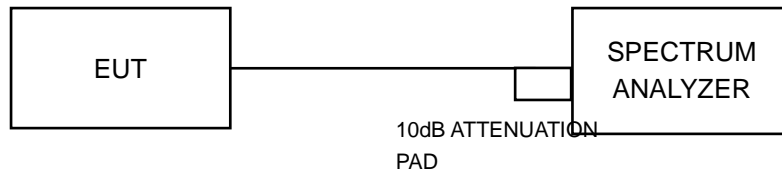

4.6.3 Test Instruments

Refer to section 4.3.3 to get information of above instrument.

4.6.4 Test Procedure

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 EUT Operating Condition



Same as Item 4.3.6

4.6.7 Test Results



The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.

802.11b



CH 1

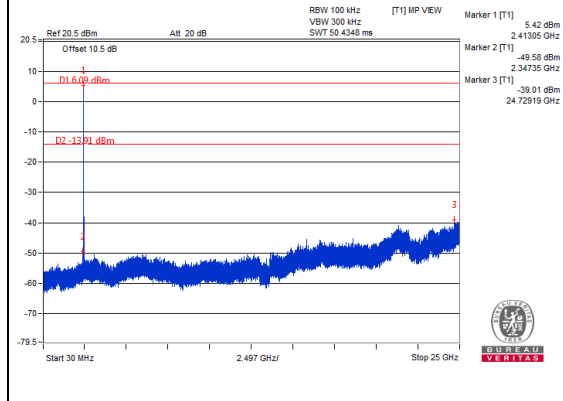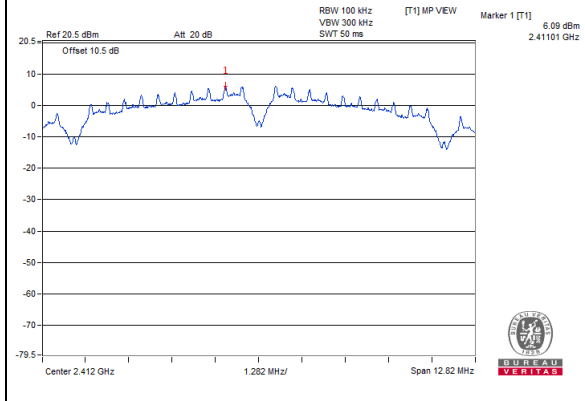


CH 6

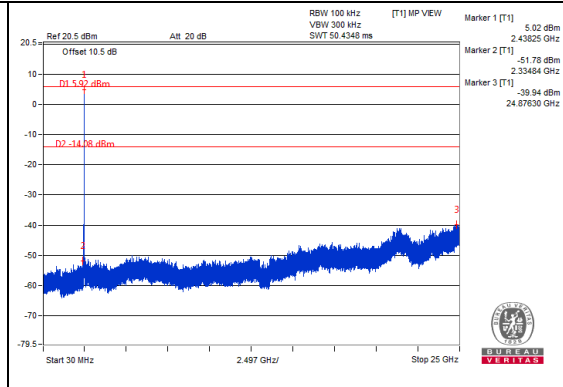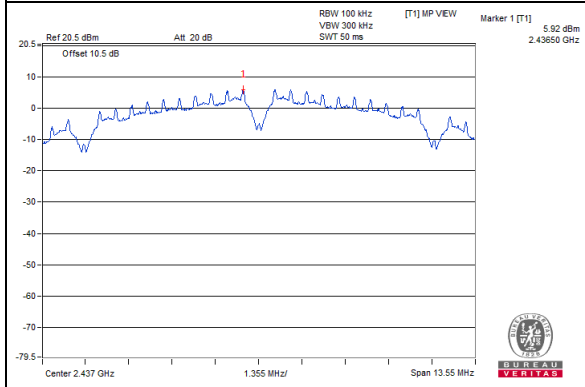


CH 11

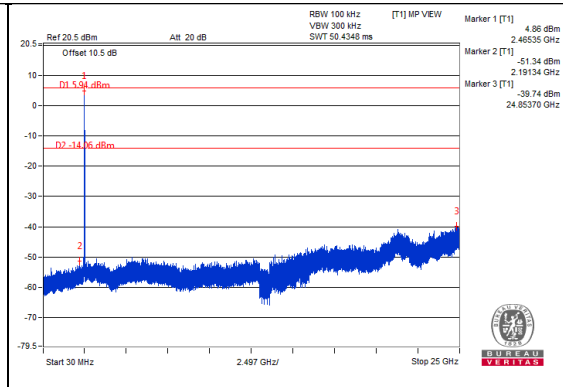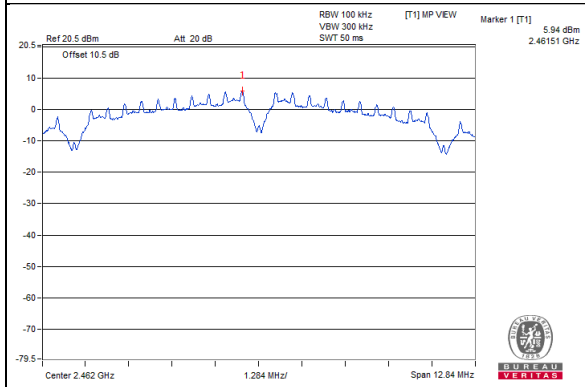

CH 1 Band Edge


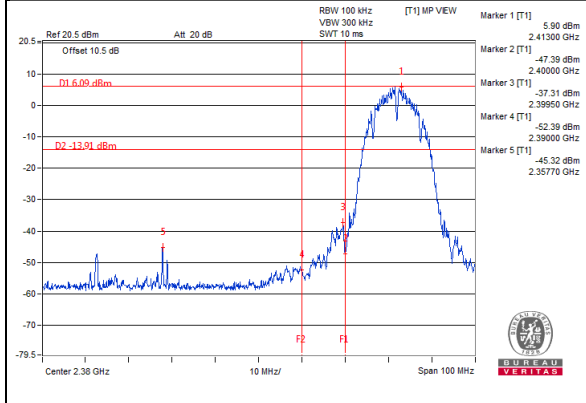


CH 11 Band Edge


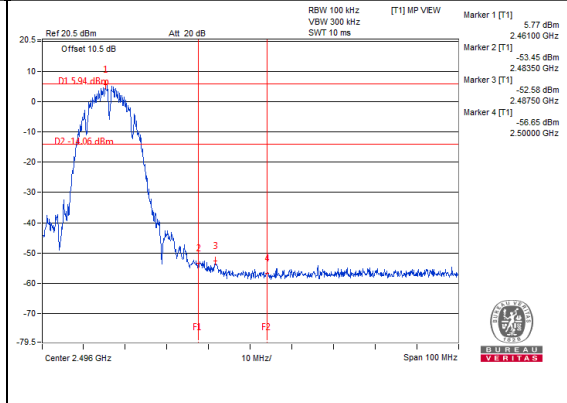


802.11g



CH 1

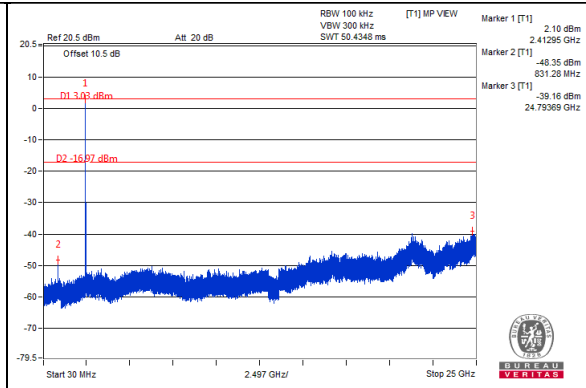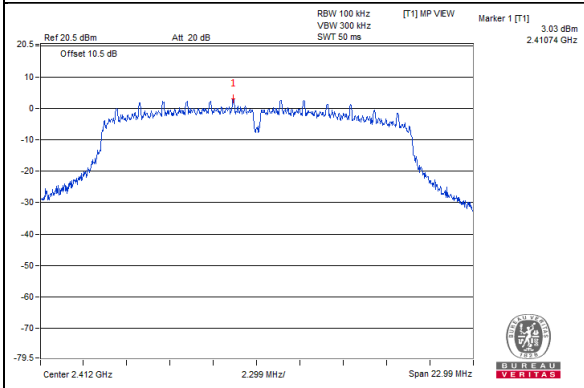


CH 6

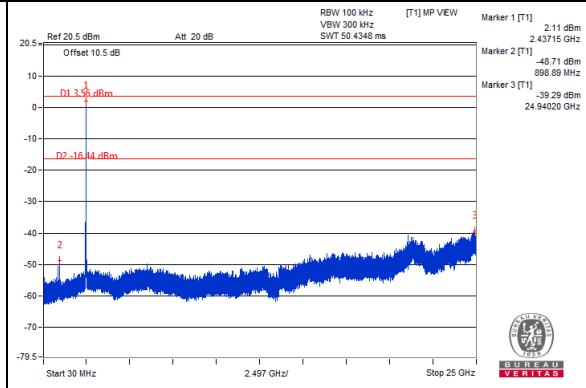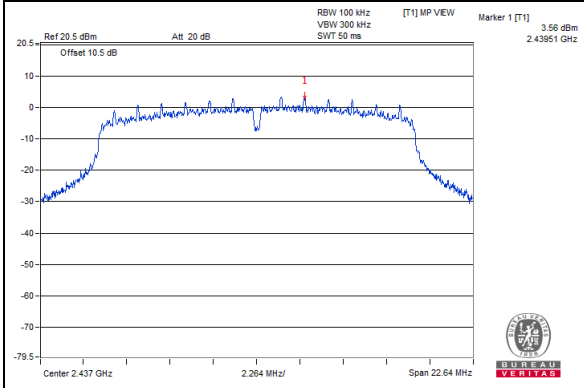


CH 11

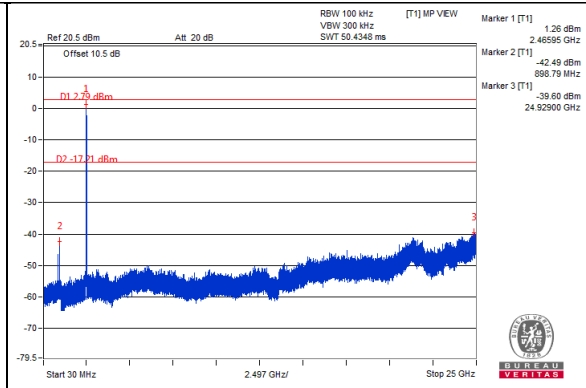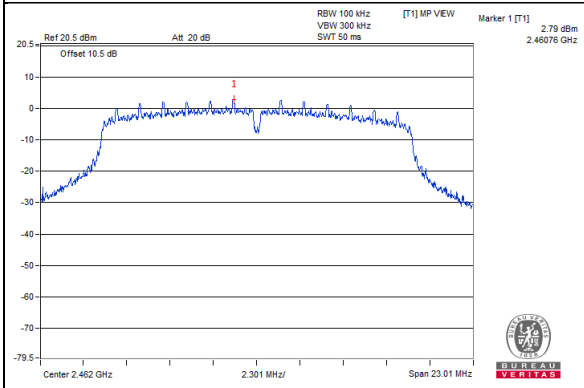

CH 1 Band Edge

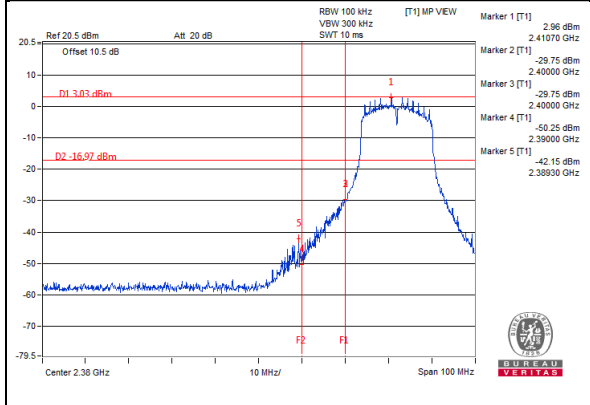


CH 11 Band Edge

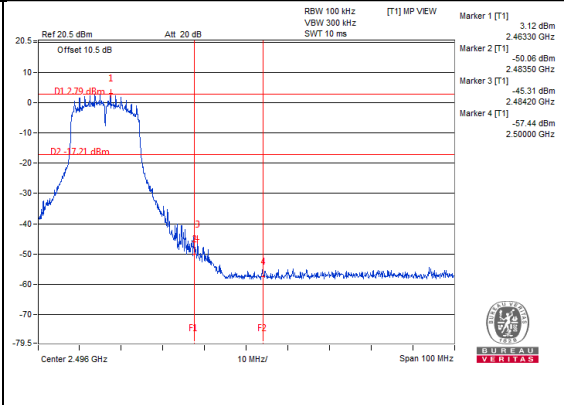


802.11n (20MHz)


CH 1

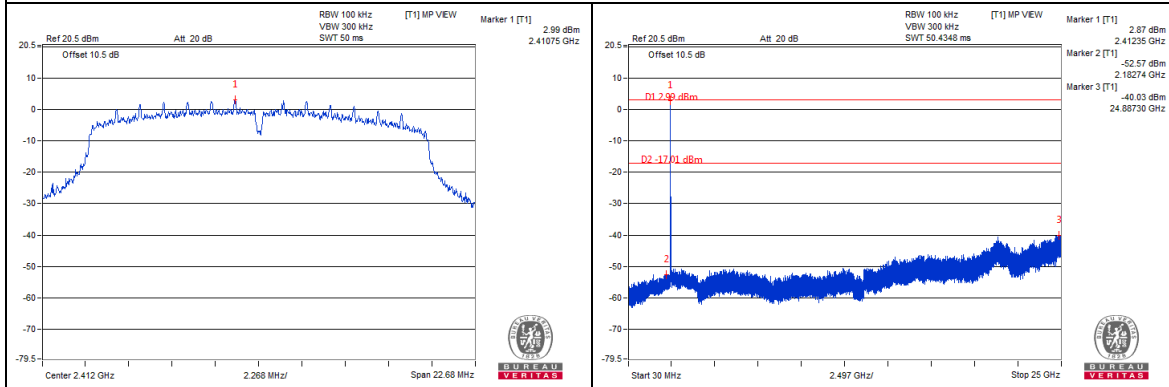


CH 6

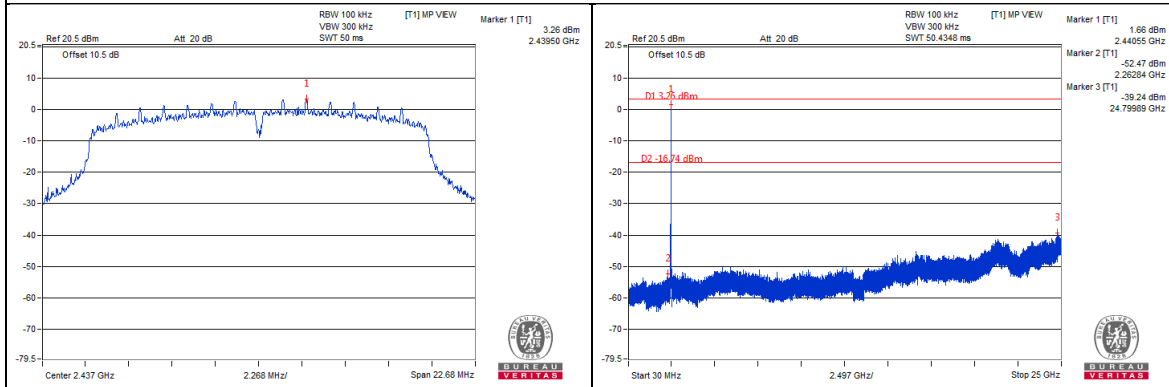


CH 11

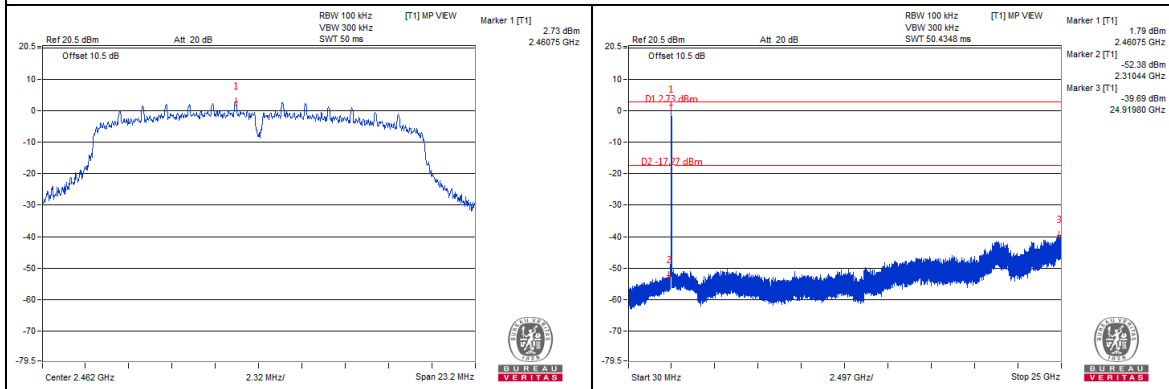

CH 1 Band Edge

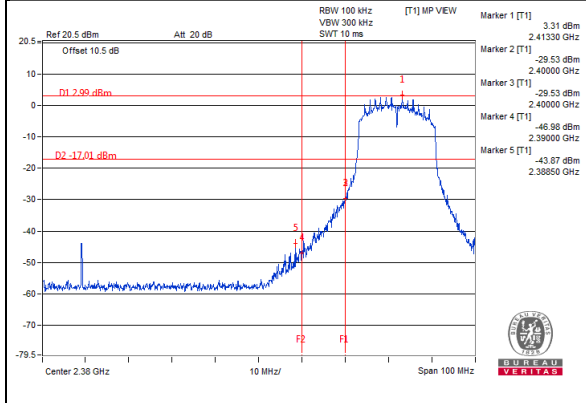

CH 11 Band Edge

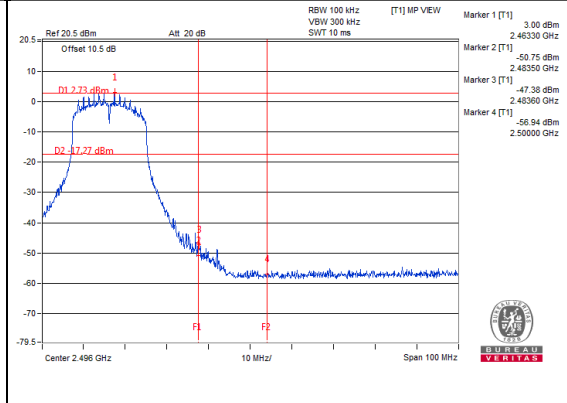



5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---