

# FCC RF Test Report


**APPLICANT** : Lenovo (Shanghai) Electronics Technology Co., Ltd.  
**EQUIPMENT** : Portable Tablet Computer  
**BRAND NAME** : lenovo  
**MODEL NAME** : YOGA Tablet 2-830L  
**FCC ID** : O57YT2830L  
**STANDARD** : FCC Part 15 Subpart E §15.407  
**CLASSIFICATION** : (NII) Unlicensed National Information Infrastructure

The product was received on Jun. 20, 2014 and testing was completed on Jul. 30, 2014. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.



Reviewed by: Joseph Lin / Supervisor



Approved by: Jones Tsai / Manager



**SPORTON INTERNATIONAL (KUNSHAN) INC.**  
**No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. C.**



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION ..... 5**

    1.1 Applicant ..... 5

    1.2 Manufacturer ..... 5

    1.3 Factory ..... 5

    1.4 Feature of Equipment Under Test ..... 5

    1.5 Product Specification of Equipment Under Test ..... 6

    1.6 Modification of EUT ..... 6

    1.7 Testing Location ..... 7

    1.8 Applicable Standards ..... 7

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 8**

    2.1 Carrier Frequency and Channel ..... 8

    2.2 Pre-Scanned RF Power ..... 9

    2.3 Test Mode ..... 11

    2.4 Connection Diagram of Test System ..... 12

    2.5 Support Unit used in test configuration and system ..... 13

    2.6 EUT Operation Test Setup ..... 13

    2.7 Measurement Results Explanation Example ..... 13

**3 TEST RESULT ..... 14**

    3.1 6dB Bandwidth Measurement ..... 14

    3.2 Maximum Conducted Output Power Measurement ..... 17

    3.3 Power Spectral Density Measurement ..... 19

    3.4 Unwanted Emissions Measurement ..... 23

    3.5 AC Conducted Emission Measurement ..... 47

    3.6 Frequency Stability Measurement ..... 51

    3.7 Automatically Discontinue Transmission ..... 53

    3.8 Antenna Requirements ..... 54

**4 LIST OF MEASURING EQUIPMENT ..... 56**

**5 UNCERTAINTY OF EVALUATION ..... 57**

**APPENDIX A. SETUP PHOTOGRAPHS**





### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.403(i)	6dB Bandwidth	> 500kHz	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 30 dBm	Pass	-
0	15.407(a)	Power Spectral Density	≤ 30 dBm/500kHz	Pass	-
3.4	15.407(b)	Unwanted Emissions	≤ -17, -27 dBm/MHz & 15.209(a)	Pass	Under limit 3.04 dB at 44.550 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 9.66 dB at 0.610 MHz
3.6	15.407(g)	Frequency Stability	Within Operation Band	Pass	-
3.7	15.407(c)	Automatically Discontinue Transmission	Discontinue Transmission	Pass	-
3.8	15.203 & 15.407(a)	Antenna Requirement	N/A	Pass	-



# 1 General Description

## 1.1 Applicant

Lenovo (Shanghai) Electronics Technology Co., Ltd.  
No. 68 Building, 199 Fenju Road, Wai Gao Qiao FTZ, Shanghai, China

## 1.2 Manufacturer

Lenovo PC HK Limited  
23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay, Hong Kong

## 1.3 Factory

LENOVO MOBILE COMMUNICATION TECHNOLOGY CO LTD.  
NO.999 QISHAN NORTH 2ND ROAD, INFORMATION & OPTOELECTRONICS PARK, TORCH HIGH  
TECH, XIAMEN FUJIAN 361009, CHINA

LENOVO MOBILE COMMUNICATION (WUHAN) CO LTD.  
19 GAOXIN 4TH RD EAST LAKE HIGH-TECH, ZONE WUHAN HUBEI 430205, CHINA

## 1.4 Feature of Equipment Under Test

Product Feature	
Equipment	Portable Tablet Computer
Brand Name	lenovo
Model Name	YOGA Tablet 2-830L
FCC ID	O57YT2830L
EUT supports Radios application	GPRS/EGPRS/WCDMA/HSPA/DC-HSDPA/HSPA+(Downlink only)/LTE WLAN2.4GHz 802.11b/g/n HT20/HT40 WLAN5G 802.11a/n HT20/HT40 Bluetooth v3.0+EDR Bluetooth v4.0 LE
HW Version	Lenovopad YOGA Tablet 2-830L
SW Version	YOGA Tablet 2-830L-140623
EUT Stage	Production Unit

**Remark:**

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are two types of EUT sample 1 and sample 2, the differences between two samples is only different supplier for Battery/EMMC/Panel/Touch panel/front and back camera.

### 1.5 Product Specification of Equipment Under Test

Product Specification subjective to this standard			
<b>Tx/Rx Channel Frequency Range</b>	5745 MHz ~ 5825 MHz		
<b>Maximum Output Power</b>	802.11a : 10.81 dBm / 0.0121 W 802.11n HT20 : 10.56 dBm / 0.0114 W 802.11n HT40 : 10.32 dBm / 0.0108 W		
<b>Type of Modulation</b>	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)		
<b>Antenna Type</b>	Chain Port 0 : IFA Antenna with gain 0.50 dBi Chain Port 1 : IFA Antenna with gain 0.00 dBi		
<b>Antenna Function Description</b>		Chain Port 0	Chain Port 1
	802.11 a	√	√
	802.11 n SISO	√	√
	802.11 n MIMO	√	√

### 1.6 Modification of EUT

No modifications are made to the EUT during all test items.

## 1.7 Testing Location

<b>Test Site</b>	SPORTON INTERNATIONAL (KUNSHAN) INC.			
<b>Test Site Location</b>	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C. TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958			
<b>Test Site No.</b>	<b>Sporton Site No.</b>			<b>FCC Registration No.</b>
	TH01-KS	03CH01-KS	CO01-KS	149928

## 1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v01
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.4-2003

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

### 2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5725-5850 MHz Band 4 (U-NII-3)	149	5745	<b>159</b>	<b>5795</b>
	<b>151</b>	<b>5755</b>	161	5805
	153	5765	165	5825
	157	5785		

**Note:** The above Frequency and Channel in boldface were 802.11n HT40.





## 2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and data rate associated with the highest power were chosen for full test in the following tables. Final Output Power equals to Measured Output Power adds the duty factor.

5GHz 802.11a Average Power (dBm)										
Data Rate (MHz)	CH	6Mbps	CH	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
Chain Port 0	149	10.68	165	10.76	10.76	10.65	10.68	10.79	10.76	10.71
	157	10.70								
	165	10.81								
Chain Port 1	149	10.01	157	10.23	10.06	10.05	10.13	10.16	10.11	9.99
	157	10.37								
	165	9.97								

5GHz 802.11n HT20 Average Power (dBm)										
Data Rate (MHz)	CH	MCS0	CH	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
Chain Port 0	149	10.46	149	10.36	10.30	10.28	10.39	10.37	10.31	10.17
	157	10.29								
	165	10.30								
Chain Port 1	149	9.15	157	9.52	9.39	9.28	9.20	9.46	8.98	9.03
	157	9.68								
	165	9.04								
Data Rate (MHz)	CH	MCS8	CH	MCS 9	MCS 10	MCS 11	MCS 12	MCS 13	MCS 14	MCS 15
Chain Port 0+1(0)	149	7.73	165	7.82	7.76	7.54	7.77	7.79	7.80	7.64
	157	7.78								
	165	7.91								
Chain Port 0+1(1)	149	7.11	165	6.55	6.67	6.43	6.52	6.45	6.76	6.32
	157	7.08								
	165	7.15								
Chain Port 0+1	149	10.44	165	10.24	10.26	10.03	10.20	10.19	10.32	10.04
	157	10.45								
	165	10.56								



5GHz 802.11n HT40 Average Power (dBm)										
Data Rate (MHz)	CH	MCS0	CH	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
Chain Port 0	151	9.91	159	10.06	9.99	9.95	9.99	10.11	10.16	9.93
	159	10.19								
Chain Port 1	151	9.58	151	9.41	9.29	9.25	9.35	9.46	9.34	9.22
	159	9.46								
Data Rate (MHz)	CH	MCS8	CH	MCS 9	MCS 10	MCS 11	MCS 12	MCS 13	MCS 14	MCS 15
Chain Port 0+1(0)	151	6.85	159	7.09	6.67	6.68	6.45	6.46	6.47	6.32
	159	7.40								
Chain Port 0+1(1)	151	7.03	159	7.04	6.82	6.71	6.68	6.63	6.62	6.32
	159	7.21								
Chain Port 0+1	151	9.95	159	10.07	9.76	9.71	9.58	9.56	9.56	9.33
	159	10.32								

Note: Chain Port 0+1 is a calculated result from sum of the power Chain Port 0+1(0) and Chain Port 0+1(1).



### 2.3 Test Mode


Final results of test modes, data rates and test channels are shown as following table.

Test Cases				
	Test Items	Mode	Data rate	Test Channel
Conducted TCs	6dB Bandwidth Power Spectral Density	802.11a	6 Mbps	L/M/H
		802.11n HT20	MCS0/ MCS8	L/M/H
		802.11n HT40	MCS0/ MCS8	L/M/H
	Output Power	802.11a	6 Mbps	L/M/H
		802.11n HT20	MCS0/ MCS8	L/M/H
		802.11n HT40	MCS0/ MCS8	L/M/H
	Frequency Stability	802.11a	6 Mbps	L
Radiated TCs	Radiated Band Edge	802.11a	6 Mbps	L/H
		802.11n HT20	MCS8	L/H
		802.11n HT40	MCS8	L/H
	Radiated Spurious Emission	802.11a	6 Mbps	L/M/H
		802.11n HT20	MCS8	L/M/H
		802.11n HT40	MCS8	L/M/H
AC Conducted Emission	Mode 1 : GSM850 Idle + Bluetooth Link + WLAN (5G) Link + USB Cable 1 (Charging from Adapter 1) + Earphone + Battery 1 for Sample 1 Mode 2 : GSM850 Idle + Bluetooth Link + WLAN (5G) Link + USB Cable 2 (Charging from Adapter 2) + Earphone + Battery 2 for Sample 2			
<b>Remark:</b> 1. The worst case of conducted emission is mode 2; only the test data of it was reported. 2. For Radiated Test Cases, The test modes were performed with Adapter 1, Battery 1, Earphone and USB Cable 1 for Sample 1, only the worst mode (802.11n HT40 CH151) based on Sample 1 need to verify Adapter 2, Battery 2 and USB Cable 2 for Sample 2.				


Ch. #		Band IV : 5725-5850 MHz		
		802.11a	802.11n HT20	802.11n HT40
L	Low	149	149	151
M	Middle	157	157	-
H	High	165	165	159

## 2.4 Connection Diagram of Test System

### <WLAN Tx Mode>

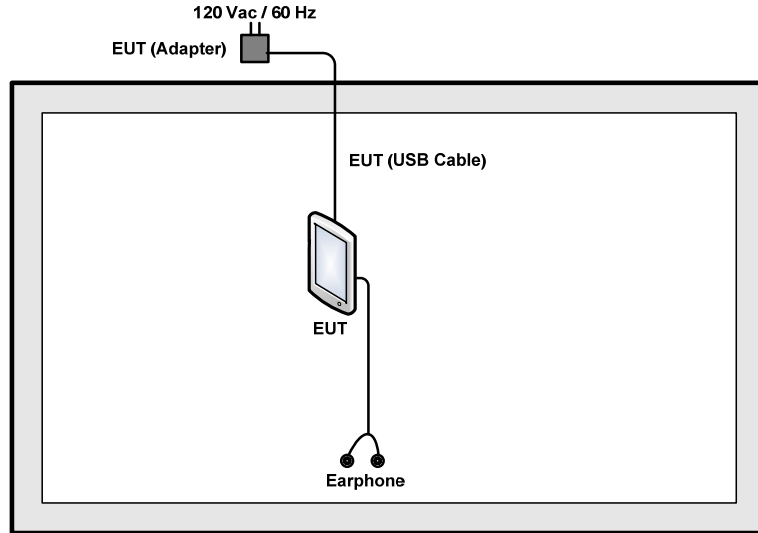

### <AC Conducted Emission Mode>

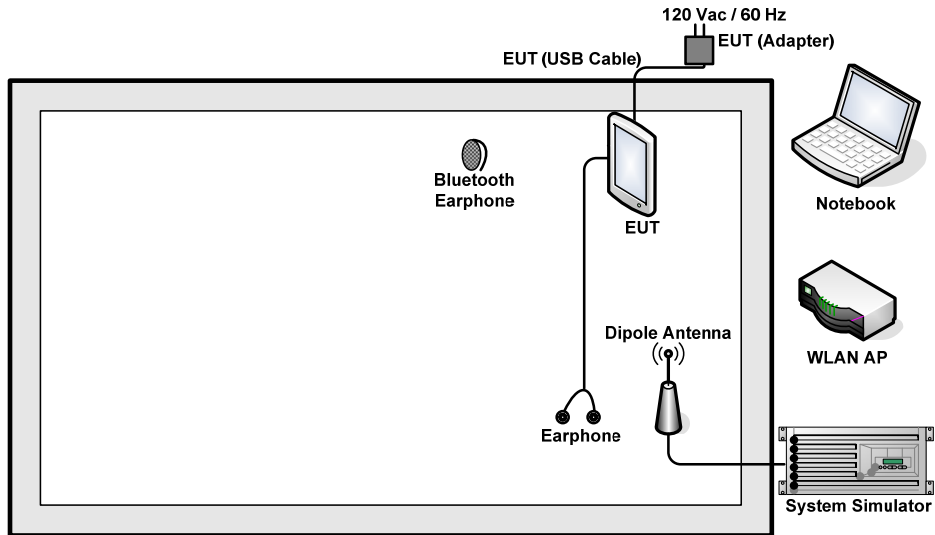

## 2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	D-Link	DIR-855	KA2DIR855A2	N/A	Unshielded, 1.8 m
2.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
3.	DC Power Supply	GWINSTEK	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
4.	Notebook	Lenovo	G480	N/A	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
5.	Bluetooth Earphone	Lenovo	LBH505	N/A	N/A	N/A
6.	Earphone	Lenovo	SH100	N/A	N/A	N/A

## 2.6 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

## 2.7 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 7.3 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 7.3 + 10 = 17.3 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 6dB Bandwidth Measurement

##### 3.1.1 Description of 6dB Bandwidth

This section is for reporting purpose only.

There is no restriction limits for bandwidth.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.  
Section C) Emission bandwidth for the band 5.725-5.85GHz
2. Set RBW = 100kHz.
3. Set the VBW  $\geq 3 \times$  RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
7. Measure and record the results in the test report.

##### 3.1.4 Test Setup

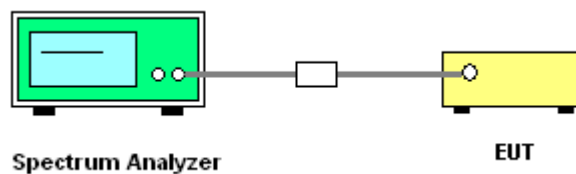




3.1.5 Test Result of 6dB Bandwidth

Test Band :	5GHz band 4	Temperature :	24~25°C
Test Engineer :	Issac Song	Relative Humidity :	49~51%

Mod.	Data Rate	N <sub>TX</sub>	Channel	Freq. (MHz)	6 dB Bandwidth (MHz)		FCC 6 dB Bandwidth Min. Limit (MHz)		Pass/Fail
					Chain Port 0	Chain Port 1	Chain Port 0	Chain Port 1	
11a	6Mbps	1	149	5745	15.42	-	0.5	0.5	Pass
11a	6Mbps	1	157	5785	15.40	-	0.5	0.5	Pass
11a	6Mbps	1	165	5825	15.46	-	0.5	0.5	Pass
HT20	MCS0	1	149	5745	15.32	-	0.5	0.5	Pass
HT20	MCS0	1	157	5785	15.78	-	0.5	0.5	Pass
HT20	MCS0	1	165	5825	15.64	-	0.5	0.5	Pass
HT40	MCS0	1	151	5755	36.12	-	0.5	0.5	Pass
HT40	MCS0	1	159	5795	36.00	-	0.5	0.5	Pass
HT20	MCS8	2	149	5745	15.74	16.28	0.5		Pass
HT20	MCS8	2	157	5785	15.42	16.32	0.5		Pass
HT20	MCS8	2	165	5825	15.08	15.68	0.5		Pass
HT40	MCS8	2	151	5755	36.28	36.28	0.5		Pass
HT40	MCS8	2	159	5795	36.28	36.24	0.5		Pass

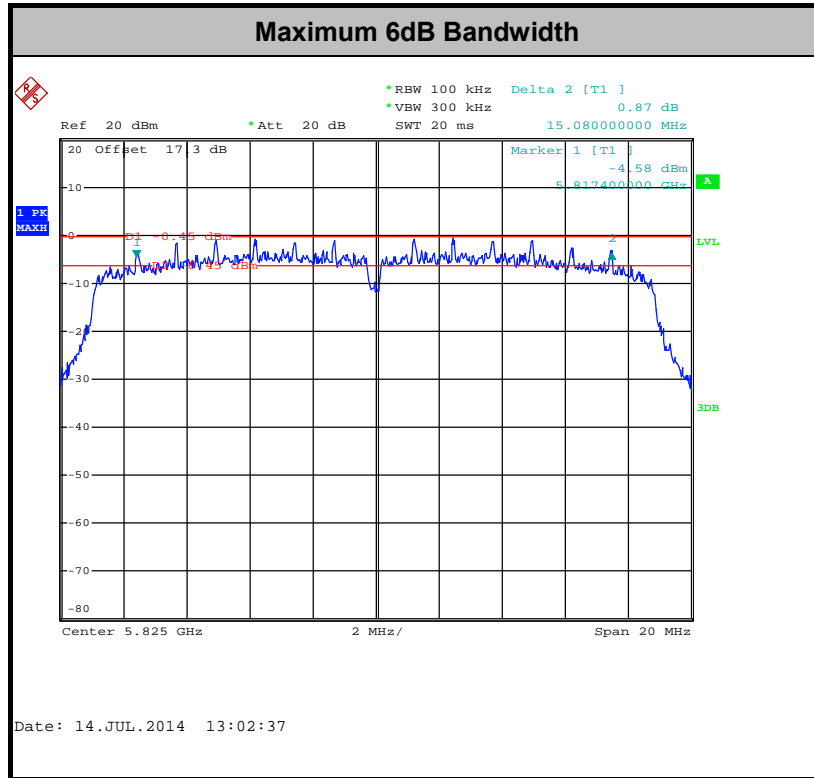

**Note:** The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



## 3.2 Maximum Conducted Output Power Measurement

### 3.2.1 Limit of Maximum Conducted Output Power

#### <FCC 14-30 CFR 15.407>

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


### 3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor,  $10 \log(1/x)$ , where  $x$  is the duty cycle.

### 3.2.4 Test Setup

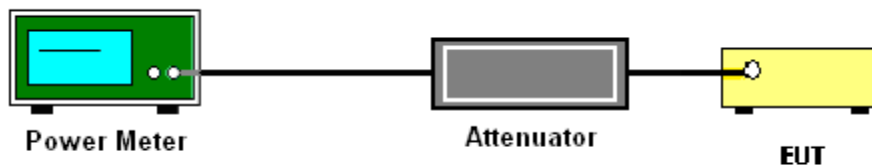



3.2.5 Test Result of Maximum Conducted Output Power

Test Band :	5GHz band 4	Temperature :	24~25°C
Test Engineer :	Issac Song	Relative Humidity :	49~51%

Mod.	Data Rate	NTX	Channel	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass /Fail
					Chain Port 0	Chain Port 1	Chain Port 0	Chain Port 1	SUM	Chain Port 0	Chain Port 1	Chain Port 0	Chain Port 1	
11a	6Mbps	1	149	5745	0.18	0.20	10.68	10.01		30.00	30.00	0.50	0.00	Pass
11a	6Mbps	1	157	5785	0.18	0.20	10.70	10.37		30.00	30.00	0.50	0.00	Pass
11a	6Mbps	1	165	5825	0.18	0.20	10.81	9.97		30.00	30.00	0.50	0.00	Pass
HT20	MCS0	1	149	5745	0.22	0.20	10.46	9.15		30.00	30.00	0.50	0.00	Pass
HT20	MCS0	1	157	5785	0.22	0.20	10.29	9.68		30.00	30.00	0.50	0.00	Pass
HT20	MCS0	1	165	5825	0.22	0.20	10.30	9.04		30.00	30.00	0.50	0.00	Pass
HT40	MCS0	1	151	5755	0.22	0.24	9.91	9.58		30.00	30.00	0.50	0.00	Pass
HT40	MCS0	1	159	5795	0.22	0.24	10.19	9.46		30.00	30.00	0.50	0.00	Pass
HT20	MCS8	2	149	5745	0.41	0.41	7.73	7.11	10.44	30.00		3.26		Pass
HT20	MCS8	2	157	5785	0.41	0.41	7.78	7.08	10.45	30.00		3.26		Pass
HT20	MCS8	2	165	5825	0.41	0.41	7.91	7.15	10.56	30.00		3.26		Pass
HT40	MCS8	2	151	5755	0.45	0.41	6.85	7.03	9.95	30.00		3.26		Pass
HT40	MCS8	2	159	5795	0.45	0.41	7.40	7.21	10.32	30.00		3.26		Pass

### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01. Section F) Maximum power spectral density.

**# Method SA-2 #**

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).


1. The testing follows Method SA-2 of FCC KDB 789033 D01 General UNII Test Procedures v01r03.
  - Measure the duty cycle.
  - Set span to encompass the entire emission bandwidth (EBW) of the signal.
  - Set RBW = 300 kHz.
  - Set VBW  $\geq$  1 MHz.
  - Number of points in sweep  $\geq$  2 Span / RBW.
  - Sweep time = auto.
  - Detector = RMS
  - Trace average at least 100 traces in power averaging mode.
  - Add  $10 \log(500\text{kHz}/\text{RBW})$  to the test result.
  - Add  $10 \log(1/x)$ , where  $x$  is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add  $10 \log(1/0.25) = 6$  dB if the duty cycle is 25 percent.

2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
4. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (1): Measure and sum the spectra across the outputs.

The total final Power Spectral Density is from a device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points, the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.

### 3.3.4 Test Setup

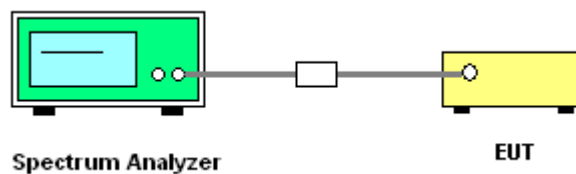




3.3.5 Test Result of Power Spectral Density

Test Band :	5GHz band 4	Temperature :	24~25°C
Test Engineer :	Issac Song	Relative Humidity :	49~51%

Mod.	Data Rate	NTX	Channel	Freq. (MHz)	Duty Factor (dB)		10log (500kHz /RBW) Factor (dB)		Average Power Density (dBm/500kHz)			Average PSD Limit (dBm/500kHz)		DG (dBi)		Pass /Fail
					Chain Port 0	Chain Port 1	Chain Port 0	Chain Port 1	Chain Port 0	Chain Port 1	SUM	Chain Port 0	Chain Port 1	Chain Port 0	Chain Port 1	
11a	6Mbps	1	149	5745	0.18	0.20	2.22	2.22	-5.12	-	-	30.00	30.00	0.50	0.00	Pass
11a	6Mbps	1	157	5785	0.18	0.20	2.22	2.22	-5.21	-	-	30.00	30.00	0.50	0.00	Pass
11a	6Mbps	1	165	5825	0.18	0.20	2.22	2.22	-5.38	-	-	30.00	30.00	0.50	0.00	Pass
HT20	MCS0	1	149	5745	0.22	0.20	2.22	2.22	-5.30	-	-	30.00	30.00	0.50	0.00	Pass
HT20	MCS0	1	157	5785	0.22	0.20	2.22	2.22	-5.70	-	-	30.00	30.00	0.50	0.00	Pass
HT20	MCS0	1	165	5825	0.22	0.20	2.22	2.22	-5.72	-	-	30.00	30.00	0.50	0.00	Pass
HT40	MCS0	1	151	5755	0.22	0.24	2.22	2.22	-9.13	-	-	30.00	30.00	0.50	0.00	Pass
HT40	MCS0	1	159	5795	0.22	0.24	2.22	2.22	-9.29	-	-	30.00	30.00	0.50	0.00	Pass
HT20	MCS8	2	149	5745	0.41	0.41	2.22		-			-3.62	30.00	3.26		Pass
HT20	MCS8	2	157	5785	0.41	0.41	2.22					-3.87	30.00	3.26		Pass
HT20	MCS8	2	165	5825	0.41	0.41	2.22					-3.96	30.00	3.26		Pass
HT40	MCS8	2	151	5755	0.45	0.41	2.22					-8.60	30.00	3.26		Pass
HT40	MCS8	2	159	5795	0.45	0.41	2.22					-9.23	30.00	3.26		Pass

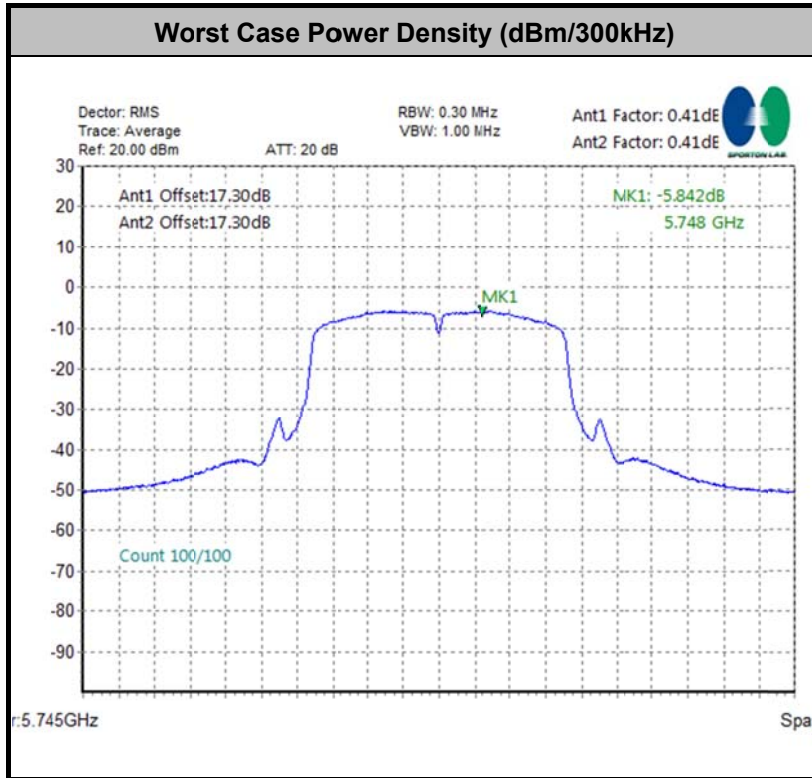

### 3.4 Unwanted Emissions Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part15.205.

#### 3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5725-5850 MHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of -17 dBm/MHz (78.3dBμV/m); for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of -27 dBm/MHz (68.3dBμV/m).
- (2) Unwanted spurious emissions fallen in restricted bands per FCC Part15.205 shall comply with the general field strength limits set forth in § 15.209 as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

**Note:** The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

EIRP (dBm)	Field Strength at 3m (dBμV/m)
-17	78.3
- 27	68.3

- (3) KDB789033 v01r03 H)2)c)(i) As specified in 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in 15.407(b)(4)). However, an out-of-band emission that complies with both the average and peak limits of 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz peak emission limit.



### **3.4.2 Measuring Instruments**

The measuring equipment is listed in the section 4 of this test report.

### **3.4.3 Test Procedures**

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01. Section G) Unwanted emissions measurement.

(1) Procedure for Unwanted Emissions Measurements Below 1000MHz

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW  $\geq$  3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold



(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz


- RBW = 1 MHz
- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- $VBW \geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Antenna	Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
0	802.11a	95.83	2.070	0.483	1kHz
1	802.11a	95.48	2.070	0.483	1kHz
0+1	802.11n HT20	90.98	0.988	1.012	3kHz
0+1	802.11n HT40	90.13	0.986	1.014	3kHz


2. The EUT was placed on a rotatable table top 0.8 meter above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

### 3.4.4 Test Setup


For radiated emissions below 30MHz

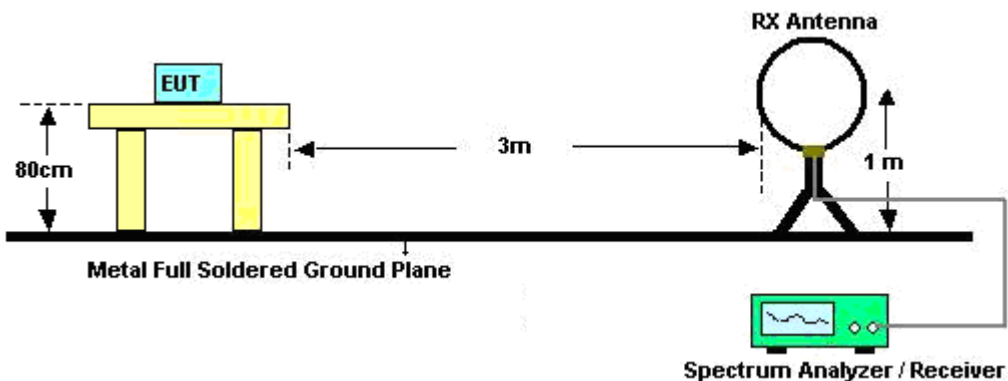

For radiated emissions from 30MHz to 1GHz

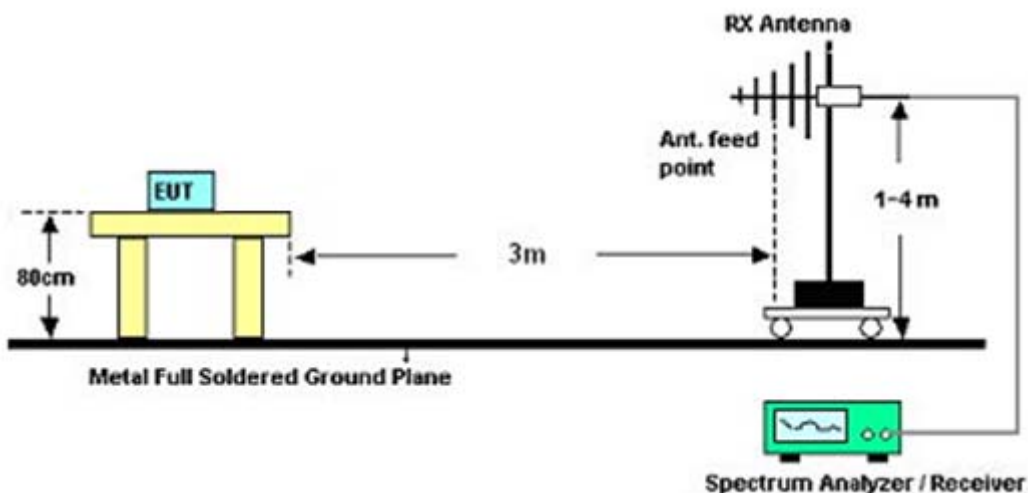

For radiated emissions above 1GHz

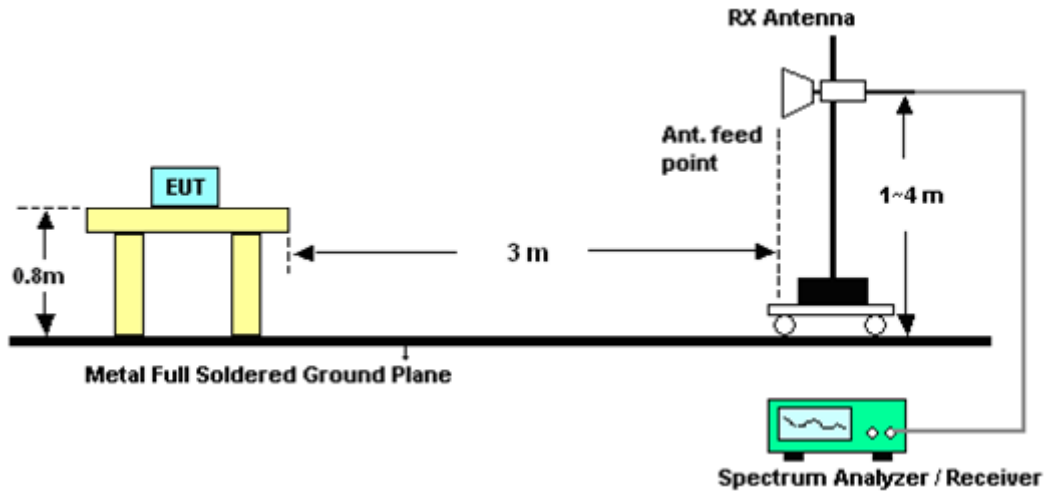

### 3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.



3.4.6 Test Result of Radiated Band Edges

<Sample 1>

Test Mode :	802.11a – Chain Port 0	Temperature :	23~24°C
Test Channel :	149	Relative Humidity :	43~44%
Test Engineer :	Stone Gu		

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5714.6	56.83	-11.47	68.3	56.58	34.72	4.13	38.6	100	325	Peak
5724.52	62.17	-16.13	78.3	61.93	34.73	4.15	38.64	100	325	Peak

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5714.68	56.46	-11.84	68.3	56.21	34.72	4.13	38.6	200	10	Peak
5724.76	63.66	-14.64	78.3	63.42	34.73	4.15	38.64	200	10	Peak

Remark:

- 5714.6/5714.68 MHz is not within a restricted band, and satisfies 68.3 dBμV /m peak emission limit.
- 5724.52/5724.76 MHz is not within a restricted band, and satisfies 78.3 dBμV /m peak emission limit.

Test Mode :	802.11a – Chain Port 0	Temperature :	23~24°C
Test Channel :	165	Relative Humidity :	43~44%
Test Engineer :	Stone Gu		

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5850.16	59.53	-18.77	78.3	59.4	34.81	4.24	38.92	100	328	Peak
5863.84	57.21	-11.09	68.3	57.11	34.82	4.24	38.96	100	328	Peak

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5851.52	57.99	-20.31	78.3	57.86	34.81	4.24	38.92	152	0	Peak
5863.04	54.85	-13.45	68.3	54.75	34.82	4.24	38.96	152	0	Peak

Remark:

- 5863.84/5863.04MHz is not within a restricted band, and satisfies 68.3 dBμV /m peak emission limit.
- 5850.16/5851.52 MHz is not within a restricted band, and satisfies 78.3 dBμV /m peak emission limit.



Test Mode :	802.11a – Chain Port 1	Temperature :	23~24°C
Test Channel :	149	Relative Humidity :	43~44%
Test Engineer :	Stone Gu		

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5713.32	56.59	-11.71	68.3	56.34	34.72	4.13	38.6	125	120	Peak
5724.52	66.67	-11.63	78.3	66.43	34.73	4.15	38.64	125	120	Peak

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5714.92	59.69	-8.61	68.3	59.44	34.72	4.13	38.6	118	336	Peak
5725	70.02	-8.28	78.3	69.78	34.73	4.15	38.64	118	336	Peak

**Remark:**

- 5713.32/5714.92 MHz is not within a restricted band, and satisfies 68.3 dBμV /m peak emission limit.
- 5724.52/5725 MHz is not within a restricted band, and satisfies 78.3 dBμV /m peak emission limit.

Test Mode :	802.11a – Chain Port 1	Temperature :	23~24°C
Test Channel :	165	Relative Humidity :	43~44%
Test Engineer :	Stone Gu		

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5850.8	54.46	-23.84	78.3	54.33	34.81	4.24	38.92	100	120	Peak
5865.12	53.24	-15.06	68.3	53.14	34.82	4.24	38.96	100	120	Peak

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5850.96	57.15	-21.15	78.3	57.02	34.81	4.24	38.92	104	299	Peak
5878	54.14	-14.16	68.3	54.06	34.83	4.24	38.99	104	299	Peak

**Remark:**

- 5865.12/5878 MHz is not within a restricted band, and satisfies 68.3 dBμV /m peak emission limit.
- 5850.8/5850.96 MHz is not within a restricted band, and satisfies 78.3 dBμV /m peak emission limit.



Test Mode :	802.11n HT20 – Chain Port 0+1	Temperature :	23~24°C
Test Channel :	149	Relative Humidity :	43~44%
Test Engineer :	Stone Gu		

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5714.5	58.14	-10.16	68.3	57.89	34.72	4.13	38.6	103	337	Peak
5724.92	66.55	-11.75	78.3	66.31	34.73	4.15	38.64	103	337	Peak

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5711.8	52.42	-15.88	68.3	52.17	34.72	4.13	38.6	100	61	Peak
5723.32	60.53	-17.77	78.3	60.29	34.73	4.15	38.64	100	61	Peak

Remark:

- 5714.5/5711.8 MHz is not within a restricted band, and satisfies 68.3 dBμV /m peak emission limit.
- 5724.92/5723.32 MHz is not within a restricted band, and satisfies 78.3 dBμV /m peak emission limit.

Test Mode :	802.11n HT20 – Chain Port 0+1	Temperature :	23~24°C
Test Channel :	165	Relative Humidity :	43~44%
Test Engineer :	Stone Gu		

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5850.72	59.94	-18.36	78.3	59.81	34.81	4.24	38.92	100	327	Peak
5862.48	54.61	-13.69	68.3	54.51	34.82	4.24	38.96	100	327	Peak

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5850.72	58.82	-19.48	78.3	58.69	34.81	4.24	38.92	200	0	Peak
5861.84	52.88	-15.42	68.3	52.78	34.82	4.24	38.96	200	0	Peak

Remark:

- 5862.48/5861.84 MHz is not within a restricted band, and satisfies 68.3 dBμV /m peak emission limit.
- 5850.72 MHz is not within a restricted band, and satisfies 78.3 dBμV /m peak emission limit.



Test Mode :	802.11n HT40 – Chain Port 0+1	Temperature :	23~24°C
Test Channel :	151	Relative Humidity :	43~44%
Test Engineer :	Stone Gu		

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5714.44	61.6	-6.7	68.3	61.35	34.72	4.13	38.6	100	328	Peak
5725	65.99	-12.31	78.3	65.75	34.73	4.15	38.64	100	328	Peak

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5714.04	60.81	-7.49	68.3	60.56	34.72	4.13	38.6	200	0	Peak
5724.76	65.41	-12.89	78.3	65.17	34.73	4.15	38.64	200	0	Peak

Remark:

- 5714.44/5714.04 MHz is not within a restricted band, and satisfies 68.3 dBμV / m peak emission limit.
- 5725/5724.76 MHz is not within a restricted band, and satisfies 78.3 dBμV / m peak emission limit.

Test Mode :	802.11n HT40 – Chain Port 0+1	Temperature :	23~24°C
Test Channel :	159	Relative Humidity :	43~44%
Test Engineer :	Stone Gu		

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5850.72	56.96	-21.34	78.3	56.83	34.81	4.24	38.92	100	324	Peak
5865.92	52.93	-15.37	68.3	52.83	34.82	4.24	38.96	100	324	Peak

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5850.08	56.86	-21.44	78.3	56.73	34.81	4.24	38.92	200	0	Peak
5862.32	51.24	-17.06	68.3	51.14	34.82	4.24	38.96	200	0	Peak

Remark:

- 5865.92/5862.32 MHz is not within a restricted band, and satisfies 68.3 dBμV / m peak emission limit.
- 5850.72/5850.08 MHz is not within a restricted band, and satisfies 78.3 dBμV / m peak emission limit.



<Sample 2>

Test Mode :	802.11n HT40 – Chain Port 0+1	Temperature :	23~24°C
Test Channel :	151	Relative Humidity :	43~44%
Test Engineer :	Stone Gu		

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5713.24	60.05	-8.25	68.3	59.8	34.72	4.13	38.6	100	100	Peak
5724.76	64.25	-14.05	78.3	64.01	34.73	4.15	38.64	100	100	Peak

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5713.56	61.45	-6.85	68.3	61.2	34.72	4.13	38.6	142	186	Peak
5722.6	64.75	-13.55	78.3	64.51	34.73	4.15	38.64	142	186	Peak

Remark:

1. 5713.24/5713.56 MHz is not within a restricted band, and satisfies 68.3 dBμV /m peak emission limit.
2. 5724.76/5722.6 MHz is not within a restricted band, and satisfies 78.3 dBμV /m peak emission limit.





3.4.7 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic)

<Sample 1>

<b>Test Mode :</b>	802.11a – Chain Port 0	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	149	<b>Relative Humidity :</b>	43~44%
<b>Test Engineer :</b>	Stone Gu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 5745 MHz is fundamental signal which can be ignored. 2. 5826 MHz is not within a restricted band and satisfies 68.3 dB $\mu$ V /m peak emission limit. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dB $\mu$ V/m )	Over Limit ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5745	104.44	-	-	104.2	34.74	4.18	38.68	100	325	Peak
5745	92.3	-	-	92.06	34.74	4.18	38.68	100	325	Average
5826	60.46	-7.84	68.3	60.29	34.8	4.25	38.88	100	269	Peak
11490	33.19	-40.81	74	58.76	4.47	6.32	36.36	101	25	Peak

<b>Test Mode :</b>	802.11a – Chain Port 0	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	149	<b>Relative Humidity :</b>	43~44%
<b>Test Engineer :</b>	Stone Gu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 5745 MHz is fundamental signal which can be ignored. 2. 5664 MHz is not within a restricted band and satisfies 68.3 dB $\mu$ V /m peak emission limit. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dB $\mu$ V/m )	Over Limit ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5664	58.84	-9.46	68.3	58.55	34.69	4.07	38.47	191	0	Peak
5745	102.21	-	-	101.97	34.74	4.18	38.68	200	20	Peak
5745	90.33	-	-	90.09	34.74	4.18	38.68	200	20	Average
11490	31.55	-42.45	74	57.12	4.47	6.32	36.36	157	247	Peak



<b>Test Mode :</b>	802.11a – Chain Port 0	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	157	<b>Relative Humidity :</b>	43~44%
<b>Test Engineer :</b>	Stone Gu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	<ol style="list-style-type: none"> <li>5785 MHz is fundamental signal which can be ignored.</li> <li>5868 MHz is not within a restricted band and satisfies 68.3 dB<math>\mu</math>V /m peak emission limit.</li> <li>Average measurement was not performed if peak level went lower than the average limit.</li> </ol>		

Frequency ( MHz )	Level ( dB $\mu$ V/m )	Over Limit ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5785	104.49	-	-	104.25	34.77	4.24	38.77	100	327	Peak
5785	92.41	-	-	92.17	34.77	4.24	38.77	100	327	Average
5868	59.8	-8.5	68.3	59.7	34.82	4.24	38.96	100	329	Peak
11571	32.52	-41.48	74	57.89	4.38	6.35	36.1	100	247	Peak

<b>Test Mode :</b>	802.11a – Chain Port 0	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	157	<b>Relative Humidity :</b>	43~44%
<b>Test Engineer :</b>	Stone Gu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	<ol style="list-style-type: none"> <li>5785 MHz is fundamental signal which can be ignored.</li> <li>5700 MHz is not within a restricted band and satisfies 68.3 dB<math>\mu</math>V /m peak emission limit.</li> <li>Average measurement was not performed if peak level went lower than the average limit.</li> </ol>		

Frequency ( MHz )	Level ( dB $\mu$ V/m )	Over Limit ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5700	59.19	-9.11	68.3	58.9	34.71	4.13	38.55	115	349	Peak
5785	101.79	-	-	101.55	34.77	4.24	38.77	103	339	Peak
5785	88.49	-	-	88.25	34.77	4.24	38.77	103	339	Average
11571	31.87	-42.13	74	57.24	4.38	6.35	36.1	100	268	Peak



<b>Test Mode :</b>	802.11a – Chain Port 0	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	165	<b>Relative Humidity :</b>	43~44%
<b>Test Engineer :</b>	Stone Gu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 5825 MHz is fundamental signal which can be ignored. 2. 5908 MHz is not within a restricted band and satisfies 68.3 dB $\mu$ V /m peak emission limit. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dB $\mu$ V/m )	Over Limit ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5825	102.96	-	-	102.78	34.8	4.26	38.88	100	328	Peak
5825	91.97	-	-	91.79	34.8	4.26	38.88	100	328	Average
5908	60.32	-7.98	68.3	60.32	34.85	4.22	39.07	101	250	Peak
11649	34.26	-39.74	74	59.56	4.2	6.38	35.88	125	302	Peak

<b>Test Mode :</b>	802.11a – Chain Port 0	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	165	<b>Relative Humidity :</b>	43~44%
<b>Test Engineer :</b>	Stone Gu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 5825 MHz is fundamental signal which can be ignored. 2. 5746 MHz is not within a restricted band and satisfies 68.3 dB $\mu$ V /m peak emission limit. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dB $\mu$ V/m )	Over Limit ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5746	59.7	-8.6	68.3	59.46	34.74	4.18	38.68	152	35	Peak
5825	102.34	-	-	102.16	34.8	4.26	38.88	152	0	Peak
5825	90.21	-	-	90.03	34.8	4.26	38.88	152	0	Average
11649	33.86	-40.14	74	59.16	4.2	6.38	35.88	144	53	Peak



<b>Test Mode :</b>	802.11a – Chain Port 1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	149	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Star Wei	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	<ol style="list-style-type: none"> <li>5745 MHz is fundamental signal which can be ignored.</li> <li>5830 MHz is not within a restricted band and satisfies 68.3 dB<math>\mu</math>V /m peak emission limit.</li> <li>Average measurement was not performed if peak level went lower than the average limit.</li> </ol>		

Frequency ( MHz )	Level ( dB $\mu$ V/m )	Over Limit ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5745	98.67	-	-	98.43	34.74	4.18	38.68	125	120	Peak
5745	88.05	-	-	87.81	34.74	4.18	38.68	125	120	Average
5830	57.48	-10.82	68.3	57.31	34.8	4.25	38.88	106	245	Peak
11490	31.27	-42.73	74	56.84	4.47	6.32	36.36	131	220	Peak

<b>Test Mode :</b>	802.11a – Chain Port 1	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	149	<b>Relative Humidity :</b>	43~44%
<b>Test Engineer :</b>	Stone Gu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	<ol style="list-style-type: none"> <li>5745 MHz is fundamental signal which can be ignored.</li> <li>5528/5662/5826/5958 MHz is not within a restricted band and satisfies 68.3 dB<math>\mu</math>V /m peak emission limit.</li> <li>Average measurement was not performed if peak level went lower than the average limit.</li> </ol>		

Frequency ( MHz )	Level ( dB $\mu$ V/m )	Over Limit ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5528	58.24	-10.06	68.3	58.44	34.61	3.98	38.79	125	34	Peak
5662	57.06	-11.24	68.3	56.8	34.69	4.04	38.47	100	221	Peak
5745	102.43	-	-	102.19	34.74	4.18	38.68	118	336	Peak
5745	90.54	-	-	90.3	34.74	4.18	38.68	118	336	Average
5826	56.99	-11.31	68.3	56.82	34.8	4.25	38.88	100	0	Peak
5958	57.03	-11.27	68.3	57.13	34.88	4.2	39.18	113	25	Peak
11490	31.55	-42.45	74	57.12	4.47	6.32	36.36	100	78	Peak



<b>Test Mode :</b>	802.11a – Chain Port 1	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	157	<b>Relative Humidity :</b>	43~44%
<b>Test Engineer :</b>	Stone Gu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 5785 MHz is fundamental signal which can be ignored. 2. 5704 MHz is not within a restricted band and satisfies 68.3 dB $\mu$ V /m peak emission limit. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dB $\mu$ V/m )	Over Limit ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5704	56.5	-11.8	68.3	56.25	34.72	4.13	38.6	123	111	Peak
5785	100.13	-	-	99.89	34.77	4.24	38.77	110	119	Peak
5785	88.7	-	-	88.46	34.77	4.24	38.77	110	119	Average
11571	32.48	-41.52	74	57.85	4.38	6.35	36.1	105	289	Peak

<b>Test Mode :</b>	802.11a – Chain Port 1	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	157	<b>Relative Humidity :</b>	43~44%
<b>Test Engineer :</b>	Stone Gu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 5785 MHz is fundamental signal which can be ignored. 2. 5862 MHz is not within a restricted band and satisfies 68.3 dB $\mu$ V /m peak emission limit. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dB $\mu$ V/m )	Over Limit ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5785	102.55	-	-	102.31	34.77	4.24	38.77	102	271	Peak
5785	90.85	-	-	90.61	34.77	4.24	38.77	102	271	Average
5862	58.66	-9.64	68.3	58.56	34.82	4.24	38.96	112	342	Peak
11571	31.38	-42.62	74	56.75	4.38	6.35	36.1	100	0	Peak



<b>Test Mode :</b>	802.11a – Chain Port 1	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	165	<b>Relative Humidity :</b>	43~44%
<b>Test Engineer :</b>	Stone Gu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	<ol style="list-style-type: none"> <li>5825 MHz is fundamental signal which can be ignored.</li> <li>5902 MHz is not within a restricted band and satisfies 68.3 dB<math>\mu</math>V /m peak emission limit.</li> <li>Average measurement was not performed if peak level went lower than the average limit.</li> </ol>		

Frequency ( MHz )	Level ( dB $\mu$ V/m )	Over Limit ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5825	97.49	-	-	97.31	34.8	4.26	38.88	100	120	Peak
5825	85.07	-	-	84.89	34.8	4.26	38.88	100	120	Average
5902	57.38	-10.92	68.3	57.35	34.84	4.22	39.03	100	220	Peak
11649	32.68	-41.32	74	57.98	4.2	6.38	35.88	190	324	Peak

<b>Test Mode :</b>	802.11a – Chain Port 1	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	165	<b>Relative Humidity :</b>	43~44%
<b>Test Engineer :</b>	Stone Gu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	<ol style="list-style-type: none"> <li>5825 MHz is fundamental signal which can be ignored.</li> <li>5910 MHz is not within a restricted band and satisfies 68.3 dB<math>\mu</math>V /m peak emission limit.</li> <li>Average measurement was not performed if peak level went lower than the average limit.</li> </ol>		

Frequency ( MHz )	Level ( dB $\mu$ V/m )	Over Limit ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5825	102.17	-	-	101.99	34.8	4.26	38.88	102	280	Peak
5825	88.71	-	-	88.53	34.8	4.26	38.88	102	280	Average
5910	60.78	-7.52	68.3	60.78	34.85	4.22	39.07	102	290	Peak
11649	35.71	-38.29	74	61.01	4.2	6.38	35.88	100	321	Peak



<b>Test Mode :</b>	802.11n HT20 – Chain Port 0+1	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	149	<b>Relative Humidity :</b>	43~44%
<b>Test Engineer :</b>	Stone Gu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 5745 MHz is fundamental signal which can be ignored. 2. 5828 MHz is not within a restricted band and satisfies 68.3 dB $\mu$ V /m peak emission limit. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dB $\mu$ V/m )	Over Limit ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5745	104.16	-	-	103.92	34.74	4.18	38.68	103	337	Peak
5745	93.91	-	-	93.67	34.74	4.18	38.68	103	337	Average
5828	57.57	-10.73	68.3	57.4	34.8	4.25	38.88	125	98	Peak
11490	34.02	-39.98	74	59.59	4.47	6.32	36.36	101	224	Peak

<b>Test Mode :</b>	802.11n HT20 – Chain Port 0+1	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	149	<b>Relative Humidity :</b>	43~44%
<b>Test Engineer :</b>	Stone Gu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 5745 MHz is fundamental signal which can be ignored. 2. 5660 MHz is not within a restricted band and satisfies 68.3 dB $\mu$ V /m peak emission limit. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dB $\mu$ V/m )	Over Limit ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5660	57.36	-10.94	68.3	57.1	34.69	4.04	38.47	178	32	Peak
5745	99.57	-	-	99.33	34.74	4.18	38.68	100	61	Peak
5745	87.65	-	-	87.41	34.74	4.18	38.68	100	61	Average
11490	31.22	-42.78	74	56.79	4.47	6.32	36.36	116	102	Peak



<b>Test Mode :</b>	802.11n HT20 – Chain Port 0+1	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	157	<b>Relative Humidity :</b>	43~44%
<b>Test Engineer :</b>	Stone Gu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	<ol style="list-style-type: none"> <li>5785 MHz is fundamental signal which can be ignored.</li> <li>5706 MHz is not within a restricted band and satisfies 68.3 dB<math>\mu</math>V /m peak emission limit.</li> <li>Average measurement was not performed if peak level went lower than the average limit.</li> </ol>		

Frequency ( MHz )	Level ( dB $\mu$ V/m )	Over Limit ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5706	56.68	-11.62	68.3	56.43	34.72	4.13	38.6	100	223	Peak
5785	101.56	-	-	101.32	34.77	4.24	38.77	100	330	Peak
5785	91.8	-	-	91.56	34.77	4.24	38.77	100	330	Average
11571	31.14	-42.86	74	56.51	4.38	6.35	36.1	102	35	Peak

<b>Test Mode :</b>	802.11n HT20 – Chain Port 0+1	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	157	<b>Relative Humidity :</b>	43~44%
<b>Test Engineer :</b>	Stone Gu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	<ol style="list-style-type: none"> <li>5785 MHz is fundamental signal which can be ignored.</li> <li>5702 MHz is not within a restricted band and satisfies 68.3 dB<math>\mu</math>V /m peak emission limit.</li> <li>Average measurement was not performed if peak level went lower than the average limit.</li> </ol>		

Frequency ( MHz )	Level ( dB $\mu$ V/m )	Over Limit ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5702	57.94	-10.36	68.3	57.69	34.72	4.13	38.6	106	26	Peak
5785	100.71	-	-	100.47	34.77	4.24	38.77	200	0	Peak
5785	90.86	-	-	90.62	34.77	4.24	38.77	200	0	Average
11571	30.97	-43.03	74	56.34	4.38	6.35	36.1	124	15	Peak





<b>Test Mode :</b>	802.11n HT20 – Chain Port 0+1	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	165	<b>Relative Humidity :</b>	43~44%
<b>Test Engineer :</b>	Stone Gu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 5825 MHz is fundamental signal which can be ignored. 2. 5606/5748/5906/6042 MHz is not within a restricted band and satisfies 68.3 dB $\mu$ V /m peak emission limit. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dB $\mu$ V/m )	Over Limit ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5394	53.79	-20.21	74	54.64	34.44	4.02	39.31	125	10	Peak
5394	41.83	-12.17	54	42.68	34.44	4.02	39.31	125	10	Average
5606	55.76	-12.54	68.3	55.48	34.66	3.96	38.34	100	235	Peak
5748	57.23	-11.07	68.3	56.99	34.74	4.18	38.68	112	153	Peak
5825	102.37	-	-	102.19	34.8	4.26	38.88	100	327	Peak
5825	90.26	-	-	90.08	34.8	4.26	38.88	100	327	Average
5906	57.06	-11.24	68.3	57.06	34.85	4.22	39.07	165	221	Peak
6042	54.21	-14.09	68.3	54.19	34.95	4.18	39.11	100	0	Peak
11649	35.72	-38.28	74	61.02	4.2	6.38	35.88	100	23	Peak



<b>Test Mode :</b>	802.11n HT20 – Chain Port 0+1	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	165	<b>Relative Humidity :</b>	43~44%
<b>Test Engineer :</b>	Stone Gu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 5825 MHz is fundamental signal which can be ignored. 2. 5606/5742/5902/6038 MHz is not within a restricted band and satisfies 68.3 dB $\mu$ V /m peak emission limit. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dB $\mu$ V/m )	Over Limit ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5396	52.28	-21.72	74	53.21	34.46	4.03	39.42	200	0	Peak
5396	40.46	-13.54	54	41.39	34.46	4.03	39.42	200	0	Average
5606	54.9	-13.4	68.3	54.62	34.66	3.96	38.34	123	145	Peak
5742	57.01	-11.29	68.3	56.77	34.74	4.18	38.68	156	312	Peak
5825	101.1	-	-	100.92	34.8	4.26	38.88	200	0	Peak
5825	89.59	-	-	89.41	34.8	4.26	38.88	200	0	Average
5902	55.44	-12.86	68.3	55.41	34.84	4.22	39.03	156	89	Peak
6038	54.67	-13.63	68.3	54.72	34.93	4.18	39.16	189	201	Peak
11649	32.72	-41.28	74	58.02	4.2	6.38	35.88	187	332	Peak



<b>Test Mode :</b>	802.11n HT40 – Chain Port 0+1	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	151	<b>Relative Humidity :</b>	43~44%
<b>Test Engineer :</b>	Stone Gu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 5755 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
119.24	32.44	-11.06	43.5	52.62	11.88	0.58	32.64	100	184	Peak
239.52	29.39	-16.61	46	50.18	10.85	0.84	32.48	-	-	Peak
359.8	27.96	-18.04	46	44.71	14.7	0.9	32.35	-	-	Peak
608.12	23.93	-22.07	46	35.93	18.84	1.18	32.02	-	-	Peak
720.64	22.96	-23.04	46	34.06	19.55	1.35	32	-	-	Peak
960.23	28.3	-25.7	54	37.53	20.76	1.72	31.71	-	-	Peak
5755	98.33	-	-	98.08	34.76	4.21	38.72	100	328	Peak
5755	85.54	-	-	85.29	34.76	4.21	38.72	100	328	Average
11511	32.04	-41.96	74	57.49	4.53	6.33	36.31	124	12	Peak



<b>Test Mode :</b>	802.11n HT40 – Chain Port 0+1	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	151	<b>Relative Humidity :</b>	43~44%
<b>Test Engineer :</b>	Stone Gu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 5755 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
44.55	36.96	-3.04	40	59.12	10.2	0.31	32.67	100	59	QP
101.78	30.03	-13.47	43.5	51.33	10.9	0.43	32.63	-	-	Peak
304.51	21.64	-24.36	46	40.06	13.16	0.81	32.39	-	-	Peak
456.8	29.63	-16.37	46	44	16.58	1.21	32.16	-	-	Peak
608.12	23.87	-22.13	46	35.87	18.84	1.18	32.02	-	-	Peak
939.86	24.89	-21.11	46	34.36	20.56	1.72	31.75	-	-	Peak
5755	96.01	-	-	95.76	34.76	4.21	38.72	200	0	Peak
5755	85.25	-	-	85	34.76	4.21	38.72	200	0	Average
11511	31.99	-42.01	74	57.44	4.53	6.33	36.31	184	231	Peak



<b>Test Mode :</b>	802.11n HT40 – Chain Port 0+1	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	159	<b>Relative Humidity :</b>	43~44%
<b>Test Engineer :</b>	Stone Gu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 5795 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5795	98.36	-	-	98.12	34.78	4.27	38.81	100	326	Peak
5795	86.46	-	-	86.22	34.78	4.27	38.81	100	326	Average
11589	33.24	-40.76	74	58.6	4.34	6.35	36.05	147	231	Peak

<b>Test Mode :</b>	802.11n HT40 – Chain Port 0+1	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	159	<b>Relative Humidity :</b>	43~44%
<b>Test Engineer :</b>	Stone Gu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 5795 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5795	97.22	-	-	96.98	34.78	4.27	38.81	155	0	Peak
5795	85.37	-	-	85.13	34.78	4.27	38.81	155	0	Average
11589	32.25	-41.75	74	57.61	4.34	6.35	36.05	102	234	Peak



<Sample 2>

<b>Test Mode :</b>	802.11n HT40 – Chain Port 0+1	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	151	<b>Relative Humidity :</b>	43~44%
<b>Test Engineer :</b>	Stone Gu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 5755 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5755	95.47	-	-	95.22	34.76	4.21	38.72	100	86	Peak
5755	83.95	-	-	83.7	34.76	4.21	38.72	100	86	Average
11510	33.26	-40.74	74	58.71	4.53	6.33	36.31	145	221	Peak

<b>Test Mode :</b>	802.11n HT40 – Chain Port 0+1	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	151	<b>Relative Humidity :</b>	43~44%
<b>Test Engineer :</b>	Stone Gu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 5755 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5755	96.96	-	-	96.71	34.76	4.21	38.72	142	185	Peak
5755	85.22	-	-	84.97	34.76	4.21	38.72	142	185	Average
11510	32.49	-41.51	74	57.94	4.53	6.33	36.31	100	236	Peak

### 3.5 AC Conducted Emission Measurement

#### 3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

### 3.5.4 Test Setup

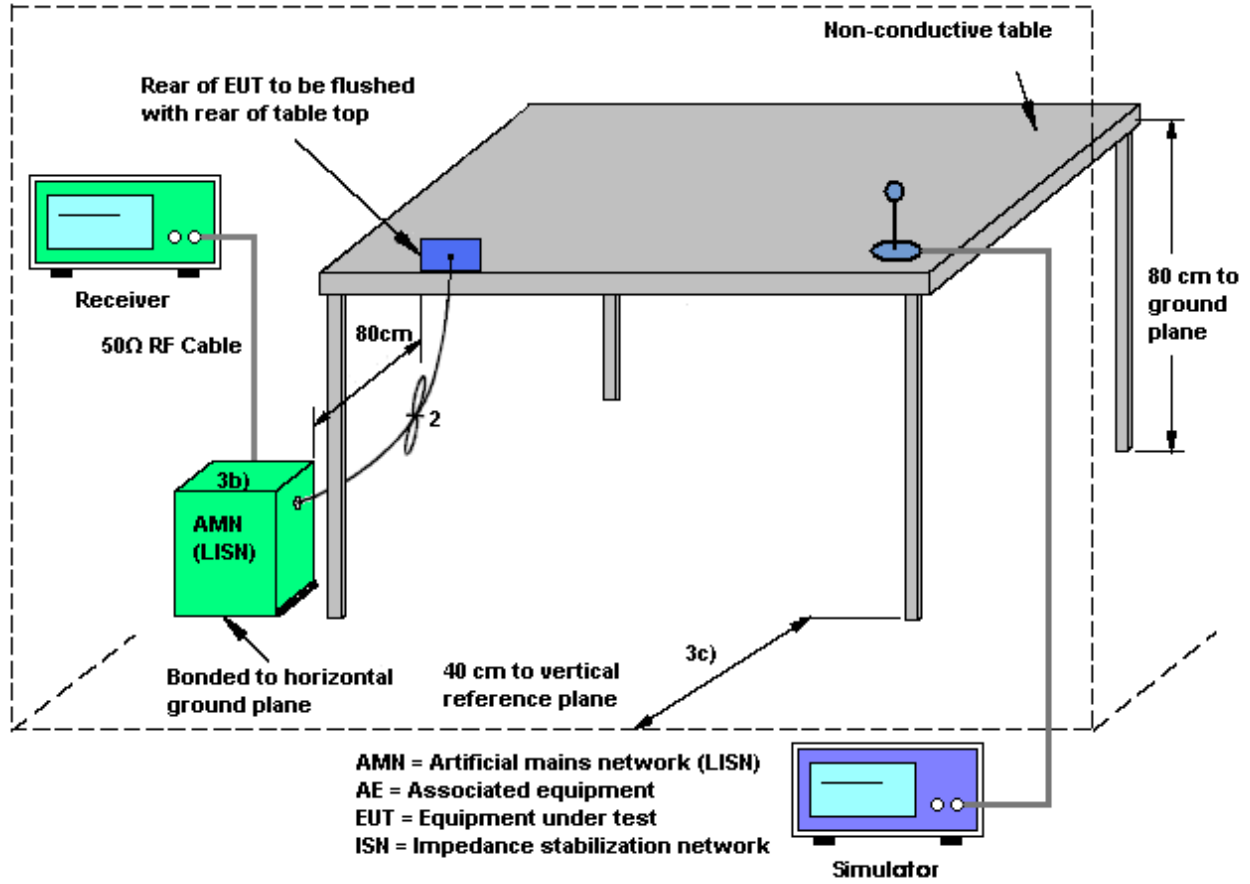






3.5.5 Test Result of AC Conducted Emission

Test Mode :	Mode 2	Temperature :	22~24°C
Test Engineer :	Eligah Wang	Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Link + WLAN (5G) Link + USB Cable 2 (Charging from Adapter 2) + Earphone + Battery 2 for Sample 2		

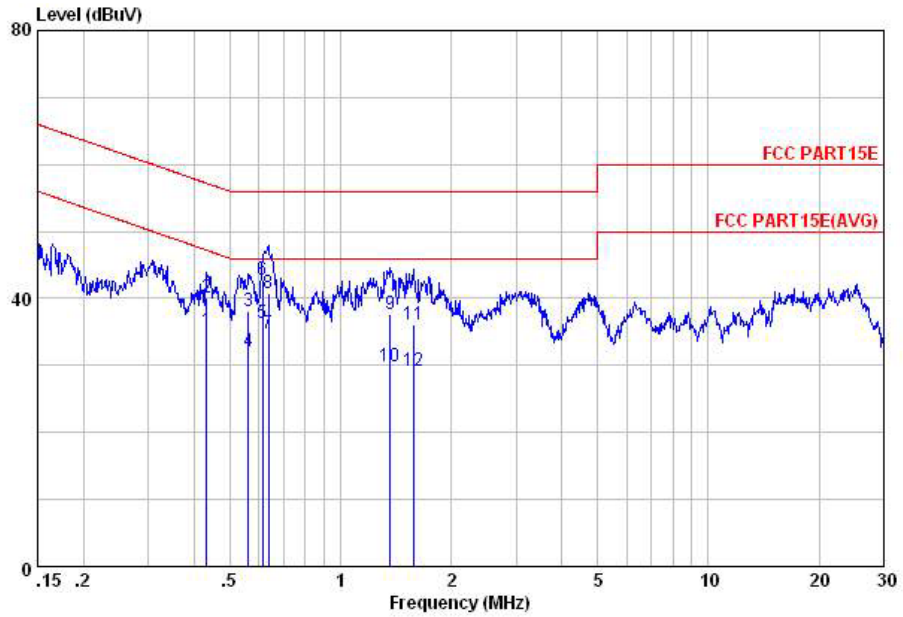


Site : C001-KS  
 Condition: FCC PART15E LISN-L20130306 LINE

mode : Mode 2

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.43	35.14	-12.06	47.20	24.59	0.27	10.28	Average
2	0.43	40.14	-17.06	57.20	29.59	0.27	10.28	QP
3	0.56	38.05	-17.95	56.00	27.60	0.20	10.25	QP
4	0.56	32.05	-13.95	46.00	21.60	0.20	10.25	Average
5	0.61	36.34	-9.66	46.00	25.90	0.20	10.24	Average
6	0.61	42.74	-13.26	56.00	32.30	0.20	10.24	QP
7	0.64	34.73	-11.27	46.00	24.30	0.20	10.23	Average
8	0.64	40.73	-15.27	56.00	30.30	0.20	10.23	QP
9	1.37	37.58	-18.42	56.00	27.30	0.10	10.18	QP
10	1.37	29.88	-16.12	46.00	19.60	0.10	10.18	Average
11	1.59	36.19	-19.81	56.00	25.90	0.10	10.19	QP
12	1.59	29.19	-16.81	46.00	18.90	0.10	10.19	Average



Test Mode :	Mode 2	Temperature :	22~24°C
Test Engineer :	Eligah Wang	Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Link + WLAN (5G) Link + USB Cable 2 (Charging from Adapter 2) + Earphone + Battery 2 for Sample 2		

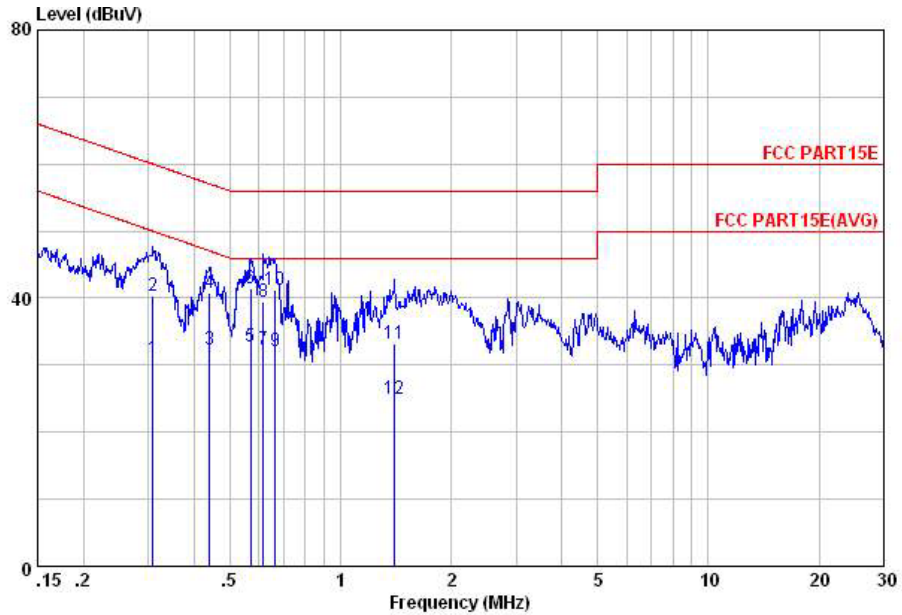

Site : C001-KS  
 Condition: FCC PART15E LISN-N20130306 NEUTRAL

mode : Mode 2

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.31	30.96	-19.06	50.02	19.90	0.69	10.37	Average
2	0.31	40.36	-19.66	60.02	29.30	0.69	10.37	QP
3	0.44	32.23	-14.84	47.07	21.61	0.35	10.27	Average
4	0.44	40.73	-16.34	57.07	30.11	0.35	10.27	QP
5	0.57	32.81	-13.19	46.00	22.29	0.27	10.25	Average
6	0.57	41.41	-14.59	56.00	30.89	0.27	10.25	QP
7	0.62	32.37	-13.63	46.00	21.90	0.23	10.24	Average
8	0.62	39.37	-16.63	56.00	28.90	0.23	10.24	QP
9	0.66	32.03	-13.97	46.00	21.60	0.21	10.22	Average
10	0.66	41.23	-14.77	56.00	30.80	0.21	10.22	QP
11	1.40	33.18	-22.82	56.00	22.90	0.10	10.18	QP
12	1.40	24.88	-21.12	46.00	14.60	0.10	10.18	Average

## 3.6 Frequency Stability Measurement

### 3.6.1 Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.


### 3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.6.3 Test Procedures

1. To ensure emission at the band edge is maintained within the authorized band, those values shall be measured by radiation emissions at upper and lower frequency points, and finally compensated by frequency deviation as procedures below.
2. The EUT was operated at the maximum output power, and connected to the spectrum analyzer, which is set to maximum hold function and peak detector. The peak value of the power envelope was measured and noted. The upper and lower frequency points were respectively measured relatively 10dB lower than the measured peak value.
3. The frequency deviation was calculated by adding the upper frequency point and the lower frequency point divided by two. Those detailed values of frequency deviation are provided in table below.

### 3.6.4 Test Setup

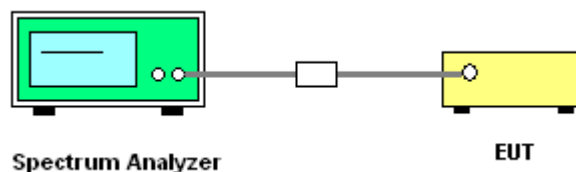



### 3.6.5 Test Result of Frequency Stability

Test Band :	5GHz band 4	Test Engineer :	Issac Song
-------------	-------------	-----------------	------------

Mod.	Data Rate	N <sub>TX</sub>	Channel	Freq. (MHz)	Center Frequency (MHz)	Frequency Deviation (MHz)	Frequency Stability (ppm)	Temperature (°C)	Voltage (V)
11a	6Mbps	1	149	5745	5744.800	-0.200	-34.81	20	3.6
11a	6Mbps	1	149	5745	5744.950	-0.050	-8.70	20	4.35
11a	6Mbps	1	149	5745	5744.750	-0.250	-43.52	20	3.75
11a	6Mbps	1	149	5745	5744.975	-0.025	-4.35	-10	3.75
11a	6Mbps	1	149	5745	5744.750	-0.250	-43.52	50	3.75

Note: Center Frequency = (Low Frequency + High Frequency) / 2.



## **3.7 Automatically Discontinue Transmission**

### **3.7.1 Limit of Automatically Discontinue Transmission**

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

### **3.7.2 Measuring Instruments**

The measuring equipment is listed in the section 4 of this test report.

### **3.7.3 Test Result of Automatically Discontinue Transmission**

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

### 3.8 Antenna Requirements

#### 3.8.1 Standard Applicable

According to FCC 47 CFR Section 15.407(a)(1)(2) ,if transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 3.8.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

#### 3.8.3 Antenna Gain

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

$$DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

where

Each antenna is driven by no more than one spatial stream;

$N_{SS}$  = the number of independent spatial streams of data;

$N_{ANT}$  = the total number of antennas

$g_{j,k} = 10^{G_k / 20}$  if the  $k$ th antenna is being fed by spatial stream  $j$ , or zero if it is not;

$G_k$  is the gain in dBi of the  $k$ th antenna.

The EUT supports CDD mode.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain “DG” is calculated as following table.



	Chain Port 0 (dBi)	Chain Port 1 (dBi)	DG for Power (dBi)	DG for PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
<b>Band IV</b>	0.50	0.00	3.26	3.26	0.00	0.00

*Power Limit Reduction = DG(Power) – 6dBi, ( min = 0 )*

*PSD Limit Reduction = DG(PSD) – 6dBi, ( min = 0 )*



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Dec. 28, 2013	Jul. 14, 2014	Dec. 27, 2014	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	30MHz~40GHz	Feb. 27, 2014	Jul. 14, 2014	Feb. 26, 2015	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Feb. 27, 2014	Jul. 14, 2014	Feb. 26, 2015	Conducted (TH01-KS)
Thermal Chamber	Ten Billion	TTC-B3S	TBN-960502	-40~+150°C	Dec. 10, 2013	Jul. 14, 2014	Dec. 09, 2014	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESCI	100534	9kHz~3GHz	Nov. 05, 2013	Jul. 29, 2014	Nov. 04, 2014	Radiation (03CH01-KS)
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Dec. 28, 2013	Jul. 29, 2014	Dec. 27, 2014	Radiation (03CH01-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 09, 2013	Jul. 29, 2014	Oct. 08, 2014	Radiation (03CH01-KS)
Bilog Antenna	SCHAFFNER	CBL6112D	23182	25MHz~2GHz	Jan. 08, 2014	Jul. 29, 2014	Jan. 07, 2015	Radiation (03CH01-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75959	1GHz~18GHz	Jan. 08, 2014	Jul. 29, 2014	Jan. 07, 2015	Radiation (03CH01-KS)
Active Horn Antenna	com-power	AHA-118	701030	1GHz~18GHz	Nov. 18, 2013	Jul. 29, 2014	Nov. 17, 2014	Radiation (03CH01-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA170249	15GHz~40GHz	Mar. 10, 2014	Jul. 29, 2014	Mar. 09, 2015	Radiation (03CH01-KS)
Amplifier	com-power	PA-103A	161073	1MHz~1GHz	May 04, 2014	Jul. 29, 2014	May 03, 2015	Radiation (03CH01-KS)
Amplifier	Agilent	8449B	3008A02371	1GHz~26.5GHz	Dec. 10, 2013	Jul. 29, 2014	Dec. 09, 2014	Radiation (03CH01-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Jul. 29, 2014	NCR	Radiation (03CH01-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Jul. 29, 2014	NCR	Radiation (03CH01-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Jul. 29, 2014	NCR	Radiation (03CH01-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	May 04, 2014	Jul. 30, 2014	May 03, 2015	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Dec. 10, 2013	Jul. 30, 2014	Dec. 09, 2014	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Dec. 10, 2013	Jul. 30, 2014	Dec. 09, 2014	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Nov. 12, 2013	Jul. 30, 2014	Nov. 11, 2014	Conduction (CO01-KS)





## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.3
---	-----

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.5
---	-----