

FCC SAR Test Report

APPLICANT : Lenovo(Shanghai) Electronics
Technology Co., Ltd.
EQUIPMENT : Portable Tablet Computer
BRAND NAME : Lenovo
MODEL NAME : Lenovo YT3-X90L
FCC ID : O57YT3X90L
STANDARD : FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2013

We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and had been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.



Prepared by: Mark Qu / Manager



Approved by: Jones Tsai / Manager

SPORTON INTERNATIONAL (KUNSHAN) INC.
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China



Table of Contents

1. Statement of Compliance 4

2. Administration Data 5

3. Guidance Standard 5

4. Equipment Under Test (EUT) Information 6

 4.1 General Information 6

 4.2 General LTE SAR Test and Reporting Considerations 7

5. Proximity Sensor Triggering Test 9

6. RF Exposure Limits 16

 6.1 Uncontrolled Environment 16

 6.2 Controlled Environment 16

7. Specific Absorption Rate (SAR) 17

 7.1 Introduction 17

 7.2 SAR Definition 17

8. System Description and Setup 18

 8.1 E-Field Probe 19

 8.2 Data Acquisition Electronics (DAE) 19

 8.3 Phantom 20

 8.4 Device Holder 21

9. Measurement Procedures 22

 9.1 Spatial Peak SAR Evaluation 22

 9.2 Power Reference Measurement 23

 9.3 Area Scan 23

 9.4 Zoom Scan 24

 9.5 Volume Scan Procedures 24

 9.6 Power Drift Monitoring 24

10. Test Equipment List 25

11. System Verification 27

 11.1 Tissue Verification 27

 11.2 System Performance Check Results 28

12. RF Exposure Positions 29

 12.1 SAR Testing for Tablet 29

13. Conducted RF Output Power (Unit: dBm) 30

14. Antenna Location 77

15. SAR Test Results 81

 15.1 Body SAR 83

 15.2 Repeated SAR Measurement 93

16. Simultaneous Transmission Analysis 94

 16.1 Body Exposure Conditions 95

 16.2 SPLSR Evaluation and Analysis 107

17. Uncertainty Assessment 113

18. References 116

Appendix A. Plots of System Performance Check

Appendix B. Plots of High SAR Measurement

Appendix C. DASYS Calibration Certificate

Appendix D. Test Setup Photos



Revision History

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA612203	Rev. 01	Initial issue of report	Mar. 25, 2016

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Lenovo(Shanghai) Electronics Technology Co., Ltd., Portable Tablet Computer, Lenovo YT3-X90L**, are as follows.

Equipment Class	Frequency Band		Highest SAR Summary	Highest Simultaneous Transmission 1g SAR (W/kg)
			Body	
			1g SAR (W/kg)	
Licensed	GSM	GSM850	0.69	1.59
		GSM1900	1.12	
	WCDMA	WCDMA II	1.12	
		WCDMA IV	1.10	
		WCDMA V	0.49	
	LTE	LTE Band 12	0.50	
		LTE Band 5	0.68	
		LTE Band 4	0.97	
		LTE Band 2	0.86	
		LTE Band 7	1.06	
DTS	WLAN	2.4GHz WLAN	1.09	1.59
NII		5GHz WLAN	1.03	1.59
DSS	2.4GHz Band	Bluetooth	0.17	1.12
Date of Testing:			2016.02.16 ~ 2015/03/14	

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications



2. Administration Data

Testing Laboratory	
Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958

Applicant	
Company Name	Lenovo(Shanghai) Electronics Technology Co., Ltd.
Address	NO.68 BUILDING, 199 FENJU RD, China (Shanghai) Pilot Free Trade Zone, 200131, CHINA

Manufacturer	
Company Name	Lenovo PC HK Limited
Address	23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay, Hong Kong

3. Guidance Standard

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 616217 D04 SAR for laptop and tablets v01r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05



4. Equipment Under Test (EUT) Information

4.1 General Information

Product Feature & Specification	
Equipment Name	Portable Tablet Computer
Brand Name	Lenovo
Model Name	Lenovo YT3-X90L
FCC ID	O57YT3X90L
IMEI Code	867232020005683
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz WCDMA Band IV: 1712.4 MHz ~ 1752.6 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 17: 704 MHz ~ 716 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5700 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz
Mode	<ul style="list-style-type: none"> · GPRS/EGPRS · RMC 12.2Kbps · HSDPA · HSUPA · DC-HSDPA · HSPA+ (16QAM uplink is not supported) · LTE: QPSK, 16QAM · 802.11b/g/n HT20 · 802.11a/n/ac HT20/HT40/VHT20/VHT40/VHT80 · Bluetooth v3.0+EDR,Bluetooth v4.1 LE
HW Version	Lenovo YT3-X90L
SW Version	YT3-X90L_151230
EUT Stage	Identical Prototype
Remark: 1. 802.11n-HT40 is not supported in 2.4GHz WLAN. 2. This device supports GRPS/EGPRS mode up to multi-slot class33. 3. This device has no voice function.	



4.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05																																							
FCC ID	O57YT3X90L																																						
Equipment Name	Portable Tablet Computer																																						
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 17: 704 MHz ~ 716 MHz																																						
Channel Bandwidth	LTE Band 2: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 4: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 7: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 12: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 17: 5MHz, 10MHz																																						
uplink modulations used	QPSK, and 16QAM																																						
LTE Voice / Data requirements	Data only																																						
LTE MPR permanently built-in by design	<p align="center">Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3</p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (RB)</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 2</td> </tr> </tbody> </table>	Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)																																
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																						
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																						
LTE Release	R9,Cat 4																																						
CA Support	NO																																						
Power reduction applied to satisfy SAR compliance	Yes, Proximity Sensor.																																						

Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 2												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900
LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20407	824.7	20415	825.5	20425	826.5	20450	829				
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5				
H	20643	848.3	20635	847.5	20625	846.5	20600	844				




LTE Band 7								
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510
M	21100	2535	21100	2535	21100	2535	21100	2535
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560
LTE Band 12								
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	23017	699.7	23025	700.5	23035	701.5	23060	704
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5
H	23173	715.3	23165	714.5	23155	713.5	23130	711
LTE Band 17								
	Bandwidth 5 MHz			Bandwidth 10 MHz				
	Channel #	Freq.(MHz)		Channel #	Freq. (MHz)			
L	23755	706.5		23780	709			
M	23790	710		23790	710			
H	23825	713.5		23800	711			

5. Proximity Sensor Triggering Test

<Proximity Sensor Triggering Distance (KDB 616217 D04 section 6.2)>:

Proximity sensor triggering distance testing was performed according to the procedures outlined in KDB 616217 D04 section 6.2, and EUT moving further away from the flat phantom and EUT moving toward the flat phantom were both assessed. The details are illustrated in the exhibit “P-Sensor operational description”, and the shortest triggering distances were reported and used for SAR assessment.

In the preliminary triggering distance testing, the tissue-equivalent medium for different frequency bands were used for verification; no other frequency bands tissue-equivalent medium was found to result in shortest triggering distance than that for 1900MHz, and the tissue-equivalent medium for 1900MHz was used for formal proximity sensor triggering testing.

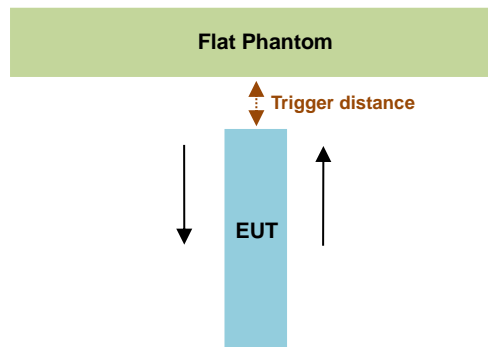

WWAN Low Frequency Band

Proximity Sensor Trigger Distance (mm)		
Position	Bottom Face	Edge 1
Minimum	30	28

WWAN High Frequency Band

Proximity Sensor Trigger Distance (mm)		
Position	Bottom Face	Edge 1
Minimum	15	14

<Proximity Sensor Triggering Coverage (KDB 616217 D04 section 6.3)>:

If a sensor is spatially offset from the antenna(s), it is necessary to verify sensor triggering for conditions where the antenna is next to the user but the sensor is laterally further away to ensure sensor coverage is sufficient for reducing the power to maintain compliance. For p-sensor coverage testing, the device is moved and “along the direction of maximum antenna and sensor offset”.


Illustrated in the internal photo exhibit, although the sensor is spatially offset, there is no trigger condition where the antenna is next to the user but the sensor is laterally further away, therefore proximity sensor coverage testing is not required.

This procedure is not required because antenna and sensor are collocated and the peak SAR location is overlapping with the sensor.

<Tablet Tilt angle influences to proximity sensor triggering (KDB 616217 D04 section 6.4)>:

The influence of table tilt angles to proximity sensor triggering was determined by positioning each tablet edge that contains a transmitting antenna, perpendicular to the flat phantom, at 28mm separation for Low frequency band and at 14mm separation for High frequency band.

Rotating the tablet around the edge next to the phantom in $\leq 10^\circ$ increments until the tablet is $\pm 45^\circ$ from the vertical position at 0° , and the maximum output power remains in the reduced mode.

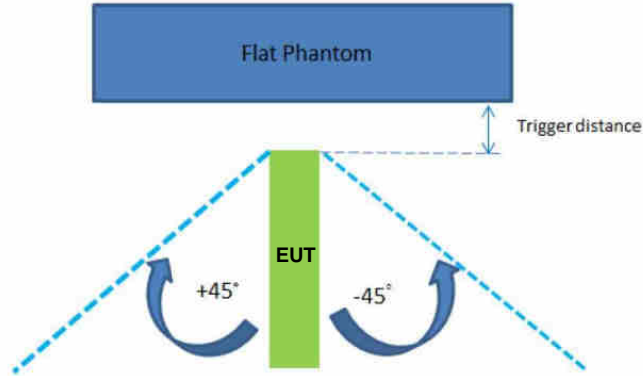

WWAN Low Frequency Band

The Sensor Trigger Distance (mm)	
Position	Edge 1
Minimum	28

WWAN High Frequency Band

The Sensor Trigger Distance (mm)	
Position	Edge 1
Minimum	14

Proximity sensor power reduction

Exposure Position / wireless mode	Bottom Face ⁽¹⁾	Edge 1 ⁽¹⁾	Edge 2	Edge 3	Edge 4
GSM850 GPRS (GMSK 1 Tx slot) - CS1	8.0 dB	8.0 dB	0 dB	0 dB	0 dB
GSM850 GPRS (GMSK 2 Tx slot) - CS1	8.0 dB	8.0 dB	0 dB	0 dB	0 dB
GSM850 GPRS (GMSK 3 Tx slot) - CS1	8.5 dB	8.5 dB	0 dB	0 dB	0 dB
GSM850 GPRS (GMSK 4 Tx slot) - CS1	8.5 dB	8.5 dB	0 dB	0 dB	0 dB
GSM850 EDGE (8PSK 1 Tx slot) - MCS5	8.0 dB	8.0 dB	0 dB	0 dB	0 dB
GSM850 EDGE (8PSK 2 Tx slot) - MCS5	8.0 dB	8.0 dB	0 dB	0 dB	0 dB
GSM850 EDGE (8PSK 3 Tx slot) - MCS5	9.0 dB	9.0 dB	0 dB	0 dB	0 dB
GSM850 EDGE (8PSK 4 Tx slot) - MCS5	8.0 dB	8.0 dB	0 dB	0 dB	0 dB
GSM1900 GPRS (GMSK 1 Tx slot) - CS1	4.5 dB	4.5 dB	0 dB	0 dB	0 dB
GSM1900 GPRS (GMSK 2 Tx slot) - CS1	4.5 dB	4.5 dB	0 dB	0 dB	0 dB
GSM1900 GPRS (GMSK 3 Tx slot) - CS1	5.0 dB	5.0 dB	0 dB	0 dB	0 dB
GSM1900 GPRS (GMSK 4 Tx slot) - CS1	4.5 dB	4.5 dB	0 dB	0 dB	0 dB
GSM1900 EDGE (8PSK 1 Tx slot) - MCS5	5.0 dB	5.0 dB	0 dB	0 dB	0 dB
GSM1900 EDGE (8PSK 2 Tx slot) - MCS5	5.0 dB	5.0 dB	0 dB	0 dB	0 dB
GSM1900 EDGE (8PSK 3 Tx slot) - MCS5	5.0 dB	5.0 dB	0 dB	0 dB	0 dB
GSM1900 EDGE (8PSK 4 Tx slot) - MCS5	5.0 dB	5.0 dB	0 dB	0 dB	0 dB
WCDMA Band V	6.5 dB	6.5 dB	0 dB	0 dB	0 dB
WCDMA Band II	8.5 dB	8.5 dB	0 dB	0 dB	0 dB
WCDMA Band IV	8.5 dB	8.5 dB	0 dB	0 dB	0 dB
LTE Band 2	8.5 dB	8.5 dB	0 dB	0 dB	0 dB
LTE Band 4	8.0 dB	8.0 dB	0 dB	0 dB	0 dB
LTE Band 5	6.0 dB	6.0 dB	0 dB	0 dB	0 dB
LTE Band 7	6.5 dB	6.5 dB	0 dB	0 dB	0 dB
LTE Band 12	2.5 dB	2.5 dB	0 dB	0 dB	0 dB
LTE Band 17	2.5 dB	2.5 dB	0 dB	0 dB	0 dB

Remark:

- ⁽¹⁾: Reduced maximum limit applied by activation of proximity sensor.
- Power reduction is not applicable for WLAN and Bluetooth.
- Tests were performed in accordance with KDB 616217 D04 section 6.1, 6.2, 6.3, 6.4 and 6.5 and compliant results are shown and described in exhibit "P-Sensor operational description"
- For verification of compliance of power reduction scheme, additional SAR testing with EUT transmitting at full RF power at a conservative trigger distance was performed:
 - Bottom Face: [10 mm](#)
 - Edge1: [10 mm](#)




Power Measurement during Sensor Trigger distance testing


Band/Mode	Ch #	Measured power reduction (dBm)		Reduction Levels (dB)
		w/o power back-off	w/ power back-off	
GSM850 GPRS (GMSK 4 Tx slot)	189	27.23	18.91	8.32
GSM1900 GPRS (GMSK 3 Tx slot)	661	25.07	20.44	4.63
GSM1900 GPRS (GMSK 4 Tx slot)	661	23.83	19.31	4.52
WCDMA Band V (RMC 12.2Kbps)	4182	23.10	16.53	6.57
WCDMA Band II (RMC 12.2Kbps)	9400	23.48	15.54	7.94
WCDMA Band IV (RMC 12.2Kbps)	1413	23.59	14.90	8.69
LTE Band 2 20MHz 1RB 0offset	18900	22.40	13.99	8.41
LTE Band 4 20MHz 1RB 49offset	20175	22.70	14.90	7.80
LTE Band 5 10MHz 1RB 0offset	20525	22.68	16.65	6.03
LTE Band 7 20MHz 1RB 49offset	21100	18.90	12.68	6.22
LTE Band 12 10MHz 1RB 25 offset	23095	22.69	19.85	2.84
LTE Band 17 10MHz 1RB 0offset	23790	22.48	19.78	2.70

WWAN Low Frequency Band

Bottom Face
Far ->Near

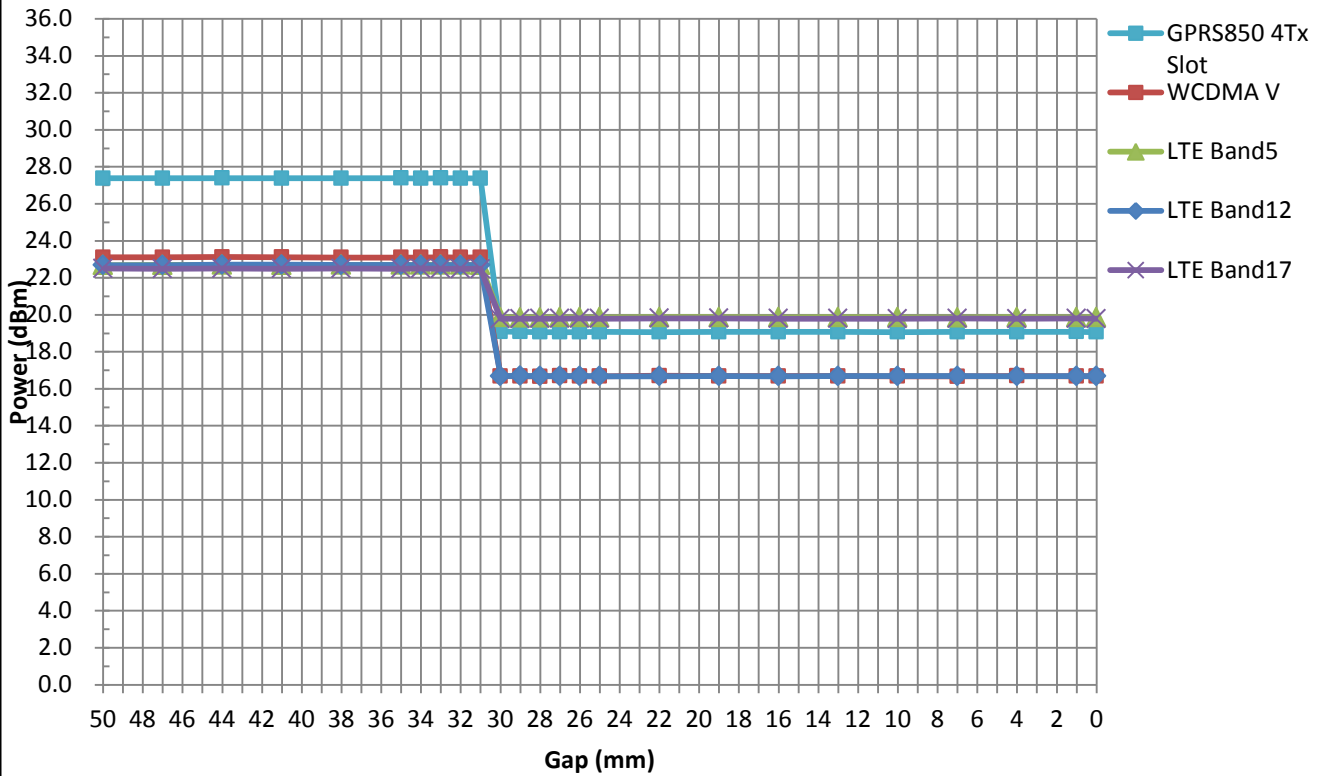


Edge 1 Far ->Near

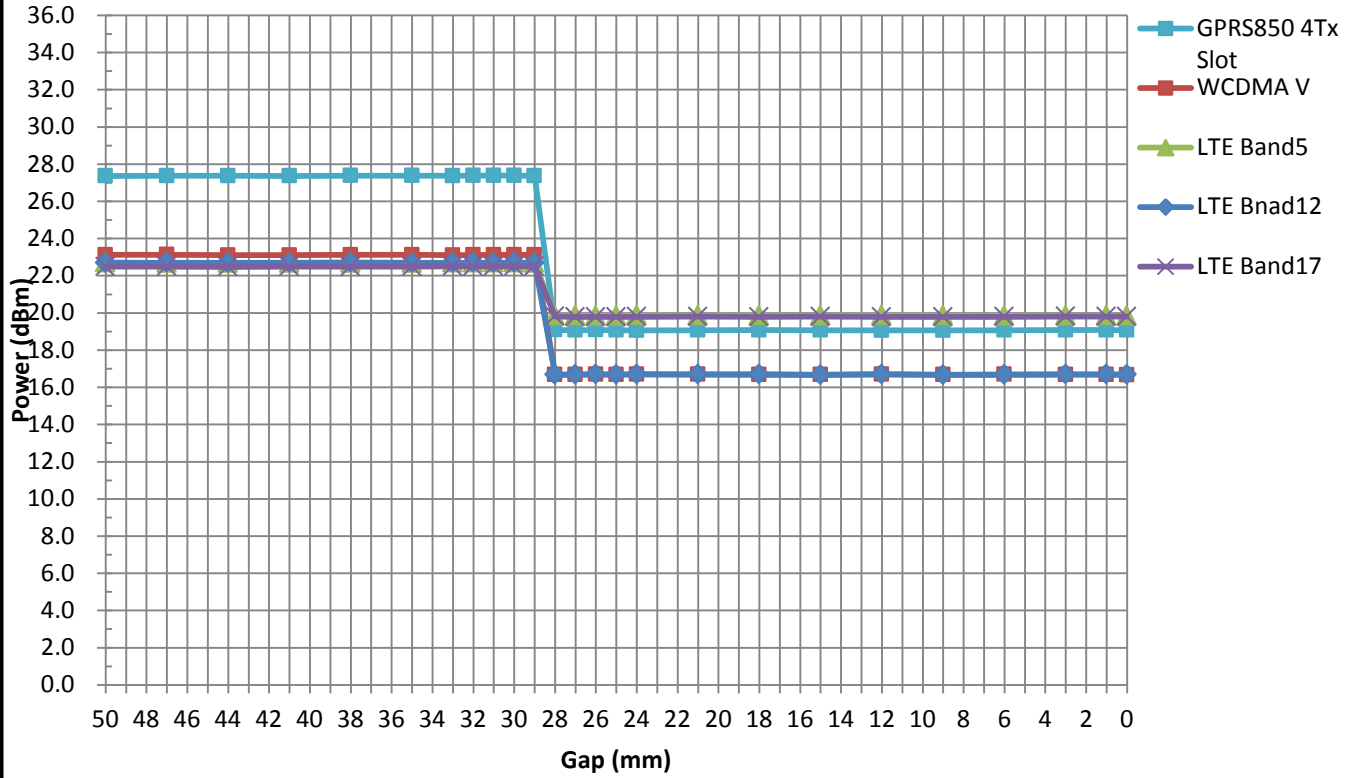


WWAN High Frequency Band

Bottom Face
Far ->Near

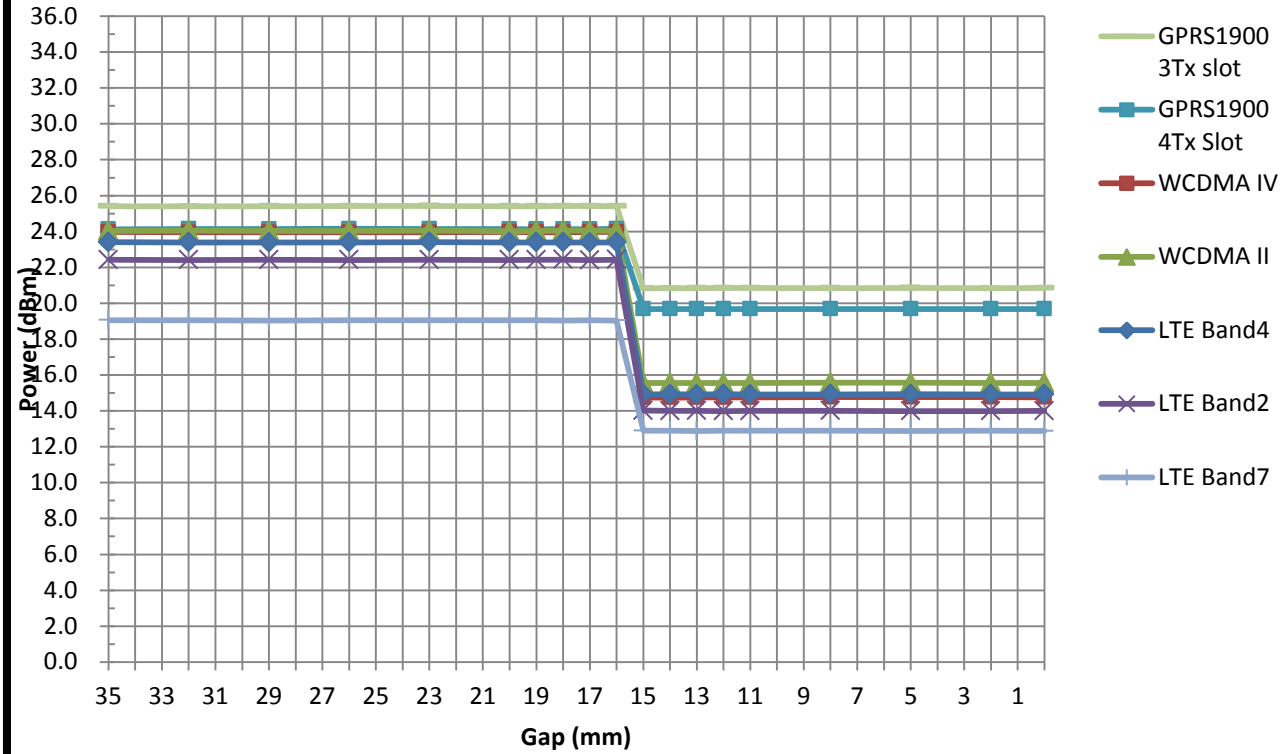

Edge 1 Far ->Near

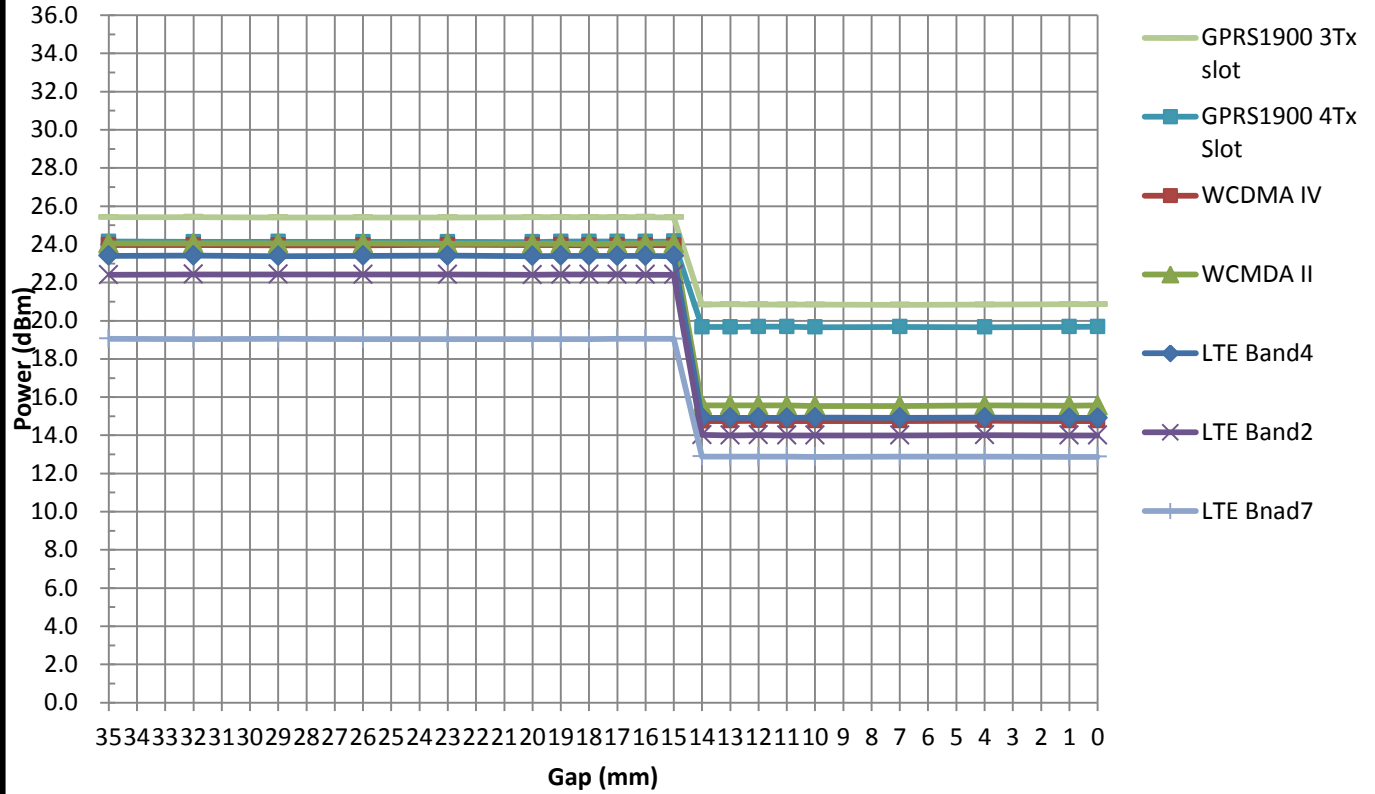

6. RF Exposure Limits

6.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

6.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

7. Specific Absorption Rate (SAR)

7.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

7.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

8. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

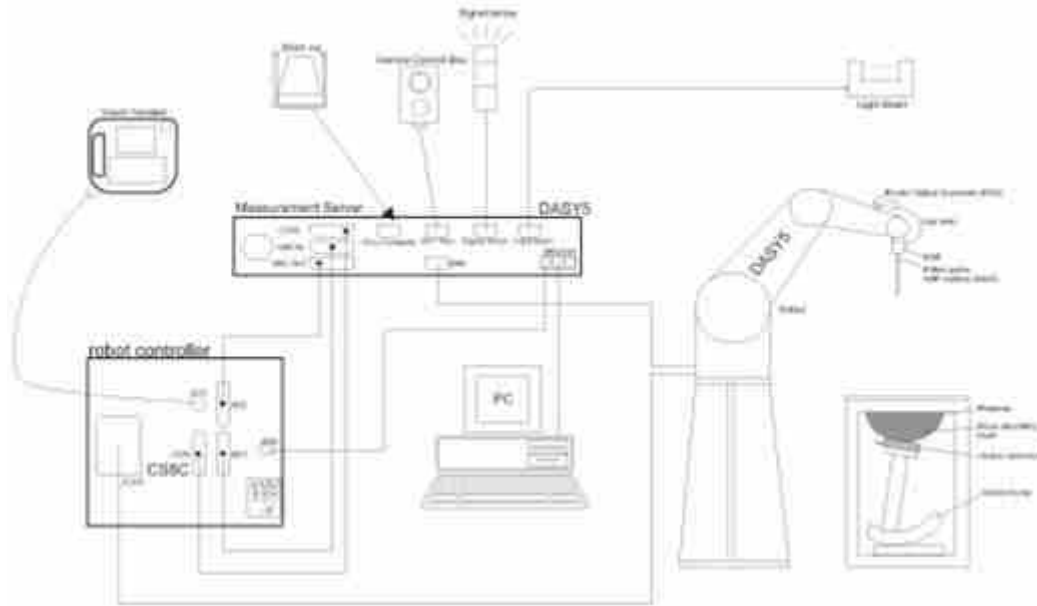


- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

8.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG).The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – >6 GHz Linearity: ±0.2 dB (30 MHz – 6 GHz)	
Directivity	±0.3 dB in TSL (rotation around probe axis) ±0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 µW/g – >100 mW/g Linearity: ±0.2 dB (noise: typically <1 µW/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

8.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.


The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 5.1 Photo of DAE


8.3 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

8.4 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

9. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

9.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

9.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

9.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0 is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

9.4 Zoom Scan

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

		≤ 3 GHz	> 3 GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm	
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

9.5 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

9.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



10. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1065	2015/11/24	2016/11/23
SPEAG	835MHz System Validation Kit	D835V2	4d091	2015/11/24	2016/11/23
SPEAG	1750MHz System Validation Kit	D1750V2	1069	2015/11/23	2016/11/22
SPEAG	1900MHz System Validation Kit	D1900V2	5d118	2015/11/23	2016/11/22
SPEAG	2450MHz System Validation Kit	D2450V2	840	2015/11/25	2016/11/24
SPEAG	2600MHz System Validation Kit	D2600V2	1061	2015/11/25	2016/11/24
SPEAG	5000MHz System Validation Kit	D5GHzV2	1113	2015/11/26	2016/11/25
SPEAG	Data Acquisition Electronics	DAE4	1210	2015/5/21	2016/5/20
SPEAG	Data Acquisition Electronics	DAE4	1279	2015/7/21	2016/7/20
SPEAG	Dosimetric E-Field Probe	EX3DV4	3954	2015/11/27	2016/11/26
SPEAG	Dosimetric E-Field Probe	EX3DV4	3857	2015/5/28	2016/5/27
SPEAG	ELI4 Phantom	QD OVA 001 BB	TP-1079	NCR	NCR
SPEAG	ELI4 Phantom	QD OVA 001 BB	TP-1127	NCR	NCR
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
Anritsu	Radio communication analyzer	MT8820C	6201300654	2015/8/10	2016/8/9
Agilent	Wireless Communication Test Set	E5515C	MY52102706	2015/5/4	2016/5/3
Agilent	ENA Series Network Analyzer	E5071C	MY46111157	2015/5/4	2016/5/3
SPEAG	DAK Kit	DAK3.5	1144	2015/11/24	2016/11/23
R&S	Signal Generator	SMBV100A	258305	2016/1/20	2017/1/19
Anritsu	Power Sensor	MA2411B	0917070	2016/1/20	2017/1/19
Anritsu	Power Meter	ML2495A	1005002	2016/1/20	2017/1/19
Anritsu	Power Sensor	MA2411B	1339163	2016/1/20	2017/1/19
Anritsu	Power Meter	ML2495A	1435004	2016/1/20	2017/1/19
R&S	Spectrum Analyzer	FSP40	100319	2015/8/10	2016/8/9
ARRA	Power Divider	A3200-2	N/A	Note 1	
Agilent	Dual Directional Coupler	778D	50422	Note 1	
PASTERNAK	Dual Directional Coupler	PE2214-10	N/A	Note 1	
AR	Amplifier	5S1G4	333096	Note 1	
mini-circuits	Amplifier	ZVE-3W-83+	162601250	Note 1	
MCL	Attenuation1	BW-S10W5+	N/A	Note 1	
MCL	Attenuation2	BW-S10W5+	N/A	Note 1	



MCL	Attenuation3	BW-S10W5+	N/A	Note 1
-----	--------------	-----------	-----	--------

General Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.



11. System Verification

11.1 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
For Body								
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	68.1	0	0	0.1	0	31.8	2.16	52.5

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
750	Body	22.8	0.956	54.926	0.96	55.50	-0.42	-1.03	±5	2016/3/13
835	Body	22.8	0.969	55.701	0.97	55.20	-0.10	0.91	±5	2016/3/14
1750	Body	22.7	1.540	53.324	1.49	53.40	3.36	-0.14	±5	2016/3/1
1900	Body	22.7	1.551	54.696	1.52	53.30	2.04	2.62	±5	2016/3/2
2450	Body	22.5	1.927	51.125	1.95	52.70	-1.18	-2.99	±5	2016/3/11
2600	Body	22.5	2.131	52.892	2.16	52.50	-1.34	0.75	±5	2016/2/16
5250	Body	22.9	5.480	48.566	5.36	48.95	2.24	-0.78	±5	2016/3/10
5600	Body	22.9	5.983	47.886	5.77	48.5	3.69	-1.27	±5	2016/3/11
5750	Body	22.9	6.215	47.569	5.95	48.27	4.45	-1.45	±5	2016/3/12

11.2 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2016/3/13	750	Body	250	1065	3954	1210	2.18	8.86	8.72	-1.58
2016/3/14	835	Body	250	4d091	3954	1210	2.47	9.55	9.88	3.46
2016/3/1	1750	Body	250	1069	3857	1210	9.5	35.9	38	5.85
2016/3/2	1900	Body	250	5d118	3857	1210	10.4	40.6	41.6	2.46
2016/3/11	2450	Body	250	840	3857	1210	12	51.1	48	-6.07
2016/2/16	2600	Body	250	1061	3857	1210	13.7	54.6	54.8	0.37
2016/3/10	5250	Body	100	1113	3954	1279	7.27	76.5	72.7	-4.97
2016/3/11	5600	Body	100	1113	3954	1279	7.74	82.4	77.4	-6.07
2016/3/12	5750	Body	100	1113	3954	1279	7.41	76.6	74.1	-3.26

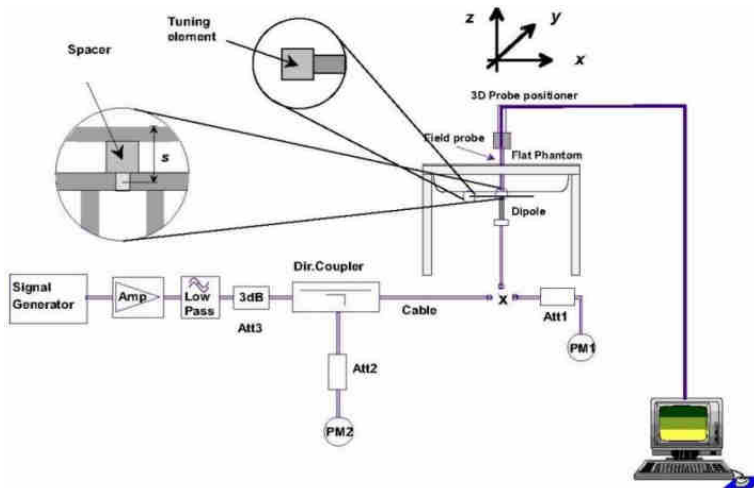


Fig 8.3.1 System Performance Check Setup



Fig 8.3.2 Setup Photo



12. RF Exposure Positions

12.1 SAR Testing for Tablet

This device can be used also in full sized tablet exposure conditions, due to its size. Per FCC KDB 616217, the back surface and edges of the tablet should be tested for SAR compliance with the tablet touching the phantom. The SAR exclusion threshold in KDB 447498 D01v06 can be applied to determine SAR test exclusion for adjacent edge configurations. The closest distance from the antenna to an adjacent tablet edge is used to determine if SAR testing is required for the adjacent edges, with the adjacent edge positioned against the phantom and the edge containing the antenna positioned perpendicular to the phantom.



13. Conducted RF Output Power (Unit: dBm)

<GSM Conducted Power>

General Note:

- Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
- Per KDB 941225 D01v03r01, for SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance, for modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested, therefore, the GPRS 4Tx slots modes was selected for GSM850 and GPRS 3Tx slots modes was selected for GSM1900 when EUT operating without power back-off, the GPRS 4Tx slots modes was selected for GSM850/GSM1900 when EUT operating with power back-off, according to the highest source-based time-averaged output power.

Maximum Average RF Power (Proximity Sensor Inactive)

Band GSM850 TX Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	128	189	251		128	189	251	
Frequency (MHz)	824.2	836.4	848.8		824.2	836.4	848.8	
GPRS 1 Tx slot	33.28	33.08	33.12	33.50	24.28	24.08	24.12	24.50
GPRS 2 Tx slots	30.42	30.30	30.41	30.50	24.42	24.30	24.41	24.50
GPRS 3 Tx slots	28.56	28.46	28.55	29.00	24.30	24.20	24.29	24.74
GPRS 4 Tx slots	27.36	27.23	27.30	28.00	24.36	24.23	24.30	25.00
EDGE 1 Tx slot	27.91	27.88	27.83	28.00	18.91	18.88	18.83	19.00
EDGE 2 Tx slots	27.09	27.85	27.82	28.00	21.09	21.85	21.82	22.00
EDGE 3 Tx slots	27.04	27.01	26.99	28.00	22.78	22.75	22.73	23.74
EDGE 4 Tx slots	25.86	25.79	25.72	26.00	22.86	22.79	22.72	23.00

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots. The calculated method are shown as below:

- Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB
- Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB
- Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB
- Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

Band GSM1900 TX Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	512	661	810		512	661	810	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GPRS 1 Tx slot	29.81	29.75	30.13	30.50	20.81	20.75	21.13	21.50
GPRS 2 Tx slots	26.99	26.92	27.24	27.50	20.99	20.92	21.24	21.50
GPRS 3 Tx slots	25.21	25.07	25.40	26.00	20.95	20.81	21.14	21.74
GPRS 4 Tx slots	23.90	23.83	24.12	24.50	20.90	20.83	21.12	21.50
EDGE 1 Tx slot	26.11	26.32	26.72	27.00	17.11	17.32	17.72	18.00
EDGE 2 Tx slots	26.01	26.33	26.66	27.00	20.01	20.33	20.66	21.00
EDGE 3 Tx slots	25.29	25.50	25.93	26.00	21.03	21.24	21.67	21.74
EDGE 4 Tx slots	24.13	24.33	24.80	25.00	21.13	21.33	21.80	22.00

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots. The calculated method are shown as below:

- Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB
- Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB
- Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB
- Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB



Reduced Average RF Power (Proximity Sensor active)

Band GSM850 TX Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	128	189	251		128	189	251	
Frequency (MHz)	824.2	836.4	848.8		824.2	836.4	848.8	
GPRS 1 Tx slot	25.05	24.88	24.97	25.50	16.05	15.88	15.97	16.50
GPRS 2 Tx slots	21.86	21.92	21.96	22.50	15.86	15.92	15.96	16.50
GPRS 3 Tx slots	20.24	20.08	20.14	20.50	15.98	15.82	15.88	16.24
GPRS 4 Tx slots	19.06	18.91	18.95	19.50	16.06	15.91	15.95	16.50
EDGE 1 Tx slot	19.69	19.57	19.61	20.00	10.69	10.57	10.61	11.00
EDGE 2 Tx slots	19.67	19.52	19.48	20.00	13.67	13.52	13.48	14.00
EDGE 3 Tx slots	18.81	18.73	18.65	19.00	14.55	14.47	14.39	14.74
EDGE 4 Tx slots	17.65	17.58	17.51	18.00	14.65	14.58	14.51	15.00

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB

Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB

Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB

Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

Band GSM1900 TX Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	512	661	810		512	661	810	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GPRS 1 Tx slot	25.33	25.32	25.70	26.00	16.33	16.32	16.70	17.00
GPRS 2 Tx slots	22.24	22.23	22.61	23.00	16.24	16.23	16.61	17.00
GPRS 3 Tx slots	20.47	20.44	20.83	21.00	16.21	16.18	16.57	16.74
GPRS 4 Tx slots	19.27	19.31	19.66	20.00	16.27	16.31	16.66	17.00
EDGE 1 Tx slot	21.11	21.30	21.65	22.00	12.11	12.30	12.65	13.00
EDGE 2 Tx slots	21.10	21.27	21.64	22.00	15.10	15.27	15.64	16.00
EDGE 3 Tx slots	20.15	20.38	20.81	21.00	15.89	16.12	16.55	16.74
EDGE 4 Tx slots	19.12	19.29	19.64	20.00	16.12	16.29	16.64	17.00

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB

Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB

Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB

Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{HS}/\beta_c = 24/15$. For all other combinations of DPCCH, DPCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCl
 - viii. Confirm that E-TFCl is equal to the target E-TFCl of 75 for sub-test 1, and other subtest's E-TFCl
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 5) (Note 6)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCl
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS- DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 6: β_{ed} can not be set directly, it is set by Absolute Grant Value.

Setup Configuration

DC-HSDPA 3GPP release 8 Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set RMC 12.2Kbps + HSDPA mode.
 - ii. Set Cell Power = -25 dBm
 - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - iv. Select HSDPA Uplink Parameters
 - v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - a). Subtest 1: $\beta_c/\beta_d=2/15$
 - b). Subtest 2: $\beta_c/\beta_d=12/15$
 - c). Subtest 3: $\beta_c/\beta_d=15/8$
 - d). Subtest 4: $\beta_c/\beta_d=15/4$
 - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
 - vii. Set Ack-Nack Repetition Factor to 3
 - viii. Set CQI Feedback Cycle (k) to 4 ms
 - ix. Set CQI Repetition Factor to 2
 - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{inf})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

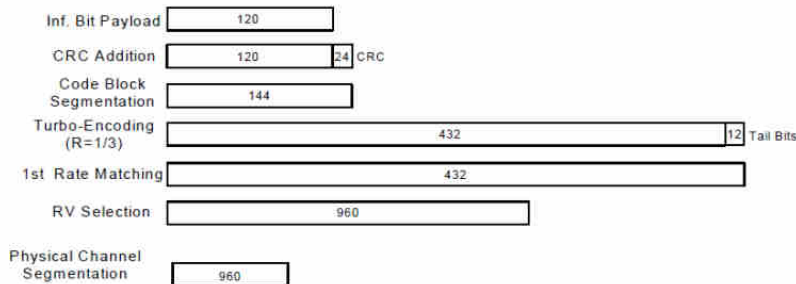


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

Setup Configuration



<WCDMA Conducted Power>

General Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. If the maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is ≤ ¼ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

Maximum Average RF Power (Proximity Sensor Inactive)

Band		WCDMA V			Tune-up Limit (dBm)	WCDMA II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)
TX Channel		4132	4182	4233		9262	9400	9538		1312	1413	1513	
Rx Channel		4357	4407	4458		9662	9800	9938		1537	1638	1738	
Frequency (MHz)		826.4	836.4	846.6	1852.4	1880	1907.6	1712.4	1732.6	1752.6			
3GPP Rel 99	RMC 12.2Kbps	23.26	23.10	23.14	23.50	23.63	23.48	24.02	24.50	23.42	23.59	23.95	24.00
3GPP Rel 6	HSDPA Subtest-1	23.19	23.05	23.09	23.50	23.12	23.04	23.56	24.00	23.18	23.33	23.17	24.00
3GPP Rel 6	HSDPA Subtest-2	23.15	23.02	23.07	23.50	23.11	23.04	23.57	24.00	23.19	23.35	23.19	24.00
3GPP Rel 6	HSDPA Subtest-3	23.17	23.02	23.06	23.50	23.14	23.05	23.60	24.00	23.21	23.36	23.20	24.00
3GPP Rel 6	HSDPA Subtest-4	23.15	23.01	23.01	23.50	23.13	23.03	23.58	24.00	23.18	23.35	23.14	24.00
3GPP Rel 8	DC-HSDPA Subtest-1	23.06	22.92	22.96	23.50	22.94	22.86	23.38	24.00	23.03	23.18	23.02	23.50
3GPP Rel 8	DC-HSDPA Subtest-2	23.02	22.89	22.94	23.50	22.93	22.86	23.39	24.00	23.04	23.20	23.04	23.50
3GPP Rel 8	DC-HSDPA Subtest-3	23.04	22.89	22.93	23.50	22.96	22.87	23.42	24.00	23.06	23.21	23.05	23.50
3GPP Rel 8	DC-HSDPA Subtest-4	23.02	22.88	22.88	23.50	22.95	22.85	23.40	24.00	23.03	23.20	22.99	23.50
3GPP Rel 6	HSUPA Subtest-1	22.15	21.97	22.02	22.50	22.24	22.12	22.65	23.00	22.43	22.48	22.34	23.00
3GPP Rel 6	HSUPA Subtest-2	21.31	21.22	21.25	22.00	21.50	21.50	22.02	22.50	21.68	21.77	21.68	22.00
3GPP Rel 6	HSUPA Subtest-3	22.25	22.13	22.16	23.00	22.35	22.30	22.42	23.00	22.48	22.50	22.41	23.00
3GPP Rel 6	HSUPA Subtest-4	21.58	21.44	21.53	22.00	21.68	21.69	22.32	23.00	21.81	22.13	21.89	22.50
3GPP Rel 6	HSUPA Subtest-5	23.03	22.90	22.94	23.50	23.28	23.20	23.77	24.00	23.39	23.56	23.40	24.00

Reduced Average RF Power (Proximity Sensor active)

Band		WCDMA V			Tune-up Limit (dBm)	WCDMA II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)
TX Channel		4132	4182	4233		9262	9400	9538		1312	1413	1513	
Rx Channel		4357	4407	4458		9662	9800	9938		1537	1638	1738	
Frequency (MHz)		826.4	836.4	846.6	1852.4	1880	1907.6	1712.4	1732.6	1752.6			
3GPP Rel 99	RMC 12.2Kbps	16.67	16.53	16.57	17.00	15.58	15.54	15.89	16.00	14.73	14.90	14.74	15.50
3GPP Rel 6	HSDPA Subtest-1	16.56	16.46	16.50	17.00	15.33	15.33	15.67	16.00	14.49	14.67	14.55	15.00
3GPP Rel 6	HSDPA Subtest-2	16.54	16.45	16.47	17.00	15.35	15.38	15.70	16.00	14.46	14.64	14.56	15.00
3GPP Rel 6	HSDPA Subtest-3	16.53	16.39	16.43	17.00	15.34	15.24	15.76	16.00	14.56	14.63	14.47	15.00
3GPP Rel 6	HSDPA Subtest-4	16.52	16.42	16.42	17.00	15.34	15.32	15.69	16.00	14.51	14.60	14.44	15.00
3GPP Rel 8	DC-HSDPA Subtest-1	16.44	16.34	16.38	17.00	15.14	15.14	15.48	16.00	14.33	14.51	14.39	15.00
3GPP Rel 8	DC-HSDPA Subtest-2	16.42	16.33	16.35	17.00	15.16	15.19	15.51	16.00	14.30	14.48	14.40	15.00
3GPP Rel 8	DC-HSDPA Subtest-3	16.41	16.27	16.31	17.00	15.15	15.05	15.57	16.00	14.40	14.47	14.31	15.00
3GPP Rel 8	DC-HSDPA Subtest-4	16.40	16.30	16.30	17.00	15.15	15.13	15.50	16.00	14.35	14.44	14.28	15.00
3GPP Rel 6	HSUPA Subtest-1	15.51	15.34	15.39	16.00	14.44	14.31	14.81	15.00	13.74	13.82	13.72	14.00
3GPP Rel 6	HSUPA Subtest-2	14.68	14.63	14.66	15.00	13.71	13.79	14.13	14.50	12.95	13.06	13.05	13.50
3GPP Rel 6	HSUPA Subtest-3	15.64	15.56	15.56	16.00	14.59	14.64	14.55	15.00	13.83	13.77	13.68	14.00
3GPP Rel 6	HSUPA Subtest-4	14.94	14.81	14.90	15.00	13.88	13.88	14.48	15.00	13.24	13.20	13.26	13.50
3GPP Rel 6	HSUPA Subtest-5	16.40	16.31	16.35	17.00	15.49	15.39	15.81	16.00	14.61	14.67	14.69	15.00



<LTE Conducted Power>

General Note:

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B12 / B5 / B4 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE band 17 SAR test was covered by Band 12; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is \leq the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band



Maximum Average RF Power (Proximity Sensor Inactive)

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	22.26	22.40	22.21	23	0
20	QPSK	1	49	21.75	22.02	22.01		
20	QPSK	1	99	21.69	21.83	21.80		
20	QPSK	50	0	20.84	21.10	21.02	22	0-1
20	QPSK	50	24	20.71	20.96	20.93		
20	QPSK	50	50	20.69	20.97	20.93		
20	QPSK	100	0	20.70	21.02	20.98	22	0-1
20	16QAM	1	0	20.86	21.24	21.13		
20	16QAM	1	49	20.88	21.16	21.17		
20	16QAM	1	99	20.69	20.60	20.90	21	0-2
20	16QAM	50	0	19.93	19.96	20.19		
20	16QAM	50	24	19.86	20.17	20.11		
20	16QAM	50	50	19.86	20.15	20.10	21	0-2
20	16QAM	100	0	19.85	20.19	20.12		
Channel				18675	18900	19125		
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	22.35	22.29	22.39	23	0
15	QPSK	1	37	21.59	21.86	21.88		
15	QPSK	1	74	22.27	22.34	22.37		
15	QPSK	36	0	20.81	21.11	20.98	22	0-1
15	QPSK	36	20	20.54	20.80	20.78		
15	QPSK	36	39	20.73	20.89	20.93		
15	QPSK	75	0	20.78	20.94	20.95	22	0-1
15	16QAM	1	0	21.54	21.63	21.65		
15	16QAM	1	37	20.76	21.00	20.97		
15	16QAM	1	74	21.41	21.48	21.45	21	0-2
15	16QAM	36	0	20.02	20.19	20.16		
15	16QAM	36	20	19.77	19.98	19.98		
15	16QAM	36	39	19.90	20.04	20.08	21	0-2
15	16QAM	75	0	19.94	20.11	20.11		



Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	21.83	22.10	22.24	23	0
10	QPSK	1	25	21.85	22.13	22.17		
10	QPSK	1	49	21.74	21.98	22.23		
10	QPSK	25	0	20.74	21.05	21.10	22	0-1
10	QPSK	25	12	20.73	21.03	21.06		
10	QPSK	25	25	20.69	20.98	21.07		
10	QPSK	50	0	20.70	21.02	21.09	22	0-1
10	16QAM	1	0	20.95	21.23	21.40		
10	16QAM	1	25	20.99	21.35	21.32		
10	16QAM	1	49	20.84	21.16	21.20	21	0-2
10	16QAM	25	0	19.92	20.23	20.23		
10	16QAM	25	12	19.89	20.20	20.23		
10	16QAM	25	25	19.86	20.18	20.24	21	0-2
10	16QAM	50	0	19.90	20.20	20.23		
Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	22.07	22.37	22.38	23	0
5	QPSK	1	12	21.66	21.97	22.07		
5	QPSK	1	24	22.01	22.34	22.35		
5	QPSK	12	0	20.76	21.09	21.14	22	0-1
5	QPSK	12	7	20.59	20.91	20.99		
5	QPSK	12	13	20.66	20.97	21.04		
5	QPSK	25	0	20.69	21.02	21.09	22	0-1
5	16QAM	1	0	21.21	21.53	21.54		
5	16QAM	1	12	20.78	21.15	21.15		
5	16QAM	1	24	21.15	21.50	21.53	21	0-2
5	16QAM	12	0	19.94	20.28	20.32		
5	16QAM	12	7	19.77	20.12	20.16		
5	16QAM	12	13	19.82	20.16	20.21	21	0-2
5	16QAM	25	0	19.88	20.23	20.28		



Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	21.79	22.12	22.18	23	0
3	QPSK	1	8	21.80	22.11	22.19		
3	QPSK	1	14	21.76	22.07	22.17		
3	QPSK	8	0	20.71	21.01	21.08	22	0-1
3	QPSK	8	4	20.67	20.99	21.08		
3	QPSK	8	7	20.69	21.03	21.10		
3	QPSK	15	0	20.70	21.02	21.11		
3	16QAM	1	0	20.87	21.26	21.25	22	0-1
3	16QAM	1	8	20.85	21.24	21.28		
3	16QAM	1	14	20.86	21.20	21.24		
3	16QAM	8	0	19.92	20.28	20.27	21	0-2
3	16QAM	8	4	19.88	20.18	20.26		
3	16QAM	8	7	19.89	20.19	20.30		
3	16QAM	15	0	19.89	20.20	20.28		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	21.86	22.19	22.26	23	0
1.4	QPSK	1	3	21.84	22.18	22.30		
1.4	QPSK	1	5	21.85	22.16	22.27		
1.4	QPSK	3	0	21.86	22.23	22.28		
1.4	QPSK	3	1	21.85	22.21	22.29		
1.4	QPSK	3	3	21.87	22.19	22.29		
1.4	QPSK	6	0	20.68	21.01	21.12	22	0-1
1.4	16QAM	1	0	21.00	21.27	21.37	22	0-1
1.4	16QAM	1	3	20.96	21.38	21.41		
1.4	16QAM	1	5	20.93	21.34	21.32		
1.4	16QAM	3	0	20.73	21.06	21.12		
1.4	16QAM	3	1	20.71	21.04	21.14		
1.4	16QAM	3	3	20.71	21.02	21.14		
1.4	16QAM	6	0	19.94	20.28	20.33	21	0-2



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	23.29	23.38	23.34	23.5	0
20	QPSK	1	49	22.59	22.70	22.74		
20	QPSK	1	99	22.49	22.41	22.49		
20	QPSK	50	0	21.92	22.18	22.15	22.5	0-1
20	QPSK	50	24	21.79	21.85	22.05		
20	QPSK	50	50	21.78	21.83	21.95		
20	QPSK	100	0	21.88	21.96	21.92	22.5	0-1
20	16QAM	1	0	22.02	21.87	22.09		
20	16QAM	1	49	21.98	22.02	22.14		
20	16QAM	1	99	21.79	21.76	21.81	21.5	0-2
20	16QAM	50	0	20.94	20.92	21.10		
20	16QAM	50	24	20.80	20.86	21.07		
20	16QAM	50	50	20.81	20.83	20.99	21.5	0-2
20	16QAM	100	0	20.85	20.85	21.05		
Channel				20025	20175	20325		
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	23.24	23.14	23.34	23.5	0
15	QPSK	1	37	22.49	22.57	22.79		
15	QPSK	1	74	23.01	23.04	23.14		
15	QPSK	36	0	21.83	21.92	22.12	22.5	0-1
15	QPSK	36	20	21.63	21.73	21.92		
15	QPSK	36	39	21.76	21.80	21.98		
15	QPSK	75	0	21.83	21.85	22.05	22.5	0-1
15	16QAM	1	0	22.44	22.44	22.46		
15	16QAM	1	37	21.82	21.84	22.11		
15	16QAM	1	74	22.33	22.32	22.42	21.5	0-2
15	16QAM	36	0	20.91	20.91	21.13		
15	16QAM	36	20	20.62	20.75	20.94		
15	16QAM	36	39	20.73	20.82	21.01	21.5	0-2
15	16QAM	75	0	20.81	20.86	21.06		



Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	22.71	22.92	23.18	23.5	0
10	QPSK	1	25	22.74	22.89	23.12		
10	QPSK	1	49	22.57	22.85	23.02		
10	QPSK	25	0	21.83	22.00	22.25	22.5	0-1
10	QPSK	25	12	21.82	21.98	22.19		
10	QPSK	25	25	21.77	21.97	22.18		
10	QPSK	50	0	21.80	21.97	22.22	22.5	0-1
10	16QAM	1	0	22.15	22.23	22.44		
10	16QAM	1	25	22.11	22.17	22.46		
10	16QAM	1	49	22.00	22.15	22.32	21.5	0-2
10	16QAM	25	0	20.93	21.05	21.29		
10	16QAM	25	12	20.87	21.00	21.26		
10	16QAM	25	25	20.87	20.99	21.21	21.5	0-2
10	16QAM	50	0	20.87	21.02	21.25		
Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	22.96	23.11	23.35	23.5	0
5	QPSK	1	12	22.58	22.77	22.97		
5	QPSK	1	24	22.91	23.09	23.27		
5	QPSK	12	0	21.88	22.04	22.28	22.5	0-1
5	QPSK	12	7	21.72	21.87	22.12		
5	QPSK	12	13	21.76	21.92	22.15		
5	QPSK	25	0	21.81	21.97	22.19	22.5	0-1
5	16QAM	1	0	22.32	22.40	22.69		
5	16QAM	1	12	21.92	22.05	22.29		
5	16QAM	1	24	22.20	22.38	22.47	21.5	0-2
5	16QAM	12	0	20.93	21.07	21.35		
5	16QAM	12	7	20.76	20.91	21.16		
5	16QAM	12	13	20.79	20.94	21.20	21.5	0-2
5	16QAM	25	0	20.89	21.03	21.27		



Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	22.72	22.89	23.15	23.5	0
3	QPSK	1	8	22.71	22.90	23.12		
3	QPSK	1	14	22.68	22.86	23.08		
3	QPSK	8	0	21.83	22.02	22.24	22.5	0-1
3	QPSK	8	4	21.80	22.00	22.21		
3	QPSK	8	7	21.82	21.99	22.21		
3	QPSK	15	0	21.81	21.97	22.21	22.5	0-1
3	16QAM	1	0	22.01	22.15	22.43		
3	16QAM	1	8	22.09	22.16	22.41		
3	16QAM	1	14	22.02	22.11	22.37	21.5	0-2
3	16QAM	8	0	20.94	21.10	21.33		
3	16QAM	8	4	20.91	21.06	21.29		
3	16QAM	8	7	20.93	21.08	21.30	21.5	0-2
3	16QAM	15	0	20.90	21.03	21.30		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	22.77	22.97	23.25	23.5	0
1.4	QPSK	1	3	22.78	22.94	23.18		
1.4	QPSK	1	5	22.77	22.95	23.19		
1.4	QPSK	3	0	22.81	22.99	23.21		
1.4	QPSK	3	1	22.82	22.96	23.23		
1.4	QPSK	3	3	22.79	23.00	23.23		
1.4	QPSK	6	0	21.82	22.00	22.23	22.5	0-1
1.4	16QAM	1	0	22.16	22.24	22.42	22.5	0-1
1.4	16QAM	1	3	22.08	22.23	22.48		
1.4	16QAM	1	5	22.10	22.23	22.49		
1.4	16QAM	3	0	21.88	22.05	22.30		
1.4	16QAM	3	1	21.87	22.03	22.27		
1.4	16QAM	3	3	21.86	22.03	22.26		
1.4	16QAM	6	0	20.95	21.14	21.37	21.5	0-2



<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	22.62	22.68	22.58	23	0
10	QPSK	1	25	22.39	22.30	22.28		
10	QPSK	1	49	22.33	22.25	22.17		
10	QPSK	25	0	21.48	21.53	21.40	22	0-1
10	QPSK	25	12	21.46	21.37	21.33		
10	QPSK	25	25	21.46	21.36	21.29		
10	QPSK	50	0	21.42	21.46	21.39	22	0-1
10	16QAM	1	0	21.75	21.63	21.59		
10	16QAM	1	25	21.72	21.48	21.52		
10	16QAM	1	49	21.54	21.49	21.37	21	0-2
10	16QAM	25	0	20.52	20.39	20.39		
10	16QAM	25	12	20.49	20.33	20.34		
10	16QAM	25	25	20.43	20.33	20.29	21	0-2
10	16QAM	50	0	20.51	20.36	20.36		
Channel				20425	20525	20625		
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	22.60	22.51	22.46	23	0
5	QPSK	1	12	22.24	22.14	22.06		
5	QPSK	1	24	22.56	22.45	22.34		
5	QPSK	12	0	21.51	21.40	21.34	22	0-1
5	QPSK	12	7	21.35	21.25	21.18		
5	QPSK	12	13	21.40	21.30	21.19		
5	QPSK	25	0	21.43	21.37	21.25	22	0-1
5	16QAM	1	0	21.86	21.76	21.74		
5	16QAM	1	12	21.53	21.45	21.32		
5	16QAM	1	24	21.81	21.67	21.55	21	0-2
5	16QAM	12	0	20.49	20.36	20.33		
5	16QAM	12	7	20.36	20.22	20.14		
5	16QAM	12	13	20.38	20.28	20.13	21	0-2
5	16QAM	25	0	20.43	20.37	20.26		



Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	22.41	22.30	22.22	23	0
3	QPSK	1	8	22.42	22.31	22.18		
3	QPSK	1	14	22.41	22.26	22.14		
3	QPSK	8	0	21.51	21.38	21.31	22	0-1
3	QPSK	8	4	21.45	21.37	21.25		
3	QPSK	8	7	21.47	21.37	21.23		
3	QPSK	15	0	21.46	21.39	21.27	22	0-1
3	16QAM	1	0	21.69	21.51	21.43		
3	16QAM	1	8	21.73	21.54	21.45		
3	16QAM	1	14	21.65	21.48	21.35	21	0-2
3	16QAM	8	0	20.51	20.35	20.30		
3	16QAM	8	4	20.48	20.35	20.25		
3	16QAM	8	7	20.50	20.36	20.25	21	0-2
3	16QAM	15	0	20.50	20.36	20.26		
Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	22.49	22.31	22.18	23	0
1.4	QPSK	1	3	22.38	22.27	22.15		
1.4	QPSK	1	5	22.40	22.29	22.18		
1.4	QPSK	3	0	22.48	22.36	22.24		
1.4	QPSK	3	1	22.47	22.34	22.22		
1.4	QPSK	3	3	22.46	22.35	22.21	22	0-1
1.4	QPSK	6	0	21.48	21.34	21.24		
1.4	16QAM	1	0	21.70	21.56	21.46	22	0-1
1.4	16QAM	1	3	21.69	21.54	21.44		
1.4	16QAM	1	5	21.68	21.56	21.44		
1.4	16QAM	3	0	21.56	21.38	21.28		
1.4	16QAM	3	1	21.56	21.39	21.27		
1.4	16QAM	3	3	21.57	21.39	21.26	21	0-2
1.4	16QAM	6	0	20.53	20.39	20.29		



<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Measured Power			Tune-up limit (dBm)	MPR (dB)
				Channel	20850	21100		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	18.73	18.90	19.03	19.5	0
20	QPSK	1	49	18.52	18.77	18.81		
20	QPSK	1	99	18.35	18.52	18.64		
20	QPSK	50	0	17.80	17.91	18.08	18.5	0-1
20	QPSK	50	24	17.77	17.87	18.02		
20	QPSK	50	50	17.74	17.82	18.00		
20	QPSK	100	0	17.73	17.22	18.02	18.5	0-1
20	16QAM	1	0	17.84	18.02	18.17		
20	16QAM	1	49	18.07	18.24	18.39		
20	16QAM	1	99	17.74	17.72	18.02	17.5	0-2
20	16QAM	50	0	16.85	16.53	16.83		
20	16QAM	50	24	16.04	16.51	16.78		
20	16QAM	50	50	16.78	16.40	16.30	17.5	0-2
20	16QAM	100	0	16.77	16.55	16.62		
Channel				20825	21100	21375		
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	18.99	19.26	19.37	19.5	0
15	QPSK	1	37	18.45	18.63	18.83		
15	QPSK	1	74	18.92	19.05	19.27		
15	QPSK	36	0	17.61	17.36	17.80	18.5	0-1
15	QPSK	36	20	17.25	17.61	17.93		
15	QPSK	36	39	17.55	16.87	18.05		
15	QPSK	75	0	17.14	17.58	18.05	18.5	0-1
15	16QAM	1	0	18.35	18.43	18.42		
15	16QAM	1	37	17.82	18.04	18.23		
15	16QAM	1	74	18.28	18.44	18.33	17.5	0-2
15	16QAM	36	0	16.80	16.57	17.18		
15	16QAM	36	20	16.63	16.83	16.99		
15	16QAM	36	39	16.74	16.88	17.10	17.5	0-2
15	16QAM	75	0	16.74	16.93	17.10		



Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	18.68	18.92	19.09	19.5	0
10	QPSK	1	25	18.75	18.97	19.17		
10	QPSK	1	49	18.65	18.82	19.03		
10	QPSK	25	0	16.99	17.86	18.19	18.5	0-1
10	QPSK	25	12	17.76	17.98	17.55		
10	QPSK	25	25	17.75	17.95	18.16		
10	QPSK	50	0	17.76	17.00	16.63	18.5	0-1
10	16QAM	1	0	18.04	18.32	18.49		
10	16QAM	1	25	18.12	18.36	18.46		
10	16QAM	1	49	18.00	18.18	18.42	17.5	0-2
10	16QAM	25	0	16.41	16.94	16.98		
10	16QAM	25	12	16.83	17.05	17.24		
10	16QAM	25	25	15.65	16.57	15.69	17.5	0-2
10	16QAM	50	0	15.69	17.06	16.32		
10	16QAM	50	0	15.69	17.06	16.32		
Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	18.87	19.12	19.33	19.5	0
5	QPSK	1	12	18.78	19.02	19.25		
5	QPSK	1	24	18.87	19.10	19.32		
5	QPSK	12	0	17.01	18.04	17.80	18.5	0-1
5	QPSK	12	7	16.69	16.76	17.32		
5	QPSK	12	13	17.56	17.80	18.03		
5	QPSK	25	0	17.13	17.84	17.59	18.5	0-1
5	16QAM	1	0	18.25	18.32	18.42		
5	16QAM	1	12	18.15	18.41	18.32		
5	16QAM	1	24	18.21	18.47	18.35	17.5	0-2
5	16QAM	12	0	16.88	16.83	17.35		
5	16QAM	12	7	16.14	16.98	17.04		
5	16QAM	12	13	16.79	16.40	17.09	17.5	0-2
5	16QAM	25	0	16.81	17.08	16.49		



<LTE Band 12>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23060	23095	23130		
Frequency (MHz)				704	707.5	711		
10	QPSK	1	0	22.64	22.69	22.59	23	0
10	QPSK	1	25	22.62	22.60	22.58		
10	QPSK	1	49	22.61	22.57	22.54		
10	QPSK	25	0	21.70	21.73	21.66	22	0-1
10	QPSK	25	12	21.69	21.67	21.64		
10	QPSK	25	25	21.68	21.67	21.64		
10	QPSK	50	0	21.65	21.68	21.66	22	0-1
10	16QAM	1	0	21.93	21.86	21.90		
10	16QAM	1	25	21.90	21.92	21.88		
10	16QAM	1	49	21.90	21.88	21.83	21	0-2
10	16QAM	25	0	20.76	20.72	20.70		
10	16QAM	25	12	20.69	20.70	20.68		
10	16QAM	25	25	20.73	20.71	20.68	21	0-2
10	16QAM	50	0	20.74	20.72	20.71		
Channel				23035	23095	23155		
Frequency (MHz)				701.5	707.5	713.5		
5	QPSK	1	0	22.61	22.59	22.59	23	0
5	QPSK	1	12	22.52	22.51	22.25		
5	QPSK	1	24	22.48	22.53	22.60		
5	QPSK	12	0	21.77	21.70	21.52	22	0-1
5	QPSK	12	7	21.62	21.57	21.37		
5	QPSK	12	13	21.65	21.63	21.41		
5	QPSK	25	0	21.69	21.64	21.47	22	0-1
5	16QAM	1	0	21.92	21.85	21.95		
5	16QAM	1	12	21.76	21.72	21.48		
5	16QAM	1	24	21.93	21.82	21.87	21	0-2
5	16QAM	12	0	20.83	20.75	20.61		
5	16QAM	12	7	20.65	20.63	20.44		
5	16QAM	12	13	20.67	20.67	20.47	21	0-2
5	16QAM	25	0	20.77	20.71	20.57		



Channel				23025	23095	23165	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				700.5	707.5	714.5		
3	QPSK	1	0	22.57	22.55	22.50	23	0
3	QPSK	1	8	22.61	22.57	22.53		
3	QPSK	1	14	22.59	22.54	22.48		
3	QPSK	8	0	21.74	21.64	21.60	22	0-1
3	QPSK	8	4	21.72	21.64	21.58		
3	QPSK	8	7	21.71	21.63	21.59		
3	QPSK	15	0	21.71	21.65	21.58	22	0-1
3	16QAM	1	0	21.85	21.79	21.73		
3	16QAM	1	8	21.88	21.85	21.74		
3	16QAM	1	14	21.83	21.83	21.73	21	0-2
3	16QAM	8	0	20.80	20.72	20.62		
3	16QAM	8	4	20.77	20.70	20.61		
3	16QAM	8	7	20.78	20.71	20.67	21	0-2
3	16QAM	15	0	20.79	20.72	20.64		
Channel				23017	23095	23173	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				699.7	707.5	715.3		
1.4	QPSK	1	0	22.65	22.61	22.53	23	0
1.4	QPSK	1	3	22.64	22.58	22.52		
1.4	QPSK	1	5	22.63	22.59	22.53		
1.4	QPSK	3	0	22.62	22.64	22.58		
1.4	QPSK	3	1	22.60	22.63	22.58		
1.4	QPSK	3	3	22.50	22.53	22.59	22	0-1
1.4	QPSK	6	0	21.71	21.65	21.60		
1.4	16QAM	1	0	21.96	21.91	21.80	22	0-1
1.4	16QAM	1	3	21.94	21.91	21.80		
1.4	16QAM	1	5	21.95	21.92	21.81		
1.4	16QAM	3	0	21.78	21.73	21.64		
1.4	16QAM	3	1	21.80	21.74	21.65		
1.4	16QAM	3	3	21.76	21.75	21.64	21	0-2
1.4	16QAM	6	0	20.82	20.78	20.71		



<LTE Band 17>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23780	23790	23800		
Frequency (MHz)				709	710	711		
10	QPSK	1	0	22.42	22.48	22.46	23	0
10	QPSK	1	25	21.94	22.02	21.95		
10	QPSK	1	49	21.85	21.96	21.95		
10	QPSK	25	0	21.00	21.07	21.02	22	0-1
10	QPSK	25	12	21.00	21.05	20.99		
10	QPSK	25	25	21.02	21.05	21.01		
10	QPSK	50	0	21.05	21.09	21.05	22	0-1
10	16QAM	1	0	21.26	21.30	21.27		
10	16QAM	1	25	21.28	21.33	21.23		
10	16QAM	1	49	21.16	21.18	21.18	21	0-2
10	16QAM	25	0	20.06	20.06	20.04		
10	16QAM	25	12	20.06	20.05	20.03		
10	16QAM	25	25	20.07	20.05	20.02	21	0-2
10	16QAM	50	0	20.08	20.04	20.06		
Channel				23755	23790	23825		
Frequency (MHz)				706.5	710	713.5		
5	QPSK	1	0	22.43	22.41	22.38	23	0
5	QPSK	1	12	22.40	22.37	22.36		
5	QPSK	1	24	22.37	22.40	22.41		
5	QPSK	12	0	21.69	21.63	21.63	22	0-1
5	QPSK	12	7	21.55	21.51	21.47		
5	QPSK	12	13	21.60	21.56	21.50		
5	QPSK	25	0	21.62	21.58	21.56	22	0-1
5	16QAM	1	0	21.99	21.98	21.96		
5	16QAM	1	12	21.71	21.68	21.62		
5	16QAM	1	24	21.98	21.92	21.91	21	0-2
5	16QAM	12	0	20.69	20.70	20.66		
5	16QAM	12	7	20.55	20.57	20.49		
5	16QAM	12	13	20.60	20.64	20.53	21	0-2
5	16QAM	25	0	20.80	20.69	20.65		



Reduced Average RF Power (Proximity Sensor active)

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	13.59	13.99	13.79	14.5	0
20	QPSK	1	49	13.56	13.85	13.75		
20	QPSK	1	99	13.38	13.64	13.60		
20	QPSK	50	0	12.77	13.11	12.93	13.5	0-1
20	QPSK	50	24	12.71	12.98	12.84		
20	QPSK	50	50	12.71	12.90	12.82		
20	QPSK	100	0	12.73	12.96	12.87	13.5	0-1
20	16QAM	1	0	12.91	13.19	13.16		
20	16QAM	1	49	12.96	13.18	13.06		
20	16QAM	1	99	12.73	12.89	12.91	12.5	0-2
20	16QAM	50	0	11.77	12.06	11.94		
20	16QAM	50	24	11.70	11.95	11.83		
20	16QAM	50	50	11.71	11.90	11.84	12.5	0-2
20	16QAM	100	0	11.70	11.93	11.86		
Channel				18675	18900	19125		
Frequency (MHz)				1857.5	1880	1902.5	Tune-up limit (dBm)	MPR (dB)
15	QPSK	1	0	14.13	14.38	14.27	14.5	0
15	QPSK	1	37	13.44	13.72	13.61		
15	QPSK	1	74	14.00	14.14	14.15		
15	QPSK	36	0	12.75	13.05	12.90	13.5	0-1
15	QPSK	36	20	12.54	12.84	12.71		
15	QPSK	36	39	12.69	12.93	12.86		
15	QPSK	75	0	12.70	12.96	12.87	13.5	0-1
15	16QAM	1	0	13.43	13.42	13.41		
15	16QAM	1	37	12.76	13.06	12.92		
15	16QAM	1	74	13.30	13.45	13.46	12.5	0-2
15	16QAM	36	0	11.77	12.07	11.92		
15	16QAM	36	20	11.54	11.82	11.71		
15	16QAM	36	39	11.66	11.90	11.82	12.5	0-2
15	16QAM	75	0	11.70	11.95	11.86		



Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	13.92	14.21	14.09	14.5	0
10	QPSK	1	25	13.92	14.20	14.12		
10	QPSK	1	49	13.85	14.05	14.09		
10	QPSK	25	0	13.01	13.31	13.21	13.5	0-1
10	QPSK	25	12	12.99	13.27	13.20		
10	QPSK	25	25	12.97	13.23	13.21		
10	QPSK	50	0	12.97	13.26	13.20	13.5	0-1
10	16QAM	1	0	13.30	13.42	13.47		
10	16QAM	1	25	13.28	13.44	13.49		
10	16QAM	1	49	13.18	13.42	13.41	12.5	0-2
10	16QAM	25	0	12.02	12.34	12.24		
10	16QAM	25	12	11.98	12.31	12.22		
10	16QAM	25	25	11.98	12.25	12.21	12.5	0-2
10	16QAM	50	0	12.00	12.29	12.23		
Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	13.91	14.25	14.17	14.5	0
5	QPSK	1	12	13.55	13.85	13.83		
5	QPSK	1	24	13.89	14.19	14.20		
5	QPSK	12	0	12.81	13.16	13.06	13.5	0-1
5	QPSK	12	7	12.65	12.97	12.92		
5	QPSK	12	13	12.70	13.02	12.98		
5	QPSK	25	0	12.74	13.06	13.04	13.5	0-1
5	16QAM	1	0	13.28	13.46	13.43		
5	16QAM	1	12	12.86	13.19	13.13		
5	16QAM	1	24	13.23	13.44	13.49	12.5	0-2
5	16QAM	12	0	11.87	12.19	12.12		
5	16QAM	12	7	11.70	12.01	11.94		
5	16QAM	12	13	11.72	12.04	12.01	12.5	0-2
5	16QAM	25	0	11.80	12.11	12.06		



Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	13.71	13.99	13.95	14.5	0
3	QPSK	1	8	13.70	13.99	13.98		
3	QPSK	1	14	13.68	13.97	13.99		
3	QPSK	8	0	12.77	13.09	13.06	13.5	0-1
3	QPSK	8	4	12.73	13.07	13.05		
3	QPSK	8	7	12.76	13.07	13.07		
3	QPSK	15	0	12.78	13.08	13.06	13.5	0-1
3	16QAM	1	0	13.05	13.37	13.28		
3	16QAM	1	8	13.05	13.37	13.31		
3	16QAM	1	14	13.01	13.32	13.25	12.5	0-2
3	16QAM	8	0	11.89	12.20	12.14		
3	16QAM	8	4	11.88	12.16	12.13		
3	16QAM	8	7	11.88	12.17	12.14	12.5	0-2
3	16QAM	15	0	11.87	12.17	12.12		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	13.76	14.08	14.05	14.5	0
1.4	QPSK	1	3	13.76	14.03	14.02		
1.4	QPSK	1	5	13.76	14.07	14.03		
1.4	QPSK	3	0	13.76	14.07	14.06		
1.4	QPSK	3	1	13.77	14.06	14.04		
1.4	QPSK	3	3	13.78	14.07	14.05		
1.4	QPSK	6	0	12.76	13.08	13.06	13.5	0-1
1.4	16QAM	1	0	13.12	13.44	13.36	13.5	0-1
1.4	16QAM	1	3	13.08	13.42	13.36		
1.4	16QAM	1	5	13.12	13.41	13.38		
1.4	16QAM	3	0	12.86	13.18	13.11		
1.4	16QAM	3	1	12.84	13.16	13.09		
1.4	16QAM	3	3	12.82	13.15	13.11		
1.4	16QAM	6	0	11.93	12.21	12.23	12.5	0-2



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	14.40	14.49	14.59	15.5	0
20	QPSK	1	49	14.49	14.90	14.85		
20	QPSK	1	99	14.19	14.36	14.67		
20	QPSK	50	0	13.71	14.08	13.83	14.5	0-1
20	QPSK	50	24	13.63	13.74	13.82		
20	QPSK	50	50	13.63	13.75	13.79		
20	QPSK	100	0	13.72	14.03	13.73	15	0-1
20	16QAM	1	0	13.84	14.11	14.01		
20	16QAM	1	49	13.74	13.84	14.10		
20	16QAM	1	99	13.58	13.63	13.91	14.5	0-2
20	16QAM	50	0	12.81	12.85	13.14		
20	16QAM	50	24	12.70	12.80	13.05		
20	16QAM	50	50	12.69	12.78	13.05		
20	16QAM	100	0	12.72	12.81	13.09		
Channel				20025	20175	20325		
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	14.96	15.04	15.24		
15	QPSK	1	37	14.36	14.48	14.73		
15	QPSK	1	74	14.76	14.97	15.06		
15	QPSK	36	0	13.64	13.79	13.97	14.5	0-1
15	QPSK	36	20	13.46	13.61	13.83		
15	QPSK	36	39	13.53	13.80	13.94		
15	QPSK	75	0	13.62	13.81	13.96	15	0-1
15	16QAM	1	0	14.14	14.34	14.46		
15	16QAM	1	37	13.59	13.69	13.98		
15	16QAM	1	74	13.93	14.28	14.26	14.5	0-2
15	16QAM	36	0	12.72	12.91	13.10		
15	16QAM	36	20	12.51	12.69	12.92		
15	16QAM	36	39	12.58	12.81	12.99		
15	16QAM	75	0	12.64	12.86	13.03		



Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	14.70	14.74	15.08	15.5	0
10	QPSK	1	25	14.61	14.75	15.02		
10	QPSK	1	49	14.55	14.66	14.93		
10	QPSK	25	0	13.69	13.84	14.10	14.5	0-1
10	QPSK	25	12	13.66	13.84	14.08		
10	QPSK	25	25	13.69	13.82	14.06		
10	QPSK	50	0	13.67	13.82	14.04	15	0-1
10	16QAM	1	0	13.98	13.96	14.27		
10	16QAM	1	25	13.86	13.99	14.30		
10	16QAM	1	49	13.80	13.89	14.09	14.5	0-2
10	16QAM	25	0	12.82	12.91	13.19		
10	16QAM	25	12	12.75	12.90	13.16		
10	16QAM	25	25	12.74	12.88	13.13	14.5	0-2
10	16QAM	50	0	12.78	12.89	13.14		
Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	14.84	14.97	15.25	15.5	0
5	QPSK	1	12	14.45	14.63	14.88		
5	QPSK	1	24	14.80	14.97	15.18		
5	QPSK	12	0	13.70	13.88	14.15	14.5	0-1
5	QPSK	12	7	13.55	13.74	14.03		
5	QPSK	12	13	13.64	13.83	14.17		
5	QPSK	25	0	13.63	13.84	14.12	15	0-1
5	16QAM	1	0	14.08	14.20	14.53		
5	16QAM	1	12	13.71	13.87	14.13		
5	16QAM	1	24	14.03	14.17	14.38	14.5	0-2
5	16QAM	12	0	12.81	12.97	13.25		
5	16QAM	12	7	12.63	12.79	13.07		
5	16QAM	12	13	12.66	12.85	13.11	14.5	0-2
5	16QAM	25	0	12.74	12.90	13.17		



Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	14.58	14.77	15.02	15.5	0
3	QPSK	1	8	14.57	14.74	14.98		
3	QPSK	1	14	14.54	14.74	14.95		
3	QPSK	8	0	13.60	13.84	14.13	14.5	0-1
3	QPSK	8	4	13.60	13.81	14.10		
3	QPSK	8	7	13.60	13.83	14.09		
3	QPSK	15	0	13.61	13.82	14.11	15	0-1
3	16QAM	1	0	13.81	13.93	14.19		
3	16QAM	1	8	13.79	13.95	14.19		
3	16QAM	1	14	13.75	13.93	14.17	14.5	0-2
3	16QAM	8	0	12.79	12.96	13.22		
3	16QAM	8	4	12.76	12.95	13.20		
3	16QAM	8	7	12.78	12.96	13.18	14.5	0-2
3	16QAM	15	0	12.76	12.94	13.18		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	14.66	14.80	15.04	15.5	0
1.4	QPSK	1	3	14.59	14.77	15.01		
1.4	QPSK	1	5	14.58	14.80	15.02		
1.4	QPSK	3	0	14.64	14.81	15.07		
1.4	QPSK	3	1	14.61	14.81	15.06		
1.4	QPSK	3	3	14.62	14.81	15.05		
1.4	QPSK	6	0	13.59	13.80	14.08	14.5	0-1
1.4	16QAM	1	0	13.91	14.01	14.27	15	0-1
1.4	16QAM	1	3	13.87	14.02	14.26		
1.4	16QAM	1	5	13.89	13.99	14.26		
1.4	16QAM	3	0	13.63	13.84	14.08		
1.4	16QAM	3	1	13.62	13.83	14.08		
1.4	16QAM	3	3	13.60	13.83	14.05		
1.4	16QAM	6	0	12.78	12.98	13.22	14.5	0-2



<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	16.78	16.65	16.60	17	0
10	QPSK	1	25	16.61	16.56	16.53		
10	QPSK	1	49	16.56	16.52	16.39		
10	QPSK	25	0	15.75	15.65	15.65	16	0-1
10	QPSK	25	12	15.46	15.61	15.61		
10	QPSK	25	25	15.67	15.61	15.55		
10	QPSK	50	0	15.71	15.63	15.62	16	0-1
10	16QAM	1	0	15.95	15.96	15.92		
10	16QAM	1	25	15.97	15.83	15.91		
10	16QAM	1	49	15.87	15.84	15.70	15	0-2
10	16QAM	25	0	14.74	14.64	14.65		
10	16QAM	25	12	14.68	14.58	14.60		
10	16QAM	25	25	14.67	14.58	14.55	15	0-2
10	16QAM	50	0	14.71	14.62	14.60		
Channel				20425	20525	20625		
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	16.66	16.63	16.59	17	0
5	QPSK	1	12	16.58	16.43	16.37		
5	QPSK	1	24	16.62	16.63	16.61		
5	QPSK	12	0	15.78	15.65	15.68	16	0-1
5	QPSK	12	7	15.64	15.50	15.48		
5	QPSK	12	13	15.69	15.55	15.49		
5	QPSK	25	0	15.72	15.61	15.54	16	0-1
5	16QAM	1	0	15.89	15.92	15.91		
5	16QAM	1	12	15.91	15.75	15.72		
5	16QAM	1	24	15.92	15.90	15.93	15	0-2
5	16QAM	12	0	14.81	14.63	14.69		
5	16QAM	12	7	14.65	14.48	14.47		
5	16QAM	12	13	14.70	14.52	14.46	15	0-2
5	16QAM	25	0	14.74	14.61	14.56		



Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	16.66	16.57	16.50	17	0
3	QPSK	1	8	16.64	16.55	16.46		
3	QPSK	1	14	16.65	16.56	16.44		
3	QPSK	8	0	15.76	15.64	15.58	16	0-1
3	QPSK	8	4	15.73	15.61	15.52		
3	QPSK	8	7	15.76	15.63	15.52		
3	QPSK	15	0	15.76	15.63	15.52	16	0-1
3	16QAM	1	0	15.99	15.84	15.82		
3	16QAM	1	8	15.97	15.83	15.75		
3	16QAM	1	14	15.97	15.81	15.69	15	0-2
3	16QAM	8	0	14.78	14.63	14.58		
3	16QAM	8	4	14.76	14.61	14.51		
3	16QAM	8	7	14.77	14.62	14.51	15	0-2
3	16QAM	15	0	14.77	14.61	14.53		
Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	16.73	16.66	16.51	17	0
1.4	QPSK	1	3	16.69	16.51	16.43		
1.4	QPSK	1	5	16.71	16.57	16.45		
1.4	QPSK	3	0	16.67	16.63	16.52		
1.4	QPSK	3	1	16.72	16.60	16.50		
1.4	QPSK	3	3	16.70	16.63	16.51	16	0-1
1.4	QPSK	6	0	15.76	15.63	15.53		
1.4	16QAM	1	0	15.86	15.88	15.76	16	0-1
1.4	16QAM	1	3	15.82	15.85	15.74		
1.4	16QAM	1	5	15.83	15.93	15.74		
1.4	16QAM	3	0	15.86	15.73	15.64		
1.4	16QAM	3	1	15.87	15.70	15.62		
1.4	16QAM	3	3	15.84	15.75	15.60	15	0-2
1.4	16QAM	6	0	14.83	14.70	14.57		



<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Measured Power			Tune-up limit (dBm)	MPR (dB)
				Channel	20850	21100		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	12.54	12.68	12.87	13	0
20	QPSK	1	49	12.39	12.53	12.63		
20	QPSK	1	99	11.98	12.27	12.50		
20	QPSK	50	0	11.50	11.74	11.88	12	0-1
20	QPSK	50	24	11.49	11.67	11.87		
20	QPSK	50	50	11.42	11.61	11.85		
20	QPSK	100	0	11.43	11.63	11.82		
20	16QAM	1	0	11.52	11.87	11.96	12	0-1
20	16QAM	1	49	11.83	11.96	11.94		
20	16QAM	1	99	11.35	11.57	11.85		
20	16QAM	50	0	10.50	10.72	10.87	11	0-2
20	16QAM	50	24	10.51	10.66	10.86		
20	16QAM	50	50	10.41	10.60	10.83		
20	16QAM	100	0	10.40	10.63	10.81		
Channel				20825	21100	21375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	12.77	12.85	12.89	13	0
15	QPSK	1	37	12.28	12.48	12.68		
15	QPSK	1	74	12.66	12.90	12.88		
15	QPSK	36	0	11.51	11.73	11.89	12	0-1
15	QPSK	36	20	11.35	11.54	11.74		
15	QPSK	36	39	11.50	11.64	11.88		
15	QPSK	75	0	11.51	11.66	11.88		
15	16QAM	1	0	11.80	11.78	11.79	12	0-1
15	16QAM	1	37	11.65	11.84	11.83		
15	16QAM	1	74	11.78	11.79	11.76		
15	16QAM	36	0	10.56	10.75	10.93	11	0-2
15	16QAM	36	20	10.36	10.55	10.76		
15	16QAM	36	39	10.47	10.62	10.87		
15	16QAM	75	0	10.50	10.64	10.87		



Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	12.50	12.68	12.89	13	0
10	QPSK	1	25	12.56	12.73	12.96		
10	QPSK	1	49	12.46	12.59	12.87		
10	QPSK	25	0	11.56	11.76	11.99	12	0-1
10	QPSK	25	12	11.54	11.71	11.96		
10	QPSK	25	25	11.53	11.70	11.96		
10	QPSK	50	0	11.54	11.73	11.95	12	0-1
10	16QAM	1	0	11.82	11.83	11.80		
10	16QAM	1	25	11.84	11.80	11.78		
10	16QAM	1	49	11.79	11.79	11.75	11	0-2
10	16QAM	25	0	10.58	10.81	10.95		
10	16QAM	25	12	10.55	10.76	10.99		
10	16QAM	25	25	10.56	10.73	10.92	11	0-2
10	16QAM	50	0	10.56	10.77	10.96		
Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	12.66	12.91	12.90	13	0
5	QPSK	1	12	12.58	12.81	12.85		
5	QPSK	1	24	12.67	12.88	12.86		
5	QPSK	12	0	11.57	11.79	11.85	12	0-1
5	QPSK	12	7	11.43	11.65	11.83		
5	QPSK	12	13	11.47	11.72	11.79		
5	QPSK	25	0	11.51	11.73	11.98	12	0-1
5	16QAM	1	0	11.85	11.86	11.92		
5	16QAM	1	12	11.74	11.82	11.83		
5	16QAM	1	24	11.80	11.75	11.76	11	0-2
5	16QAM	12	0	10.61	10.85	11.09		
5	16QAM	12	7	10.45	10.68	10.93		
5	16QAM	12	13	10.49	10.70	10.96	11	0-2
5	16QAM	25	0	10.53	10.78	11.03		



<LTE Band 12>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23060	23095	23130		
Frequency (MHz)				704	707.5	711		
10	QPSK	1	0	19.98	19.85	19.82	20.5	0
10	QPSK	1	25	19.88	19.84	19.80		
10	QPSK	1	49	19.87	19.82	19.77		
10	QPSK	25	0	18.90	18.88	18.86	19.5	0-1
10	QPSK	25	12	18.89	18.86	18.85		
10	QPSK	25	25	18.88	18.87	18.85		
10	QPSK	50	0	18.90	18.88	18.86	19.5	0-1
10	16QAM	1	0	19.14	19.11	19.11		
10	16QAM	1	25	19.11	19.12	19.10		
10	16QAM	1	49	19.10	19.09	19.03	18.5	0-2
10	16QAM	25	0	17.89	17.87	17.86		
10	16QAM	25	12	17.85	17.85	17.84		
10	16QAM	25	25	17.87	17.85	17.84	18.5	0-2
10	16QAM	50	0	17.90	17.87	17.89		
Channel				23035	23095	23155		
Frequency (MHz)				701.5	707.5	713.5		
5	QPSK	1	0	19.95	19.91	19.91	20.5	0
5	QPSK	1	12	19.77	19.72	19.68		
5	QPSK	1	24	19.89	19.88	19.93		
5	QPSK	12	0	18.99	18.93	18.89	19.5	0-1
5	QPSK	12	7	18.98	18.97	18.87		
5	QPSK	12	13	18.88	18.85	18.78		
5	QPSK	25	0	18.91	18.88	18.84	19.5	0-1
5	16QAM	1	0	19.39	19.34	19.28		
5	16QAM	1	12	19.02	18.98	18.89		
5	16QAM	1	24	19.34	19.33	19.21	18.5	0-2
5	16QAM	12	0	18.01	17.92	17.87		
5	16QAM	12	7	17.82	17.79	17.70		
5	16QAM	12	13	17.84	17.84	17.74	18.5	0-2
5	16QAM	25	0	17.93	17.88	17.83		



Channel				23025	23095	23165	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				700.5	707.5	714.5		
3	QPSK	1	0	19.91	19.83	19.76	20.5	0
3	QPSK	1	8	19.88	19.83	19.77		
3	QPSK	1	14	19.86	19.84	19.75		
3	QPSK	8	0	18.97	18.90	18.82	19.5	0-1
3	QPSK	8	4	18.95	18.89	18.82		
3	QPSK	8	7	18.94	18.91	18.82		
3	QPSK	15	0	18.95	18.89	18.82	19.5	0-1
3	16QAM	1	0	19.07	19.06	19.00		
3	16QAM	1	8	19.14	19.08	19.00		
3	16QAM	1	14	19.08	19.06	18.98	18.5	0-2
3	16QAM	8	0	17.98	17.91	17.83		
3	16QAM	8	4	17.97	17.91	17.82		
3	16QAM	8	7	17.97	17.92	17.84	18.5	0-2
3	16QAM	15	0	17.97	17.89	17.81		
Channel				23017	23095	23173	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				699.7	707.5	715.3		
1.4	QPSK	1	0	19.94	19.85	19.80	20.5	0
1.4	QPSK	1	3	19.91	19.85	19.78		
1.4	QPSK	1	5	19.93	19.87	19.81		
1.4	QPSK	3	0	19.23	19.92	19.84		
1.4	QPSK	3	1	19.11	19.92	19.83		
1.4	QPSK	3	3	19.91	19.92	19.83	19.5	0-1
1.4	QPSK	6	0	18.96	18.90	18.83		
1.4	16QAM	1	0	19.21	19.13	19.07	19.5	0-1
1.4	16QAM	1	3	19.19	19.11	19.06		
1.4	16QAM	1	5	19.20	19.15	19.07		
1.4	16QAM	3	0	19.06	19.00	18.90		
1.4	16QAM	3	1	19.05	18.98	18.89		
1.4	16QAM	3	3	19.03	18.97	18.90	18.5	0-2
1.4	16QAM	6	0	18.01	17.95	17.90		



<LTE Band 17>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23780	23790	23800		
Frequency (MHz)				709	710	711		
10	QPSK	1	0	19.84	19.78	19.75	20.5	0
10	QPSK	1	25	19.49	19.46	19.41		
10	QPSK	1	49	19.81	19.77	19.74		
10	QPSK	25	0	18.69	18.66	18.62	19.5	0-1
10	QPSK	25	12	18.53	18.54	18.47		
10	QPSK	25	25	18.61	18.57	18.52		
10	QPSK	50	0	18.64	18.60	18.57	19.5	0-1
10	16QAM	1	0	19.08	19.09	19.00		
10	16QAM	1	25	18.75	18.74	18.66		
10	16QAM	1	49	19.10	19.01	18.98	18.5	0-2
10	16QAM	25	0	17.68	17.68	17.61		
10	16QAM	25	12	17.54	17.54	17.46		
10	16QAM	25	25	17.60	17.58	17.50	18.5	0-2
10	16QAM	50	0	17.65	17.61	17.59		
Channel				23755	23790	23825		
Frequency (MHz)				706.5	710	713.5		
5	QPSK	1	0	19.60	19.57	19.58	20.5	0
5	QPSK	1	12	19.59	19.56	19.56		
5	QPSK	1	24	19.55	19.55	19.56		
5	QPSK	12	0	18.63	18.61	18.62	19.5	0-1
5	QPSK	12	7	18.60	18.59	18.59		
5	QPSK	12	13	18.62	18.60	18.60		
5	QPSK	25	0	18.63	18.63	18.62	19.5	0-1
5	16QAM	1	0	18.84	18.86	18.86		
5	16QAM	1	12	18.88	18.85	18.86		
5	16QAM	1	24	18.77	18.76	18.79	18.5	0-2
5	16QAM	12	0	17.61	17.61	17.62		
5	16QAM	12	7	17.61	17.59	17.59		
5	16QAM	12	13	17.61	17.61	17.60	18.5	0-2
5	16QAM	25	0	17.61	17.60	17.62		



<WLAN Conducted Power>

General Note:

1. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
2. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
3. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
4. For all positions/configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.



<2.4GHz WLAN ANT 1>

Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
802.11b	CH 1	2412	1Mbps	15.42	16	98.62
	CH 6	2437		15.54	16	
	CH 11	2462		15.35	16	
802.11g	CH 1	2412	6Mbps	15.14	15.5	93.46
	CH 6	2437		15.25	15.5	
	CH 11	2462		15.11	15.5	
802.11n-HT20	CH 1	2412	MCS0	11.16	11.5	94.95
	CH 6	2437		11.23	11.5	
	CH 11	2462		11.01	11.5	

<2.4GHz WLAN ANT 2>

Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
802.11b	CH 1	2412	1Mbps	15.30	15.5	99.08
	CH 6	2437		15.60	16	
	CH 11	2462		14.92	15.5	
802.11g	CH 1	2412	6Mbps	14.68	15	93.46
	CH 6	2437		14.75	15	
	CH 11	2462		14.53	15	
802.11n-HT20	CH 1	2412	MCS0	10.72	11	95.05
	CH 6	2437		10.81	11	
	CH 11	2462		10.50	11	

<2.4GHz WLAN ANT 1+2>

Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
802.11n-HT20	CH 1	2412	MCS8	14.70	15	91.30
	CH 6	2437		14.91	15	
	CH 11	2462		14.69	15	



<5GHz WLAN ANT1>

	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN ANT 1	802.11a	CH 36	5180	6Mbps	11.36	12	93.38
		CH 40	5200		11.39	12	
		CH 44	5220		11.31	12	
		CH 48	5240		11.49	12	
	802.11n-HT20	CH 36	5180	MCS0	11.44	12	94.95
		CH 40	5200		11.29	12	
		CH 44	5220		11.37	12	
		CH 48	5240		11.49	12	
	802.11n-HT40	CH 38	5190	MCS0	10.87	11	90.38
		CH 46	5230		10.58	11	
	802.11ac-VHT20	CH 36	5180	MCS0	10.81	11	95.10
		CH 40	5200		10.61	11	
		CH 44	5220		10.44	11	
		CH 48	5240		10.34	11	
	802.11ac-VHT40	CH 38	5190	MCS0	10.99	11	87.05
		CH 46	5230		10.68	11	
802.11ac-VHT80	CH 42	5210	MCS0	10.53	11	76.85	

	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN ANT 1	802.11a	CH 52	5260	6Mbps	11.37	11.5	93.38
		CH 56	5280		11.22	11.5	
		CH 60	5300		11.28	11.5	
		CH 64	5320		11.15	11.5	
	802.11n-HT20	CH 52	5260	MCS0	11.32	11.5	94.95
		CH 56	5280		11.20	11.5	
		CH 60	5300		11.11	11.5	
		CH 64	5320		11.24	11.5	
	802.11n-HT40	CH 54	5270	MCS0	10.41	11	90.38
		CH 62	5310		9.86	11	
	802.11ac-VHT20	CH 52	5260	MCS0	10.31	10.5	95.10
		CH 56	5280		9.93	10.5	
		CH 60	5300		9.80	10.5	
		CH 64	5320		9.45	10.5	
	802.11ac-VHT40	CH 54	5270	MCS0	10.59	11	87.05
		CH 62	5310		10.01	11	
802.11ac-VHT80	CH 58	5290	MCS0	9.99	11	76.85	



	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.5GHz WLAN ANT 1	802.11a	CH 100	5500	6Mbps	10.25	10.5	93.38
		CH 116	5580		9.72	10.5	
		CH 124	5620		9.44	10.5	
		CH 132	5660		9.45	10.5	
		CH 140	5700		9.61	10.5	
	802.11n-HT20	CH 100	5500	MCS0	9.82	10	94.95
		CH 116	5580		9.20	10	
		CH 124	5620		9.30	10	
		CH 132	5660		8.92	10	
		CH 140	5700		9.71	10	
	802.11n-HT40	CH 102	5510	MCS0	9.22	10	90.38
		CH 110	5550		8.98	10	
		CH 126	5630		8.50	10	
	802.11ac-VHT20	CH 102	5510	MCS0	8.30	10	95.10
		CH 100	5500		9.58	10	
		CH 116	5580		9.18	10	
		CH 124	5620		9.56	10	
		CH 132	5660		9.11	10	
	802.11ac-VHT40	CH 102	5510	MCS0	9.19	10	87.05
		CH 110	5550		9.04	10	
		CH 126	5630		8.75	10	
		CH 134	5670		8.23	10	
	802.11ac-VHT80	CH 106	5530	MCS0	8.82	9	76.85
		CH 122	5610		8.22	9	



	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.8GHz WLAN ANT 1	802.11a	CH 149	5745	MCS0	6.55	7	93.38
		CH 157	5785		6.29	7	
		CH 165	5825		6.36	7	
	802.11n-HT20	CH 149	5745	MCS0	4.80	6	94.95
		CH 157	5785		5.71	6	
		CH 165	5825		5.12	6	
	802.11n-HT40	CH 151	5755	MCS0	5.27	6	90.38
		CH 159	5795		5.58	6	
	802.11ac-VHT20	CH 149	5745	MCS0	4.79	6	95.10
		CH 157	5785		5.87	6	
		CH 165	5825		5.09	6	
	802.11ac-VHT40	CH 151	5755	MCS0	5.13	6	87.05
		CH 159	5795		5.75	6	
	802.11ac-VHT80	CH 155	5775	MCS0	6.35	6.5	76.85



<5GHz WLAN ANT2>

	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN ANT 2	802.11a	CH 36	5180	6Mbps	13.21	13.50	93.46
		CH 40	5200		13.08	13.50	
		CH 44	5220		13.16	13.50	
		CH 48	5240		13.28	13.50	
	802.11n-HT20	CH 36	5180	MCS0	12.23	13	95.05
		CH 40	5200		12.11	13	
		CH 44	5220		12.41	13	
		CH 48	5240		12.65	13	
	802.11n-HT40	CH 38	5190	MCS0	11.76	12	90.37
		CH 46	5230		11.95	12	
	802.11ac-VHT20	CH 36	5180	MCS0	11.57	12	95.00
		CH 40	5200		11.44	12	
		CH 44	5220		11.39	12	
		CH 48	5240		11.72	12	
	802.11ac-VHT40	CH 38	5190	MCS0	11.81	12.5	87.05
		CH 46	5230		12.01	12.5	
802.11ac-VHT80	CH 42	5210	MCS0	12.43	12.5	76.96	

	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN ANT 2	802.11a	CH 52	5260	6Mbps	13.26	13.5	93.46
		CH 56	5280		13.06	13.5	
		CH 60	5300		13.12	13.5	
		CH 64	5320		13.21	13.5	
	802.11n-HT20	CH 52	5260	MCS0	12.58	13	95.05
		CH 56	5280		12.35	13	
		CH 60	5300		12.53	13	
		CH 64	5320		12.15	13	
	802.11n-HT40	CH 54	5270	MCS0	11.97	12	90.37
		CH 62	5310		11.73	12	
	802.11ac-VHT20	CH 52	5260	MCS0	11.83	12	95.00
		CH 56	5280		11.65	12	
		CH 60	5300		11.60	12	
		CH 64	5320		11.39	12	
	802.11ac-VHT40	CH 54	5270	MCS0	11.87	12.5	87.05
		CH 62	5310		12.05	12.5	
802.11ac-VHT80	CH 58	5290	MCS0	11.68	12	76.96	



	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.5GHz WLAN ANT 2	802.11a	CH 100	5500	6Mbps	10.72	11	93.46
		CH 116	5580		10.83	11	
		CH 124	5620		10.68	11	
		CH 132	5660		10.52	11	
		CH 140	5700		10.68	11	
	802.11n-HT20	CH 100	5500	MCS0	10.68	11	95.05
		CH 116	5580		10.30	11	
		CH 124	5620		10.64	11	
		CH 132	5660		10.05	11	
		CH 140	5700		10.21	11	
	802.11n-HT40	CH 102	5510	MCS0	10.26	10.5	90.37
		CH 110	5550		10.17	10.5	
		CH 126	5630		9.82	10.5	
		CH 134	5670		9.48	10.5	
	802.11ac-VHT20	CH 100	5500	MCS0	10.05	10.5	95.00
		CH 116	5580		9.68	10.5	
		CH 124	5620		9.70	10.5	
		CH 132	5660		9.25	10.5	
		CH 140	5700		9.64	10.5	
	802.11ac-VHT40	CH 102	5510	MCS0	10.18	10.5	87.05
		CH 110	5550		10.11	10.5	
		CH 126	5630		10.01	10.5	
		CH 134	5670		9.56	10.5	
	802.11ac-VHT80	CH 106	5530	MCS0	10.10	10.5	76.96
		CH 122	5610		9.56	10.5	



	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.8GHz WLAN ANT 2	802.11a	CH 149	5745	MCS0	12.22	12.5	93.46
		CH 157	5785		12.11	12.5	
		CH 165	5825		11.95	12.5	
	802.11n-HT20	CH 149	5745	MCS0	8.76	9.5	95.05
		CH 157	5785		9.17	9.5	
		CH 165	5825		8.81	9.5	
	802.11n-HT40	CH 151	5755	MCS0	7.59	8	90.37
		CH 159	5795		7.78	8	
	802.11ac-VHT20	CH 149	5745	MCS0	7.40	8	95.00
		CH 157	5785		7.88	8	
		CH 165	5825		7.31	8	
	802.11ac-VHT40	CH 151	5755	MCS0	5.97	7	87.05
		CH 159	5795		6.37	7	
	802.11ac-VHT80	CH 155	5775	MCS0	8.79	9	76.96



<5GHz WLAN ANT1+2>

	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN ANT 1+2	802.11n-HT20	CH 36	5180	MCS8	14.10	14.5	91.54
		CH 40	5200		14.03	14.5	
		CH 44	5220		13.98	14.5	
		CH 48	5240		14.30	14.5	
	802.11n-HT40	CH 38	5190	MCS8	13.49	14	83.33
		CH 46	5230		13.62	14	
	802.11ac-VHT20	CH 36	5180	MCS0	13.30	14	87.28
		CH 40	5200		13.17	14	
		CH 44	5220		13.20	14	
		CH 48	5240		13.42	14	
	802.11ac-VHT40	CH 38	5190	MCS0	13.55	14	78.70
		CH 46	5230		13.74	14	
802.11ac-VHT80	CH 42	5210	MCS0	13.39	14	65.75	

	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN ANT 1+2	802.11n-HT20	CH 52	5260	MCS8	14.28	14.5	91.54
		CH 56	5280		14.10	14.5	
		CH 60	5300		14.02	14.5	
		CH 64	5320		14.01	14.5	
	802.11n-HT40	CH 54	5270	MCS8	13.55	14	83.33
		CH 62	5310		13.45	14	
	802.11ac-VHT20	CH 52	5260	MCS0	13.37	14	87.28
		CH 56	5280		13.10	14	
		CH 60	5300		13.03	14	
		CH 64	5320		13.12	14	
	802.11ac-VHT40	CH 54	5270	MCS0	13.58	14	78.70
		CH 62	5310		13.39	14	
802.11ac-VHT80	CH 58	5290	MCS0	13.30	14	65.75	

	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.5GHz WLAN ANT 1+2	802.11n-HT20	CH 100	5500	MCS8	13.44	13.5	91.54
		CH 116	5580		12.97	13.5	
		CH 124	5620		12.99	13.5	
		CH 132	5660		12.86	13.5	
		CH 140	5700		12.89	13.5	
	802.11n-HT40	CH 102	5510	MCS8	12.84	13	83.33
		CH 110	5550		12.69	13	
		CH 126	5630		12.30	13	
		CH 134	5670		11.92	13	
	802.11ac-VHT20	CH 100	5500	MCS0	12.44	13	87.28
		CH 116	5580		11.93	13	
		CH 124	5620		12.17	13	
		CH 132	5660		11.72	13	
		CH 140	5700		12.12	13	
	802.11ac-VHT40	CH 102	5510	MCS0	12.85	13	78.70
		CH 110	5550		12.68	13	
		CH 126	5630		12.39	13	
		CH 134	5670		12.00	13	
	802.11ac-VHT80	CH 106	5530	MCS0	12.45	13	65.75
		CH 122	5610		11.84	13	

	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.8GHz WLAN ANT 1+2	802.11n-HT20	CH 149	5745	MCS8	9.41	10.0	91.54
		CH 157	5785		9.14	9.5	
		CH 165	5825		9.09	9.5	
	802.11n-HT40	CH 151	5755	MCS8	7.58	8.5	83.33
		CH 159	5795		8.03	8.5	
	802.11ac-VHT20	CH 149	5745	MCS0	7.29	8.5	87.28
		CH 157	5785		8.09	8.5	
		CH 165	5825		7.75	8.5	
	802.11ac-VHT40	CH 151	5755	MCS0	7.61	8	78.70
		CH 159	5795		7.96	8	
	802.11ac-VHT80	CH 155	5775	MCS0	8.99	9.5	65.75



<2.4GHz Bluetooth>


General Note:

- 1. For 2.4GHz Bluetooth SAR testing was selected 1Mbps, due to its highest average power.

Mode	Channel	Frequency (MHz)	Average power (dBm)		
			1Mbps	2Mbps	3Mbps
v3.0 with EDR	CH 00	2402	7.40	4.74	4.71
	CH 39	2441	8.89	5.76	5.72
	CH 78	2480	6.83	3.68	3.76
Tune-up Limit			9		

Mode	Channel	Frequency (MHz)	Average power (dBm)
			GFSK
v4.1 with LE	CH 00	2402	3.65
	CH 19	2440	6.16
	CH 39	2480	4.83
Tune-up Limit			6.5

14. Antenna Location

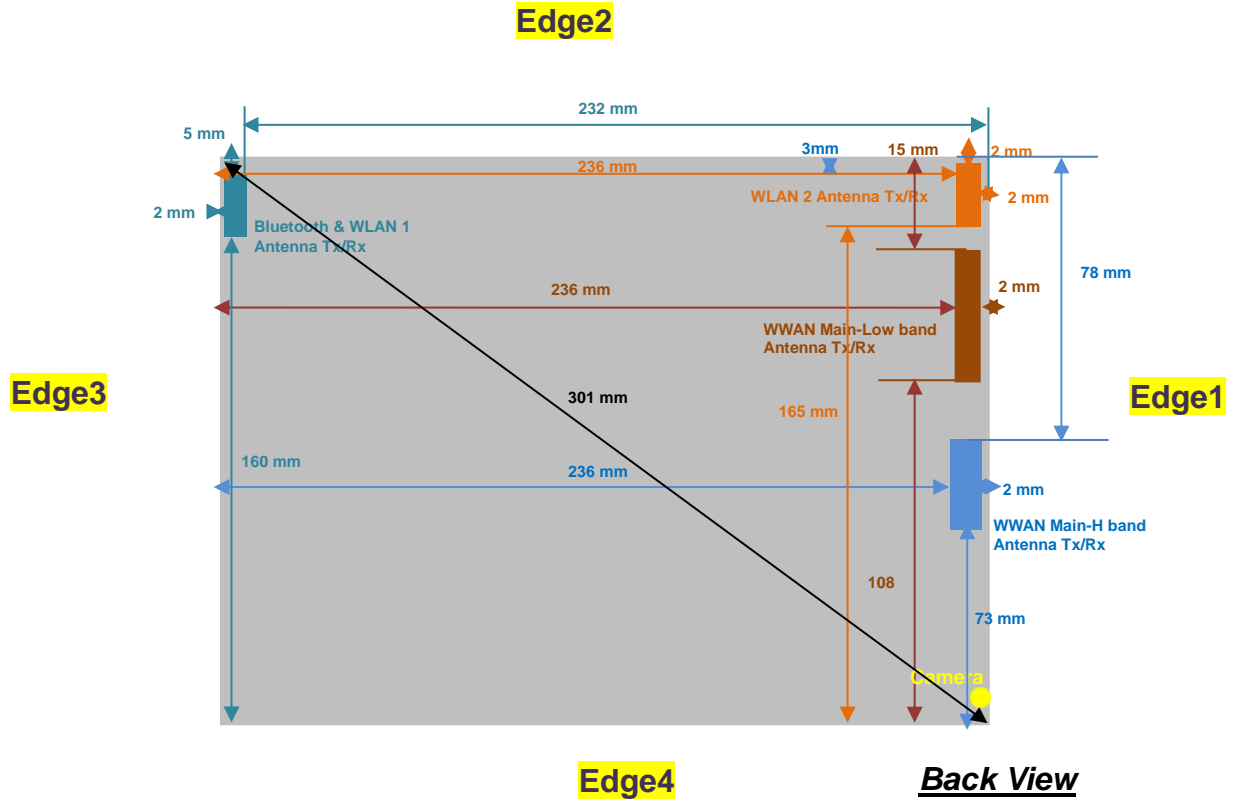



General Note:

1. The below table, when the distance is < 50 mm exclusion threshold is "Ratio", when the distance is > 50 mm exclusion threshold is "mW"
2. Maximum power is the source-based time-average power and represents the maximum RF output power among production units
3. Per KDB 447498 D01v06, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
4. Per KDB 447498 D01v06, standalone SAR test exclusion threshold is applied; If the test separation distance is < 5mm, 5mm is used to determine SAR exclusion threshold.
5. Per KDB 447498 D01v06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:
 - $[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR
 - f(GHz) is the RF channel transmit frequency in GHz
 - Power and distance are rounded to the nearest mW and mm before calculation
 - The result is rounded to one decimal place for comparison
6. Per KDB 447498 D01v06, at 100 MHz to 6 GHz and for *test separation distances* > 50 mm, the SAR test exclusion threshold is determined according to the following
 - a) [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · (f(MHz)/150)] mW, at 100 MHz to 1500 MHz
 - b) [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · 10] mW at > 1500 MHz and ≤ 6 GHz

Exclusion High Band

Exposure Position	Wireless Interface	GPRS 1900 (3Tx Slots)	WCDMA Band IV	WCDMA Band II	LTE Band 4	LTE Band 2	LTE Band 7
	Calculated Frequency	1909MHz	1750MHz	1907MHz	1754MHz	1909MHz	2570MHz
Maximum power (dBm)	21.74	24	24.5	23.5	23	19.5	
Maximum rated power(mW)	149.0	251.0	282.0	224.0	200.0	89.0	
Bottom Face	Separation distance(mm)	5.0					
	exclusion threshold	41.2	66.4	77.9	59.3	55.3	28.5
	Testing required?	Yes	Yes	Yes	Yes	Yes	Yes
Edge 1	Separation distance(mm)	5.0					
	exclusion threshold	41.2	66.4	77.9	59.3	55.3	28.5
	Testing required?	Yes	Yes	Yes	Yes	Yes	Yes
Edge 2	Separation distance(mm)	78.0					
	exclusion threshold	389.0	393.0	389.0	393.0	389.0	374.0
	Testing required?	No	No	No	No	No	No
Edge 3	Separation distance(mm)	236.0					
	exclusion threshold	1969.0	1973.0	1969.0	1973.0	1969.0	1954.0
	Testing required?	No	No	No	No	No	No
Edge 4	Separation distance(mm)	73.0					
	exclusion threshold(mW)	339.0	343.0	339.0	343.0	339.0	324.0
	Testing required?	No	No	No	No	No	No



Exposure Position	Wireless Interface	2.4GHz WLAN ANT 1	2.4GHz WLAN ANT 2	2.4GHz WLAN ANT 1+2	5GHz WLAN ANT 1	5GHz WLAN ANT 2	5GHz WLAN ANT 1+2
Exposure Position	Calculated Frequency	2462MHz	2462MHz	2462MHz	5825MHz	5825MHz	5825MHz
	Maximum power (dBm)	16	16	15	12	13.5	14.5
	Maximum rated power(mW)	40.0	40.0	32.0	16.0	22.0	28.0
Bottom Face	Separation distance(mm)	5.0	5.0	5.0	5.0	5.0	5.0
	exclusion threshold	12.6	12.6	10.0	7.7	10.6	13.5
	Testing required?	Yes	Yes	Yes	Yes	Yes	Yes
Edge 1	Separation distance(mm)	232.0	2.0	2.0	232.0	2.0	2.0
	exclusion threshold	1916.0	12.6	10.0	1882.0	10.6	13.5
	Testing required?	No	Yes	Yes	No	Yes	Yes
Edge 2	Separation distance(mm)	5.0	2.0	2.0	5.0	2.0	2.0
	exclusion threshold	12.6	12.6	10.0	7.7	10.6	13.5
	Testing required?	Yes	Yes	Yes	Yes	Yes	Yes
Edge 3	Separation distance(mm)	2.0	236.0	2.0	2.0	236.0	2.0
	exclusion threshold	12.6	1956.0	10.0	7.7	1922.0	13.5
	Testing required?	Yes	No	Yes	Yes	No	Yes
Edge 4	Separation distance(mm)	160.0	165.0	160.0	160.0	165.0	160.0
	exclusion threshold(mW)	1196.0	1246.0	1196.0	1162.0	1212.0	1162.0
	Testing required?	No	No	No	No	No	No



Exclusion SAR Low Band

Exposure Position	Wireless Interface	GPRS 850 (4Tx Slots)	WCDMA Band V	LTE Band 12	LTE Band 17	LTE Band 5
	Calculated Frequency	848MHz	846MHz	715MHz	713MHz	848MHz
	Maximum power (dBm)	25	23.50	23	23	23
	Maximum rated power(mW)	316.0	224.0	200.0	200.0	200.0
Bottom Face	Separation distance(mm)	5.0				
	exclusion threshold	58.2	41.2	33.8	33.8	36.8
	Testing required?	Yes	Yes	Yes	Yes	Yes
Edge 1	Separation distance(mm)	2.0				
	exclusion threshold	58.2	41.2	33.8	33.8	36.8
	Testing required?	Yes	Yes	Yes	Yes	Yes
Edge 2	Separation distance(mm)	15.0				
	exclusion threshold	19.4	13.7	11.3	11.3	12.3
	Testing required?	Yes	Yes	Yes	Yes	Yes
Edge 3	Separation distance(mm)	236.0				
	exclusion threshold(mW)	1214.0	1212.0	1064.0	1062.0	1214.0
	Testing required?	No	No	No	No	No
Edge 4	Separation distance(mm)	108.0				
	exclusion threshold(mW)	491.0	490.0	454.0	453.0	491.0
	Testing required?	No	No	No	No	No

15. SAR Test Results

General Note:

- Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - For WLAN: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
- Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
- Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥0.8W/kg.

Tablet Note:

- For the exposure positions that proximity sensor power reduction is applied for SAR compliance, additional SAR testing with EUT transmitting full power in normal mode was performed; 10mm for bottom face, 10mm for edge1
- Considering the curvature transition from bottom face to the edge, SAR testing at the curvature was performed. The SAR test setup is included in test setup photo exhibit.
- For SAR testing of the curved region of the device, the device was placed directly against the phantom at the point where the distance between the antenna and device exterior is a minimum.

GSM Note:

- Per KDB 941225 D01v03r01, for body SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance, for modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested, therefore, the GPRS 4Tx slots modes was selected for GSM850 and GPRS 3Tx slots modes was selected for GSM1900 when EUT operating without power back-off, the GPRS 4Tx slots modes was selected for GSM850/GSM1900 when EUT operating with power back-off, according to the highest source-based time-averaged output power.

UMTS Note:

- Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
- Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. If the maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is ≤ ¼ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

LTE Note:

- Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
- Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
- Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
- Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is > not ½ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.



5. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is > not ½ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B12 / B5 / B4 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
7. LTE band 17 SAR test was covered by Band 12; according to TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. The maximum output power, including tolerance, for the smaller band is ≤ the larger band to qualify for the SAR test exclusion.
 - b. The channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band.

WLAN Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. Per KDB 248227 D01v02r02, for U-NII-1 band antenna 1 Body SAR testing is required for U-NII-1 band higher tune up power than the U-NII-2A band.
3. Per KDB 248227 D01v02r02, for U-NII-2A band antenna 1 Body testing is not required when the U-NII-1 band highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-2A band.
4. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
5. During SAR testing the WLAN transmission was verified using a spectrum analyzer.
6. WLAN and Bluetooth distance SAR tested for co-located with WWAN analysis.



15.1 Body SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS 4 Tx slots	Bottom Face	0	Sensor On	128	824.2	19.06	19.50	1.107	0.11	0.33	0.365
	GSM850	GPRS 4 Tx slots	Edge1	0	Sensor On	128	824.2	19.06	19.50	1.107	0.14	0.236	0.261
	GSM850	GPRS 4 Tx slots	Curved surface of Edge1	0	Sensor On	128	824.2	19.06	19.50	1.107	0.17	0.324	0.359
	GSM850	GPRS 4 Tx slots	Edge2	0	Sensor Off	128	824.2	27.36	28.00	1.159	0.05	0.404	0.468
	GSM850	GPRS 4 Tx slots	Bottom Face	10	Sensor Off	128	824.2	27.36	28.00	1.159	-0.13	0.454	0.526
	GSM850	GPRS 4 Tx slots	Edge1	10	Sensor Off	128	824.2	27.36	28.00	1.159	-0.05	0.333	0.386
	GSM850	GPRS 4 Tx slots	Bottom Face	10	Sensor Off	189	836.4	27.23	28.00	1.194	0.16	0.527	0.629
01	GSM850	GPRS 4 Tx slots	Bottom Face	10	Sensor Off	251	848.8	27.30	28.00	1.175	-0.05	0.588	0.691
	GSM1900	GPRS 4 Tx slots	Bottom Face	0	Sensor On	810	1909.8	19.66	20.00	1.081	0	0.681	0.736
	GSM1900	GPRS 4 Tx slots	Edge1	0	Sensor On	810	1909.8	19.66	20.00	1.081	0.15	0.693	0.749
	GSM1900	GPRS 4 Tx slots	Curved surface of Edge1	0	Sensor On	810	1909.8	19.66	20.00	1.081	-0.09	0.859	0.929
	GSM1900	GPRS 3 Tx slots	Bottom Face	10	Sensor Off	810	1909.8	25.40	26.00	1.148	-0.14	0.351	0.403
	GSM1900	GPRS 3 Tx slots	Edge1	10	Sensor Off	810	1909.8	25.40	26.00	1.148	0.02	0.352	0.404
02	GSM1900	GPRS 4 Tx slots	Curved surface of Edge1	0	Sensor On	512	1850.2	19.27	20.00	1.183	0.03	0.946	1.119
	GSM1900	GPRS 4 Tx slots	Curved surface of Edge1	0	Sensor On	661	1880	19.31	20.00	1.172	-0.07	0.938	1.100



<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA V	RMC 12.2Kbps	Bottom Face	0	Sensor On	4132	826.4	16.67	17.00	1.079	0.11	0.433	0.467
	WCDMA V	RMC 12.2Kbps	Edge1	0	Sensor On	4132	826.4	16.67	17.00	1.079	0.13	0.305	0.329
	WCDMA V	RMC 12.2Kbps	Curved surface of Edge1	0	Sensor On	4132	826.4	16.67	17.00	1.079	-0.06	0.416	0.449
	WCDMA V	RMC 12.2Kbps	Edge2	0	Sensor Off	4132	826.4	23.26	23.50	1.057	0.03	0.381	0.403
	WCDMA V	RMC 12.2Kbps	Bottom Face	10	Sensor Off	4132	826.4	23.26	23.50	1.057	0.01	0.301	0.318
	WCDMA V	RMC 12.2Kbps	Edge1	10	Sensor Off	4132	826.4	23.26	23.50	1.057	0.1	0.428	0.452
03	WCDMA V	RMC 12.2Kbps	Bottom Face	0	Sensor On	4182	836.4	16.53	17.00	1.114	-0.01	0.443	0.494
	WCDMA V	RMC 12.2Kbps	Bottom Face	0	Sensor On	4233	846.6	16.57	17.00	1.104	-0.09	0.445	0.491
	WCDMA IV	RMC 12.2Kbps	Bottom Face	0	Sensor On	1413	1732.6	14.90	15.50	1.148	0.09	0.708	0.813
	WCDMA IV	RMC 12.2Kbps	Bottom Face	0	Sensor On	1312	1712.4	14.73	15.50	1.194	0.12	0.705	0.842
	WCDMA IV	RMC 12.2Kbps	Bottom Face	0	Sensor On	1513	1752.6	14.74	15.50	1.191	0.14	0.776	0.924
	WCDMA IV	RMC 12.2Kbps	Edge1	0	Sensor On	1413	1732.6	14.90	15.50	1.148	0.16	0.678	0.778
	WCDMA IV	RMC 12.2Kbps	Curved surface of Edge1	0	Sensor On	1413	1732.6	14.90	15.50	1.148	0.01	0.831	0.954
	WCDMA IV	RMC 12.2Kbps	Curved surface of Edge1	0	Sensor On	1312	1712.4	14.73	15.50	1.194	0.05	0.811	0.968
04	WCDMA IV	RMC 12.2Kbps	Curved surface of Edge1	0	Sensor On	1513	1752.6	14.74	15.50	1.191	0.09	0.924	1.101
	WCDMA IV	RMC 12.2Kbps	Bottom Face	10	Sensor Off	1513	1752.6	23.95	24.00	1.012	-0.16	0.836	0.846
	WCDMA IV	RMC 12.2Kbps	Bottom Face	10	Sensor Off	1312	1712.4	23.42	24.00	1.143	-0.11	0.707	0.808
	WCDMA IV	RMC 12.2Kbps	Bottom Face	10	Sensor Off	1413	1732.6	23.59	24.00	1.099	0.12	0.752	0.826
	WCDMA IV	RMC 12.2Kbps	Edge1	10	Sensor Off	1513	1752.6	23.95	24.00	1.012	0.17	0.558	0.564
	WCDMA II	RMC 12.2Kbps	Bottom Face	0	Sensor On	9538	1907.6	15.89	16.00	1.026	-0.15	0.707	0.725
	WCDMA II	RMC 12.2Kbps	Edge1	0	Sensor On	9538	1907.6	15.89	16.00	1.026	0.11	0.708	0.726
	WCDMA II	RMC 12.2Kbps	Curved surface of Edge1	0	Sensor On	9538	1907.6	15.89	16.00	1.026	0.03	0.912	0.935
	WCDMA II	RMC 12.2Kbps	Bottom Face	10	Sensor Off	9538	1907.6	24.02	24.50	1.117	-0.14	0.645	0.720
	WCDMA II	RMC 12.2Kbps	Edge1	10	Sensor Off	9538	1907.6	24.02	24.50	1.117	0.07	0.625	0.698
05	WCDMA II	RMC 12.2Kbps	Curved surface of Edge1	0	Sensor On	9262	1852.4	15.58	16.00	1.102	0.13	1.02	1.124
	WCDMA II	RMC 12.2Kbps	Curved surface of Edge1	0	Sensor On	9400	1880	15.54	16.00	1.112	-0.09	0.943	1.048



<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 12	10M	QPSK	1RB	0Offset	Bottom Face	0	Sensor On	23095	707.5	19.85	20.50	1.161	0.07	0.413	0.480
	LTE Band 12	10M	QPSK	25RB	0Offset	Bottom Face	0	Sensor On	23095	707.5	18.88	19.50	1.153	0.16	0.337	0.389
	LTE Band 12	10M	QPSK	1RB	0Offset	Edge1	0	Sensor On	23095	707.5	19.85	20.50	1.161	0.09	0.42	0.488
	LTE Band 12	10M	QPSK	25RB	0Offset	Edge1	0	Sensor On	23095	707.5	18.88	19.50	1.153	0.15	0.348	0.401
	LTE Band 12	10M	QPSK	1RB	0Offset	Curved surface of Edge1	0	Sensor On	23095	707.5	19.85	20.50	1.161	-0.12	0.383	0.445
	LTE Band 12	10M	QPSK	25RB	0Offset	Curved surface of Edge1	0	Sensor On	23095	707.5	18.88	19.50	1.153	-0.19	0.308	0.355
	LTE Band 12	10M	QPSK	1RB	0Offset	Edge2	0	Sensor Off	23095	707.5	22.69	23.00	1.074	-0.05	0.227	0.244
	LTE Band 12	10M	QPSK	25RB	0Offset	Edge2	0	Sensor Off	23095	707.5	21.73	22.00	1.064	-0.1	0.181	0.193
	LTE Band 12	10M	QPSK	1RB	0Offset	Bottom Face	10	Sensor Off	23095	707.5	22.69	23.00	1.074	-0.07	0.316	0.339
	LTE Band 12	10M	QPSK	25RB	0Offset	Bottom Face	10	Sensor Off	23095	707.5	21.73	22.00	1.064	0.13	0.264	0.281
	LTE Band 12	10M	QPSK	1RB	0Offset	Edge1	10	Sensor Off	23095	707.5	22.69	23.00	1.074	0.14	0.223	0.239
	LTE Band 12	10M	QPSK	25RB	0Offset	Edge1	10	Sensor Off	23095	707.5	21.73	22.00	1.064	0.13	0.122	0.130
	LTE Band 12	10M	QPSK	1RB	0Offset	Edge1	0	Sensor On	23060	704	19.98	20.50	1.127	-0.03	0.41	0.462
06	LTE Band 12	10M	QPSK	1RB	0Offset	Edge1	0	Sensor On	23130	711	19.82	20.50	1.169	0.03	0.428	0.501
	LTE Band 5	10M	QPSK	1RB	0Offset	Bottom Face	0	Sensor On	20525	836.5	16.65	17.00	1.084	-0.11	0.452	0.490
	LTE Band 5	10M	QPSK	25RB	0Offset	Bottom Face	0	Sensor On	20525	836.5	15.65	16.00	1.084	-0.09	0.352	0.382
	LTE Band 5	10M	QPSK	1RB	0Offset	Edge1	0	Sensor On	20525	836.5	16.65	17.00	1.084	-0.03	0.337	0.365
	LTE Band 5	10M	QPSK	25RB	0Offset	Edge1	0	Sensor On	20525	836.5	15.65	16.00	1.084	0.17	0.269	0.292
	LTE Band 5	10M	QPSK	1RB	0Offset	Curved surface of Edge1	0	Sensor On	20525	836.5	16.65	17.00	1.084	0.19	0.456	0.494
	LTE Band 5	10M	QPSK	25RB	0Offset	Curved surface of Edge1	0	Sensor On	20525	836.5	15.65	16.00	1.084	0.05	0.387	0.419
	LTE Band 5	10M	QPSK	1RB	0Offset	Edge2	0	Sensor Off	20525	836.5	22.68	23.00	1.076	0.14	0.398	0.428
	LTE Band 5	10M	QPSK	25RB	0Offset	Edge2	0	Sensor Off	20525	836.5	21.53	22.00	1.114	0.05	0.185	0.206
07	LTE Band 5	10M	QPSK	1RB	0Offset	Bottom Face	10	Sensor Off	20525	836.5	22.68	23.00	1.076	-0.14	0.635	0.684
	LTE Band 5	10M	QPSK	25RB	0Offset	Bottom Face	10	Sensor Off	20525	836.5	21.53	22.00	1.114	0.06	0.516	0.575
	LTE Band 5	10M	QPSK	1RB	0Offset	Edge1	10	Sensor Off	20525	836.5	22.68	23.00	1.076	-0.11	0.57	0.614
	LTE Band 5	10M	QPSK	25RB	0Offset	Edge1	10	Sensor Off	20525	836.5	21.53	22.00	1.114	-0.14	0.461	0.514
	LTE Band 5	10M	QPSK	1RB	0Offset	Bottom Face	10	Sensor Off	20450	829	22.62	23.00	1.091	0.13	0.522	0.570
	LTE Band 5	10M	QPSK	1RB	0Offset	Bottom Face	10	Sensor Off	20600	844	22.58	23.00	1.102	0.12	0.538	0.593



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 4	20M	QPSK	1RB	49Offset	Bottom Face	0	Sensor On	20175	1732.5	14.90	15.50	1.148	0.09	0.536	0.615
	LTE Band 4	20M	QPSK	50RB	0Offset	Bottom Face	0	Sensor On	20175	1732.5	14.08	14.50	1.102	0.07	0.449	0.495
	LTE Band 4	20M	QPSK	1RB	49Offset	Edge1	0	Sensor On	20175	1732.5	14.90	15.50	1.148	0.02	0.674	0.774
	LTE Band 4	20M	QPSK	50RB	0Offset	Edge1	0	Sensor On	20175	1732.5	14.08	14.50	1.102	0.19	0.567	0.625
08	LTE Band 4	20M	QPSK	1RB	49Offset	Curved surface of Edge1	0	Sensor On	20175	1732.5	14.90	15.50	1.148	0.05	0.847	0.972
	LTE Band 4	20M	QPSK	1RB	49Offset	Curved surface of Edge1	0	Sensor On	20050	1720	14.49	15.50	1.262	-0.13	0.759	0.958
	LTE Band 4	20M	QPSK	1RB	49Offset	Curved surface of Edge1	0	Sensor On	20300	1745	14.85	15.50	1.161	-0.02	0.801	0.930
	LTE Band 4	20M	QPSK	50RB	0Offset	Curved surface of Edge1	0	Sensor On	20175	1732.5	14.08	14.50	1.102	0.19	0.742	0.817
	LTE Band 4	20M	QPSK	100RB	0Offset	Curved surface of Edge1	0	Sensor On	20175	1732.5	14.03	14.50	1.114	0.15	0.754	0.840
	LTE Band 4	20M	QPSK	1RB	0Offset	Bottom Face	10	Sensor Off	20175	1732.5	23.38	23.50	1.028	-0.16	0.663	0.682
	LTE Band 4	20M	QPSK	50RB	0Offset	Bottom Face	10	Sensor Off	20175	1732.5	22.18	22.50	1.076	0.05	0.532	0.573
	LTE Band 4	20M	QPSK	1RB	0Offset	Edge1	10	Sensor Off	20175	1732.5	23.38	23.50	1.028	0.02	0.424	0.436
	LTE Band 4	20M	QPSK	50RB	0Offset	Edge1	10	Sensor Off	20175	1732.5	22.18	22.50	1.076	0.15	0.382	0.411
	LTE Band 2	20M	QPSK	1RB	0Offset	Bottom Face	0	Sensor On	18900	1880	13.99	14.50	1.125	0.01	0.59	0.664
	LTE Band 2	20M	QPSK	50RB	0Offset	Bottom Face	0	Sensor On	18900	1880	13.11	13.50	1.094	0.1	0.495	0.542
	LTE Band 2	20M	QPSK	1RB	0Offset	Edge1	0	Sensor On	18900	1880	13.99	14.50	1.125	0.12	0.614	0.691
	LTE Band 2	20M	QPSK	50RB	0Offset	Edge1	0	Sensor On	18900	1880	13.11	13.50	1.094	0.12	0.502	0.549
	LTE Band 2	20M	QPSK	1RB	0Offset	Curved surface of Edge1	0	Sensor On	18900	1880	13.99	14.50	1.125	-0.19	0.744	0.837
09	LTE Band 2	20M	QPSK	1RB	0Offset	Curved surface of Edge1	0	Sensor On	18700	1860	13.59	14.50	1.233	-0.05	0.701	0.864
	LTE Band 2	20M	QPSK	1RB	0Offset	Curved surface of Edge1	0	Sensor On	19100	1900	13.79	14.50	1.178	0.16	0.73	0.860
	LTE Band 2	20M	QPSK	50RB	0Offset	Curved surface of Edge1	0	Sensor On	18900	1880	13.11	13.50	1.094	0.13	0.61	0.667
	LTE Band 2	20M	QPSK	100RB	0Offset	Curved surface of Edge1	0	Sensor On	18900	1880	12.96	13.50	1.132	-0.15	0.611	0.692
	LTE Band 2	20M	QPSK	1RB	0Offset	Bottom Face	10	Sensor Off	18900	1880	22.40	23.00	1.148	0.08	0.559	0.642
	LTE Band 2	20M	QPSK	50RB	0Offset	Bottom Face	10	Sensor Off	18900	1880	21.10	22.00	1.230	-0.03	0.467	0.575
	LTE Band 2	20M	QPSK	1RB	0Offset	Edge1	10	Sensor Off	18900	1880	22.40	23.00	1.148	0.02	0.457	0.525
	LTE Band 2	20M	QPSK	50RB	0Offset	Edge1	10	Sensor Off	18900	1880	21.10	22.00	1.230	0.05	0.393	0.483



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 7	20M	QPSK	1RB	0Offset	Bottom Face	0	Sensor On	21350	2560	12.87	13.00	1.030	0.11	0.442	0.455
	LTE Band 7	20M	QPSK	50RB	0Offset	Bottom Face	0	Sensor On	21350	2560	11.88	12.00	1.028	-0.04	0.371	0.381
	LTE Band 7	20M	QPSK	1RB	0Offset	Edge1	0	Sensor On	21350	2560	12.87	13.00	1.030	0.07	0.56	0.577
	LTE Band 7	20M	QPSK	50RB	0Offset	Edge1	0	Sensor On	21350	2560	11.88	12.00	1.028	0.06	0.476	0.489
	LTE Band 7	20M	QPSK	1RB	0Offset	Curved surface of Edge1	0	Sensor On	21350	2560	12.87	13.00	1.030	0.16	0.868	0.894
10	LTE Band 7	20M	QPSK	1RB	0Offset	Curved surface of Edge1	0	Sensor On	20850	2510	12.54	13.00	1.112	0.02	0.949	1.055
	LTE Band 7	20M	QPSK	1RB	0Offset	Curved surface of Edge1	0	Sensor On	21100	2535	12.68	13.00	1.076	0.05	0.868	0.934
	LTE Band 7	20M	QPSK	50RB	0Offset	Curved surface of Edge1	0	Sensor On	21350	2560	11.88	12.00	1.028	0.11	0.709	0.729
	LTE Band 7	20M	QPSK	100RB	0Offset	Curved surface of Edge1	0	Sensor On	21350	2560	11.82	12.00	1.042	0.13	0.653	0.681
	LTE Band 7	20M	QPSK	1RB	0Offset	Bottom Face	10	Sensor Off	21350	2560	19.03	19.50	1.114	0.02	0.58	0.646
	LTE Band 7	20M	QPSK	50RB	0Offset	Bottom Face	10	Sensor Off	21350	2560	18.08	18.50	1.102	0.13	0.49	0.540
	LTE Band 7	20M	QPSK	1RB	0Offset	Edge1	10	Sensor Off	21350	2560	19.03	19.50	1.114	0.09	0.653	0.728
	LTE Band 7	20M	QPSK	50RB	0Offset	Edge1	10	Sensor Off	21350	2560	18.08	18.50	1.102	0.03	0.556	0.612



<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Bottom Face	0	Ant 1	6	2437	15.54	16.00	1.112	98.62	1.014	-0.11	0.247	0.278
	WLAN2.4GHz	802.11b 1Mbps	Edge2	0	Ant 1	6	2437	15.54	16.00	1.112	98.62	1.014	0.13	0.232	0.262
	WLAN2.4GHz	802.11b 1Mbps	Edge3	0	Ant 1	6	2437	15.54	16.00	1.112	98.62	1.014	0.02	0.408	0.460
	WLAN2.4GHz	802.11b 1Mbps	Curved surface of Edge3	0	Ant 1	6	2437	15.54	16.00	1.112	98.62	1.014	0.11	0.533	0.601
	WLAN2.4GHz	802.11b 1Mbps	Bottom Face	10	Ant 1	6	2437	15.54	16.00	1.112	98.62	1.014	0.01	0.034	0.038
	WLAN2.4GHz	802.11b 1Mbps	Curved surface of Edge3	0	Ant 1	1	2412	15.42	16.00	1.143	98.62	1.014	0.1	0.663	0.768
11	WLAN2.4GHz	802.11b 1Mbps	Curved surface of Edge3	0	Ant 1	11	2462	15.35	16.00	1.161	98.62	1.014	0.03	0.772	0.909
	WLAN2.4GHz	802.11b 1Mbps	Bottom Face	0	Ant 2	6	2437	15.60	16.00	1.096	99.08	1.009	0.15	0.475	0.526
	WLAN2.4GHz	802.11b 1Mbps	Edge1	0	Ant 2	6	2437	15.60	16.00	1.096	99.08	1.009	0.16	0.23	0.254
	WLAN2.4GHz	802.11b 1Mbps	Curved surface of Edge1	0	Ant 2	6	2437	15.60	16.00	1.096	99.08	1.009	-0.15	0.419	0.464
	WLAN2.4GHz	802.11b 1Mbps	Edge2	0	Ant 2	6	2437	15.60	16.00	1.096	99.08	1.009	-0.07	0.938	1.038
	WLAN2.4GHz	802.11b 1Mbps	Bottom Face	10	Ant 2	6	2437	15.60	16.00	1.096	99.08	1.009	0.09	0.0882	0.098
	WLAN2.4GHz	802.11b 1Mbps	Edge1	10	Ant 2	6	2437	15.60	16.00	1.096	99.08	1.009	-0.15	0.043	0.048
	WLAN2.4GHz	802.11b 1Mbps	Edge2	0	Ant 2	1	2412	15.30	15.50	1.047	99.08	1.009	-0.06	0.939	0.992
12	WLAN2.4GHz	802.11b 1Mbps	Edge2	0	Ant 2	11	2462	14.92	15.50	1.143	99.08	1.009	0.06	0.949	1.094
	WLAN2.4GHz	802.11n-HT20	Bottom Face	0	Ant 1+2	6	2437	14.91	15.00	1.021	91.3	1.095	0.16	0.24	0.268
	WLAN2.4GHz	802.11n-HT20	Edge1	0	Ant 1+2	6	2437	14.91	15.00	1.021	91.3	1.095	0.11	0.1	0.112
	WLAN2.4GHz	802.11n-HT20	Curved surface of Edge1	0	Ant 1+2	6	2437	14.91	15.00	1.021	91.3	1.095	0.13	0.198	0.221
13	WLAN2.4GHz	802.11n-HT20	Edge2	0	Ant 1+2	6	2437	14.91	15.00	1.021	91.3	1.095	-0.11	0.367	0.410
	WLAN2.4GHz	802.11n-HT20	Edge3	0	Ant 1+2	6	2437	14.91	15.00	1.021	91.3	1.095	0.16	0.294	0.329
	WLAN2.4GHz	802.11n-HT20	Curved surface of Edge3	0	Ant 1+2	6	2437	14.91	15.00	1.021	91.3	1.095	0.06	0.221	0.247
	WLAN2.4GHz	802.11n-HT20	Bottom Face	10	Ant 1+2	6	2437	14.91	15.00	1.021	91.3	1.095	0.12	0.0362	0.040
	WLAN2.4GHz	802.11n-HT20	Edge1	10	Ant 1+2	6	2437	14.91	15.00	1.021	91.3	1.095	0.13	0.0176	0.020
	WLAN2.4GHz	802.11n-HT20	Edge2	0	Ant 1+2	1	2412	14.70	15.00	1.072	91.3	1.095	-0.14	0.342	0.401
	WLAN2.4GHz	802.11n-HT20	Edge2	0	Ant 1+2	11	2462	14.69	15.00	1.074	91.3	1.095	-0.05	0.321	0.378



Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN 5.2GHz	802.11a 6Mbps	Bottom Face	0	Ant 1	48	5240	11.49	12.00	1.125	93.38	1.071	-0.03	0.304	0.366
	WLAN 5.2GHz	802.11a 6Mbps	Edge2	0	Ant 1	48	5240	11.49	12.00	1.125	93.38	1.071	-0.01	0.074	0.089
	WLAN 5.2GHz	802.11a 6Mbps	Edge3	0	Ant 1	48	5240	11.49	12.00	1.125	93.38	1.071	0.1	0.213	0.257
14	WLAN 5.2GHz	802.11a 6Mbps	Curved surface of Edge3	0	Ant 1	48	5240	11.49	12.00	1.125	93.38	1.071	-0.05	0.79	0.952
	WLAN 5.2GHz	802.11a 6Mbps	Bottom Face	10	Ant 1	48	5240	11.49	12.00	1.125	93.38	1.071	0.06	0.0188	0.023
	WLAN 5.2GHz	802.11a 6Mbps	Curved surface of Edge3	0	Ant 1	36	5180	11.36	12.00	1.159	93.38	1.071	-0.07	0.509	0.632
	WLAN 5.2GHz	802.11a 6Mbps	Curved surface of Edge3	0	Ant 1	40	5200	11.39	12.00	1.151	93.38	1.071	0.02	0.574	0.707
	WLAN 5.3GHz	802.11a 6Mbps	Bottom Face	0	Ant 2	52	5260	13.26	13.50	1.057	93.46	1.070	0.12	0.443	0.501
	WLAN 5.3GHz	802.11a 6Mbps	Edge1	0	Ant 2	52	5260	13.26	13.50	1.057	93.46	1.070	0.18	0.482	0.545
15	WLAN 5.3GHz	802.11a 6Mbps	Curved surface of Edge1	0	Ant 2	52	5260	13.26	13.50	1.057	93.46	1.070	0.1	0.912	1.031
	WLAN 5.3GHz	802.11a 6Mbps	Edge2	0	Ant 2	52	5260	13.26	13.50	1.057	93.46	1.070	0.08	0.253	0.286
	WLAN 5.3GHz	802.11a 6Mbps	Bottom Face	10	Ant 2	52	5260	13.26	13.50	1.057	93.46	1.070	0.05	0.0341	0.039
	WLAN 5.3GHz	802.11a 6Mbps	Edge1	10	Ant 2	52	5260	13.26	13.50	1.057	93.46	1.070	0.13	0.0691	0.078
	WLAN 5.3GHz	802.11a 6Mbps	Curved surface of Edge1	0	Ant 2	64	5320	13.21	13.50	1.069	93.46	1.070	0.03	0.761	0.870
	WLAN 5.3GHz	802.11a 6Mbps	Curved surface of Edge1	0	Ant 2	60	5300	13.12	13.50	1.091	93.46	1.070	0.1	0.83	0.969
	WLAN 5.3GHz	802.11n-HT20 MCS0	Bottom Face	0	Ant 1+2	52	5260	14.28	14.50	1.052	91.54	1.092	-0.05	0.335	0.385
	WLAN 5.3GHz	802.11n-HT20 MCS0	Edge1	0	Ant 1+2	52	5260	14.28	14.50	1.052	91.54	1.092	-0.17	0.37	0.425
	WLAN 5.3GHz	802.11n-HT20 MCS0	Curved surface of Edge1	0	Ant 1+2	52	5260	14.28	14.50	1.052	91.54	1.092	-0.11	0.461	0.530
	WLAN 5.3GHz	802.11n-HT20 MCS0	Edge2	0	Ant 1+2	52	5260	14.28	14.50	1.052	91.54	1.092	0.14	0.172	0.198
	WLAN 5.3GHz	802.11n-HT20 MCS0	Edge3	0	Ant 1+2	52	5260	14.28	14.50	1.052	91.54	1.092	0.13	0.221	0.254
	WLAN 5.3GHz	802.11n-HT20 MCS0	Curved surface of Edge3	0	Ant 1+2	52	5260	14.28	14.50	1.052	91.54	1.092	0.15	0.555	0.638
	WLAN 5.3GHz	802.11n-HT20 MCS0	Bottom Face	10	Ant 1+2	52	5260	14.28	14.50	1.052	91.54	1.092	0.14	0.035	0.040
	WLAN 5.3GHz	802.11n-HT20 MCS0	Edge1	10	Ant 1+2	52	5260	14.28	14.50	1.052	91.54	1.092	-0.05	0.055	0.063
16	WLAN 5.3GHz	802.11n-HT20 MCS0	Curved surface of Edge3	0	Ant 1+2	60	5300	14.02	14.50	1.117	91.54	1.092	0.03	0.745	0.909
	WLAN 5.3GHz	802.11n-HT20 MCS0	Curved surface of Edge3	0	Ant 1+2	64	5320	14.01	14.50	1.119	91.54	1.092	0.17	0.734	0.897



Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN5.5GHz	802.11a 6Mbps	Bottom Face	0	Ant 1	100	5500	10.25	10.50	1.059	93.38	1.071	-0.1	0.153	0.174
	WLAN5.5GHz	802.11a 6Mbps	Edge2	0	Ant 1	100	5500	10.25	10.50	1.059	93.38	1.071	0.1	0.05	0.057
	WLAN5.5GHz	802.11a 6Mbps	Edge3	0	Ant 1	100	5500	10.25	10.50	1.059	93.38	1.071	0.01	0.204	0.231
	WLAN5.5GHz	802.11a 6Mbps	Curved surface of Edge3	0	Ant 1	100	5500	10.25	10.50	1.059	93.38	1.071	-0.05	0.382	0.433
	WLAN5.5GHz	802.11a 6Mbps	Bottom Face	10	Ant 1	100	5500	10.25	10.50	1.059	93.38	1.071	-0.06	0.011	0.012
	WLAN5.5GHz	802.11a 6Mbps	Curved surface of Edge3	0	Ant 1	116	5580	9.72	10.50	1.197	93.38	1.071	-0.15	0.34	0.436
17	WLAN5.5GHz	802.11a 6Mbps	Curved surface of Edge3	0	Ant 1	140	5700	9.61	10.50	1.227	93.38	1.071	0.07	0.642	0.844
	WLAN5.5GHz	802.11a 6Mbps	Bottom Face	0	Ant 2	116	5580	10.83	11.00	1.040	93.46	1.070	-0.11	0.329	0.366
	WLAN5.5GHz	802.11a 6Mbps	Edge1	0	Ant 2	116	5580	10.83	11.00	1.040	93.46	1.070	0.13	0.393	0.437
18	WLAN5.5GHz	802.11a 6Mbps	Curved surface of Edge1	0	Ant 2	116	5580	10.83	11.00	1.040	93.46	1.070	-0.15	0.919	1.023
	WLAN5.5GHz	802.11a 6Mbps	Edge2	0	Ant 2	116	5580	10.83	11.00	1.040	93.46	1.070	0.15	0.079	0.088
	WLAN5.5GHz	802.11a 6Mbps	Bottom Face	10	Ant 2	116	5580	10.83	11.00	1.040	93.46	1.070	0.02	0.04	0.045
	WLAN5.5GHz	802.11a 6Mbps	Edge1	10	Ant 2	116	5580	10.83	11.00	1.040	93.46	1.070	0.07	0.05	0.056
	WLAN5.5GHz	802.11a 6Mbps	Curved surface of Edge1	0	Ant 2	100	5500	10.72	11.00	1.067	93.46	1.070	0.08	0.665	0.759
	WLAN5.5GHz	802.11a 6Mbps	Curved surface of Edge1	0	Ant 2	140	5700	10.68	11.00	1.076	93.46	1.070	-0.18	0.589	0.678
	WLAN5.5GHz	802.11n-HT20 MCS0	Bottom Face	0	Ant 1+2	100	5500	13.44	13.50	1.014	91.54	1.092	0.11	0.196	0.217
	WLAN5.5GHz	802.11n-HT20 MCS0	Edge1	0	Ant 1+2	100	5500	13.44	13.50	1.014	91.54	1.092	0.13	0.339	0.375
	WLAN5.5GHz	802.11n-HT20 MCS0	Curved surface of Edge1	0	Ant 1+2	100	5500	13.44	13.50	1.014	91.54	1.092	0.05	0.623	0.690
	WLAN5.5GHz	802.11n-HT20 MCS0	Edge2	0	Ant 1+2	100	5500	13.44	13.50	1.014	91.54	1.092	-0.07	0.052	0.058
	WLAN5.5GHz	802.11n-HT20 MCS0	Edge3	0	Ant 1+2	100	5500	13.44	13.50	1.014	91.54	1.092	-0.04	0.192	0.213
	WLAN5.5GHz	802.11n-HT20 MCS0	Curved surface of Edge3	0	Ant 1+2	100	5500	13.44	13.50	1.014	91.54	1.092	0.02	0.344	0.381
	WLAN5.5GHz	802.11n-HT20 MCS0	Bottom Face	10	Ant 1+2	100	5500	13.44	13.50	1.014	91.54	1.092	0.12	0.028	0.031
	WLAN5.5GHz	802.11n-HT20 MCS0	Edge1	10	Ant 1+2	100	5500	13.44	13.50	1.014	91.54	1.092	-0.17	0.0631	0.070
19	WLAN5.5GHz	802.11n-HT20 MCS0	Curved surface of Edge1	0	Ant 1+2	116	5580	12.97	13.50	1.130	91.54	1.092	0.02	0.587	0.724
	WLAN5.5GHz	802.11n-HT20 MCS0	Curved surface of Edge1	0	Ant 1+2	140	5700	12.89	13.50	1.151	91.54	1.092	0.02	0.399	0.501



Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN5.8GHz	802.11a 6Mbps	Bottom Face	0	Ant 1	149	5745	6.55	7.00	1.109	93.38	1.071	0.04	0.306	0.364
	WLAN5.8GHz	802.11a 6Mbps	Edge2	0	Ant 1	149	5745	6.55	7.00	1.109	93.38	1.071	0.15	0.063	0.075
	WLAN5.8GHz	802.11a 6Mbps	Edge3	0	Ant 1	149	5745	6.55	7.00	1.109	93.38	1.071	0.18	0.332	0.394
	WLAN5.8GHz	802.11a 6Mbps	Curved surface of Edge3	0	Ant 1	149	5745	6.55	7.00	1.109	93.38	1.071	0.11	0.621	0.738
	WLAN5.8GHz	802.11a 6Mbps	Bottom Face	10	Ant 1	149	5745	6.55	7.00	1.109	93.38	1.071	-0.12	0.022	0.026
20	WLAN5.8GHz	802.11a 6Mbps	Curved surface of Edge3	0	Ant 1	157	5785	6.29	7.00	1.178	93.38	1.071	0.14	0.726	0.916
	WLAN5.8GHz	802.11a 6Mbps	Curved surface of Edge3	0	Ant 1	165	5825	6.36	7.00	1.159	93.38	1.071	-0.04	0.625	0.776
	WLAN5.8GHz	802.11a 6Mbps	Bottom Face	0	Ant 2	149	5745	12.22	12.50	1.067	93.46	1.070	0.17	0.229	0.261
	WLAN5.8GHz	802.11a 6Mbps	Edge1	0	Ant 2	149	5745	12.22	12.50	1.067	93.46	1.070	-0.16	0.408	0.466
	WLAN5.8GHz	802.11a 6Mbps	Curved surface of Edge1	0	Ant 2	149	5745	12.22	12.50	1.067	93.46	1.070	0.02	0.816	0.931
	WLAN5.8GHz	802.11a 6Mbps	Edge2	0	Ant 2	149	5745	12.22	12.50	1.067	93.46	1.070	-0.04	0.052	0.059
	WLAN5.8GHz	802.11a 6Mbps	Bottom Face	10	Ant 2	149	5745	12.22	12.50	1.067	93.46	1.070	0.07	0.0304	0.035
	WLAN5.8GHz	802.11a 6Mbps	Edge1	10	Ant 2	149	5745	12.22	12.50	1.067	93.46	1.070	0.09	0.064	0.073
	WLAN5.8GHz	802.11a 6Mbps	Curved surface of Edge1	0	Ant 2	157	5785	12.11	12.50	1.094	93.46	1.070	-0.12	0.757	0.886
21	WLAN5.8GHz	802.11a 6Mbps	Curved surface of Edge1	0	Ant 2	165	5825	11.95	12.50	1.135	93.46	1.070	-0.08	0.769	0.934
	WLAN5.8GHz	802.11n-HT20 MCS0	Bottom Face	0	Ant 1+2	149	5745	9.41	10.00	1.146	91.54	1.092	0.1	0.191	0.239
	WLAN5.8GHz	802.11n-HT20 MCS0	Edge1	0	Ant 1+2	149	5745	9.41	10.00	1.146	91.54	1.092	0.02	0.0931	0.116
	WLAN5.8GHz	802.11n-HT20 MCS0	Curved surface of Edge1	0	Ant 1+2	149	5745	9.41	10.00	1.146	91.54	1.092	-0.13	0.189	0.236
	WLAN5.8GHz	802.11n-HT20 MCS0	Edge2	0	Ant 1+2	149	5745	9.41	10.00	1.146	91.54	1.092	-0.06	0.027	0.034
	WLAN5.8GHz	802.11n-HT20 MCS0	Edge3	0	Ant 1+2	149	5745	9.41	10.00	1.146	91.54	1.092	0.13	0.222	0.278
	WLAN5.8GHz	802.11n-HT20 MCS0	Curved surface of Edge3	0	Ant 1+2	149	5745	9.41	10.00	1.146	91.54	1.092	0.05	0.568	0.711
	WLAN5.8GHz	802.11n-HT20 MCS0	Bottom Face	10	Ant 1+2	149	5745	9.41	10.00	1.146	91.54	1.092	-0.16	0.0343	0.043
	WLAN5.8GHz	802.11n-HT20 MCS0	Edge1	10	Ant 1+2	149	5745	9.41	10.00	1.146	91.54	1.092	-0.02	0.01	0.013
22	WLAN5.8GHz	802.11n-HT20 MCS0	Curved surface of Edge3	0	Ant 1+2	157	5785	9.14	9.50	1.086	91.54	1.092	-0.18	0.762	0.904
	WLAN5.8GHz	802.11n-HT20 MCS0	Curved surface of Edge3	0	Ant 1+2	165	5825	9.09	9.50	1.099	91.54	1.092	0.11	0.574	0.689



<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Bottom Face	0	Ant 1	39	2441	8.89	9.00	1.026	0.13	0.068	0.070
	Bluetooth	1Mbps	Edge2	0	Ant 1	39	2441	8.89	9.00	1.026	0.05	0.059	0.061
	Bluetooth	1Mbps	Edge3	0	Ant 1	39	2441	8.89	9.00	1.026	-0.16	0.066	0.068
	Bluetooth	1Mbps	Curved surface of Edge3	0	Ant 1	39	2441	8.89	9.00	1.026	-0.02	0.089	0.091
	Bluetooth	1Mbps	Bottom Face	10	Ant 1	39	2441	8.89	9.00	1.026	0.11	0.00365	0.004
23	Bluetooth	1Mbps	Curved surface of Edge3	0	Ant 1	0	2402	7.40	9.00	1.445	-0.02	0.119	0.172
	Bluetooth	1Mbps	Curved surface of Edge3	0	Ant 1	78	2480	6.83	9.00	1.648	0.1	0.0783	0.129



15.2 Repeated SAR Measurement

No.	Band	BW (MHz)	Mode	RB Size	RB offset	Test Position	Gap (mm)	Antenna	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	WCDMA IV	-	RMC 12.2Kbps	-	-	Curved surface of Edge1	0	-	Sensor On	1513	1752.6	14.74	15.50	1.191	-	-	0.09	0.924	1	1.101
2nd	WCDMA IV	-	RMC 12.2Kbps	-	-	Curved surface of Edge1	0	-	Sensor On	1513	1752.6	14.74	15.50	1.191	-	-	0.02	0.922	1.002	1.098
1st	WCDMA II	-	RMC 12.2Kbps	-	-	Curved surface of Edge1	0	-	Sensor On	9262	1852.4	15.58	16.00	1.102	-	-	0.13	1.02	1	1.124
2nd	WCDMA II	-	RMC 12.2Kbps	-	-	Curved surface of Edge1	0	-	Sensor On	9262	1852.4	15.58	16.00	1.102	-	-	0.05	1.01	1.010	1.113
1st	LTE Band 7	20M	QPSK	1RB	0Offset	Curved surface of Edge1	0	-	Sensor On	20850	2510	12.54	13.00	1.112	-	-	0.02	0.949	1	1.055
2nd	LTE Band 7	20M	QPSK	1RB	0Offset	Curved surface of Edge1	0	-	Sensor On	20850	2510	12.54	13.00	1.112	-	-	0.13	0.945	1.004	1.051
1st	WLAN2.4GHz	-	802.11b 1Mbps	-	-	Edge2	0	Ant 2	-	11	2462	14.92	15.50	1.143	99.08	1.009	0.06	0.949	1	1.094
2nd	WLAN2.4GHz	-	802.11b 1Mbps	-	-	Edge2	0	Ant 2	-	11	2462	14.92	15.50	1.143	99.08	1.009	0.13	0.947	1.002	1.092
1st	WLAN5.3GHz	-	802.11a 6Mbps	-	-	Curved surface of Edge1	0	Ant 2	-	52	5260	13.26	13.50	1.057	93.46	1.070	0.1	0.912	1	1.031
2nd	WLAN5.3GHz	-	802.11a 6Mbps	-	-	Curved surface of Edge1	0	Ant 2	-	52	5260	13.26	13.50	1.057	93.46	1.070	0.05	0.904	1.009	1.022
1st	WLAN5.5GHz	-	802.11a 6Mbps	-	-	Curved surface of Edge1	0	Ant 2	-	116	5580	10.83	11.00	1.040	93.46	1.070	-0.15	0.919	1	1.023
2nd	WLAN5.5GHz	-	802.11a 6Mbps	-	-	Curved surface of Edge1	0	Ant 2	-	116	5580	10.83	11.00	1.040	93.46	1.070	-0.03	0.917	1.002	1.020
1st	WLAN5.8GHz	-	802.11a 6Mbps	-	-	Curved surface of Edge1	0	Ant 2	-	149	5745	12.22	12.50	1.067	93.46	1.070	0.02	0.816	1	0.931
2nd	WLAN5.8GHz	-	802.11a 6Mbps	-	-	Curved surface of Edge1	0	Ant 2	-	149	5745	12.22	12.50	1.067	93.46	1.070	-0.03	0.811	1.006	0.926

General Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8W/kg$.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR $< 1.45W/kg$, only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated *measured SAR*.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

16. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Tablet	Note
		Body	
1.	GPRS/EDGE + WLAN2.4GHz(SISO)	Yes	Hotspot
2.	WCDMA + WLAN2.4GHz(SISO)	Yes	Hotspot
3.	LTE + WLAN2.4GHz(SISO)	Yes	Hotspot
4.	GPRS/EDGE + WLAN2.4GHz(MIMO)	Yes	Hotspot
5.	WCDMA + WLAN2.4GHz(MIMO)	Yes	Hotspot
6.	LTE + WLAN2.4GHz(MIMO)	Yes	Hotspot
7.	GPRS/EDGE + Bluetooth	Yes	Bluetooth Tethering
8.	WCDMA+ Bluetooth	Yes	Bluetooth Tethering
9.	LTE + Bluetooth	Yes	Bluetooth Tethering
10.	GPRS/EDGE + WLAN5GHz(SISO)	Yes	WIFI Direct
11.	WCDMA + WLAN5GHz(SISO)	Yes	WIFI Direct
12.	LTE + WLAN5GHz(SISO)	Yes	WIFI Direct
13.	GPRS/EDGE + WLAN5GHz(MIMO)	Yes	WIFI Direct
14.	WCDMA + WLAN5GHz(MIMO)	Yes	WIFI Direct
15.	LTE + WLAN5GHz(MIMO)	Yes	WIFI Direct

General Note:

1. WLAN Ant 1 and Bluetooth share the same antenna, and cannot transmit simultaneously.
2. EUT will choose either WLAN 2.4GHz or WLAN 5GHz according to the network signal condition; therefore, 2.4GHz WLAN and 5GHz WLAN will not operate simultaneously at any moment.
3. EUT will choose each GSM, WCDMA, LTE according to the network signal condition; therefore, they will not operate simultaneously at any moment.
4. ALL WLAN 5G chose the worse SAR for co-located with WWAN analysis.
5. The Scaled SAR summation is calculated based on the same configuration and test position.
6. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - i) Scalar SAR summation < 1.6W/kg.
 - ii) $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - iii) If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.

16.1 Body Exposure Conditions

WWAN Band	Exposure Position	1	2	3	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	SPLSR	Case No	
		WWAN	2.4GHz WLAN Ant 1	2.4GHz WLAN Ant 2					
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)					
GSM	GSM850	Bottom Face at 10mm	0.691	0.038	0.098	0.73	0.79		
		Edge1 at 10mm	0.386		0.048	0.39	0.43		
		Curved surface of Edge1	0.359		0.464	0.36	0.82		
		Bottom Face at 0mm	0.365	0.278	0.526	0.64	0.89		
		Edge1 at 0mm	0.261		0.254	0.26	0.52		
		Edge2 at 0mm	0.468	0.262	1.094	0.73	1.56		
		Edge3 at 0mm		0.460		0.46			
	Curved surface of Edge3		0.909		0.91				
	GSM1900	Bottom Face at 10mm	0.403	0.038	0.098	0.44	0.50		
		Edge1 at 10mm	0.404		0.048	0.40	0.45		
		Curved surface of Edge1	1.119		0.464	1.12	1.58		
		Bottom Face at 0mm	0.736	0.278	0.526	1.01	1.26		
		Edge1 at 0mm	0.749		0.254	0.75	1.00		
		Edge2 at 0mm		0.262	1.094	0.26	1.09		
Edge3 at 0mm			0.460		0.46	0.00			
Curved surface of Edge3		0.909		0.91	0.00				
WCDMA	WCDMA II	Bottom Face at 10mm	0.720	0.038	0.098	0.76	0.82		
		Edge1 at 10mm	0.698		0.048	0.70	0.75		
		Curved surface of Edge1	1.124		0.464	1.12	1.59		
		Bottom Face at 0mm	0.725	0.278	0.526	1.00	1.25		
		Edge1 at 0mm	0.726		0.254	0.73	0.98		
		Edge2 at 0mm		0.262	1.094	0.26	1.09		
		Edge3 at 0mm		0.460		0.46			
	Curved surface of Edge3		0.909		0.91				
	WCDMA IV	Bottom Face at 10mm	0.846	0.038	0.098	0.88	0.94		
		Edge1 at 10mm	0.564		0.048	0.56	0.61		
		Curved surface of Edge1	1.101		0.464	1.10	1.57		
		Bottom Face at 0mm	0.924	0.278	0.526	1.20	1.45		
		Edge1 at 0mm	0.778		0.254	0.78	1.03		
		Edge2 at 0mm		0.262	1.094	0.26	1.09		
Edge3 at 0mm			0.460		0.46				



WCDMA V	Curved surface of Edge3		0.909		0.91				
	Bottom Face at 10mm	0.318	0.038	0.098	0.36	0.42			
	Edge1 at 10mm	0.452		0.048	0.45	0.50			
	Curved surface of Edge1	0.449		0.464	0.45	0.91			
	Bottom Face at 0mm	0.494	0.278	0.526	0.77	1.02			
	Edge1 at 0mm	0.329		0.254	0.33	0.58			
	Edge2 at 0mm	0.403	0.262	1.094	0.67	1.50			
	Edge3 at 0mm		0.460		0.46				
Curved surface of Edge3		0.909		0.91					
LTE	LTE Band 12	Bottom Face at 10mm	0.339	0.038	0.098	0.38	0.44		
		Edge1 at 10mm	0.239		0.048	0.24	0.29		
		Curved surface of Edge1	0.445		0.464	0.45	0.91		
		Bottom Face at 0mm	0.480	0.278	0.526	0.76	1.01		
		Edge1 at 0mm	0.501		0.254	0.50	0.76		
		Edge2 at 0mm	0.244	0.262	1.094	0.51	1.34		
		Edge3 at 0mm		0.460		0.46			
		Curved surface of Edge3		0.909		0.91			
	LTE Band 5	Bottom Face at 10mm	0.684	0.038	0.098	0.72	0.78		
		Edge1 at 10mm	0.614		0.048	0.61	0.66		
		Curved surface of Edge1	0.494		0.464	0.49	0.96		
		Bottom Face at 0mm	0.490	0.278	0.526	0.77	1.02		
		Edge1 at 0mm	0.365		0.254	0.37	0.62		
		Edge2 at 0mm	0.428	0.262	1.094	0.69	1.52		
		Edge3 at 0mm		0.460		0.46			
		Curved surface of Edge3		0.909		0.91			
	LTE Band 4	Bottom Face at 10mm	0.682	0.038	0.098	0.72	0.78		
		Edge1 at 10mm	0.436		0.048	0.44	0.48		
		Curved surface of Edge1	0.972		0.464	0.97	1.44		
		Bottom Face at 0mm	0.615	0.278	0.526	0.89	1.14		
		Edge1 at 0mm	0.774		0.254	0.77	1.03		
		Edge2 at 0mm		0.262	1.094	0.26	1.09		
		Edge3 at 0mm		0.460		0.46			
		Curved surface of Edge3		0.909		0.91			
	LTE Band 2	Bottom Face at 10mm	0.642	0.038	0.098	0.68	0.74		
		Edge1 at 10mm	0.525		0.048	0.53	0.57		
		Curved surface of Edge1	0.864		0.464	0.86	1.33		
		Bottom Face at 0mm	0.664	0.278	0.526	0.94	1.19		
Edge1 at 0mm		0.691		0.254	0.69	0.95			



LTE Band 7	Edge2 at 0mm		0.262	1.094	0.26	1.09		
	Edge3 at 0mm		0.460		0.46			
	Curved surface of Edge3		0.909		0.91			
	Bottom Face at 10mm	0.646	0.038	0.098	0.68	0.74		
	Edge1 at 10mm	0.728		0.048	0.73	0.78		
	Curved surface of Edge1	1.055		0.464	1.06	1.52		
	Bottom Face at 0mm	0.455	0.278	0.526	0.73	0.98		
	Edge1 at 0mm	0.577		0.254	0.58	0.83		
	Edge2 at 0mm		0.262	1.094	0.26	1.09		
	Edge3 at 0mm		0.460		0.46			
Curved surface of Edge3		0.909		0.91				



WWAN Band	Exposure Position	1	2	3	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	SPLSR	Case No	
		WWAN	5GHz WLAN Ant 1	5GHz WLAN Ant 2					
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)					
GSM	GSM850	Bottom Face at 10mm	0.691	0.026	0.045	0.72	0.74		
		Edge1 at 10mm	0.386		0.078	0.39	0.46		
		Curved surface of Edge1	0.359		1.031	0.36	1.39		
		Bottom Face at 0mm	0.365	0.366	0.501	0.73	0.87		
		Edge1 at 0mm	0.261		0.545	0.26	0.81		
		Edge2 at 0mm	0.468	0.089	0.286	0.56	0.75		
		Edge3 at 0mm		0.394		0.39			
		Curved surface of Edge3		0.952		0.95			
	GSM1900	Bottom Face at 10mm	0.403	0.026	0.045	0.43	0.45		
		Edge1 at 10mm	0.404		0.078	0.40	0.48		
		Curved surface of Edge1	1.119		1.031	1.12	2.15	0.04	#01
		Bottom Face at 0mm	0.736	0.366	0.501	1.10	1.24		
		Edge1 at 0mm	0.749		0.545	0.75	1.29		
		Edge2 at 0mm		0.089	0.286	0.09	0.29		
Edge3 at 0mm			0.394		0.39				
WCDMA II	Bottom Face at 10mm	0.720	0.026	0.045	0.75	0.77			
	Edge1 at 10mm	0.698		0.078	0.70	0.78			
	Curved surface of Edge1	1.124		1.031	1.12	2.16	0.04	#02	
	Bottom Face at 0mm	0.725	0.366	0.501	1.09	1.23			
	Edge1 at 0mm	0.726		0.545	0.73	1.27			
	Edge2 at 0mm		0.089	0.286	0.09	0.29			
	Edge3 at 0mm		0.394		0.39				
	Curved surface of Edge3		0.952		0.95				
WCDMA IV	Bottom Face at 10mm	0.846	0.026	0.045	0.87	0.89			
	Edge1 at 10mm	0.564		0.078	0.56	0.64			
	Curved surface of Edge1	1.101		1.031	1.10	2.13	0.04	#03	
	Bottom Face at 0mm	0.924	0.366	0.501	1.29	1.43			
	Edge1 at 0mm	0.778		0.545	0.78	1.32			
	Edge2 at 0mm		0.089	0.286	0.09	0.29			
	Edge3 at 0mm		0.394		0.39				
	Curved surface of Edge3		0.952		0.95				
WCDMA V	Bottom Face at 10mm	0.318	0.026	0.045	0.34	0.36			



LTE		Edge1 at 10mm	0.452		0.078	0.45	0.53		
		Curved surface of Edge1	0.449		1.031	0.45	1.48		
		Bottom Face at 0mm	0.494	0.366	0.501	0.86	1.00		
		Edge1 at 0mm	0.329		0.545	0.33	0.87		
		Edge2 at 0mm	0.403	0.089	0.286	0.49	0.69		
		Edge3 at 0mm		0.394		0.39			
		Curved surface of Edge3		0.952		0.95			
	LTE Band 12	Bottom Face at 10mm	0.339	0.026	0.045	0.37	0.38		
		Edge1 at 10mm	0.239		0.078	0.24	0.32		
		Curved surface of Edge1	0.445		1.031	0.45	1.48		
		Bottom Face at 0mm	0.480	0.366	0.501	0.85	0.98		
		Edge1 at 0mm	0.501		0.545	0.50	1.05		
		Edge2 at 0mm	0.244	0.089	0.286	0.33	0.53		
		Edge3 at 0mm		0.394		0.39			
	LTE Band 5	Bottom Face at 10mm	0.684	0.026	0.045	0.71	0.73		
		Edge1 at 10mm	0.614		0.078	0.61	0.69		
		Curved surface of Edge1	0.494		1.031	0.49	1.53		
		Bottom Face at 0mm	0.490	0.366	0.501	0.86	0.99		
		Edge1 at 0mm	0.365		0.545	0.37	0.91		
		Edge2 at 0mm	0.428	0.089	0.286	0.52	0.71		
		Edge3 at 0mm		0.394		0.39			
	LTE Band 4	Bottom Face at 10mm	0.682	0.026	0.045	0.71	0.73		
		Edge1 at 10mm	0.436		0.078	0.44	0.51		
		Curved surface of Edge1	0.972		1.031	0.97	2.00	0.04	#04
		Bottom Face at 0mm	0.615	0.366	0.501	0.98	1.12		
		Edge1 at 0mm	0.774		0.545	0.77	1.32		
		Edge2 at 0mm		0.089	0.286	0.09	0.29		
		Edge3 at 0mm		0.394		0.39			
	LTE Band 2	Bottom Face at 10mm	0.642	0.026	0.045	0.67	0.69		
		Edge1 at 10mm	0.525		0.078	0.53	0.60		
Curved surface of Edge1		0.864		1.031	0.86	1.90	0.03	#05	
Bottom Face at 0mm		0.664	0.366	0.501	1.03	1.17			
Edge1 at 0mm		0.691		0.545	0.69	1.24			
Edge2 at 0mm			0.089	0.286	0.09	0.29			
Edge3 at 0mm			0.394		0.39				



LTE Band 7	Curved surface of Edge3		0.952		0.95			
	Bottom Face at 10mm	0.646	0.026	0.045	0.67	0.69		
	Edge1 at 10mm	0.728		0.078	0.73	0.81		
	Curved surface of Edge1	1.055		1.031	1.06	2.09	0.04	#06
	Bottom Face at 0mm	0.455	0.366	0.501	0.82	0.96		
	Edge1 at 0mm	0.577		0.545	0.58	1.12		
	Edge2 at 0mm		0.089	0.286	0.09	0.29		
	Edge3 at 0mm		0.394		0.39			
	Curved surface of Edge3		0.952		0.95			



WWAN Band	Exposure Position	1	2	3	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	SPLSR	Case No		
		WWAN	2.4GHz WLAN Ant 1+2	5GHz WLAN Ant 1+2						
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)						
GSM	GSM850	Bottom Face at 10mm	0.691	0.040	0.043	0.73	0.73			
		Edge1 at 10mm	0.386	0.020	0.070	0.41	0.46			
		Curved surface of Edge1	0.359	0.221	0.724	0.58	1.08			
		Bottom Face at 0mm	0.365	0.268	0.385	0.63	0.75			
		Edge1 at 0mm	0.261	0.112	0.425	0.37	0.69			
		Edge2 at 0mm	0.468	0.410	0.198	0.88	0.67			
		Edge3 at 0mm		0.329	0.278	0.33	0.28			
		Curved surface of Edge3		0.247	0.909	0.25	0.91			
	GSM1900	Bottom Face at 10mm	0.403	0.040	0.043	0.44	0.45			
		Edge1 at 10mm	0.404	0.020	0.070	0.42	0.47			
		Curved surface of Edge1	1.119	0.221	0.724	1.34	1.84	0.03	#07	
		Bottom Face at 0mm	0.736	0.268	0.385	1.00	1.12			
		Edge1 at 0mm	0.749	0.112	0.425	0.86	1.17			
		Edge2 at 0mm		0.410	0.198	0.41	0.20			
		Edge3 at 0mm		0.329	0.278	0.33	0.28			
		Curved surface of Edge3		0.247	0.909	0.25	0.91			
	WCDMA II	Bottom Face at 10mm	0.720	0.040	0.043	0.76	0.76			
		Edge1 at 10mm	0.698	0.020	0.070	0.72	0.77			
		Curved surface of Edge1	1.124	0.221	0.724	1.35	1.85	0.03	#08	
		Bottom Face at 0mm	0.725	0.268	0.385	0.99	1.11			
		Edge1 at 0mm	0.726	0.112	0.425	0.84	1.15			
		Edge2 at 0mm		0.410	0.198	0.41	0.20			
		Edge3 at 0mm		0.329	0.278	0.33	0.28			
		Curved surface of Edge3		0.247	0.909	0.25	0.91			
	WCDMA	WCDMA IV	Bottom Face at 10mm	0.846	0.040	0.043	0.89	0.89		
			Edge1 at 10mm	0.564	0.020	0.070	0.58	0.63		
			Curved surface of Edge1	1.101	0.221	0.724	1.32	1.83	0.03	#09
			Bottom Face at 0mm	0.924	0.268	0.385	1.19	1.31		
Edge1 at 0mm			0.778	0.112	0.425	0.89	1.20			
Edge2 at 0mm				0.410	0.198	0.41	0.20			
Edge3 at 0mm				0.329	0.278	0.33	0.28			
Curved surface of Edge3				0.247	0.909	0.25	0.91			
WCDMA V		Bottom Face at 10mm	0.318	0.040	0.043	0.36	0.36			



LTE	LTE Band 12	Edge1 at 10mm	0.452	0.020	0.070	0.47	0.52		
		Curved surface of Edge1	0.449	0.221	0.724	0.67	1.17		
		Bottom Face at 0mm	0.494	0.268	0.385	0.76	0.88		
		Edge1 at 0mm	0.329	0.112	0.425	0.44	0.75		
		Edge2 at 0mm	0.403	0.410	0.198	0.81	0.60		
		Edge3 at 0mm		0.329	0.278	0.33	0.28		
		Curved surface of Edge3		0.247	0.909	0.25	0.91		
	LTE Band 5	Bottom Face at 10mm	0.339	0.040	0.043	0.38	0.38		
		Edge1 at 10mm	0.239	0.020	0.070	0.26	0.31		
		Curved surface of Edge1	0.445	0.221	0.724	0.67	1.17		
		Bottom Face at 0mm	0.480	0.268	0.385	0.75	0.87		
		Edge1 at 0mm	0.501	0.112	0.425	0.61	0.93		
		Edge2 at 0mm	0.244	0.410	0.198	0.65	0.44		
		Edge3 at 0mm		0.329	0.278	0.33	0.28		
	LTE Band 4	Bottom Face at 10mm	0.684	0.040	0.043	0.72	0.73		
		Edge1 at 10mm	0.614	0.020	0.070	0.63	0.68		
		Curved surface of Edge1	0.494	0.221	0.724	0.72	1.22		
		Bottom Face at 0mm	0.490	0.268	0.385	0.76	0.88		
		Edge1 at 0mm	0.365	0.112	0.425	0.48	0.79		
		Edge2 at 0mm	0.428	0.410	0.198	0.84	0.63		
		Edge3 at 0mm		0.329	0.278	0.33	0.28		
	LTE Band 2	Bottom Face at 10mm	0.682	0.040	0.043	0.72	0.73		
		Edge1 at 10mm	0.436	0.020	0.070	0.46	0.51		
		Curved surface of Edge1	0.972	0.221	0.724	1.19	1.70	0.03	#10
		Bottom Face at 0mm	0.615	0.268	0.385	0.88	1.00		
		Edge1 at 0mm	0.774	0.112	0.425	0.89	1.20		
		Edge2 at 0mm		0.410	0.198	0.41	0.20		
		Edge3 at 0mm		0.329	0.278	0.33	0.28		
	LTE Band 2	Curved surface of Edge3		0.247	0.909	0.25	0.91		
		Bottom Face at 10mm	0.642	0.040	0.043	0.68	0.69		
Edge1 at 10mm		0.525	0.020	0.070	0.55	0.60			
Curved surface of Edge1		0.864	0.221	0.724	1.09	1.59			
Bottom Face at 0mm		0.664	0.268	0.385	0.93	1.05			
Edge1 at 0mm		0.691	0.112	0.425	0.80	1.12			
Edge2 at 0mm			0.410	0.198	0.41	0.20			
Edge3 at 0mm		0.329	0.278	0.33	0.28				



LTE Band 7	Curved surface of Edge3		0.247	0.909	0.25	0.91		
	Bottom Face at 10mm	0.646	0.040	0.043	0.69	0.69		
	Edge1 at 10mm	0.728	0.020	0.070	0.75	0.80		
	Curved surface of Edge1	1.055	0.221	0.724	1.28	1.78	0.03	#11
	Bottom Face at 0mm	0.455	0.268	0.385	0.72	0.84		
	Edge1 at 0mm	0.577	0.112	0.425	0.69	1.00		
	Edge2 at 0mm		0.410	0.198	0.41	0.20		
	Edge3 at 0mm		0.329	0.278	0.33	0.28		
	Curved surface of Edge3		0.247	0.909	0.25	0.91		



WWAN Band	Exposure Position	1	2	1+2 Summed 1g SAR (W/kg)	SPLSR	Case No	
		WWAN	Bluetooth Ant 1				
		1g SAR (W/kg)	1g SAR (W/kg)				
GSM	GSM850	Bottom Face at 10mm	0.691	0.004	0.70		
		Edge1 at 10mm	0.386		0.39		
		Curved surface of Edge1	0.359		0.36		
		Bottom Face at 0mm	0.365	0.070	0.44		
		Edge1 at 0mm	0.261		0.26		
		Edge2 at 0mm	0.468	0.061	0.53		
		Edge3 at 0mm		0.068	0.07		
		Curved surface of Edge3		0.172	0.17		
	GSM1900	Bottom Face at 10mm	0.403	0.004	0.41		
		Edge1 at 10mm	0.404		0.40		
		Curved surface of Edge1	1.119		1.12		
		Bottom Face at 0mm	0.736	0.070	0.81		
		Edge1 at 0mm	0.749		0.75		
		Edge2 at 0mm		0.061	0.06		
		Edge3 at 0mm		0.068	0.07		
		Curved surface of Edge3		0.172	0.17		
	WCDMA II	Bottom Face at 10mm	0.720	0.004	0.72		
		Edge1 at 10mm	0.698		0.70		
		Curved surface of Edge1	1.124		1.12		
		Bottom Face at 0mm	0.725	0.070	0.80		
		Edge1 at 0mm	0.726		0.73		
		Edge2 at 0mm		0.061	0.06		
		Edge3 at 0mm		0.068	0.07		
		Curved surface of Edge3		0.172	0.17		
	WCDMA IV	Bottom Face at 10mm	0.846	0.004	0.85		
		Edge1 at 10mm	0.564		0.56		
		Curved surface of Edge1	1.101		1.10		
		Bottom Face at 0mm	0.924	0.070	0.99		
Edge1 at 0mm		0.778		0.78			
Edge2 at 0mm			0.061	0.06			
Edge3 at 0mm			0.068	0.07			
Curved surface of Edge3			0.172	0.17			
WCDMA V	Bottom Face at 10mm	0.318	0.004	0.32			
	Edge1 at 10mm	0.452		0.45			
	Curved surface of Edge1	0.449		0.45			
	Bottom Face at 0mm	0.494	0.070	0.56			
	Edge1 at 0mm	0.329		0.33			



LTE		Edge2 at 0mm	0.403	0.061	0.46		
		Edge3 at 0mm		0.068	0.07		
		Curved surface of Edge3		0.172	0.17		
	LTE Band 12	Bottom Face at 10mm	0.339	0.004	0.34		
		Edge1 at 10mm	0.239		0.24		
		Curved surface of Edge1	0.445		0.45		
		Bottom Face at 0mm	0.480	0.070	0.55		
		Edge1 at 0mm	0.501		0.50		
		Edge2 at 0mm	0.244	0.061	0.31		
		Edge3 at 0mm		0.068	0.07		
		Curved surface of Edge3		0.172	0.17		
	LTE Band 5	Bottom Face at 10mm	0.684	0.004	0.69		
		Edge1 at 10mm	0.614		0.61		
		Curved surface of Edge1	0.494		0.49		
		Bottom Face at 0mm	0.490	0.070	0.56		
		Edge1 at 0mm	0.365		0.37		
		Edge2 at 0mm	0.428	0.061	0.49		
		Edge3 at 0mm		0.068	0.07		
		Curved surface of Edge3		0.172	0.17		
	LTE Band 4	Bottom Face at 10mm	0.682	0.004	0.69		
		Edge1 at 10mm	0.436		0.44		
		Curved surface of Edge1	0.972		0.97		
		Bottom Face at 0mm	0.615	0.070	0.69		
		Edge1 at 0mm	0.774		0.77		
		Edge2 at 0mm		0.061	0.06		
		Edge3 at 0mm		0.068	0.07		
		Curved surface of Edge3		0.172	0.17		
	LTE Band 2	Bottom Face at 10mm	0.642	0.004	0.65		
		Edge1 at 10mm	0.525		0.53		
		Curved surface of Edge1	0.864		0.86		
Bottom Face at 0mm		0.664	0.070	0.73			
Edge1 at 0mm		0.691		0.69			
Edge2 at 0mm			0.061	0.06			
Edge3 at 0mm			0.068	0.07			
Curved surface of Edge3			0.172	0.17			
LTE Band 7	Bottom Face at 10mm	0.646	0.004	0.65			
	Edge1 at 10mm	0.728		0.73			
	Curved surface of Edge1	1.055		1.06			
	Bottom Face at 0mm	0.455	0.070	0.53			
	Edge1 at 0mm	0.577		0.58			
	Edge2 at 0mm		0.061	0.06			



FCC SAR Test Report

Report No. : FA612203


		Edge3 at 0mm		0.068	0.07		
		Curved surface of Edge3		0.172	0.17		

16.2 SPLSR Evaluation and Analysis

General Note:

- SPLSR = $(SAR_1 + SAR_2)^{1.5} / (min. \text{ separation distance, mm})$. If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary

Case 1	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	GSM1900				X	Y	Z				
	GSM1900	Curved surface of Edge1	1.119	0	0.154	0.004	-0.177	74.6	2.15	0.04	Not required
	WLAN5GHz Ant 2		1.031	0	0.08	-0.005	-0.18				

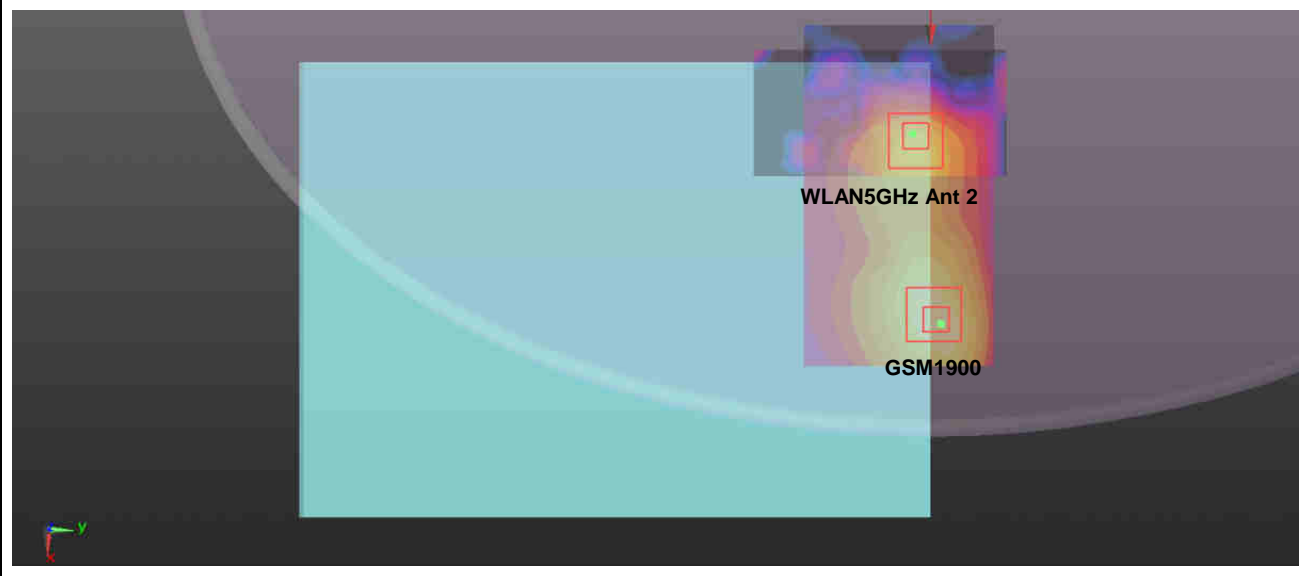


Case 2	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	WCDMA II				X	Y	Z				
	WCDMA II	Curved surface of Edge1	1.124	0	0.154	0.004	-0.177	74.6	2.16	0.04	Not required
	WLAN5GHz Ant 2		1.031	0	0.08	-0.005	-0.18				




Case 3	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				


	WCDMA IV	Curved surface of Edge1	1.101	0	0.154	0.004	-0.177	74.6	2.13	0.04	Not required
	WLAN5GHz Ant 2		1.031	0	0.08	-0.005	-0.18				

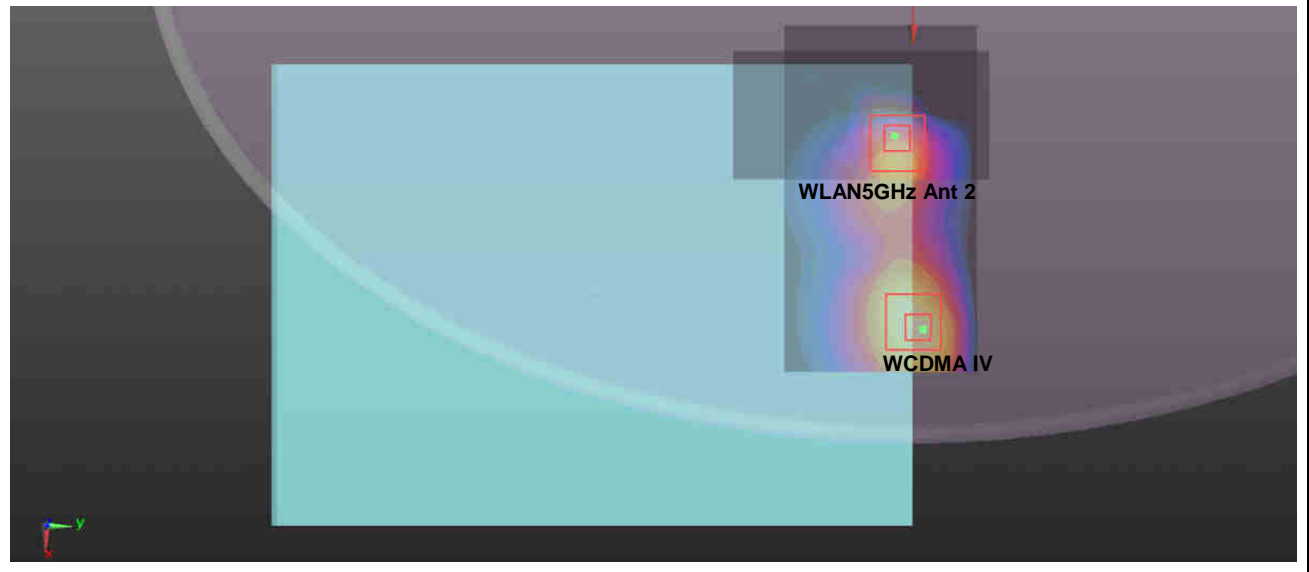

Case 4	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 4	Curved surface of Edge1	0.972	0	0.15	0.0045	-0.177	70.7	2.00	0.04	Not required
	WLAN5GHz Ant 2		1.031	0	0.08	-0.005	-0.18				

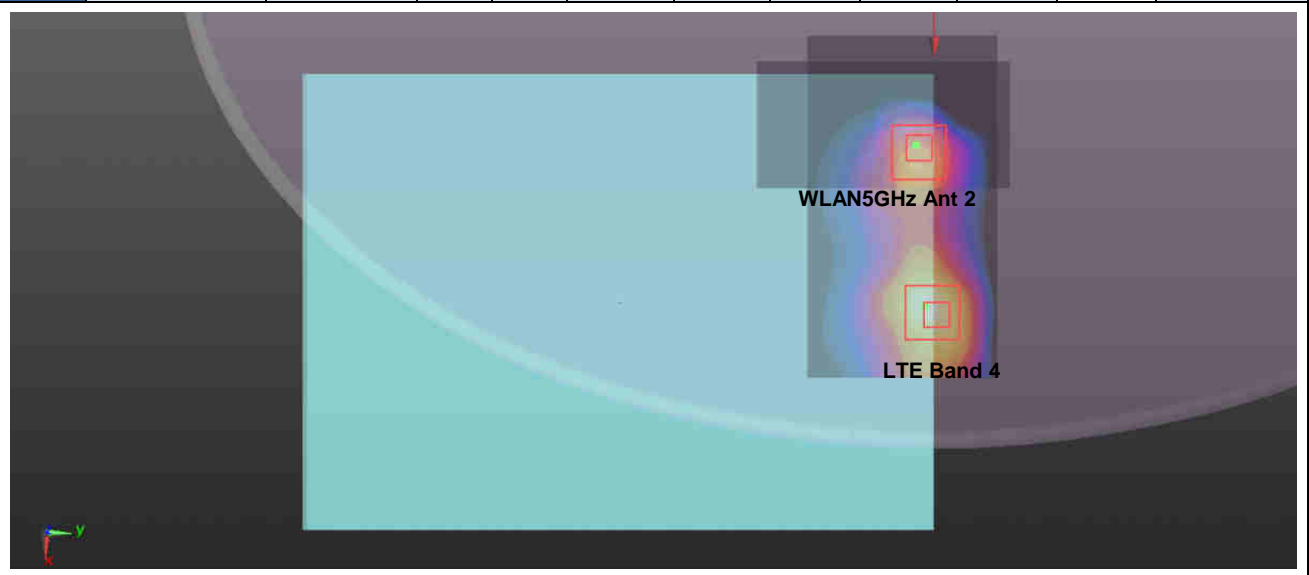


Case 5	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 2	Curved surface of Edge1	0.864	0	0.154	0.004	-0.177	74.6	1.90	0.03	Not required
	WLAN5GHz Ant 2		1.031	0	0.08	-0.005	-0.18				

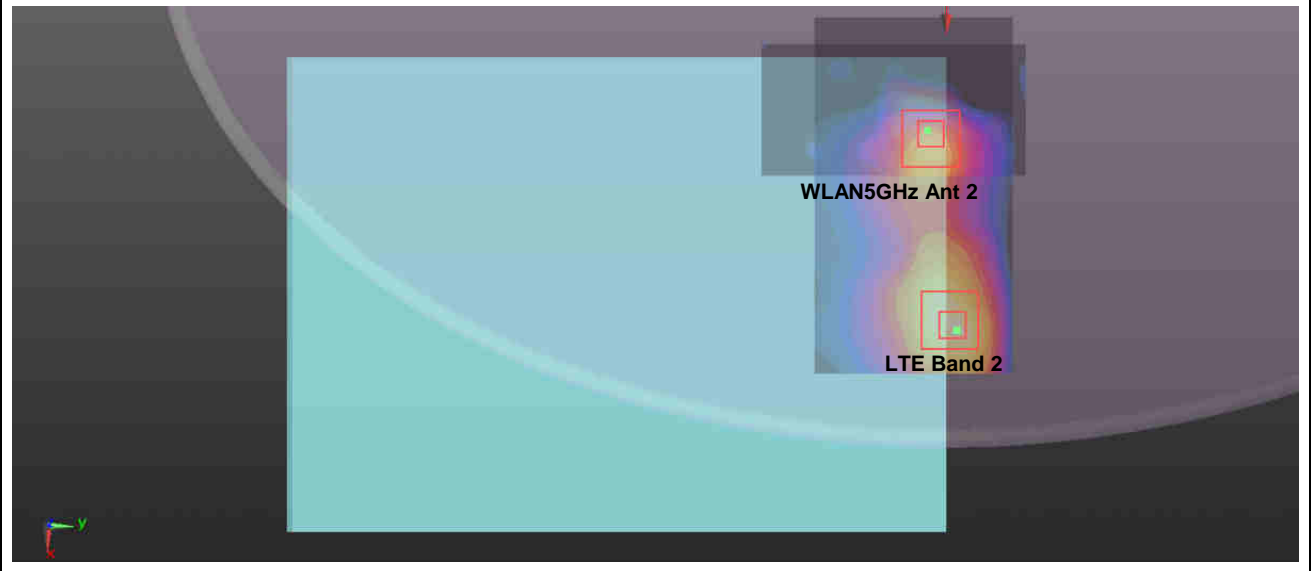


Case 6	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 7	Curved surface of Edge1	1.055	0	0.154	0.0018	-0.177	74.4	2.09	0.04	Not required
	WLAN5GHz Ant 2		1.031	0	0.08	-0.005	-0.18				




Case 7	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	GSM1900	Curved surface of Edge1	1.119	0	0.154	0.004	-0.177	73.4	1.84	0.03	Not required
	WLAN5GHz Ant 1+2		0.724	0	0.081	-0.002	-0.182				

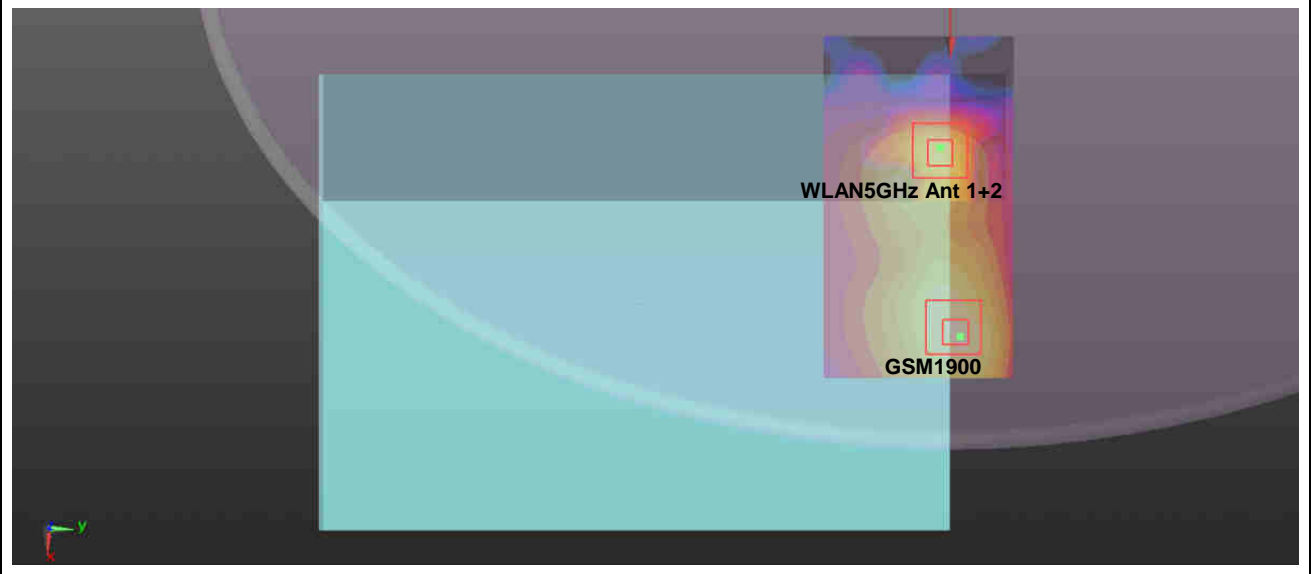


Case 8	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WCDMA II	Curved surface of Edge1	1.124	0	0.154	0.004	-0.177	73.4	1.85	0.03	Not required
	WLAN5GHz Ant 1+2		0.724	0	0.081	-0.002	-0.182				

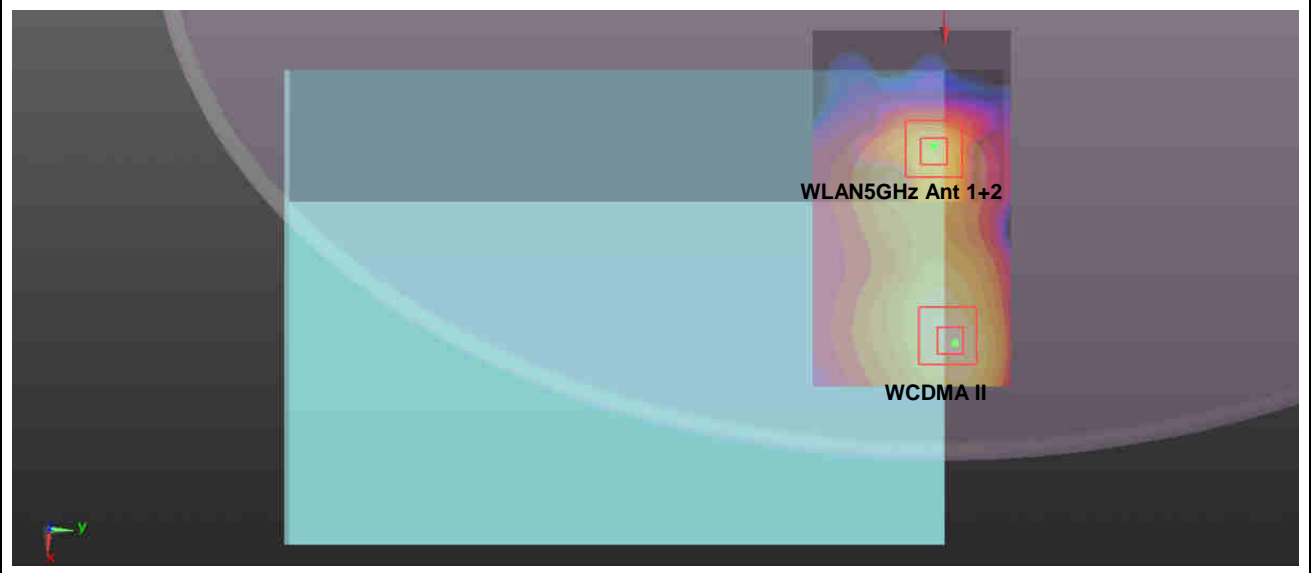

Case 9	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WCDMA IV	Curved surface of Edge1	1.101	0	0.154	0.004	-0.177	73.4	1.83	0.03	Not required
	WLAN5GHz Ant 1+2		0.724	0	0.081	-0.002	-0.182				

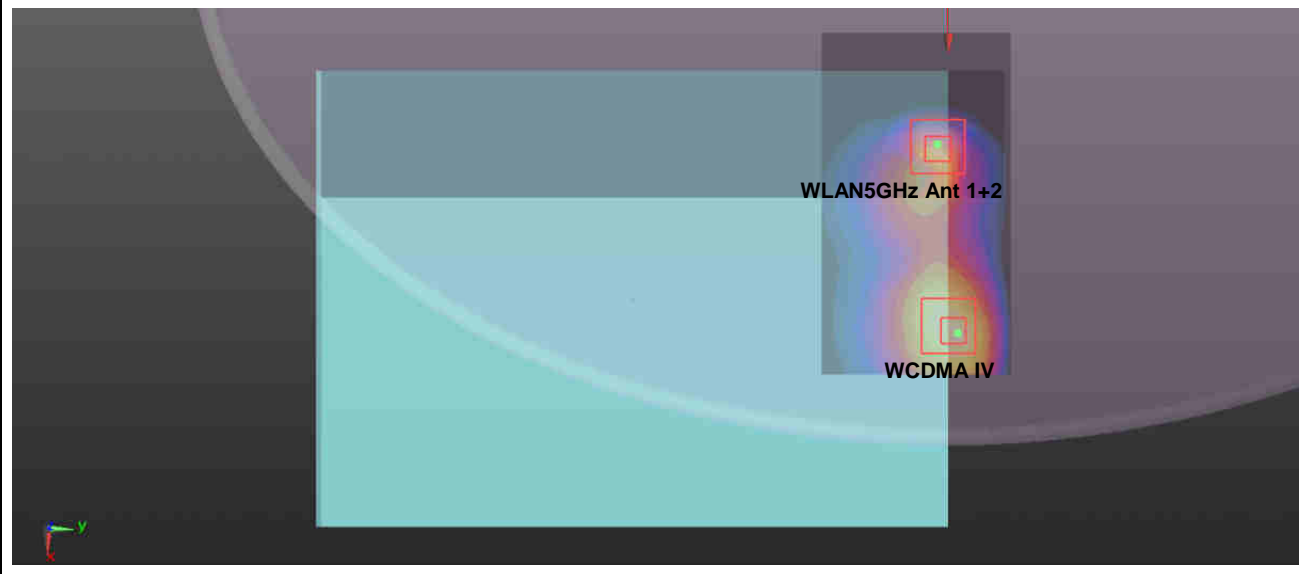

Case 10	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 4	Curved surface of Edge1	0.972	0	0.15	0.0045	-0.177	69.5	1.70	0.03	Not required
	WLAN5GHz Ant 1+2		0.724	0	0.081	-0.002	-0.182				

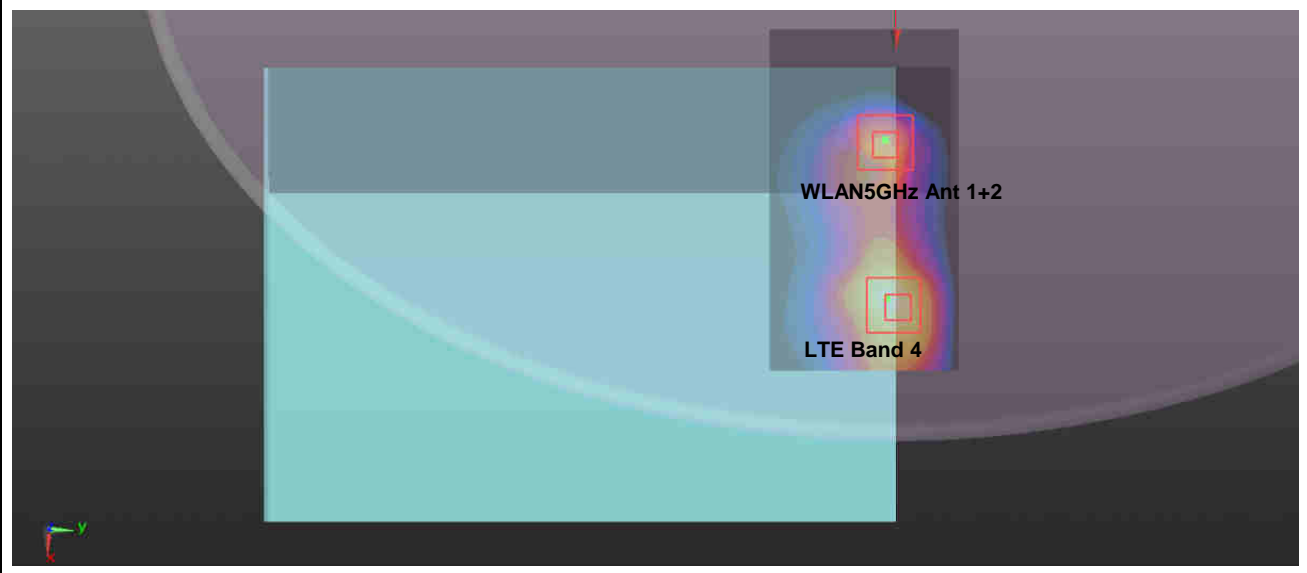

Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
11	LTE Band 7	Curved surface of Edge1	1.055	0	0.154	0.0018	-0.177	73.3	1.78	0.03	Not required
	WLAN5GHz Ant 1+2		0.724	0	0.081	-0.002	-0.182				



Test Engineer : Fulu Hu

17. Uncertainty Assessment

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture’s specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in table below.

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor ^(a)	1/ κ ^(b)	1/ $\sqrt{3}$	1/ $\sqrt{6}$	1/ $\sqrt{2}$

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b) κ is the coverage factor

Table 16.1. Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual “root-sum-squares” (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.

Error Description	Uncertainty Value (±%)	Probability	Divisor	(Ci) 1g	(Ci) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)
Measurement System							
Probe Calibration	6.0	N	1	1	1	6.0	6.0
Axial Isotropy	4.7	R	1.732	0.7	0.7	1.9	1.9
Hemispherical Isotropy	9.6	R	1.732	0.7	0.7	3.9	3.9
Boundary Effects	1.0	R	1.732	1	1	0.6	0.6
Linearity	4.7	R	1.732	1	1	2.7	2.7
System Detection Limits	1.0	R	1.732	1	1	0.6	0.6
Modulation Response	3.2	R	1.732	1	1	1.8	1.8
Readout Electronics	0.3	N	1	1	1	0.3	0.3
Response Time	0.0	R	1.732	1	1	0.0	0.0
Integration Time	2.6	R	1.732	1	1	1.5	1.5
RF Ambient Noise	3.0	R	1.732	1	1	1.7	1.7
RF Ambient Reflections	3.0	R	1.732	1	1	1.7	1.7
Probe Positioner	0.4	R	1.732	1	1	0.2	0.2
Probe Positioning	2.9	R	1.732	1	1	1.7	1.7
Max. SAR Eval.	2.0	R	1.732	1	1	1.2	1.2
Test Sample Related							
Device Positioning	3.0	N	1	1	1	3.0	3.0
Device Holder	3.6	N	1	1	1	3.6	3.6
Power Drift	5.0	R	1.732	1	1	2.9	2.9
Power Scaling	0.0	R	1.732	1	1	0.0	0.0
Phantom and Setup							
Phantom Uncertainty	6.1	R	1.732	1	1	3.5	3.5
SAR correction	0.0	R	1.732	1	0.84	0.0	0.0
Liquid Conductivity Repeatability	0.2	N	1	0.78	0.71	0.1	0.1
Liquid Conductivity (target)	5.0	R	1.732	0.78	0.71	2.3	2.0
Liquid Conductivity (mea.)	2.5	R	1.732	0.78	0.71	1.1	1.0
Temp. unc. - Conductivity	3.4	R	1.732	0.78	0.71	1.5	1.4
Liquid Permittivity Repeatability	0.15	N	1	0.23	0.26	0.0	0.0
Liquid Permittivity (target)	5.0	R	1.732	0.23	0.26	0.7	0.8
Liquid Permittivity (mea.)	2.5	R	1.732	0.23	0.26	0.3	0.4
Temp. unc. - Permittivity	0.83	R	1.732	0.23	0.26	0.1	0.1
Combined Std. Uncertainty						11.4%	11.4%
Coverage Factor for 95 %						K=2	K=2
Expanded STD Uncertainty						22.9%	22.7%

Table 16.2. Uncertainty Budget for frequency range 300 MHz to 3 GHz

Error Description	Uncertainty Value (±%)	Probability	Divisor	(Ci) 1g	(Ci) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)
Measurement System							
Probe Calibration	7.0	N	1	1	1	7.0	7.0
Axial Isotropy	4.7	R	1.732	0.7	0.7	1.9	1.9
Hemispherical Isotropy	9.6	R	1.732	0.7	0.7	3.9	3.9
Boundary Effects	2.0	R	1.732	1	1	1.2	1.2
Linearity	4.7	R	1.732	1	1	2.7	2.7
System Detection Limits	1.0	R	1.732	1	1	0.6	0.6
Modulation Response	3.2	R	1.732	1	1	1.8	1.8
Readout Electronics	0.3	N	1	1	1	0.3	0.3
Response Time	0.0	R	1.732	1	1	0.0	0.0
Integration Time	2.6	R	1.732	1	1	1.5	1.5
RF Ambient Noise	3.0	R	1.732	1	1	1.7	1.7
RF Ambient Reflections	3.0	R	1.732	1	1	1.7	1.7
Probe Positioner	0.4	R	1.732	1	1	0.2	0.2
Probe Positioning	6.7	R	1.732	1	1	3.9	3.9
Max. SAR Eval.	4.0	R	1.732	1	1	2.3	2.3
Test Sample Related							
Device Positioning	3.0	N	1	1	1	3.0	3.0
Device Holder	3.6	N	1	1	1	3.6	3.6
Power Drift	5.0	R	1.732	1	1	2.9	2.9
Power Scaling	0.0	R	1.732	1	1	0.0	0.0
Phantom and Setup							
Phantom Uncertainty	6.6	R	1.732	1	1	3.8	3.8
SAR correction	0.0	R	1.732	1	0.84	0.0	0.0
Liquid Conductivity Repeatability	0.2	N	1	0.78	0.71	0.1	0.1
Liquid Conductivity (target)	5.0	R	1.732	0.78	0.71	2.3	2.0
Liquid Conductivity (mea.)	2.5	R	1.732	0.78	0.71	1.1	1.0
Temp. unc. - Conductivity	3.4	R	1.732	0.78	0.71	1.5	1.4
Liquid Permittivity Repeatability	0.15	N	1	0.23	0.26	0.0	0.0
Liquid Permittivity (target)	5.0	R	1.732	0.23	0.26	0.7	0.8
Liquid Permittivity (mea.)	2.5	R	1.732	0.23	0.26	0.3	0.4
Temp. unc. - Permittivity	0.83	R	1.732	0.23	0.26	0.1	0.1
Combined Std. Uncertainty						12.8%	12.7%
Coverage Factor for 95 %						K=2	K=2
Expanded STD Uncertainty						25.5%	25.4%

Table 16.3. Uncertainty Budget for frequency range 3 GHz to 6 GHz



18. References

- [1] FCC 47 CFR Part 2 “Frequency Allocations and Radio Treaty Matters; General Rules and Regulations”
- [2] ANSI/IEEE Std. C95.1-1992, “IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz”, September 1992
- [3] IEEE Std. 1528-2013, “IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques”, Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, “SAR Guidance for IEEE 802.11 (WiFi) Transmitters”, Oct 2015.
- [6] FCC KDB 447498 D01 v06, “Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies”, Oct 2015
- [7] FCC KDB 941225 D01 v03r01, “3G SAR MEAUREMENT PROCEDURES”, Oct 2015
- [8] FCC KDB 941225 D05 v02r05, “SAR Evaluation Considerations for LTE Devices”, Dec 2015
- [9] FCC KDB 616217 D04 v01r02, “SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers”, Oct 2015
- [10] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [11] FCC KDB 865664 D02 v01r02, “RF Exposure Compliance Reporting and Documentation Considerations” Oct 2015.



Appendix A. Plots of System Performance Check

The plots are shown as follows.

System Check_Body_750MHz_160313

DUT: D750V3 - SN:1065


Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1
Medium: MSL_750_160313 Medium parameters used: $f = 750$ MHz; $\sigma = 0.956$ S/m; $\epsilon_r = 54.926$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.9 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(10.22, 10.22, 10.22); Calibrated: 2015.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2015.5.21
- Phantom: SAM3; Type: SAM; Serial: TP-1127
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 2.74 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 49.22 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 3.04 W/kg
SAR(1 g) = 2.18 W/kg; SAR(10 g) = 1.49 W/kg
Maximum value of SAR (measured) = 2.63 W/kg

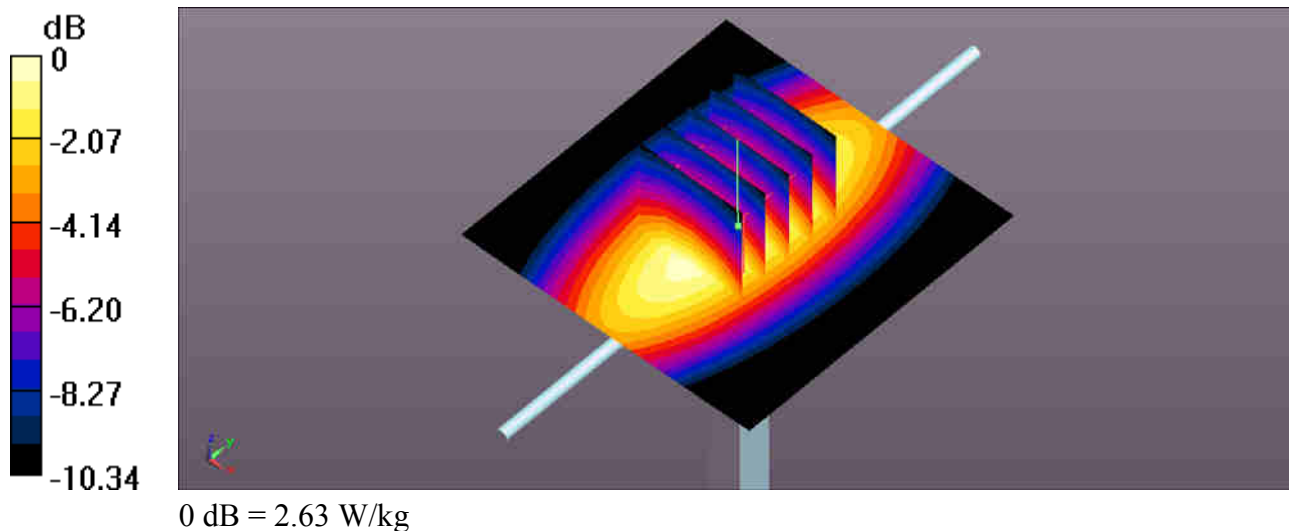

System Check_Body_835MHz_160314

DUT: D835V2 - SN:4d091

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: MSL_835_160314 Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.969 \text{ S/m}$; $\epsilon_r = 55.701$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.9 \text{ }^\circ\text{C}$; Liquid Temperature : $22.8 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(10.17, 10.17, 10.17); Calibrated: 2015.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2015.5.21
- Phantom: SAM3; Type: SAM; Serial: TP-1127
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 3.06 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 53.33 V/m ; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 3.45 W/kg

SAR(1 g) = 2.47 W/kg ; SAR(10 g) = 1.63 W/kg

Maximum value of SAR (measured) = 3.05 W/kg

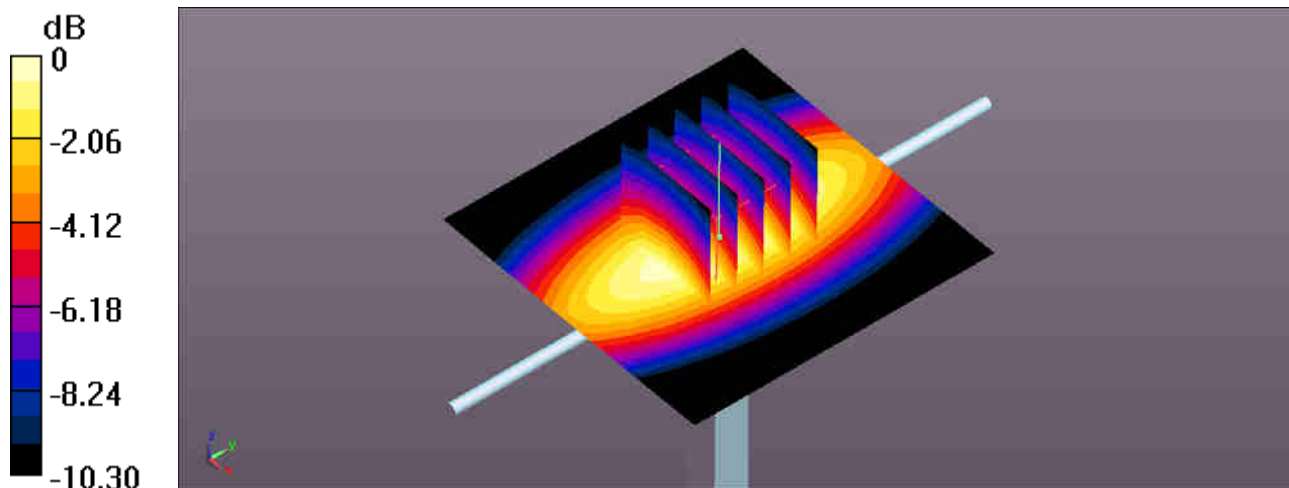

0 dB = 3.05 W/kg

System Check_Body_1750MHz_160231

DUT: D1750V2 - SN:1069

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: MSL_1750_160301 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.54$ S/m; $\epsilon_r = 53.324$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.77, 7.77, 7.77); Calibrated: 2015.5.28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2015.5.21
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 13.5 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 84.21 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 16.8 W/kg

SAR(1 g) = 9.5 W/kg; SAR(10 g) = 5.21 W/kg

Maximum value of SAR (measured) = 13.2 W/kg

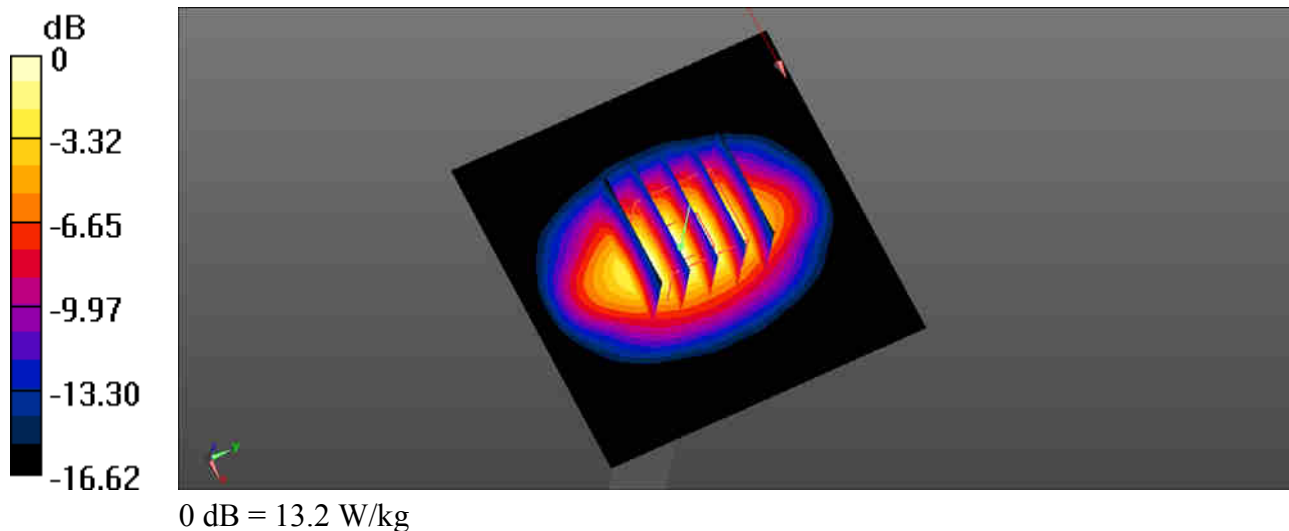

System Check_Body_1900MHz_160302

DUT: D1900V2 - SN:5d118

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL_1900_160302 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.551$ S/m; $\epsilon_r = 54.696$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.54, 7.54, 7.54); Calibrated: 2015.5.28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2015.5.21
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 14.8 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 86.73 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 18.5 W/kg

SAR(1 g) = 10.4 W/kg; SAR(10 g) = 5.41 W/kg

Maximum value of SAR (measured) = 14.8 W/kg

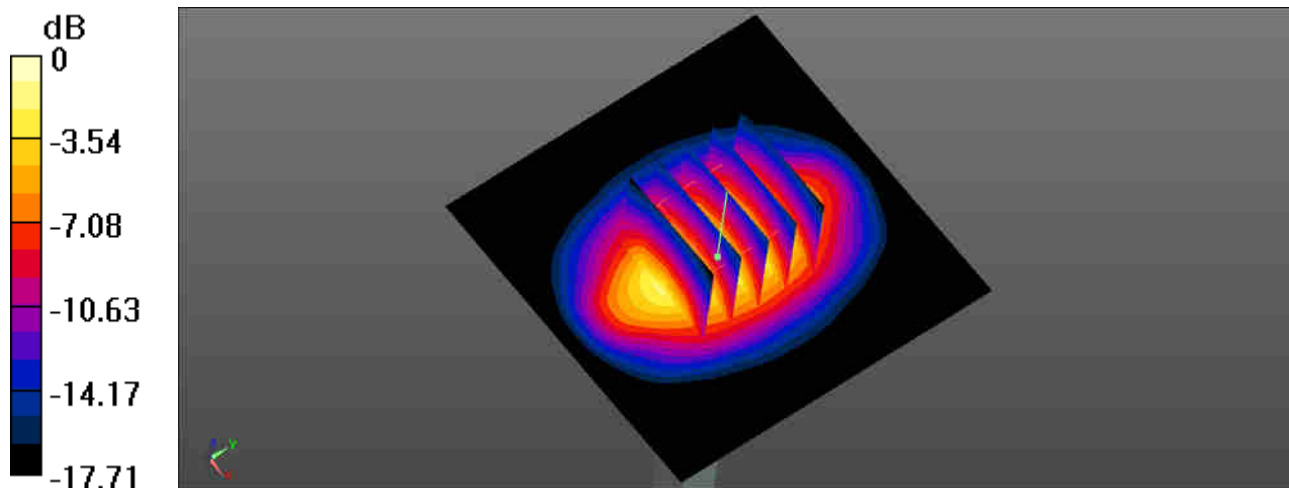

0 dB = 14.8 W/kg

System Check_Body_2450MHz_160311

DUT: D2450V2 - SN:840

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: MSL_2450_160311 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.927$ S/m; $\epsilon_r = 51.125$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.29, 7.29, 7.29); Calibrated: 2015.5.28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2015.5.21
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 18.3 W/kg


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 83.99 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 24.1 W/kg

SAR(1 g) = 12 W/kg; SAR(10 g) = 5.62 W/kg

Maximum value of SAR (measured) = 18.2 W/kg

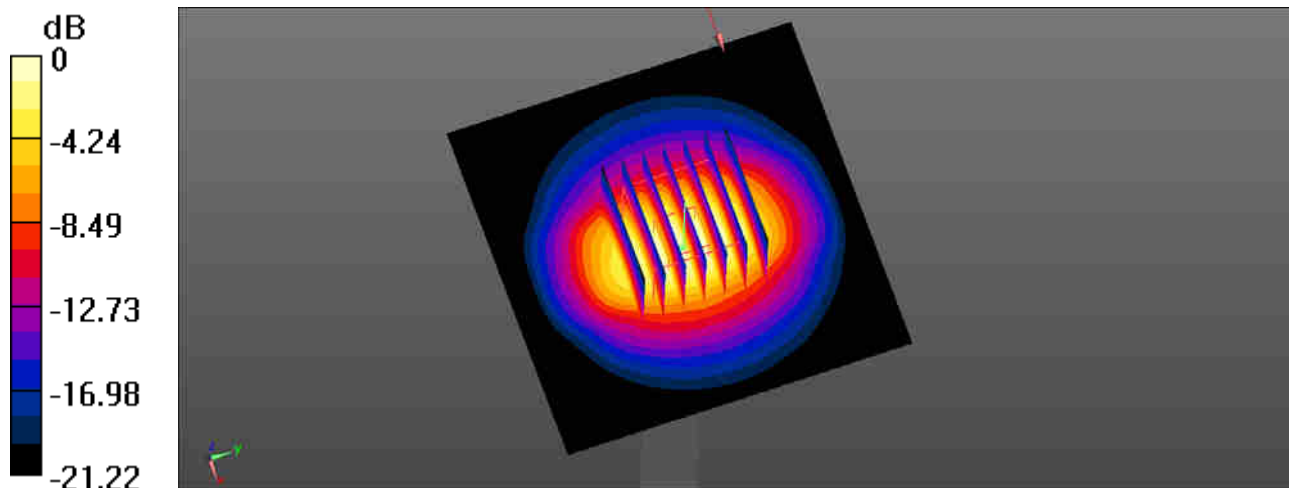

0 dB = 18.2 W/kg

System Check_Body_2600MHz_160216

DUT: D2600V2 - SN:1061

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: MSL_2600_160216 Medium parameters used: $f = 2600$ MHz; $\sigma = 2.131$ S/m; $\epsilon_r = 52.892$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.17, 7.17, 7.17); Calibrated: 2015.5.28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2015.5.21
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 20.6 W/kg


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 85.27 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 29.0 W/kg

SAR(1 g) = 13.7 W/kg; SAR(10 g) = 6.24 W/kg

Maximum value of SAR (measured) = 21.1 W/kg

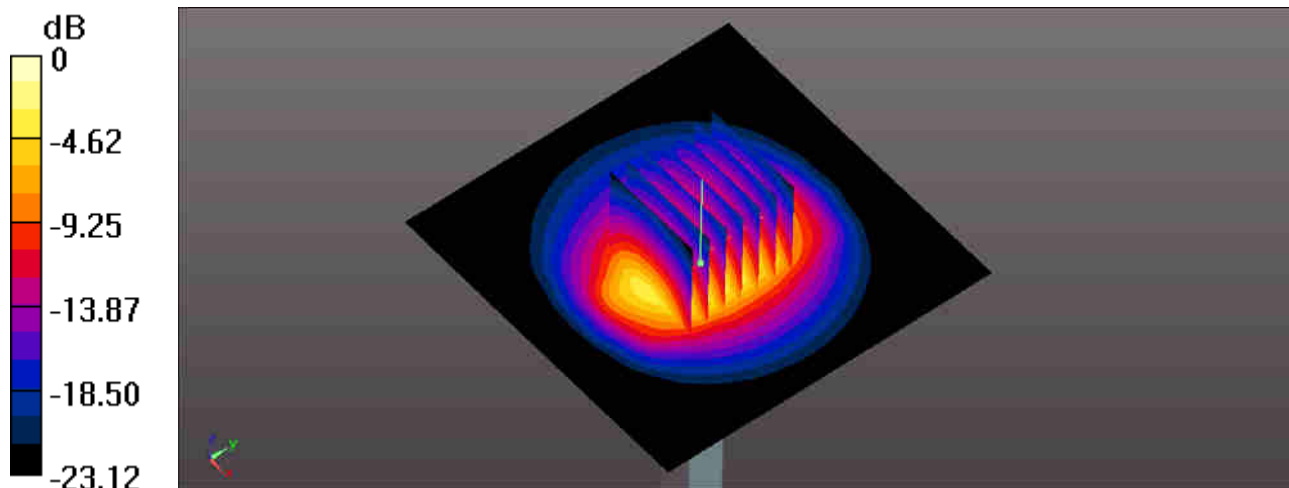

0 dB = 21.1 W/kg

System Check_Body_5250MHz_160310

DUT: D5GHzV2-SN:1113

Communication System: UID 0, CW (0); Frequency: 5250 MHz; Duty Cycle: 1:1

Medium: MSL_5000_160310 Medium parameters used: $f = 5250$ MHz; $\sigma = 5.48$ S/m; $\epsilon_r = 48.566$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.9 °C ; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(4.25, 4.25, 4.25); Calibrated: 2015.11.27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2015.7.21
- Phantom: SAM3; Type: SAM; Serial: TP-1127
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=100mW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 17.2 W/kg


Pin=100mW/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 40.21 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 31.2 W/kg

SAR(1 g) = 7.27 W/kg; SAR(10 g) = 2.03 W/kg

Maximum value of SAR (measured) = 16.9 W/kg

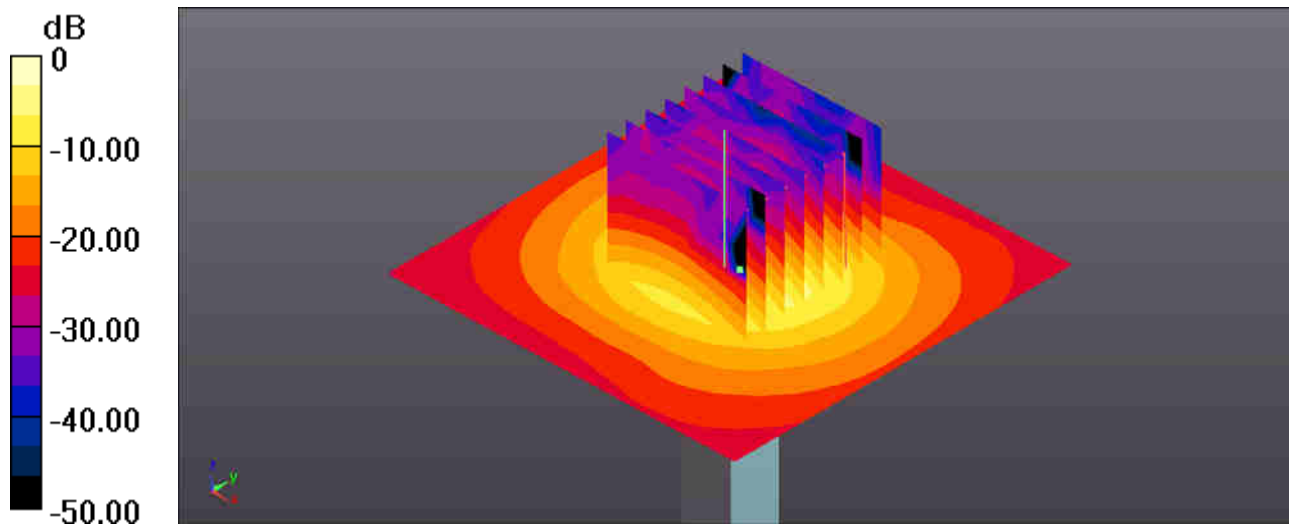

System Check_Body_5600MHz_160311

DUT: D5GHzV2-SN:1113


Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1
Medium: MSL_5000_160311 Medium parameters used: $f = 5600$ MHz; $\sigma = 5.983$ S/m; $\epsilon_r = 47.886$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.9 °C ; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(3.65, 3.65, 3.65); Calibrated: 2015.11.27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2015.7.21
- Phantom: SAM3; Type: SAM; Serial: TP-1127
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=100mW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 19.4 W/kg

Pin=100mW/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 38.39 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 37.0 W/kg
SAR(1 g) = 7.74 W/kg; SAR(10 g) = 2.14 W/kg
Maximum value of SAR (measured) = 19.0 W/kg

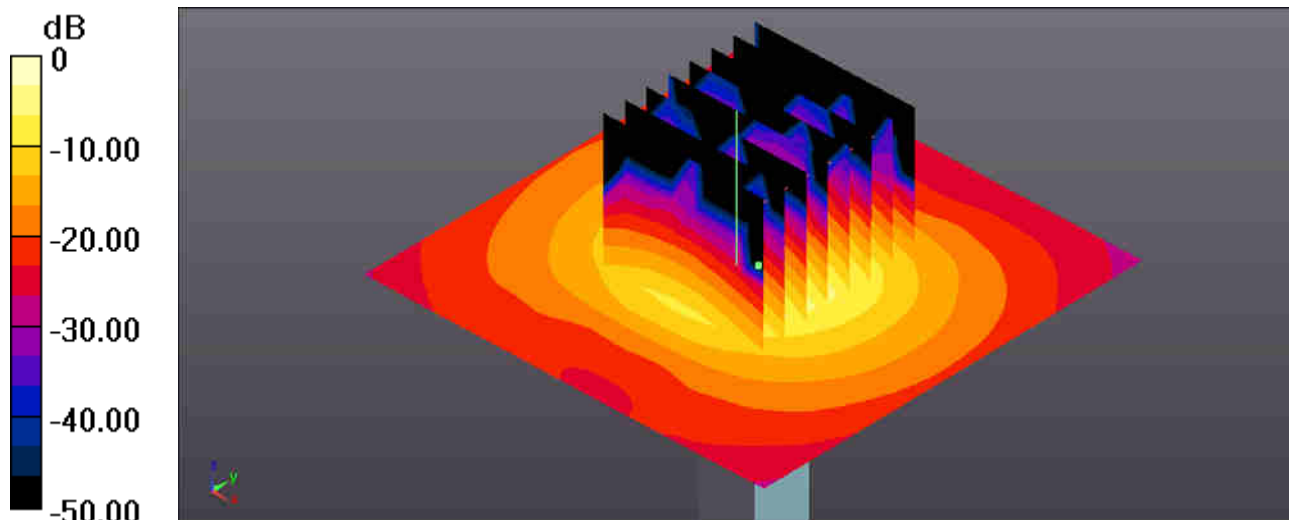

0 dB = 19.0 W/kg

System Check_Body_5750MHz_160312

DUT: D5GHzV2-SN:1113


Communication System: UID 0, CW (0); Frequency: 5750 MHz; Duty Cycle: 1:1
Medium: MSL_5000_160312 Medium parameters used: $f = 5750$ MHz; $\sigma = 6.215$ S/m; $\epsilon_r = 47.569$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.9 °C ; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(3.77, 3.77, 3.77); Calibrated: 2015.11.27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2015.7.21
- Phantom: SAM3; Type: SAM; Serial: TP-1127
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=100mW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 18.4 W/kg

Pin=100mW/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 33.29 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 38.1 W/kg
SAR(1 g) = 7.41 W/kg; SAR(10 g) = 2.07 W/kg
Maximum value of SAR (measured) = 18.7 W/kg

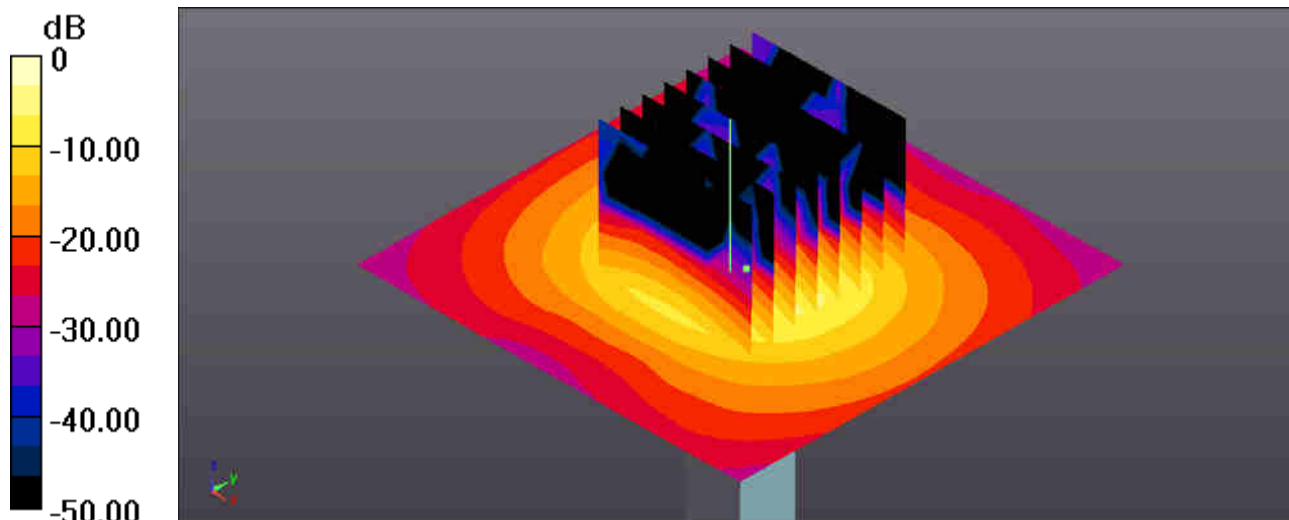

0 dB = 18.7 W/kg



Appendix B. Plots of SAR Measurement

The plots are shown as follows.

01_GSM850_GPRS 4 Tx slots_Bottom Face_10mm_Ch251

Communication System: UID 0, GPRS/EDGE (4 Tx slots) (0); Frequency: 848.8 MHz; Duty Cycle: 1:2.08

Medium: MSL_835_160314 Medium parameters used: $f = 848.8$ MHz; $\sigma = 0.981$ S/m; $\epsilon_r = 55.58$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.9 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(10.17, 10.17, 10.17); Calibrated: 2015.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2015.5.21
- Phantom: SAM3; Type: SAM; Serial: TP-1127
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch251/Area Scan (81x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.775 W/kg


Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.097 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.892 W/kg

SAR(1 g) = 0.588 W/kg; SAR(10 g) = 0.377 W/kg

Maximum value of SAR (measured) = 0.757 W/kg

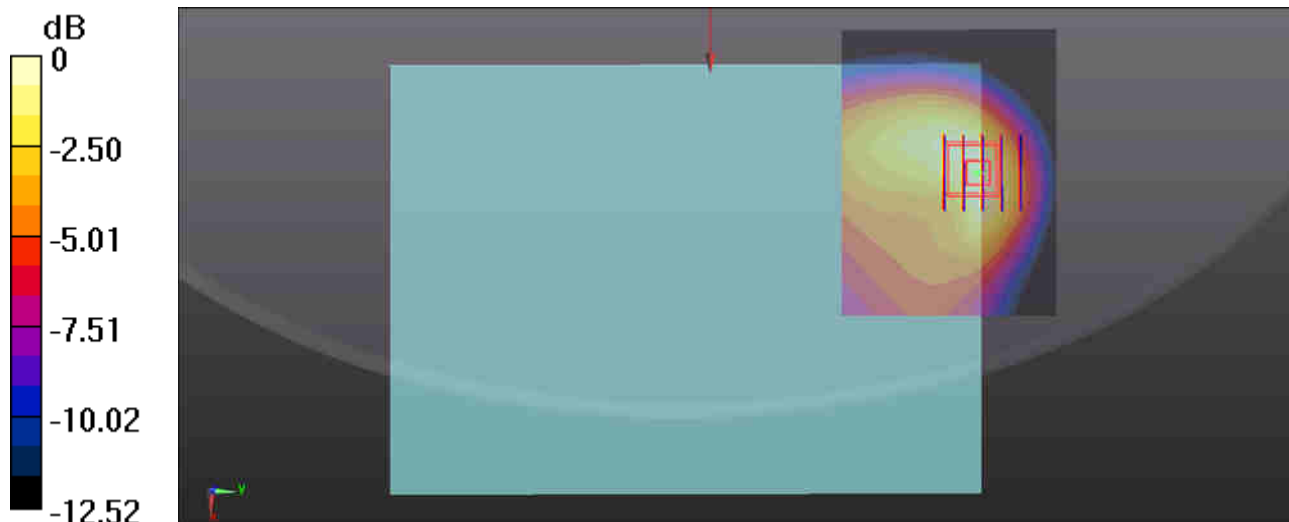

0 dB = 0.757 W/kg

02_GSM1900_GPRS 4 Tx slots_Bottom Face Curved surface of Edge1 Tilted31_0mm_Ch512

Communication System: UID 0, GPRS/EDGE (4 Tx slots) (0); Frequency: 1850.2 MHz; Duty Cycle: 1:2.08

Medium: MSL_1900_160302 Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.49$ S/m; $\epsilon_r = 54.837$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.54, 7.54, 7.54); Calibrated: 2015.5.28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2015.5.21
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch512/Area Scan (91x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.26 W/kg


Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 2.08 W/kg

SAR(1 g) = 0.946 W/kg; SAR(10 g) = 0.416 W/kg

Maximum value of SAR (measured) = 1.58 W/kg

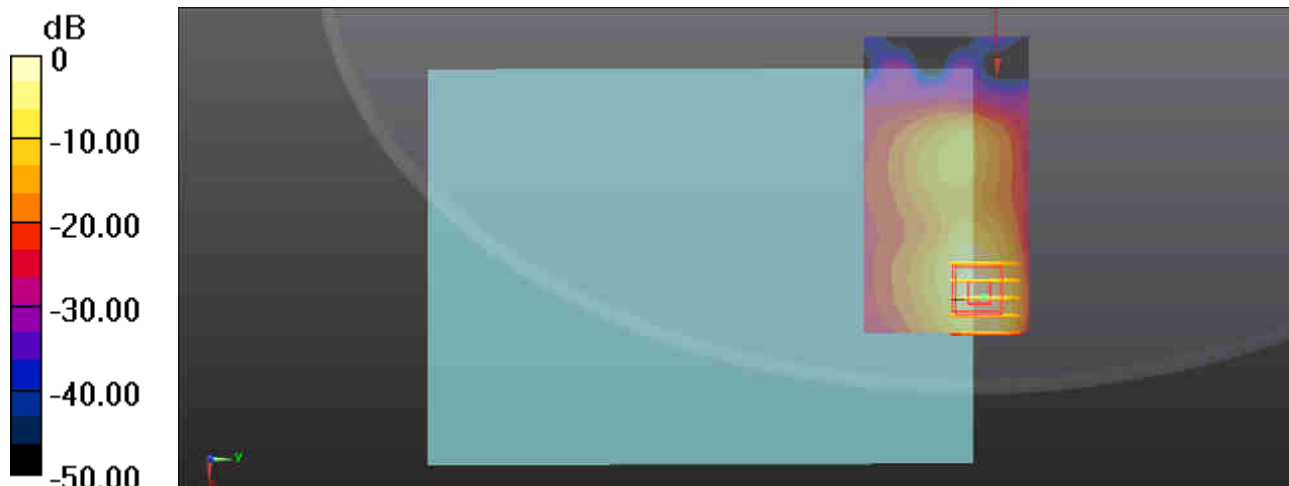

0 dB = 1.58 W/kg = 1.99 dBW/kg

03_WCDMA V_RMC 12.2Kbps_Bottom Face_0mm_Ch4182


Communication System: UID 0, UMTS (0); Frequency: 836.4 MHz; Duty Cycle: 1:1
Medium: MSL_835_160314 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.97$ S/m; $\epsilon_r = 55.691$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.9 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(10.17, 10.17, 10.17); Calibrated: 2015.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2015.5.21
- Phantom: SAM3; Type: SAM; Serial: TP-1127
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch4182/Area Scan (81x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.539 W/kg

Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 0.4970 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 0.875 W/kg
SAR(1 g) = 0.443 W/kg; SAR(10 g) = 0.235 W/kg
Maximum value of SAR (measured) = 0.686 W/kg

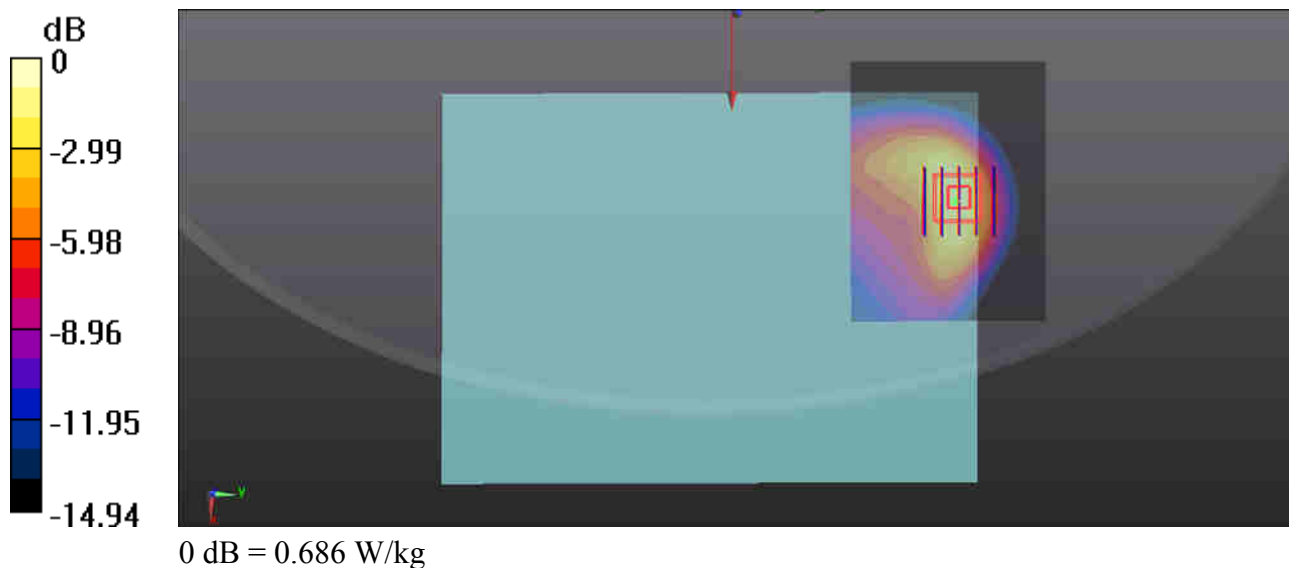

04_WCDMA IV_RMC 12.2Kbps_Bottom Face Curved surface of Edge1 Tilted31_0mm_Ch1513

Communication System: UID 0, UMTS (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1
 Medium: MSL_1750_160301 Medium parameters used: $f = 1752.6$ MHz; $\sigma = 1.543$ S/m; $\epsilon_r = 53.32$;

ρ
 $= 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.77, 7.77, 7.77); Calibrated: 2015.5.28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2015.5.21
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch1513/Area Scan (91x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.13 W/kg

Ch1513/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0.6650 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.99 W/kg

SAR(1 g) = 0.924 W/kg; SAR(10 g) = 0.417 W/kg

Maximum value of SAR (measured) = 1.49 W/kg



0 dB = 1.49 W/kg = 1.73 dBW/kg

05_WCDMA II_RMC 12.2Kbps_Bottom Face Curved surface of Edge1 Tilted31_0mm_Ch9262


Communication System: UID 0, UMTS (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium: MSL_1900_160302 Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.493$ S/m; $\epsilon_r = 54.83$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.54, 7.54, 7.54); Calibrated: 2015.5.28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2015.5.21
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch9262/Area Scan (91x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.36 W/kg

Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 0 V/m; Power Drift = 0.13 dB
Peak SAR (extrapolated) = 2.30 W/kg
SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.453 W/kg
Maximum value of SAR (measured) = 1.74 W/kg

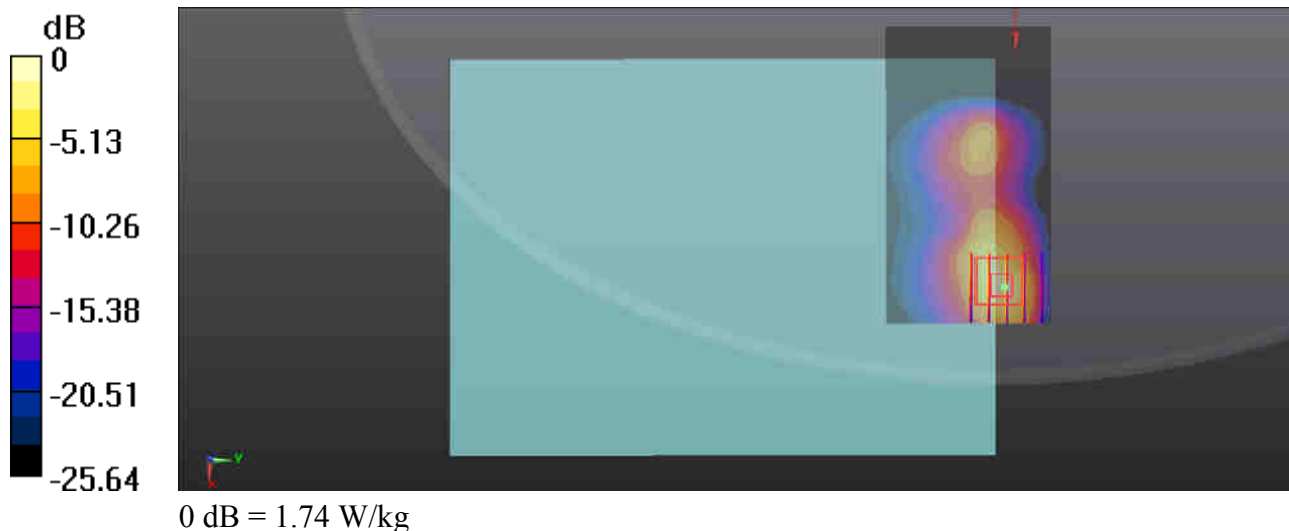

06_LTE Band12_10M_QPSK_1RB_0Offset_Edge1_0mm_Ch23130


Communication System: UID 0, FDD_LTE (0); Frequency: 711 MHz; Duty Cycle: 1:1
Medium: MSL_750_160313 Medium parameters used: $f = 711 \text{ MHz}$; $\sigma = 0.922 \text{ S/m}$; $\epsilon_r = 55.3$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $23.9 \text{ }^\circ\text{C}$; Liquid Temperature : $22.8 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(10.22, 10.22, 10.22); Calibrated: 2015.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2015.5.21
- Phantom: SAM3; Type: SAM; Serial: TP-1127
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch23130/Area Scan (41x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 0.591 W/kg

Ch23130/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 13.78 V/m ; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 0.949 W/kg
SAR(1 g) = 0.428 W/kg ; SAR(10 g) = 0.212 W/kg
Maximum value of SAR (measured) = 0.716 W/kg

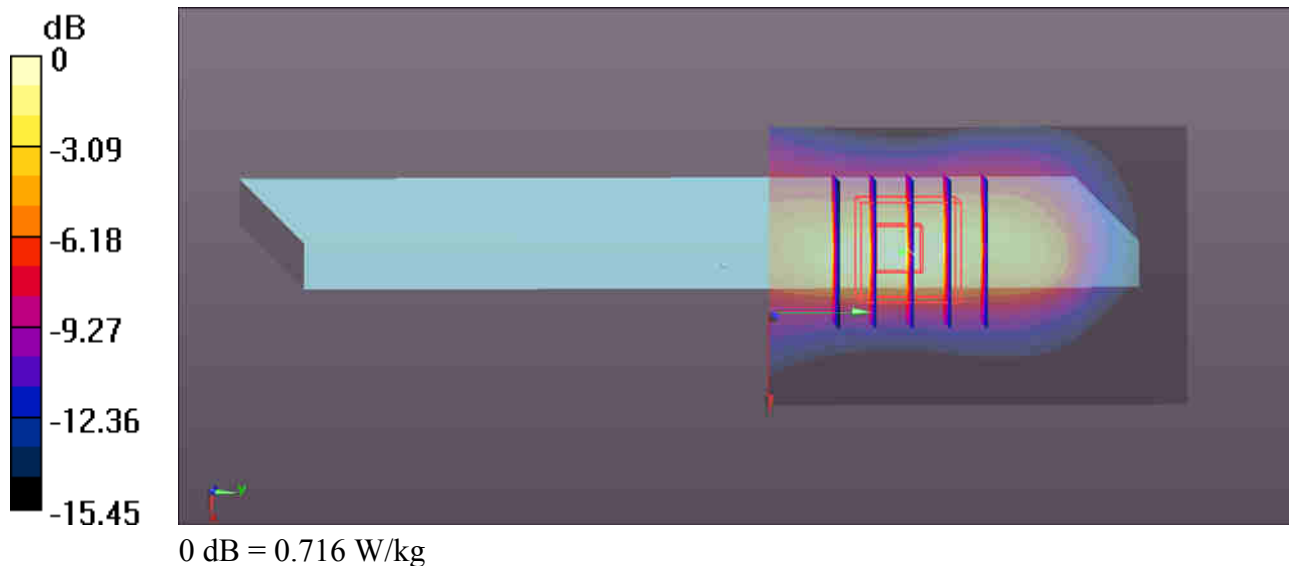

07_LTE Band5_10M_QPSK_1RB_0Offset_Bottom Face_0mm_Ch20525


Communication System: UID 0, FDD_LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium: MSL_835_160314 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.971$ S/m; $\epsilon_r = 55.689$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.9 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(10.17, 10.17, 10.17); Calibrated: 2015.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2015.5.21
- Phantom: SAM3; Type: SAM; Serial: TP-1127
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch20525/Area Scan (81x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.860 W/kg

Ch20525/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 0.9600 V/m; Power Drift = -0.14 dB
Peak SAR (extrapolated) = 1.02 W/kg
SAR(1 g) = 0.635 W/kg; SAR(10 g) = 0.380 W/kg
Maximum value of SAR (measured) = 0.838 W/kg

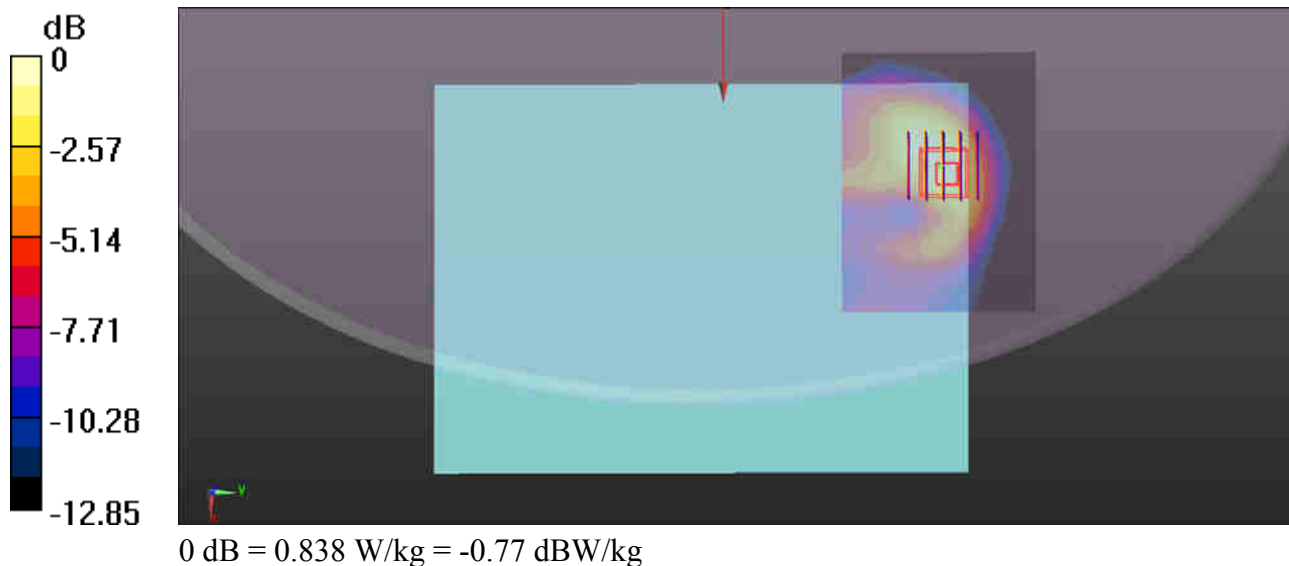

08_LTE Band 4_20M_QPSK_1RB_49Offset_Bottom Face Curved surface of Edge1 Tilted31_0mm_Ch20175


Communication System: UID 0, FDD_LTE (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium: MSL_1750_160301 Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.522$ S/m; $\epsilon_r = 53.349$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.77, 7.77, 7.77); Calibrated: 2015.5.28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2015.5.21
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch20175/Area Scan (91x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.993 W/kg

Ch20175/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 0.4820 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 1.80 W/kg
SAR(1 g) = 0.847 W/kg; SAR(10 g) = 0.380 W/kg
Maximum value of SAR (measured) = 1.17 W/kg

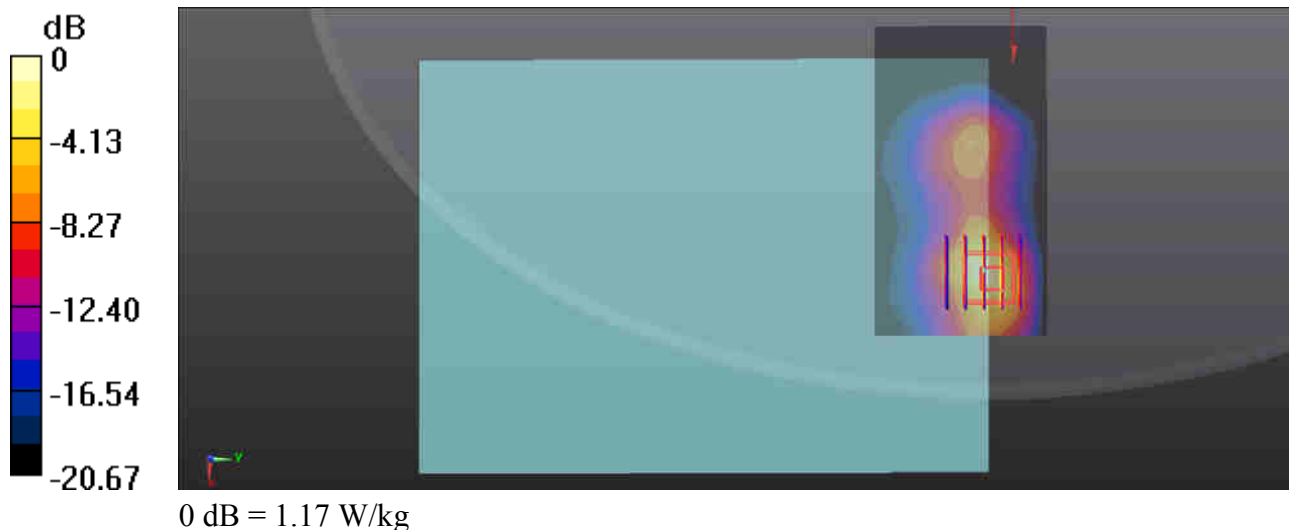

09_LTE Band 2_20M_QPSK_1RB_0Offset_Bottom Face Curved surface of Edge1 Tilted31_0mm_Ch18700


Communication System: UID 0, FDD_LTE (0); Frequency: 1860 MHz; Duty Cycle: 1:1
Medium: MSL_1900_160302 Medium parameters used: $f = 1860$ MHz; $\sigma = 1.503$ S/m; $\epsilon_r = 54.803$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.54, 7.54, 7.54); Calibrated: 2015.5.28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2015.5.21
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch18700/Area Scan (91x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.888 W/kg

Ch18700/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 0.3910 V/m; Power Drift = -0.05 dB
Peak SAR (extrapolated) = 1.58 W/kg
SAR(1 g) = 0.701 W/kg; SAR(10 g) = 0.312 W/kg
Maximum value of SAR (measured) = 1.19 W/kg

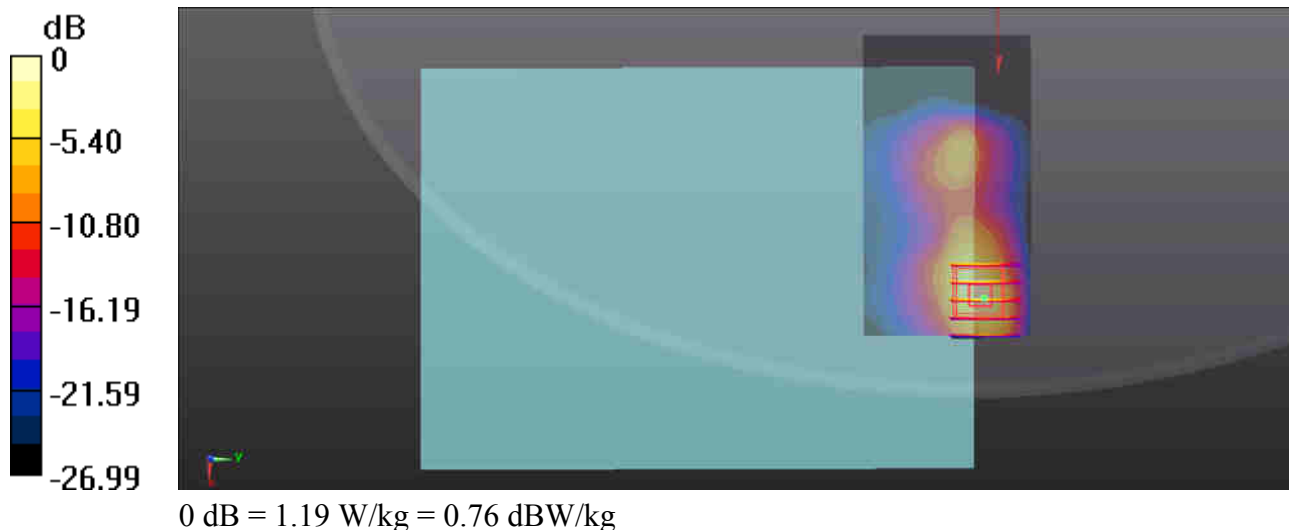

10_LTE Band 7_20M_QPSK_1RB_0Offset_Bottom Face Curved surface of Edge1 Tilted31_0mm_Ch20850


Communication System: UID 0, FDD_LTE (0); Frequency: 2510 MHz; Duty Cycle: 1:1
Medium: MSL_2600_160216 Medium parameters used: $f = 2510$ MHz; $\sigma = 2.036$ S/m; $\epsilon_r = 53.115$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.17, 7.17, 7.17); Calibrated: 2015.5.28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2015.5.21
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch20850/Area Scan (111x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 1.77 W/kg

Ch20850/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 0 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 2.64 W/kg
SAR(1 g) = 0.949 W/kg; SAR(10 g) = 0.330 W/kg
Maximum value of SAR (measured) = 1.96 W/kg

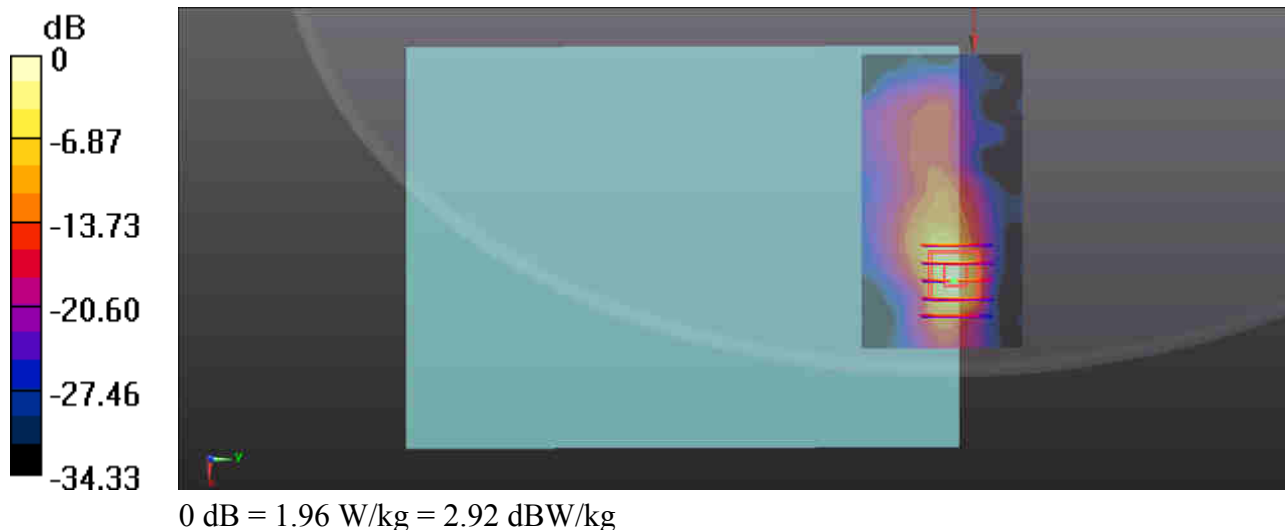

11_WLAN2.4GHz_802.11b 1M_Bottom Face Curved surface of Edge3 Tilted31_0mm_Ant 1_Ch11


Communication System: UID 0, WIFI (0); Frequency: 2462 MHz; Duty Cycle: 1:1.014
Medium: MSL_2450_160311 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.944$ S/m; $\epsilon_r = 51.073$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.29, 7.29, 7.29); Calibrated: 2015.5.28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2015.5.21
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch11/Area Scan (91x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 1.42 W/kg

Ch11/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 0 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 2.54 W/kg
SAR(1 g) = 0.772 W/kg; SAR(10 g) = 0.288 W/kg
Maximum value of SAR (measured) = 1.47 W/kg

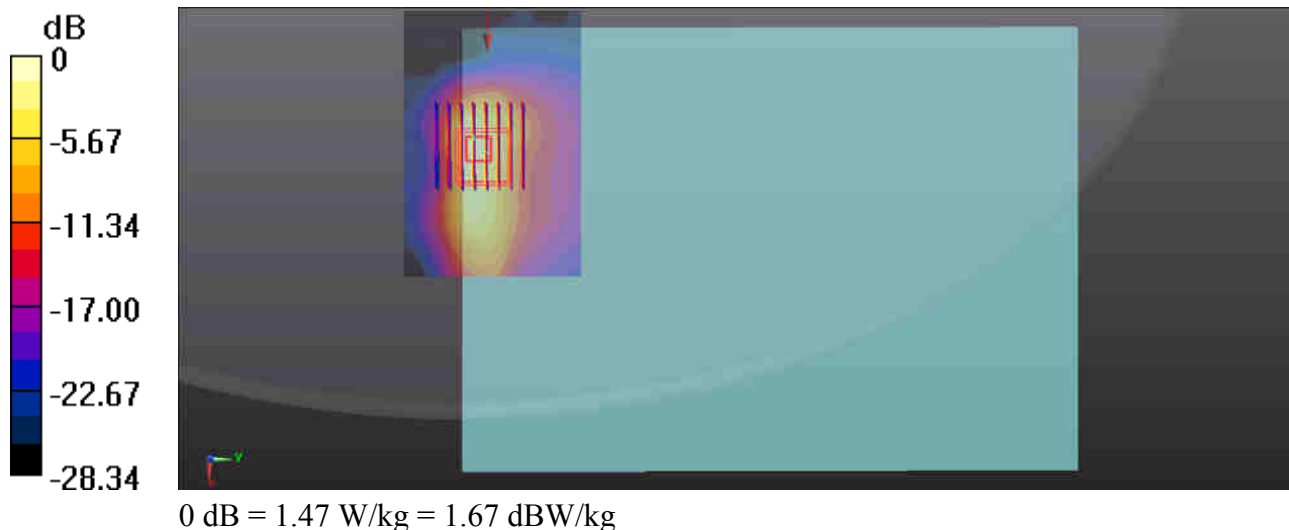

12_WLAN2.4GHz_802.11b 1M_Edge 2_0mm_Ant 2_Ch11


Communication System: UID 0, WIFI (0); Frequency: 2462 MHz; Duty Cycle: 1:1.009
Medium: MSL_2450_160311 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.944$ S/m; $\epsilon_r = 51.073$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.29, 7.29, 7.29); Calibrated: 2015.5.28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2015.5.21
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch11/Area Scan (41x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 1.72 W/kg

Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 7.476 V/m; Power Drift = 0.16 dB
Peak SAR (extrapolated) = 2.36 W/kg
SAR(1 g) = 0.949 W/kg; SAR(10 g) = 0.388 W/kg
Maximum value of SAR (measured) = 1.60 W/kg

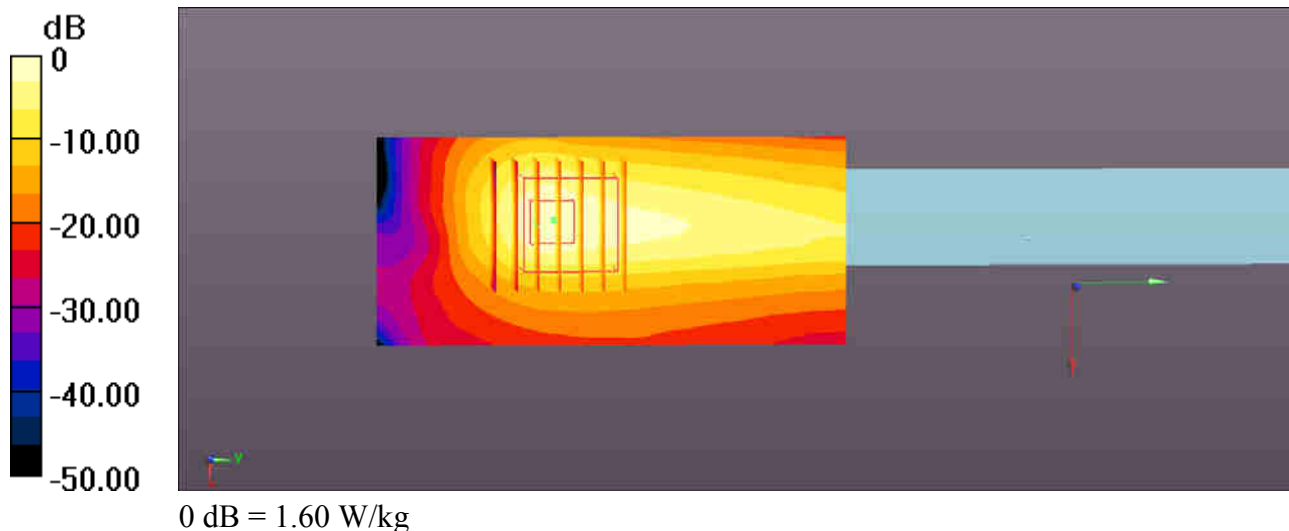

13_WLAN2.4GHz_802.11n-HT20_Edge2_0mm_Ant 1+2_Ch6

Communication System: UID 0, WIFI (0); Frequency: 2437 MHz; Duty Cycle: 1:1.095

Medium: MSL_2450_160311 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.909$ S/m; $\epsilon_r = 51.183$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.29, 7.29, 7.29); Calibrated: 2015.5.28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2015.5.21
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch6/Area Scan (41x221x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.753 W/kg


Ch6/Zoom Scan (7x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.615 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.951 W/kg

SAR(1 g) = 0.367 W/kg; SAR(10 g) = 0.148 W/kg

Maximum value of SAR (measured) = 0.632 W/kg

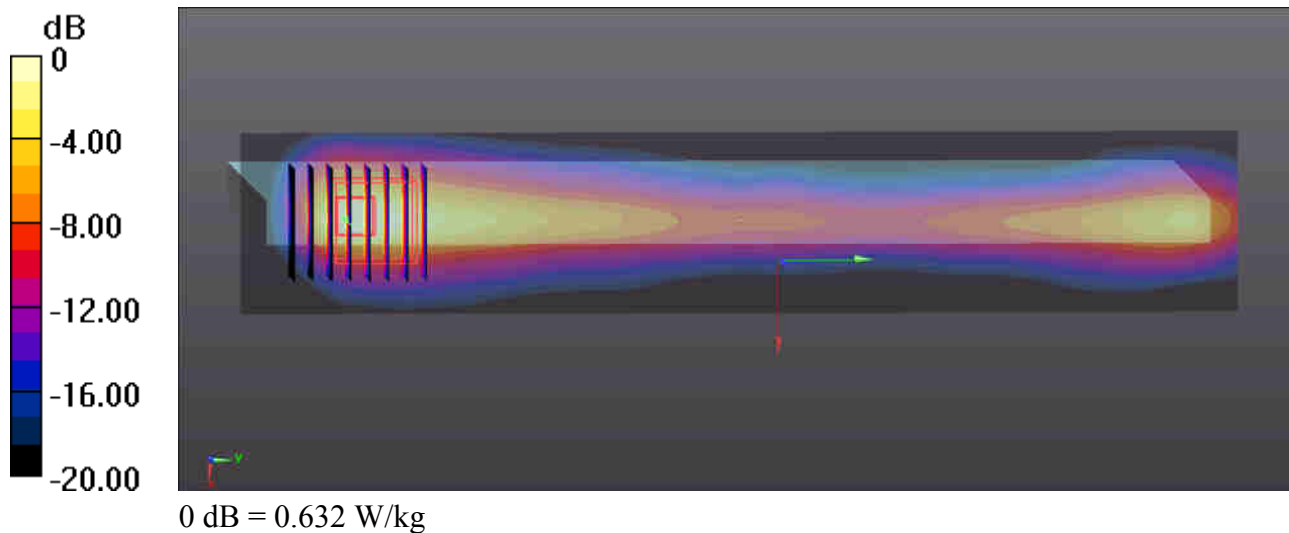

14_WLAN5G_Band1 802.11a 6M_Bottom Face Curved surface of Edge3 Tilted31_0mm_Ant1_Ch48


Communication System: UID 0, WIFI (0); Frequency: 5240 MHz; Duty Cycle: 1:1.071
Medium: MSL_5000_160310 Medium parameters used: $f = 5240$ MHz; $\sigma = 5.468$ S/m; $\epsilon_r = 48.581$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.9 °C ; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(4.25, 4.25, 4.25); Calibrated: 2015.11.27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2015.7.21
- Phantom: SAM3; Type: SAM; Serial: TP-1127
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch48/Area Scan (91x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 2.72 W/kg

Ch48/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 0.7010 V/m; Power Drift = -0.05 dB
Peak SAR (extrapolated) = 6.39 W/kg
SAR(1 g) = 0.790 W/kg; SAR(10 g) = 0.120 W/kg
Maximum value of SAR (measured) = 2.71 W/kg

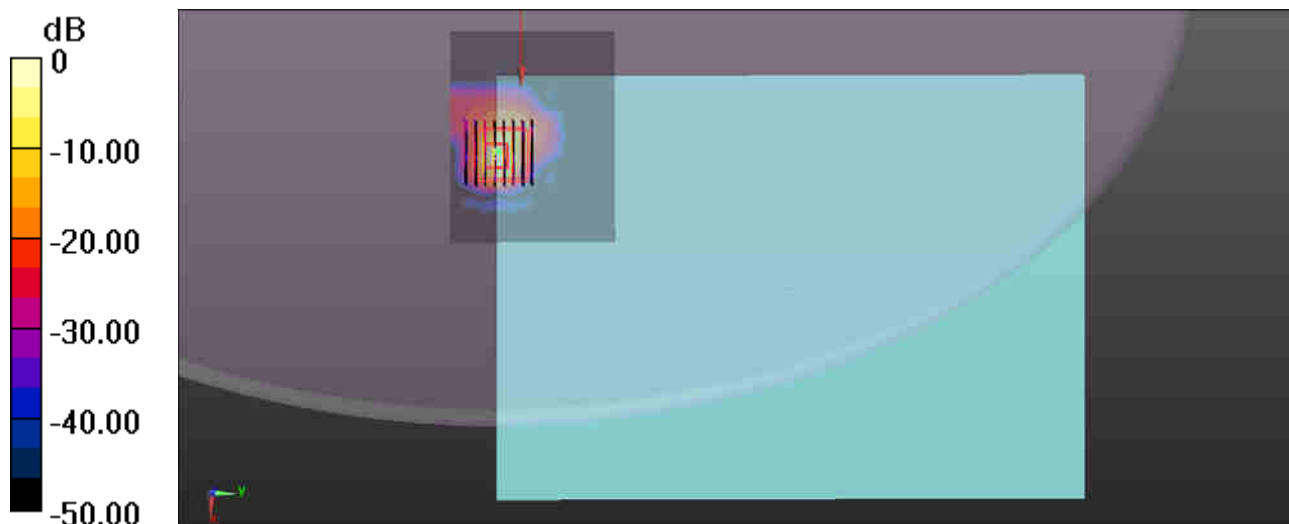

0 dB = 2.71 W/kg = 4.33 dBW/kg

15_WLAN5G_Band2 802.11a 6M_Bottom Face Curved surface of Edge1 Tilted31_0mm_Ant 2_Ch52


Communication System: UID 0, WIFI (0); Frequency: 5260 MHz; Duty Cycle: 1:1.07
Medium: MSL_5000_160310 Medium parameters used: $f = 5260$ MHz; $\sigma = 5.495$ S/m; $\epsilon_r = 48.535$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.9 °C ; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(4.25, 4.25, 4.25); Calibrated: 2015.11.27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2015.7.21
- Phantom: SAM3; Type: SAM; Serial: TP-1127
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch52/Area Scan (51x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 2.05 W/kg

Ch52/Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 0 V/m; Power Drift = 0.10 dB
Peak SAR (extrapolated) = 5.02 W/kg
SAR(1 g) = 0.912 W/kg; SAR(10 g) = 0.187 W/kg
Maximum value of SAR (measured) = 2.86 W/kg

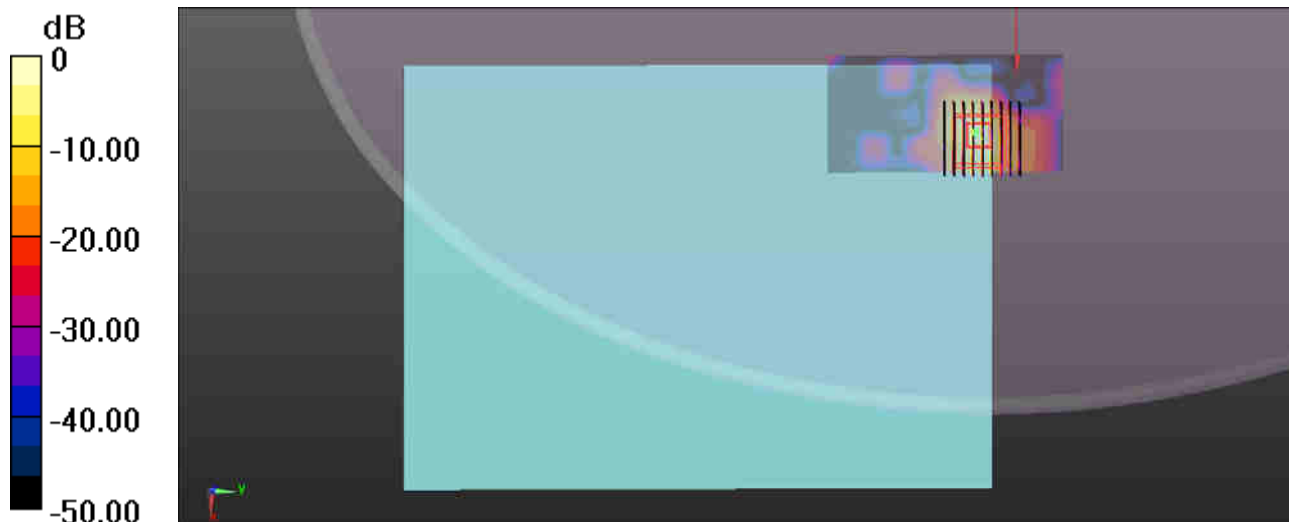

0 dB = 2.86 W/kg = 4.56 dBW/kg

16_WLAN5G_Band2 802.11n-HT20 MCS0_Bottom Face Curved surface of Edge3 Tilted31_0mm_Ant 1+2_Ch60


Communication System: UID 0, WIFI (0); Frequency: 5300 MHz;Duty Cycle: 1:1.092
Medium: MSL_5000_160310 Medium parameters used: $f = 5300$ MHz; $\sigma = 5.556$ S/m; $\epsilon_r = 48.41$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.9 °C ; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(4.25, 4.25, 4.25); Calibrated: 2015.11.27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2015.7.21
- Phantom: SAM3; Type: SAM; Serial: TP-1127
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch60/Area Scan (51x271x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 2.30 W/kg

Ch60/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 0 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 5.65 W/kg
SAR(1 g) = 0.745 W/kg; SAR(10 g) = 0.116 W/kg
Maximum value of SAR (measured) = 2.56 W/kg

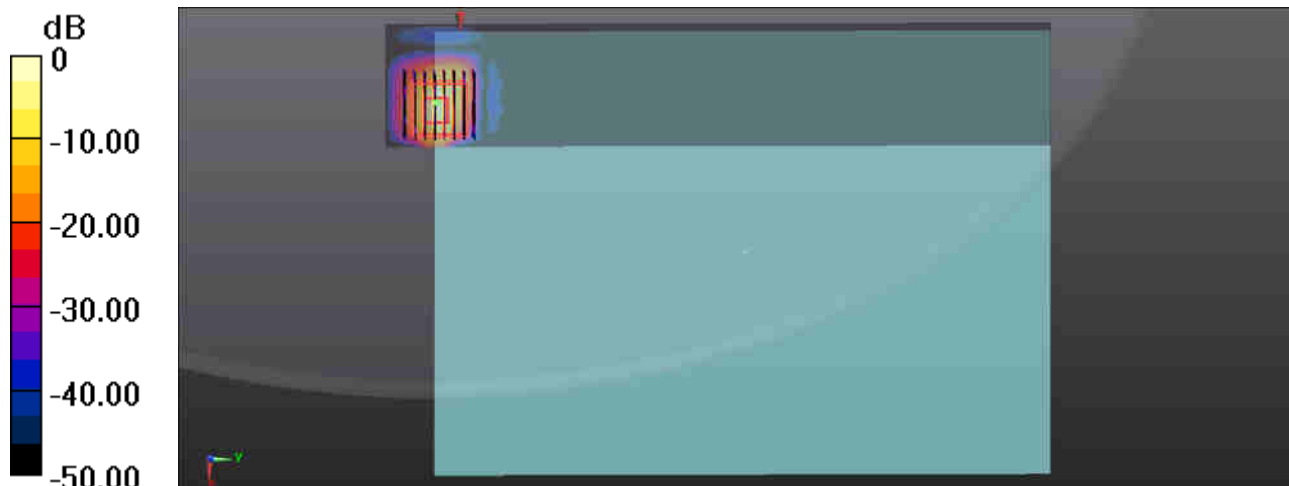

0 dB = 2.56 W/kg = 4.08 dBW/kg

17_WLAN5G_Band3 802.11a 6M_Bottom Face Curved surface of Edge3 Tilted31_0mm_Ant 1_Ch140


Communication System: UID 0, WIFI (0); Frequency: 5700 MHz; Duty Cycle: 1:1.071
Medium: MSL_5000_160311 Medium parameters used: $f = 5700$ MHz; $\sigma = 6.022$ S/m; $\epsilon_r = 48.097$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.9 °C ; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(3.65, 3.65, 3.65); Calibrated: 2015.11.27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2015.7.21
- Phantom: SAM3; Type: SAM; Serial: TP-1127
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch140/Area Scan (71x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 2.85 W/kg

Ch140/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 0 V/m; Power Drift = 0.07 dB
Peak SAR (extrapolated) = 4.72 W/kg
SAR(1 g) = 0.642 W/kg; SAR(10 g) = 0.094 W/kg
Maximum value of SAR (measured) = 2.49 W/kg

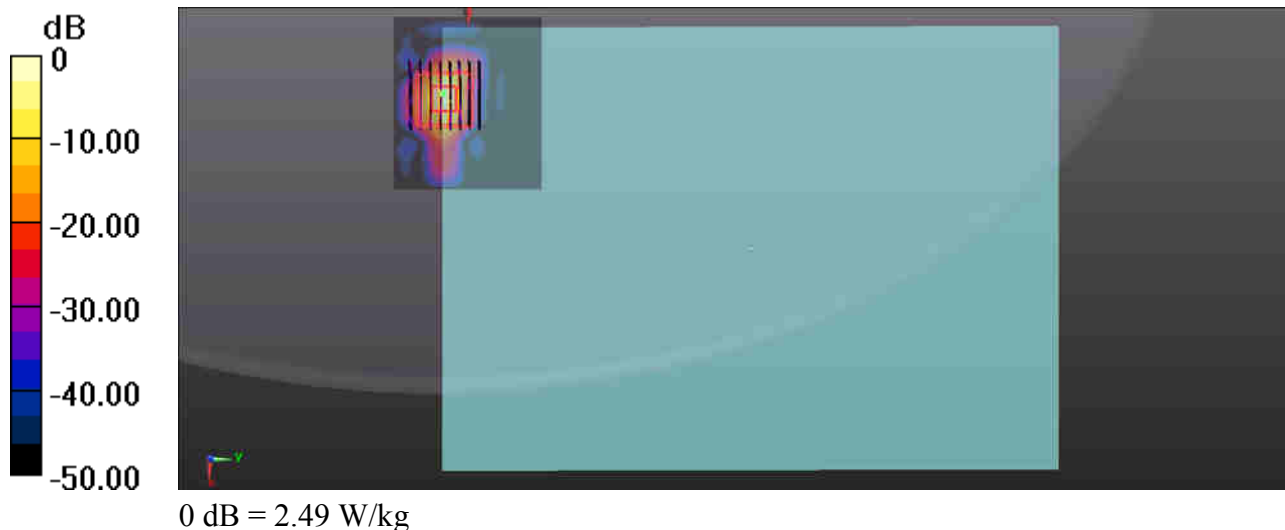

18_WLAN5G_Band3 802.11a 6M_Bottom Face Curved surface of Edge1 Tilted31_0mm_Ant 2_Ch116


Communication System: UID 0, WIFI (0); Frequency: 5580 MHz; Duty Cycle: 1:1.07
Medium: MSL_5000_160311 Medium parameters used: $f = 5580$ MHz; $\sigma = 5.959$ S/m; $\epsilon_r = 47.915$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.9 °C ; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(3.65, 3.65, 3.65); Calibrated: 2015.11.27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2015.7.21
- Phantom: SAM3; Type: SAM; Serial: TP-1127
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch116/Area Scan (81x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 2.04 W/kg

Ch116/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 0.3430 V/m; Power Drift = -0.15 dB
Peak SAR (extrapolated) = 5.00 W/kg
SAR(1 g) = 0.919 W/kg; SAR(10 g) = 0.178 W/kg
Maximum value of SAR (measured) = 2.78 W/kg

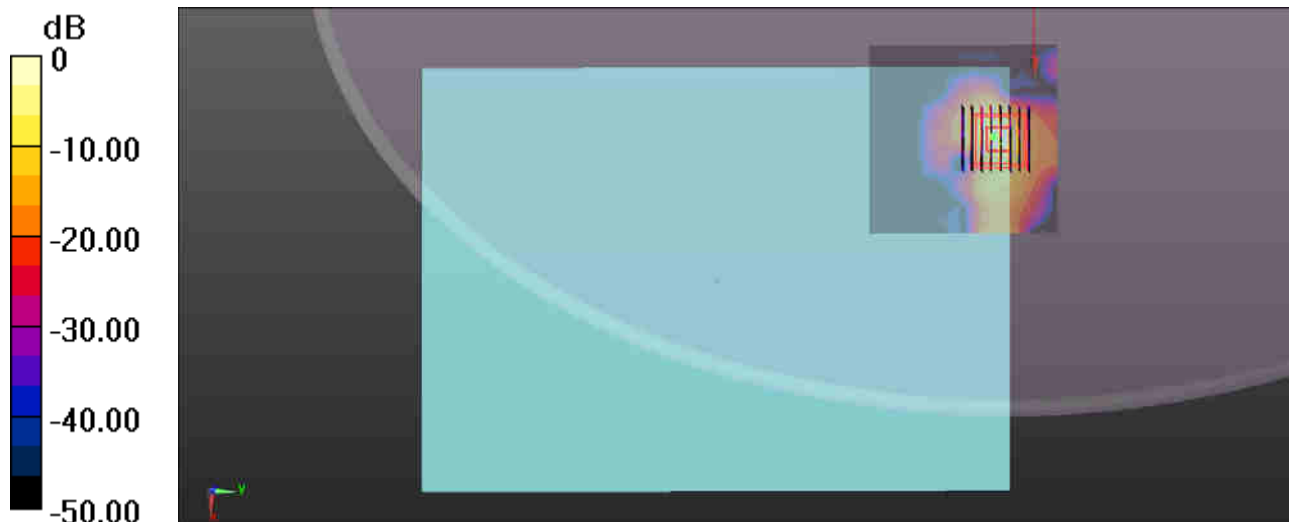

0 dB = 2.78 W/kg = 4.44 dBW/kg

19_WLAN5G_Band3 802.11n-HT20 MCS0_Bottom Face Curved surface of Edge1 Tilted31_0mm_Ant 1+2_Ch116


Communication System: UID 0, WIFI (0); Frequency: 5580 MHz; Duty Cycle: 1:1.092
Medium: MSL_5000_160311 Medium parameters used: $f = 5580$ MHz; $\sigma = 5.959$ S/m; $\epsilon_r = 47.915$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.9 °C ; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(3.65, 3.65, 3.65); Calibrated: 2015.11.27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2015.7.21
- Phantom: SAM3; Type: SAM; Serial: TP-1127
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch116/Area Scan (51x271x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 2.11 W/kg

Ch116/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 0 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 6.30 W/kg
SAR(1 g) = 0.587 W/kg; SAR(10 g) = 0.111 W/kg
Maximum value of SAR (measured) = 2.19 W/kg

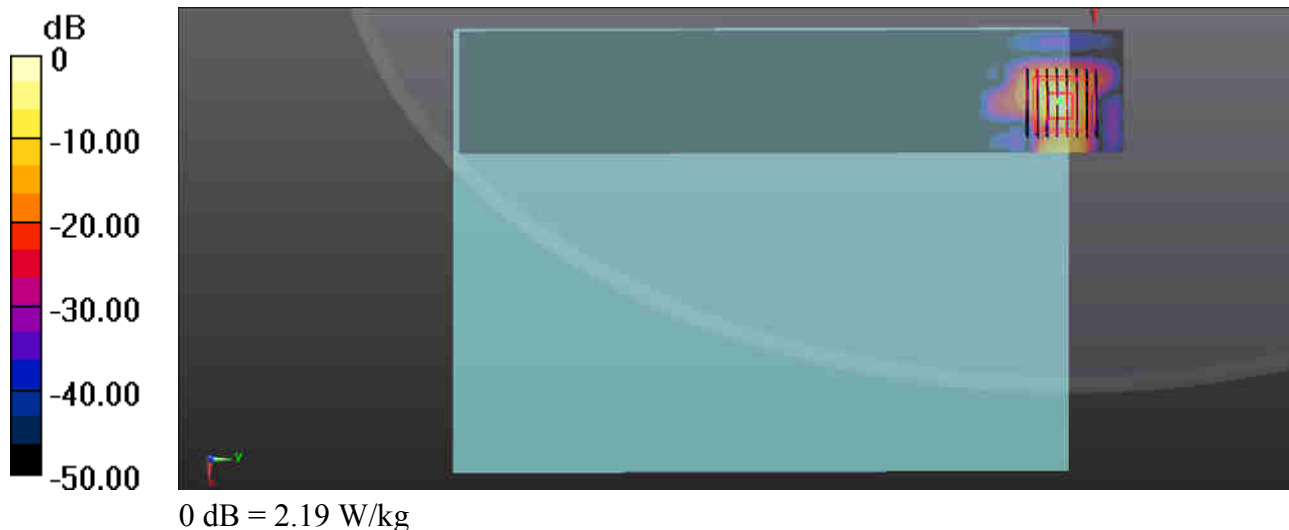

20_WLAN5G_Band4 802.11a 6M_Bottom Face Curved surface of Edge3 Tilted31_0mm_Ant 1_Ch157


Communication System: UID 0, WIFI (0); Frequency: 5785 MHz; Duty Cycle: 1:1.071
Medium: MSL5000_160312 Medium parameters used: $f = 5785$ MHz; $\sigma = 6.11$ S/m; $\epsilon_r = 47.844$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.9 °C ; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(3.77, 3.77, 3.77); Calibrated: 2015.11.27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2015.7.21
- Phantom: SAM3; Type: SAM; Serial: TP-1127
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch157/Area Scan (51x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.42 W/kg

Ch157/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 0 V/m; Power Drift = 0.14 dB
Peak SAR (extrapolated) = 5.36 W/kg
SAR(1 g) = 0.726 W/kg; SAR(10 g) = 0.099 W/kg
Maximum value of SAR (measured) = 2.38 W/kg

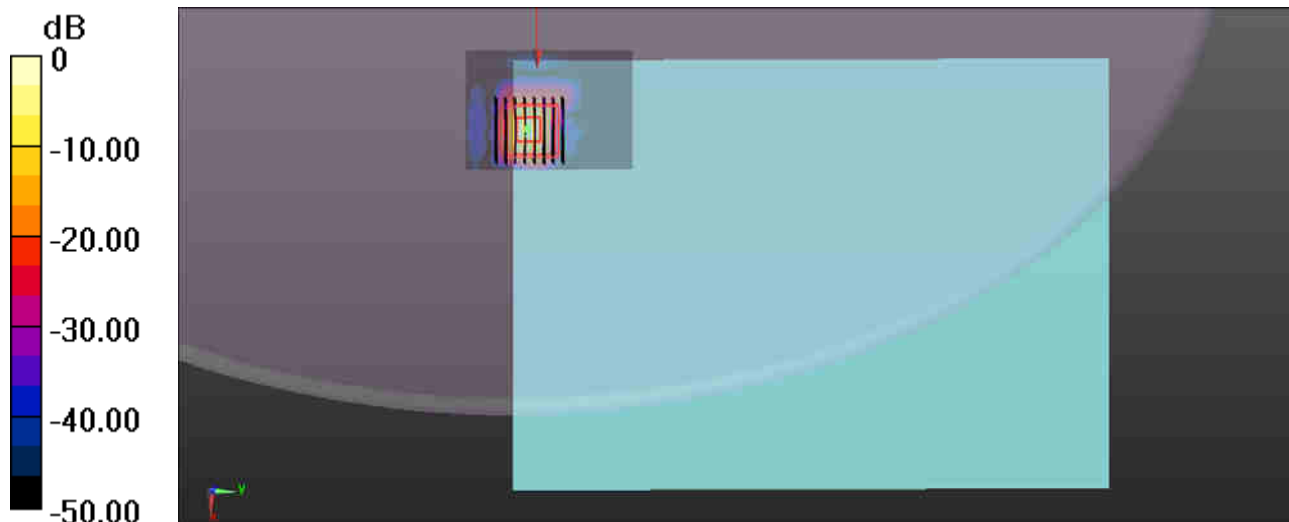

0 dB = 2.38 W/kg = 3.77 dBW/kg

21_WLAN5G_Band4 802.11a 6M_Bottom Face Curved surface of Edge1 Tilted31_0mm_Ant 2_Ch165


Communication System: UID 0, WIFI (0); Frequency: 5825 MHz; Duty Cycle: 1:1.070
Medium: MSL_5000_160312 Medium parameters used: $f = 5825$ MHz; $\sigma = 6.166$ S/m; $\epsilon_r = 47.679$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.9 °C ; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(3.77, 3.77, 3.77); Calibrated: 2015.11.27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2015.7.21
- Phantom: SAM3; Type: SAM; Serial: TP-1127
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch165/Area Scan (71x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.78 W/kg

Ch165/Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 0.8300 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 4.58 W/kg
SAR(1 g) = 0.769 W/kg; SAR(10 g) = 0.146 W/kg
Maximum value of SAR (measured) = 2.55 W/kg

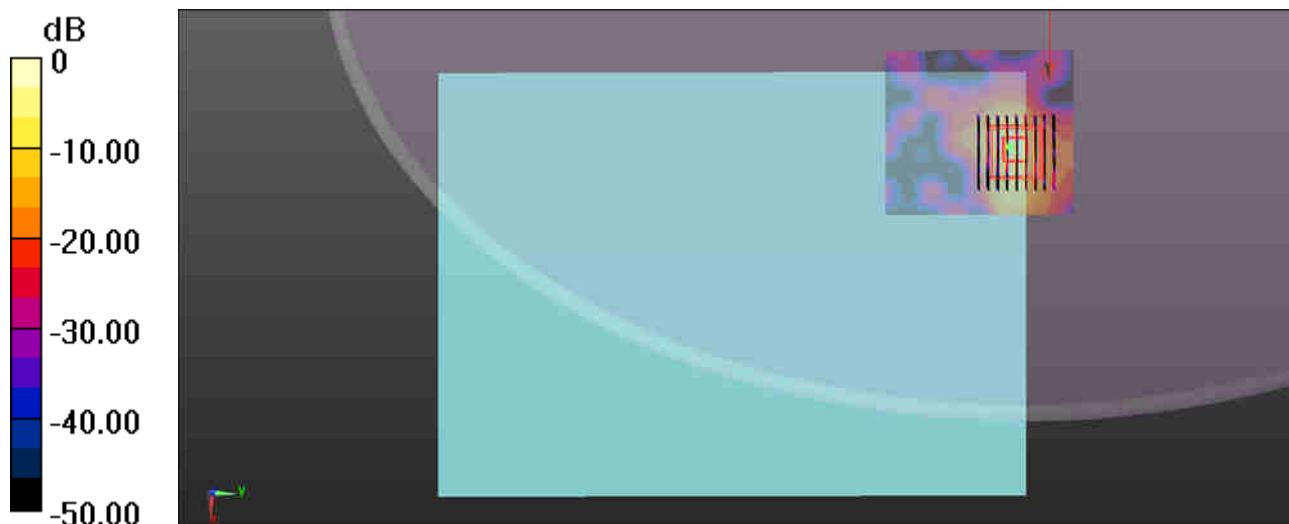

0 dB = 2.55 W/kg = 4.07 dBW/kg

22_WLAN5G_Band4 802.11n-HT20 MCS0_Bottom Face Curved surface of Edge3 Tilted31_0mm_Ant 1+2_Ch157


Communication System: UID 0, WIFI (0); Frequency: 5785 MHz; Duty Cycle: 1:1.092
Medium: MSL5000_160312 Medium parameters used: $f = 5785$ MHz; $\sigma = 6.11$ S/m; $\epsilon_r = 47.844$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.9 °C ; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(3.77, 3.77, 3.77); Calibrated: 2015.11.27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2015.7.21
- Phantom: SAM3; Type: SAM; Serial: TP-1127
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch157/Area Scan (51x271x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.604 W/kg

Ch157/Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 0.2640 V/m; Power Drift = -0.18 dB
Peak SAR (extrapolated) = 6.01 W/kg
SAR(1 g) = 0.762 W/kg; SAR(10 g) = 0.107 W/kg
Maximum value of SAR (measured) = 3.20 W/kg

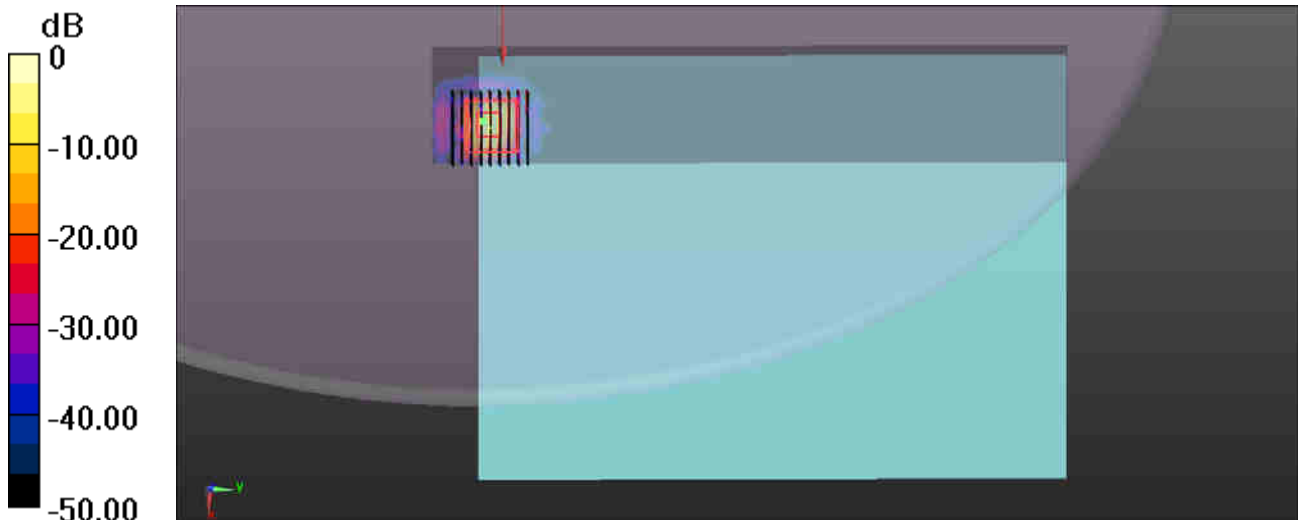

0 dB = 3.20 W/kg = 5.05 dBW/kg

23_BT3.0_1Mbps_Bottom Face Curved surface of Edge3 Tilted31_0mm_Ant 1_Ch0


Communication System: UID 0, Bluetooth (0); Frequency: 2402 MHz; Duty Cycle: 1:1.2
Medium: MSL_2450_160311 Medium parameters used: $f = 2402$ MHz; $\sigma = 1.859$ S/m; $\epsilon_r = 51.343$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.29, 7.29, 7.29); Calibrated: 2015.5.28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2015.5.21
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch0/Area Scan (71x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.241 W/kg

Ch0/Zoom Scan (8x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 0.3650 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 0.414 W/kg
SAR(1 g) = 0.119 W/kg; SAR(10 g) = 0.044 W/kg
Maximum value of SAR (measured) = 0.261 W/kg

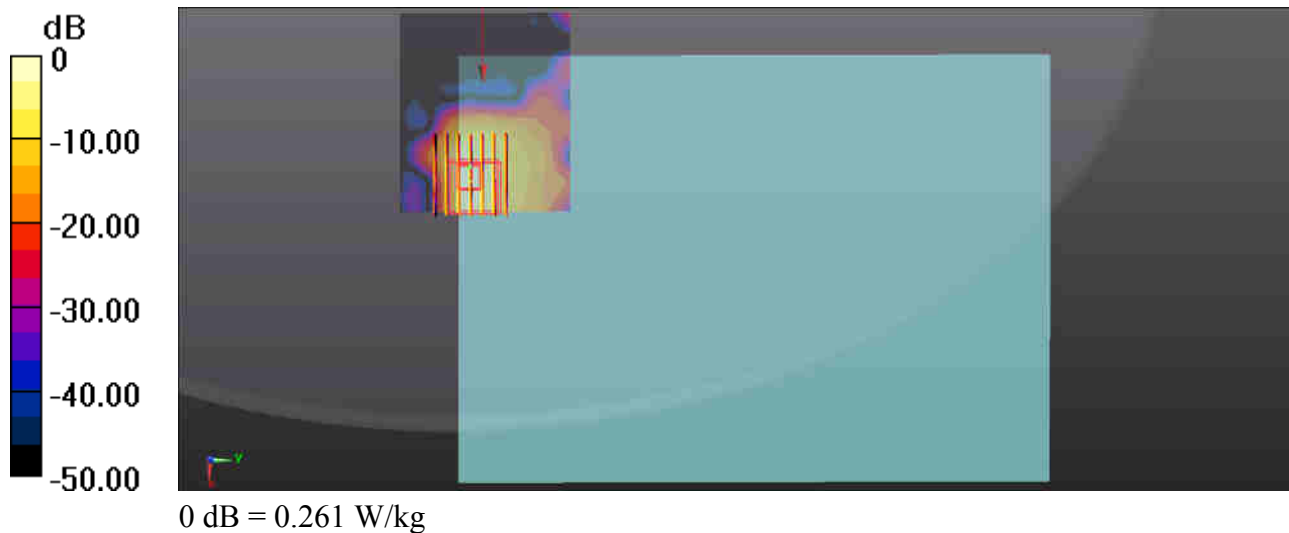



Appendix C. DASYS Calibration Certificate

The DASYS calibration certificates are shown as follows.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **Sporton-KS (Auden)**

Certificate No: **D750V3-1065_Nov15**

CALIBRATION CERTIFICATE

Object **D750V3 - SN: 1065**

Calibration procedure(s) **QA CAL-05.v9
Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **November 24, 2015**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	07-Oct-15 (No. 217-02222)	Oct-16
Power sensor HP 8481A	US37292783	07-Oct-15 (No. 217-02222)	Oct-16
Power sensor HP 8481A	MY41092317	07-Oct-15 (No. 217-02223)	Oct-16
Reference 20 dB Attenuator	SN: 5058 (20k)	01-Apr-15 (No. 217-02131)	Mar-16
Type-N mismatch combination	SN: 5047.2 / 06327	01-Apr-15 (No. 217-02134)	Mar-16
Reference Probe EX3DV4	SN: 7349	30-Dec-14 (No. EX3-7349_Dec14)	Dec-15
DAE4	SN: 601	17-Aug-15 (No. DAE4-601_Aug15)	Aug-16
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator R&S SMT-06	100972	15-Jun-15 (in house check Jun-15)	In house check: Jun-18
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-15)	In house check: Oct-16

Calibrated by: **Claudio Leubler** Name: Claudio Leubler Function: Laboratory Technician

Signature

Approved by: **Katja Pokovic** Technical Manager

Issued: November 24, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- e) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	750 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.9	0.89 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	42.8 ± 6 %	0.90 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.07 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	8.25 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.35 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	5.38 W/kg ± 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.5	0.96 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	55.9 ± 6 %	0.97 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.23 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	8.86 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.48 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	5.89 W/kg ± 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	53.4 Ω - 2.1 j Ω
Return Loss	- 28.3 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	49.1 Ω - 3.9 j Ω
Return Loss	- 27.8 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.032 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	May 10, 2012

DASY5 Validation Report for Head TSL

Date: 24.11.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN: 1065

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used: $f = 750$ MHz; $\sigma = 0.9$ S/m; $\epsilon_r = 42.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.1, 10.1, 10.1); Calibrated: 30.12.2014;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 17.08.2015
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 58.14 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 3.09 W/kg

SAR(1 g) = 2.07 W/kg; SAR(10 g) = 1.35 W/kg

Maximum value of SAR (measured) = 2.74 W/kg

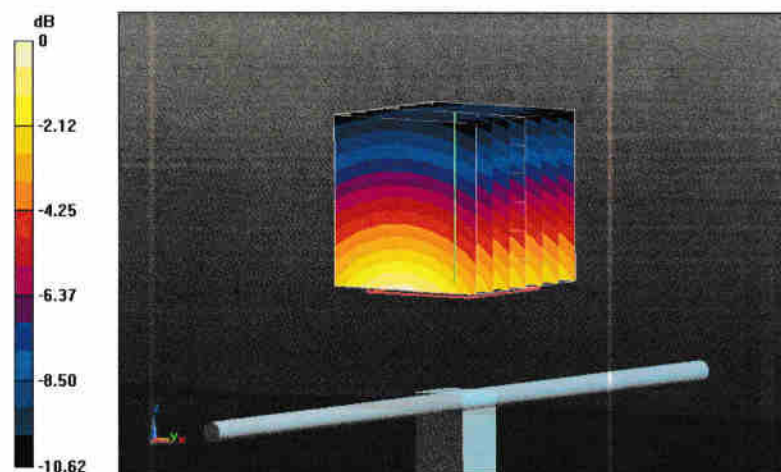

0 dB = 2.74 W/kg = 4.38 dBW/kg

Impedance Measurement Plot for Head TSL

24 Nov 2015 15:38:55


CH1 S11 1 U FS 1: 53.375 Ω -2.0566 Ω 103.18 pF 750.000 000 MHz

*
De1

CA

Avg
16

H1d

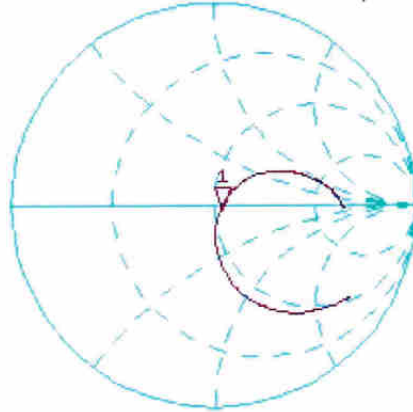


CH2 S11 LOG 5 dB/REF -20 dB 1:-28.345 dB 750.000 000 MHz

CA

Avg
16

H1d

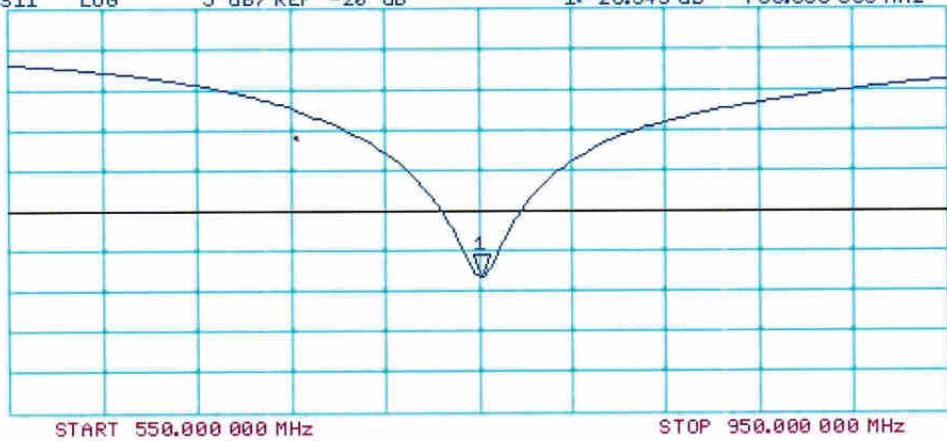

DASY5 Validation Report for Body TSL

Date: 24.11.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN: 1065

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used: $f = 750$ MHz; $\sigma = 0.97$ S/m; $\epsilon_r = 55.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(9.61, 9.61, 9.61); Calibrated: 30.12.2014;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 17.08.2015
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 58.13 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 3.29 W/kg

SAR(1 g) = 2.23 W/kg; SAR(10 g) = 1.48 W/kg

Maximum value of SAR (measured) = 2.94 W/kg

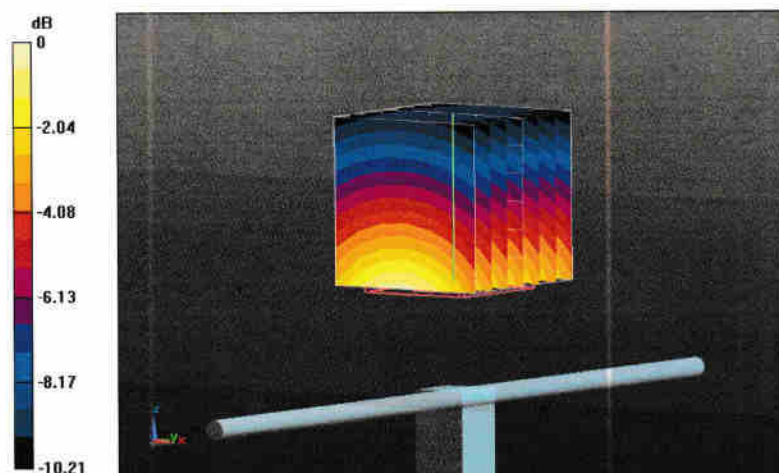

0 dB = 2.94 W/kg = 4.68 dBW/kg