



# FCC RF Test Report

**APPLICANT** : Lenovo(Shanghai) Electronics Technology Co., Ltd.  
**EQUIPMENT** : Portable Tablet Computer  
**BRAND NAME** : Lenovo  
**MODEL NAME** : Lenovo YT3-X90X  
**FCC ID** : O57YT3X90X  
**STANDARD** : FCC 47 CFR Part 2, 22(H), 24(E), 27(L)  
**CLASSIFICATION** : PCS Licensed Transmitter (PCB)

The product was received on Jul. 16, 2015 and testing was completed on Aug. 29, 2015. We, SPORTON INTERNATIONAL (SHENZHEN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA / EIA-603-C-2004 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (SHENZHEN) INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



**SPORTON INTERNATIONAL (SHENZHEN) INC.**

**1F & 2F, Building A, Morning Business Center, No. 4003 ShiGu Rd., Xili Town,  
Nanshan District, Shenzhen, Guangdong, P. R. China**



## TABLE OF CONTENTS

<b>1. GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1 Applicant.....	5
1.2 Manufacturer .....	5
1.3 Product Feature of Equipment Under Test .....	5
1.4 Product Specification subjective to this standard.....	6
1.5 Modification of EUT.....	6
1.6 Component List .....	7
1.7 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator .....	8
1.8 Testing Location .....	9
1.9 Applicable Standards .....	9
<b>2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....</b>	<b>10</b>
2.1 Test Mode.....	10
2.2 Connection Diagram of Test System .....	12
2.3 Support Unit used in test configuration .....	13
2.4 Measurement Results Explanation Example .....	13
<b>3. TEST RESULT.....</b>	<b>14</b>
3.1 Conducted Output Power Measurement.....	14
3.2 Peak-to-Average Ratio .....	16
3.3 Effective Radiated Power and Effective Isotropic Radiated Power Measurement .....	32
3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement.....	36
3.5 Band Edge Measurement.....	60
3.6 Conducted Spurious Emission Measurement.....	68
3.7 Field Strength of Spurious Radiation Measurement .....	76
3.8 Frequency Stability Measurement.....	85
<b>4. LIST OF MEASURING EQUIPMENT .....</b>	<b>91</b>
<b>5. UNCERTAINTY OF EVALUATION.....</b>	<b>92</b>
<b>APPENDIX A. SETUP PHOTOGRAPHS</b>	



### REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG571615A	Rev. 01	Initial issue of report	Sep. 21, 2015



### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	§2.1046	Conducted Output Power	Reporting Only	PASS	-
3.2	§24.232(d)	Peak-to-Average Ratio	< 13 dB	PASS	-
3.3	§22.913(a)(2)	Effective Radiated Power	< 7 Watts	PASS	-
	§24.232(c)	Equivalent Isotropic Radiated Power	< 2 Watts	PASS	-
	§27.50(d)(4)	Equivalent Isotropic Radiated Power	< 1 Watts	PASS	-
3.4	§2.1049	Occupied Bandwidth	Reporting Only	PASS	-
3.5	§2.1051 §22.917(a) §24.238(a) §27.53(h)	Band Edge Measurement	< 43+10log10(P[Watts])	PASS	-
3.6	§2.1051 §22.917(a) §24.238(a) §27.53(h)	Conducted Emission	< 43+10log10(P[Watts])	PASS	-
3.7	§2.1053 §22.917(a) §24.238(a) §27.53(h)	Field Strength of Spurious Radiation	< 43+10log10(P[Watts])	PASS	Under limit 27.13 dB at 5640.000 MHz
3.8	§2.1055 §22.355	Frequency Stability for Temperature & Voltage	< 2.5 ppm for Part 22 Within Authorized Band	PASS	-
	§2.1055 §24.235 §27.54				



# 1. General Description

## 1.1 Applicant

Lenovo(Shanghai) Electronics Technology Co., Ltd.

NO.68 BUILDING, 199 FENJU RD, China (Shanghai) Pilot Free Trade Zone, 200131, CHINA

## 1.2 Manufacturer

Lenovo PC HK Limited

23/F, Lincoln House, Taikoo Place, 979 King's Road, Quarry Bay, Hong Kong

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Portable Tablet Computer
Brand Name	Lenovo
Model Name	Lenovo YT3-X90X
FCC ID	O57YT3X90X
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/DC-HSDPA/ HSPA+(Downlink only)/LTE WLAN 2.4GHz 802.11b/g/n HT20 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth v3.0 + EDR/Bluetooth v4.1 LE
IMEI Code	Conducted: 867232020015443 Radiation: 868388020000055 ERP&EIRP: 868388020000055
HW Version	LenovoPad YT3-X90X
SW Version	YT3-X90X_150710
EUT Stage	Identical Prototype

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

### 1.4 Product Specification subjective to this standard

Product Specification subjective to this standard	
<b>Tx Frequency</b>	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band IV : 1712.4 MHz ~ 1752.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz
<b>Rx Frequency</b>	GSM850: 869.2 MHz ~ 893.8 MHz GSM1900: 1930.2 MHz ~ 1989.8 MHz WCDMA Band V: 871.4 MHz ~ 891.6 MHz WCDMA Band IV : 2112.4 MHz ~ 2152.6 MHz WCDMA Band II: 1932.4 MHz ~ 1987.6 MHz
<b>Maximum Output Power to Antenna</b>	GSM850 : 32.33 dBm GSM1900 : 28.80 dBm WCDMA Band V : 22.66 dBm WCDMA Band IV : 22.84 dBm WCDMA Band II : 22.28 dBm
<b>Antenna Type</b>	PIFA Antenna
<b>Type of Modulation</b>	GPRS: GMSK EDGE: GMSK / 8PSK WCDMA: QPSK (Uplink) HSDPA/ DC-HSDPA: QPSK (Uplink) HSUPA: QPSK (Uplink) DC-HSDPA: 64QAM HSPA+: 16QAM (Downlink Only)

### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

## 1.6 Component List

**Note:** there are two types of EUT, the details refer the following table. According to the difference, we evaluate it is not affect RF performance, so only choose sample 1 to perform RF test.

Component	Sample 1	Sample 2
CPU	Intel_Z8500 Cherry Trail T4 Z8500,2.55 GHz Quad Core	Intel_Z8500 Cherry Trail T4 Z8500,2.55 GHz Quad Core
BT/WIFI Module	Broadcom_BCM4356XKUBG BT/WIFI;BCM4356XKUBG;WLBGA192	Broadcom_BCM4356XKUBG BT/WIFI;BCM4356XKUBG;WLBGA192
2G/3G/LTE Module	Intel_PMB5747 E302 SMARTi4.5 P20(PMB5747 E302)	Intel_PMB5747 E302 SMARTi4.5 P20(PMB5747 E302)
Flash	Samsung_K3QF2F2 OEMAGCE EMMC;KLMAG2WEPD-B031;16GB; FBGA153 LPDDR3;K3QF2F2 OEM-AGCE ; 1GB;1600Mbps	Toshiba & Micron_ ELPIDA-F8164A3MA-GD-F EMMC;THGBMFG7C2LBAIL;16GB;WFBGA 153LPDDR3;EDF8164A3MA-GD-F-R;1GB;1 600Mbps
LCM	AUO_B101QAN01 B101QAN01.0;10.1inch;IPS;2560x1600	Innolux_P101SFA-AF0 P101SFA-AF0;10.1inch;IPS;2560x1600
TP	Ofilm_IST940E 152011 Yoga3 X10 _GFF TP MCF-101-2261	GIS_S7813 5141 334 0037 ACFM727 YT3X10_GFF TC101GFL09V.B IST9400E
Front_camera	Sunny_F1521 CCM D5V13C 5M OV5693 COB 25PIN ZIF	Ofilm_L5693F40 CCM L5693F40 5M OV5693 COB 25PIN ZIF
Back_camera	Sunny_F13M01D CCM F13M01D 13M AR1335 COB 30PIN BtoB	Ofilm_L1335A00 CCM L1335A00 13M AR1335 COB 30PIN BtoB
Main Battery	SUNWODA_L15D2K32 LG-ICR18650E1-3200mAh	SCUD_L15D2K32 ICR18650-3200mAh
Ancillary Battery	SCUD_L15D1P31 CA3448F2HV-4000mAh	SUNWODA_L15D1P31 ATL-3448F2 -4000mAh



### 1.7 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

FCC Rule	System	Type of Modulation	Maximum ERP/EIRP (W)	Frequency Tolerance (ppm)	Emission Designator
Part 22	GSM850 GPRS class 8	GMSK	0.9352	0.0705 ppm	244KGXW
Part 22	GSM850 EDGE class 8	8PSK	0.2716	0.0693 ppm	248KG7W
Part 22	WCDMA Band V RMC 12.2Kbps	QPSK	0.1082	0.0574 ppm	4M08F9W
Part 24	GSM1900 GPRS class 8	GMSK	1.2363	0.0250 ppm	248KGXW
Part 24	GSM1900 EDGE class 8	8PSK	0.5648	0.0255 ppm	252KG7W
Part 24	WCDMA Band II RMC 12.2Kbps	QPSK	0.2672	0.0314 ppm	4M08F9W
Part 27	WCDMA Band IV RMC 12.2Kbps	QPSK	0.2305	0.0254 ppm	4M10F9W





### 1.8 Testing Location

<b>Test Site</b>	SPORTON INTERNATIONAL (KUNSHAN) INC.	
<b>Test Site Location</b>	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958	
<b>Test Site No.</b>	<b>Sporton Site No.</b>	
	TH01-KS	

<b>Test Site</b>	SPORTON INTERNATIONAL (SHENZHEN) INC.	
<b>Test Site Location</b>	No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District, Shenzhen, Guangdong, P. R. China TEL: +86-755- 3320-2398	
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Registration No.</b>
	03CH01-SZ	831040

### 1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 22(H), 24(E), 27(L)
- ♦ ANSI / TIA / EIA-603-C-2004
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v02r02

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2. Test Configuration of Equipment Under Test

### 2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r02 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:

1. 30 MHz to 10th harmonic for GSM850 and WCDMA Band V.
2. 30 MHz to 10th harmonic for WCDMA Band IV
3. 30 MHz to 110th harmonic for GSM1900 and WCDMA Band II.

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Modes		
Band	Radiated TCs	Conducted TCs
GSM 850	<ul style="list-style-type: none"> <li>■ GPRS class 8 Link</li> <li>■ EDGE class 8 Link</li> </ul>	<ul style="list-style-type: none"> <li>■ GPRS class 8 Link</li> <li>■ EDGE class 8 Link</li> </ul>
GSM 1900	<ul style="list-style-type: none"> <li>■ GPRS class 8 Link</li> <li>■ EDGE class 8 Link</li> </ul>	<ul style="list-style-type: none"> <li>■ GPRS class 8 Link</li> <li>■ EDGE class 8 Link</li> </ul>
WCDMA Band V	<ul style="list-style-type: none"> <li>■ RMC 12.2Kbps Link</li> </ul>	<ul style="list-style-type: none"> <li>■ RMC 12.2Kbps Link</li> </ul>
WCDMA Band II	<ul style="list-style-type: none"> <li>■ RMC 12.2Kbps Link</li> </ul>	<ul style="list-style-type: none"> <li>■ RMC 12.2Kbps Link</li> </ul>
WCDMA Band IV	<ul style="list-style-type: none"> <li>■ RMC 12.2Kbps Link</li> </ul>	<ul style="list-style-type: none"> <li>■ RMC 12.2Kbps Link</li> </ul>

**Note:** The maximum power levels are chosen to test as the worst case configuration as follows:

- GPRS multi-slot class 8 mode for GMSK modulation,
- EDGE multi-slot class 8 mode for 8PSK modulation,
- RMC 12.2Kbps mode for WCDMA band V and WCDMA band IV,
- RMC 12.2Kbps mode for WCDMA band II, only these modes were used for all tests.




Conducted Power Measurement Results:

Conducted Power (*Unit: dBm)						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency	824.2	836.4	848.8	1850.2	1880.0	1909.8
GPRS class 8	32.22	32.29	32.33	28.68	28.80	28.78
GPRS class 10	29.42	29.51	29.57	26.07	26.16	26.06
GPRS class 11	27.57	27.67	27.64	24.35	24.42	24.23
GPRS class 12	26.35	26.43	26.49	23.11	23.24	23.03
EGPRS class 8	27.20	27.14	27.00	24.79	25.05	25.43
EGPRS class 10	27.16	27.11	26.99	24.76	25.06	25.42
EGPRS class 11	26.32	26.25	26.13	24.03	24.24	24.70
EGPRS class 12	25.06	25.00	24.78	22.89	23.21	23.54


Conducted Power (*Unit: dBm)									
Band	WCDMA Band V			WCDMA Band II			WCDMA Band IV		
Channel	4132	4182	4233	9262	9400	9538	1312	1413	1513
Frequency	826.4	836.4	846.6	1852.4	1880	1907.6	1712.4	1732.6	1752.6
RMC 12.2Kbps	22.65	22.57	22.66	22.21	22.28	22.04	22.84	22.80	22.60
HSDPA Subtest-1	22.43	22.35	22.46	21.76	22.11	21.88	22.09	22.07	22.01
HSDPA Subtest-2	22.40	22.33	22.42	21.98	22.11	21.92	22.11	22.09	21.99
HSDPA Subtest-3	22.47	22.33	22.40	22.02	22.13	21.89	21.91	22.08	22.03
HSDPA Subtest-4	22.20	22.33	22.35	21.98	22.09	21.87	22.09	22.08	22.01
DC-HSDPA Subtest-1	22.38	22.30	22.42	21.72	22.08	21.85	22.02	22.03	21.98
DC-HSDPA Subtest-2	22.37	22.31	22.40	21.88	22.05	21.88	22.04	22.02	21.98
DC-HSDPA Subtest-3	22.42	22.30	22.36	21.96	22.12	21.84	21.95	22.01	21.95
DC-HSDPA Subtest-4	22.39	22.29	22.34	21.95	22.07	21.83	21.99	22.03	21.96
HSUPA Subtest-1	22.35	22.35	22.42	21.25	21.34	21.20	21.30	21.35	21.18
HSUPA Subtest-2	21.25	21.26	21.38	20.18	20.22	20.36	20.16	20.20	20.35
HSUPA Subtest-3	21.71	21.61	21.57	21.50	21.56	21.08	21.47	21.58	21.15
HSUPA Subtest-4	20.88	20.80	20.95	20.70	20.81	20.32	20.45	20.78	20.33
HSUPA Subtest-5	22.35	22.26	22.33	21.76	21.86	21.59	22.30	22.35	22.21

## 2.2 Connection Diagram of Test System

For 22H

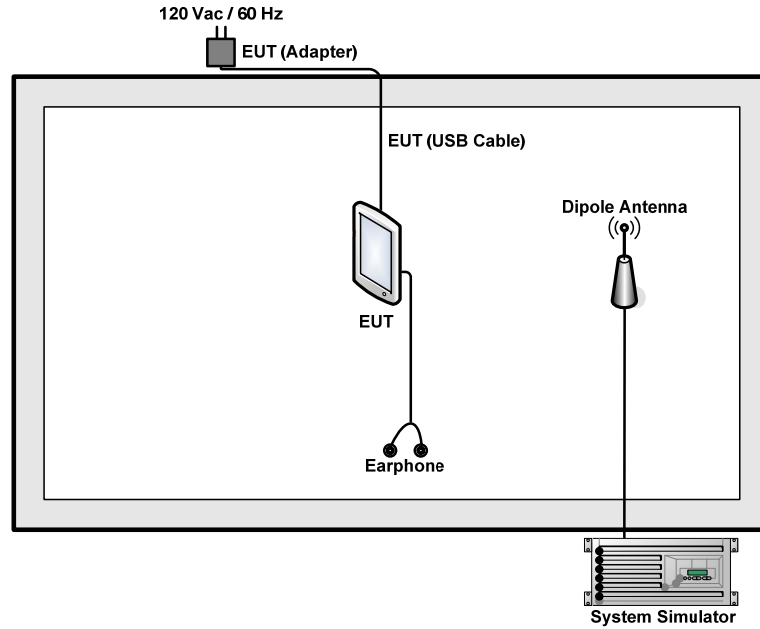

For 24E/27L

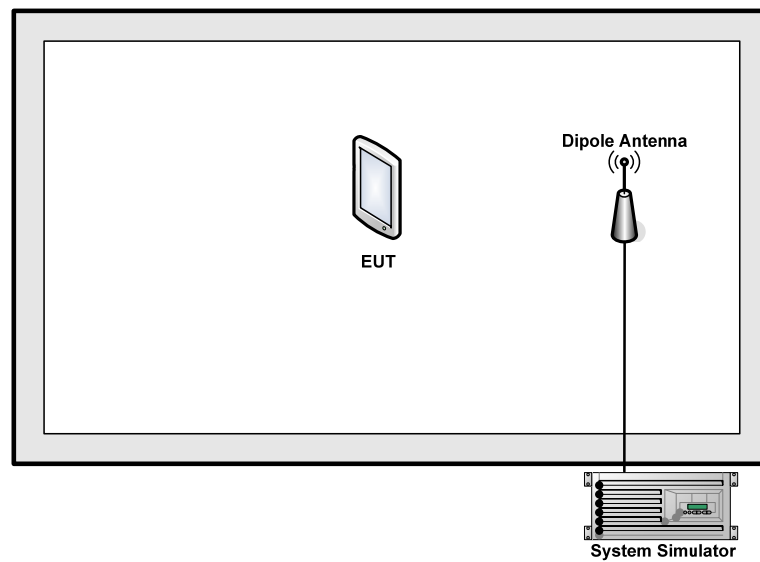

## 2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	DC Power Supply	GW	S-3030D	N/A	N/A	Unshielded, 1.8 m
3.	Earphone	Lenovo	SH100	N/A	N/A	Unshielded, 1.8 m

## 2.4 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

The following shows an offset computation example with RF cable loss 5.2 dB and a 10dB attenuator.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 5.2 + 10 = 15.2 \text{ (dB)} \end{aligned}$$

## 3. Test Result

### 3.1 Conducted Output Power Measurement

#### 3.1.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.


#### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.1.3 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.

#### 3.1.4 Test Setup

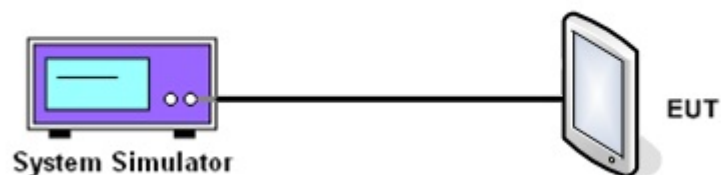

3.1.5 Test Result of Conducted Output Power

Cellular Band									
Modes	GSM850 (GPRS class 8)			GSM850 (EDGE class 8)			WCDMA Band V (RMC 12.2Kbps)		
Channel	128 (Low)	189 (Mid)	251 (High)	128 (Low)	189 (Mid)	251 (High)	4132 (Low)	4182 (Mid)	4233 (High)
Frequency (MHz)	824.2	836.4	848.8	824.2	836.4	848.8	826.4	836.4	846.6
Conducted Power (dBm)	32.22	32.29	32.33	27.20	27.14	27.00	22.65	22.57	22.66

PCS Band									
Modes	GSM1900 (GPRS class 8)			GSM1900 (EDGE class 8)			WCDMA Band II (RMC 12.2Kbps)		
Channel	512 (Low)	661 (Mid)	810 (High)	512 (Low)	661 (Mid)	810 (High)	9262 (Low)	9400 (Mid)	9538 (High)
Frequency (MHz)	1850.2	1880	1909.8	1850.2	1880	1909.8	1852.4	1880	1907.6
Conducted Power (dBm)	28.68	28.80	28.78	24.79	25.05	25.43	22.21	22.28	22.04

AWS Band			
Modes	WCDMA Band IV (RMC 12.2Kbps)		
Channel	1312(Low)	1413 (Mid)	1513 (High)
Frequency (MHz)	1712.4	1732.6	1752.6
Conducted Power (dBm)	22.84	22.80	22.60

Note: maximum burst average power for GSM, and maximum average power for WCDMA.

## 3.2 Peak-to-Average Ratio

### 3.2.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.


### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.2.3 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 5.7.1.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. For GSM/EGPRS operating modes:
  - a. Set EUT in maximum power output.
  - b. Set the RBW = 1MHz, VBW = 3MHz, Peak detector on spectrum analyzer for first trace.
  - c. Set the RBW = 1MHz, VBW = 3MHz, RMS detector on spectrum analyzer for second trace.
  - d. The wanted burst signal is triggered by spectrum analyzer, and measured respectively the peak level and Mean level without burst-off time, after system simulator has synchronized with the spectrum analyzer.
4. For UMTS operating modes:
  - a. Set the CCDF (Complementary Cumulative Distribution Function) option on the spectrum analyzer.
  - b. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.

### 3.2.4 Test Setup

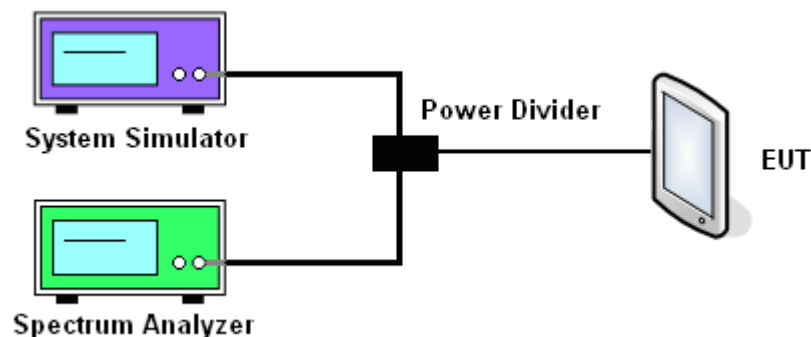





3.2.5 Test Result of Peak-to-Average Ratio

Cellular Band									
Modes	GSM850 (GPRS class 8)			GSM850 (EDGE class 8)			WCDMA Band V (RMC 12.2Kbps)		
Channel	128 (Low)	189 (Mid)	251 (High)	128 (Low)	189 (Mid)	251 (High)	4132 (Low)	4182 (Mid)	4233 (High)
Frequency (MHz)	824.2	836.4	848.8	824.2	836.4	848.8	826.4	836.4	846.6
Peak-to-Average Ratio (dB)	0.46	0.44	0.41	2.41	2.40	2.30	3.28	2.80	2.80

PCS Band									
Modes	GSM1900 (GPRS class 8)			GSM1900 (EDGE class 8)			WCDMA Band II (RMC 12.2Kbps)		
Channel	512 (Low)	661 (Mid)	810 (High)	512 (Low)	661 (Mid)	810 (High)	9262 (Low)	9400 (Mid)	9538 (High)
Frequency (MHz)	1850.2	1880	1909.8	1850.2	1880	1909.8	1852.4	1880	1907.6
Peak-to-Average Ratio (dB)	0.41	0.51	0.58	2.78	2.90	2.83	3.28	3.68	2.80


AWS Band			
Modes	WCDMA Band IV (RMC 12.2Kbps)		
Channel	1312 (Low)	1413 (Mid)	1513 (High)
Frequency (MHz)	1712.4	1732.6	1752.6
Peak-to-Average Ratio (dB)	3.32	2.80	3.20



### 3.2.6 Test Result (Plots) of Peak-to-Average Ratio


<b>Band :</b>	GSM 850	<b>Test Mode :</b>	GPRS class 8 Link (GMSK)
---------------	---------	--------------------	--------------------------

Peak-to-Average Ratio on Channel 128 (824.2 MHz)

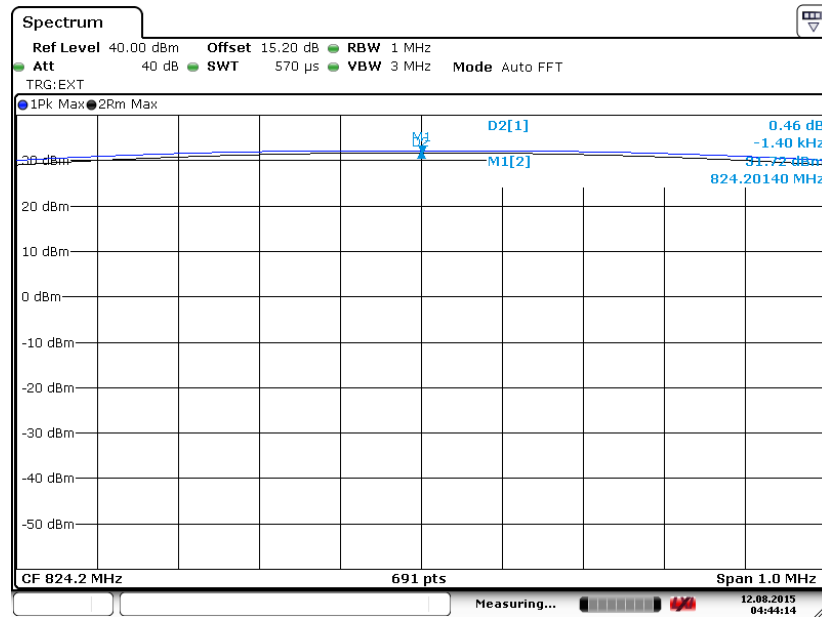

Date: 12 AUG 2015 04:44:14


Peak-to-Average Ratio on Channel 189 (836.4 MHz)

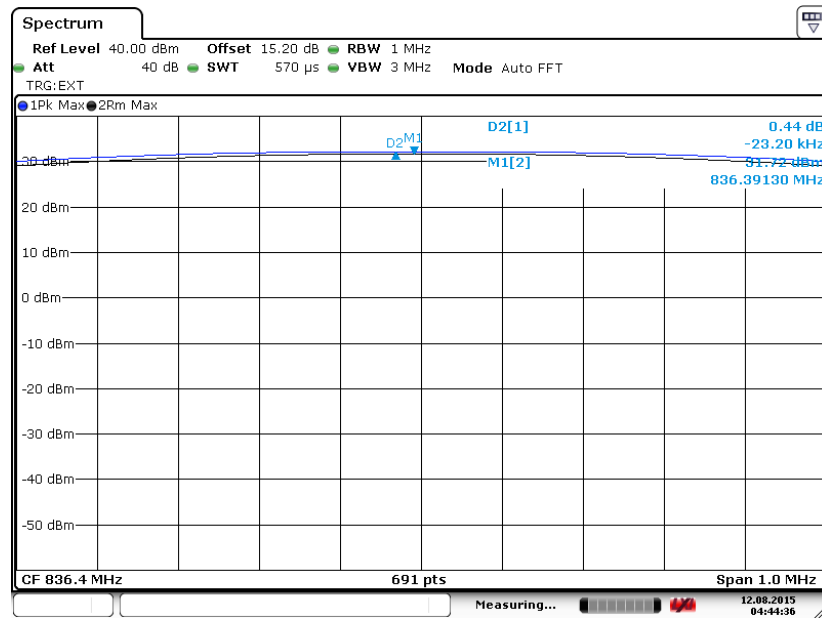

Date: 12 AUG 2015 04:44:36



Peak-to-Average Ratio on Channel 251 (848.8 MHz)

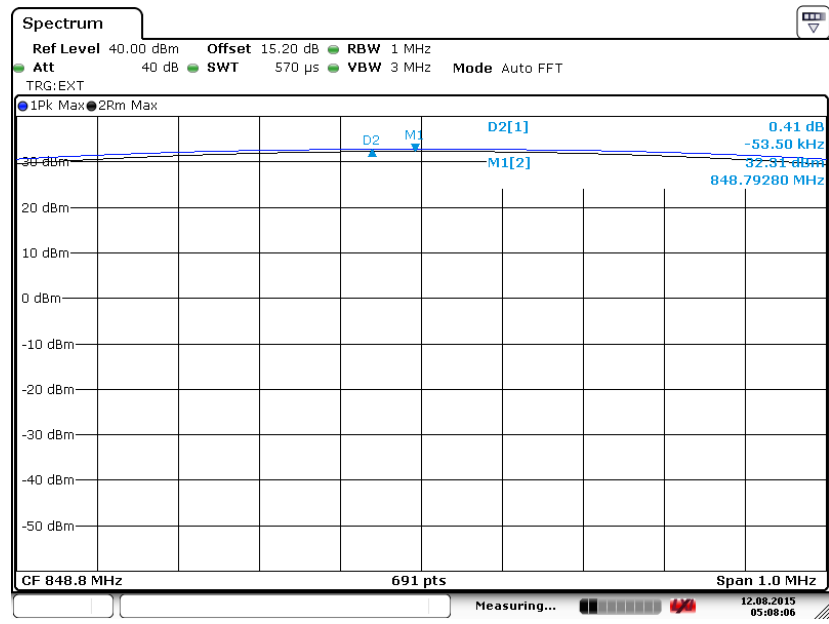


Date: 12 AUG 2015 05:08:07




<b>Band :</b>	GSM 850	<b>Test Mode :</b>	EDGE class 8 Link (8PSK)
---------------	---------	--------------------	--------------------------

Peak-to-Average Ratio on Channel 128 (824.2 MHz)

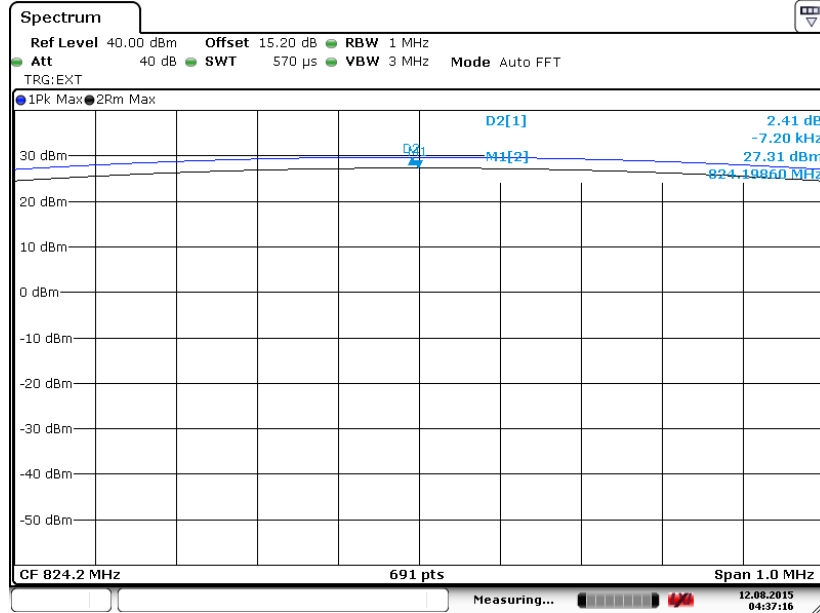


Peak-to-Average Ratio on Channel 189 (836.4 MHz)

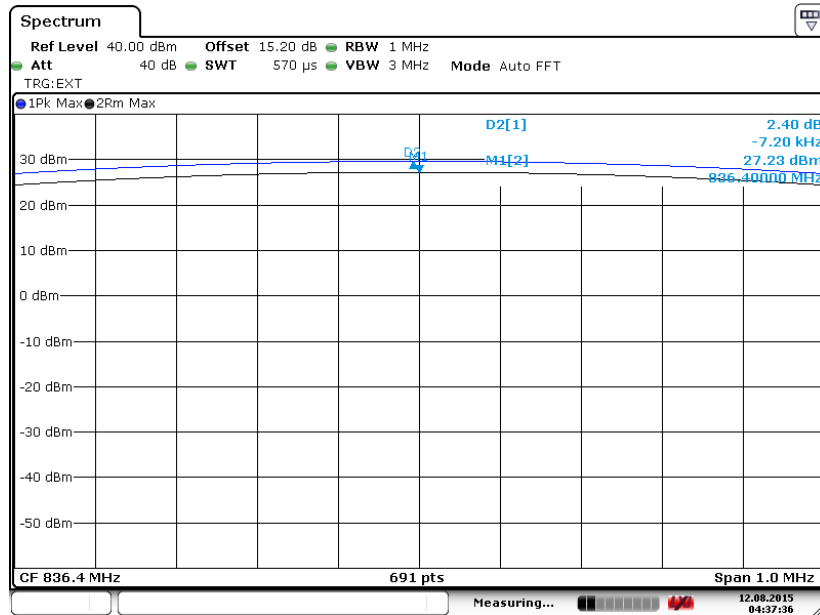



Peak-to-Average Ratio on Channel 251 (848.8 MHz)

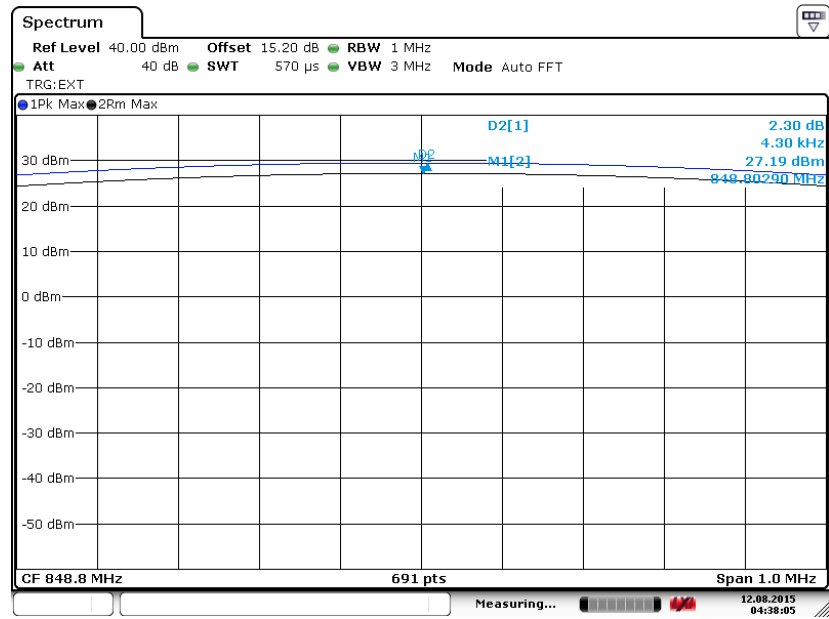


Date: 12 AUG 2015 04:38:05




<b>Band :</b>	GSM 1900	<b>Test Mode :</b>	GPRS class 8 Link (GMSK)
---------------	----------	--------------------	--------------------------

Peak-to-Average Ratio on Channel 512 (1850.2 MHz)

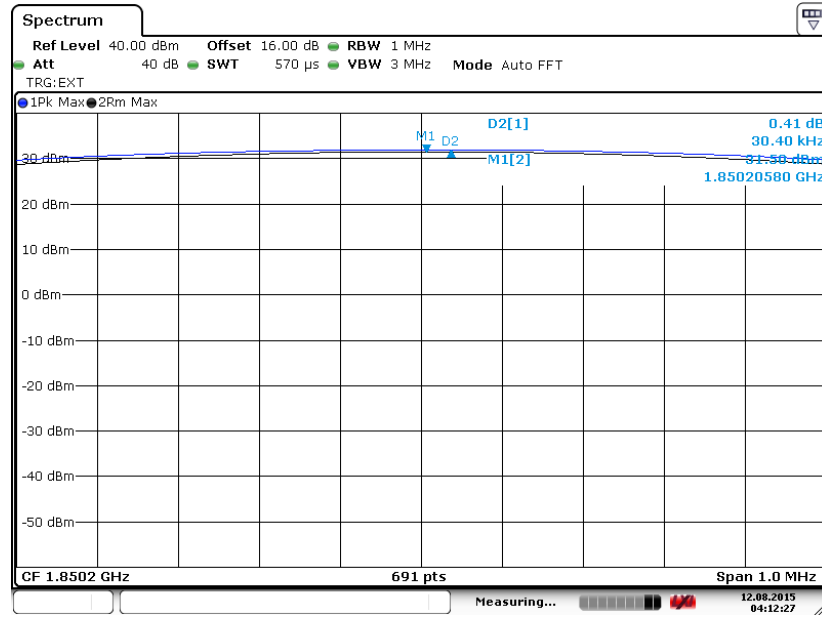

Date: 12 AUG 2015 04:12:28


Peak-to-Average Ratio on Channel 661 (1880.0 MHz)

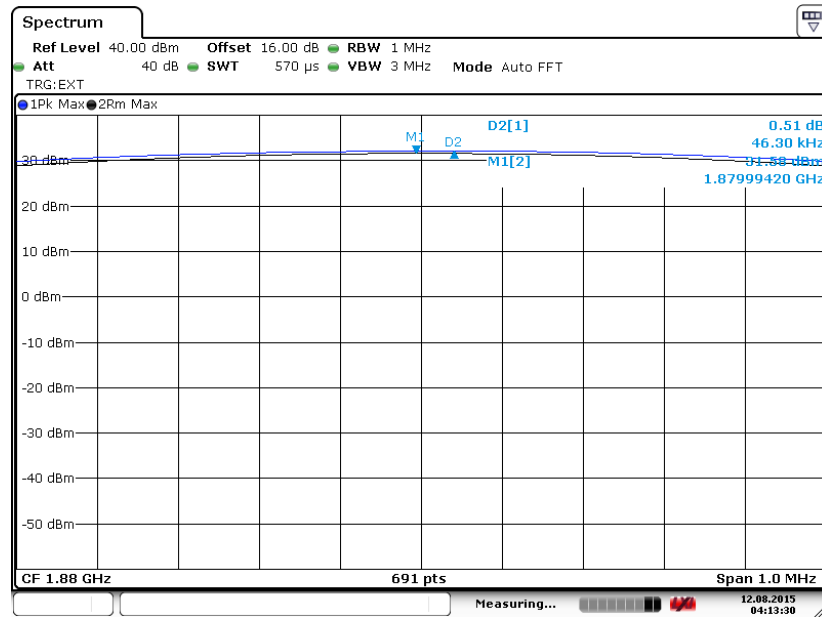

Date: 12 AUG 2015 04:13:30



Peak-to-Average Ratio on Channel 810 (1909.8 MHz)

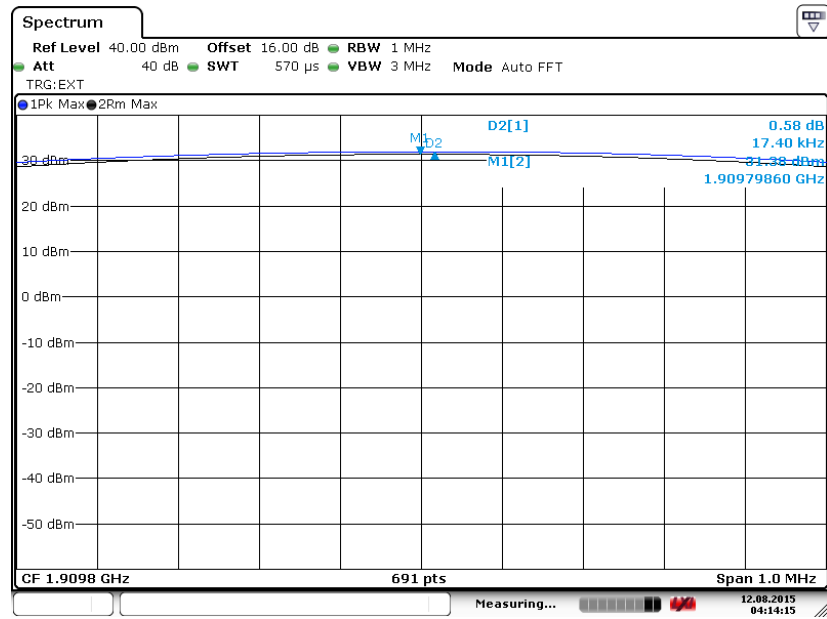


Date: 12 AUG 2015 04:14:15




<b>Band :</b>	GSM 1900	<b>Test Mode :</b>	EDGE class 8 Link (8PSK)
---------------	----------	--------------------	--------------------------

Peak-to-Average Ratio on Channel 512 (1850.2 MHz)

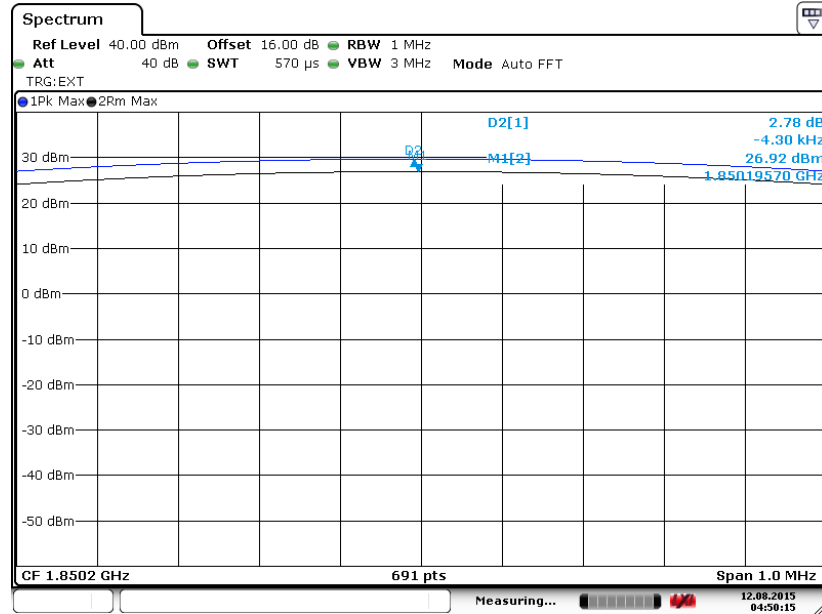

Date: 12 AUG 2015 04:50:15

Peak-to-Average Ratio on Channel 661 (1880.0 MHz)

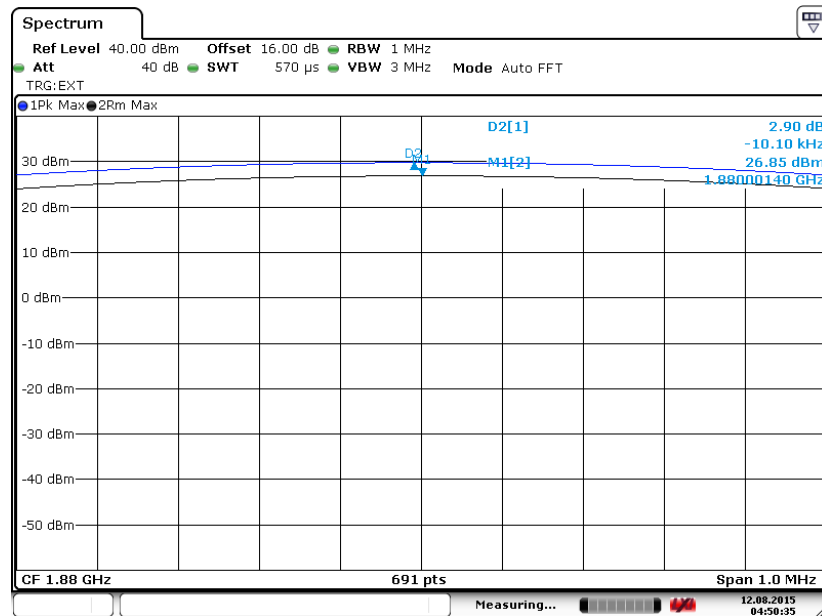


Date: 12 AUG 2015 04:50:35





Peak-to-Average Ratio on Channel 810 (1909.8 MHz)

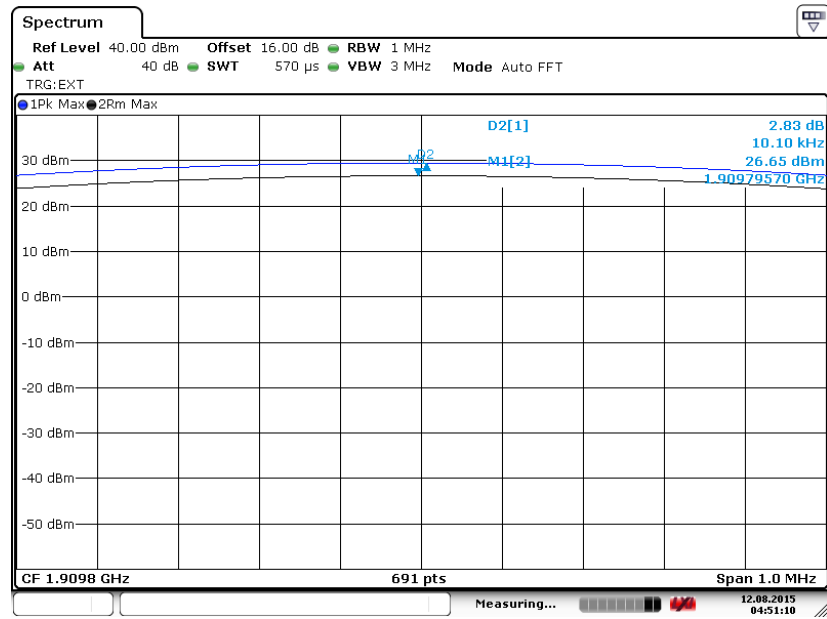


Date: 12 AUG 2015 04:51:11



<b>Band :</b>	WCDMA Band V	<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)
---------------	--------------	--------------------	--------------------------

**Peak-to-Average Ratio on Channel 4132 (826.4 MHz)**

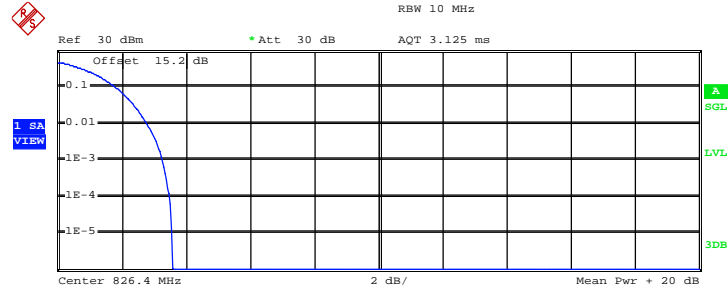


Complementary Cumulative Distribution Function (100000 samples)

Trace 1

Mean	22.35 dBm
Peak	25.91 dBm
Crest	3.56 dB
10 %	1.84 dB
1 %	2.80 dB
.1 %	3.28 dB
.01 %	3.48 dB

Date: 4.AUG.2015 05:28:12

**Peak-to-Average Ratio on Channel 4182 (836.4 MHz)**

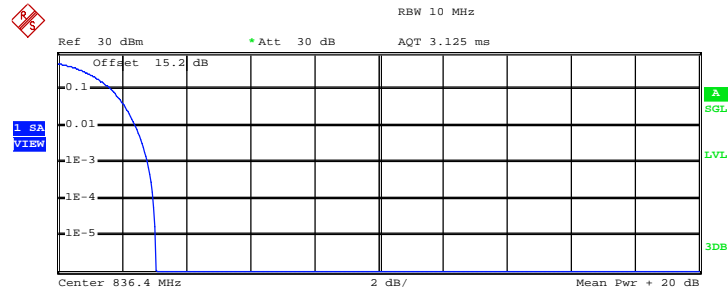

Complementary Cumulative Distribution Function (100000 samples)


Trace 1

Mean	23.85 dBm
Peak	26.90 dBm
Crest	3.05 dB
10 %	1.68 dB
1 %	2.44 dB
.1 %	2.80 dB
.01 %	3.00 dB

Date: 4.AUG.2015 05:27:45



Peak-to-Average Ratio on Channel 4233 (846.6 MHz)

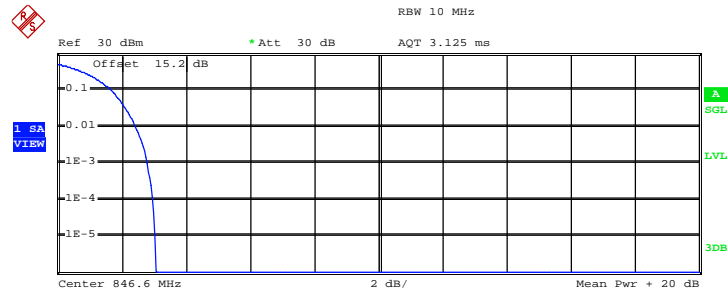

Complementary Cumulative Distribution Function (100000 samples)

Trace 1


Mean	24.84 dBm
Peak	27.89 dBm
Crest	3.05 dB
10 %	1.68 dB
1 %	2.44 dB
.1 %	2.80 dB
.01 %	2.96 dB

Date: 4.AUG.2015 05:27:20



<b>Band :</b>	WCDMA Band IV	<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)
---------------	---------------	--------------------	--------------------------

**Peak-to-Average Ratio on Channel 1312 (1712.4 MHz)**

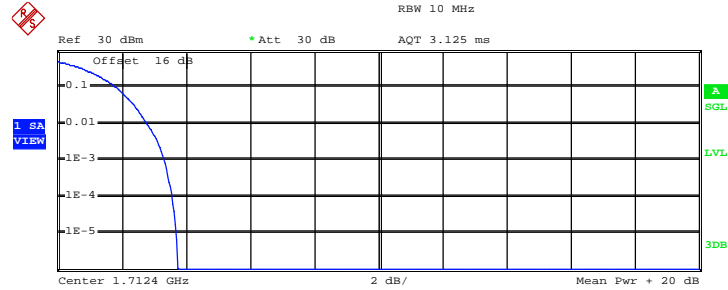

Complementary Cumulative Distribution Function (100000 samples)


Trace 1

Mean 23.02 dBm  
 Peak 26.76 dBm  
 Crest 3.74 dB

10 % 1.84 dB  
 1 % 2.80 dB  
 .1 % 3.32 dB  
 .01 % 3.56 dB

Date: 4.AUG.2015 06:16:04

**Peak-to-Average Ratio on Channel 1413 (1732.6 MHz)**

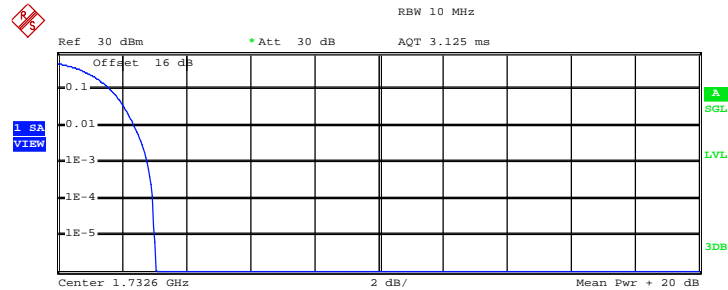

Complementary Cumulative Distribution Function (100000 samples)

Trace 1


Mean 24.27 dBm  
 Peak 27.32 dBm  
 Crest 3.06 dB

10 % 1.64 dB  
 1 % 2.40 dB  
 .1 % 2.80 dB  
 .01 % 2.96 dB

Date: 4.AUG.2015 06:15:36



Peak-to-Average Ratio on Channel 1513 (1752.6 MHz)

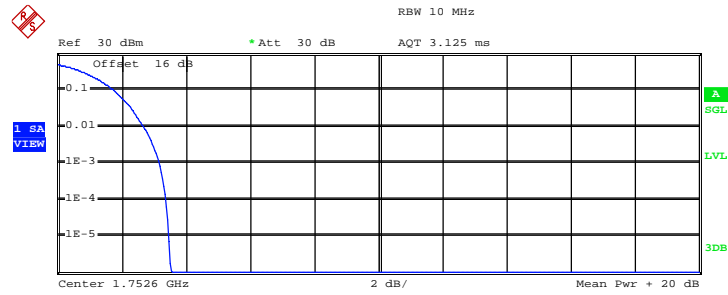

Complementary Cumulative Distribution Function (100000 samples)

Trace 1


Mean	24.57 dBm
Peak	28.10 dBm
Crest	3.53 dB
10 %	1.76 dB
1 %	2.68 dB
.1 %	3.20 dB
.01 %	3.40 dB

Date: 4.AUG.2015 06:15:18



<b>Band :</b>	WCDMA Band II	<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)
---------------	---------------	--------------------	--------------------------

**Peak-to-Average Ratio on Channel 9262 (1852.4 MHz)**

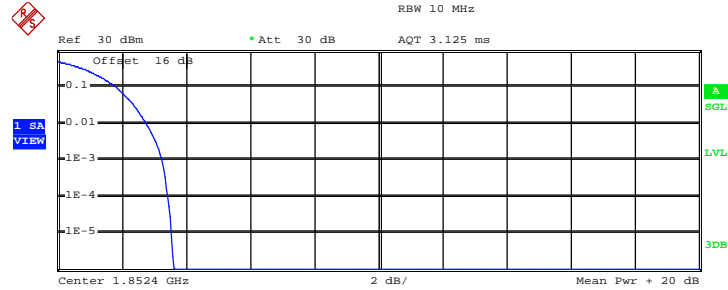


Complementary Cumulative Distribution Function (100000 samples)

Trace 1

Mean	23.43 dBm
Peak	27.04 dBm
Crest	3.61 dB
10 %	1.84 dB
1 %	2.76 dB
.1 %	3.28 dB
.01 %	3.44 dB

Date: 4.AUG.2015 05:34:09

**Peak-to-Average Ratio on Channel 9400 (1880.0 MHz)**

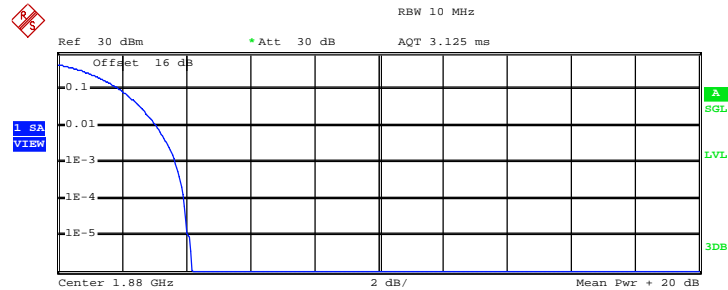

Complementary Cumulative Distribution Function (100000 samples)


Trace 1

Mean	23.00 dBm
Peak	27.18 dBm
Crest	4.18 dB
10 %	1.96 dB
1 %	3.08 dB
.1 %	3.68 dB
.01 %	3.92 dB

Date: 4.AUG.2015 05:34:34



Peak-to-Average Ratio on Channel 9538 (1907.6 MHz)

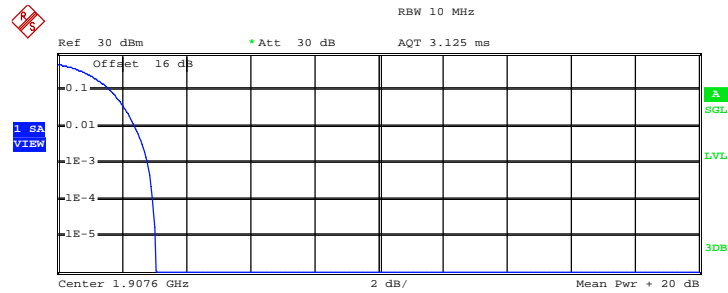

Complementary Cumulative Distribution Function (100000 samples)

Trace 1

Mean	21.29 dBm
Peak	24.36 dBm
Crest	3.07 dB
10 %	1.64 dB
1 %	2.40 dB
.1 %	2.80 dB
.01 %	2.96 dB

Date: 4.AUG.2015 05:34:57



### 3.3 Effective Radiated Power and Effective Isotropic Radiated Power Measurement

#### 3.3.1 Description of the ERP/EIRP Measurement

The substitution method, in ANSI / TIA / EIA-603-C-2004, was used for ERP/EIRP measurement, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v02r02. The ERP of mobile transmitters must not exceed 7 Watts (Cellular Band) and the EIRP of mobile transmitters are limited to 2 Watts (PCS Band) and 1 Watts (AWS Band).

#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.3.3 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 5.2.1. (for CDMA/WCDMA), Section 5.2.2.2 (for GSM/GPRS/EDGE) and ANSI / TIA-603-C-2004 Section 2.2.17.
2. The EUT was placed on a non-conductive rotating platform 0.8 meters high in a semi-anechoic chamber. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and a spectrum analyzer with RMS detector per section 5. of KDB 971168 D01.
3. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power. The maximum emission was recorded from analyzer power level (LVL) from the 360 degrees rotation of the turntable and the test antenna raised and lowered over a range from 1 to 4 meters in both horizontally and vertically polarized orientations.
4. Effective Isotropic Radiated Power (EIRP) was measured by substitution method according to TIA/EIA-603-C. The EUT was replaced by the substitution antenna at same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna. The correction factor (in dB) = S.G. - Tx Cable loss + Substitution antenna gain - Analyzer reading. Then the EUT's EIRP was calculated with the correction factor,  $EIRP = LVL + \text{Correction factor}$  and  $ERP = EIRP - 2.15$ . Take the record of the output power at substitution antenna.





	GSM/GPRS/EDGE	WCDMA/HSPA
SPAN	500kHz	10MHz
RBW	10kHz	100kHz
VBW	30kHz	300kHz
Detector	RMS	RMS
Trace	Average	Average
Average Type	Power	Power
Sweep Count	100	100

**3.3.4 Test Result of ERP**

GSM850 (GPRS class 8) Radiated Power ERP					
Channel	Frequency (MHz)	Horizontal		Vertical	
		ERP(dBm)	ERP(W)	ERP(dBm)	ERP(W)
Lowest	824.2	28.22	0.6642	29.71	0.9352
Middle	836.4	28.31	0.6778	29.58	0.9078
Highest	848.8	28.43	0.6974	29.52	0.8956
Limit	ERP < 7W	Result		PASS	

GSM850 (EDGE class 8) Radiated Power ERP					
Channel	Frequency (MHz)	Horizontal		Vertical	
		ERP(dBm)	ERP(W)	ERP(dBm)	ERP(W)
Lowest	824.2	23.02	0.2004	24.34	0.2716
Middle	836.4	22.86	0.1931	24.16	0.2608
Highest	848.8	22.91	0.1956	23.85	0.2426
Limit	ERP < 7W	Result		PASS	

WCDMA Band V (RMC 12.2Kbps) Radiated Power ERP					
Channel	Frequency (MHz)	Horizontal		Vertical	
		ERP(dBm)	ERP(W)	ERP(dBm)	ERP(W)
Lowest	826.4	19.17	0.0826	20.34	0.1082
Middle	836.4	19.02	0.0798	20.25	0.1059
Highest	846.6	19.14	0.0821	20.30	0.1073
Limit	ERP < 7W	Result		PASS	



3.3.5 Test Result of EIRP

GSM1900 (GPRS class 8) Radiated Power EIRP					
Channel	Frequency (MHz)	Horizontal		Vertical	
		EIRP(dBm)	EIRP(W)	EIRP(dBm)	EIRP(W)
Lowest	1850.2	27.28	0.5341	30.34	1.0812
Middle	1880.0	26.39	0.4359	30.69	1.1724
Highest	1909.8	25.78	0.3785	30.92	1.2363
Limit	EIRP < 2W	Result		PASS	

GSM1900 (EDGE class 8) Radiated Power EIRP					
Channel	Frequency (MHz)	Horizontal		Vertical	
		EIRP(dBm)	EIRP(W)	EIRP(dBm)	EIRP(W)
Lowest	1850.2	22.83	0.1917	25.81	0.3813
Middle	1880.0	22.48	0.1772	26.62	0.4592
Highest	1909.8	22.29	0.1693	27.52	0.5648
Limit	EIRP < 2W	Result		PASS	

WCDMA Band II (RMC 12.2Kbps) Radiated Power EIRP					
Channel	Frequency (MHz)	Horizontal		Vertical	
		EIRP(dBm)	EIRP(W)	EIRP(dBm)	EIRP(W)
Lowest	1852.4	20.56	0.1136	23.58	0.2283
Middle	1880.0	20.06	0.1015	24.27	0.2672
Highest	1907.6	19.25	0.0841	24.26	0.2667
Limit	EIRP < 2W	Result		PASS	

WCDMA Band IV(RMC 12.2Kbps) Radiated Power EIRP					
Channel	Frequency (MHz)	Horizontal		Vertical	
		EIRP(dBm)	EIRP(W)	EIRP(dBm)	EIRP(W)
Lowest	1712.4	22.45	0.1757	23.51	0.2245
Middle	1732.6	22.93	0.1961	23.63	0.2305
Highest	1752.6	22.95	0.1971	23.32	0.2146
Limit	EIRP < 1W	Result		PASS	

## 3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement

### 3.4.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.4.3 Test Procedures

5. The testing follows FCC KDB 971168 v02r02 Section 4.2.
6. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
7. The RF output of the EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
8. The 99% occupied bandwidth were measured, set RBW= 1% of span, VBW= 3\*RBW, peak detector, trace maximum hold.
9. The 26dB bandwidth were measured, set RBW= 1% of EBW, VBW= 3\*RBW, peak detector, trace maximum hold.

### 3.4.4 Test Setup

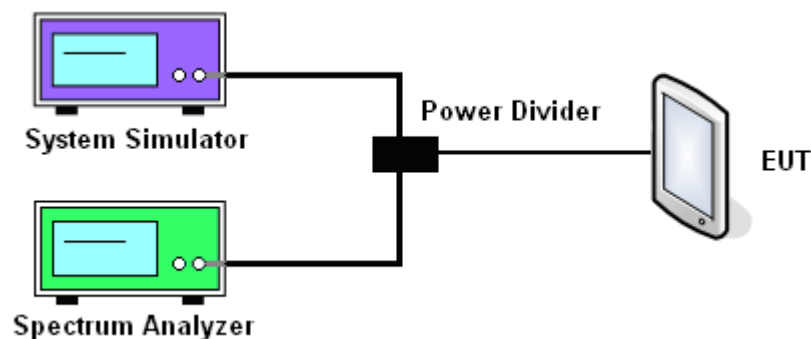



3.4.5 Test Result of Occupied Bandwidth and 26dB Bandwidth

Cellular Band						
Modes	GSM850 (GPRS class 8)			GSM850 (EDGE class 8)		
Channel	128 (Low)	189 (Mid)	251 (High)	128 (Low)	189 (Mid)	251 (High)
Frequency (MHz)	824.2	836.4	848.8	824.2	836.4	848.8
99% OBW (kHz)	244.00	244.00	244.00	248.00	248.00	248.00
26dB BW (kHz)	314.00	314.00	310.00	294.00	296.00	292.00

PCS Band						
Modes	GSM1900 (GPRS class 8)			GSM1900 (EDGE class 8)		
Channel	512 (Low)	661 (Mid)	810 (High)	512 (Low)	661 (Mid)	810 (High)
Frequency (MHz)	1850.2	1880	1909.8	1850.2	1880	1909.8
99% OBW (kHz)	248.00	246.00	244.00	252.00	250.00	250.00
26dB BW (kHz)	314.00	308.00	316.00	316.00	312.00	318.00

Cellular Band			
Modes	WCDMA Band V (RMC 12.2Kbps)		
Channel	4132 (Low)	4182 (Mid)	4233 (High)
Frequency (MHz)	826.4	836.4	846.6
99% OBW (MHz)	4.08	4.08	4.08
26dB BW (MHz)	4.64	4.66	4.68

AWS Band			
Modes	WCDMA Band IV (RMC 12.2Kbps)		
Channel	1312(Low)	1413 (Mid)	1513 (High)
Frequency (MHz)	1712.4	1732.6	1752.6
99% OBW (MHz)	4.06	4.08	4.10
26dB BW (MHz)	4.64	4.66	4.64




<b>PCS Band</b>			
<b>Modes</b>	<b>WCDMA Band II (RMC 12.2Kbps)</b>		
<b>Channel</b>	<b>9262 (Low)</b>	<b>9400 (Mid)</b>	<b>9538 (High)</b>
<b>Frequency (MHz)</b>	<b>1852.4</b>	<b>1880</b>	<b>1907.6</b>
<b>99% OBW (MHz)</b>	4.08	4.06	4.08
<b>26dB BW (MHz)</b>	4.64	4.62	4.68



### 3.4.6 Test Result (Plots) of Occupied Bandwidth and 26dB Bandwidth


Band :	GSM 850	Test Mode :	GPRS class 8 Link (GMSK)
--------	---------	-------------	--------------------------

#### 99% Occupied Bandwidth Plot on Channel 128 (824.2 MHz)

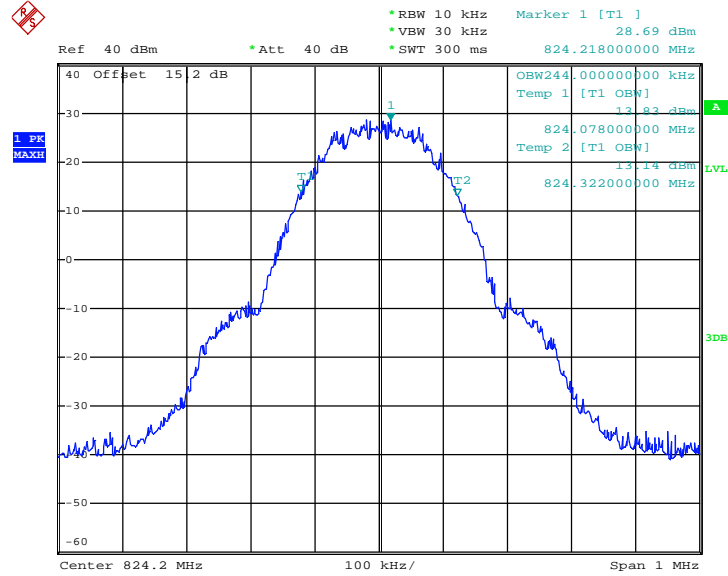

Date: 4.AUG.2015 04:29:09


#### 26dB Bandwidth Plot on Channel 128 (824.2 MHz)

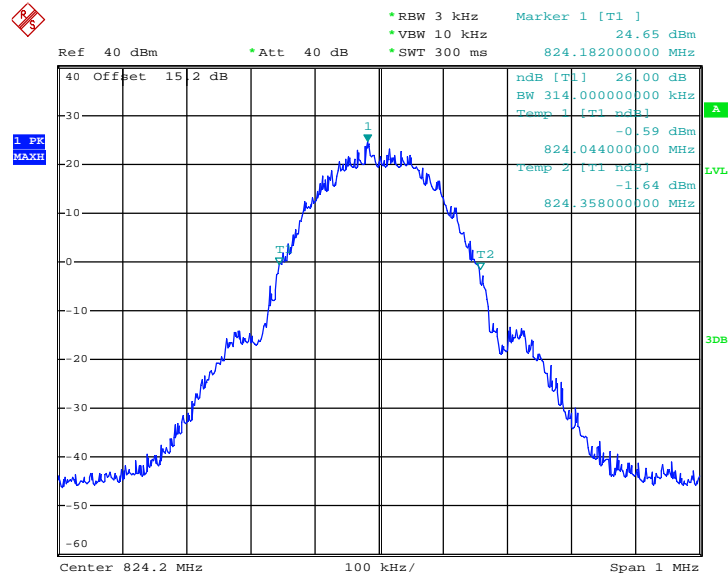

Date: 4.AUG.2015 04:34:42




### 99% Occupied Bandwidth Plot on Channel 189 (836.4 MHz)

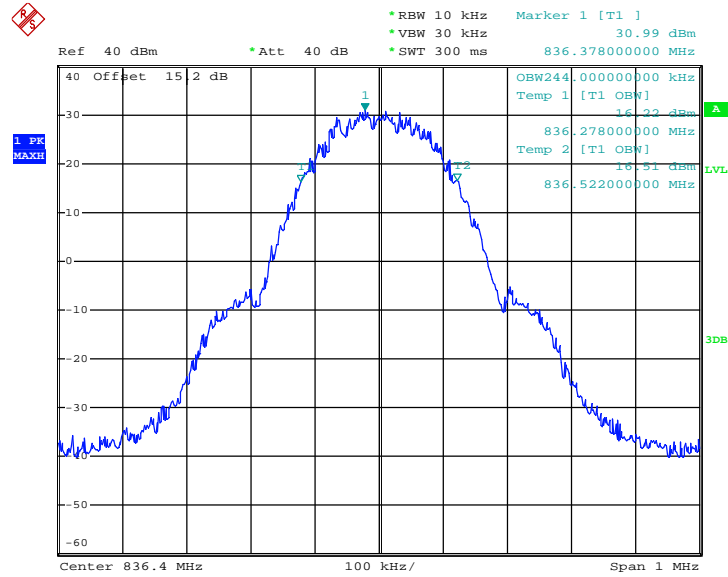

Date: 4.AUG.2015 04:28:43

### 26dB Bandwidth Plot on Channel 189 (836.4 MHz)

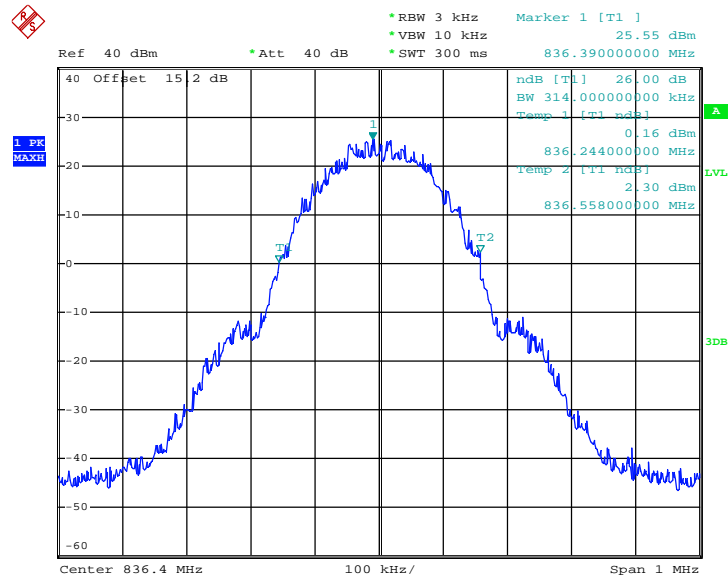


Date: 4.AUG.2015 04:36:56






99% Occupied Bandwidth Plot on Channel 251 (848.8 MHz)

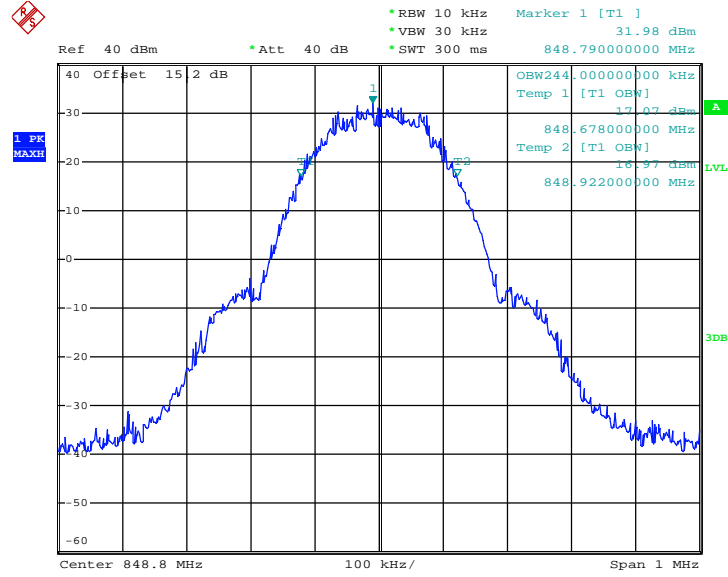

Date: 4.AUG.2015 04:28:00

26dB Bandwidth Plot on Channel 251 (848.8 MHz)

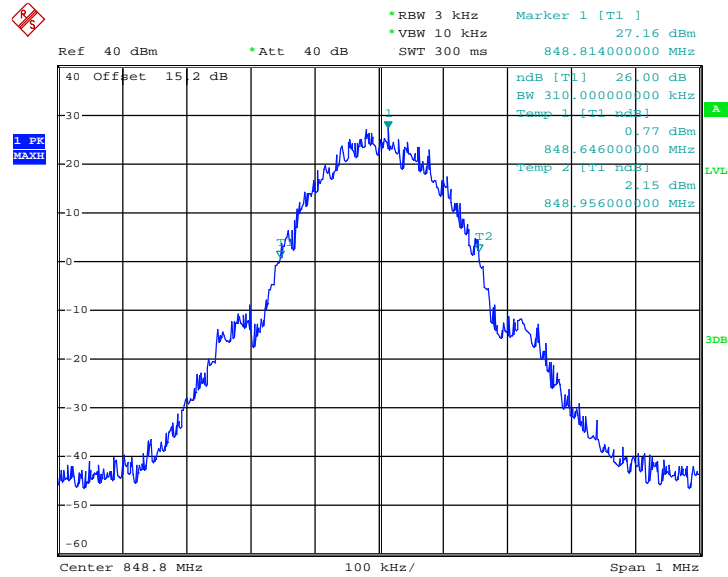


Date: 4.AUG.2015 04:32:58




Band :	GSM 850	Test Mode :	EDGE class 8 Link (8PSK)
--------	---------	-------------	--------------------------

99% Occupied Bandwidth Plot on Channel 128 (824.2 MHz)

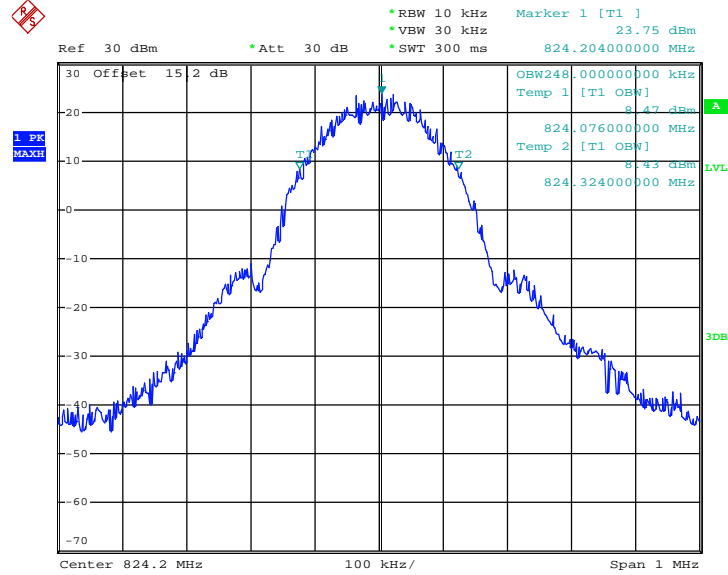

Date: 4.AUG.2015 04:59:32


26dB Bandwidth Plot on Channel 128 (824.2 MHz)

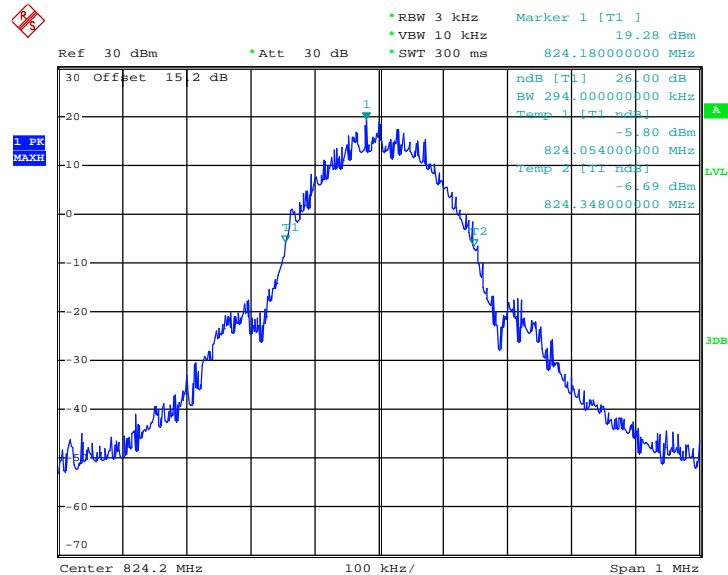

Date: 4.AUG.2015 04:57:17




99% Occupied Bandwidth Plot on Channel 189 (836.4 MHz)

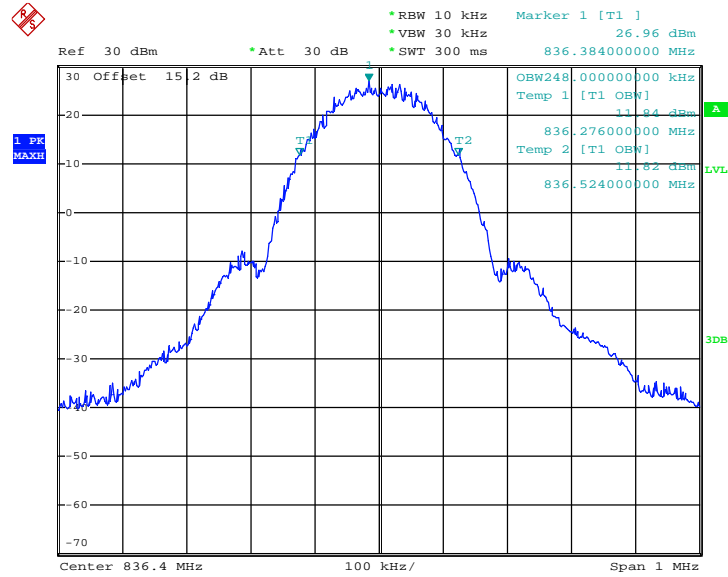

Date: 4.AUG.2015 05:02:57


26dB Bandwidth Plot on Channel 189 (836.4 MHz)

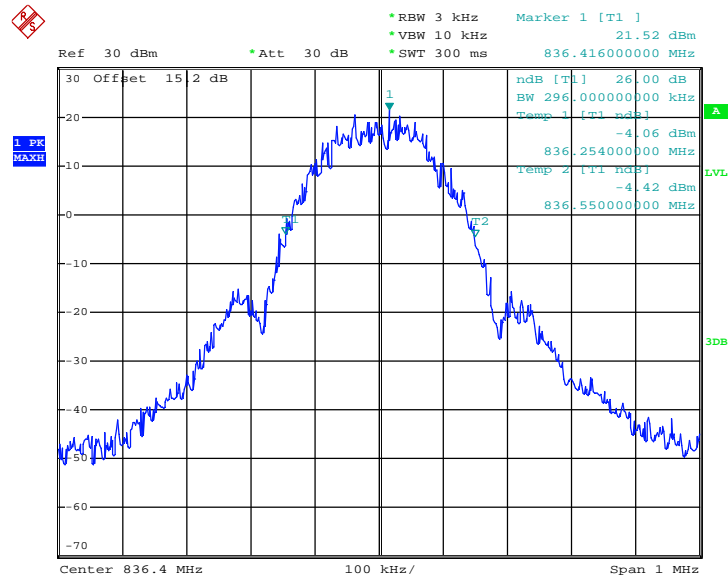

Date: 4.AUG.2015 04:58:47




### 99% Occupied Bandwidth Plot on Channel 251 (848.8 MHz)

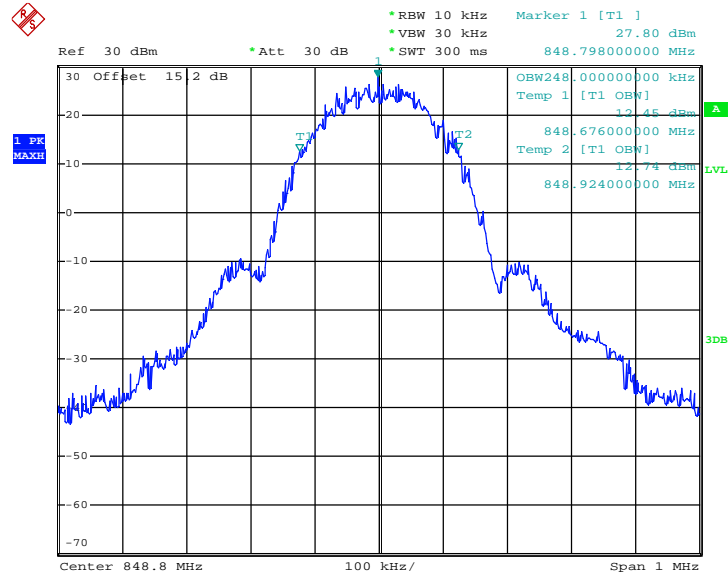

Date: 4.AUG.2015 05:03:25

### 26dB Bandwidth Plot on Channel 251 (848.8 MHz)

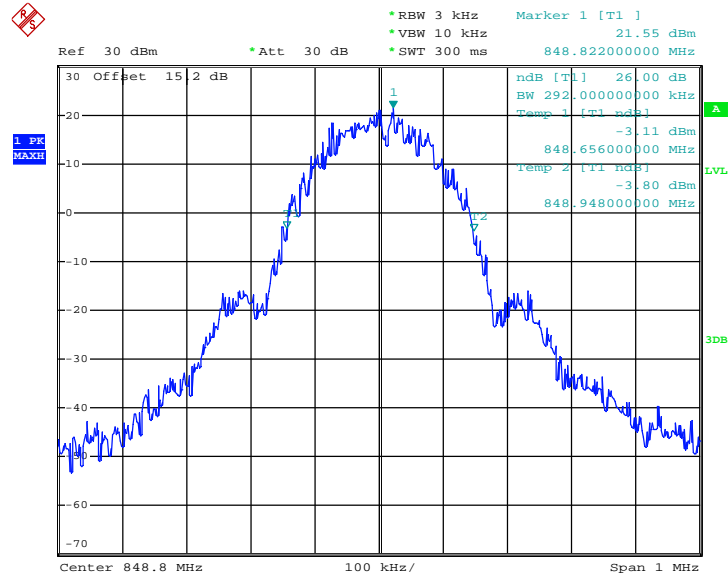


Date: 4.AUG.2015 04:58:15




Band :	GSM 1900	Test Mode :	GPRS class 8 Link (GMSK)
--------	----------	-------------	--------------------------

99% Occupied Bandwidth Plot on Channel 512 (1850.2 MHz)

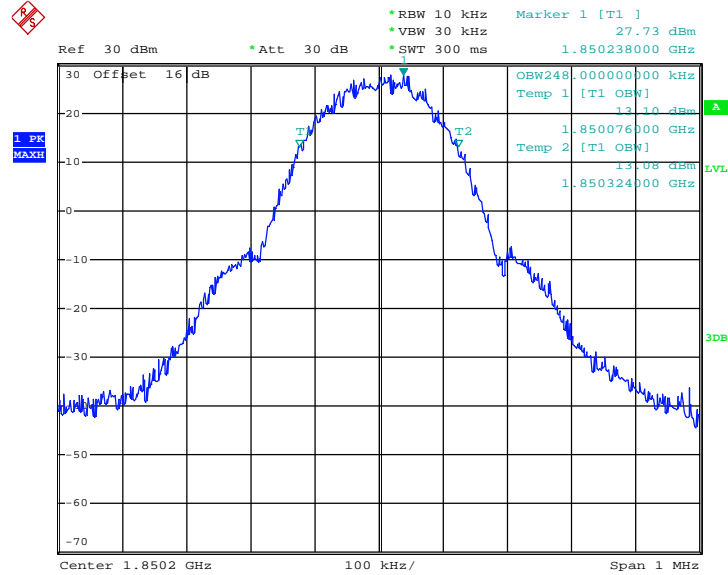

Date: 4.AUG.2015 06:46:23


26dB Bandwidth Plot on Channel 512 (1850.2 MHz)

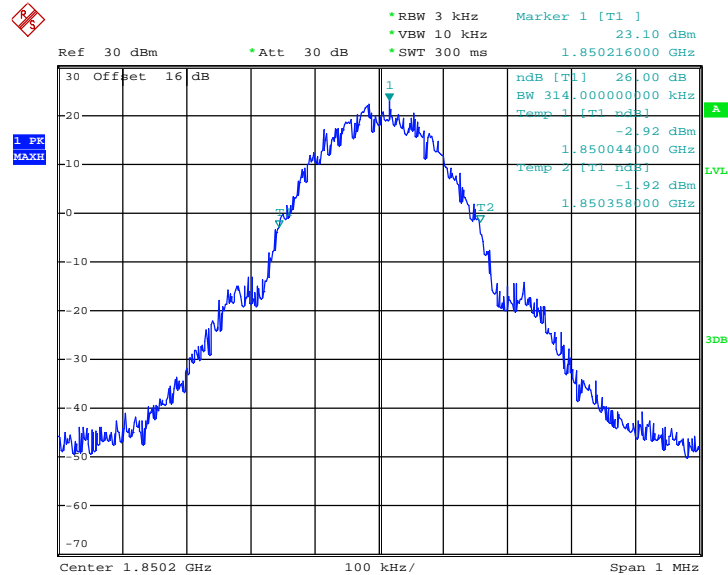

Date: 4.AUG.2015 06:41:41




99% Occupied Bandwidth Plot on Channel 661 (1880.0 MHz)

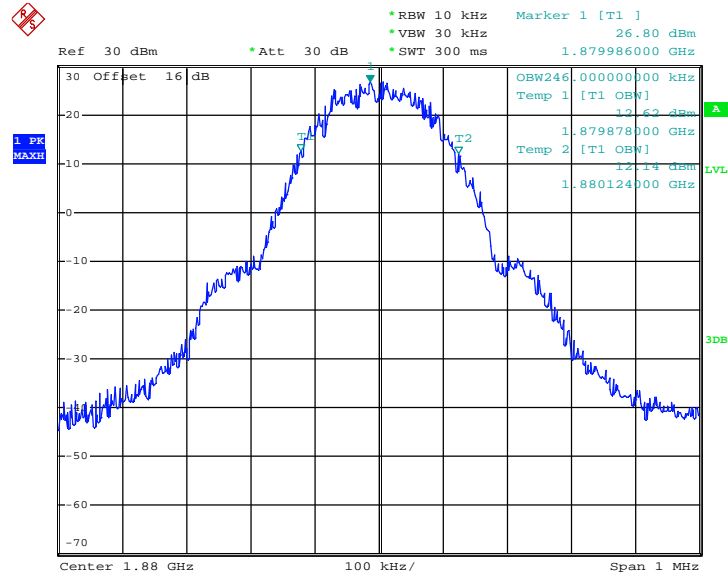

Date: 4.AUG.2015 06:45:29


26dB Bandwidth Plot on Channel 661 (1880.0 MHz)

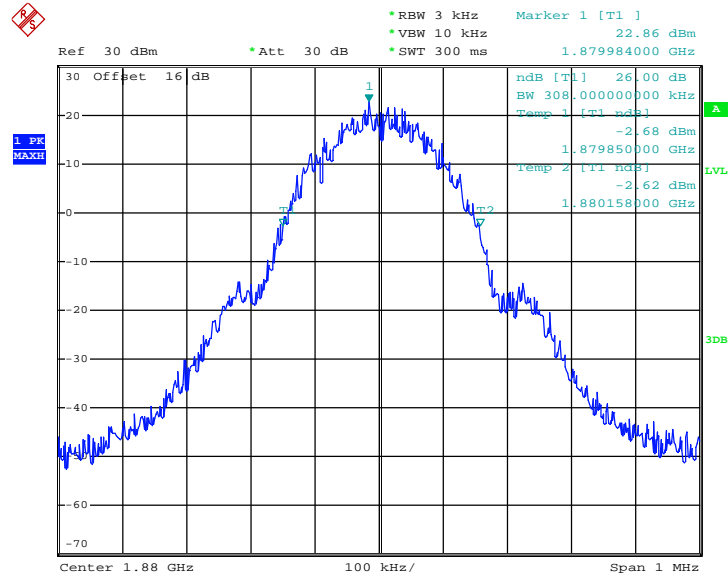

Date: 4.AUG.2015 06:53:36




### 99% Occupied Bandwidth Plot on Channel 810 (1909.8 MHz)

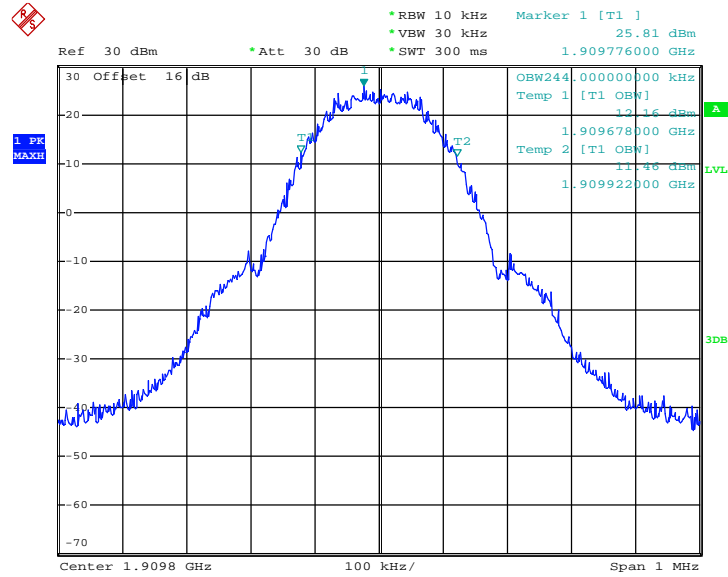

Date: 4.AUG.2015 06:45:06

### 26dB Bandwidth Plot on Channel 810 (1909.8 MHz)

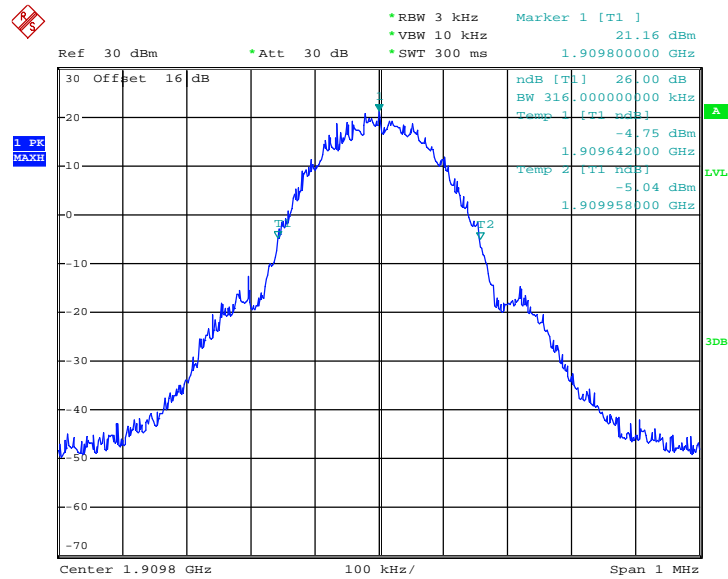


Date: 4.AUG.2015 06:44:19




Band :	GSM 1900	Test Mode :	EDGE class 8 Link (8PSK)
--------	----------	-------------	--------------------------

99% Occupied Bandwidth Plot on Channel 512 (1850.2 MHz)

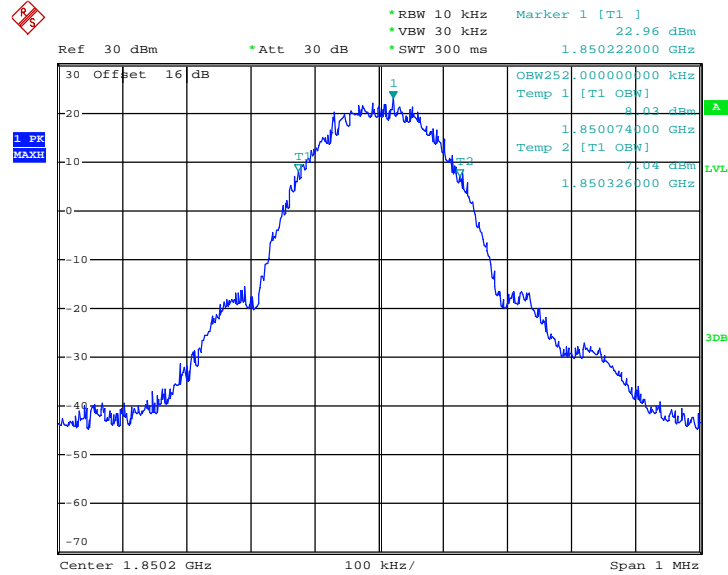

Date: 4.AUG.2015 07:01:57

26dB Bandwidth Plot on Channel 512 (1850.2 MHz)

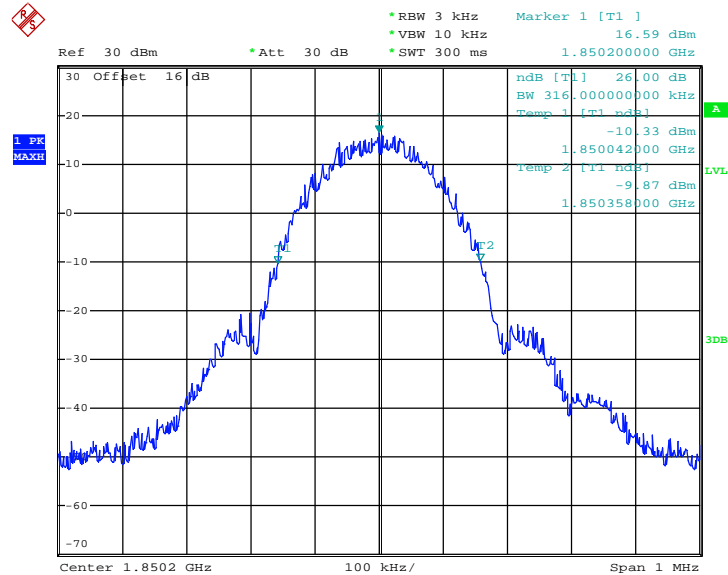


Date: 4.AUG.2015 06:59:22






99% Occupied Bandwidth Plot on Channel 661 (1880.0 MHz)

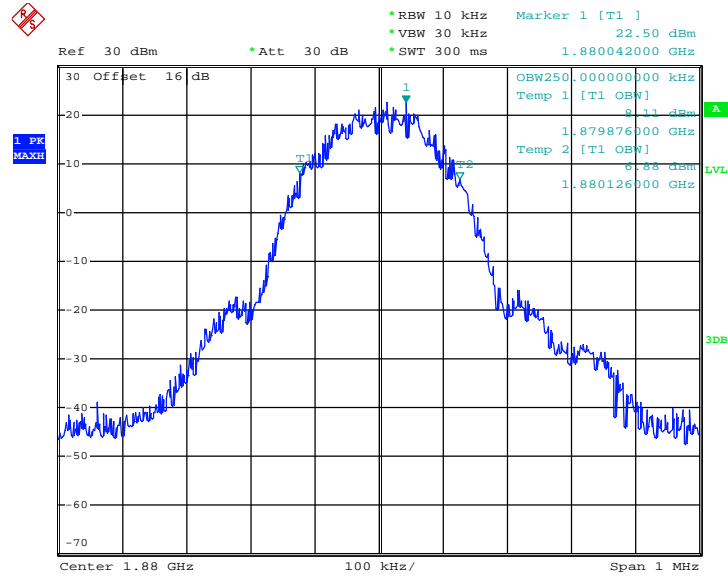

Date: 4.AUG.2015 07:02:16


26dB Bandwidth Plot on Channel 661 (1880.0 MHz)

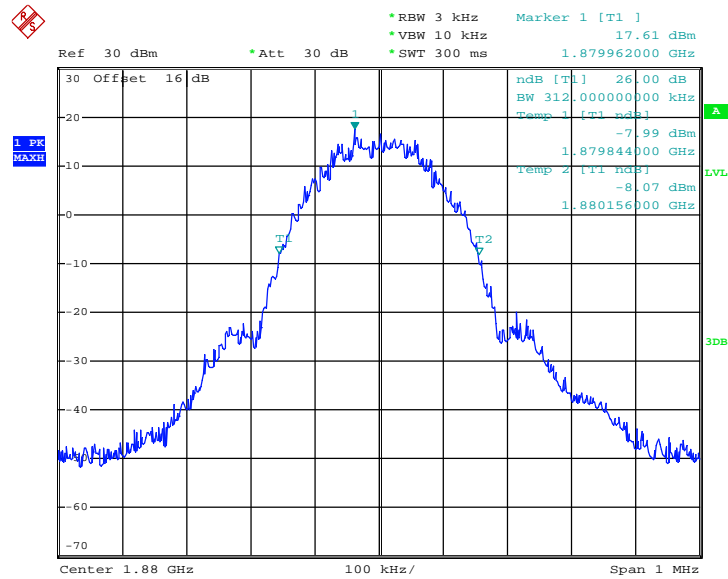

Date: 4.AUG.2015 07:00:03




99% Occupied Bandwidth Plot on Channel 810 (1909.8 MHz)

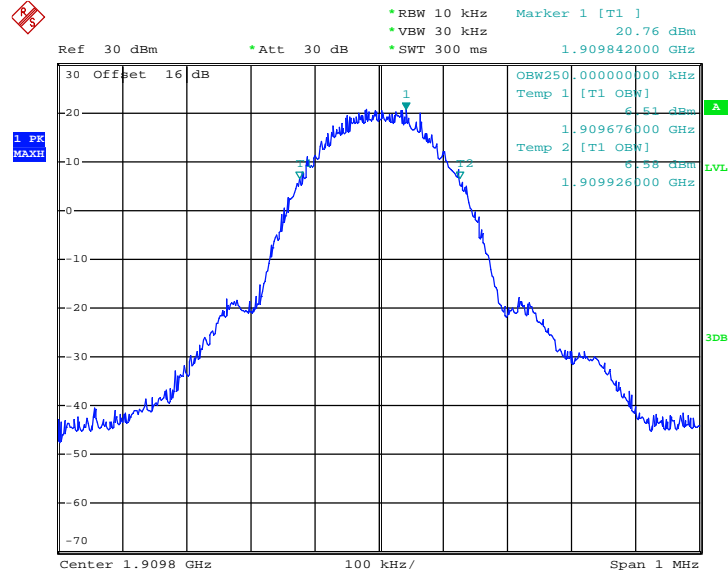

Date: 4.AUG.2015 07:02:58

26dB Bandwidth Plot on Channel 810 (1909.8 MHz)

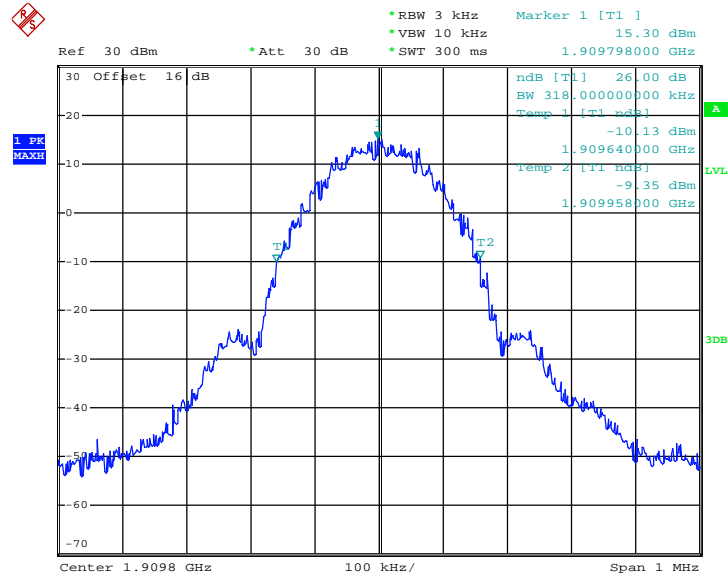


Date: 4.AUG.2015 07:00:52




Band :	WCDMA Band V	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	--------------	-------------	--------------------------

99% Occupied Bandwidth Plot on Channel 4132 (826.4 MHz)

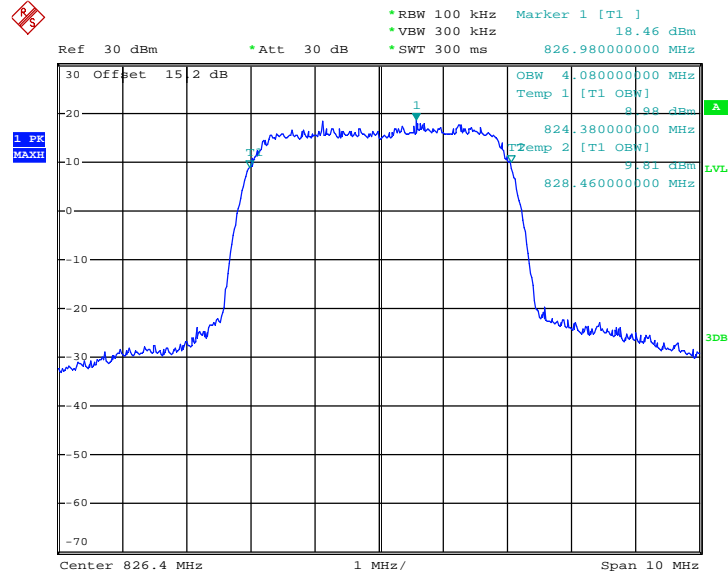

Date: 4.AUG.2015 05:15:43

26dB Bandwidth Plot on Channel 4132 (826.4 MHz)

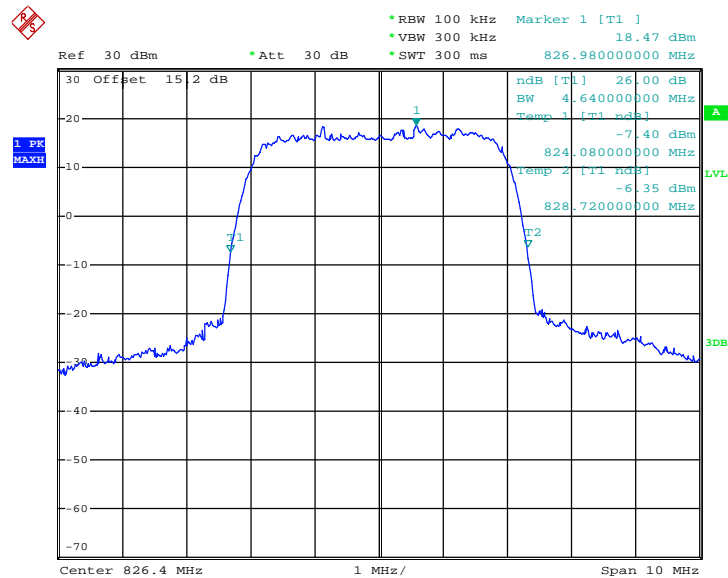


Date: 4.AUG.2015 05:13:04






### 99% Occupied Bandwidth Plot on Channel 4233 (846.6 MHz)

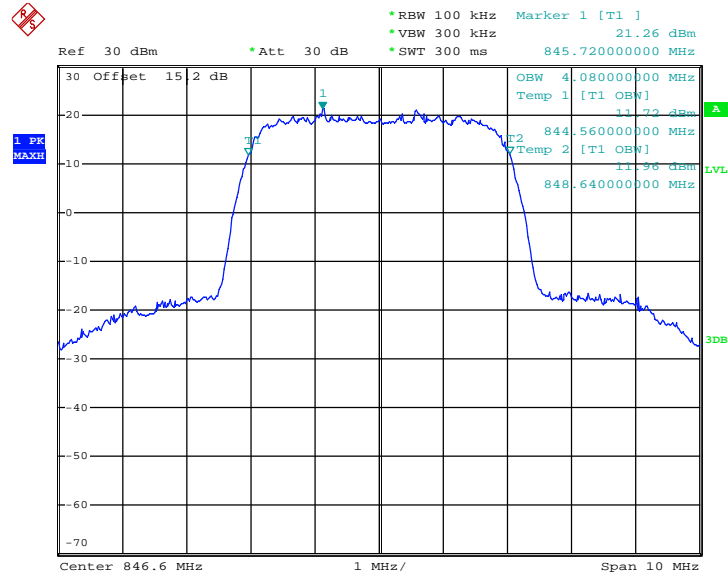

Date: 4.AUG.2015 05:15:07

### 26dB Bandwidth Plot on Channel 4233 (846.6 MHz)

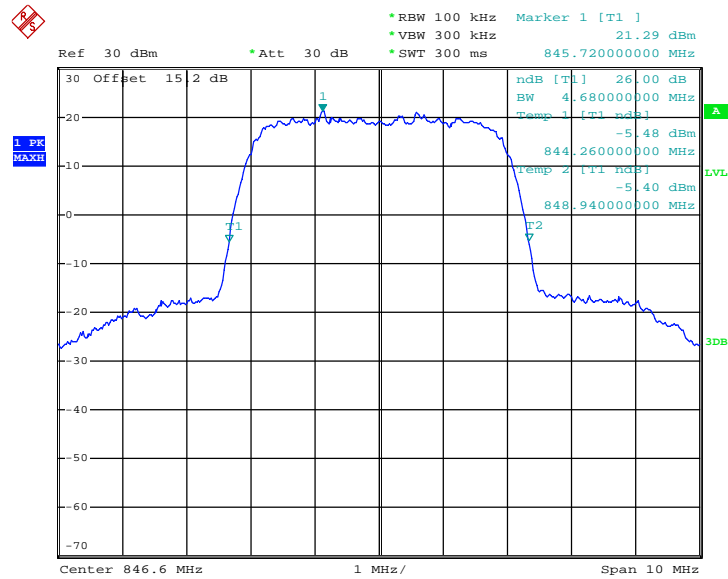


Date: 4.AUG.2015 05:14:34




<b>Band :</b>	WCDMA Band IV	<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)
---------------	---------------	--------------------	--------------------------

99% Occupied Bandwidth Plot on Channel 1312 (1712.4 MHz)

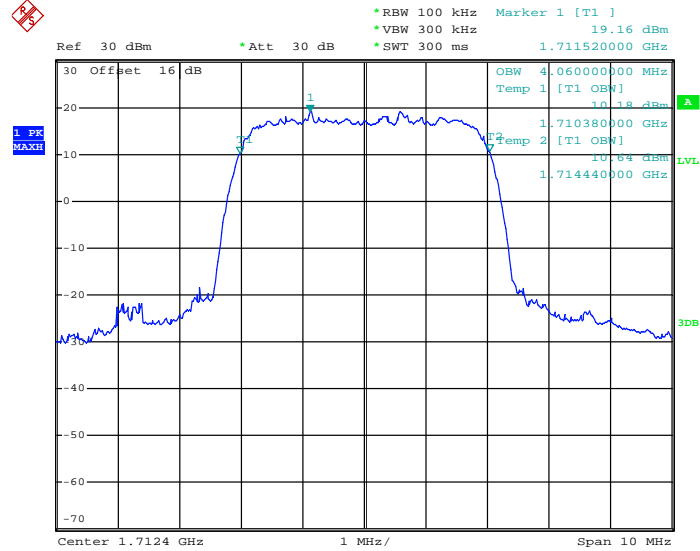

Date: 4.AUG.2015 06:10:49


26dB Bandwidth Plot on Channel 1312 (1712.4 MHz)

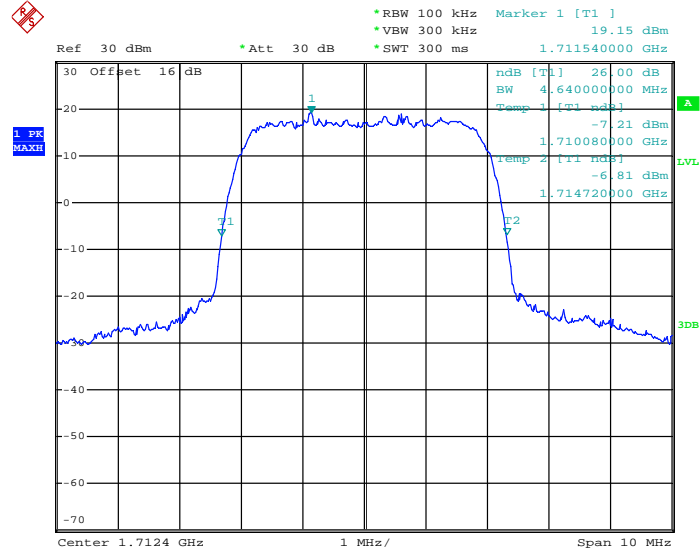

Date: 4.AUG.2015 06:13:34




### 99% Occupied Bandwidth Plot on Channel 1413 (1732.6 MHz)

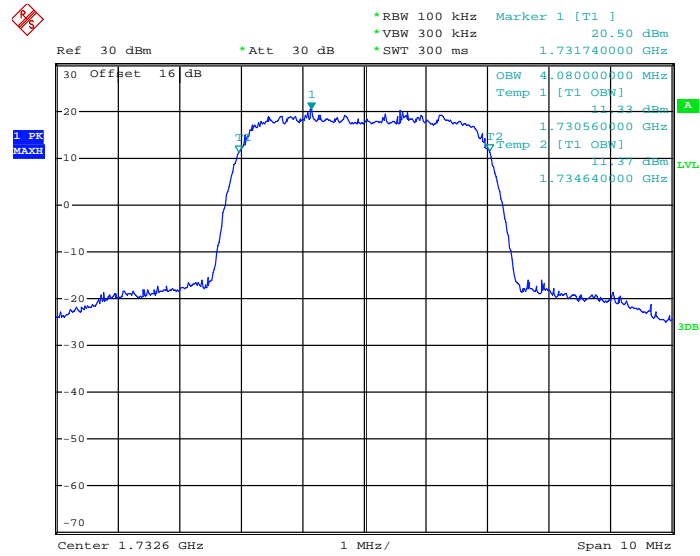

Date: 4.AUG.2015 06:11:10


### 26dB Bandwidth Plot on Channel 1413 (1732.6 MHz)

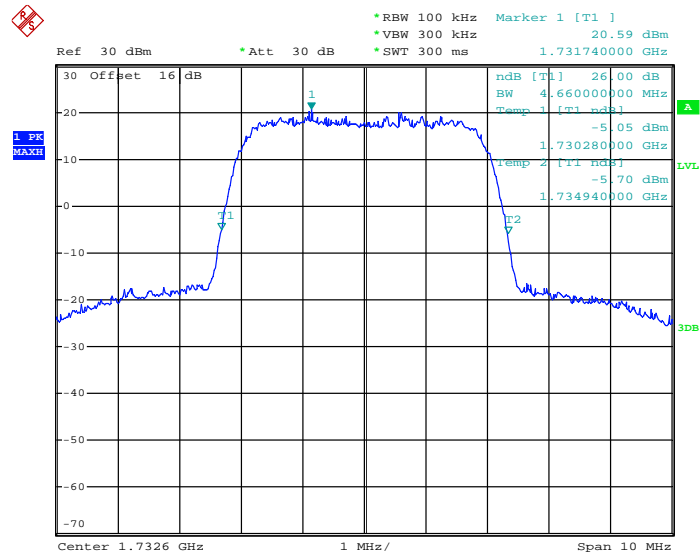

Date: 4.AUG.2015 06:13:49




### 99% Occupied Bandwidth Plot on Channel 1513 (1752.6 MHz)

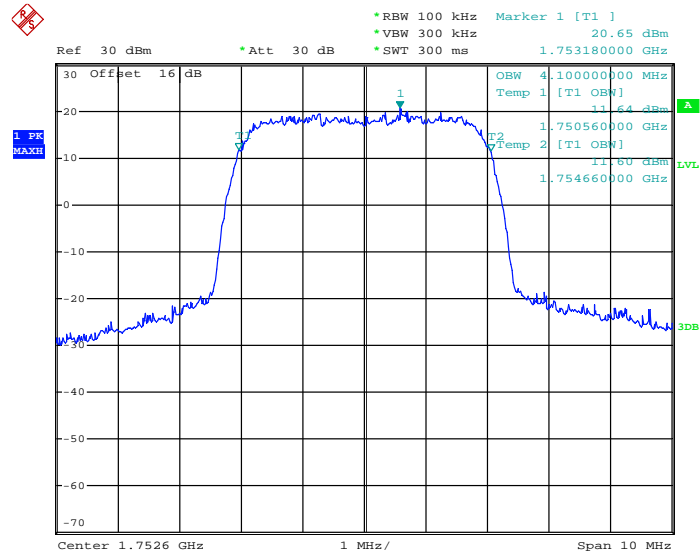

Date: 4.AUG.2015 06:11:29

### 26dB Bandwidth Plot on Channel 1513 (1752.6 MHz)

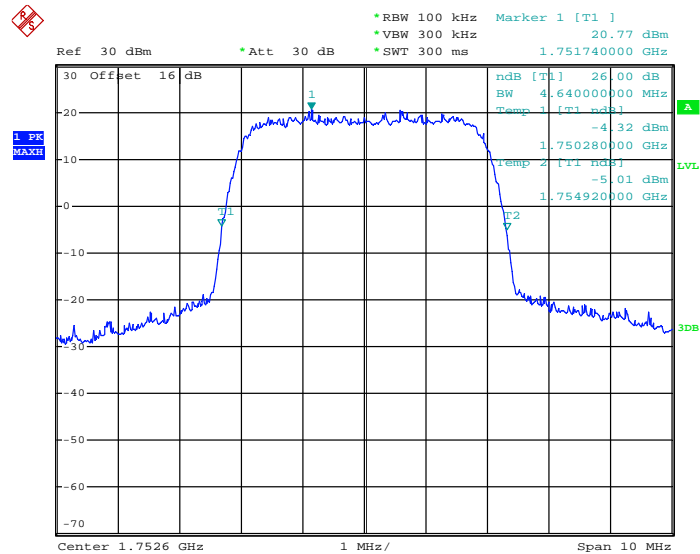


Date: 4.AUG.2015 06:14:08






Band :	WCDMA Band II	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	---------------	-------------	--------------------------

99% Occupied Bandwidth Plot on Channel 9262 (1852.4 MHz)

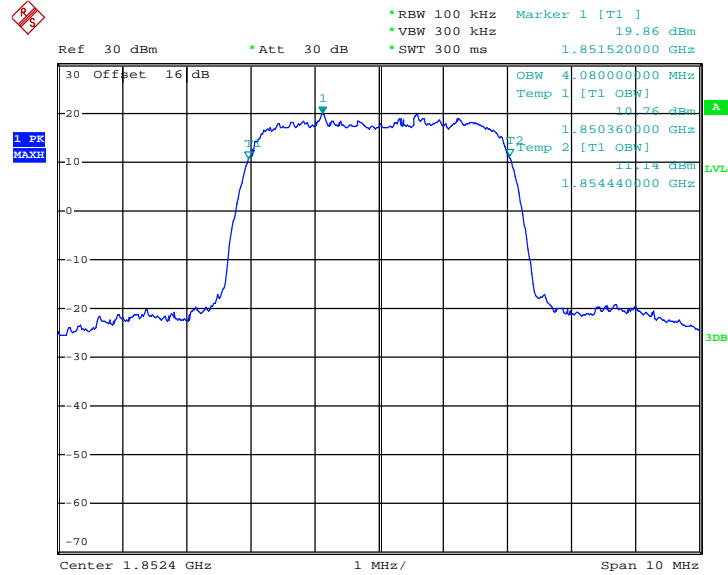

Date: 4.AUG.2015 05:45:53


26dB Bandwidth Plot on Channel 9262 (1852.4 MHz)

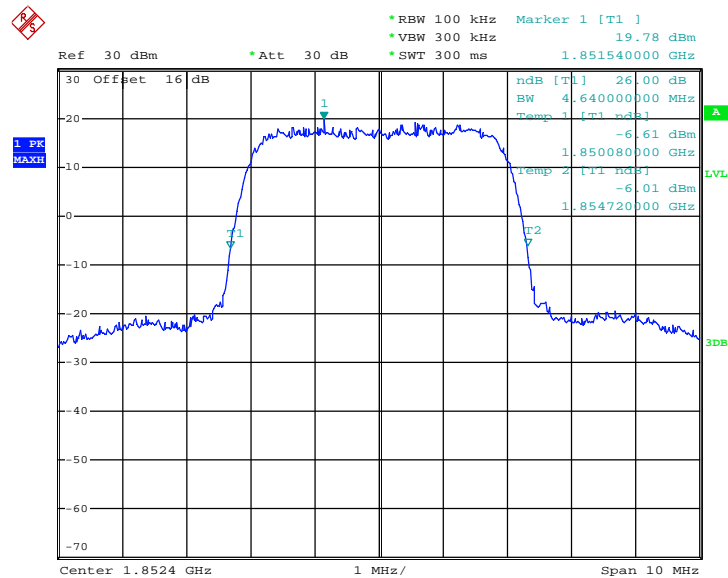

Date: 4.AUG.2015 05:36:39




### 99% Occupied Bandwidth Plot on Channel 9400 (1880.0 MHz)

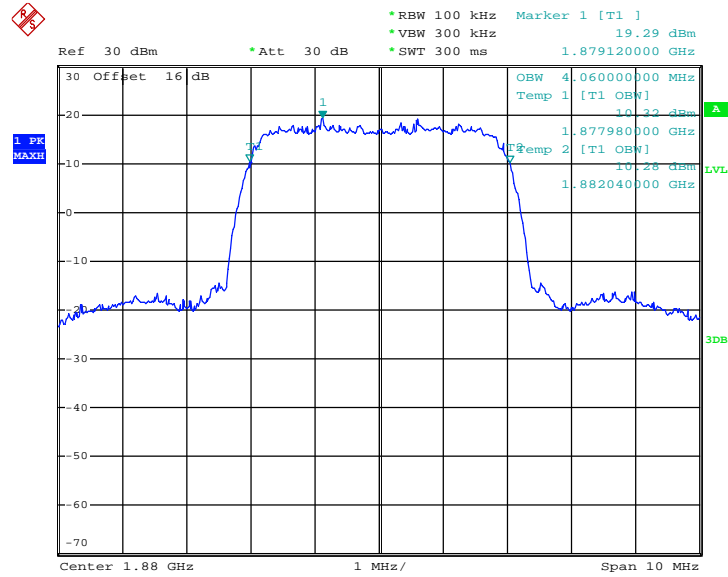

Date: 4.AUG.2015 05:37:26


### 26dB Bandwidth Plot on Channel 9400 (1880.0 MHz)

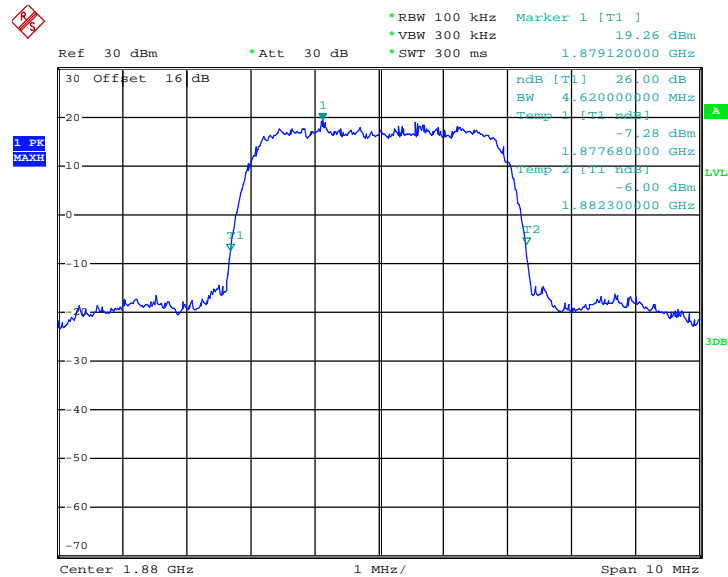

Date: 4.AUG.2015 05:36:23




### 99% Occupied Bandwidth Plot on Channel 9538 (1907.6 MHz)

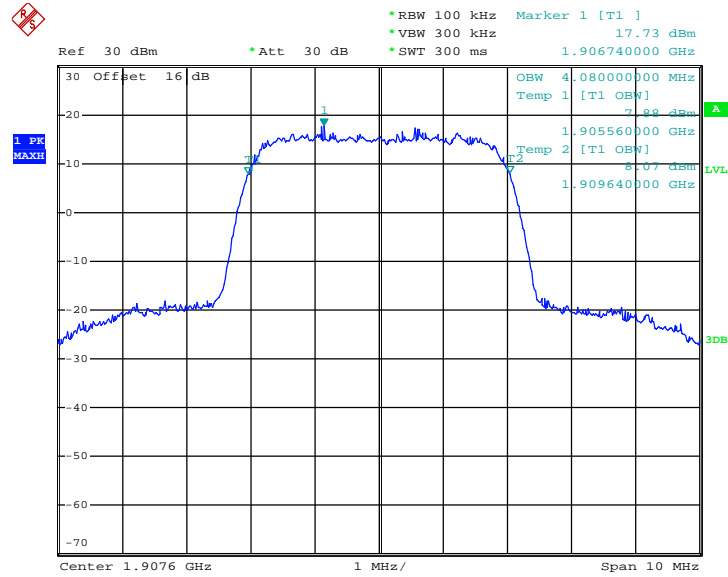

Date: 4.AUG.2015 05:37:43

### 26dB Bandwidth Plot on Channel 9538 (1907.6 MHz)

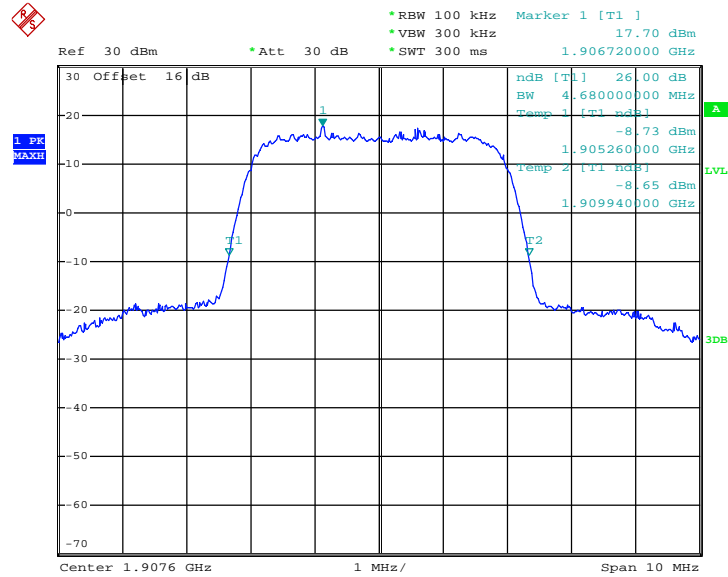

Date: 4.AUG.2015 05:36:06

## 3.5 Band Edge Measurement

### 3.5.1 Description of Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.


### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.5.3 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The band edges of low and high channels for the highest RF powers were measured.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)  
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$   
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$   
 $= -13\text{dBm}.$

### 3.5.4 Test Setup

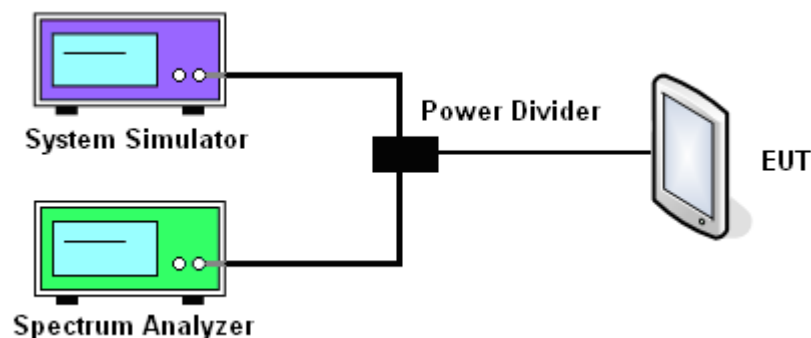




### 3.5.5 Test Result (Plots) of Conducted Band Edge


<b>Band :</b>	GSM850	<b>Test Mode :</b>	GPRS class 8 Link (GMSK)
---------------	--------	--------------------	--------------------------

#### Lower Band Edge Plot on Channel 128 (824.2 MHz)

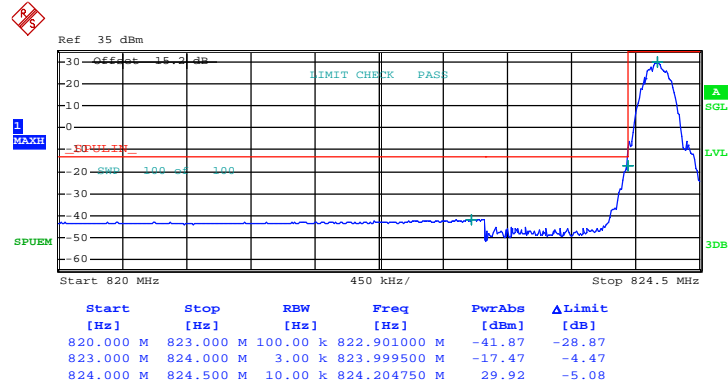

Date: 4.AUG.2015 13:03:11

#### Higher Band Edge Plot on Channel 251 (848.8 MHz)

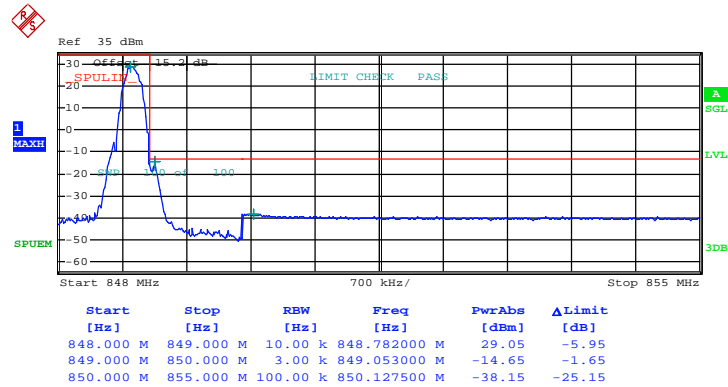


Date: 4.AUG.2015 13:07:02




Band :	GSM850	Test Mode :	EDGE class 8 Link (8PSK)
--------	--------	-------------	--------------------------

Lower Band Edge Plot on Channel 128 (824.2 MHz)

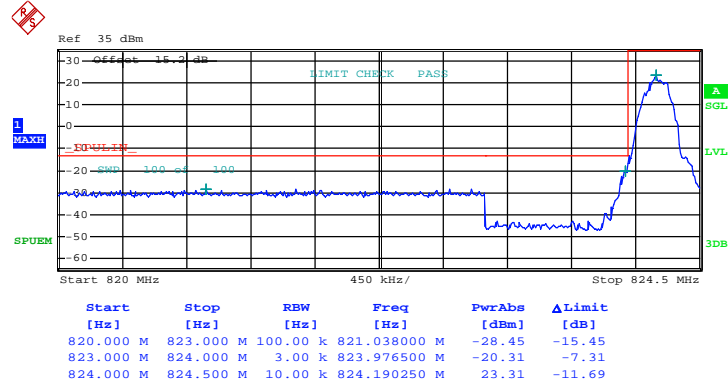

Date: 4.AUG.2015 04:54:44

Higher Band Edge Plot on Channel 251 (848.8 MHz)

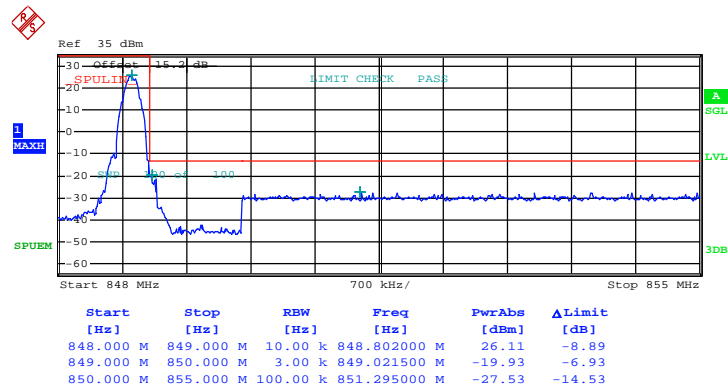


Date: 4.AUG.2015 04:53:31




<b>Band :</b>	GSM1900	<b>Test Mode :</b>	GPRS class 8 Link (GMSK)
---------------	---------	--------------------	--------------------------

Lower Band Edge Plot on Channel 512 (1850.2 MHz)

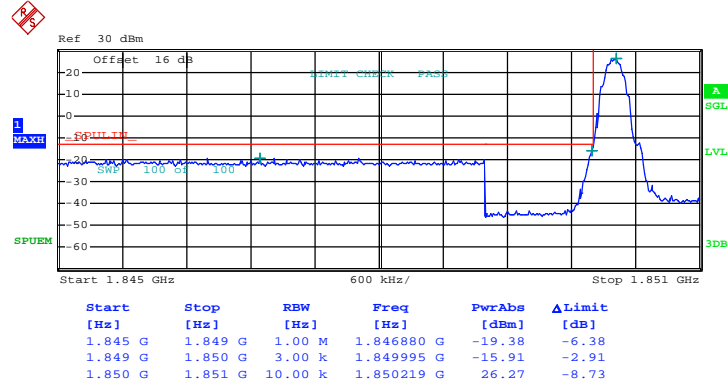

Date: 4.AUG.2015 06:40:18

Higher Band Edge Plot on Channel 810 (1909.8 MHz)

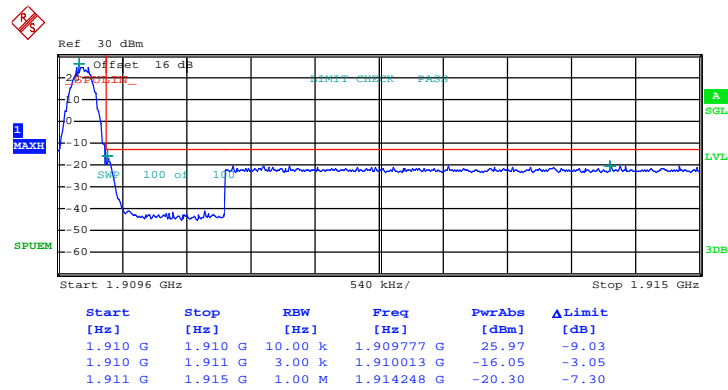


Date: 4.AUG.2015 06:36:24




Band :	GSM1900	Test Mode :	EDGE class 8 Link (8PSK)
--------	---------	-------------	--------------------------

Lower Band Edge Plot on Channel 512 (1850.2 MHz)

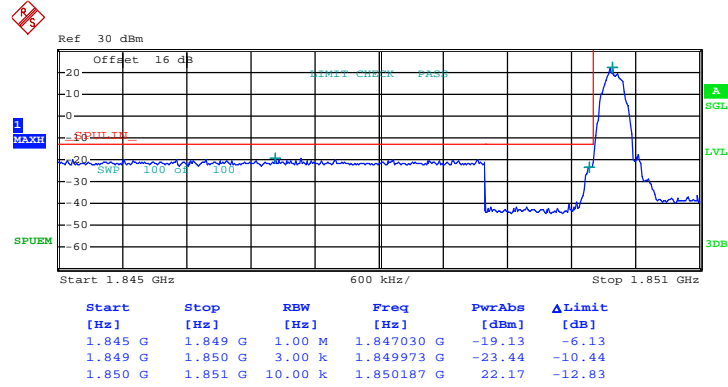

Date: 4.AUG.2015 07:32:14

Higher Band Edge Plot on Channel 810 (1909.8 MHz)

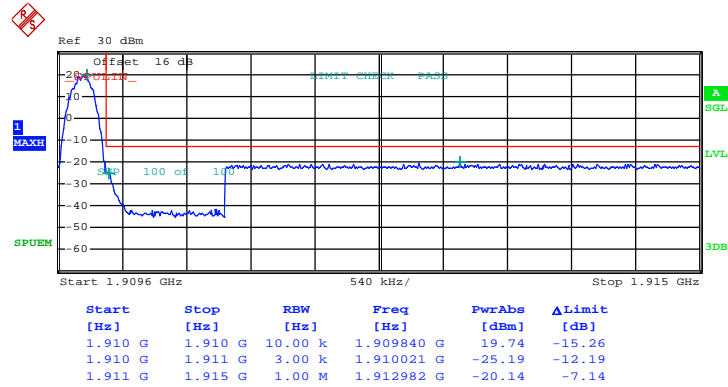


Date: 4.AUG.2015 07:33:35






Band :	WCDMA Band V	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	--------------	-------------	--------------------------

Lower Band Edge Plot on Channel 4132 (826.4 MHz)

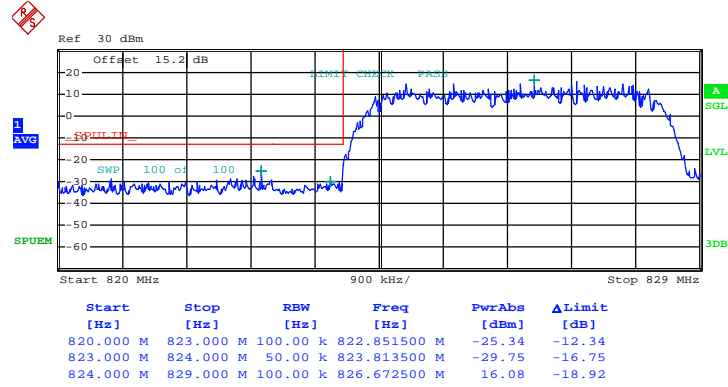

Date: 4.AUG.2015 05:20:54

Higher Band Edge Plot on Channel 4233 (846.6 MHz)

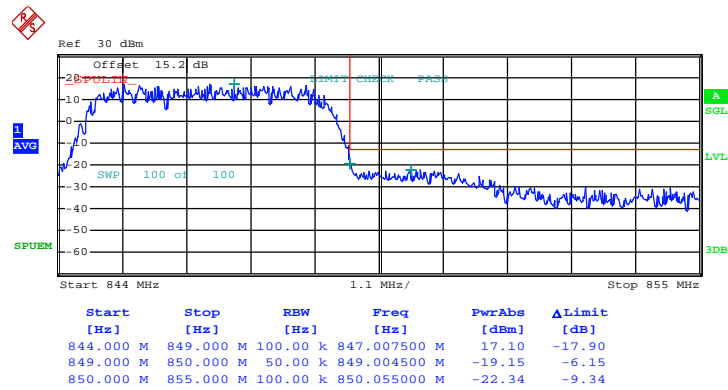


Date: 4.AUG.2015 05:22:06




<b>Band :</b>	WCDMA Band IV	<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)
---------------	---------------	--------------------	--------------------------

**Lower Band Edge Plot on Channel 1312 (1712.4 MHz)**

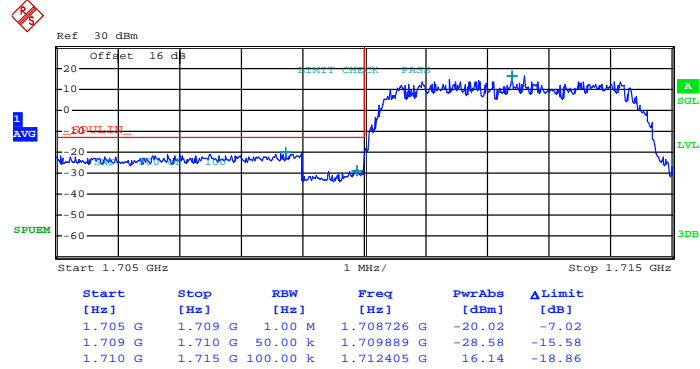

Date: 4.AUG.2015 06:19:39

**Higher Band Edge Plot on Channel 1513 (1752.6 MHz)**

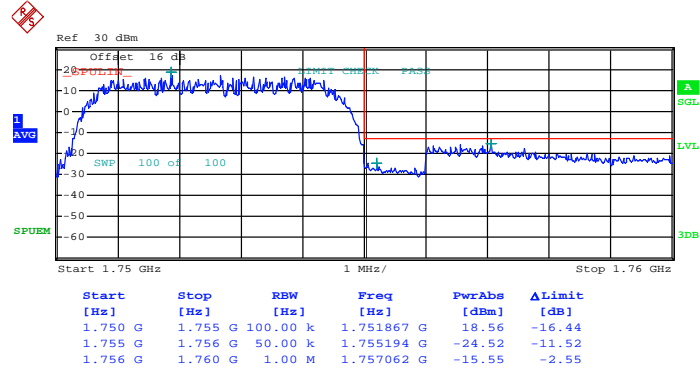


Date: 4.AUG.2015 06:21:10




Band :	WCDMA Band II	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	---------------	-------------	--------------------------

Lower Band Edge Plot on Channel 9262 (1852.4 MHz)

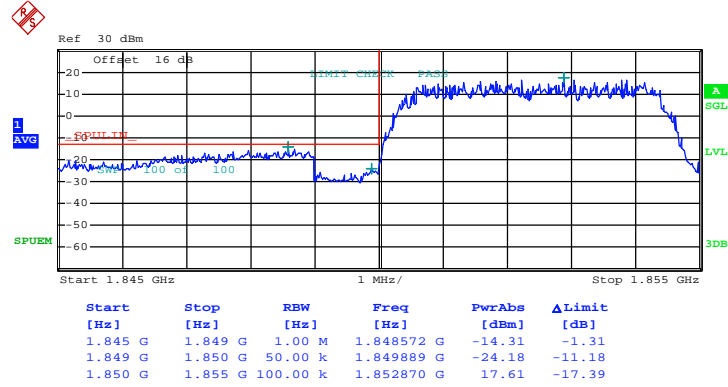

Date: 4.AUG.2015 06:25:47

Higher Band Edge Plot on Channel 9538 (1907.6 MHz)

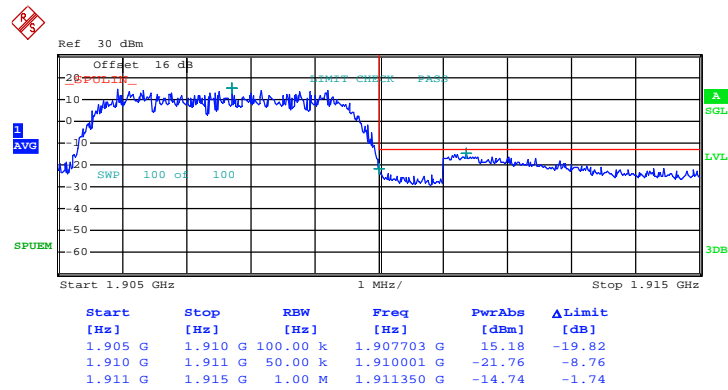

Date: 4.AUG.2015 06:24:23

### 3.6 Conducted Spurious Emission Measurement

#### 3.6.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10<sup>th</sup> harmonic.

#### 3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


#### 3.6.3 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)
 
$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$$

$$= -13\text{dBm}.$$

#### 3.6.4 Test Setup

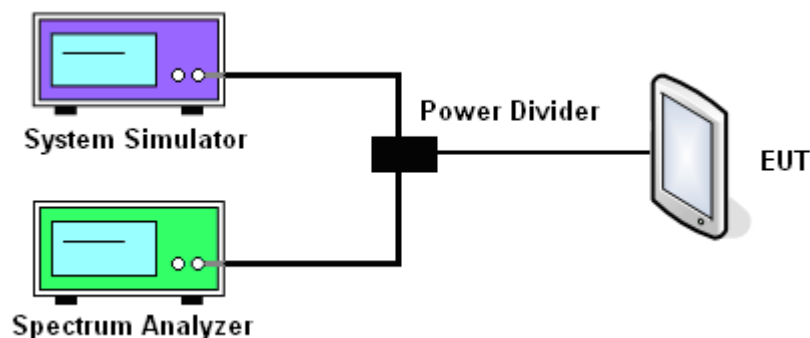




3.6.5 Test Result (Plots) of Conducted Spurious Emission

Band :	GSM850	Channel :	CH189
Test Mode :	GPRS class 8 Link (GMSK)	Frequency :	836.4 MHz

Conducted Spurious Emission Plot between 30MHz ~ 9GHz

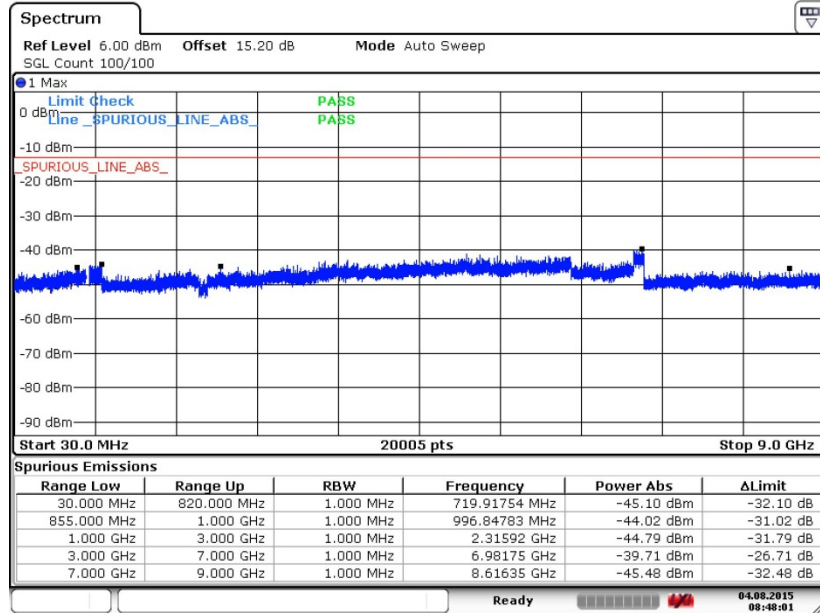


Date: 4.AUG.2015 08:48:01



<b>Band :</b>	GSM850	<b>Channel :</b>	CH189
<b>Test Mode :</b>	EDGE class 8 Link (8PSK)	<b>Frequency :</b>	836.4 MHz

Conducted Spurious Emission Plot between 30MHz ~ 9GHz

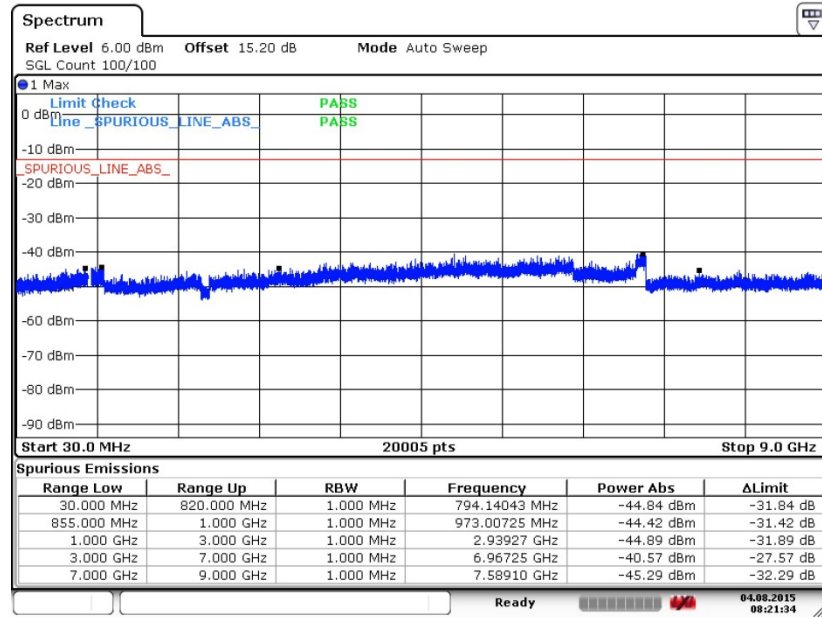


Date: 4.AUG.2015 08:21:33



<b>Band :</b>	GSM1900	<b>Channel :</b>	CH661
<b>Test Mode :</b>	GPRS class 8 Link (GMSK)	<b>Frequency :</b>	1880.0 MHz

Conducted Spurious Emission Plot between 30MHz ~ 19.1GHz

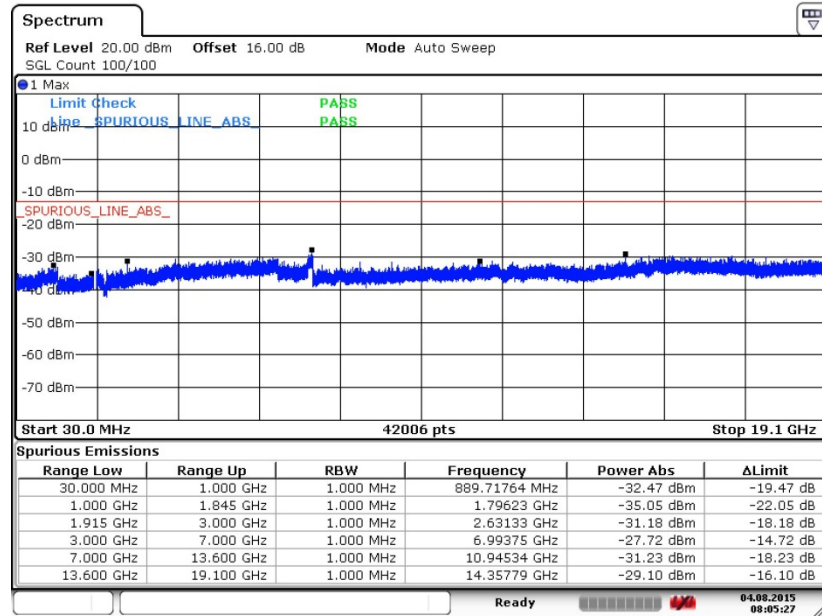


Date: 4.AUG.2015 08:05:28



<b>Band :</b>	GSM1900	<b>Channel :</b>	CH661
<b>Test Mode :</b>	EDGE class 8 Link (8PSK)	<b>Frequency :</b>	1880.0 MHz

**Conducted Spurious Emission Plot between 30MHz ~ 19.1GHz**

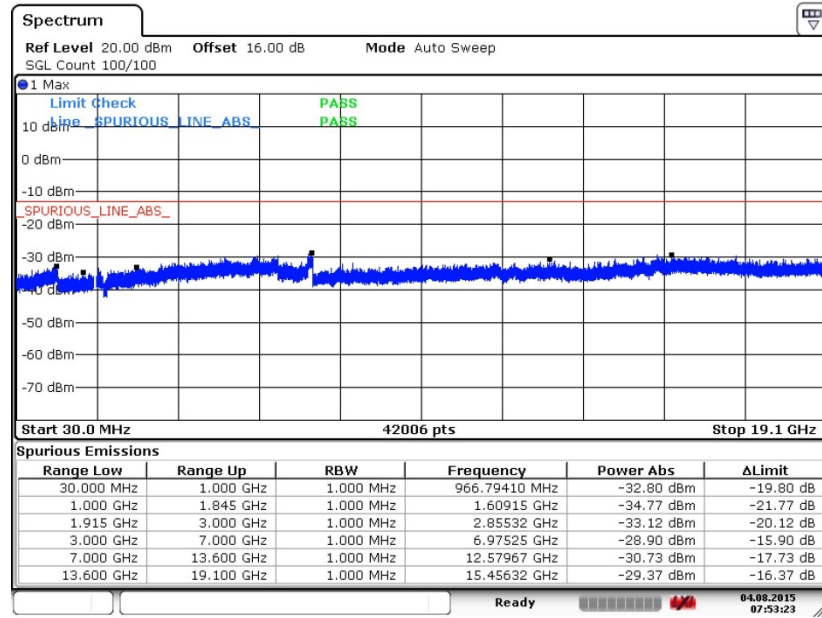


Date: 4.AUG.2015 07:53:23





<b>Band :</b>	WCDMA Band V	<b>Channel :</b>	CH4182
<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)	<b>Frequency :</b>	836.4 MHz

**Conducted Spurious Emission Plot between 30MHz ~ 9GHz**

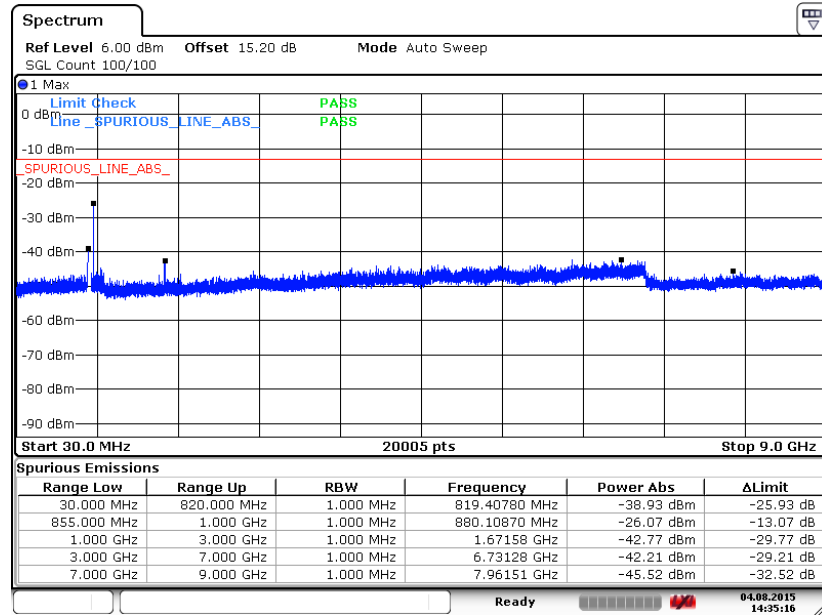


Date: 4 AUG 2015 14:35:16



<b>Band :</b>	WCDMA Band IV	<b>Channel :</b>	CH1413
<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)	<b>Frequency :</b>	1732.6 MHz


Conducted Spurious Emission Plot between 30MHz ~ 18GHz

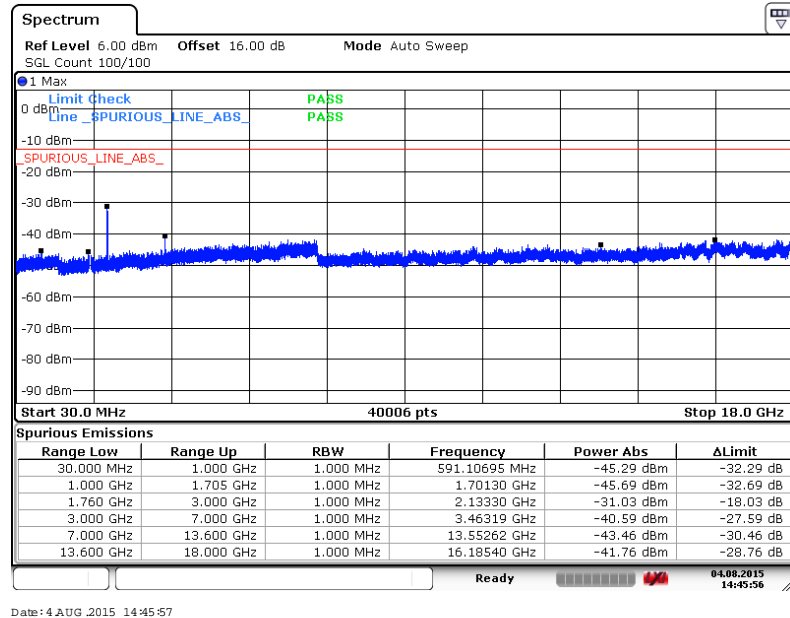



Band :	WCDMA Band II	Channel :	CH9400
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	1880.0 MHz

Conducted Spurious Emission Plot between 30MHz ~ 19.1GHz

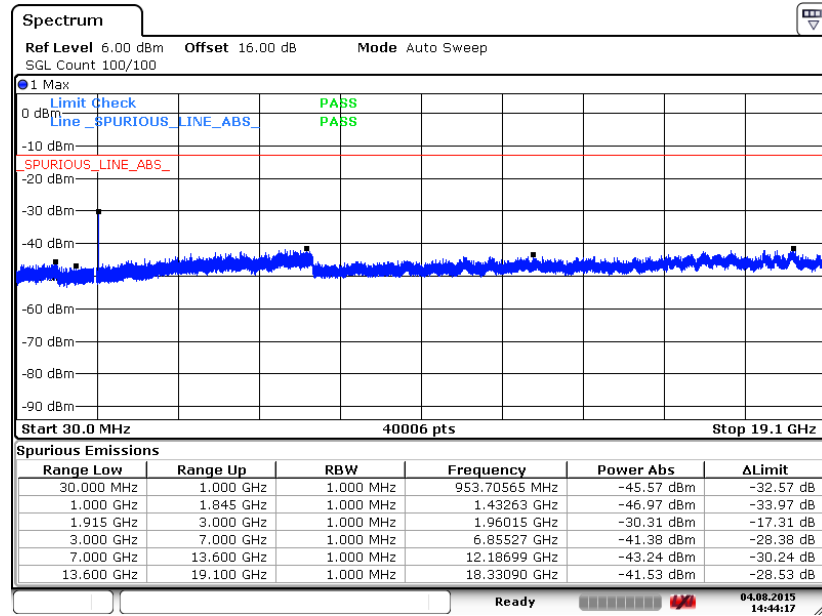

Date: 4 AUG 2015 14:44:17



### 3.7 Field Strength of Spurious Radiation Measurement

#### 3.7.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

#### 3.7.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

#### 3.7.3 Test Procedures


1. The testing follows FCC KDB 971168 v02r02 Section 5.8 and ANSI / TIA-603-C-2004 Section 2.2.12.
2. The EUT was placed on a rotatable wooden table 0.8 meters above the ground.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
9. Taking the record of output power at antenna port.
10. Repeat step 7 to step 8 for another polarization.
11.  $EIRP (dBm) = S.G. Power - Tx Cable Loss + Tx Antenna Gain$
12.  $ERP (dBm) = EIRP - 2.15$
13. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
14. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)  
=  $P(W) - [43 + 10\log(P)] (dB)$   
=  $[30 + 10\log(P)] (dBm) - [43 + 10\log(P)] (dB)$   
= -13dBm.

### 3.7.4 Test Setup

For radiated emissions from 30MHz to 1GHz

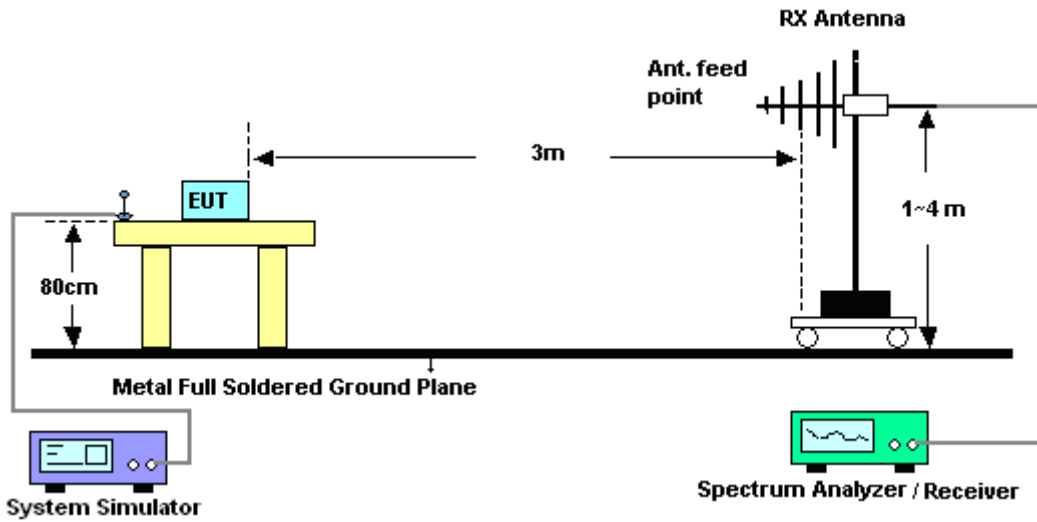

For radiated emissions above 1GHz

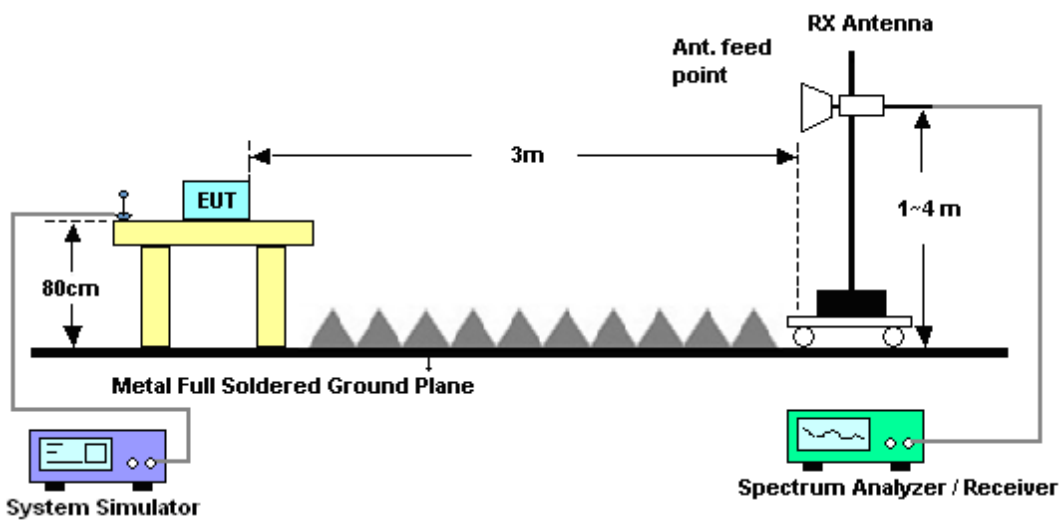



3.7.5 Test Result of Field Strength of Spurious Radiated

<b>Band :</b>	GSM850		<b>Temperature :</b>	21~23°C					
<b>Test Mode :</b>	GPRS class 8 Link (GMSK)		<b>Relative Humidity :</b>	48~50%					
<b>Test Engineer :</b>	Jack Tian		<b>Polarization :</b>	Horizontal					
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization (H/V)	Result
1672	-59.18	-13	-46.18	-60.79	-65.87	0.56	9.40	H	Pass
2510	-61.61	-13	-48.61	-65.51	-69.31	0.75	10.60	H	Pass
3346	-58.36	-13	-45.36	-67.66	-67.96	0.85	12.60	H	Pass

<b>Band :</b>	GSM850		<b>Temperature :</b>	21~23°C					
<b>Test Mode :</b>	GPRS class 8 Link (GMSK)		<b>Relative Humidity :</b>	48~50%					
<b>Test Engineer :</b>	Jack Tian		<b>Polarization :</b>	Vertical					
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization (H/V)	Result
1672	-57.66	-13	-44.66	-60.11	-64.35	0.56	9.40	V	Pass
2510	-60.48	-13	-47.48	-64.86	-68.18	0.75	10.60	V	Pass
3346	-60.32	-13	-47.32	-67.18	-69.92	0.85	12.60	V	Pass



<b>Band :</b>	GSM850					<b>Temperature :</b>	21~23°C		
<b>Test Mode :</b>	EDGE class 8 Link (8PSK)					<b>Relative Humidity :</b>	48~50%		
<b>Test Engineer :</b>	Jack Tian					<b>Polarization :</b>	Horizontal		
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization (H/V)	Result
1672	-57.40	-13	-44.40	-59.01	-64.09	0.56	9.40	H	Pass
2510	-56.46	-13	-43.46	-60.36	-64.16	0.75	10.60	H	Pass
3346	-58.27	-13	-45.27	-67.57	-67.87	0.85	12.60	H	Pass

<b>Band :</b>	GSM850					<b>Temperature :</b>	21~23°C		
<b>Test Mode :</b>	EDGE class 8 Link (8PSK)					<b>Relative Humidity :</b>	48~50%		
<b>Test Engineer :</b>	Jack Tian					<b>Polarization :</b>	Vertical		
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization (H/V)	Result
1672	-54.34	-13	-41.34	-57.10	-61.03	0.56	9.40	V	Pass
2510	-55.28	-13	-42.28	-59.66	-62.98	0.75	10.60	V	Pass
3346	-59.45	-13	-46.45	-66.31	-69.05	0.85	12.60	V	Pass



<b>Band :</b>	GSM1900					<b>Temperature :</b>	21~23°C		
<b>Test Mode :</b>	GPRS class 8 Link (GMSK)					<b>Relative Humidity :</b>	48~50%		
<b>Test Engineer :</b>	Jack Tian					<b>Polarization :</b>	Horizontal		
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization (H/V)	Result
3760	-45.44	-13	-32.44	-56.69	-57.17	0.87	12.60	H	Pass
5640	-40.13	-13	-27.13	-56.01	-52.16	1.07	13.10	H	Pass
7520	-46.94	-13	-33.94	-65.26	-56.55	1.69	11.30	H	Pass

<b>Band :</b>	GSM1900					<b>Temperature :</b>	21~23°C		
<b>Test Mode :</b>	GPRS class 8 Link (GMSK)					<b>Relative Humidity :</b>	48~50%		
<b>Test Engineer :</b>	Jack Tian					<b>Polarization :</b>	Vertical		
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization (H/V)	Result
3760	-44.46	-13	-31.46	-56.93	-56.19	0.87	12.6	V	Pass
5640	-41.31	-13	-28.31	-57.63	-53.34	1.07	13.1	V	Pass
7520	-47.65	-13	-34.65	-65.87	-57.26	1.69	11.3	V	Pass





<b>Band :</b>	GSM1900					<b>Temperature :</b>	21~23°C		
<b>Test Mode :</b>	EDGE class 8 Link (8PSK)					<b>Relative Humidity :</b>	48~50%		
<b>Test Engineer :</b>	Jack Tian					<b>Polarization :</b>	Horizontal		
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization (H/V)	Result
3760	-47.74	-13	-34.74	-58.99	-59.47	0.87	12.60	H	Pass
5640	-42.23	-13	-29.23	-58.11	-54.26	1.07	13.10	H	Pass
7520	-50.13	-13	-37.13	-68.45	-59.74	1.69	11.30	H	Pass

<b>Band :</b>	GSM1900					<b>Temperature :</b>	21~23°C		
<b>Test Mode :</b>	EDGE class 8 Link (8PSK)					<b>Relative Humidity :</b>	48~50%		
<b>Test Engineer :</b>	Jack Tian					<b>Polarization :</b>	Vertical		
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization (H/V)	Result
3760	-49.59	-13	-36.59	-62.06	-61.32	0.87	12.6	V	Pass
5640	-48.37	-13	-35.37	-64.69	-60.40	1.07	13.1	V	Pass
7520	-51.54	-13	-38.54	-69.76	-61.15	1.69	11.3	V	Pass



<b>Band :</b>	WCDMA Band V					<b>Temperature :</b>	21~23°C		
<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)					<b>Relative Humidity :</b>	48~50%		
<b>Test Engineer :</b>	Jack Tian					<b>Polarization :</b>	Horizontal		
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization (H/V)	Result
1672	-63.23	-13	-50.23	-64.84	-69.92	0.56	9.40	H	Pass
2510	-62.50	-13	-49.50	-66.40	-70.20	0.75	10.60	H	Pass
3346	-57.96	-13	-44.96	-67.26	-67.56	0.85	12.60	H	Pass

<b>Band :</b>	WCDMA Band V					<b>Temperature :</b>	21~23°C		
<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)					<b>Relative Humidity :</b>	48~50%		
<b>Test Engineer :</b>	Jack Tian					<b>Polarization :</b>	Vertical		
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization (H/V)	Result
1672	-62.51	-13	-49.51	-64.96	-69.20	0.56	9.40	V	Pass
2510	-61.46	-13	-48.46	-65.84	-69.16	0.75	10.60	V	Pass
3346	-60.75	-13	-47.75	-67.61	-70.35	0.85	12.60	V	Pass



<b>Band :</b>	WCDMA Band IV					<b>Temperature :</b>	21~23°C		
<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)					<b>Relative Humidity :</b>	48~50%		
<b>Test Engineer :</b>	Jack Tian					<b>Polarization :</b>	Horizontal		
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization (H/V)	Result
3465	-49.61	-13	-36.61	-61.41	-61.36	0.85	12.60	H	Pass
5197.5	-45.63	-13	-32.63	-61.50	-57.38	0.95	12.70	H	Pass
6930	-53.51	-13	-40.51	-70.14	-64.03	1.18	11.70	H	Pass

<b>Band :</b>	WCDMA Band IV					<b>Temperature :</b>	21~23°C		
<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)					<b>Relative Humidity :</b>	48~50%		
<b>Test Engineer :</b>	Jack Tian					<b>Polarization :</b>	Vertical		
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization (H/V)	Result
3465	-51.88	-13	-38.88	-62.11	-63.67	0.81	12.6	V	Pass
5197.5	-51.46	-13	-38.46	-64.06	-63.21	0.95	12.7	V	Pass
6930	-52.94	-13	-39.94	-70.12	-63.51	1.13	11.7	V	Pass



<b>Band :</b>	WCDMA Band II					<b>Temperature :</b>	21~23°C		
<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)					<b>Relative Humidity :</b>	48~50%		
<b>Test Engineer :</b>	Jack Tian					<b>Polarization :</b>	Horizontal		
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization (H/V)	Result
3760	-54.27	-13	-41.27	-65.52	-66.00	0.87	12.60	H	Pass
5640	-52.54	-13	-39.54	-68.42	-64.57	1.07	13.10	H	Pass
7520	-50.89	-13	-37.89	-69.21	-60.50	1.69	11.30	H	Pass

<b>Band :</b>	WCDMA Band II					<b>Temperature :</b>	21~23°C		
<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)					<b>Relative Humidity :</b>	48~50%		
<b>Test Engineer :</b>	Jack Tian					<b>Polarization :</b>	Vertical		
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization (H/V)	Result
3760	-54.21	-13	-41.21	-66.68	-65.94	0.87	12.6	V	Pass
5640	-53.15	-13	-40.15	-69.47	-65.18	1.07	13.1	V	Pass
7520	-50.99	-13	-37.99	-69.21	-60.60	1.69	11.3	V	Pass



## 3.8 Frequency Stability Measurement

### 3.8.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5\text{ppm}$ ) of the center frequency.

### 3.8.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


### 3.8.3 Test Procedures for Temperature Variation

1. The testing follows FCC KDB 971168 v02r02 Section 9.0.
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to  $-30^{\circ}\text{C}$  and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in  $10^{\circ}\text{C}$  steps up to  $50^{\circ}\text{C}$ . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

### 3.8.4 Test Procedures for Voltage Variation

1. The testing follows FCC KDB 971168 v02r02 Section 9.0.
2. The EUT was placed in a temperature chamber at  $25\pm 5^{\circ}\text{C}$  and connected with the system simulator.
3. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.

### 3.8.5 Test Setup

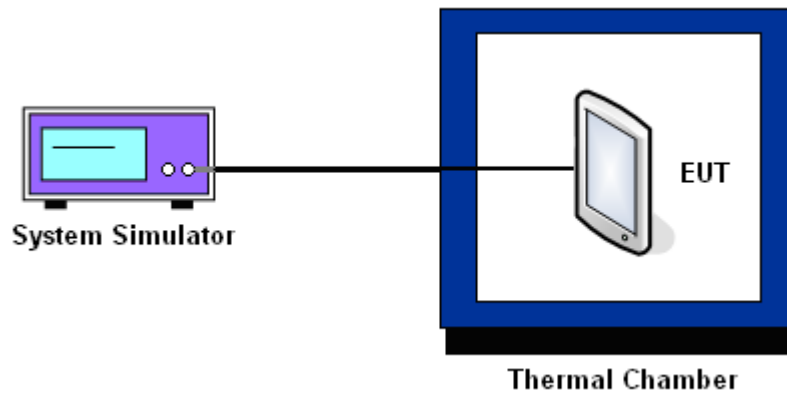



3.8.6 Test Result of Temperature Variation

<b>Band :</b>	GSM 850	<b>Channel :</b>	189
<b>Limit (ppm) :</b>	2.5	<b>Frequency :</b>	836.4 MHz

Temperature (°C)	GPRS class 8	EDGE class 8	Result
	Deviation (ppm)	Deviation (ppm)	
50	0.0705	0.0693	PASS
40	0.0586	0.0538	
30	0.0072	0.0179	
20(Ref.)	0.0000	0.0000	
10	0.0120	0.0203	
0	0.0347	0.0383	
-10	0.0359	0.0215	
-20	0.0179	0.0060	
-30	0.0347	0.0179	

<b>Band :</b>	GSM 1900	<b>Channel :</b>	661
<b>Limit (ppm) :</b>	within authorized band	<b>Frequency :</b>	1880.0 MHz

Temperature (°C)	GPRS class 8	EDGE class 8	Result
	Deviation (ppm)	Deviation (ppm)	
50	0.0250	0.0239	PASS
40	0.0170	0.0255	
30	0.0032	0.0080	
20(Ref.)	0.0000	0.0000	
10	0.0048	0.0090	
0	0.0154	0.0170	
-10	0.0160	0.0096	
-20	0.0080	0.0027	
-30	0.0154	0.0080	

Note: The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



<b>Band :</b>	WCDMA Band V	<b>Channel :</b>	4182
<b>Limit (ppm) :</b>	2.5	<b>Frequency :</b>	836.4 MHz

Temperature (°C)	RMC 12.2Kbps		Result
	Deviation (ppm)		
50	0.0574		PASS
40	0.0526		
30	0.0179		
20(Ref.)	0.0000		
10	0.0203		
0	0.0383		
-10	0.0215		
-20	0.0251		
-30	0.0359		

<b>Band :</b>	WCDMA Band IV	<b>Channel :</b>	1413
<b>Limit (ppm) :</b>	within authorized band	<b>Frequency :</b>	1732.6 MHz

Temperature (°C)	RMC 12.2Kbps		Result
	Deviation (ppm)		
50	0.0098		PASS
40	0.0063		
30	0.0087		
20(Ref.)	0.0000		
10	0.0029		
0	0.0069		
-10	0.0121		
-20	0.0162		
-30	0.0254		

Note: The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.





<b>Band :</b>	WCDMA Band II	<b>Channel :</b>	9400
<b>Limit (ppm) :</b>	within authorized band	<b>Frequency :</b>	1880.0 MHz

Temperature (°C)	RMC 12.2Kbps	Result
	Deviation (ppm)	
50	0.0314	PASS
40	0.0266	
30	0.0080	
20(Ref.)	0.0000	
10	0.0090	
0	0.0223	
-10	0.0043	
-20	0.0170	
-30	0.0160	

Note: The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



3.8.7 Test Result of Voltage Variation

Band & Channel	Mode	Voltage (Volt)	Deviation (ppm)	Limit (ppm)	Result
GSM 850 CH189	GPRS class 8	4.35	0.0335	2.5	PASS
		3.80	0.0036		
		BEP	0.0418		
	EDGE class 8	4.35	0.0407		
		3.80	0.0418		
		BEP	0.0239		
GSM 1900 CH661	GPRS class 8	4.35	0.0149	(Note 3.)	
		3.80	0.0016		
		BEP	0.0186		
	EDGE class 8	4.35	0.0181		
		3.80	0.0186		
		BEP	0.0106		
WCDMA Band V CH4182	RMC 12.2Kbps	4.35	0.0395	2.5	
		3.80	0.0096		
		BEP	0.0478		
WCDMA Band IV CH1413	RMC 12.2Kbps	4.35	0.0127	(Note 3.)	
		3.80	0.0000		
		BEP	0.0029		
WCDMA Band II CH9400	RMC 12.2Kbps	4.35	0.0176	(Note 3.)	
		3.80	0.0069		
		BEP	0.0165		

Note:

1. Normal Voltage = 3.80V.
2. Battery End Point (BEP) = 3.60 V.
3. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



## 4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Oct. 28, 2014	Aug. 04, 2015~ Aug. 12, 2015	Oct. 27, 2015	Conducted (TH01-KS)
Spectrum Analyzer	R&S	FSV30	101338	9kHz~30GHz	May 04, 2015	Aug. 04, 2015~ Aug. 12, 2015	May 03, 2016	Conducted (TH01-KS)
Thermal Chamber	Ten Billion	TTC-B3S	TBN-960502	-40~+150°C	Oct. 25, 2014	Aug. 04, 2015~ Aug. 12, 2015	Oct. 24, 2015	Conducted (TH01-KS)
EMI Test Receiver&SA	Agilent Technologies	N9038A	MY52260185	20Hz~26.5GHz	May 26, 2015	Aug. 29, 2015	May 25, 2016	Radiation (03CH01-SZ)
Spectrum Analyzer	R&S	FSV40	101041	10kHz~40GHz;Ma x 30dBm	Sep. 25, 2014	Aug. 29, 2015	Sep. 24, 2015	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	23188	30MHz~2GHz	Nov. 07, 2014	Aug. 29, 2015	Nov. 06, 2015	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Oct. 15, 2014	Aug. 29, 2015	Oct. 14, 2015	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz~40GHz	Aug. 17, 2015	Aug. 29, 2015	Aug. 16, 2016	Radiation (03CH01-SZ)
Amplifier	ADVANTEST	BB525C	E9007003	9kHz~3000MHz / 30 dB	Jan. 28, 2015	Aug. 29, 2015	Jan. 27, 2016	Radiation (03CH01-SZ)
Amplifier	Yiai	AV3860B	04030	2GHz~26.5GHz	May 05, 2015	Aug. 29, 2015	May 04, 2016	Radiation (03CH01-SZ)
Amplifier	Agilent Technologies	83017A	MY39501302	500MHz~26.5GHz	Jan. 28, 2015	Aug. 29, 2015	Jan. 27, 2016	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	61601000198 5	N/A	NCR	Aug. 29, 2015	NCR	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Aug. 29, 2015	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Aug. 29, 2015	NCR	Radiation (03CH01-SZ)



## 5. Uncertainty of Evaluation

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.9dB
---	-------