User Manual for WPR210 Camera

V1.0

Step for configuration the camera


1. The camera is set to AP mode by default, and you can use a laptop to connect to the camera for configuration.

SSID: VVTK-IPCam-Demo


Password: 12354678

2. The default IP is 192.168.66.6. You can also use Vivotek Shepherd to find the camera.


https://www.vivotek.com/Shepherd#overview

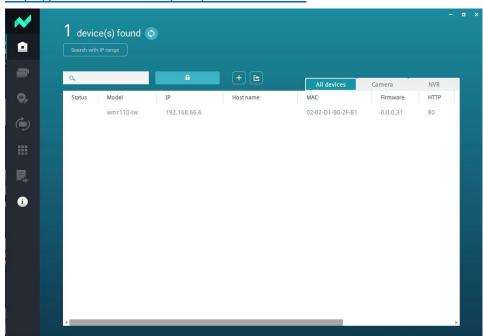

3. After connecting to the camera, go to the WiFi settings page and set up an AP router that can connect to the network.

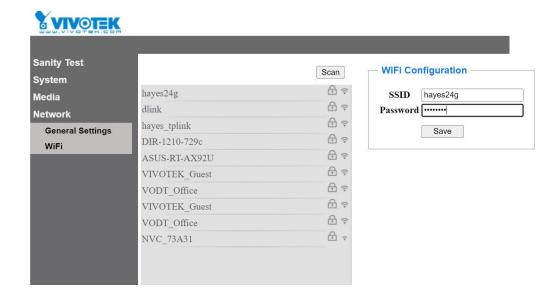

4. On the "Media > P2P" page, the QR code is for mobile connection.

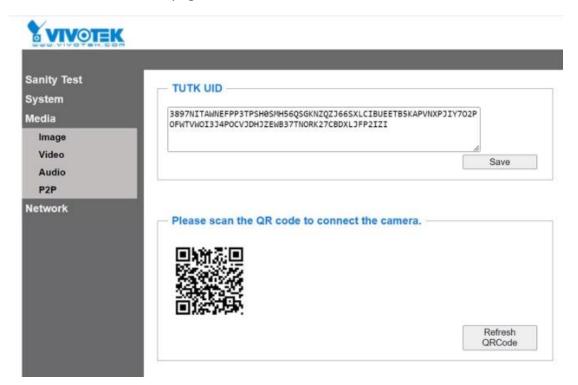

Step for mobile app

1. Download the app Hausetopia. Register an account and log in.



2. After scanning the QR code that was just generated in Step 4, you can add the camera to your account.



Note 1:

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

Note 2:

This device complies with Part 15 of the FCC Rules. Operation is subject to thefollowing two conditions: (1) This device may not cause harmful interference, and (2this device must accept any interference received, including interference that maycause undesired operation.

Caution:

Any changes or modifications not expressly approved by the grantee of this device could void the user's authority to operate the equipment.

RF exposure warning:

This equipment must be installed and operated in accordance with provided instructions and the antenna(s) used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter. End-users and installers must be provide with antenna installation instructions and transmitter operating conditions for satisfying RF exposure compliance.