# 3.2 x 1.6 x 0.5 (mm) WiFi/Bluetooth Ceramic Chip Antenna (AA055U) Engineering Specification

#### 1. Product Number

H 2 U 3 4 W 1 H 1 Z 0 7 0 0



Model: AA055U Antenna Type: Chip

#### 2. Features

- \*Stable and reliable in performances
- \*Low profile, compact size
- \*RoHS 2.0 compliance
- \*SMT processes compatible
- \*AEC-Q200 compliant

#### 3. Applications

- \*ISM 2.4 GHz applications
- \*ZigBee/BLE applications
- \*Bluetooth earphone systems
- \*Hand-held devices when WiFi / Bluetooth functions are needed, e.g., Smart phones
- \*IEEE802.11 b/g/n
- \*Wireless PCMCIA cards or USB dongles

#### 4. Description

Unictron's AA055U ceramic chip antenna is designed for ISM 2.4GHz applications, covering frequencies 2400~2500MHz. Fabricated with proprietary design and processes, AA055U shows excellent performance and is fully compatible with SMT processes which can decrease the assembly cost and improve device's quality and consistency.



#### 詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

5F. No. 83, Kewang Rd., Longtan Dist, Taoyuan City 32556, Taiwan (R.O.C.)

Prepared by: Betty Designed by: Sam Checked by: Mike Approved by: Herbert

TITLE: 3.2 x 1.6 x 0.5(mm) WiFi/Bluetooth Ceramic Chip
Antenna (AA055U) Engineering Specification

DOCUMENT NO.

H2U34W1H1Z0700

REV.


Preliminary

#### 5. **Layout Guide & Electrical Specifications**


5-1. Layout Guide (unit:mm)

Solder Land Pattern:

The solder land pattern (gold marking areas) is shown below. Recommendation on matching circuit will be provided according to customer's installation conditions.

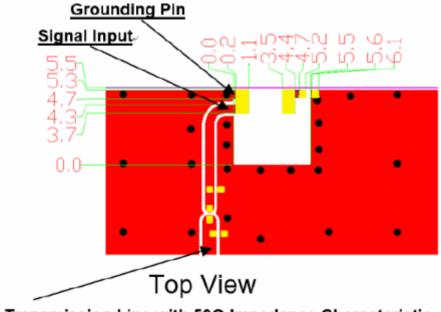

Transmission Line with 50Ω Impedance Characteristic

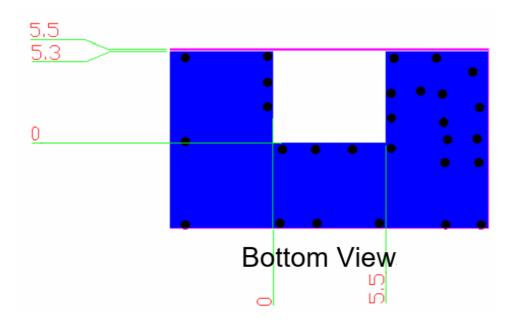



#### 詠業科技股份有限公司

**Unictron Technologies Corporation** Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

5F. No. 83, Kewang Rd., Longtan Dist, Taoyuan City 32556, Taiwan (R.O.C.)

Checked by : Mike Prepared by: Betty Designed by :Sam **Approved by : Herbert** 

TITLE: 3.2 x 1.6 x 0.5(mm) WiFi/Bluetooth Ceramic Chip Antenna (AA055U) Engineering Specification

DOCUMENT NO.

H2U34W1H1Z0700

REV. **Preliminary** 

PAGE 2 **OF** 

## 5-2. Electrical Specifications (Evaluation Board Dimensions: 80 x 40 mm<sup>2</sup>) 5-2-1. Electrical Table

Characteristics	Specifications	Unit
Outline Dimensions	3.2 x 1.6 x 0.5	mm
Ground Plane Dimensions	80 x 40	mm
Working Frequency	2400~2500	MHz
VSWR (@ center frequency)*	2 Max.	
Characteristic Impedance	50	Ω
Polarization	Linear Polarization	
Peak Gain (@2442 MHz)	1.8 (typical**)	dBi
Efficiency (©2442 WH12)	76.3 (typical**)	%

<sup>\*</sup>Center frequency means the frequency with the lowest value in return loss of the chip antenna on the evaluation board.



#### 詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

5F. No. 83, Kewang Rd., Longtan Dist, Taoyuan City 32556, Taiwan (R.O.C.)


Prepared by: Betty Designed by: Sam Checked by: Mike Approved by: Herbert

TITLE: 3.2 x 1.6 x 0.5(mm) WiFi/Bluetooth Ceramic Chip Antenna (AA055U) Engineering Specification NO.

DOCUMENT NO.


H2U34W1H1Z0700 Preliminary

<sup>\*\*</sup>A typical value is for reference only, not guaranteed.

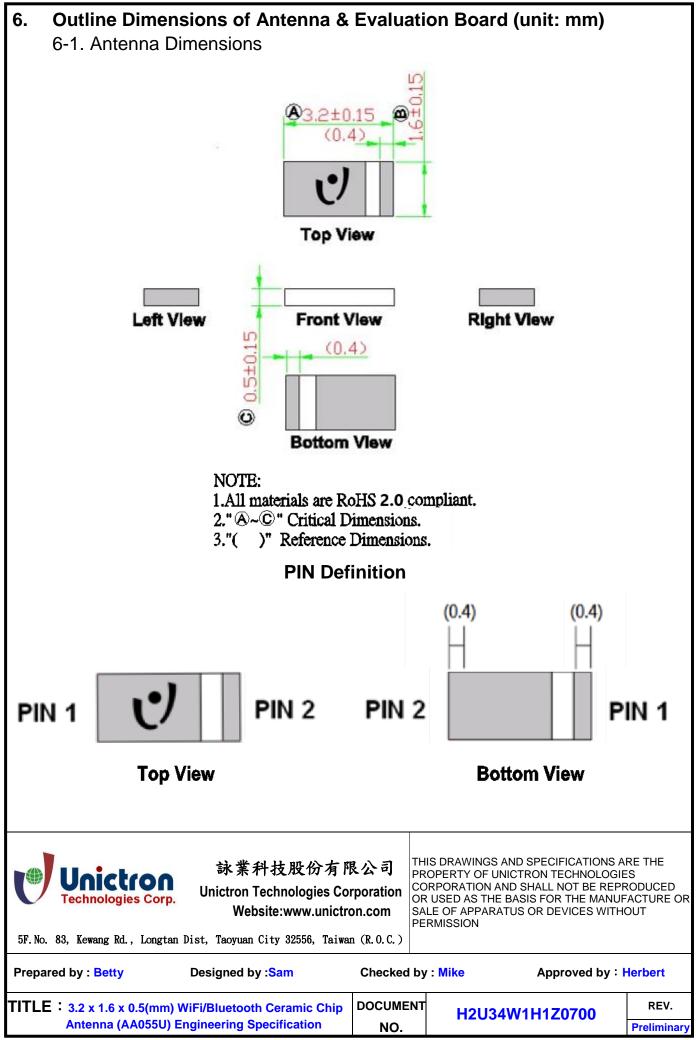

PIN	1	2
Soldering PAD	Signal	Tuning / Ground

#### 6-2. Evaluation Board with Antenna

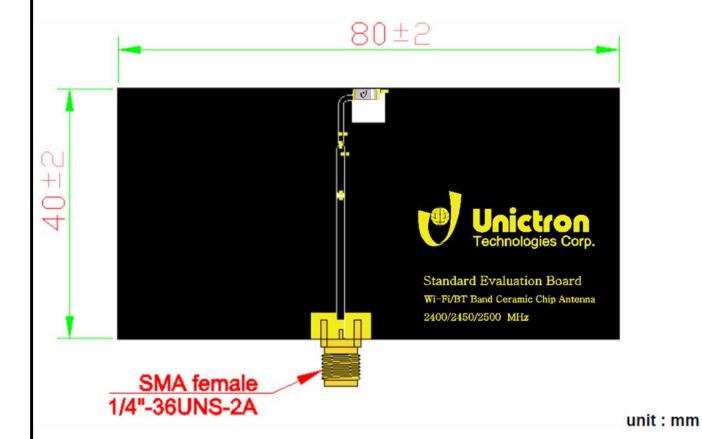



#### 詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

5F. No. 83, Kewang Rd., Longtan Dist, Taoyuan City 32556, Taiwan (R.O.C.)

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Betty Designed by : Sam Checked by : Mike Approved by : Herbert

TITLE: 3.2 x 1.6 x 0.5(mm) WiFi/Bluetooth Ceramic Chip DOCUMENT


Antenna (AA055U) Engineering Specification


DOCUMENT NO. H2U34W1H1Z0700


REV.
Preliminary


#### 7. 3D Radiation Gain Pattern (with 80 x 40 mm<sup>2</sup> Evaluation Board)

3D Radiation Gain Pattern @ 2442 MHz (unit: dBi)

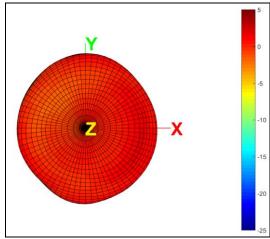

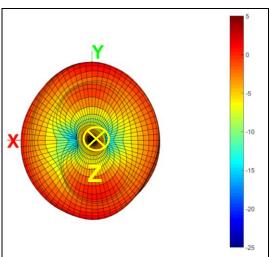

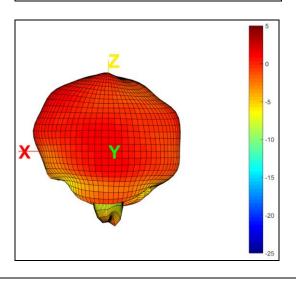

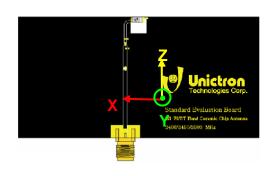



## 詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

5F.No. 83, Kewang Rd., Longtan Dist, Taoyuan City 32556, Taiwan (R.O.C.)

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Betty Designed by :Sam Checked by : Mike Approved by : Herbert

TITLE: 3.2 x 1.6 x 0.5(mm) WiFi/Bluetooth Ceramic Chip DOCUMENT

Antenna (AA055U) Engineering Specification

H2U34W1H1Z0700


----

Preliminary

REV.


#### 8. Frequency tuning and Matching circuit

#### 8-1. Chip antenna tuning scenario:

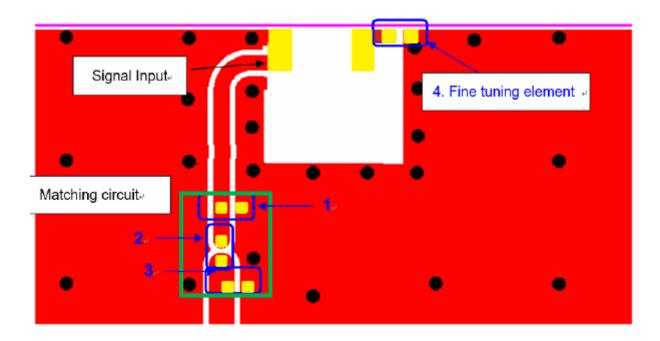

#### 8-2. Matching circuit:

With the following recommended values of matching and tuning components, the center frequencies will be about 2442 MHz at our standard 80x40 mm² evaluation board. However, these are typical reference values which may need to be changed when circuit boards or part vendors are different.

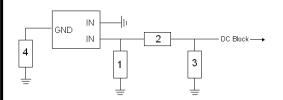

System Matching Circuit Component				
Description	Vendor	Tolerance		
1.2pF, (0402)	MURATA	±0.05 pF		
3.3nH, (0402)	MURATA	±0.1 nH		
NA				
1.2pF, (0402)	MURATA	±0.05 pF		
	Description 1.2pF, (0402) 3.3nH, (0402) NA	Description Vendor 1.2pF, (0402) MURATA 3.3nH, (0402) MURATA NA		

<sup>\*</sup>Typical reference values which may need to be changed when circuit boards or part vendors are different.



#### 詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

5F. No. 83, Kewang Rd., Longtan Dist, Taoyuan City 32556, Taiwan (R.O.C.)

Prepared by: Betty Designed by: Sam Checked by: Mike Approved by: Herbert


TITLE: 3.2 x 1.6 x 0.5(mm) WiFi/Bluetooth Ceramic Chip Antenna (AA055U) Engineering Specification


DOCUMENT NO.

H2U34W1H1Z0700

Preliminary

#### 8-3. Reference for the frequency tuning element

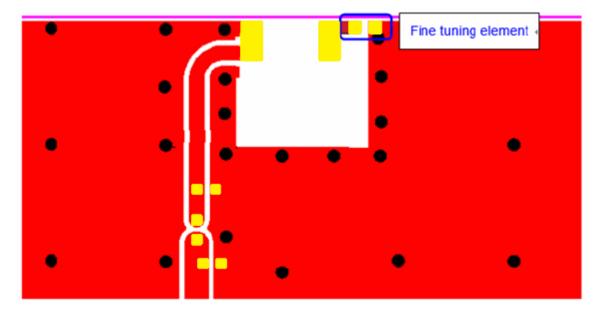

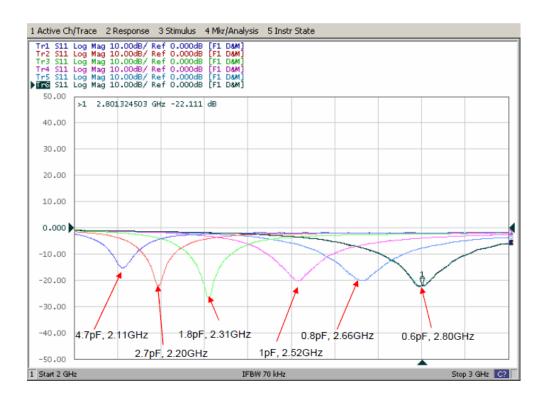



#### 詠業科技股份有限公司

**Unictron Technologies Corporation** Website:www.unictron.com

5F. No. 83, Kewang Rd., Longtan Dist, Taoyuan City 32556, Taiwan (R.O.C.)

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by: Betty Designed by :Sam Checked by: Mike **Approved by : Herbert** 

TITLE: 3.2 x 1.6 x 0.5(mm) WiFi/Bluetooth Ceramic Chip DOCUMENT REV. H2U34W1H1Z0700 Antenna (AA055U) Engineering Specification


NO.

PAGE 8

**Preliminary** 

#### 9. Soldering Condition

Solder paste alloy: SAC305 (Sn96.5/Ag3/Cu0.5) Lead Free solder paste

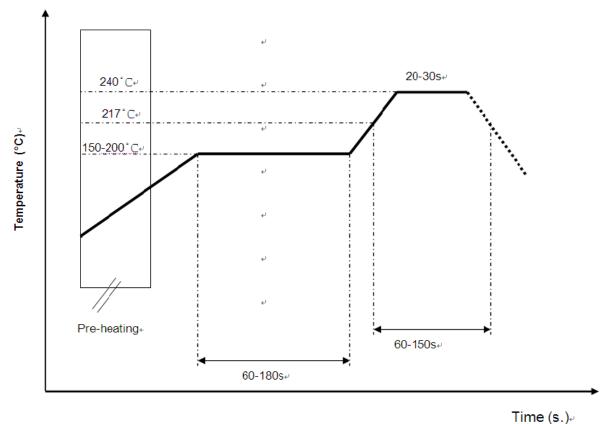

\*Recommended solder paste alloy: SAC305 (Sn96.5 /Ag3 /Cu0.5) Lead Free solder paste

#### 10. Reminders for users of Unictron's AA055U ceramic chip antennas

- 10-1. This chip antenna is made of ceramic materials which are relatively more rigid and brittle compared to printed circuit board materials. Bending of circuit board at the locations where chip antenna is mounted may cause the cracking of solder joints or antenna itself.
- 10-2. Punching/cutting of the break-off tab of PCB panel may cause severe bending of the circuit board which may result in cracking of solder joints or chip antenna itself. Therefore break-off tab shall be located away from the installation site of chip antenna.
- 10-3. Be cautious when ultrasonic welding process needs to be used near the locations where chip antennas are installed. Strong ultrasonic vibration may cause the cracking of chip antenna solder joints.



### 詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

5F. No. 83, Kewang Rd., Longtan Dist, Taoyuan City 32556, Taiwan (R.O.C.)

Prepared by: Betty Designed by: Sam Checked by: Mike Approved by: Herbert

TITLE: 3.2 x 1.6 x 0.5(mm) WiFi/Bluetooth Ceramic Chip Antenna (AA055U) Engineering Specification

DOCUMENT NO.

H2U34W1H1Z0700


REV.
Preliminary

**PAGE** 9 **OF** 11

#### 11. Packing

- (1) Quantity/Reel: 5000 pcs/Reel
- (2) Plastic tape: Black conductive polystyrene.


#### a. Tape Drawing

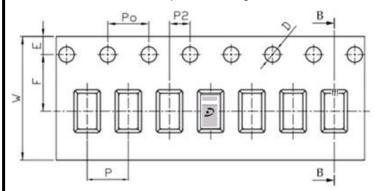

#### b. Tape Dimensions (unit: mm)

Feature	Specifications	Tolerances
W	12.00	±0.30
Р	4.00	±0.10
Е	1.75	±0.10
F	5.50	±0.10
P2	2.00	±0.10
D	1.50	+0.10
D		-0.00
Po	4.00	±0.10
10Po	40.00	±0.20

#### c. Reel Drawing

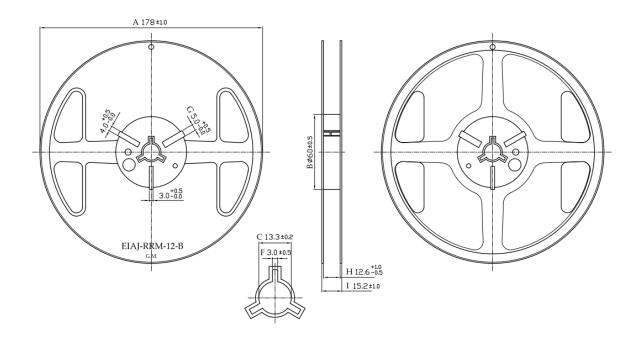



### 詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

5F.No. 83, Kewang Rd., Longtan Dist, Taoyuan City 32556, Taiwan (R.O.C.)

Prepared by: Betty Designed by: Sam Checked by: Mike Approved by: Herbert

TITLE: 3.2 x 1.6 x 0.5(mm) WiFi/Bluetooth Ceramic Chip
Antenna (AA055U) Engineering Specification

DOCUMENT NO.

H2U34W1H1Z0700

REV.
Preliminary

**PAGE** 10 **OF** 11

#### 12. Operating & Storage Conditions

#### 12-1. Operating

(1) Maximum Input Power: 2 W

(2) Operating Temperature: -40°C to 85°C

(3) Relative Humidity: 10% to 70%

#### 12-2. Storage (sealed)

(1) Storage Temperature: -5°C to 40°C

(2) Relative Humidity: 20% to 70%

(3) Shelf Life: 1 year

#### 12-3. Storage (After mounted on customer's PCB with SMT process)

(1) Storage Temperature: -40°C to 85°C

(2) Relative Humidity: 10% to 70%

#### 13. Notice

(1) Installation Guide:

Please refer to Unictron's application note "General guidelines for the installation of Unictron's chip antennas" for further information.

(2) All specifications are subject to change without notice.



#### 詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

5F. No. 83, Kewang Rd., Longtan Dist, Taoyuan City 32556, Taiwan (R.O.C.)

Prepared by: Betty Designed by: Sam Checked by: Mike Approved by: Herbert

TITLE: 3.2 x 1.6 x 0.5(mm) WiFi/Bluetooth Ceramic Chip Antenna (AA055U) Engineering Specification

DOCUMENT NO.

H2U34W1H1Z0700

REV.

Preliminary