



Test Report

Product Name : Bluetooth Keyboard
Model No. : G912
FCC ID. : O62G912

Applicant : Darfon Electronics Corp.
Address : 6, Feng-Shu Tsuen, Gueishan, Taoyuan 333, Taiwan, R.O.C.

Date of Receipt : Aug. 17 ,2006
Issued Date : Aug. 24 ,2006
Report No. : 068L136-RF-US-P06V01

The Test Results relate only to the samples tested.
The test report shall not be reproduced except in full without the written approval of Quietek Corporation.
This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

Test Report Certification

Issued Date: Aug. 24 ,2006

Report No.: 068L136-RF-US-P06V01



Accredited by NIST (NVLAP)
NVLAP Lab Code: 200533-0

Product Name : Bluetooth Keyboard

Applicant : Darfon Electronics Corp.

Address : 6, Feng-Shu Tsuen, Gueishan, Taoyuan 333, Taiwan, R.O.C.

Manufacturer : Darfon Eletronics Co.,Ltd.

Model No. : G912

FCC ID. : O62G912

Rated Voltage : Battery 3V

Trade Name : BenQ

Applicable Standard : FCC CFR Title 47 Part 15 Subpart C: 2005
ANSI C63.4: 2003
CISPR 22: 2005

Test Result : Complied



The Test Results relate only to the samples tested.
 The test report shall not be reproduced except in full without the written approval of Quietek Corporation.
 This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

Documented By : Genie Chang
(Genie Chang)



Tested By : Dino Chen
(Dino Chen)



Approved By : George Chen
(George Chen)

0914

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION	5
1.1. EUT Description	5
1.2. Operational Description	6
1.3. Tested System Details	7
1.4. Configuration of Tested System	7
1.5. EUT Exercise Software	7
1.6. Test Facility	8
2. CONDUCTED EMISSION	9
2.1. Test Equipment	9
2.2. Test Setup	9
2.3. Limits	9
2.4. Test Procedure	10
2.5. Uncertainty	10
2.6. Test Result of Conducted Emission	11
3. PEAK POWER OUTPUT	12
3.1. Test Equipment	12
3.2. Test Setup	12
3.3. Limit	12
3.4. Uncertainty	12
3.5. Test Result of Peak Power Output	13
4. RADIATED EMISSION	14
4.1. Test Equipment	14
4.2. Test Setup	14
4.3. Limits	15
4.4. Test Procedure	15
4.5. Uncertainty	15
4.6. Test Result of Radiated Emission	16
5. BAND EDGE	20
5.1. Test Equipment	20
5.2. Test Setup	20
5.3. Limit	21
5.4. Test Procedure	21
5.5. Uncertainty	21
5.6. Test Result of Band Edge	22
6. CHANNEL NUMBER.....	28
6.1. Test Equipment	28
6.2. Test Setup	28
6.3. Limit	28
6.4. Uncertainty	28
6.5. Test Result of Channel Number	29
7. CHANNEL SEPARATION.....	30
7.1. Test Equipment	30
7.2. Test Setup	30
7.3. Limit	30
7.4. Uncertainty	30
7.5. Test Result of Channel Separation	31
8. DWELL TIME.....	32
8.1. Test Equipment	32
8.2. Test Setup	32
8.3. Limit	32
8.4. Uncertainty	32
8.5. Test Result of Dwell Time	33
9. OCCUPIED BANDWIDTH	39
9.1. Test Equipment	39
9.2. Test Setup	39
9.3. Limits	39
9.4. Uncertainty	39
9.5. Test Result of Occupied Bandwidth	40

10. EMI REDUCTION METHOD DURING COMPLIANCE TESTING43

Attachment 1: EUT Test Photographs

Attachment 2: EUT Detailed Photographs

1. GENERAL INFORMATION

1.1. EUT Description

Product Name : Bluetooth Keyboard
 Trade Name : BenQ
 FCC ID. : O62G912
 Model No. : G912
 Frequency Range : 2402 – 2480MHz
 EUT Voltage : Battery 3V
 Type of Modulation : FHSS
 Antenna Gain : 2.66dBi
 Antenna Type : Chip Antenna
 Channel Number : 79
 Channel Control : Auto

Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 00:	2402 MHz	Channel 20:	2422 MHz	Channel 40:	2442 MHz	Channel 60:	2462 MHz
Channel 01:	2403 MHz	Channel 21:	2423 MHz	Channel 41:	2443 MHz	Channel 61:	2463 MHz
Channel 02:	2404 MHz	Channel 22:	2424 MHz	Channel 42:	2444 MHz	Channel 62:	2464 MHz
Channel 03:	2405 MHz	Channel 23:	2425 MHz	Channel 43:	2445 MHz	Channel 63:	2465 MHz
Channel 04:	2406 MHz	Channel 24:	2426 MHz	Channel 44:	2446 MHz	Channel 64:	2466 MHz
Channel 05:	2407 MHz	Channel 25:	2427 MHz	Channel 45:	2447 MHz	Channel 65:	2467 MHz
Channel 06:	2408 MHz	Channel 26:	2428 MHz	Channel 46:	2448 MHz	Channel 66:	2468 MHz
Channel 07:	2409 MHz	Channel 27:	2429 MHz	Channel 47:	2449 MHz	Channel 67:	2469 MHz
Channel 08:	2410 MHz	Channel 28:	2430 MHz	Channel 48:	2450 MHz	Channel 68:	2470 MHz
Channel 09:	2411 MHz	Channel 29:	2431 MHz	Channel 49:	2451 MHz	Channel 69:	2471 MHz
Channel 10:	2412 MHz	Channel 30:	2432 MHz	Channel 50:	2452 MHz	Channel 70:	2472 MHz
Channel 11:	2413 MHz	Channel 31:	2433 MHz	Channel 51:	2453 MHz	Channel 71:	2473 MHz
Channel 12:	2414 MHz	Channel 32:	2434 MHz	Channel 52:	2454 MHz	Channel 72:	2474 MHz
Channel 13:	2415 MHz	Channel 33:	2435 MHz	Channel 53:	2455 MHz	Channel 73:	2475 MHz
Channel 14:	2416 MHz	Channel 34:	2436 MHz	Channel 54:	2456 MHz	Channel 74:	2476 MHz
Channel 15:	2417 MHz	Channel 35:	2437 MHz	Channel 55:	2457 MHz	Channel 75:	2477 MHz
Channel 16:	2418 MHz	Channel 36:	2438 MHz	Channel 56:	2458 MHz	Channel 76:	2478 MHz
Channel 17:	2419 MHz	Channel 37:	2439 MHz	Channel 57:	2459 MHz	Channel 77:	2479 MHz
Channel 18:	2420 MHz	Channel 38:	2440 MHz	Channel 58:	2460 MHz	Channel 78:	2480 MHz
Channel 19:	2421 MHz	Channel 39:	2441 MHz	Channel 59:	2461 MHz		

The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals

Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. The transmitter is presented with a continuous data stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its 79 channels and over the minimum number of hopping channels (75 channels).

The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

Note:

1. These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15 Subpart C Paragraph 15.247 for spread spectrum devices.
2. Regarding to the operation frequency, the lowest, middle, and highest frequency were selected to perform the test, then shown on this report.
3. This device is a composite device in accordance with Part 15 regulations. The function for the receiver was measured and made a test report that the report number is 068L136-RF-US-P01V02, certified under Declaration of Conformity.
4. Quietek verified among construction and function in typical operation, then shown in this test report.

1.2. Operational Description

The EUT is a Bluetooth Keyboard with a built-in 2.4GHz transceiver. The signals are modulated by frequency hopping spread spectrum. The number of channels is 79 in 2402 – 2480 MHz. This device provides wireless technology that revolutionizes personal connectivity. It is the solution for the seamless integration of Bluetooth technology into personal computer enabling short-range wireless connections between desktop/laptop computers, mobile phone or PDA, Bluetooth-enabled peripherals, portable handheld devices.

Test Mode	Mode 1: Transmitter
-----------	---------------------


1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	FCC ID	Power Cord
(1) Notebook PC	DELL	PPT	N/A	DoC	Non-Shielded, 0.8m

Signal Cable Type	Signal cable Description
A. RS 232 Cable	Shielded, 1.5m

1.4. Configuration of Tested System

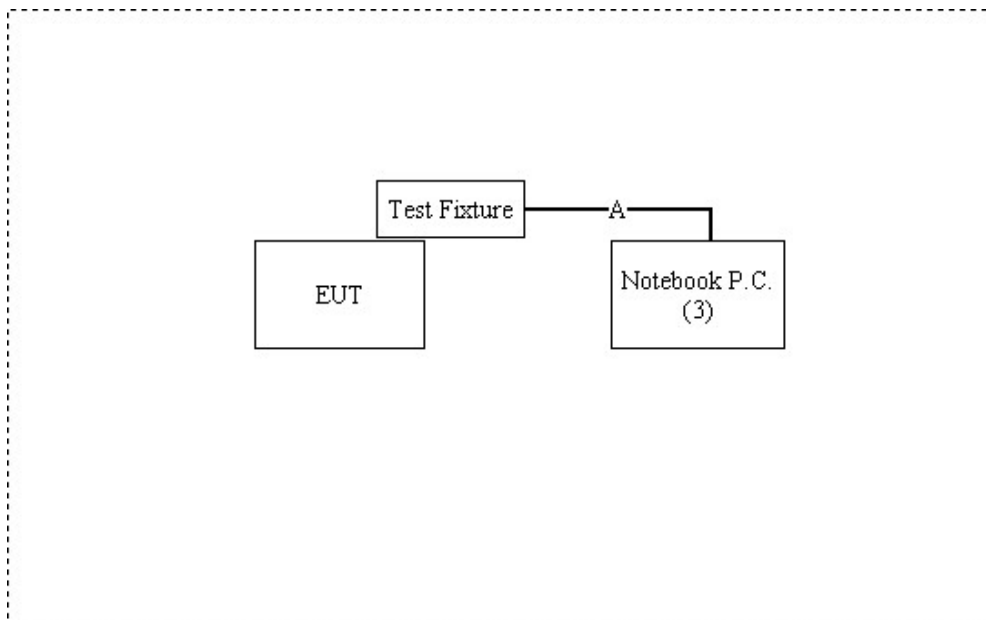

1.5. EUT Exercise Software

- (1) Setup the EUT as shown in section 1.4.
- (2) Execute the program “WDS commander” on the notebook.
- (3) Configure the test channel and the packet type.
- (4) Press OK to start the continuous transmission.
- (5) Verify the EUT works properly.

1.6. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	50-65
Barometric pressure (mbar)	860-1060	950-1000

Site Description: Federal Communications Commission
 FCC Engineering Laboratory
 7435 Oakland Mills Road
 Columbia, MD 21046
 Reference 31040/SIT1300F2



Accreditation on NVLAP
 NVLAP Lab Code: 200533-0



Site Name: Quietek Corporation

Site Address: No. 5-22, Ruei-Shu Valley, Ruei-Ping Tsuen,
 Lin-Kou Shiang, Taipei,
 Taiwan, R.O.C.
 TEL: 886-2-8601-3788 / FAX : 886-2-8601-3789
 E-Mail : service@quietek.com



2. Conducted Emission


2.1. Test Equipment

The following test equipment are used during the conducted emission test:

Item	Instrument	Manufacturer	Type No./Serial No	Last Cal.	Remark
1	Test Receiver	R & S	ESCS 30/825442/17	May, 2006	
2	L.I.S.N.	R & S	ESH3-Z5/825016/6	May, 2006	EUT
3	L.I.S.N.	Kyoritsu	KNW-407/8-1420-3	May, 2006	Peripherals
4	Pulse Limiter	R & S	ESH3-Z2	May, 2006	
5	No.1 Shielded Room			N/A	

Note: All equipments upon which need to calibrated are with calibration period of 1 year.

2.2. Test Setup

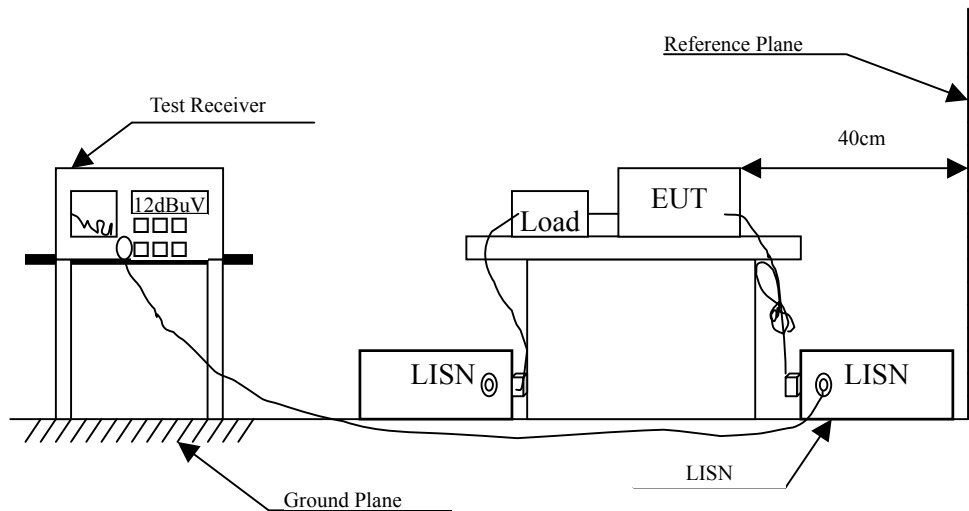

2.3. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dBuV) Limit		
Frequency MHz	Limits	
	QP	AV
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

Remarks: In the above table, the tighter limit applies at the band edges.

2.4. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2003 on conducted measurement.

Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

2.5. Uncertainty

± 2.26 dB

2.6. Test Result of Conducted Emission

The EUT is powered by batteries. This test item is not performed.

3. Peak Power Output


3.1. Test Equipment

The following test equipments are used during the radiated emission tests:

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X Spectrum Analyzer	Agilent	E4407B / US39440758	May, 2006

Note: 1. All equipment upon which need to calibrated are with calibration period of 1 year.
 2. The test instruments marked by “X” are used to measure the final test results.

3.2. Test Setup

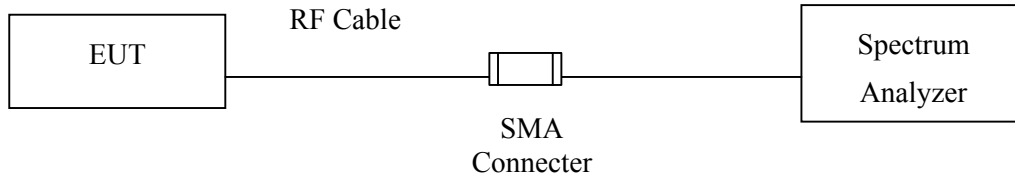

3.3. Limit

The maximum peak power shall be less 1Watt.




3.4. Uncertainty

± 1.27 dB

3.5. Test Result of Peak Power Output

Product : Bluetooth Keyboard
 Test Item : Peak Power Output
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter

Channel No.	Frequency (MHz)	Measurement	Required Limit	Result
Channel 00	2402.00	-0.78dBm	1 Watt= 30 dBm	Pass
Channel 39	2441.00	-1.34dBm	1 Watt= 30 dBm	Pass
Channel 78	2480.00	-1.84dBm	1 Watt= 30 dBm	Pass

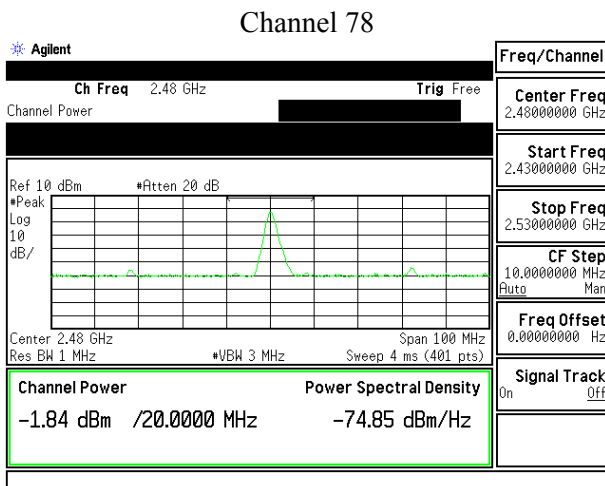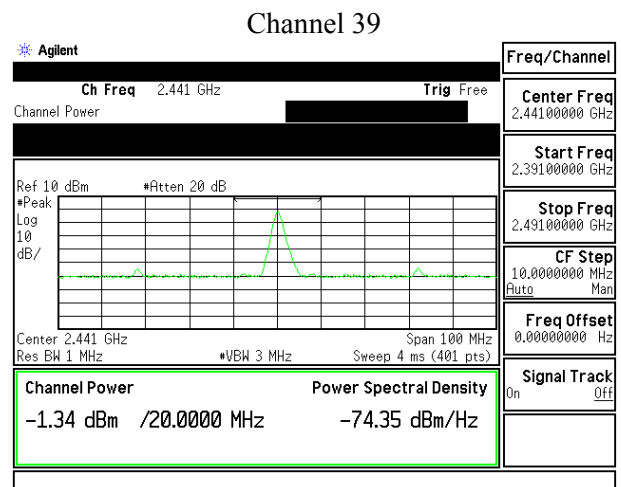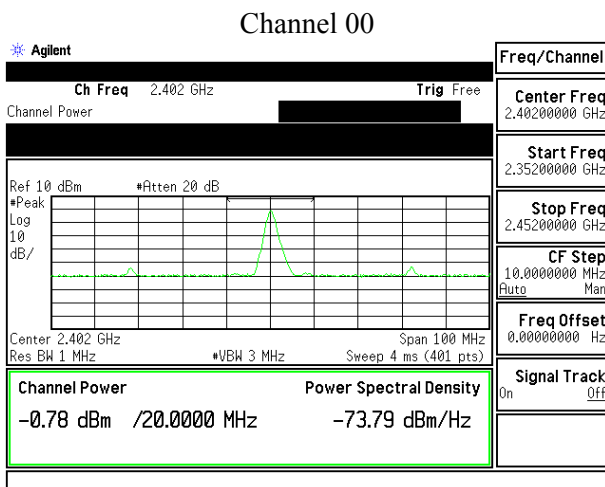

4. Radiated Emission


4.1. Test Equipment

The following test equipment are used during the radiated emission test:

Test Site	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
<input type="checkbox"/> Site # 1	Test Receiver	R & S	ESVS 10 / 834468/003	May, 2006
	Spectrum Analyzer	Advantest	R3162/ 00803480	May, 2006
	Pre-Amplifier	Advantest	BB525C/ 3307A01812	May, 2006
	Bilog Antenna	SCHAFFNER	CBL6112B / 2697	Sep., 2005
<input type="checkbox"/> Site # 2	Test Receiver	R & S	ESCS 30 / 836858 / 022	May, 2006
	Spectrum Analyzer	Advantest	R3162 / 100803466	May, 2006
	Pre-Amplifier	Advantest	BB525C/3307A01814	May, 2006
	Bilog Antenna	SCHAFFNER	CBL6112B / 2705	May, 2006
	Horn Antenna	ETS	3115 / 0005-6160	Sep., 2005
	Pre-Amplifier	QTK	QTK-AMP-01/ 0001	May, 2006
<input checked="" type="checkbox"/> Site # 3	Test Receiver	R & S	ESI 26 / 838786 / 004	May, 2006
	Spectrum Analyzer	Advantest	R3162 / 100803480	May, 2006
	Bilog Antenna	SCHAFFNER	CBL6112B / 2697	May, 2006
	Horn Antenna	ETS	3115 / 0005-6160	July, 2006
	Pre-Amplifier	QTK	QTK-AMP-01 / 0001	July, 2006
	Pre-Amplifier	QTK	QTK-AMP-03 / 0003	May, 2006

- Note:
1. All equipments that need to calibrate are with calibration period of 1 year.
 2. The test instruments marked by "X" are used to measure the final test results.

4.2. Test Setup

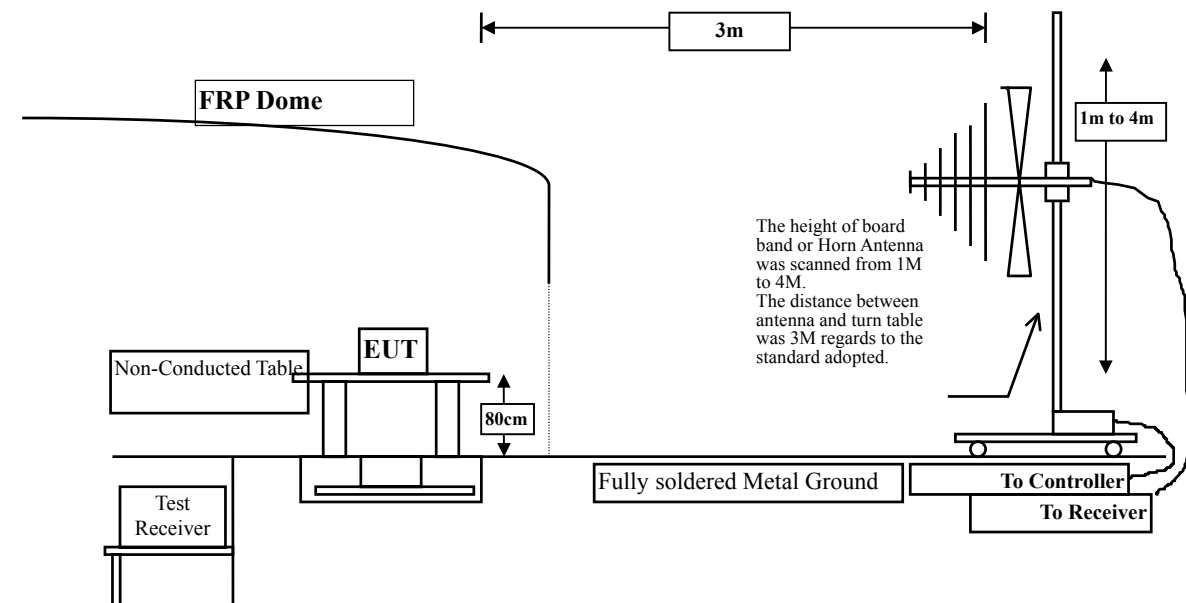

4.3. Limits

➤ General Radiated Emission Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	uV/m @3m	dBuV/m@3m
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

- Remarks:
1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
 2. In the Above Table, the tighter limit applies at the band edges.
 3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

4.4. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.4: 2003 on radiated measurement.

The additional latch filter below 1GHz was used to measure the level of harmonics radiated emission during field strength of harmonics measurement.

The bandwidth below 1GHz setting on the field strength meter is 120 kHz, above 1GHz are 1 MHz.

The frequency range from 30MHz to 10th harmonics is checked.

4.5. Uncertainty

± 3.9 dB above 1GHz

± 3.8 dB below 1GHz

4.6. Test Result of Radiated Emission

Product : Bluetooth Keyboard
 Test Item : Harmonic Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (2402MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
------------------	-------------------------	--------------------------	--------------------------------	--------------	-----------------

Horizontal

Peak Detector:

4804.125	3.055	44.166	47.220	-26.780	74.000
7206.125	8.534	38.272	46.805	-27.195	74.000
9608.125	10.883	37.120	48.003	-25.997	74.000

Average Detector:

--

Vertical

Peak Detector:

4804.125	3.055	45.294	48.348	-25.652	74.000
7206.125	8.534	38.120	46.653	-27.347	74.000
9608.125	10.883	36.952	47.835	-26.165	74.000

Average Detector:

--

Note:

1. The reading levels below 1GHz and above 1GHz are quasi-peak values and peak/average values, respectively.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz °
3. Receiver setting (AVG Detector) : RBW:1MHz; VBW:30Hz; Span:20MHz °
4. Emission Level = Reading Level + Correct Factor.
5. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Bluetooth Keyboard
 Test Item : Harmonic Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (2441MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level	dB	dBuV/m
	dB	dBuV	dBuV/m		

Horizontal

Peak Detector:

4882.000	3.291	43.228	46.519	-27.481	74.000
7323.000	8.822	37.325	46.146	-27.854	74.000
9764.000	10.966	37.400	48.366	-25.634	74.000

Average Detector:

--

Vertical

Peak Detector:

4882.000	3.291	45.020	48.311	-25.689	74.000
7323.000	8.822	37.527	46.348	-27.652	74.000
9764.000	10.966	37.666	48.632	-25.368	74.000

Average Detector:

--

Note:

1. The reading levels below 1GHz and above 1GHz are quasi-peak values and peak/average values, respectively.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz °
3. Receiver setting (AVG Detector) : RBW:1MHz; VBW:30Hz; Span:20MHz °
4. Emission Level = Reading Level + Correct Factor.
5. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Bluetooth Keyboard
 Test Item : Harmonic Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (2480MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
------------------	-------------------------	--------------------------	--------------------------------	--------------	-----------------

Horizontal

Peak Detector:

4960.000	3.544	42.269	45.812	-28.188	74.000
7440.000	9.106	37.767	46.872	-27.128	74.000
9920.000	11.057	37.378	48.435	-25.565	74.000

Average Detector:

--

Vertical

Peak Detector:

4960.000	3.544	44.117	47.660	-26.340	74.000
7440.000	9.106	37.880	46.985	-27.015	74.000
9920.000	11.057	37.467	48.524	-25.476	74.000

Average Detector:

--

Note:

1. The reading levels below 1GHz and above 1GHz are quasi-peak values and peak/average values, respectively.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz ◦
3. Receiver setting (AVG Detector) : RBW:1MHz; VBW:30Hz; Span:20MHz ◦
4. Emission Level = Reading Level + Correct Factor.
5. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Bluetooth Keyboard
 Test Item : General Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (2442MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
199.750	9.716	13.676	23.392	-20.108	43.500
299.175	14.130	10.593	24.723	-21.277	46.000
464.075	18.667	8.270	26.937	-19.063	46.000
544.100	19.945	8.617	28.562	-17.438	46.000
662.925	20.718	6.454	27.172	-18.828	46.000
801.150	21.771	7.496	29.267	-16.733	46.000
Vertical					
376.775	16.582	6.382	22.964	-23.036	46.000
488.325	18.566	5.290	23.856	-22.144	46.000
544.100	20.532	6.998	27.530	-18.470	46.000
624.125	21.210	3.035	24.245	-21.755	46.000
769.625	22.679	4.693	27.372	-18.628	46.000
825.400	21.409	7.498	28.907	-17.093	46.000

Note:

1. The reading levels below 1GHz are quasi-peak values.
2. “█” means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The radiated emissions below 1GHz of the lowest, middle, highest frequency are pretested. Only the worst case is shown on the report.

5. Band Edge

5.1. Test Equipment

The following test equipments are used during the band edge tests:


Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X Test Receiver	R & S	ESI 26 / 838786 / 004	May, 2006
X Spectrum Analyzer	Advantest	R3162 / 100803480	May, 2006
X Bilog Antenna	SCHAFFNER	CBL6112B / 2697	May, 2006
X Horn Antenna	ETS	3115 / 0005-6160	July, 2006
X Pre-Amplifier	QTK	QTK-AMP-01 / 0001	July, 2006
X Pre-Amplifier	QTK	QTK-AMP-03 / 0003	May, 2006

Test Site Site #3


- Note:
1. All equipments that need to calibrate are with calibration period of 1 year.
 2. The test instruments marked by “X” are used to measure the final test results.

5.2. Test Setup

RF Conducted Measurement:

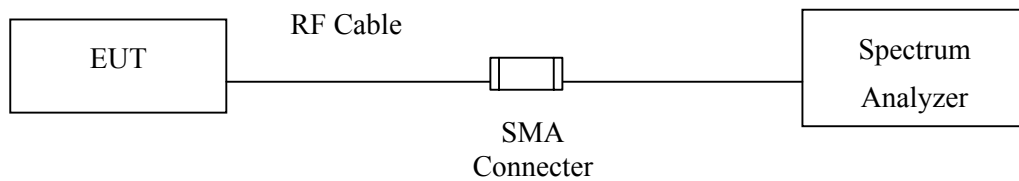

RF Radiated Measurement:

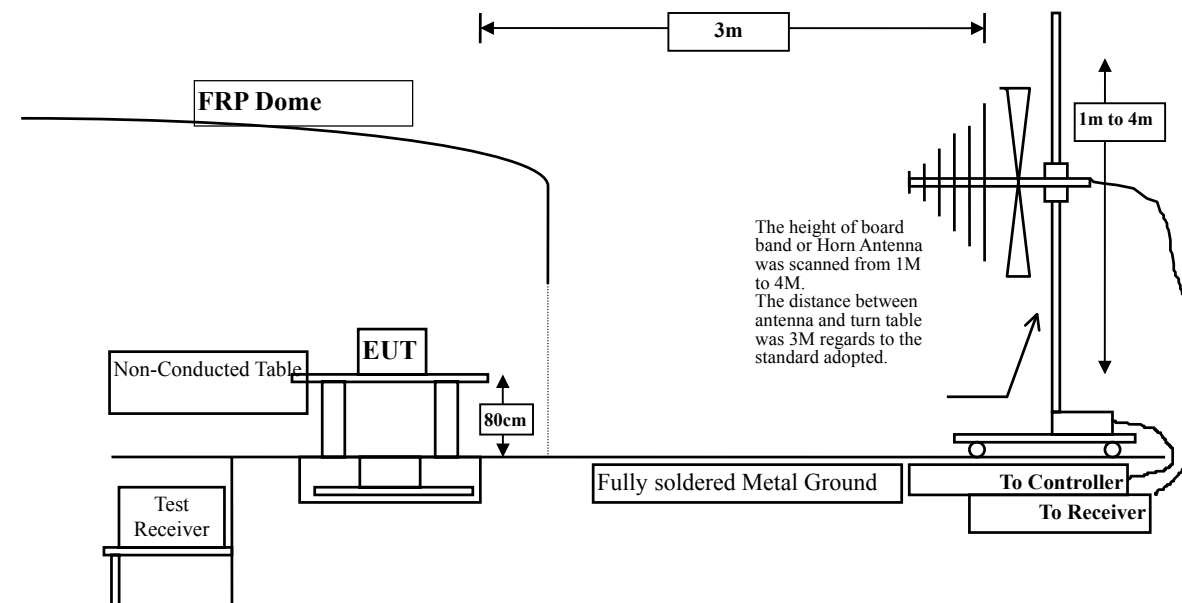

5.3. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

5.4. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.4:2003 on radiated measurement.

The bandwidth below 1GHz setting on the field strength meter is 120 kHz, above 1GHz are 1 MHz.

5.5. Uncertainty

± 3.9 dB above 1GHz

± 3.8 dB below 1GHz

5.6. Test Result of Band Edge

Product : Bluetooth Keyboard
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (2402MHz)


RF Radiated Measurement:

Channel No.	Frequency (MHz)	Required Limit (dBc)	Result
00	<2400	>20	Pass

RF Radiated Measurement: (Horizontal)

Channel	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
00 (Peak)	2388.500	-2.262	47.952	45.690	74.00	54.00	Pass
00 (Avg)	--	--	--	--	74.00	54.00	Pass

Figure Channel 00: Horizontal (Peak)

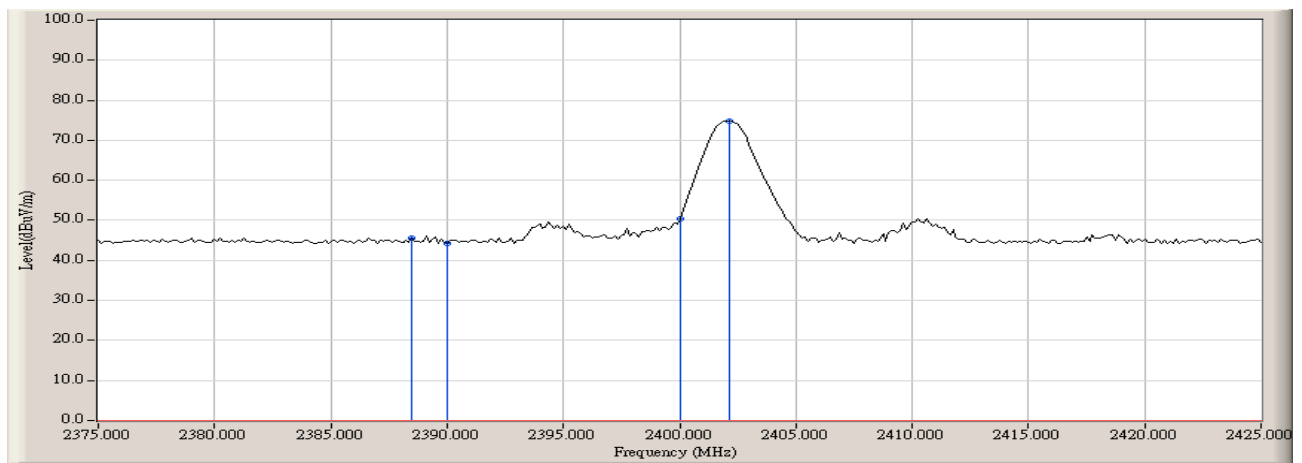

Note:

RBW=1MHz, VBW=1MHz, Sweep Time=500ms.

Product : Bluetooth Keyboard
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (2402MHz)


RF Radiated Measurement:

Channel No.	Frequency (MHz)	Required Limit (dBc)	Result
00	<2400	>20	Pass

RF Radiated Measurement: (Vertical)

Channel	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
00 (Peak)	2387.500	-2.265	48.333	46.068	74.00	54.00	Pass
00 (Avg)	--	--	--	--	74.00	54.00	Pass

Figure Channel 00: Vertical (Peak)

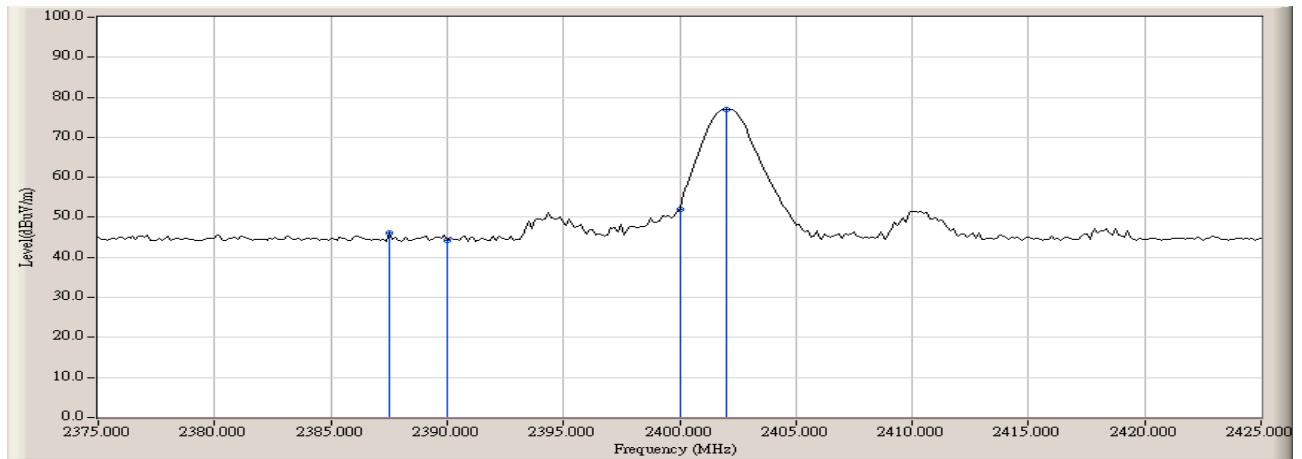

Note:

RBW=1MHz, VBW=1MHz, Sweep Time=500ms.

Product : Bluetooth Keyboard
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (2480MHz)

RF Radiated Measurement:


Channel No.	Frequency (MHz)	Required Limit (dBc)	Result
78	>2483.5	>20	Pass

RF Radiated Measurement: (Horizontal)

Channel	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
00 (Peak)	2488.500	-1.878	57.084	55.206	74.00	54.00	Pass
00 (Avg)	2488.500	-1.878	38.103	36.225	74.00	54.00	Pass

Figure Channel 78:

Horizontal (Peak)

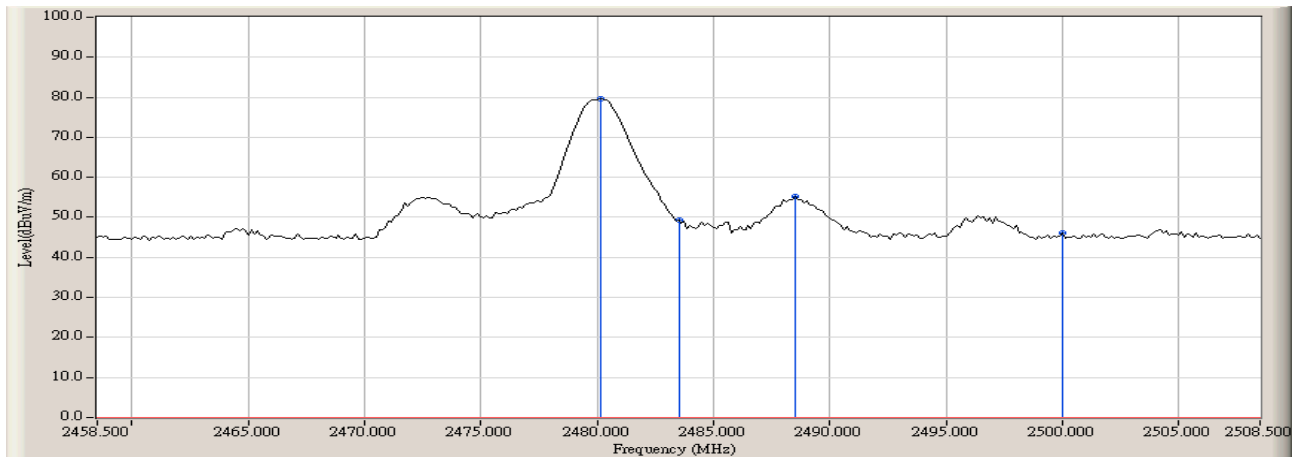


Note:

RBW=1MHz, VBW=1MHz, Sweep Time=500ms.

Figure Channel 78:

Horizontal (Average)

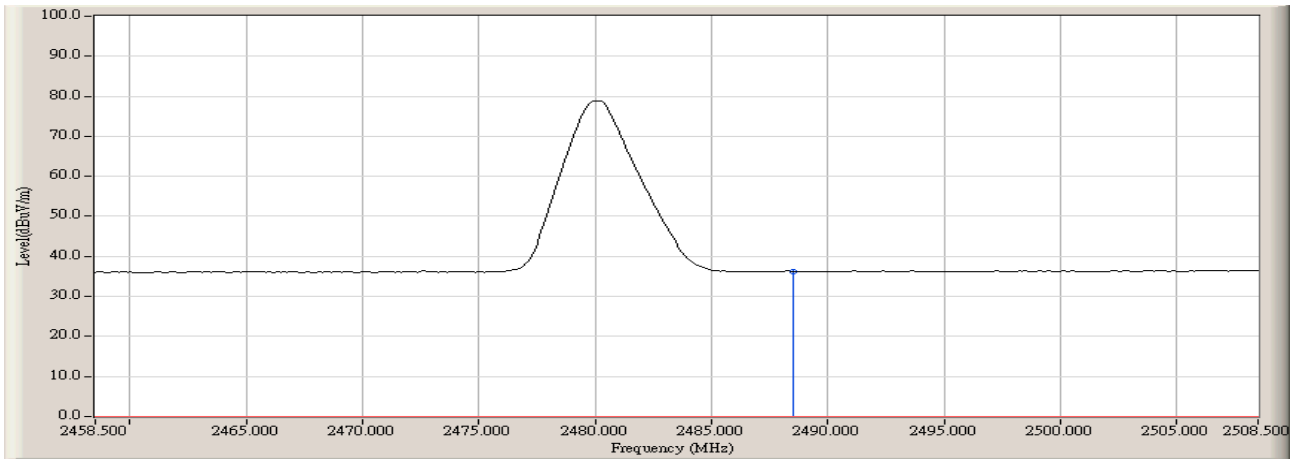

Note:

1. RBW=1MHz, VBW=3kHz, Sweep Time=500ms.
2. VBW justification: Ton (on time of the pulse) = 400us, $VBW \geq 1/Ton = 2.5kHz$

Product : Bluetooth Keyboard
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (2480MHz)


RF Radiated Measurement:

Channel No.	Frequency (MHz)	Required Limit (dBc)	Result
78	>2483.5	>20	Pass

RF Radiated Measurement: (Horizontal)

Channel	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
00 (Peak)	2488.375	-1.879	56.435	54.556	74.00	54.00	Pass
00 (Avg)	2488.375	-1.879	38.055	36.176	74.00	54.00	Pass

Figure Channel 78: Vertical (Peak)

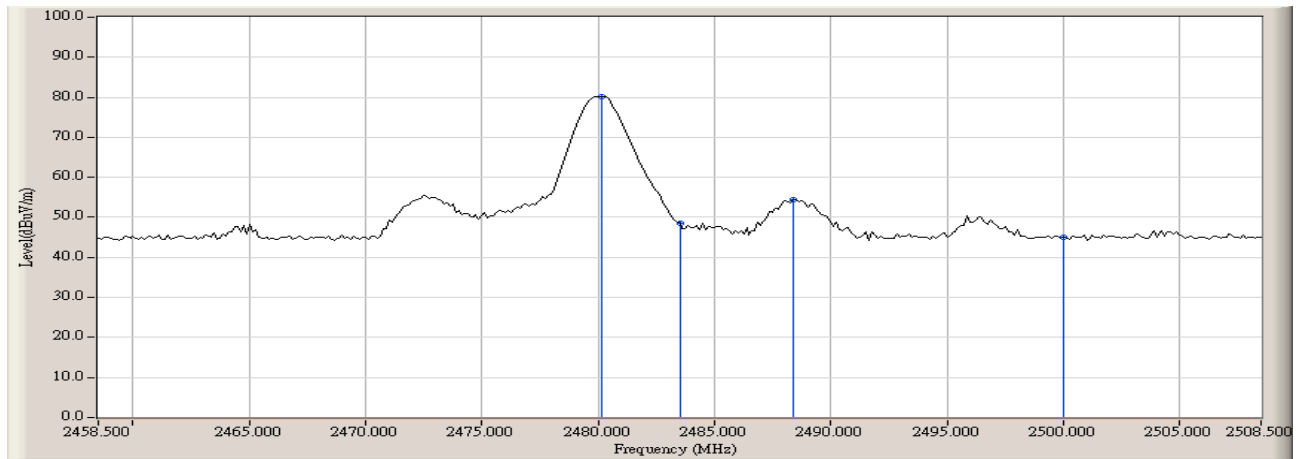


Note:

RBW=1MHz, VBW=1MHz, Sweep Time=500ms.

Figure Channel 78:

Vertical (Average)

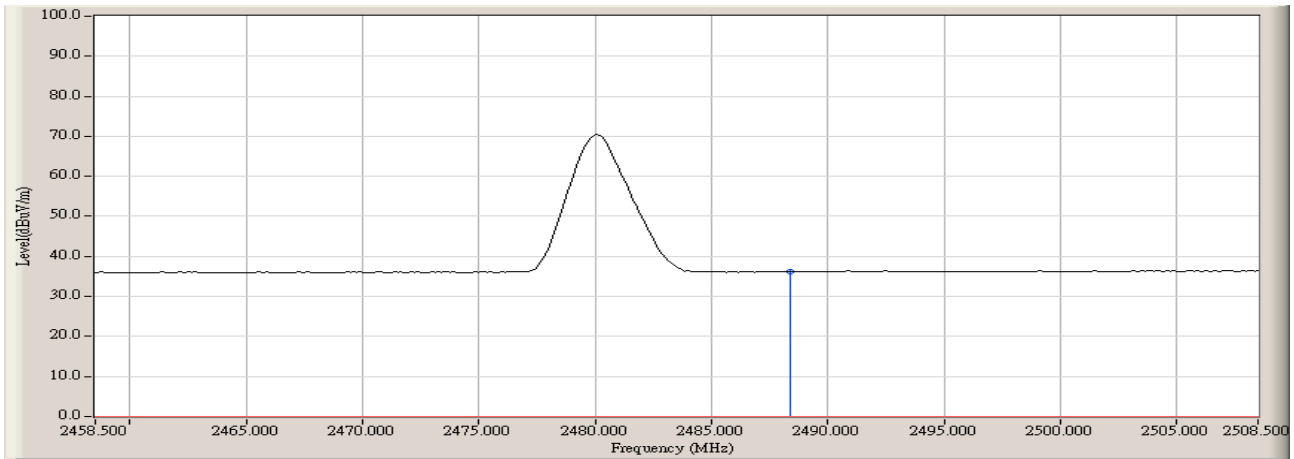

Note:

1. RBW=1MHz, VBW=3kHz, Sweep Time=500ms.
2. VBW justification: Ton (on time of the pulse) = 400us, $VBW \geq 1/Ton = 2.5kHz$

6. Channel Number


6.1. Test Equipment

The following test equipments are used during the radiated emission tests:

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X	Spectrum Analyzer	Agilent	E4407B / US39440758	May, 2006

Note: 1. All equipment upon which need to calibrated are with calibration period of 1 year.
 2. The test instruments marked by “X” are used to measure the final test results.

6.2. Test Setup

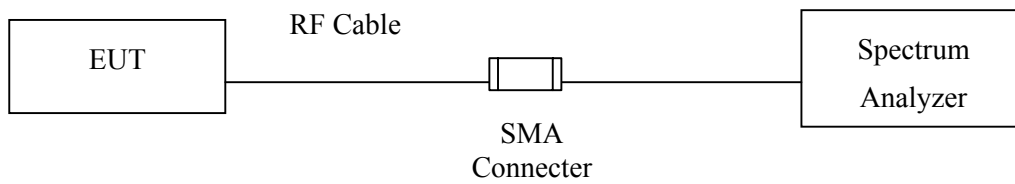

6.3. Limit

Frequency hopping systems operating in the 2400-2483.5 MHz bands shall use at least 75 hopping frequencies.





6.4. Uncertainty

N/A

6.5. Test Result of Channel Number

Product : Bluetooth Keyboard
 Test Item : Channel Number
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter

Frequency Range (MHz)	Measurement (Hopping Channel)	Required Limit (Hopping Channel)	Result
2402 ~ 2480	79	>75	Pass

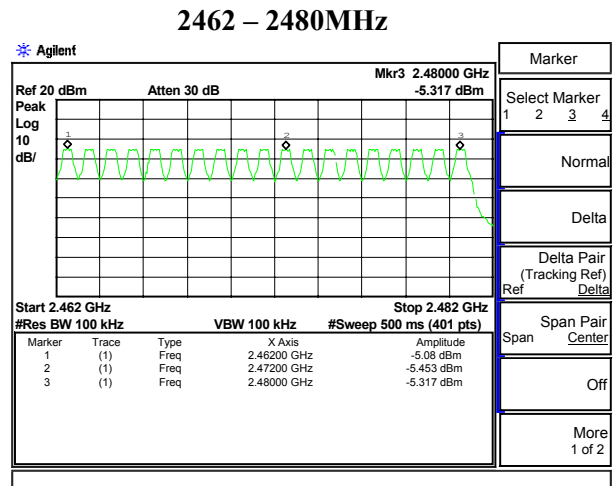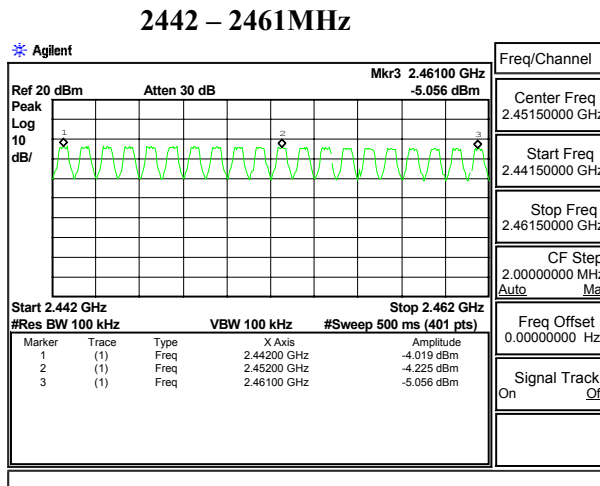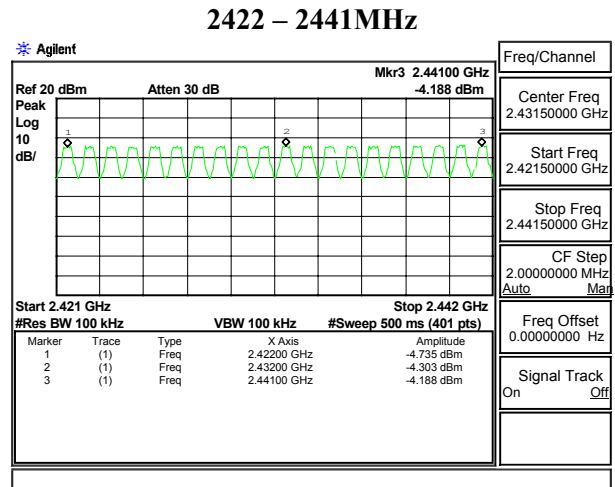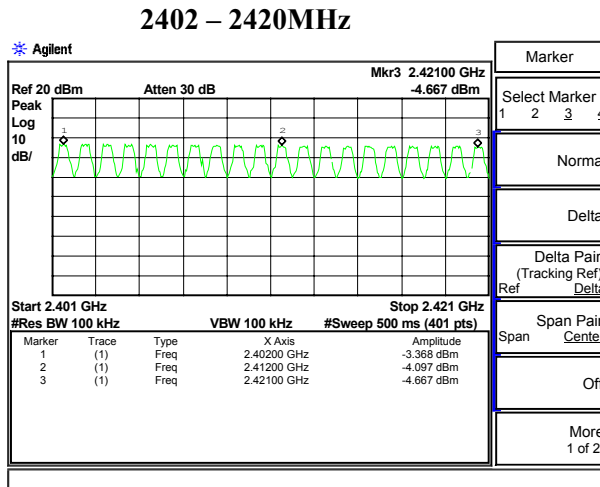

7. Channel Separation


7.1. Test Equipment

The following test equipments are used during the radiated emission tests:

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X	Spectrum Analyzer	Agilent	E4407B / US39440758	May, 2006

Note: 1. All equipment upon which need to calibrated are with calibration period of 1 year.
 2. The test instruments marked by “X” are used to measure the final test results.

7.2. Test Setup

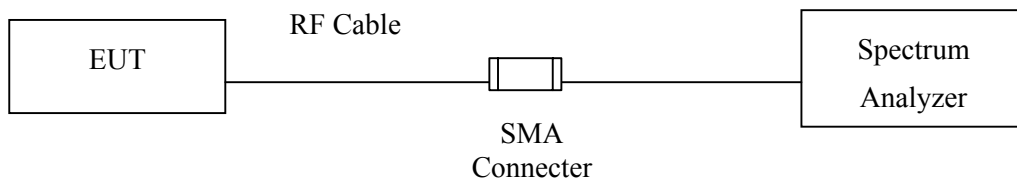

7.3. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

7.4. Uncertainty


± 150Hz

7.5. Test Result of Channel Separation


Product : Bluetooth Keyboard
 Test Item : Channel Separation
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter

Frequency (MHz)	Measurement Level (MHz)	Required Limit (kHz)	Result
2402	1.00	>25 or 2/3*2dB Bandwidth	Pass
2441	1.00	>25 or 2/3*2dB Bandwidth	Pass
2480	1.00	>25 or 2/3*2dB Bandwidth	Pass


Channel 00 2402MHz

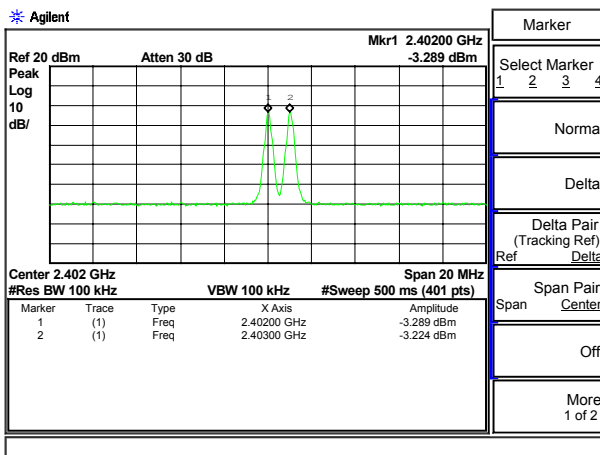

Channel 39 2441MHz

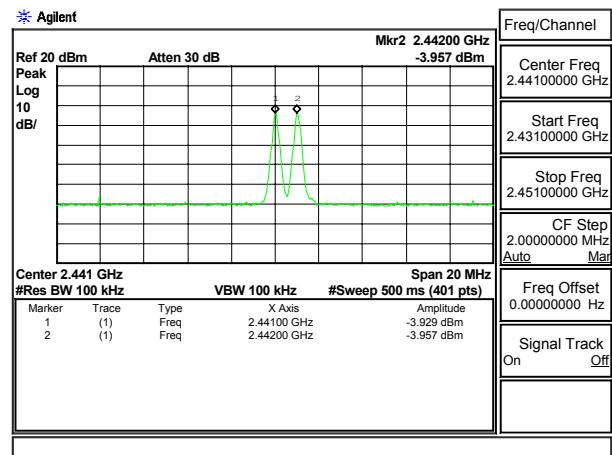

Channel 78 2480 MHz

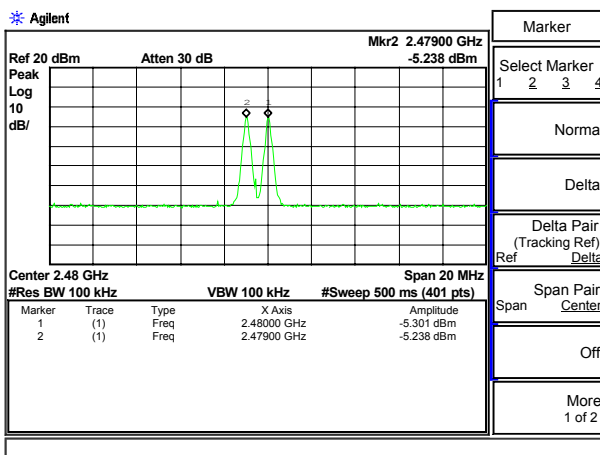

8. Dwell Time


8.1. Test Equipment

The following test equipments are used during the radiated emission tests:

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X	Spectrum Analyzer	Agilent	E4407B / US39440758	May, 2006

Note: 1. All equipment upon which need to calibrated are with calibration period of 1 year.
 2. The test instruments marked by “X” are used to measure the final test results.

8.2. Test Setup

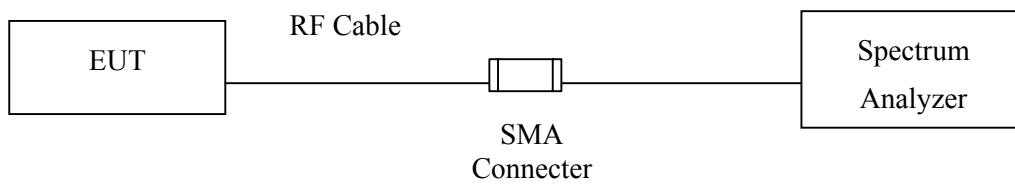

8.3. Limit

The dwell time shall be the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.





8.4. Uncertainty

± 25msec

8.5. Test Result of Dwell Time

Product : Bluetooth Keyboard
 Test Item : Dwell Time
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (Channel 00,39,78-DH1)

Channel (MHz)	Measurement Level (ms)	Required Limit (sec)	Result
CH 00 2402	128	< 0.4	Pass
CH 39 2441	128	< 0.4	Pass
CH 78 2480	128	< 0.4	Pass

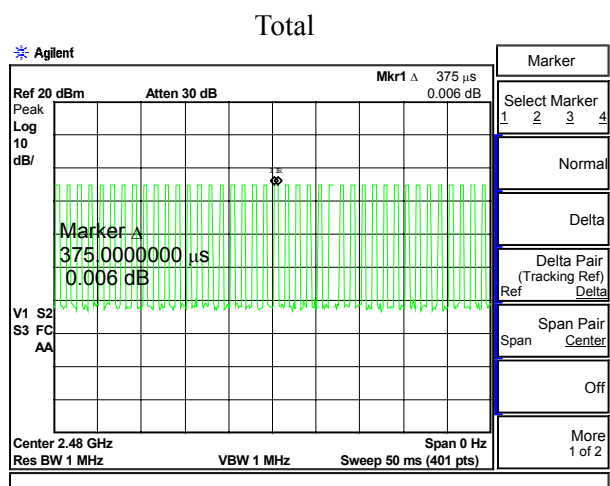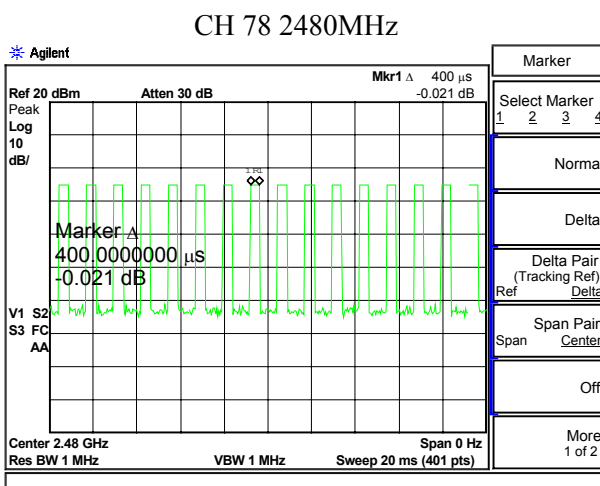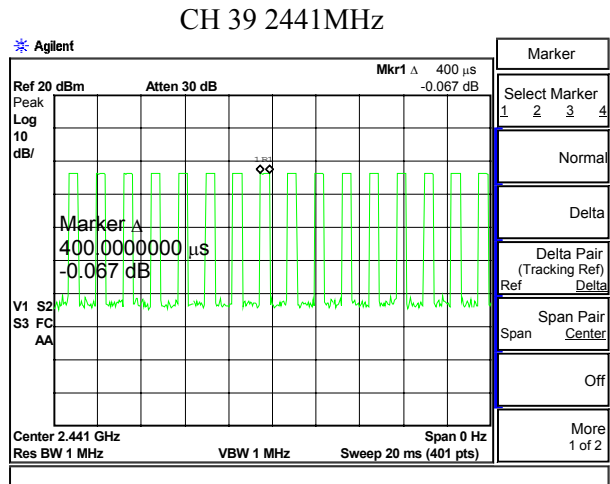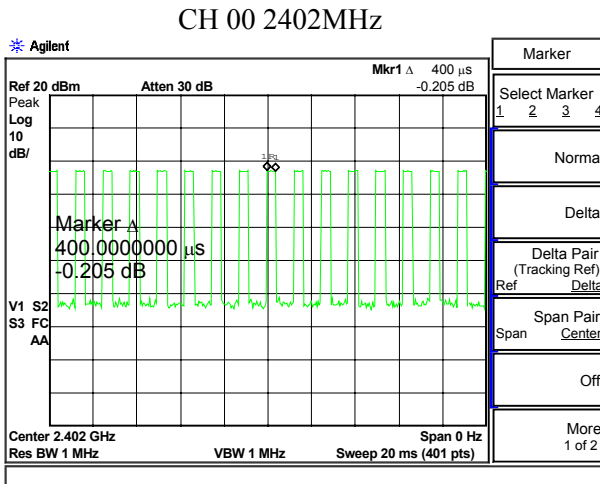

Note: Dwell time = time slot length * hop rate / number of hopping channels * period

Occupancy Time of Frequency Hopping System

Test Time Period: $0.4 \times 79 = 31.6 \text{sec}$, Hopping Times Within 1sec: $40 / 50 \text{ms} = 0.8 \text{ hops/ms}$

A) 2402MHz The Maximum Occupancy Time Within 31.6sec: $400 \mu \text{s} \times 800 / 79 \times 31.6 = 128 \text{ msec}$ ◦

B) 2441MHz The Maximum Occupancy Time Within 31.6sec: $400 \mu \text{s} \times 800 / 79 \times 31.6 = 128 \text{ msec}$ ◦

C) 2480MHz The Maximum Occupancy Time Within 31.6sec: $400 \mu \text{s} \times 800 / 79 \times 31.6 = 128 \text{ msec}$ ◦

Test Result: The Average Occupancy Time of Each Highest , Middle and Lowest Channel Is Less Than 0.4sec , And Corresponds to The Standard ◦

PS: (1) From Bluetooth Specification , It Hops 1600 Times in 1sec ◦ The Average Occupancy Time of Each 79 Channels is $1600/79$ Times , Therefore , We Calculate The Maximum Occupancy Time (worse cars) As Below:

A) 2402Mhz The Occupancy Time of Each Pulse is 0.4msec , The Maximum Occupancy Time within 31.6sec is $0.4 \text{msec} \times 1640/79 \times 31.6 = 289.056 \text{msec}$





B) 2441MHz The Occupancy Time of Each Pulse is 0.4msec , The Maximum Occupancy Time within 31.6sec is $0.4 \text{msec} \times 1640/79 \times 31.6 = 289.056 \text{msec}$

C) 2480MHz The Occupancy Time of Each Pulse is 0.4msec , The Maximum Occupancy Time within 31.6sec is $0.4 \text{msec} \times 1640/79 \times 31.6 = 289.056 \text{msec}$

Test Result: The Maximum Occupancy Time of Each Highest , Middle and Lowest Channel Is Less Than 0.4sec , And Corresponds to The Standard ◦

Product : Bluetooth Keyboard
 Test Item : Dwell Time
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (Channel 00,39,78-DH3)

Channel (MHz)	Measurement Level (ms)	Required Limit (sec)	Result
CH 00 2402	256	< 0.4	Pass
CH 39 2441	256	< 0.4	Pass
CH 78 2480	264	< 0.4	Pass

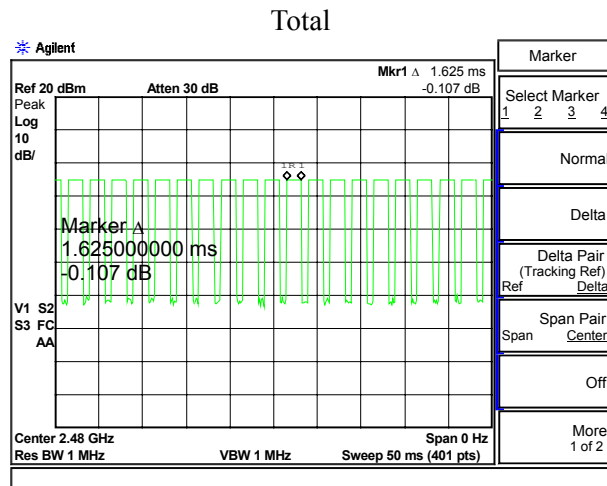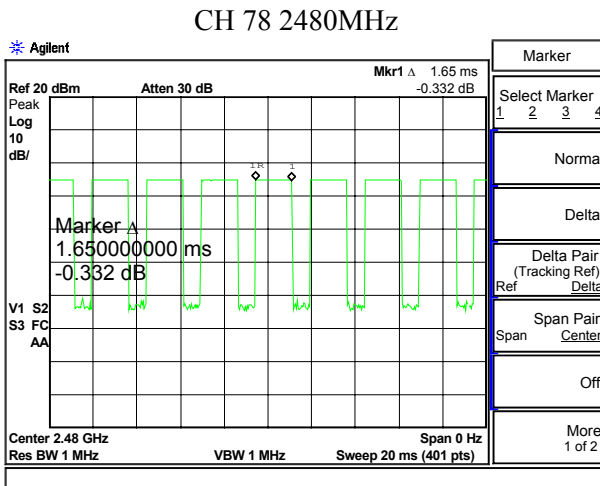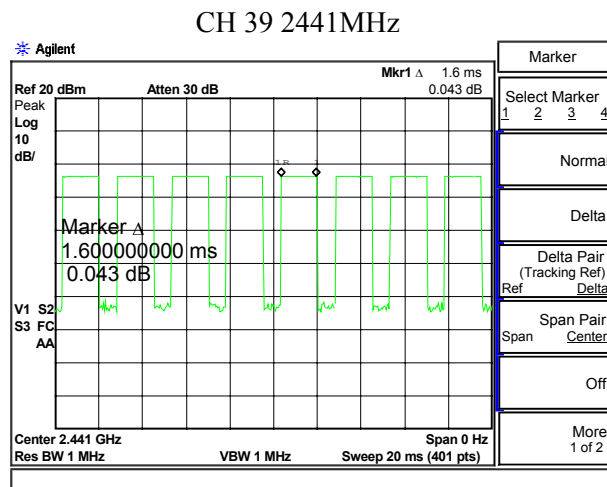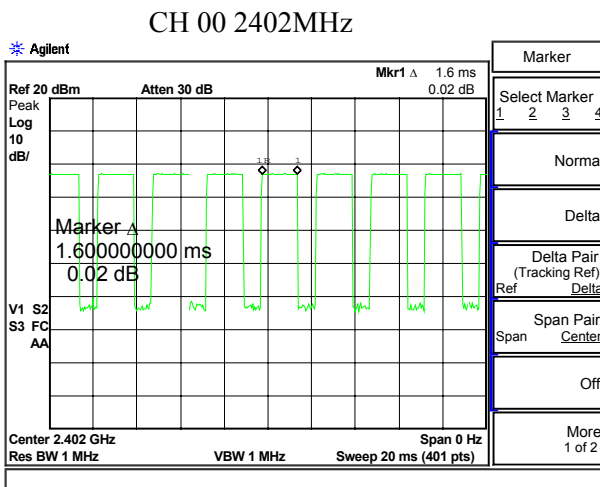

Note: Dwell time = time slot length * hop rate / number of hopping channels * period

Occupancy Time of Frequency Hopping System

Test Time Period: $0.4 \times 79 = 31.6\text{sec}$, Hopping Times Within 1sec: $20 / 50\text{ms} = 0.4 \text{ hops/ms}$

A) 2402MHz The Maximum Occupancy Time Within 31.6sec: $1600 \mu\text{s} \times 400 / 79 \times 31.6 = 256 \text{ msec}$ ◦

B) 2441MHz The Maximum Occupancy Time Within 31.6sec: $1600 \mu\text{s} \times 400 / 79 \times 31.6 = 256 \text{ msec}$ ◦

C) 2480MHz The Maximum Occupancy Time Within 31.6sec: $1650 \mu\text{s} \times 400 / 79 \times 31.6 = 264 \text{ msec}$ ◦

Test Result: The Average Occupancy Time of Each Highest , Middle and Lowest Channel Is Less Than 0.4sec , And Corresponds to The Standard ◦

PS: (1) From Bluetooth Specification , It Hops 1600 Times in 1sec ◦ The Average Occupancy Time of Each 79 Channels is $1600/79$ Times , Therefore , We Calculate The Maximum Occupancy Time (worse cars)As Below:

A) 2402Mhz The Occupancy Time of Each Pulse is 0.4msec , The Maximum Occupancy Time within 31.6sec is $0.4\text{msec} \times 1640/79 \times 31.6 = 289.056\text{msec}$





B) 2441MHz The Occupancy Time of Each Pulse is 0.4msec , The Maximum Occupancy Time within 31.6sec is $0.4\text{msec} \times 1640/79 \times 31.6 = 289.056\text{msec}$

C) 2480MHz The Occupancy Time of Each Pulse is 0.4msec , The Maximum Occupancy Time within 31.6sec is $0.4\text{msec} \times 1640/79 \times 31.6 = 289.056\text{msec}$

Test Result: The Maximum Occupancy Time of Each Highest , Middle and Lowest Channel Is Less Than 0.4sec , And Corresponds to The Standard ◦

Product : Bluetooth Keyboard
 Test Item : Dwell Time
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (Channel 00,39,78-DH5)

Channel (MHz)	Measurement Level (ms)	Required Limit (sec)	Result
CH 00 2402	301.6	< 0.4	Pass
CH 39 2441	301.6	< 0.4	Pass
CH 78 2480	301.6	< 0.4	Pass

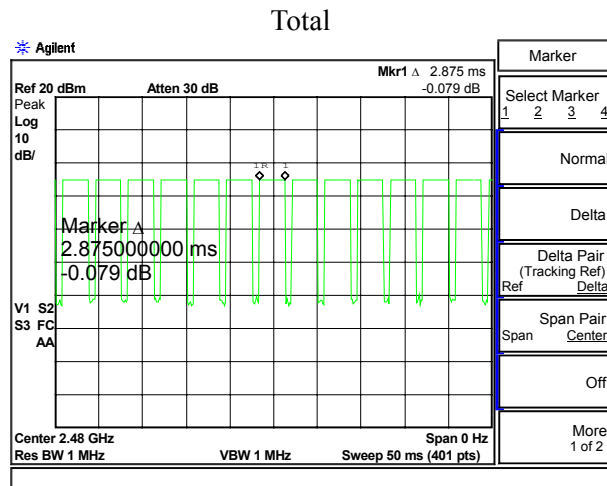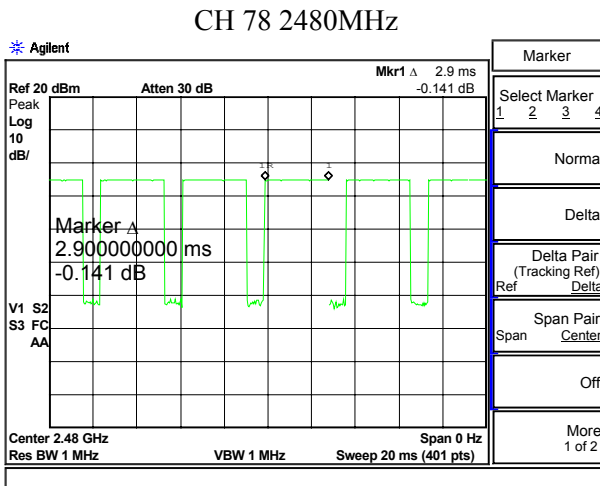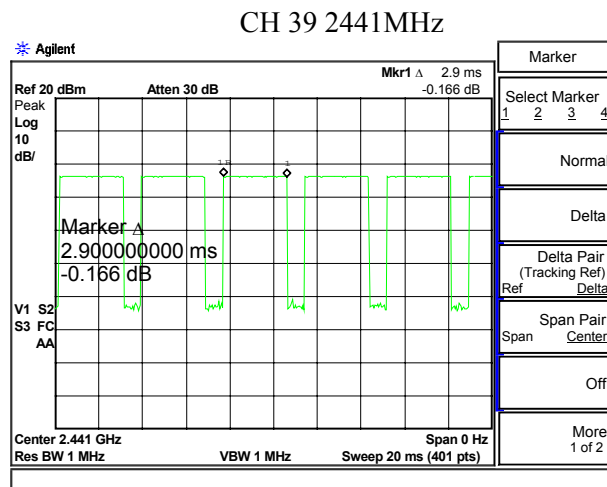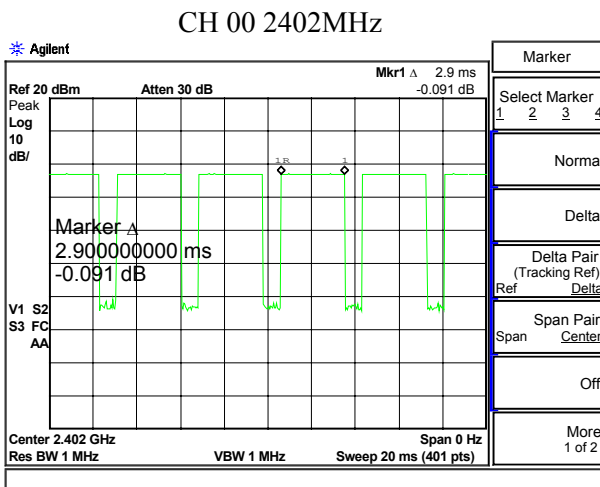

Note: Dwell time = time slot length * hop rate / number of hopping channels * period

Occupancy Time of Frequency Hopping System

Test Time Period: $0.4 \times 79 = 31.6 \text{sec}$, Hopping Times Within 1sec: $13 / 50 \text{ms} = 0.26 \text{ hops/ms}$

A) 2402MHz The Maximum Occupancy Time Within 31.6sec: $2900 \mu \text{s} \times 260 / 79 \times 31.6 = 301.6 \text{ msec}$ ◦

B) 2441MHz The Maximum Occupancy Time Within 31.6sec: $2900 \mu \text{s} \times 260 / 79 \times 31.6 = 301.6 \text{ msec}$ ◦

C) 2480MHz The Maximum Occupancy Time Within 31.6sec: $2900 \mu \text{s} \times 260 / 79 \times 31.6 = 301.6 \text{ msec}$ ◦

Test Result: The Average Occupancy Time of Each Highest , Middle and Lowest Channel Is Less Than 0.4sec , And Corresponds to The Standard ◦

PS: (1) From Bluetooth Specification , It Hops 1600 Times in 1sec ◦ The Average Occupancy Time of Each 79 Channels is $1600 / 79$ Times , Therefore , We Calculate The Maximum Occupancy Time (worse cars) As Below:

A) 2402Mhz The Occupancy Time of Each Pulse is 0.4msec , The Maximum Occupancy Time within 31.6sec is $0.4 \text{msec} \times 1640 / 79 \times 31.6 = 289.056 \text{msec}$

B) 2441MHz The Occupancy Time of Each Pulse is 0.4msec , The Maximum Occupancy Time within 31.6sec is $0.4 \text{msec} \times 1640 / 79 \times 31.6 = 289.056 \text{msec}$

C) 2480MHz The Occupancy Time of Each Pulse is 0.4msec , The Maximum Occupancy Time within 31.6sec is $0.4 \text{msec} \times 1640 / 79 \times 31.6 = 289.056 \text{msec}$

Test Result: The Maximum Occupancy Time of Each Highest , Middle and Lowest Channel Is Less Than 0.4sec , And Corresponds to The Standard ◦


9. Occupied Bandwidth

9.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X	Spectrum Analyzer	Agilent	E4407B / US39440758	May, 2006

Note: 1. All equipments are calibrated every one year.
 2. The test instruments marked bu “X” are used to measure the final test results.

9.2. Test Setup

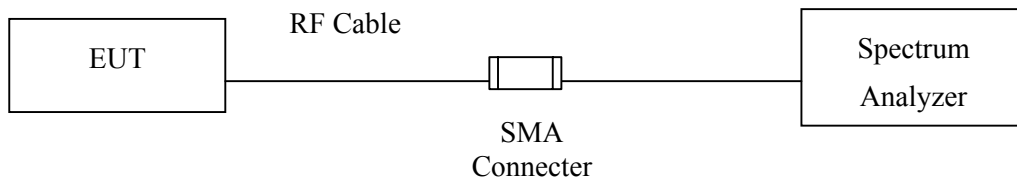

9.3. Limits

N/A

9.4. Uncertainty


± 150Hz

9.5. Test Result of Occupied Bandwidth

Product : Bluetooth Keyboard
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (2402MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
00	2402	1150	--	N/A


Figure Channel 00:

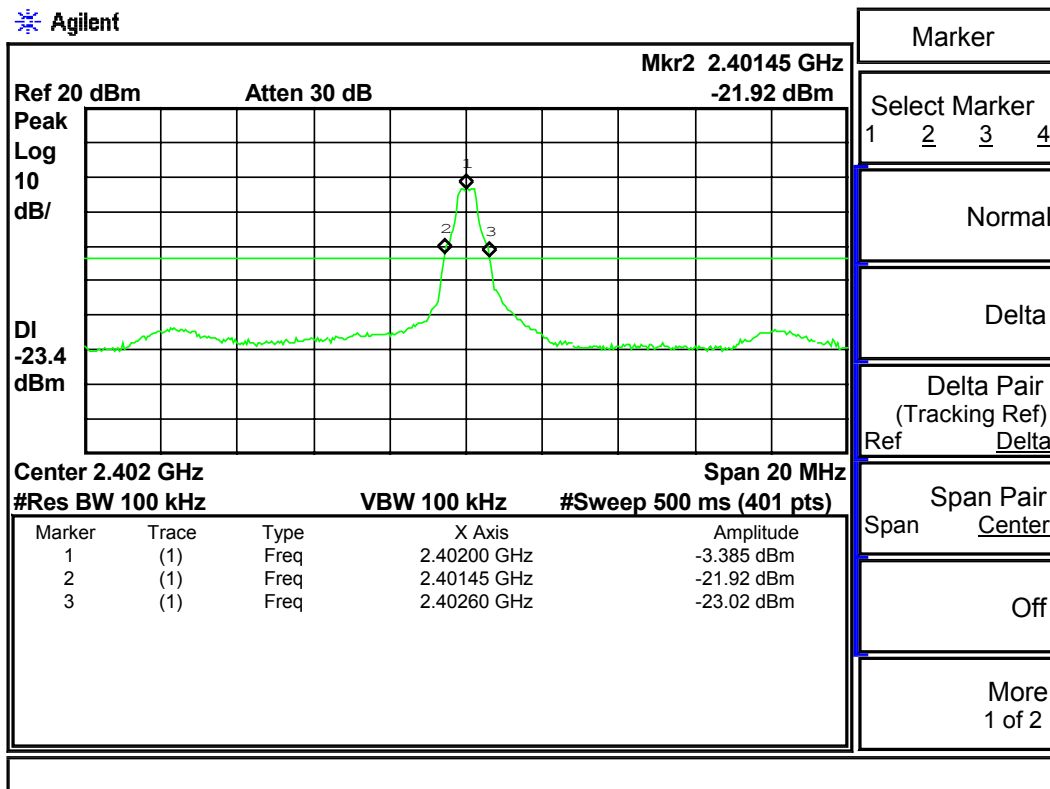

Product : Bluetooth Keyboard
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (2441MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
39	2441	1150	--	N/A


Figure Channel 39:

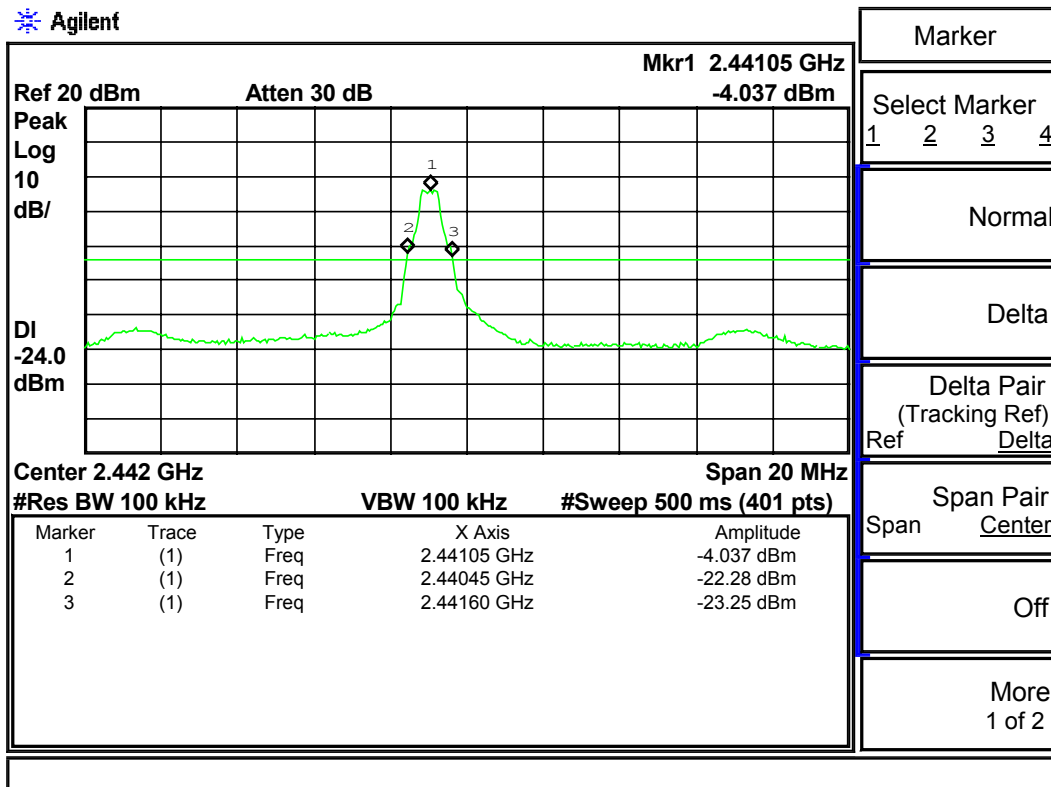

Product : Bluetooth Keyboard
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (2480MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
78	2480	1150	--	N/A

Figure Channel 78:

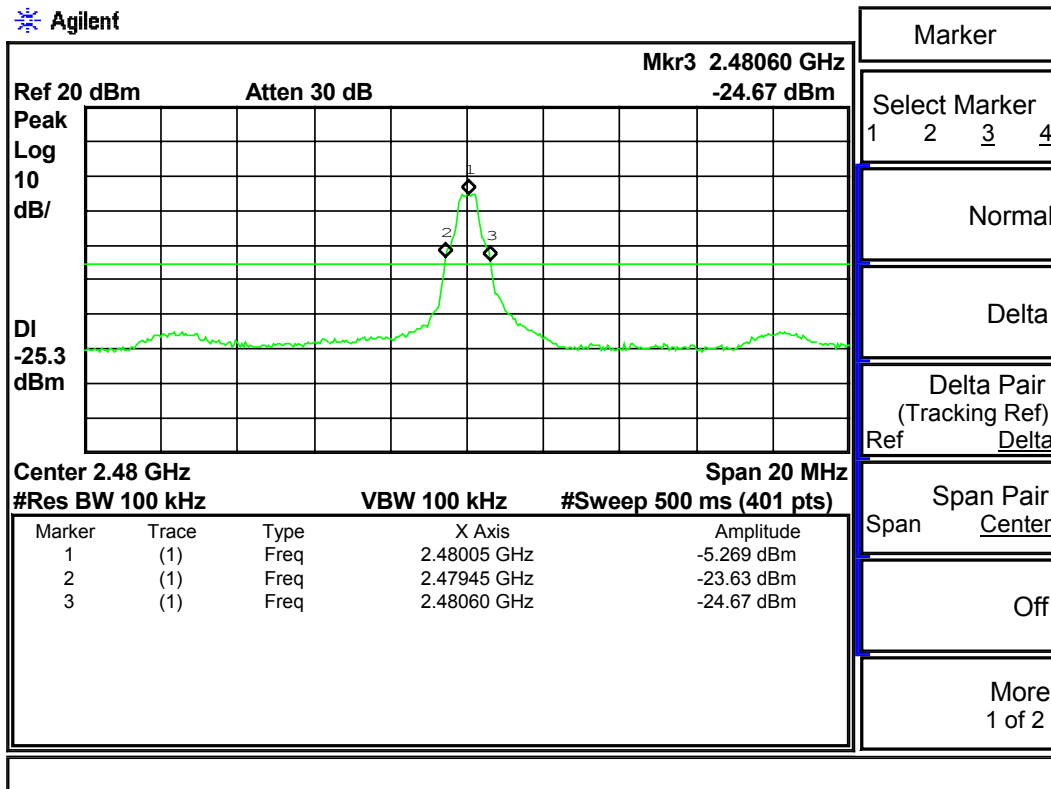

10. EMI Reduction Method During Compliance Testing

No modification was made during testing.