



## Test Report

Product Name : 27MHz Mouse

Model No. : N338, P600 Wireless Ultra Portable Optical Mouse

FCC ID. : O62N338

Applicant : Darfon Electronics Corp.

Address : 6, Feng-Shu Tsuen, Gueishan, Taoyuan 333,  
Taiwan, R.O.C.

Date of Receipt : June 23, 2006

Issued Date : July 19, 2006

Report No. : 066L176-RF-US-P03V01

The Test Results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of Quietek Corporation.

This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

# Test Report Certification

Test Date : July 19, 2006

Report No.: 066L176-RF-US-P03V01



Accredited by NIST (NVLAP)

NVLAP Lab Code: 200533-0


Product Name : 27MHz Mouse  
Applicant : Darfon Electronics Corp.  
Address : 6, Feng-Shu Tsuen, Gueishan, Taoyuan 333, Taiwan, R.O.C.  
Manufacturer : Darfon Eletronics (Suzhou) Co., Ltd.  
Model No. : N338, P600 Wireless Ultra Portable Optical Mouse  
FCC ID. : O62N338  
Rated Voltage : AC 120V/ 60Hz  
Working Voltage : Battery 1.5V\*2  
Trade Name : BenQ  
Measurement Standard : FCC CFR Title 47 Part 15 Subpart C: 2005  
Measurement Procedure : ANSI C63.4: 2003  
Test Result : Complied

The Test Results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of Quietek Corporation.

This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

Documented By :



( Rita Huang )



NVLAP Lab Code: 200533-0

Tested By :



( Tim Sung )

Approved By :



( George Chen )

## TABLE OF CONTENTS

Description	Page
<b>1. GENERAL INFORMATION.....</b>	<b>4</b>
1.1. EUT Description.....	4
1.2. Operation Description .....	5
1.3. Test System Details .....	6
1.4. Configuration of Test System.....	6
1.5. EUT Exercise Software .....	6
1.6. Test Facility .....	7
<b>2. Conducted Emission.....</b>	<b>8</b>
2.1. Test Equipment.....	8
2.2. Test Setup .....	8
2.3. Limits .....	8
2.4. Test Procedure .....	9
2.5. Uncertainty .....	9
2.6. Test Data of Conducted Emission .....	10
<b>3. Radiated Emission.....</b>	<b>11</b>
3.1. Test Equipment.....	11
3.2. Test Setup .....	11
3.3. Limits .....	12
3.4. Test Procedure .....	13
3.5. Uncertainty .....	13
3.6. Test Data of Radiated Emission .....	14
<b>4. Band Edge .....</b>	<b>18</b>
4.1. Test Equipment.....	18
4.2. Test Setup .....	18
4.3. Limit .....	19
4.4. Test Procedure .....	19
4.5. Test Result of Band Edge .....	20
<b>5. EMI Reduction Method During Compliance Testing .....</b>	<b>21</b>
Attachment 1: EUT Test Photographs	
Attachment 2: EUT Detailed Photographs	

# 1. GENERAL INFORMATION

## 1.1. EUT Description

Product Name : 27MHz Mouse  
 Trade Name : BenQ  
 FCC ID. : O62N338  
 Model No. : N338, P600 Wireless Ultra Portable Optical Mouse  
 Working Voltage : Battery 1.5V\*2  
 Frequency Range : 27.045MHz  
 Type of Modulation : FSK  
 Type of antenna : Loop Antenna  
 Number of Channel : 1  
 Channel Control : N/A

Frequency of Each Channel:

Channel	Frequency
1	27.045 MHz

Note:

1. The EUT has two models for different marketing requirement.
2. The EUT is a 27MHz Mouse.
3. These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with FCC CFR Title 47 Part 15 Subpart C: 2005 Paragraph 15.227.

Pre-Test Mode	
EMI	Mode 1: Transmit
Final Test Mode	
EMI	Mode 1: Transmit

## 1.2. Operation Description

The EUT is a 27MHz Mouse used in household and office PC system.

The device adapts FSK modulation. The loop antenna provides diversity function to improve the transmitting function.


### 1.3. Test System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

	Product	Manufacturer	Model No.	Serial No.	FCC ID	Power Cord
(1)	N/A	N/A	N/A	N/A	N/A	N/A

	Signal Cable Type	Signal cable Description
A.	N/A	N/A

### 1.4. Configuration of Test System

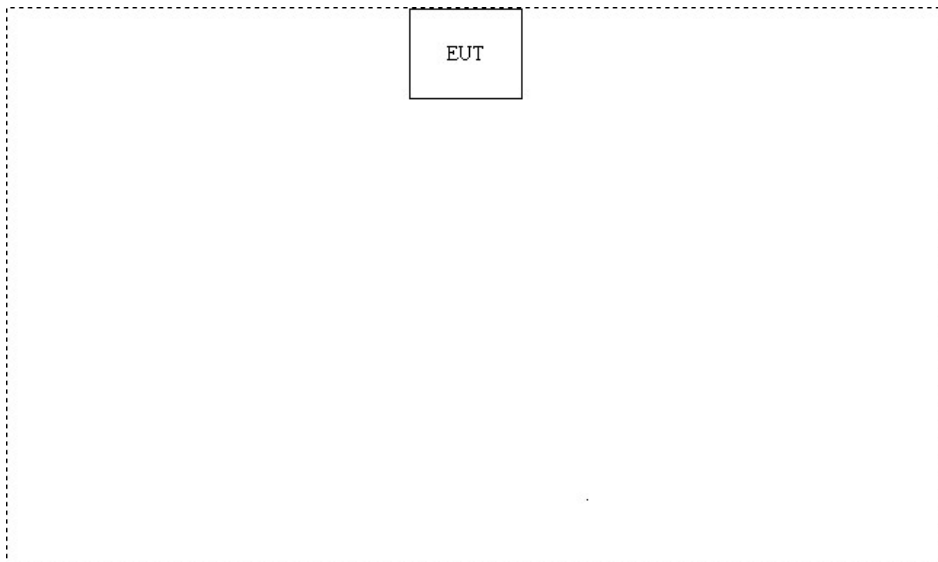

### 1.5. EUT Exercise Software

- (1) Setup the EUT as shown in section 1.4.
- (2) Press and hold the left and the middle button.
- (3) Install the batteries.
- (4) Check that the cursor moves circularly on the notebook.
- (5) Remove the notebook and start the tests.

**1.6. Test Facility**

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	50-65
Barometric pressure (mbar)	860-1060	950-1000

Site Description: Federal Communications Commission  
 FCC Engineering Laboratory  
 7435 Oakland Mills Road  
 Columbia, MD 21046  
 Reference 31040/SIT1300F2



Accreditation on NVLAP  
 NVLAP Lab Code: 200533-0



Site Name: Quietek Corporation

Site Address: No. 5-22, Ruei-Shu Valley, Ruei-Ping Tsuen,  
 Lin-Kou Shiang, Taipei,  
 Taiwan, R.O.C.  
 TEL: 886-2-8601-3788 / FAX : 886-2-8601-3789  
 E-Mail : [service@quietek.com](mailto:service@quietek.com)



## 2. Conducted Emission


### 2.1. Test Equipment

The following test equipment are used during the conducted emission test:

Item	Instrument	Manufacturer	Type No./Serial No	Last Cal.	Remark
1	Test Receiver	R & S	ESCS 30/838251/001	May, 2006	
2	L.I.S.N.	R & S	ESH3-Z5/836679/0023	May, 2006	EUT
3	L.I.S.N.	R & S	ENV 4200/833209/0023	May, 2006	Peripherals
4	Pulse Limiter	R & S	ESH3-Z2	May, 2006	
6	No.1 Shielded Room				

Note: All equipments are calibrated every one year.

### 2.2. Test Setup

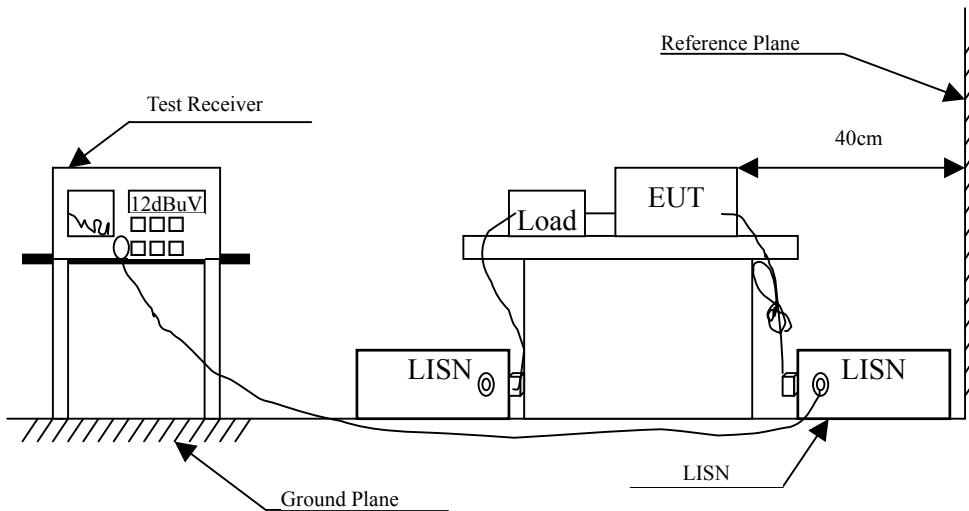

### 2.3. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dBuV) Limit		
Frequency MHz	Limits	
	QP	AV
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

Remarks : In the above table, the tighter limit applies at the band edges.



## 2.4. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2003 on conducted measurement.

Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

## 2.5. Uncertainty

$\pm 2.26$  dB

## 2.6. Test Data of Conducted Emission

The EUT is powered by batteries. This test item is not performed

### 3. Radiated Emission


#### 3.1. Test Equipment

The following test equipment are used during the radiated emission test:

Test Site	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
<input type="checkbox"/> Site # 1	Test Receiver	R & S	ESVS 10 / 834468/003	July, 2006
	Spectrum Analyzer	Advantest	R3162/ 00803480	May, 2006
	Pre-Amplifier	Advantest	BB525C/ 3307A01812	May, 2006
	Bilog Antenna	SCHAFFNER	CBL6112B / 2697	Nov., 2005
<input type="checkbox"/> Site # 2	Test Receiver	R & S	ESCS 30 / 836858 / 022	Nov., 2005
	Spectrum Analyzer	Advantest	R3162 / 100803466	May, 2006
	Pre-Amplifier	Advantest	BB525C/3307A01814	May, 2006
	Bilog Antenna	SCHAFFNER	CBL6112B / 2705	Oct., 2005
<input checked="" type="checkbox"/> Site # 3	Test Receiver	R & S	ESI 26 / 838786 / 004	May, 2006
	Spectrum Analyzer	Advantest	R3162 / 100803480	May, 2006
	Pre-Amplifier	QTK	QTK-AMP-03 / 0003	May, 2006
	Horn Antenna	ETS	3115 / 0005-6160	July, 2006
	Pre-Amplifier	QTK	QTK-AMP-01 / 0001	July, 2006
	Broadband Antenna	Schwarzbeck	VULB9166/1085	April, 2005
	Loop Antenna	R&S	HFH2-Z2/833799/004	July, 2006

- Note:
1. All equipments are calibrated every one year.
  2. Test instruments marked "X" are used to measure the final test results.

#### 3.2. Test Setup

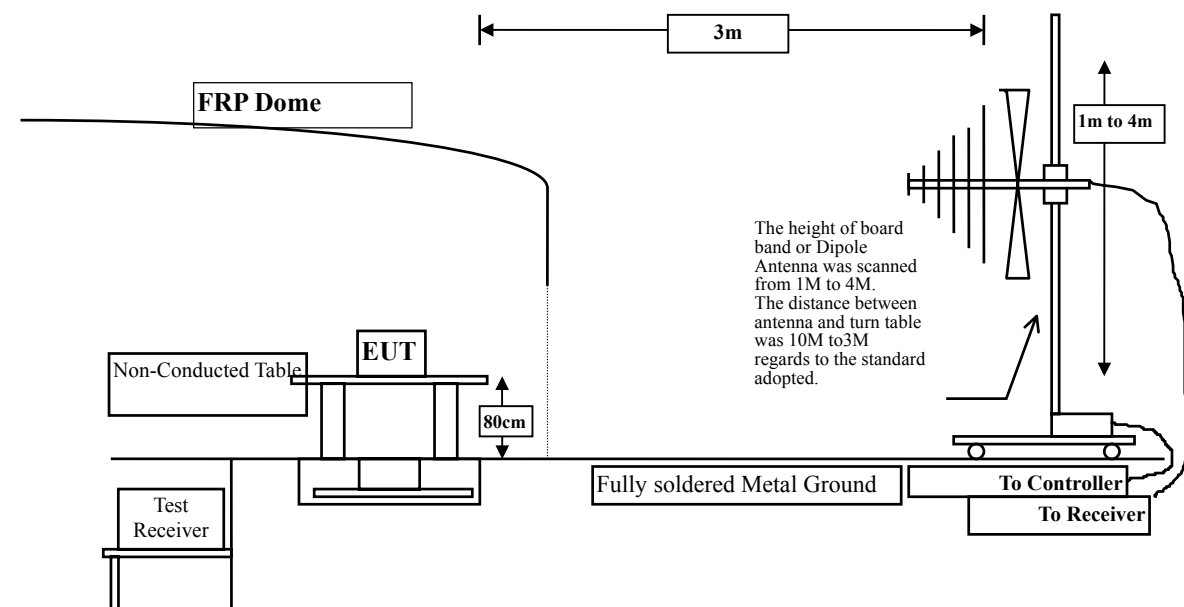

**3.3. Limits**

➤ FCC Part 15 Subpart C Paragraph 15.227 Limit

<b>FCC Part 15 Subpart C Paragraph 15.227 Limits</b>		
Fundamental Frequency MHz	Field strength of fundamental	
	uV/m	dBuV/m
26.96-27.28	10000	80.0

Remarks :

1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
3. The emission limit in this paragraph is based on measurement instrumentation employing an average detector. Measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.

➤ Frequencies in restricted band are complied to limits on Paragraph 15.209.

<b>FCC Part 15 Subpart C Paragraph 15.209 Limits</b>		
Frequency MHz	uV/m @3m	dBuV/m@3m
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

- Remarks :
1. RF Voltage (dBuV/m) = 20 log RF Voltage (uV/m)
  2. In the Above Table, the tighter limit applies at the band edges.
  3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

### 3.4. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.4: 2003 on radiated measurement.

Radiated emissions were investigated over the frequency range from 30MHz to 1GHz using a receiver bandwidth of 120kHz. Radiated was performed at an antenna to EUT distance of 3 meters.

The frequency range from 30MHz to 10th harmonics is checked.

### 3.5. Uncertainty



$\pm 3.19$  dB

### 3.6. Test Data of Radiated Emission

Product : 27MHz Mouse  
 Test Item : Fundamental Radiated Emission  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit

Polarity	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)
<b>Peak Detector</b>							
X	27.045	0.270	40.670	40.940	-59.060	100.000	80.000
Y	27.045	0.270	43.190	43.460	-56.540	100.000	80.000
Z	27.045	0.270	46.410	46.680	-53.320	100.000	80.000

#### Polarity X

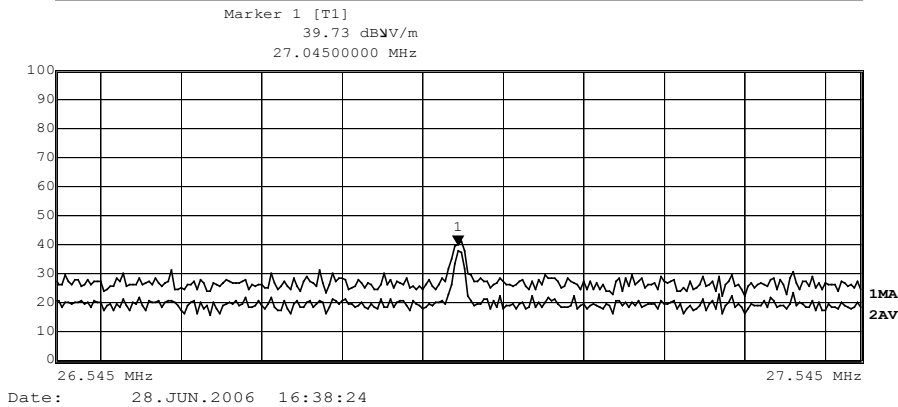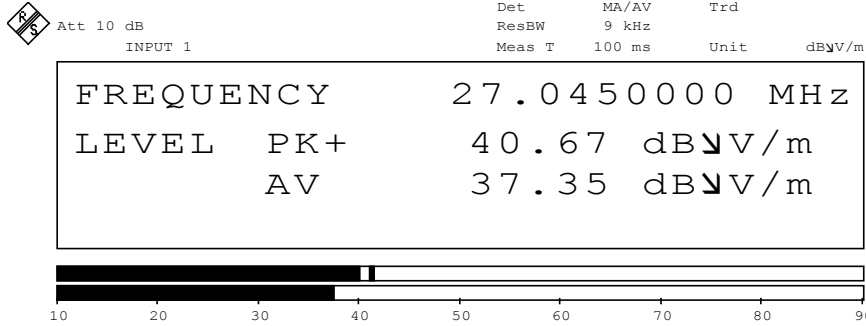


Polarity Y




Att 10 dB  
INPUT 1

Det MA/AV Trd  
ResBW 9 kHz  
Meas T 100 ms Unit dBV/m

FREQUENCY	27.0450000	MHz
LEVEL PK+	43.19	dBV/m
AV	40.49	dBV/m



Marker 1 [T1]  
42.36 dBV/m  
27.0450000 MHz

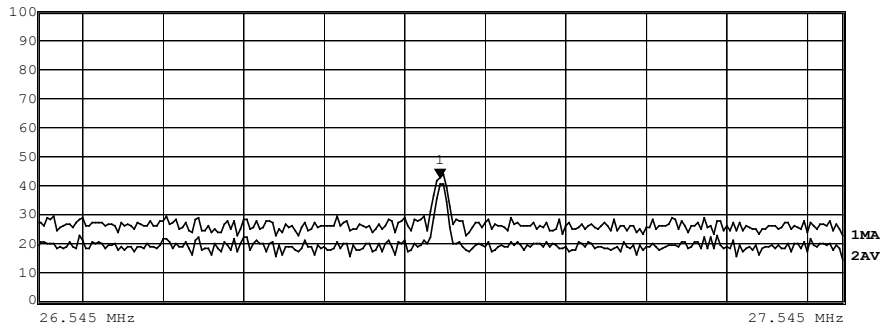

Date: 28.JUN.2006 16:37:14


Polarity Z




Att 10 dB  
INPUT 1

Det MA/AV Trd  
ResBW 9 kHz  
Meas T 100 ms Unit dBV/m

FREQUENCY	27.0450000	MHz
LEVEL PK+	46.41	dBV/m
AV	44.14	dBV/m



Marker 1 [T1]  
45.70 dBV/m  
27.0450000 MHz

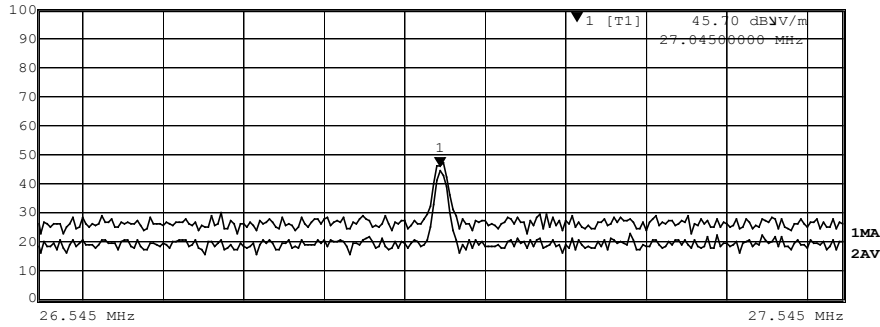

Date: 28.JUN.2006 17:12:25

Product : 27MHz Mouse  
 Test Item : General Radiated Emission  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level	dB	dBuV/m
	dB	dBuV	dBuV/m		
<b>Horizontal</b>					
377.956	15.788	16.715	32.502	-13.498	46.000
473.206	18.689	15.598	34.287	-11.713	46.000
521.804	18.603	15.766	34.369	-11.631	46.000
615.110	20.868	10.594	31.462	-14.538	46.000
828.938	21.892	10.813	32.705	-13.295	46.000
881.423	22.178	13.331	35.509	-10.491	46.000

Note:

1. Reading levels below 1GHz and above 1GHz are quasi-peak values and peak/average values, respectively.
2. "█" means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor



Product : 27MHz Mouse  
 Test Item : General Radiated Emission  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
<b>Vertical</b>					
377.956	16.648	16.241	32.889	-13.111	46.000
473.206	18.392	10.446	28.837	-17.163	46.000
521.804	18.747	13.232	31.979	-14.021	46.000
615.110	21.647	7.358	29.005	-16.995	46.000
687.034	20.357	7.112	27.469	-18.531	46.000
881.423	22.702	7.338	30.040	-15.960	46.000

Note:

1. Reading values below 1GHz are quasi-peak and reading values above 1GHz are peak and/or average.
2. "█" means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

## 4. Band Edge

### 4.1. Test Equipment


The following test equipment are used during the radiated emission test:

Test Site	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
<input type="checkbox"/> Site # 1	Test Receiver	R & S	ESVS 10 / 834468/003	July, 2006
	Spectrum Analyzer	Advantest	R3162/ 00803480	May, 2006
	Pre-Amplifier	Advantest	BB525C/ 3307A01812	May, 2006
	Bilog Antenna	SCHAFFNER	CBL6112B / 2697	Nov., 2005
<input type="checkbox"/> Site # 2	Test Receiver	R & S	ESCS 30 / 836858 / 022	Nov., 2005
	Spectrum Analyzer	Advantest	R3162 / 100803466	May, 2006
	Pre-Amplifier	Advantest	BB525C/3307A01814	May, 2006
	Bilog Antenna	SCHAFFNER	CBL6112B / 2705	Oct., 2005
<input checked="" type="checkbox"/> Site # 3	Test Receiver	R & S	ESI 26 / 838786 / 004	May, 2006
	Spectrum Analyzer	HP	E4407B / US39440758	May, 2006
	Pre-Amplifier	QTK	QTK-AMP-03 / 0003	May, 2006
	Broadband Antenna	Schwarzbeck	VULB9166/1085	April, 2005
	Horn Antenna	ETS	3115 / 0005-6160	July, 2006
	Loop Antenna	R&S	HFH2-Z2/833799/004	July, 2006
	Pre-Amplifier	QTK	QTK-AMP-01 / 0001	July, 2006

- Note:
1. All equipments are calibrated every one year.
  2. The test instruments marked by "X" are used to measure the final test results.

### 4.2. Test Setup

#### RF Radiated Measurement:

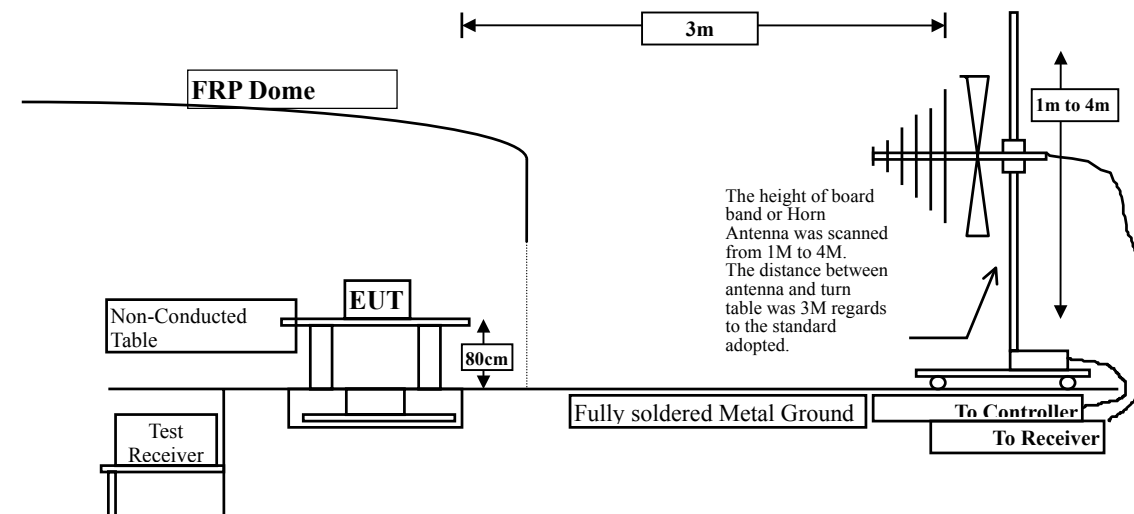

### 4.3. Limit

Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

### 4.4. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.4: 2003 on radiated measurement.

The additional latch filter below 1GHz was used to measure the level of harmonics radiated emission during field strength of harmonics measurement.


The bandwidth below 30MHz setting on the field strength meter is 10 kHz

### 4.5. Test Result of Band Edge

Product : 27MHz Mouse  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Normal Operation

#### RF Radiated Measurement: (Q-Peak Detector)

Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)
25.556	0.260	23.380	23.640	-25.860	49.500

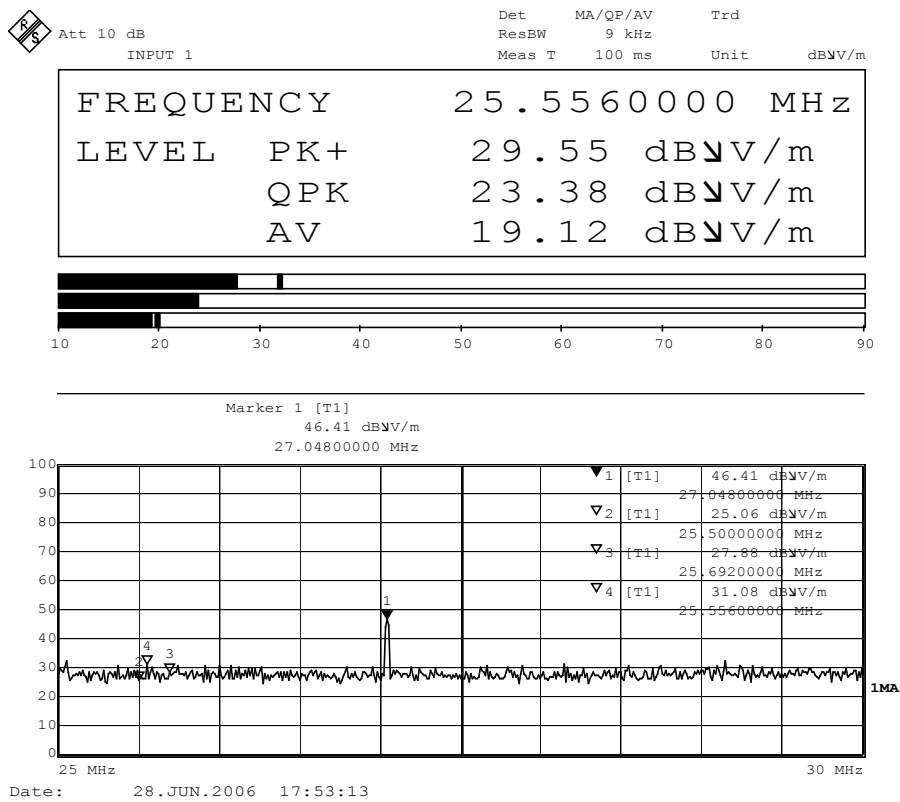

## 5. EMI Reduction Method During Compliance Testing

No modification was made during testing.