



Test Report

Product Name : 27MHz Mouse
Model No. : N530,N332,26-284,M310
FCC ID. : O62N530

Applicant : Darfon Electronics Corp.

Address : 6, Feng-Shu Tsuen, Gueishan, Taoyuan 333, Taiwan, R.O.C.

Date of Receipt : Dec. 15, 2006

Issued Date : Dec. 26, 2006

Report No. : 06CL089-RFUSP03V01

The Test Results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of Quietek Corporation.

This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

Test Report Certification

Test Date : Dec. 26, 2006

Report No.: 06CL089-RFUSP03V01



Accredited by NIST (NVLAP)

NVLAP Lab Code: 200533-0

Product Name : 27MHz Mouse

Applicant : Darfon Electronics Corp.

Address : 6, Feng-Shu Tsuen, Gueishan, Taoyuan 333, Taiwan, R.O.C.

Manufacturer : Darfon Eletronics (Suzhou) Co., Ltd.

Model No. : N530,N332,26-284,M310

FCC ID. : O62N530

Rated Voltage : AC 120V/60Hz

EUT Working Voltage : Battery 1.5V*2

Trade Name : Darfon,Gigaware,RadioShack,BenQ

Measurement Standard : FCC CFR Title 47 Part 15 Subpart C: 2005

Measurement Procedure : ANSI C63.4: 2003

Test Result : Complied



The Test Results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of Quietek Corporation.

This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

Documented By : Leven Huang
(Leven Huang)

Tested By : Tom Hsieh
(Tom Hsieh)

Approved By : George Chen
(George Chen)

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION.....	4
1.1. EUT Description.....	4
1.2. Operation Description	5
1.3. Test System Details	5
1.4. Configuration of Test System.....	5
1.5. EUT Exercise Software	6
1.6. Test Facility	7
2. Conducted Emission.....	8
2.1. Test Equipment.....	8
2.2. Test Setup	8
2.3. Limits	8
2.4. Test Procedure	9
2.5. Uncertainty	9
2.6. Test Data of Conducted Emission	9
3. Radiated Emission.....	10
3.1. Test Equipment.....	10
3.2. Test Setup	10
3.3. Limits	11
3.4. Test Procedure	12
3.5. Uncertainty	12
3.6. Test Data of Radiated Emission	13
4. Band Edge	17
4.1. Test Equipment.....	17
4.2. Test Setup	17
4.3. Limit	18
4.4. Test Procedure	18
4.5. Test Result of Band Edge	19
5. Occupied Bandwidth.....	20
5.1. Test Equipment.....	20
5.2. Test Setup	20
5.3. Test Result of Occupied Bandwidth	21
6. EMI Reduction Method During Compliance Testing	22
Attachment 1: EUT Test Photographs	
Attachment 2: EUT Detailed Photographs	

1. GENERAL INFORMATION

1.1. EUT Description

Product Name : 27MHz Mouse
 Trade Name : Darfon,Gigaware,RadioShack,BenQ
 FCC ID. : O62N530
 Model No. : N530,N332,26-284,M310
 EUT Working Voltage : AC 120V/60Hz
 Frequency Range : 27.045MHz
 Type of Modulation : FSK
 Type of antenna : Loop antenna
 Number of Channel : 1
 Channel Control : N/A

Frequency of Each Channel:

Channel	Frequency
1	27.045 MHz

Note:

1. The EUT is a 27MHz Mouse used in household and office PC system or related application.
2. These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with FCC CFR Title 47 Part 15 Subpart C: 2005 Paragraph 15.227.
3. The different of each model is shown as below:

Model Number	Trade Name	Appearance
N530	Darfon	Black and not including logo
N332	Darfon	Black and not including logo
26-284	Gigaware, RadioShack	Black and including logo
M310	BenQ, Darfon	White and including logo of BenQ

Pre-Test Mode	
EMI	Mode 1: Transmitter
Final Test Mode	
EMI	Mode 1: Transmitter

1.2. Operation Description

The EUT is a 27MHz Mouse used in household and office PC system.

The device adapts FSK modulation. The loop antenna provides diversity function to improve the transmitting function.


1.3. Test System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	FCC ID	Power Cord
N/A					

Signal Cable Type	Signal cable Description
N/A	

1.4. Configuration of Test System

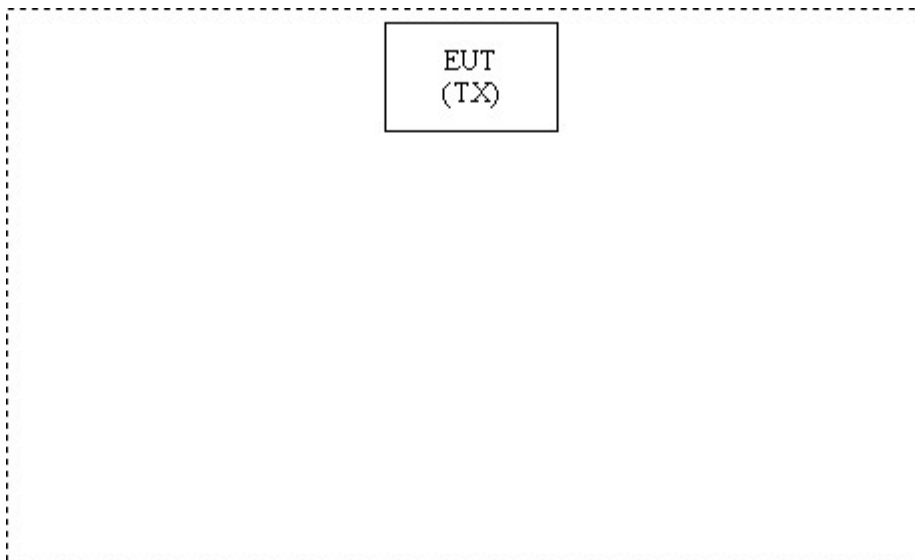

1.5. EUT Exercise Software

- (1) Setup the EUT as shown in section 1.4.
- (2) Press and hold the left and the middle button.
- (3) Install the batteries.
- (4) Check that the cursor moves circularly on the notebook.
- (5) Remove the notebook and start the tests.

1.6. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	50-65
Barometric pressure (mbar)	860-1060	950-1000

Site Description: Federal Communications Commission
 FCC Engineering Laboratory
 7435 Oakland Mills Road
 Columbia, MD 21046
 Reference 31040/SIT1300F2



Accreditation on NVLAP
 NVLAP Lab Code: 200533-0



Site Name: Quietek Corporation
 Site Address: No. 5-22, Ruei-Shu Valley, Ruei-Ping Tsuen,
 Lin-Kou Shiang, Taipei,
 Taiwan, R.O.C.
 TEL: 886-2-8601-3788 / FAX : 886-2-8601-3789
 E-Mail : service@quietek.com



2. Conducted Emission


2.1. Test Equipment

The following test equipment are used during the conducted emission test:

Item	Instrument	Manufacturer	Type No./Serial No	Last Cal.	Remark
1	Test Receiver	R & S	ESCS 30/838251/001	May, 2006	
2	L.I.S.N.	R & S	ESH3-Z5/836679/0023	May, 2006	EUT
3	L.I.S.N.	R & S	ENV 4200/833209/0023	May, 2006	Peripherals
4	Pulse Limiter	R & S	ESH3-Z2	May, 2006	
6	No.1 Shielded Room				

Note: All equipments are calibrated every one year.

2.2. Test Setup

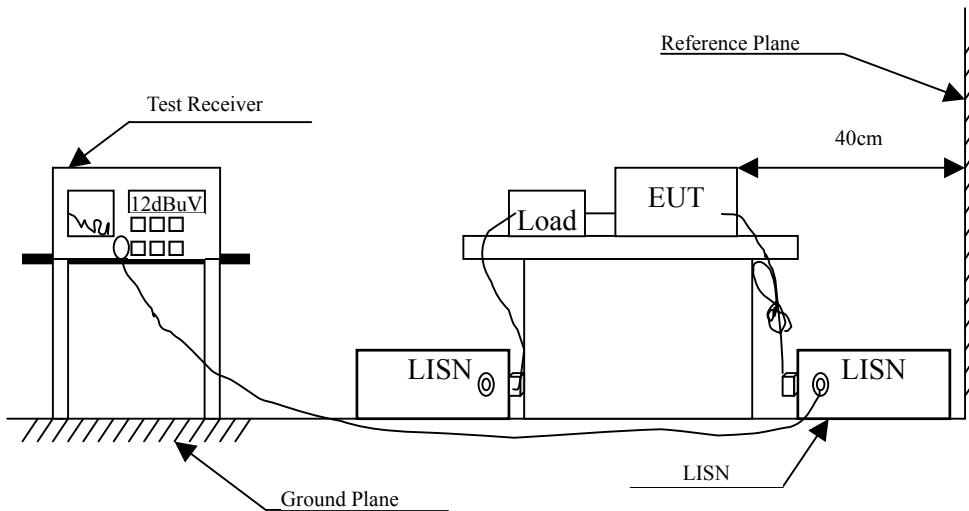

2.3. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dBuV) Limit		
Frequency MHz	Limits	
	QP	AV
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

Remarks : In the above table, the tighter limit applies at the band edges.

2.4. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all the interface cables must be changed according to ANSI C63.4: 2001 on conducted measurement.

Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

2.5. Uncertainty

± 2.26 dB

2.6. Test Data of Conducted Emission

The EUT is powered by batteries. This test item is not performed

3. Radiated Emission


3.1. Test Equipment

The following test equipment are used during the radiated emission test:

Test Site	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
<input type="checkbox"/> Site # 1	Test Receiver	R & S	ESVS 10 / 834468/003	July, 2006
	Spectrum Analyzer	Advantest	R3162/ 00803480	May, 2006
	Pre-Amplifier	Advantest	BB525C/ 3307A01812	May, 2006
	Bilog Antenna	SCHAFFNER	CBL6112B / 2697	Nov., 2006
<input type="checkbox"/> Site # 2	Test Receiver	R & S	ESCS 30 / 836858 / 022	Nov., 2006
	Spectrum Analyzer	Advantest	R3162 / 100803466	May, 2006
	Pre-Amplifier	Advantest	BB525C/3307A01814	May, 2006
	Bilog Antenna	SCHAFFNER	CBL6112B / 2705	Oct., 2006
<input checked="" type="checkbox"/> Site # 3	Test Receiver	R & S	ESI 26 / 838786 / 004	May, 2006
	Spectrum Analyzer	Advantest	R3162 / 100803480	May, 2006
	Pre-Amplifier	QTK	QTK-AMP-03 / 0003	May, 2006
	Horn Antenna	ETS	3115 / 0005-6160	July, 2006
	Pre-Amplifier	QTK	QTK-AMP-01 / 0001	July, 2006
	Broadband Antenna	Schwarzbeck	VULB9166 / 1085	April, 2006
	Loop Antenna	R&S	HFH2-Z2 / 833799/004	July, 2006

- Note:
1. All equipments are calibrated every one year.
 2. The test instruments marked by "X" are used to measure the final test results.

3.2. Test Setup

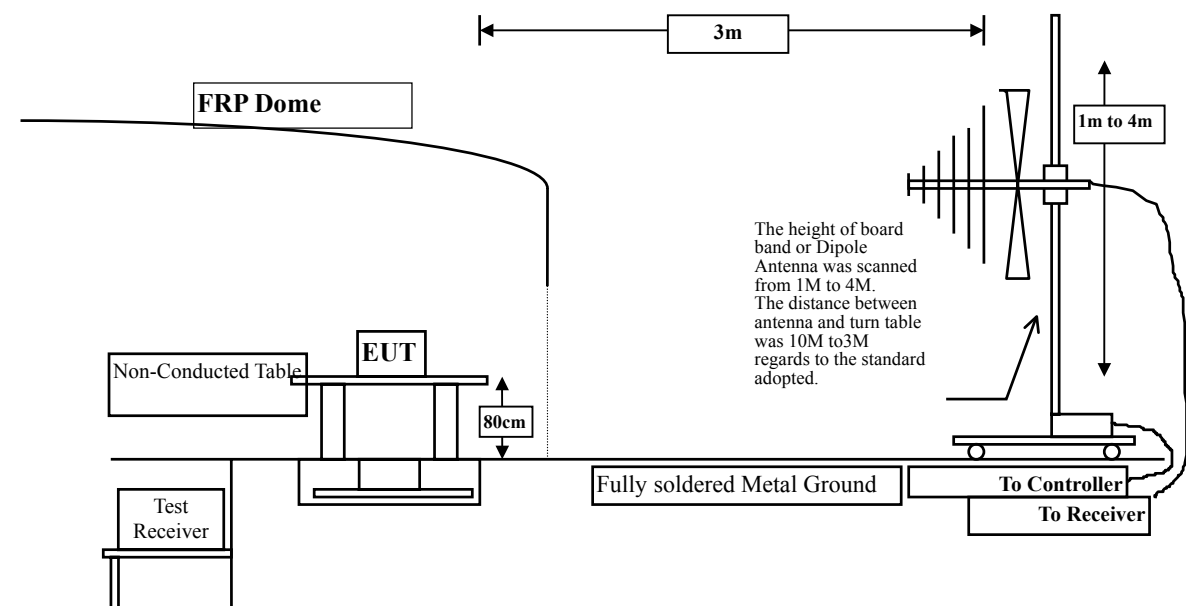

3.3. Limits

➤ FCC Part 15 Subpart C Paragraph 15.227 Limit

FCC Part 15 Subpart C Paragraph 15.227 Limits		
Fundamental Frequency MHz	Field strength of fundamental	
	uV/m	dBuV/m
26.96-27.28	10000	80.0

Remarks :

1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
3. The emission limit in this paragraph is based on measurement instrumentation employing an average detector. Measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.

➤ Frequencies in restricted band are complied to limits on Paragraph 15.209.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	uV/m @3m	dBuV/m@3m
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

- Remarks :
1. RF Voltage (dBuV/m) = 20 log RF Voltage (uV/m)
 2. In the Above Table, the tighter limit applies at the band edges.
 3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

3.4. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.4: 2003 on radiated measurement.

Radiated emissions were investigated over the frequency range from 30MHz to 1GHz using a receiver bandwidth of 120kHz. Radiated was performed at an antenna to EUT distance of 3 meters.

The frequency range from 30MHz to 10th harmonics is checked.

Below 30MHz the magnetic loop antenna was used.

3.5. Uncertainty


± 3.8 dB

3.6. Test Data of Radiated Emission


Product : 27MHz Mouse
 Test Item : Fundamental Radiated Emission
 Test Site : No.3 OATS
 Test Voltage : AC 120V/60Hz
 Test Mode : Mode 1: Transmitter (27.045MHz)

Polarity	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)
Peak Detector							
X	27.050	20.190	41.500	61.690	-38.310	100.000	80.000
Y	27.044	20.190	52.930	73.120	-26.880	100.000	80.000
Z	27.050	20.190	52.780	72.970	-27.030	100.000	80.000


Polarity X

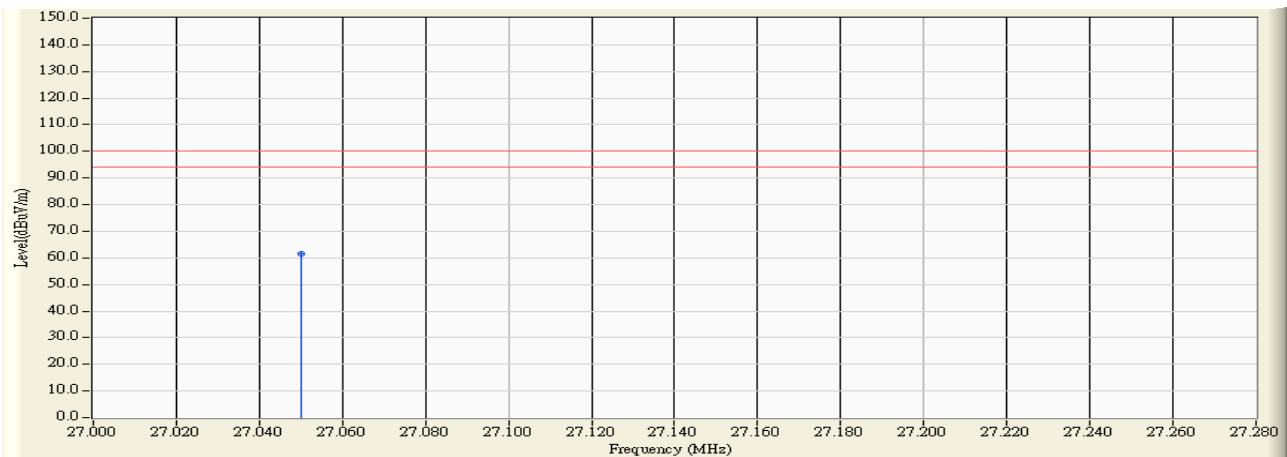

Polarity Y

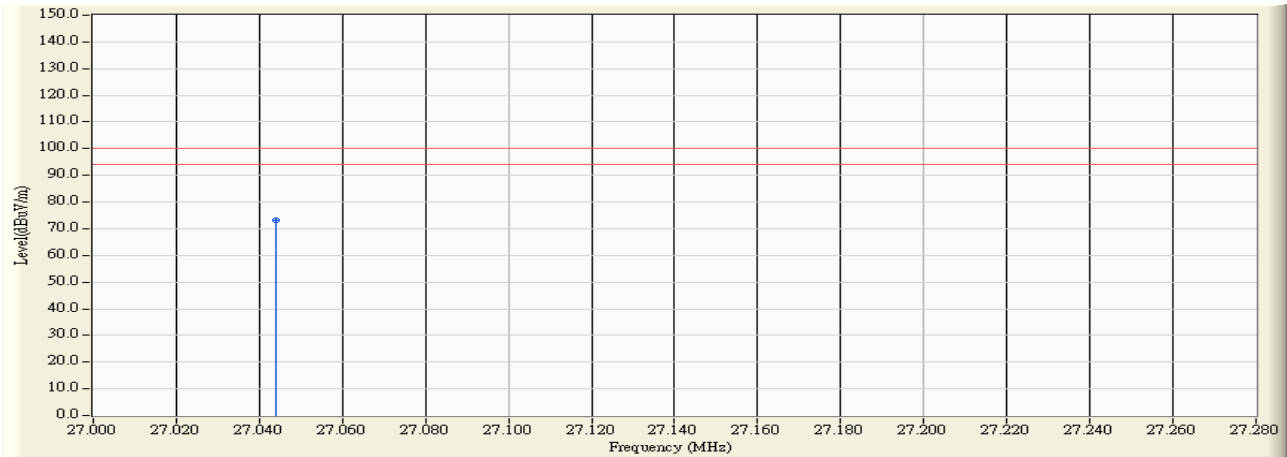

Polarity Z

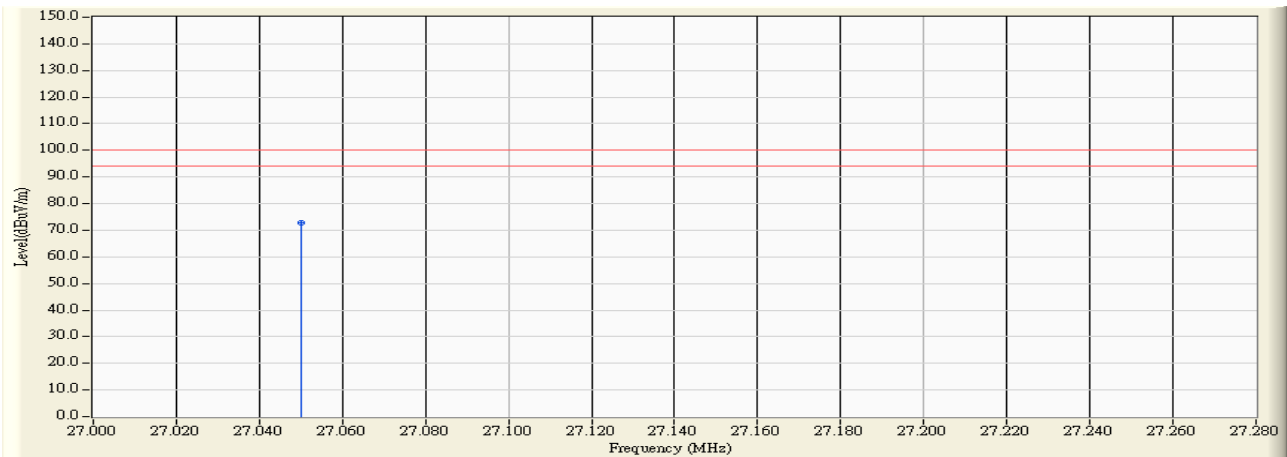

Note:

1. Below 30MHz, the magnetic loop antenna was used.
2. Only fundamental frequency is shown on the test report.
3. For those measured radiated emissions below 30MHz, not shown above, mean they are below the limit.
4. Correct factor = Antenna Factor + Cable Loss – Pre-amplifier Gain

Product : 27MHz Mouse
 Test Item : General Radiated Emission
 Test Site : No.3 OATS
 Test Voltage : AC 120V/60Hz
 Test Mode : Mode 1: Transmitter (27.045 MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
*39.900	14.154	7.100	21.254	-18.746	40.000
54.100	6.971	1.700	8.671	-31.329	40.000
70.000	7.007	4.400	11.407	-28.593	40.000
81.150	9.054	7.600	16.654	-23.346	40.000
108.200	13.036	0.300	13.336	-30.184	43.520
189.350	9.491	14.300	23.790	-19.730	43.520
315.700	13.868	13.100	26.968	-19.052	46.020

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. “ * ” means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier Gain

Product : 27MHz Mouse
 Test Item : General Radiated Emission
 Test Site : No.3 OATS
 Test Voltage : AC 120V/60Hz
 Test Mode : Mode 1: Transmitter (27.045 MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Vertical					
54.100	6.650	2.500	9.150	-30.850	40.000
70.800	7.419	7.100	14.519	-25.481	40.000
81.150	8.615	0.500	9.115	-30.885	40.000
189.350	9.668	8.100	17.767	-25.753	43.520
216.400	10.887	0.400	11.287	-34.733	46.020
*660.000	20.402	14.600	35.002	-11.018	46.020

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. “ * ” means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. Correct factor = Antenna Factor + Cable Loss – Pre-amplifier Gain

4. Band Edge

4.1. Test Equipment


The following test equipment are used during the radiated emission test:

Test Site	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
<input type="checkbox"/> Site # 1	Test Receiver	R & S	ESVS 10 / 834468/003	July, 2006
	Spectrum Analyzer	Advantest	R3162/ 00803480	May, 2006
	Pre-Amplifier	Advantest	BB525C/ 3307A01812	May, 2006
	Bilog Antenna	SCHAFFNER	CBL6112B / 2697	Nov., 2006
<input type="checkbox"/> Site # 2	Test Receiver	R & S	ESCS 30 / 836858 / 022	Nov., 2006
	Spectrum Analyzer	Advantest	R3162 / 100803466	May, 2006
	Pre-Amplifier	Advantest	BB525C/3307A01814	May, 2006
	Bilog Antenna	SCHAFFNER	CBL6112B / 2705	Oct., 2006
<input checked="" type="checkbox"/> Site # 3	Test Receiver	R & S	ESI 26 / 838786 / 004	May, 2006
	Spectrum Analyzer	HP	E4407B / US39440758	May, 2006
	Pre-Amplifier	QTK	QTK-AMP-03 / 0003	May, 2006
	Broadband Antenna	Schwarzbeck	VULB9166/1085	April, 2006
	Horn Antenna	ETS	3115 / 0005-6160	July, 2006
	Loop Antenna	R&S	HFH2-Z2/833799/004	July, 2006
	Pre-Amplifier	QTK	QTK-AMP-01 / 0001	July, 2006

- Note:
1. All equipments are calibrated every one year.
 2. The test instruments marked by "X" are used to measure the final test results.

4.2. Test Setup

RF Radiated Measurement:

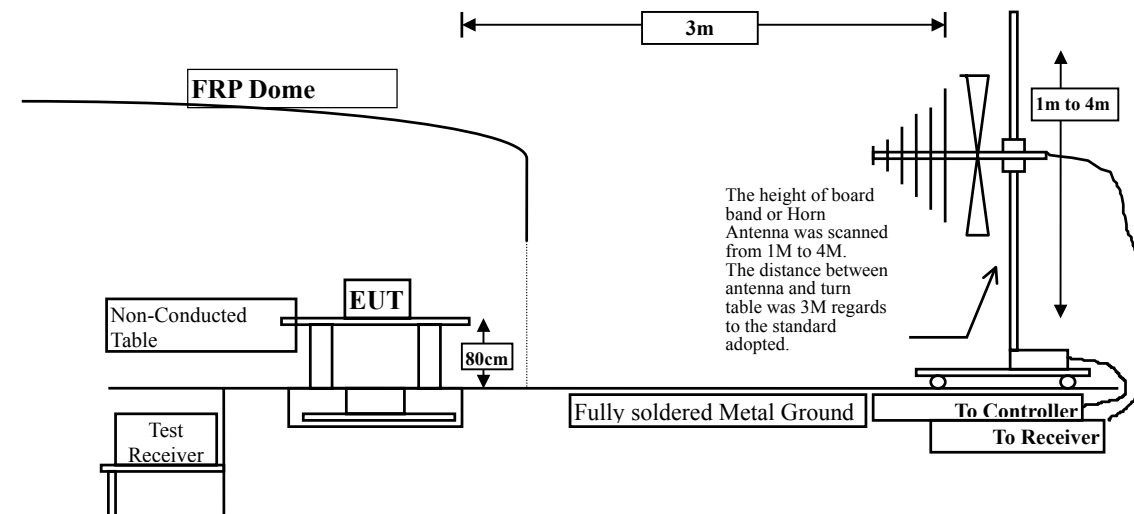

4.3. Limit

Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

4.4. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.4: 2003 on radiated measurement.

The additional latch filter below 1GHz was used to measure the level of harmonics radiated emission during field strength of harmonics measurement.


The bandwidth below 30MHz setting on the field strength meter is 10 kHz

4.5. Test Result of Band Edge

Product : 27MHz Mouse
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (27.045 MHz)

RF Radiated Measurement: (Peak Detector)

Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)
25.608	20.230	29.550	49.780	-19.760	69.540

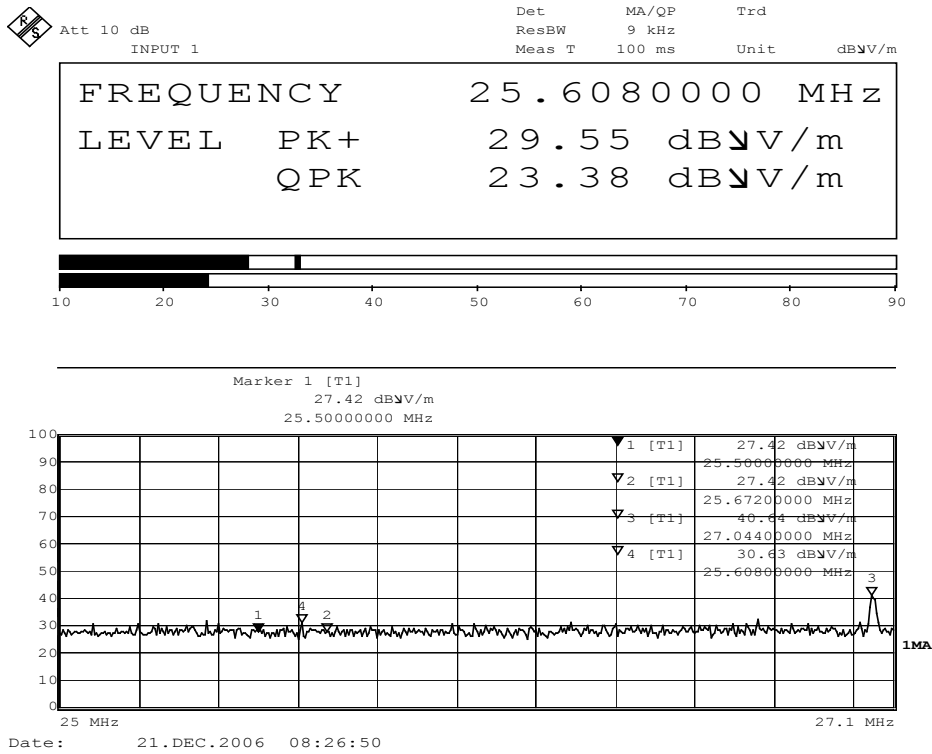

5. Occupied Bandwidth


5.1. Test Equipment

The following test equipments are used during the radiated emission tests:

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X Spectrum Analyzer	HP	E4407B / US39440758	May, 2006

- Note:
1. All equipments are calibrated every one year.
 2. The test instruments mark by “X” are used to measure the final test results.


5.2. Test Setup

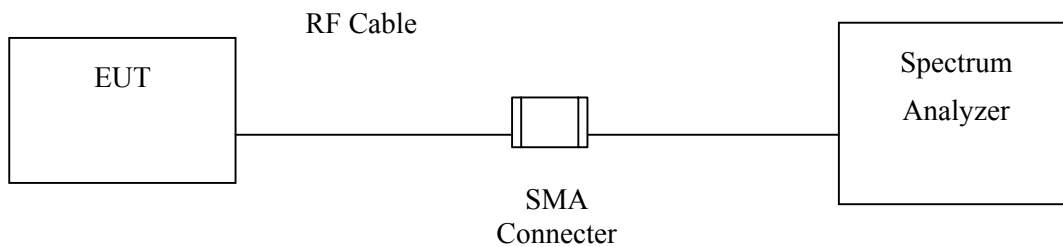

5.3. Test Result of Occupied Bandwidth

Product : 27MHz Mouse
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 Shielded Room
 Test Mode : Mode 1: Transmitter (27.045 MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)
1	27.0481	12.3702

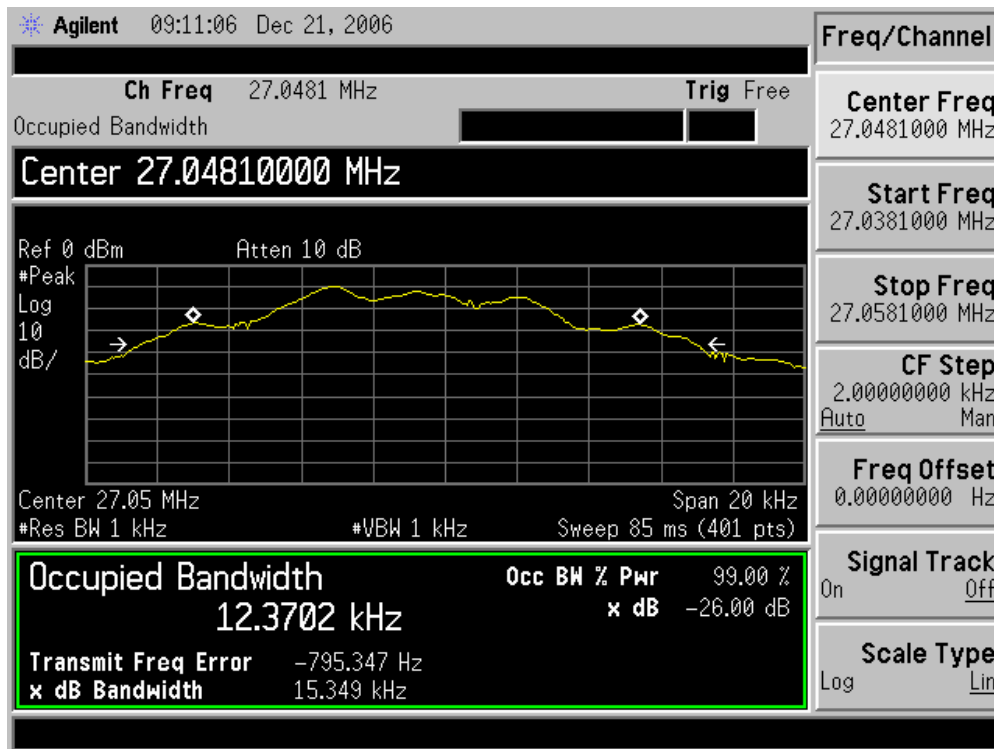

6. EMI Reduction Method During Compliance Testing

No modification was made during testing.