



**FCC PART 15 SUBPART C**  
**EMI MEASUREMENT AND TEST REPORT**

For  
**Lionda Technology Company Limited**

Block 2 Laodong 2<sup>nd</sup> Industrial Area, Xixian, Baoan,  
Shenzhen, Guangdong, China 518102

**FCC ID: O63GH5860BDLD03**

2003-10-02

<b>This Report Concerns:</b> <input checked="" type="checkbox"/> Original Report	<b>Equipment Type:</b> 2.4GHz and 5.8GHz Cordless Phone, Base Unit
<b>Test Engineer:</b> Benjamin Jing / 	
<b>Report No.:</b> R0308046	
<b>Test Date:</b> 2003-08-20	
<b>Reviewed By:</b> Ling Zhang / 	
<b>Prepared By:</b> Bay Area Compliance Laboratory Corporation (BACL) 230 Commercial Street Sunnyvale, CA 94085 Tel: (408) 732-9162 Fax: (408) 732 9164	

**Note:** This test report is specially limited to the above client company and product model only. It may not be duplicated without prior written consent of Bay Area Compliance Laboratory Corporation. This report **must not** be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

**TABLE OF CONTENTS**

<b>1 - GENERAL INFORMATION.....</b>	<b>4</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	4
1.2 OBJECTIVE .....	4
1.3 RELATED SUBMITTAL(S)/GRANT(S).....	4
1.4 TEST METHODOLOGY .....	4
1.5 TEST FACILITY .....	4
1.6 TEST EQUIPMENT LIST .....	5
1.7 LOCAL SUPPORT EQUIPMENT.....	5
1.8 EXTERNAL I/O CABLING LIST AND DETAILS .....	5
<b>2 - SYSTEM TEST CONFIGURATION.....</b>	<b>6</b>
2.1 DESCRIPTION OF TEST CONFIGURATION .....	6
2.2 EQUIPMENT MODIFICATIONS .....	6
2.3 CONFIGURATION OF TEST SYSTEM.....	7
2.4 TEST SETUP BLOCK DIAGRAM.....	7
<b>3 - SUMMARY OF TEST RESULTS.....</b>	<b>8</b>
<b>4 - PEAK OUTPUT POWER MEASUREMENT .....</b>	<b>9</b>
4.1 STANDARD APPLICABLE .....	9
4.2 MEASUREMENT PROCEDURE.....	9
4.3 TEST EQUIPMENT .....	9
4.4 MEASUREMENT RESULT .....	9
<b>5 - 6 DB BANDWIDTH .....</b>	<b>12</b>
5.1 STANDARD APPLICABLE .....	12
5.2 MEASUREMENT PROCEDURE.....	12
5.3 TEST EQUIPMENT .....	12
5.4 MEASUREMENT RESULT .....	12
<b>6 - POWER SPECTRAL DENSITY.....</b>	<b>15</b>
6.1 STANDARD APPLICABLE .....	15
6.2 MEASUREMENT PROCEDURE.....	15
6.3 TEST EQUIPMENT .....	15
6.4 MEASUREMENT RESULTS.....	15
<b>7 - 100 KHZ BANDWIDTH OF BAND EDGES .....</b>	<b>18</b>
7.1 STANDARD APPLICABLE .....	18
7.2 MEASUREMENT PROCEDURE.....	18
7.3 TEST EQUIPMENT .....	18
7.4 MEASURE RESULTS.....	19
<b>10 - SPURIOUS EMISSION AT ANTENNA TERMINAL.....</b>	<b>24</b>
10.1 STANDARD APPLICABLE .....	24
10.2 MEASUREMENT PROCEDURE.....	24
10.3 MEASUREMENT RESULT .....	24
<b>11 - ANTENNA REQUIREMENT.....</b>	<b>31</b>
11.1 STANDARD APPLICABLE .....	31
11.2 ANTENNA CONNECTED CONSTRUCTION .....	31
<b>12 - SPURIOUS RADIATED EMISSION.....</b>	<b>32</b>
12.1 MEASUREMENT UNCERTAINTY .....	32
12.2 EUT SETUP.....	33
12.3 SPECTRUM ANALYZER SETUP .....	33
12.4 TEST PROCEDURE .....	34
12.5 CORRECTED AMPLITUDE & MARGIN CALCULATION .....	34
12.6 SUMMARY OF TEST RESULTS .....	34
<b>13 - CONDUCTED EMISSIONS.....</b>	<b>39</b>

---

13.1 MEASUREMENT UNCERTAINTY .....	39
13.2 EUT SETUP .....	39
13.3 SPECTRUM ANALYZER SETUP .....	39
13.4 TEST PROCEDURE .....	39
13.5 SUMMARY OF TEST RESULTS .....	40
13.6 CONDUCTED EMISSIONS TEST DATA .....	40
13.7 PLOT OF CONDUCTED EMISSIONS TEST DATA .....	40

## 1 - GENERAL INFORMATION

---

### 1.1 Product Description for Equipment Under Test (EUT)

*Lionda Technology Company Limited's* product, FCC ID: O63GH5860BDLD03, Model No.: *GH5860* or the "EUT" as referred to in this report is a 2.4GHz and 5.8GHz Cordless Telephone base unit, which measures approximately 6.1" L x 5.6"W x 3.1" H.

The EUT was fed by the Bell South AC/DC Adapter, M/N: U090015D12.

*\* The test data gathered are from typical production samples provided by the manufacturer.*

### 1.2 Objective

This type approval report is prepared on behalf of *Lionda Technology Company Limited* in accordance with Part 2, Subpart J, Part 15, Subparts A , C, and E of the Federal Communication Commissions rules.

The objective of the manufacturer is to demonstrate the product compliance to FCC Part 15.247 when operating for Output Power, Antenna Requirements, 6 dB Bandwidth, power spectral density, 100 kHz Bandwidth of Band Edges Measurement, Spurious Emission and Conducted and Spurious Radiated Emission.

### 1.3 Related Submittal(s)/Grant(s)

No Related Submittals.

### 1.4 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2001, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratory, Corp. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

### 1.5 Test Facility

The Open Area Test site used by BACL to collect radiated and conducted emission measurement data is located in the back parking lot of the building at 230 Commercial Street, Sunnyvale, California, USA.

Test site at BACL has been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI). The details of these reports has been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 11 and December 10, 1997 and Article 8 of the VCCI regulations on December 25, 1997. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2001.

The Federal Communications Commission and Voluntary Control Council for Interference has the reports on file and is listed under FCC file 31040/SIT 1300F2 and VCCI Registration No.: C-1298 and R-1234. The test site has been approved by the FCC and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, BACL is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (Lab Code 200167-0). The scope of the accreditation covers the FCC Method – 47 CFR Part – Digital Devices, CISPER 22: 1997: Electromagnetic Interference – Limits and Methods of Measurement of Information Technology Equipment test methods.

### 1.6 Test Equipment List

Item #	Manufacturer	Description	Model	Serial Number	Cal. Due Date
1	HP	Spectrum Analyzer	8568B	2517A01610	2003-10-30
2	HP	Amplifier	8447E	2944A07030	2004-06-28
3	HP	Quasi-Peak Adapter	85650A	2521A00718	2004-03-08
4	Com-Power	Biconical Antenna	AB-100	14012	2004-09-05
5	Com-Power	Log Periodic Antenna	AL-100	16005	2004-08-23
6	Com-Power	Log Periodic Antenna	AB-900	15049	2004-05-01
7	Agilent	Spectrum Analyzer (9KHz – 40GHz)	8564E	3943A01781	2004-08-01
8	Agilent	Spectrum Analyzer (9KHz – 50GHz)	8565EC	3946A00131	2004-05-03
9	HP	Amplifier (1-26.5GHz)	8449B	3147A00400	2004-03-14
10	A.H.System	Horn Antenna (700MHz-18GHz)	SAS-200/571	261	2004-05-31
11	HP	Peak Power Meter	432A	1507A	2004-09-16

\* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. certifies that all calibration has been performed using suitable standards traceable to the NIST.

### 1.7 Local Support Equipment

Manufacturer	Description	Model	Serial Number	FCC ID
Southern Telecom	Telephone	None	None	DOC
Teltone Corp	Simulator	TLS-3B-01	80071	DOC

### 1.8 External I/O Cabling List and Details

Cable Description	Length (M)	Port/From	To
None-Shielded RJ-11 Cable	1.8	RJ-11 Port/EUT	Simulator RJ11Port
Headset Cable	N/A	Headset /EUT	Base /EUT

---

## **2 - SYSTEM TEST CONFIGURATION**

---

### **2.1 Description of Test Configuration**


The EUT was configured for testing in a typical fashion (as normally used by a typical user).

Base being tested: The Cordless Telephone – Base, Model GH5860, FCC ID: O63GH5860BDLD03 was placed on the wooden table. The Low, middle, and high channels were tested. The base was connected to the line simulator and an AC adapter via its Tel Line and power ports, respectively. The base was transmitting and receiving from the handset. The conducted as well as radiated data was taken in this mode of operation. All initial and final investigations were performed with the EMI receiver in manual mode scanning the frequency range continuously. The cables were bundled and routed as shown in the 2.3.


### **2.2 Equipment Modifications**

No modification(s) was made by BACL Corp. to ensure the EUT complies with the applicable limits and standards.

## 2.3 Configuration of Test System

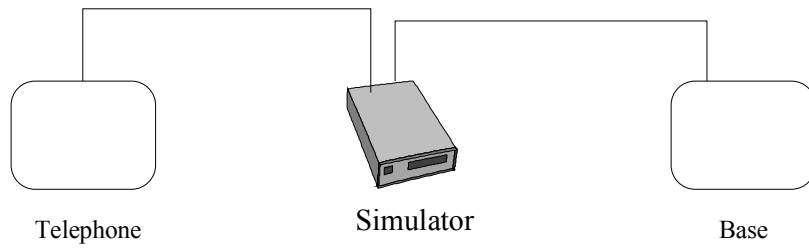

## 2.4 Test Setup Block Diagram

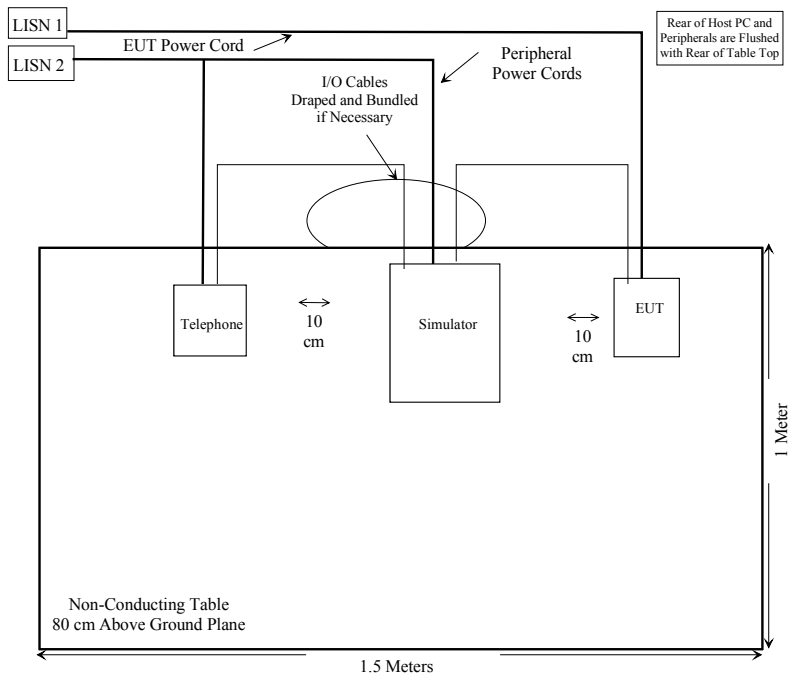

### 3 - SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT	REFERENCE
§15.203	Antenna Requirement	Compliant	Section 11
§ 15.205	Restricted Bands	Compliant	Section 12
§15.209 (a)	Radiated Emission	Compliant	Section 12
§15.209 (f)	Spurious Emission	Compliant	Section 10
§15.247 (a)(2)	6 dB Bandwidth	Compliant	Section 5
§15.247 (b)(1)	Maximum Peak Output Power	Compliant	Section 4
§15.247(b)(4)	RF Exposure Requirement	Compliant	Section 16
§ 15.247 (c)	100 kHz Bandwidth of Frequency Band Edge	Compliant	Section 7
§15.247 (d)	Peak Power Spectral Density	Compliant	Section 6
§ 15.207 (a)	Conducted Emission	Compliant	Section 13



## 4 - PEAK OUTPUT POWER MEASUREMENT

### 4.1 Standard Applicable

According to §15.247(b) (3), for systems using digital modulation in 2400-2483.5 MHz and 5725-5850 MHz: 1 Watt

### 4.2 Measurement Procedure

1. Place the EUT on the turntable and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

### 4.3 Test Equipment

Please refer to Section 1.6 Item8.




### 4.4 Measurement Result




#### 4.4.1 Conducted Output Power at 2.4GHz

Unit	Channel	Frequency	Output Power (dBm)	Output Power (W)	Standard (W)	Result
Base	Low	2402	10.00	0.0100	$\leq 1W$	Compliant
Base	Mid	2441	10.33	0.0108	$\leq 1W$	Compliant
Base	High	2480	9.83	0.0096	$\leq 1W$	Compliant

#### 4.4.2 Conducted Output Power at 5.8GHz

Unit	Channel	Frequency	Output Power (dBm)	Output Power (W)	Standard (W)	Result
Base	Low	5729	15.67	0.037	$\leq 1W$	Compliant
Base	Mid	5768	15.17	0.033	$\leq 1W$	Compliant
Base	High	5808	15.83	0.038	$\leq 1W$	Compliant

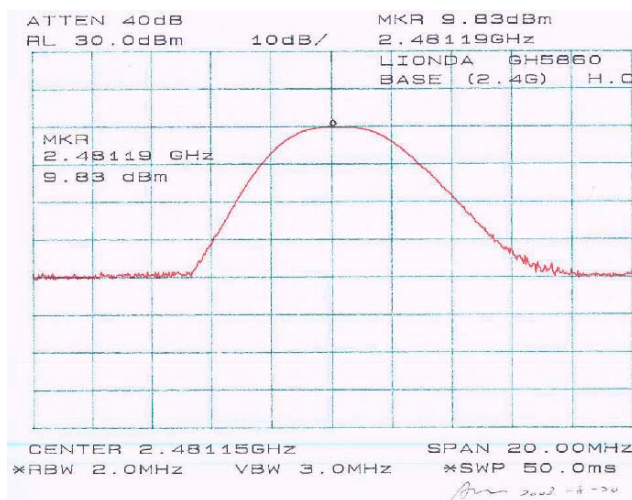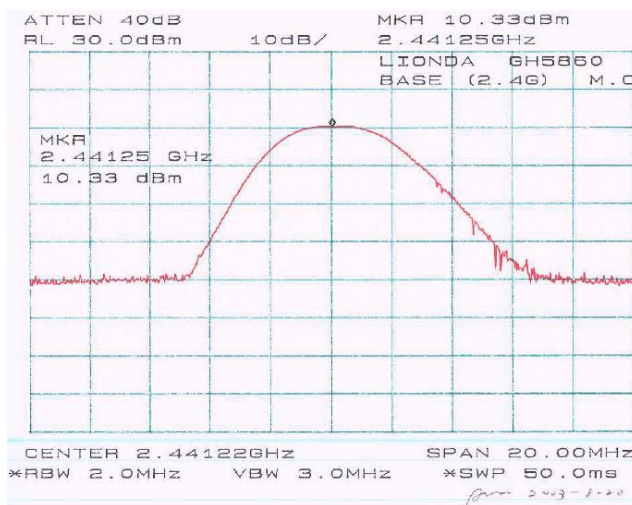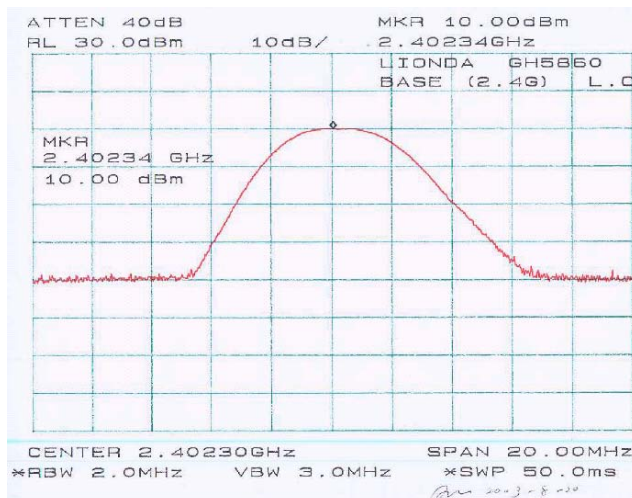

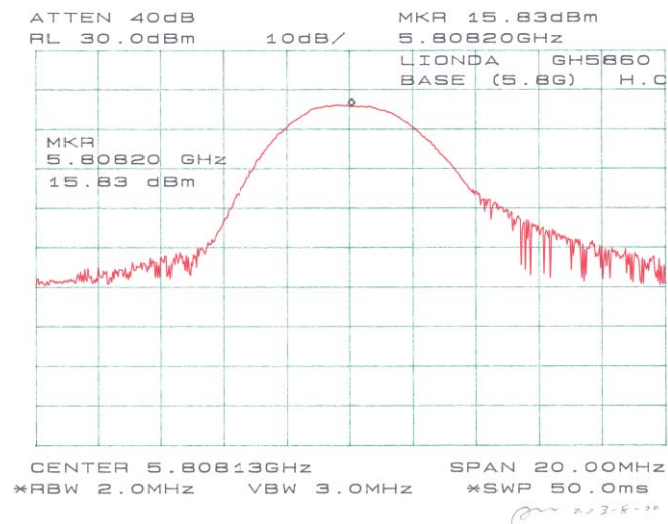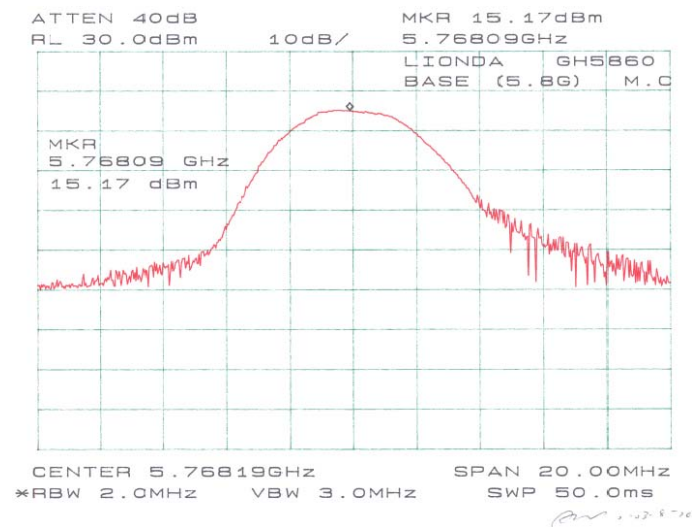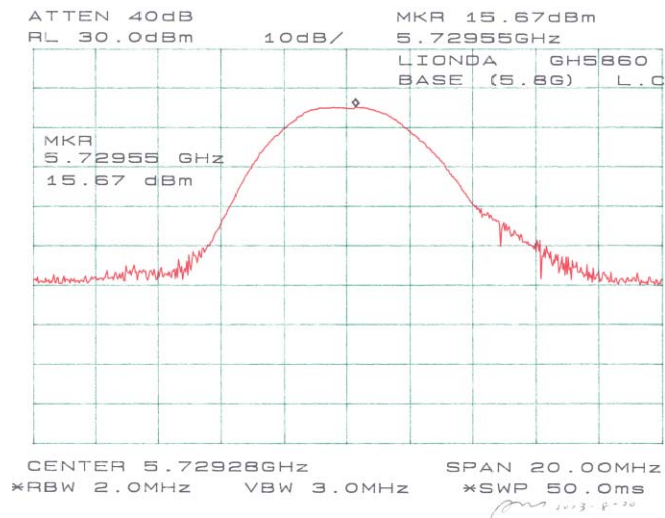

## 5 – 6 DB BANDWIDTH

### 5.1 Standard Applicable

According to §15.247(a)(2), for direct sequence systems, the minimum 6dB bandwidth shall be at least 500 kHz.

### 5.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

### 5.3 Test Equipment

Please refer to Section 1.6 Item8.




### 5.4 Measurement Result

#### 5.3.1 Test Result for 2.4GHz Band




Unit	Frequency	Measured	Standard (kHz)	Result
Base	Low	1.22 MHz	$\geq 500$	Compliant
	Mid	1.27 MHz	$\geq 500$	Compliant
	High	1.28 MHz	$\geq 500$	Compliant

#### 5.3.2 Test Result for 5.8 GHz Band

Unit	Frequency	Measured	Standard (kHz)	Result
Base	Low	1.33 MHz	$\geq 500$	Compliant
	Mid	1.35 MHz	$\geq 500$	Compliant
	High	1.37 MHz	$\geq 500$	Compliant

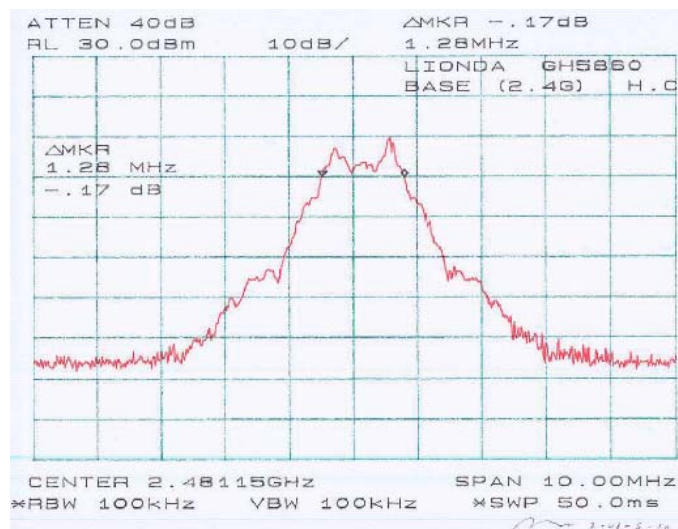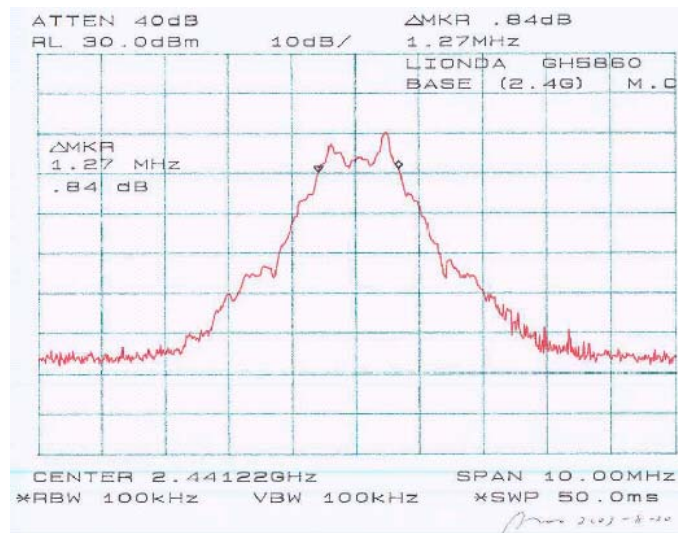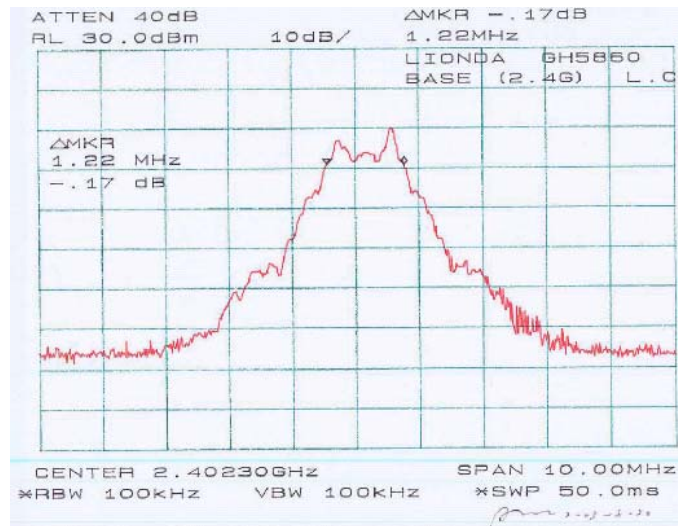



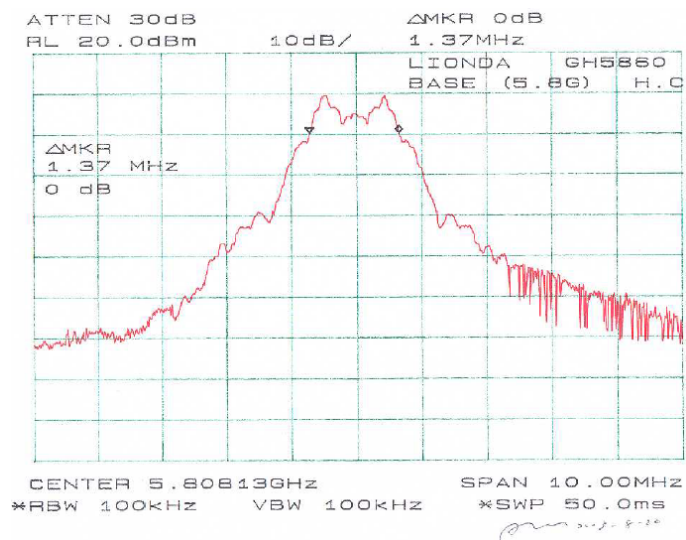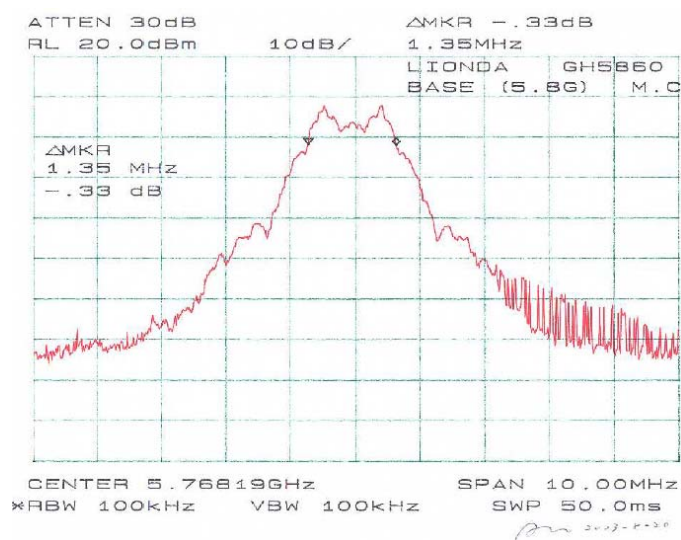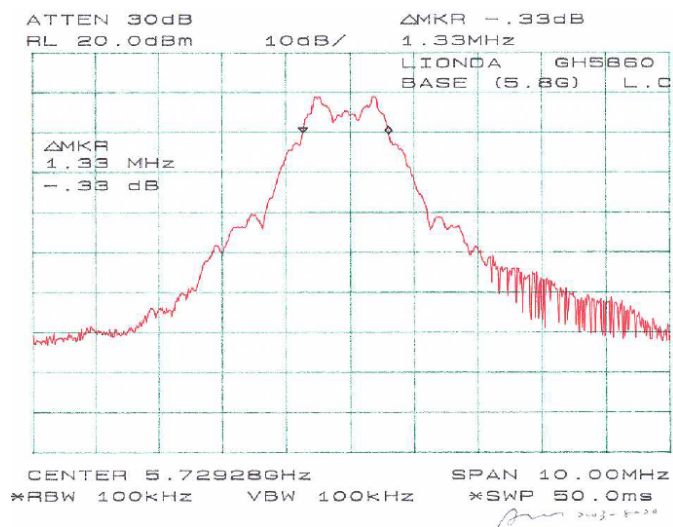

## 6 - POWER SPECTRAL DENSITY

### 6.1 Standard Applicable

According to §15.247 (d), for direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 6.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Adjust the center frequency of SA on any frequency be measured and set SA to 6MHz span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
4. Repeat above procedures until all frequencies measured were complete.

### 6.3 Test Equipment

Please refer to Section 1.6 Item7.




### 6.4 Measurement Results

#### 6.4.1 Test Result for 2.4GHz Band




Unit	Frequency	Peak Power Spectral Density (dBm)	Standard (dBm)	Result
Base	Low	5.83	$\leq 8$	Compliant
	Mid	5.50	$\leq 8$	Compliant
	High	5.67	$\leq 8$	Compliant

#### 6.4.2 Test Result for 5.8GHz Band

Unit	Frequency	Peak Power Spectral Density (dBm)	Standard (dBm)	Result
Base	Low	0.67	$\leq 8$	Compliant
	Mid	-0.50	$\leq 8$	Compliant
	High	0.17	$\leq 8$	Compliant

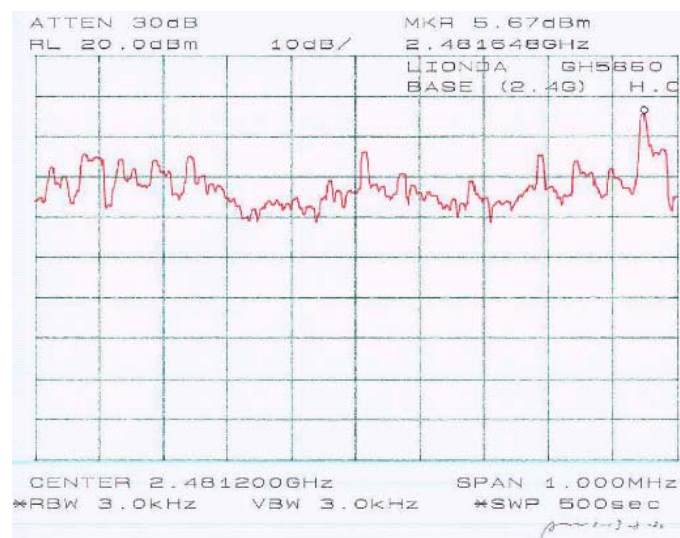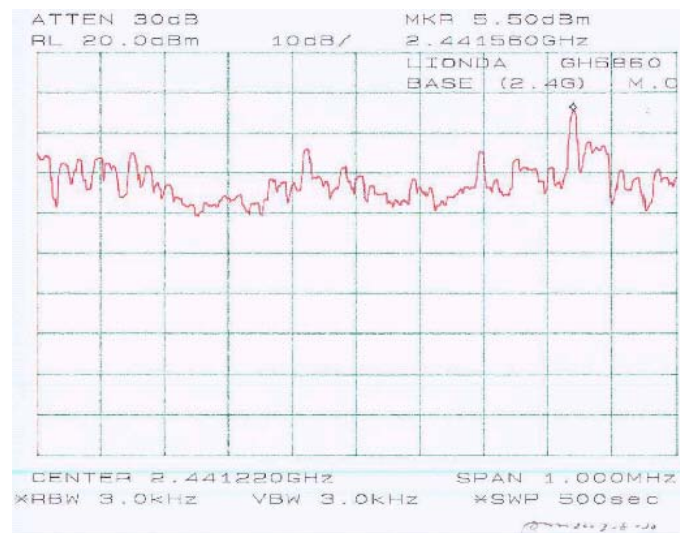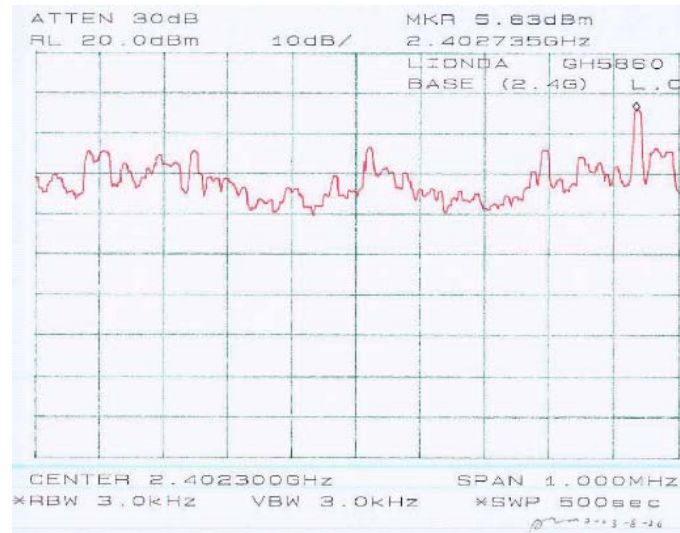



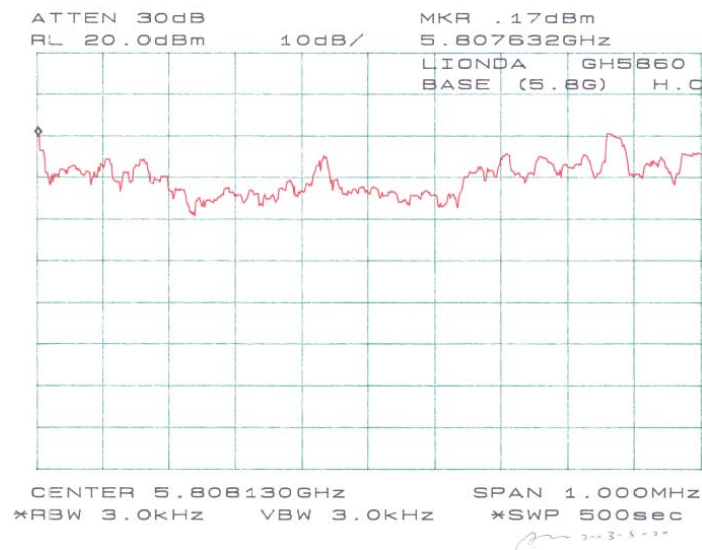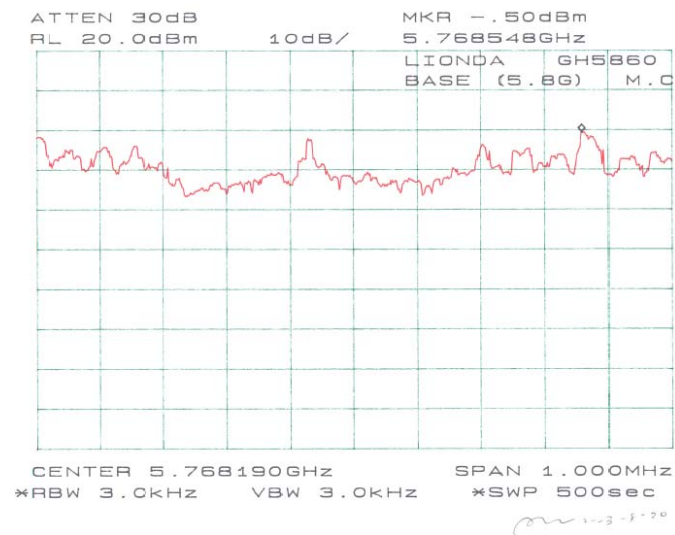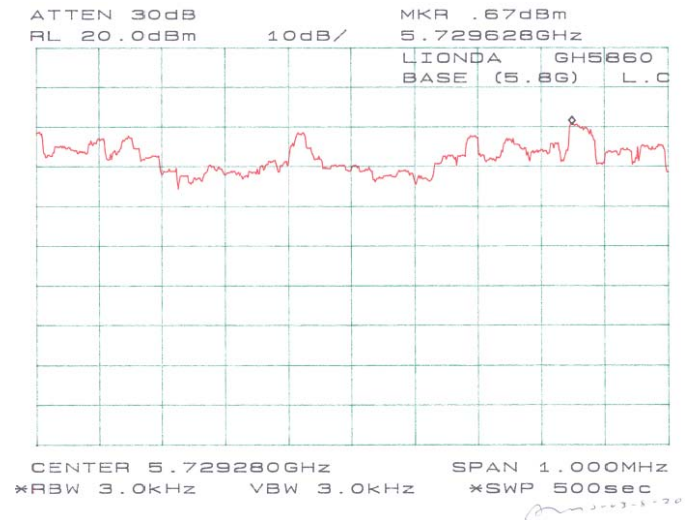

---

## 7 - 100 KHZ BANDWIDTH OF BAND EDGES

---

### 7.1 Standard Applicable

According to §15.247(c), in *any* 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) see §15.205(c)).

### 7.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### 7.3 Test Equipment

Please refer to Section 1.6 Item8.

## 7.4 Measure Results



### 7.3.1 Test Result for 2.4GHz Band



Unit	Frequency	Standard (dBm)	Result
Base	Low	$\leq 20$	Compliant
	Mid	$\leq 20$	Compliant
	High	$\leq 20$	Compliant



### 7.3.2 Test Result for 5.8GHz Band

Unit	Frequency	Standard (dBm)	Result
Base	Low	$\leq 20$	Compliant
	Mid	$\leq 20$	Compliant
	High	$\leq 20$	Compliant



Please refer to following pages for plots of band edge.

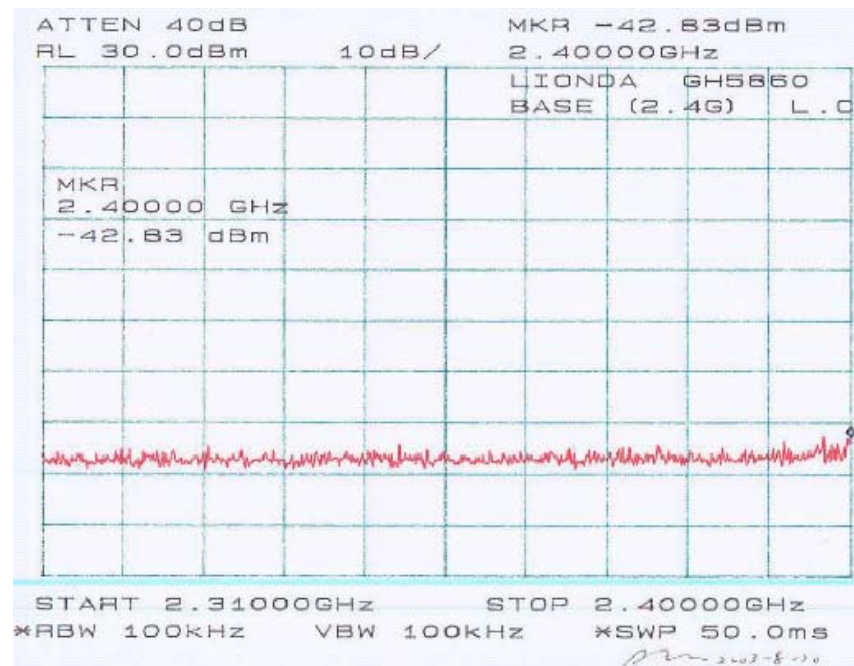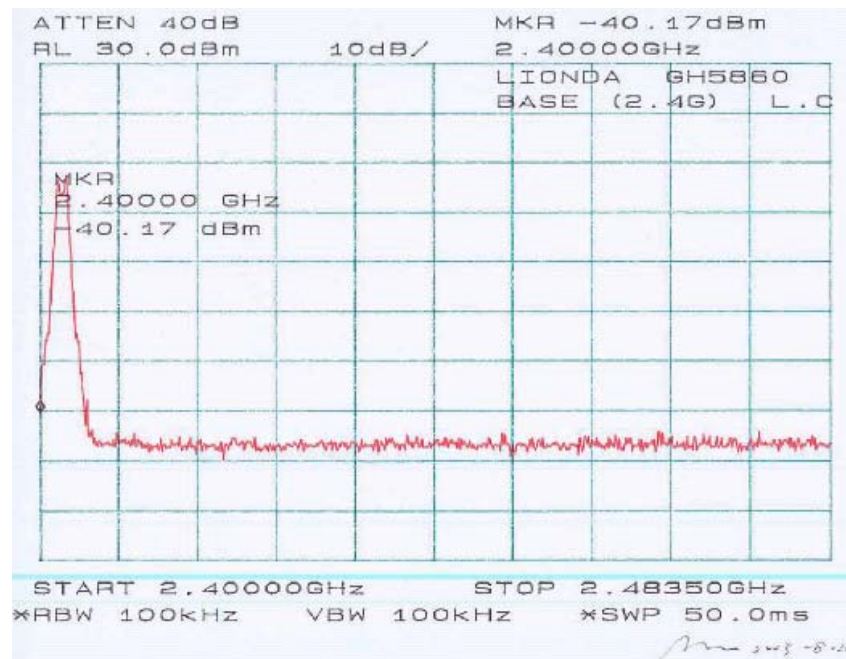

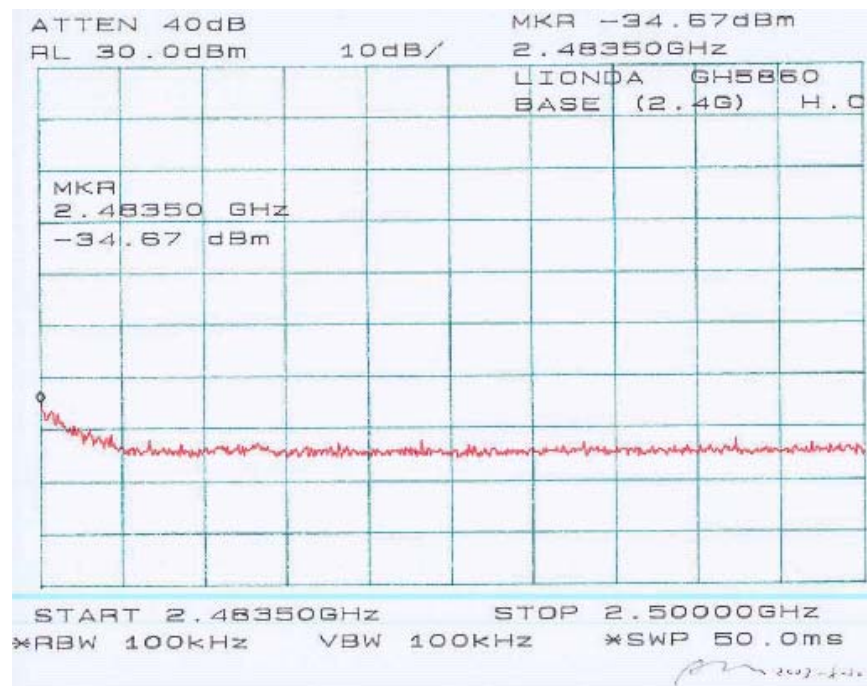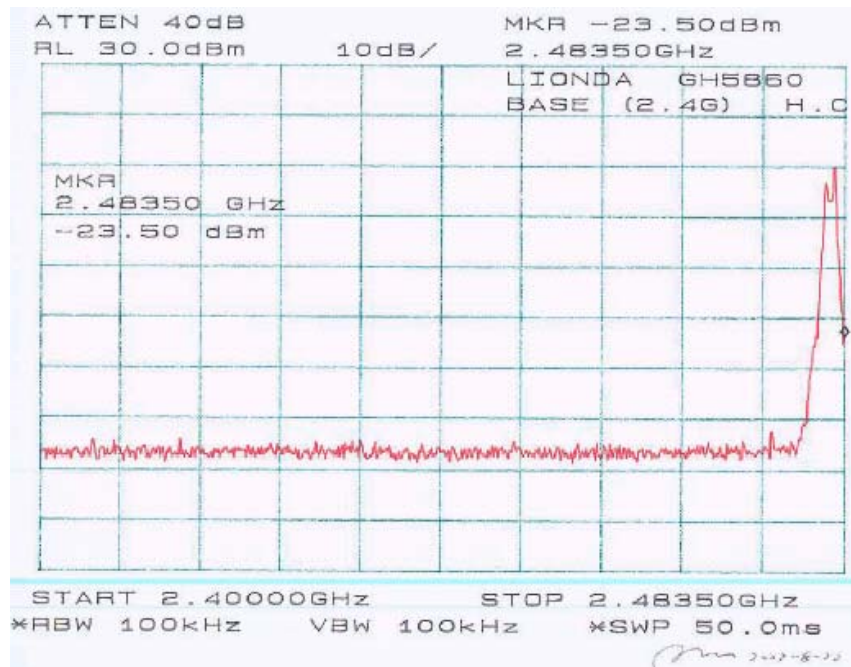

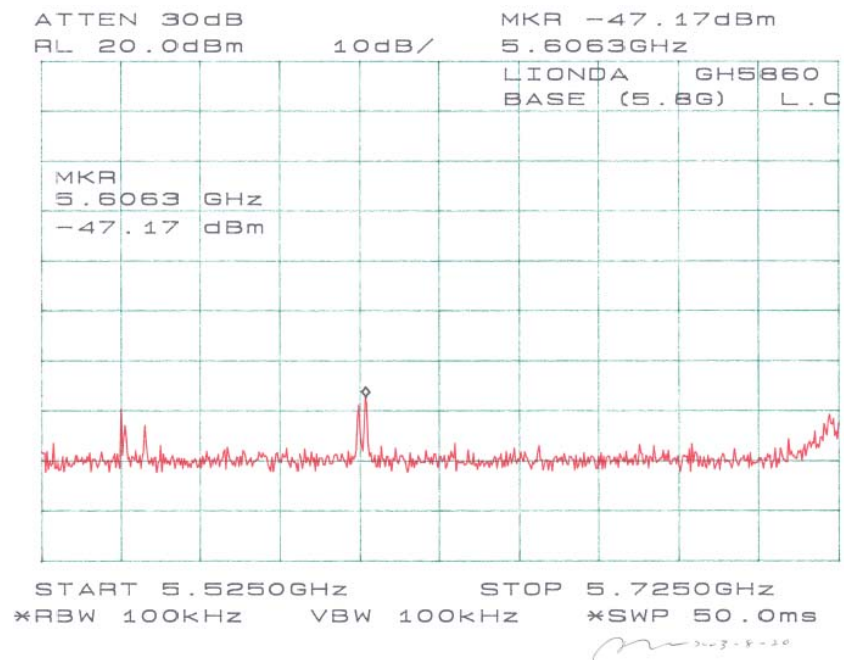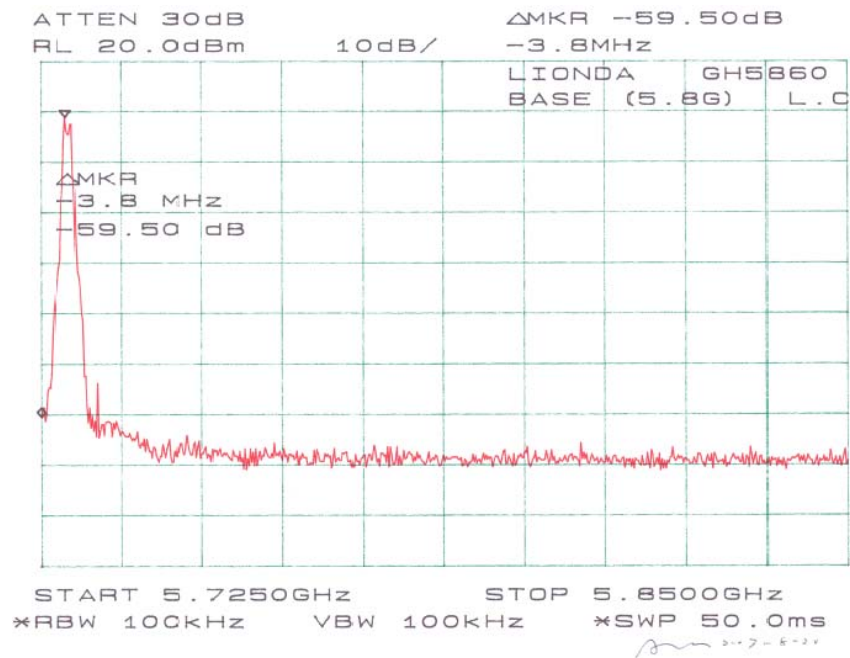



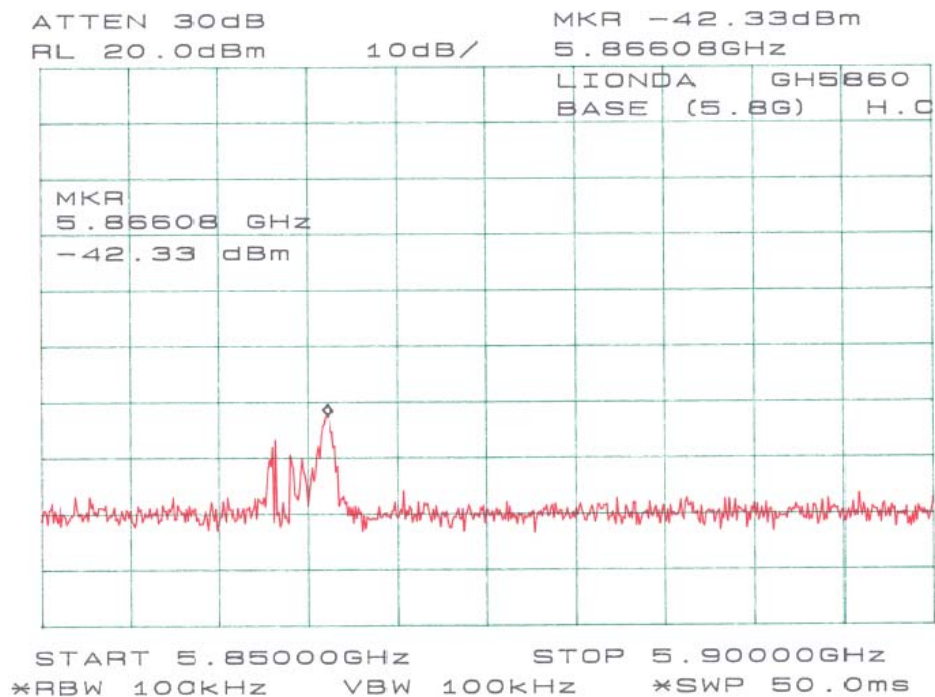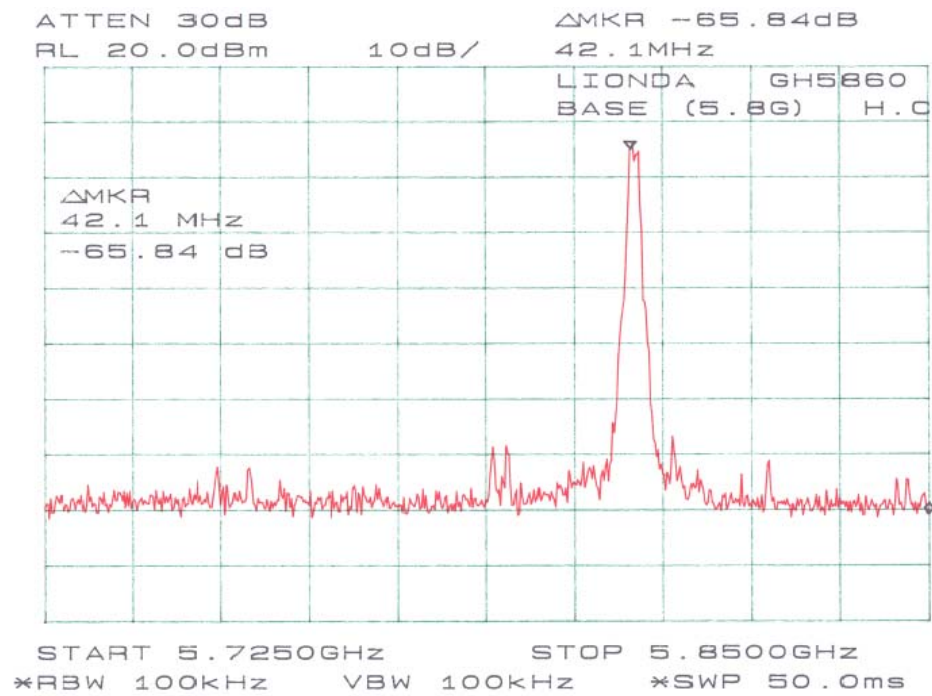

---

## **10 - SPURIOUS EMISSION AT ANTENNA TERMINAL**

---

### **10.1 Standard Applicable**

Requirements: CFR 47, §2.1051.

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in §2.1057.



### **10.2 Measurement Procedure**



1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set the SA on Max-Hold Mode, and then keep the EUT in transmitting mode. Record all the signals from each channel until each one has been recorded.
4. Set the SA on View mode and then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.



### **10.3 Measurement Result**

Please refer to following pages for plots of spurious emission.





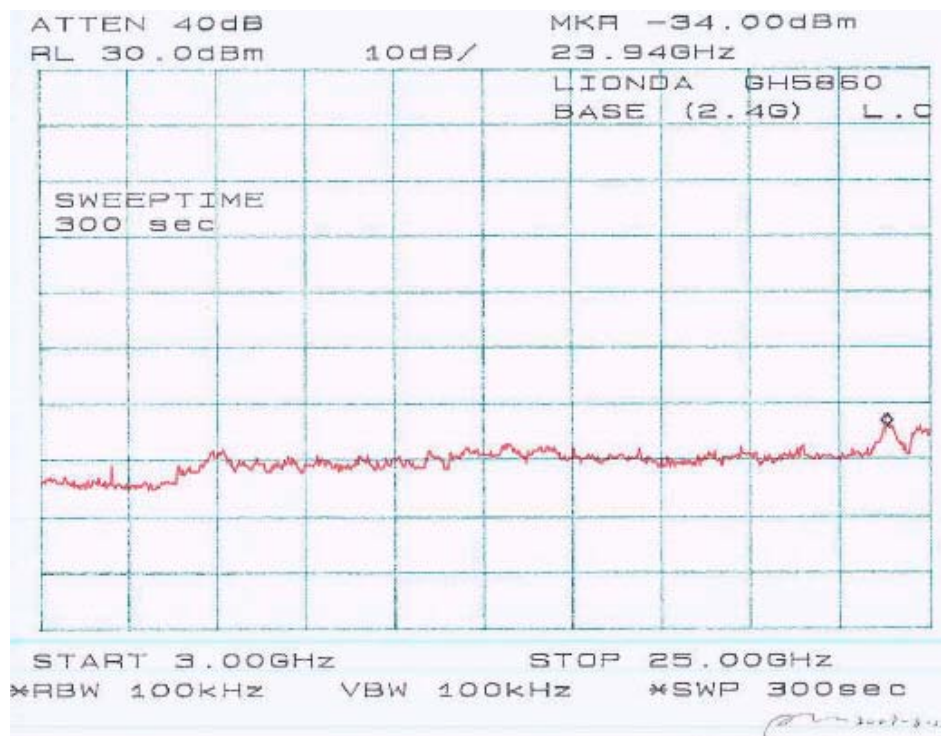
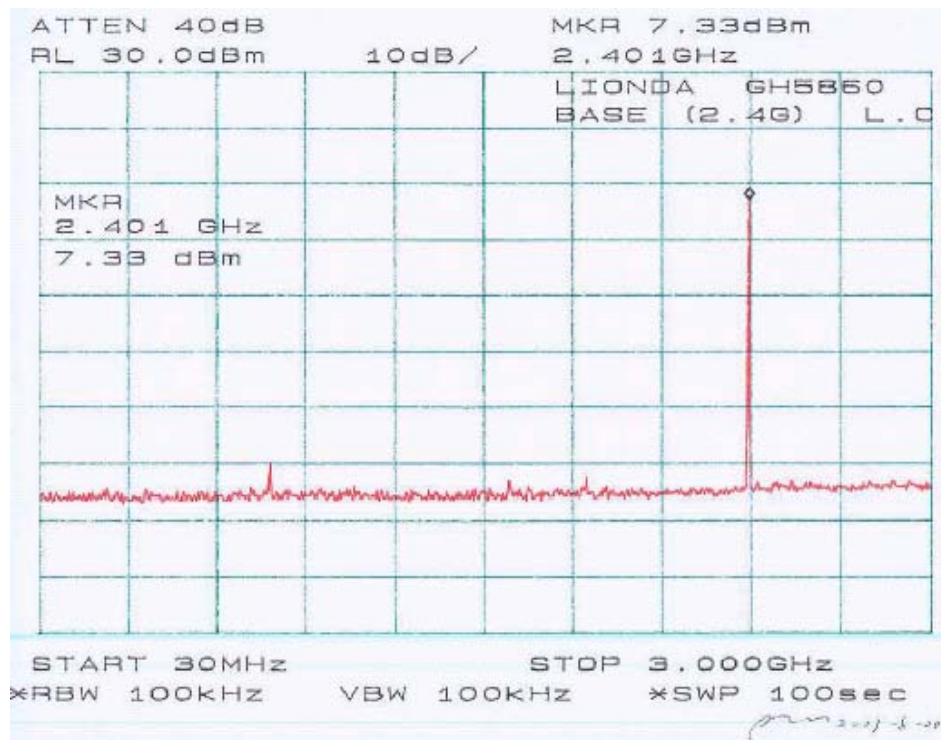


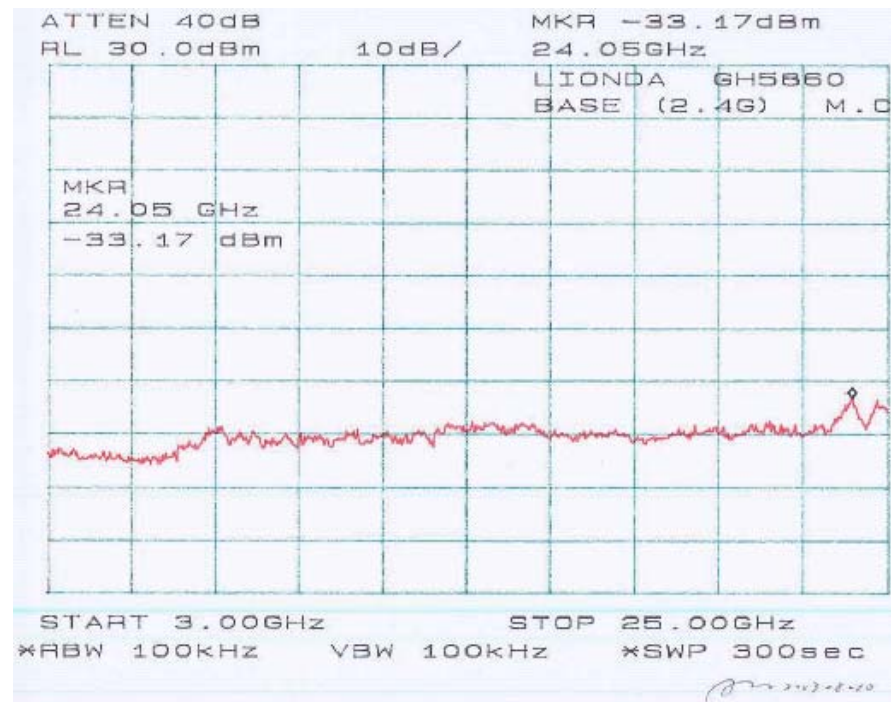
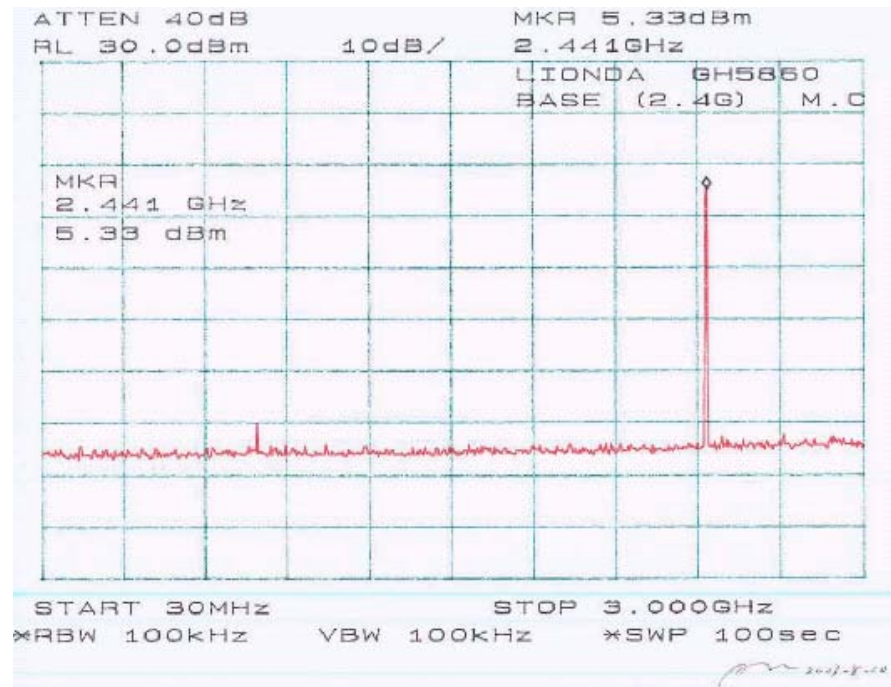


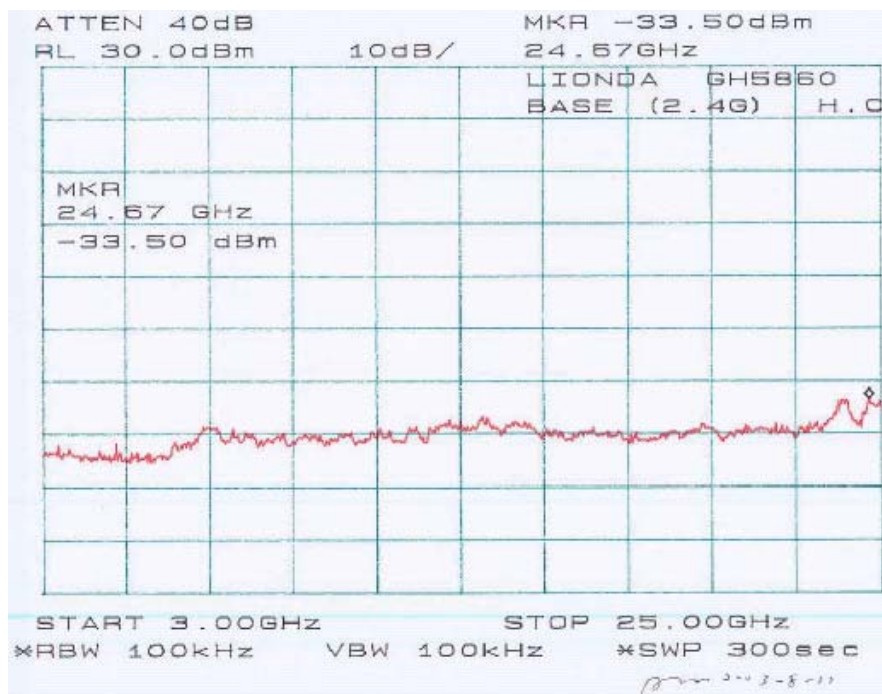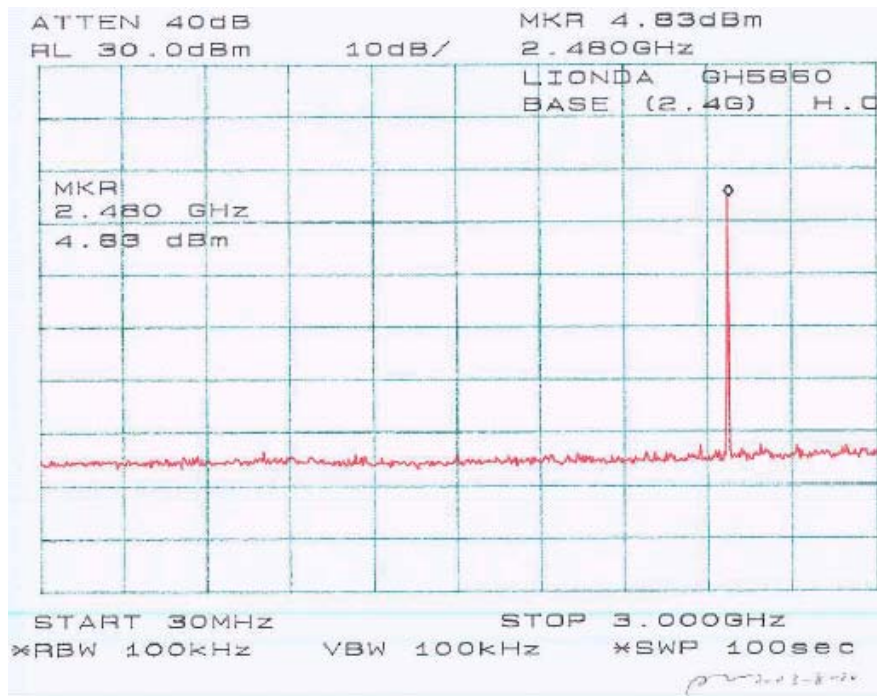



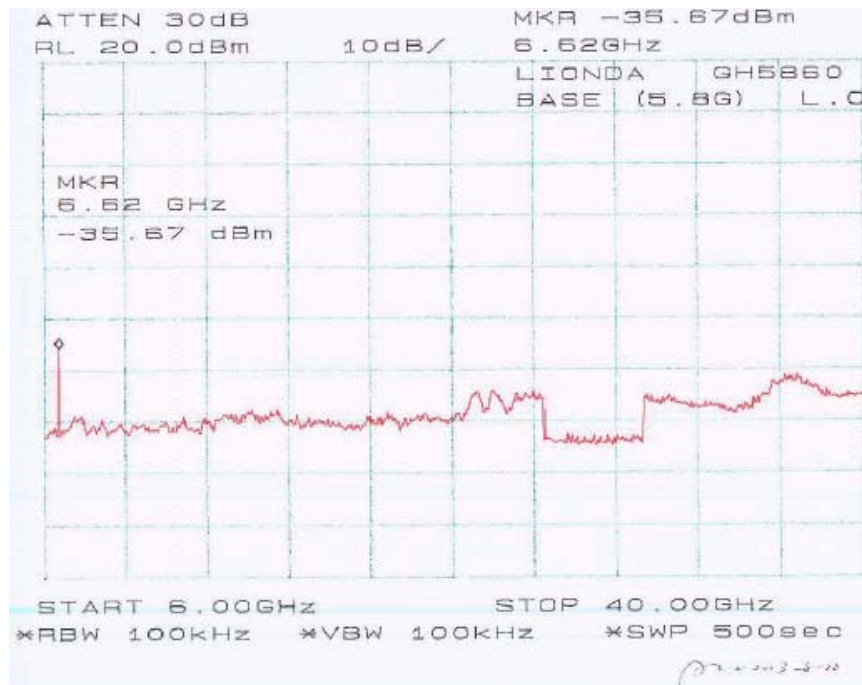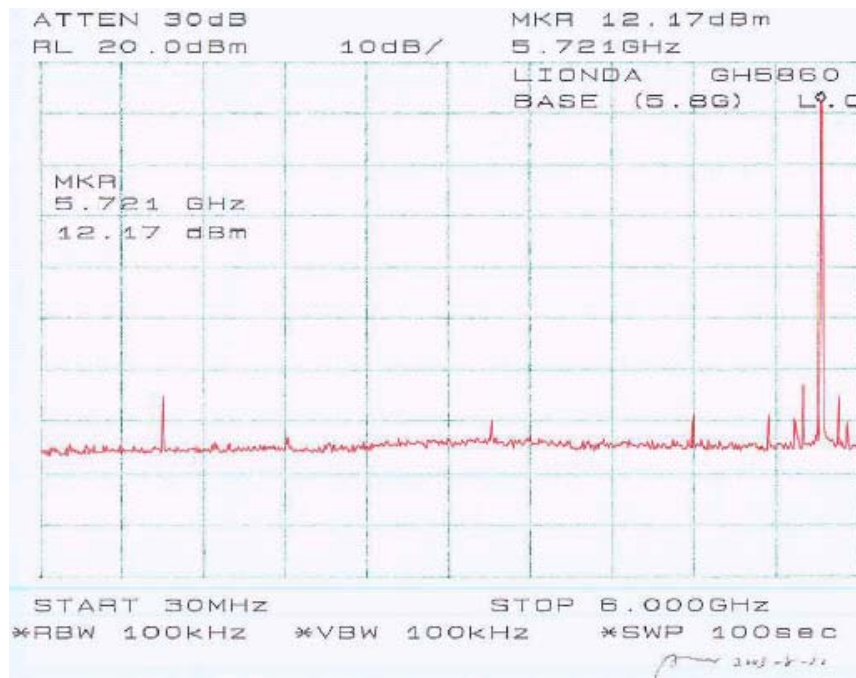

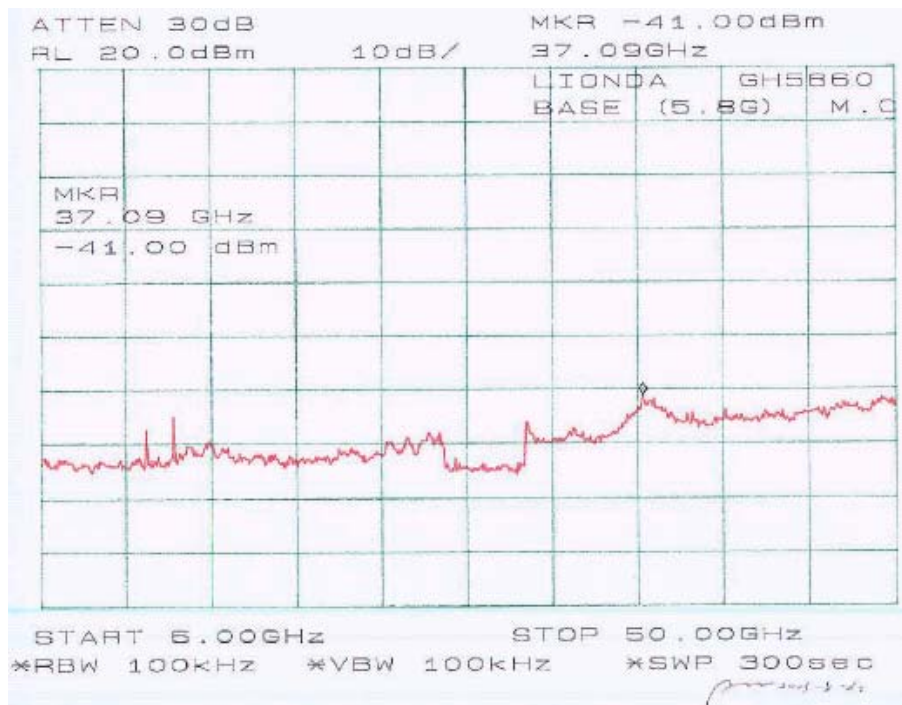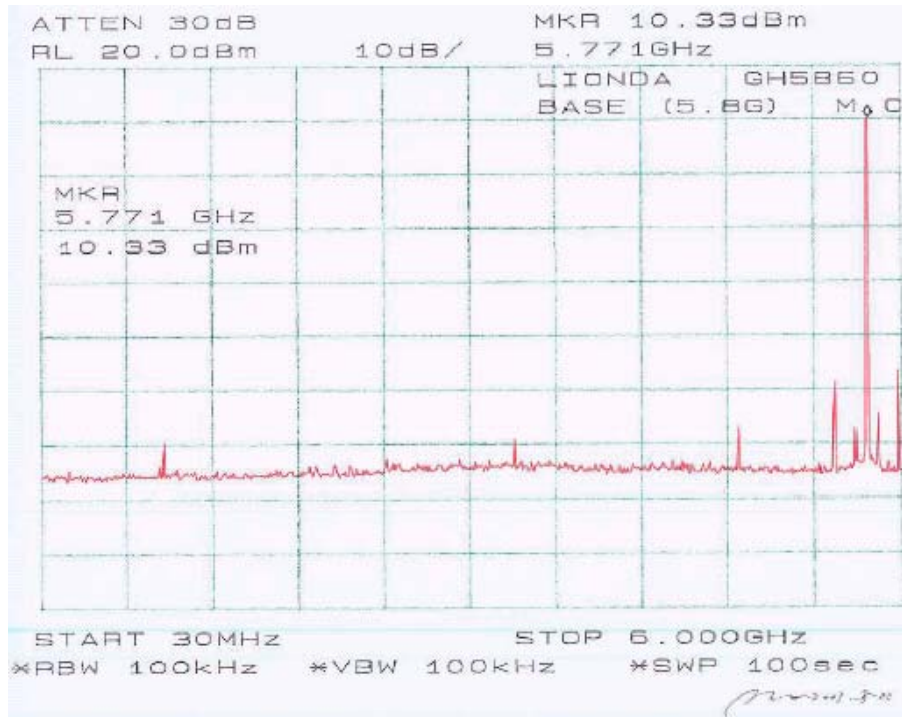

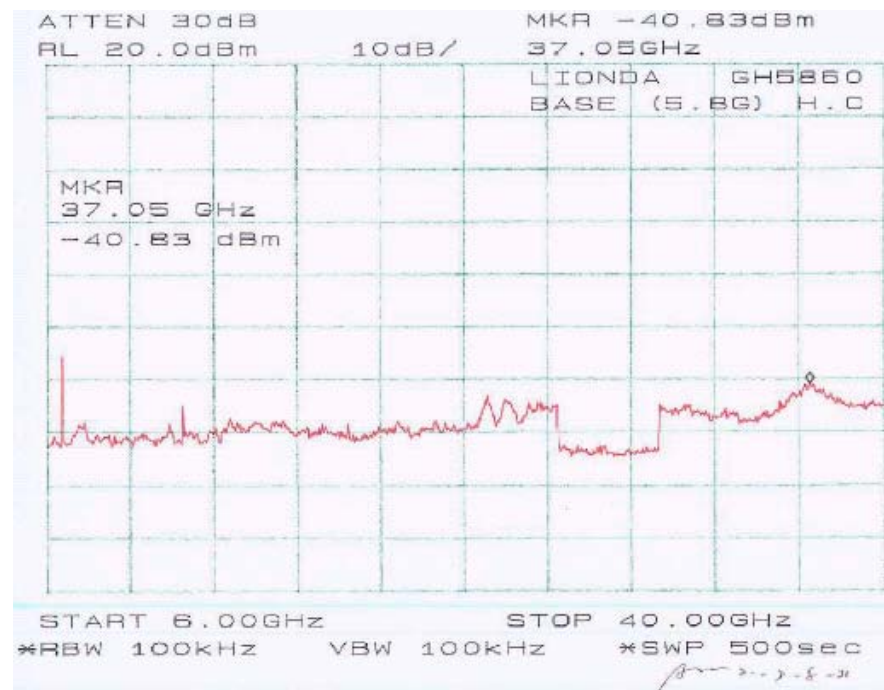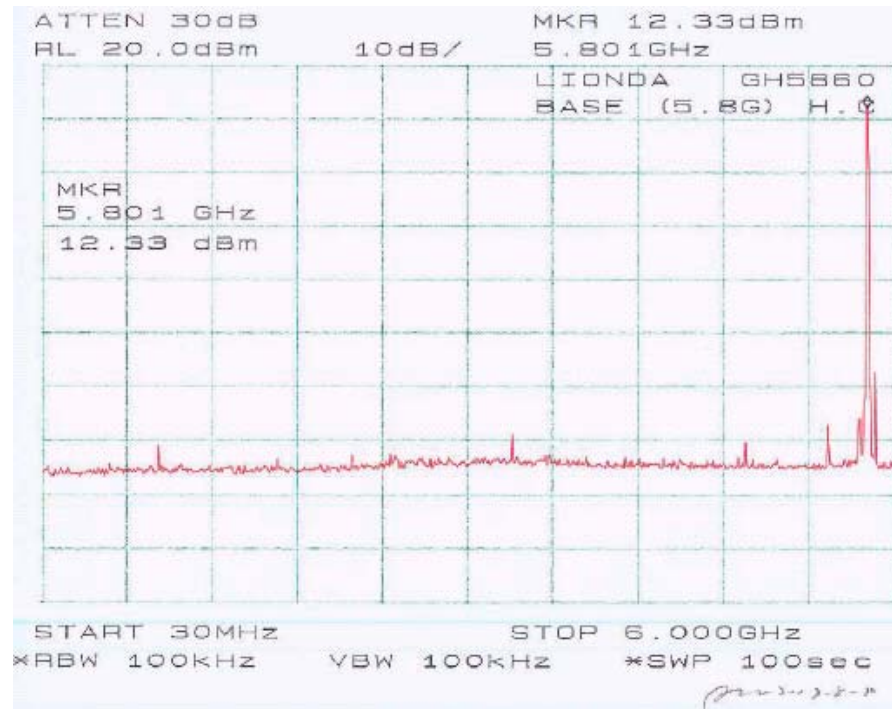

---

## **11 - ANTENNA REQUIREMENT**

---

### **11.1 Standard Applicable**

For intentional device, according to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to § 15.247 (1), if transmitting antennas of directional gain greater than 6 dBi are used the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### **11.2 Antenna Connected Construction**

The directional gain of antenna used for transmitting is 0 dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Please see EUT photo for details.

## 12 - SPURIOUS RADIATED EMISSION

### 12.1 Measurement Uncertainty

All measurements involve certain levels of uncertainties. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at BACL is  $\pm 4.0$  dB.

According to §15.205, except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 – 0.110	16.42 – 16.423	399.9 – 410	4.5 – 5.15
<sup>1</sup> 0.495 – 0.505	16.69475 – 16.69525	608 – 614	5.35 – 5.46
2.1735 – 2.1905	16.80425 – 16.80475	960 – 1240	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1300 – 1427	8.025 – 8.5
4.17725 – 4.17775	37.5 – 38.25	1435 – 1626.5	9.0 – 9.2
4.20725 – 4.20775	73 – 74.6	1645.5 – 1646.5	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1660 – 1710	10.6 – 12.7
6.26775 – 6.26825	108 – 121.94	1718.8 – 1722.2	13.25 – 13.4
6.31175 – 6.31225	123 – 138	2200 – 2300	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2310 – 2390	15.35 – 16.2
8.362 – 8.366	156.52475 – 156.52525	2483.5 – 2500	17.7 – 21.4
8.37625 – 8.38675	156.7 – 156.9	2655 – 2900	22.01 – 23.12
8.41425 – 8.41475	162.0125 – 167.17	3260 – 3267	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3332 – 3339	31.2 – 31.8
12.51975 – 12.57725	240 – 285	3345.8 – 3358	36.43 – 36.5
13.36 – 13.41	322 – 335.4	3600 – 4400	( <sup>2</sup> )

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510MHz

<sup>2</sup> Above 38.6

Except as provided in paragraph (d) and (e), the filed strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

According to §15.209, the device shall meet radiated emission general requirements.



Except for Class A device, the filed strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency of Emission (MHz)	Field Strength (Microvolts/meter)	dB (dB $\mu$ V/meter)
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

According to §15.247(c), attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the §15.209(a) limits.

## 12.2 EUT Setup

The radiated emission tests were performed in the open area 3-meter test site, using the setup in accordance with the ANSI C63.4-2001. The specification used was the FCC 15 Subpart C limits.

The EUT was connected to a 110 VAC / 60 Hz power source and it was placed on the back edge of the test table. The simulator was placed on one side of the EUT, and the telephone was placed on the other side of the EUT. The rear of the EUT and peripherals were placed flushed with the rear of the tabletop.

The spacing between the peripherals was 10 centimeters.

Input / Output cables were draped along the edge of the test table and bundle when necessary.

The EUT was tested in 3 orthogonal positions.

## 12.3 Spectrum Analyzer Setup

According to FCC CFR 47, Section 15.31, the EUT was tested to 50GHz. During the radiated emission test, the spectrum analyzer was set with the following configurations:

Start Frequency ..... 30 MHz  
 Stop Frequency ..... 50GHz  
 Sweep Speed ..... Auto  
 IF Bandwidth..... 1 MHz  
 Video Bandwidth ..... 1 MHz  
 Quasi-Peak Adapter Bandwidth ..... 120 kHz  
 Quasi-Peak Adapter Mode ..... Normal  
 Resolution Bandwidth..... 1MHz

## 12.4 Test Procedure

For the radiated emissions test, the Host PC system power cord was connected to the AC floor outlet since the power supply used in the EUT did not provide an accessory power outlet.

Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB $\mu$ V of specification limits), and are distinguished with a "Qp" in the data table.

## 12.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "**Margin**" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB $\mu$ V means the emission is 7dB $\mu$ V below the maximum limit for Subpart C. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Subpart C Limit}$$

## 12.6 Summary of Test Results

According to the data in section 11.7, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.207 and 15.247, and had the worst margin of:

*2.4GHz:*

- 3.2 dB at 4804.60.00 MHz in the **Vertical** polarization, Low Channel
- 3.0 dB at 4882.43 MHz in the **Vertical** polarization, Middle Channel
- 3.1 dB at 4962.30 MHz in the **Vertical** polarization, High Channel
- 4.1 dB at 110.59 MHz in the **Horizontal** polarization, Unwanted Emission

*5.8GHz:*

- 13.7 dB at 11458.56 MHz in the **Vertical** polarization, Low Channel
- 6.1 dB at 11536.38 MHz in the **Vertical** polarization, Middle Channel
- 13.9 dB at 11616.26 MHz in the **Vertical** polarization, High Channel
- 12.4 dB at 572.44 MHz in the **Vertical** polarization, Unwanted Emission

**12.6.1 Final test data, 2.4GHz**

INDICATED			TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 SUBPART C	
Frequency MHz	Ampl. dBμV/m	Comments	Angle Degree	Height Meter	Polar H/ V	Antenna dBμV/m	Cable DB	Amp. DB	Corr. Ampl. dBμV/m	Limit dBμV/m	Margin dB
Low Channel, 1-25GHz											
2402.30	102.7	Fund/Peak	210	1.5	v	28.1	3.4	35.2	99.0		
2402.30	103.2	Fund/Peak	180	1.5	h	28.1	3.4	35.2	99.5		
2402.30	73.8	Fund/Ave	210	1.5	v	28.1	3.4	35.2	70.1		
2402.30	75.4	Fund/Ave	180	1.5	h	28.1	3.4	35.2	71.7		
4804.60	46.4	Ave	270	1.5	v	32.5	4.9	33.0	50.8	54	-3.2
4804.60	44.5	Ave	310	1.6	h	32.5	4.9	33.0	48.9	54	-5.1
4804.60	59.1	Peak	270	1.5	v	32.5	4.9	33.0	63.5	74	-10.5
7206.90	36.2	Ave	110	1.5	v	35.1	5.6	33.5	43.4	54	-10.6
4804.60	56.4	Peak	310	1.6	h	32.5	4.9	33.0	60.8	74	-13.2
7206.90	33.5	Ave	150	1.3	h	35.1	5.6	33.5	40.7	54	-13.3
7206.90	48.3	Peak	110	1.5	v	35.1	5.6	33.5	55.5	74	-18.5
7206.90	47.6	Peak	150	1.3	h	35.1	5.6	33.5	54.8	74	-19.2
Middle Channel, 1-25GHz											
2441.22	104.8	Fund/Peak	230	1.5	v	28.1	3.4	35.2	101.1		
2441.22	105.9	Fund/Peak	180	1.7	h	28.1	3.4	35.2	102.2		
2441.22	76.2	Fund/Ave	230	1.5	v	28.1	3.4	35.2	72.5		
2441.22	76.5	Fund/Ave	180	1.7	h	28.1	3.4	35.2	72.8		
4882.43	46.6	Ave	180	1.2	v	32.5	4.9	33.0	51.0	54	-3.0
4882.43	45.8	Ave	130	1.5	h	32.5	4.9	33.0	50.2	54	-3.8
4882.43	60.3	Peak	180	1.2	v	32.5	4.9	33.0	64.7	74	-9.3
7323.65	36.3	Ave	90	1.2	v	35.1	5.6	33.5	43.5	54	-10.5
4882.43	57.6	Peak	130	1.5	h	32.5	4.9	33.0	62.0	74	-12.0
7323.65	33.8	Ave	30	1.2	h	35.1	5.6	33.5	41.0	54	-13.0
7323.65	49.2	Peak	90	1.2	v	35.1	5.6	33.5	56.4	74	-17.6
7323.65	48.6	Peak	30	1.2	h	35.1	5.6	33.5	55.8	74	-18.2
High Channel, 1-25GHz											
2481.15	97.7	Fund/Peak	270	1.8	v	28.1	3.4	35.2	94.0		
2481.15	99.1	Fund/Peak	0	2.0	h	28.1	3.4	35.2	95.4		
2481.15	72.8	Fund/Ave	270	1.8	v	28.1	3.4	35.2	69.1		
2481.15	73.6	Fund/Ave	0	2.0	h	28.1	3.4	35.2	69.9		
4962.30	46.5	Ave	0	1.4	v	32.5	4.9	33.0	50.9	54	-3.1
4962.30	44.3	Ave	150	1.4	h	32.5	4.9	33.0	48.7	54	-5.3
4962.30	59.3	Peak	0	1.4	v	32.5	4.9	33.0	63.7	74	-10.3
7443.45	36.3	Ave	30	1.5	v	35.1	5.6	33.5	43.5	54	-10.5
4962.30	56.2	Peak	150	1.4	h	32.5	4.9	33.0	60.6	74	-13.4
7443.45	33.4	Ave	330	1.5	h	35.1	5.6	33.5	40.6	54	-13.4
7443.45	48.2	Peak	30	1.5	v	35.1	5.6	33.5	55.4	74	-18.6
7443.45	47.9	Peak	330	1.5	h	35.1	5.6	33.5	55.1	74	-18.9

**Unintentional Emission**

Frequency MHz	Indicated		Table	Antenna		Correction Factor			FCC 15 Subpart B	
	Ampl. dB $\mu$ V/m	Direction Degree	Height Meter	Polar H/V	Antenna dB $\mu$ V/m	Cable Loss dB $\mu$ V/m	Amp. dB	Corr. Ampl. dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin dB
110.59	51.6	180	1.2	h	11.3	1.5	25.0	39.4	43.5	-4.1
178.19	49.3	270	1.8	v	13.1	1.9	25.0	39.3	43.5	-4.2
165.87	48.9	310	1.6	h	13.0	1.8	25.0	38.7	43.5	-4.8
414.64	44.8	30	1.5	h	16.4	2.6	25.0	38.8	46	-7.2
515.09	38.2	270	1.8	v	18.4	3.1	25.0	34.7	46	-11.3
368.65	39.4	270	1.8	v	15.5	2.4	25.0	32.3	46	-13.7
258.03	40.5	90	1.5	v	13.3	2.2	25.0	31.0	46	-15.0
228.20	40.8	270	1.8	v	11.8	2.2	25.0	29.8	46	-16.2

Note:

FUND = Fundamental  
AVG = average

**12.6.2 Final test data, 5.8GHz**

INDICATED			TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 SUBPART C	
Frequency MHz	Ampl. dBμV/m	Comments	Angle Degree	Height Meter	Polar H/ V	Antenna dBμV/m	Cable DB	Amp. DB	Corr. Ampl. dBμV/m	Limit dBμV/m	Margin dB
Low Channel, 1-25GHz											
5729.28	105.4	Fund/Peak	30	1.5	v	34.1	5.4	35.2	109.7		
5729.28	104.9	Fund/Peak	0	1.5	h	34.1	5.4	35.2	109.2		
5729.28	101.3	Fund/Ave	30	1.5	v	34.1	5.4	35.2	105.6		
5729.28	101.2	Fund/Ave	0	1.5	h	34.1	5.4	35.2	105.5		
11458.56	32.6	Ave	180	1.5	v	35.1	5.6	33.0	40.3	54	-13.7
11458.56	32.2	Ave	210	1.6	h	35.1	5.6	33.0	39.9	54	-14.1
17187.84	31.9	Ave	180	1.5	v	35.1	5.6	33.5	39.1	54	-14.9
17187.84	31.0	Ave	250	1.3	h	35.1	5.6	33.5	38.2	54	-15.8
11458.56	45.2	Peak	180	1.5	v	35.1	5.6	33.0	52.9	74	-21.1
11458.56	44.9	Peak	210	1.6	h	35.1	5.6	33.0	52.6	74	-21.4
17187.84	44.7	Peak	180	1.5	v	35.1	5.6	33.5	51.9	74	-22.1
17187.84	44.3	Peak	250	1.3	h	35.1	5.6	33.5	51.5	74	-22.5
Middle Channel, 1-25GHz											
5768.19	99.7	Fund/Peak	0	1.2	v	34.1	5.4	35.2	104.0		
5768.19	99.9	Fund/Peak	330	1.5	h	34.1	5.4	35.2	104.2		
5768.19	68.5	Fund/Ave	0	1.2	v	34.1	5.4	35.2	72.8		
5768.19	68.7	Fund/Ave	330	1.5	h	34.1	5.4	35.2	73.0		
11536.38	40.2	Ave	90	1.5	v	35.1	5.6	33.0	47.9	54	-6.1
11536.38	37.4	Ave	30	1.2	h	35.1	5.6	33.0	45.1	54	-8.9
17304.57	35.4	Ave	60	1.2	h	35.1	5.6	33.5	42.6	54	-11.4
17304.57	35.2	Ave	90	1.5	v	35.1	5.6	33.5	42.4	54	-11.6
11536.38	54.2	Peak	90	1.5	v	35.1	5.6	33.0	61.9	74	-12.1
11536.38	49.3	Peak	30	1.2	h	35.1	5.6	33.0	57.0	74	-17.0
17304.57	46.5	Peak	60	1.2	h	35.1	5.6	33.5	53.7	74	-20.3
17304.57	46.1	Peak	90	1.5	v	35.1	5.6	33.5	53.3	74	-20.7
High Channel, 1-25GHz											
5808.13	101.2	Fund/Peak	270	1.5	v	34.1	5.4	35.2	105.5		
5808.13	104.5	Fund/Peak	0	1.5	h	34.1	5.4	35.2	108.8		
5808.13	97.5	Fund/Ave	270	1.5	v	34.1	5.4	35.2	101.8		
5808.13	100.3	Fund/Ave	0	1.5	h	34.1	5.4	35.2	104.6		
11616.26	32.4	Ave	0	1.4	v	35.1	5.6	33.0	40.1	54	-13.9
11616.26	32.0	Ave	150	1.4	h	35.1	5.6	33.0	39.7	54	-14.3
17424.39	31.6	Ave	30	1.5	v	35.1	5.6	33.5	38.8	54	-15.2
17424.39	30.6	Ave	330	1.5	h	35.1	5.6	33.5	37.8	54	-16.2
11616.26	44.9	Peak	0	1.4	v	35.1	5.6	33.0	52.6	74	-21.4
11616.26	44.6	Peak	150	1.4	h	35.1	5.6	33.0	52.3	74	-21.7
17424.39	44.5	Peak	30	1.5	v	35.1	5.6	33.5	51.7	74	-22.3
17424.39	44.1	Peak	330	1.5	h	35.1	5.6	33.5	51.3	74	-22.7

**Unintentional Emission**

Frequency MHz	Indicated		Table Height Meter	Antenna		Correction Factor			FCC 15 Subpart B	
	Ampl. dB $\mu$ V/m	Direction Degree		Polar H/V	Antenna dB $\mu$ V/m	Cable Loss dB $\mu$ V/m	Amp. dB	Corr. Ampl. dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin dB
572.44	36.3	15	1.8	v	19.3	3.0	25.0	33.6	46	-12.4
110.74	43.1	180	1.2	h	11.3	1.5	25.0	30.9	43.5	-12.6
357.95	38.7	30	1.2	v	15.5	2.3	25.0	31.5	46	-14.5
228.01	42.1	210	1.5	v	11.8	2.2	25.0	31.1	46	-14.9
328.49	37.8	320	1.5	v	15.5	2.3	25.0	30.6	46	-15.4
167.21	39.6	70	1.6	h	13.0	1.8	25.0	29.4	46	-16.6

Note:

FUND = Fundamental

AVG = average

## 13 - CONDUCTED EMISSIONS

---

### 13.1 Measurement Uncertainty

All measurements involve certain levels of uncertainties. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at BACL is  $\pm 2.4$  dB.

### 13.2 EUT Setup

The measurement was performed in the shield room, using the same setup per ANSI C63.4-2001 measurement procedure. The specification used was FCC 15 Subpart B limits.

The EUT was connected to a 110 VAC / 60 Hz power source and it was placed on the back edge of the test table. The simulator was placed on one side of the EUT, and the telephone was placed on the other side of the EUT. The rear of the EUT and peripherals were placed flushed with the rear of the tabletop.

The spacing between the peripherals was 10 centimeters.

Input / Output cables were draped along the edge of the test table and bundle when necessary.

### 13.3 Spectrum Analyzer Setup

The spectrum analyzer was set with the following configurations during the conduction test:

Start Frequency.....	150 kHz
Stop Frequency.....	30 MHz
Sweep Speed.....	Auto
IF Bandwidth.....	10 kHz
Video Bandwidth.....	10 kHz
Quasi-Peak Adapter Bandwidth.....	9 kHz
Quasi-Peak Adapter Mode.....	Normal

### 13.4 Test Procedure

During the conducted emission test, the power cord of the host system was connected to the auxiliary outlet of the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of each modes tested to ensure EUT is compliant with all installation combination.

All data was recorded in the peak detection mode. Quasi-peak readings were only performed when an emission was found to be marginal (within  $-4$  dB $\mu$ V of specification limits). Quasi-peak readings are distinguished with a "Qp".

### 13.5 Summary of Test Results

According to the data in section 13.6, the EUT complies with the FCC Conducted margin for a Class B device, with the *worst* margin reading of:

-41.3 dB $\mu$ V at 0.150 MHz in the Neutral mode

### 13.6 Conducted Emissions Test Data

LINE CONDUCTED EMISSIONS				FCC PART 15 CLASS B	
Frequency MHz	Amplitude dB $\mu$ V	Detector Qp/Ave/Peak	Phase Line/Neutral	Limit dB $\mu$ V	Margin dB
0.150	24.7	QP	Neutral	66	-41.3
29.600	7.2	AVG	Line	50	-42.8
0.810	2.9	AVG	Line	46	-43.1
29.600	15.4	QP	Line	60	-44.6
28.300	4.2	AVG	Neutral	50	-45.8
0.150	17.4	QP	Line	66	-48.6
0.280	11.9	QP	Neutral	61	-49.1
28.300	9.5	QP	Neutral	60	-50.5
0.810	5.0	QP	Line	56	-51.0
0.280	-3.4	AVG	Neutral	51	-54.4
0.150	0.1	AVG	Neutral	56	-55.9
0.150	0.1	AVG	Line	56	-55.9

### 13.7 Plot of Conducted Emissions Test Data

Plot(s) of Conducted Emissions Test Data is presented hereinafter as reference.



Bay Area Compliance Laboratory Corp  
CLASS B

25, Aug 03 15:00


EUT: GH5860  
Manuf: Lionda  
De Cond: Normal  
Operator: Ben  
Comments: N

## Scan Settings (3 Ranges)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
150k	1M	5k	9k	QP+AV	20ms	10dB LN	OFF
1M	2M	10k	9k	QP+AV	1ms	10dB LN	OFF
2M	30M	100k	9k	QP+AV	1ms	10dB LN	OFF

Final Measurement: X QP + AV  
Meas Time: 1 s  
Subranges: 25  
Acc Margin: 6dB

◇ MKF : 250.00 kHz 11.8 dBuV  
▽ MKF : 250.00 kHz -3.4 dBuV

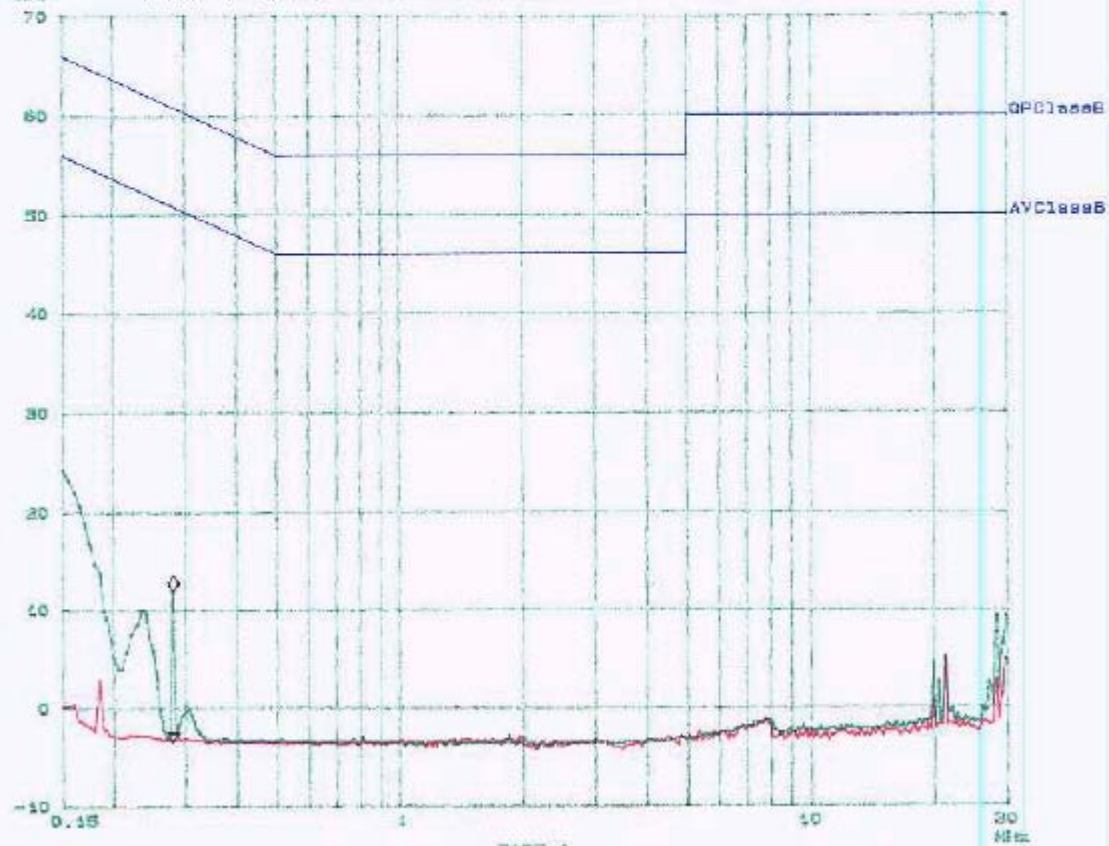

Bay Area Compliance Laboratory Corp  
CLASS B

28. Aug 08 14:42

EUT: GH8860  
Manuf: Lionda  
Op Cond: Normal  
Operator: HANS  
Comment: L

## Scan Settings (3 Ranges)

Start	Stop	Step	IF BW	Detector	X-Time	Atten	Preamp
150k	1M	5k	9k	QP+AV	20ms	10dB	OFF
1M	3M	10k	9k	QP+AV	1ms	10dB	OFF
3M	30M	100k	9k	QP+AV	1ms	10dB	OFF

Final Measurement: X QP /  $\Delta$  AV  
Meas Time: 1 s  
Subranges: 28  
Acc Margin: 6dB

