



# FCC TEST REPORT

**REPORT NO.:** RF90042719

**MODEL NO.:** WE250-IF

**RECEIVED:** April 27, 2001

**TESTED:** May 4, 2001

**APPLICANT:** BroMax Communications, Inc.

**ADDRESS:** No.20, Kunag Fu Road, Hsin Chu Industrial Park, Hu Kou,  
Hsin Chu, Taiwan, R.O.C.

**ISSUED BY:** Advance Data Technology Corporation

**LAB LOCATION:**47, 14<sup>th</sup> Lin, Chiapao Tsuen, Linkou,  
Taipei, Taiwan, R.O.C.

This test report consists of 48 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by NVLAP or any U.S. government agencies. The test results in the report only apply to the tested sample.



Accredited Laboratory



# Table of Contents

<b>1</b>	<b>CERTIFICATION .....</b>	<b>4</b>
<b>2</b>	<b>SUMMARY OF TEST RESULTS.....</b>	<b>5</b>
<b>3</b>	<b>GENERAL INFORMATION .....</b>	<b>6</b>
3.1	GENERAL DESCRIPTION OF EUT .....	6
3.2	DESCRIPTION OF TEST MODES .....	7
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS .....	7
3.4	DESCRIPTION OF SUPPORT UNITS .....	7
<b>4</b>	<b>TEST PROCEDURES AND RESULTS .....</b>	<b>8</b>
4.1	CONDUCTED EMISSION MEASUREMENT .....	8
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT .....	8
4.1.2	TEST INSTRUMENTS .....	8
4.1.3	TEST PROCEDURES .....	9
4.1.4	TEST SETUP .....	10
4.1.5	TEST RESULTS .....	11
4.2	RADIATED EMISSION MEASUREMENT .....	17
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT .....	17
4.2.2	TEST INSTRUMENTS .....	18
4.2.3	TEST PROCEDURES .....	19
4.2.4	TEST SETUP .....	20
4.2.5	TEST RESULTS .....	21
4.3	6dB BANDWIDTH MEASUREMENT .....	25
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT .....	25
4.3.2	TEST INSTRUMENTS .....	25
4.3.3	TEST PROCEDURE.....	26
4.3.4	TEST SETUP .....	26
4.3.5	EUT OPERATING CONDITION.....	26
4.3.6	TEST RESULTS .....	27
4.4	MAXIMUM PEAK OUTPUT POWER.....	31
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT .....	31
4.4.2	INSTRUMENTS.....	31
4.4.3	TEST PROCEDURES .....	32
4.4.4	TEST SETUP .....	32
4.4.5	EUT OPERATING CONDITION.....	32
4.4.6	TEST RESULTS .....	33
4.5	POWER SPECTRAL DENSITY MEASUREMENT .....	34
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT .....	34
4.5.2	TEST INSTRUMENTS .....	34



4.5.3	TEST PROCEDURE.....	35
4.5.4	TEST SETUP .....	35
4.5.5	EUT OPERATING CONDITION.....	35
4.5.6	TEST RESULTS .....	36
4.6	BAND EDGES MEASUREMENT .....	40
4.6.1	LIMITS OF BAND EDGES MEASUREMENT .....	40
4.6.2	TEST INSTRUMENTS .....	40
4.6.3	TEST PROCEDURE.....	40
4.6.4	EUT OPERATING CONDITION.....	41
4.6.5	TEST RESULTS .....	41
4.6.6	NOTE ON BAND EDGE EMISSION.....	42
4.7	ANTENNA REQUIREMENT.....	45
4.7.1	STANDARD APPLICABLE .....	45
4.7.2	ANTENNA CONNECTED CONSTRUCTION.....	45
<b>5</b>	<b>PHOTOGRAPHS OF THE TEST CONFIGURATION.....</b>	<b>46</b>
<b>6</b>	<b>INFORMATION ON THE TESTING LABORATORIES.....</b>	<b>48</b>
ANNEX	PHOTOGRAPHS OF EUT	



# 1 CERTIFICATION

**PRODUCT :** PCMCIA 11M Wireless LAN Card  
**BRAND NAME :** BroMax  
**MODEL NO. :** WE250-IF  
**APPLICANT :** BroMax Communications, Inc.  
**STANDARDS :** 47 CFR Part 15, Subpart C (Section 15.247),  
ANSI C63.4-1992  
**SITE REGISTRATION NO. :** 90422 (FCC)  
IC 3789-5 (Canada IC)

We, **Advance Data Technology Corporation**, hereby certify that one sample WE250-IF of the designation has been tested in our facility on May 4, 2001.

The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions herein specified.

Tested by : Gary Chang , Date: May 7, 2001  
Gary Chang

Prepared by : Demi Chen , Date: May 7, 2001  
Demi Chen

Approved by : Harris W. Lai , Date: May 7, 2001  
Harris W. Lai

## 2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

<b>APPLIED STANDARD: 47 CFR Part 15, Subpart C</b>			
<b>STANDARD PARAGRAPH</b>	<b>TEST REQUIREMENTS</b>	<b>Compliance (Yes/No)</b>	<b>REMARK</b>
15.107	AC Power Conducted Emissions Spec.: 48 dBuV	Yes	Minimum passing margin is -12.05dBuV At 16.81605 MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Spec.: min. 500 KHz	Yes	10.02 MHz > 500 kHz
15.247(b)	Maximum Peak Output Power Spec.: max. 30 dBm	Yes	17.58dBm < 30 dBm
15.247(c)	Transmitter Radiated Emissions Spec.: Table 15.209	Yes	Minimum passing margin is -2.0dBuV At 2087.8 MHz
15.247(d)	Power Spectral Density Spec.: max. 8dBm	Yes	-13.44dBm < 8 dBm
15.247(c)	Band Edge Measurement	Yes	N/A

### NOTE:

The EUT is also considered as a PC peripheral, because the connection to computer is necessary for typical use. The test has been verified to comply with FCC Part 15, Subpart B, Class B – Computing Devices (FCC DoC). The engineering test report can be provided upon FCC requests.



### 3 GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	PCMCIA 11M Wireless LAN Card
<b>MODEL NO.</b>	WE250-IF
<b>POWER SUPPLY</b>	5VDC from Notebook
<b>DATA CABLE</b>	NA
<b>BANDWIDTH OF EACH CHANNEL</b>	22 MHz
<b>MODULATION TYPE</b>	CCK, BPSK, QPSK
<b>RADIO TECHNOLOGY</b>	DSSS
<b>TRANSFER RATE</b>	1/2/5.5/11Mbps
<b>FREQUENCY RANGE</b>	2412MHz ~ 2462MHz
<b>NUMBER OF CHANNEL</b>	11
<b>OUTPUT POWER</b>	13 dBm
<b>ANTENNA TYPE</b>	Stripline Antenna
<b>ASSOCIATED DEVICES</b>	NA

**Note:** This product is a PCMCIA LAN Card. It is plugged in the PCMCIA slot of notebook.

### 3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided in this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

Note: 1. Below 1 GHz, the channel 1, 6, and 11 were pre-tested in chamber.

The channel 1, worst case one, was chosen for final test.

2. Above 1 GHz, the channel 1, 6, and 11 were chosen for evaluation.

### 3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a PCMCIA 11M Wireless LAN Card, according to the specifications of the manufacturers, it must comply with the requirements of the following standards:

#### **FCC CFR 47 Part 15, Subpart C. (15.247)**

All tests have been performed and recorded as per the above standards.

### 3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

## 4 TEST PROCEDURES AND RESULTS

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY (MHz)	Class B (dBuV)	
	Quasi-peak	Average
0.45 – 30	48	-

Notes:

- 1.The lower limit shall apply at the transition frequencies.
- 2.All emanations from a class B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

#### 4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESHS30	828109/007	July 6, 2001
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ESH3-Z5	839135/006	July 9, 2001
ROHDE & SCHWARZ 4-wire ISN	ENY41	837032/016	Nov. 28, 2001
ROHDE & SCHWARZ 2-wire ISN	ENY22	837497/016	Dec. 3, 2001
EMCO-L.I.S.N. (for peripheral)	3825/2	9204-1964	July 9, 2001
Software	Cond-V2e	NA	NA
RF cable (JYEBAO)	RG-58A/U	Cable-C02.01	July 9, 2001
HP Terminator (For EMCO LISN)	11593A	E1-01-298	Feb. 20, 2002
HP Terminator (For EMCO LISN)	11593A	E1-01-299	Feb. 20, 2002
Shielded Room	Site 2	ADT-C02	NA
VCCI Site Registration No.	Site 2	C-240	NA

Notes:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.






#### 4.1.3 TEST PROCEDURES

1. Place the EUT at 0.4 meter away from the conduction wall of the shielded room.
2. Connect the EUT to the power mains through a Line Impedance Stabilization Network (LISN).
3. Connect the other support units to the other LISN too.
4. Make sure the  $50\Omega/ 50\mu\text{H}$  coupling impedance is provided to the measurement instrument by the LISNs.
5. Measure the maximum conducted interference on both lines of the power mains connects to the EUT, within frequency range 450KHz ~ 30MHz.
6. The emission level under limit by 10dB is not needed to be reported.

## 4.1.4 TEST SETUP

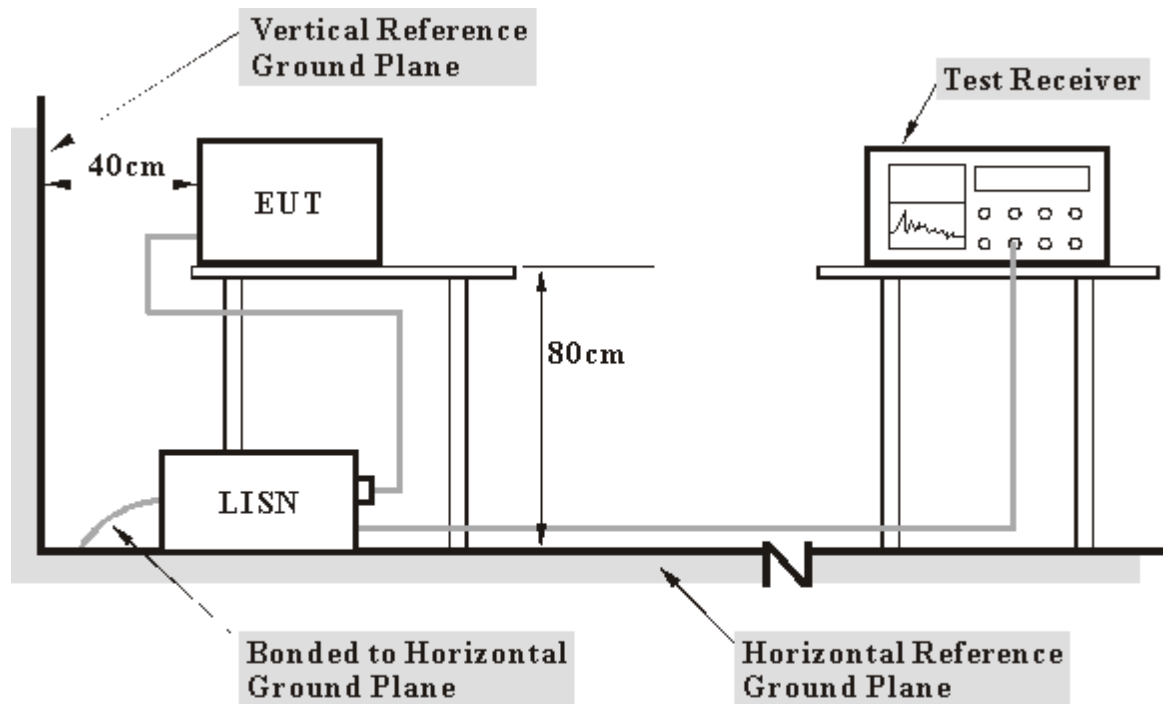

- Note:**
1. Support units were connected to second LISN.
  2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.


For the actual test configuration, please refer to the related Item in this test report (**Photographs of the Test Configuration**).



4.1.5 TEST RESULTS

<b>EUT</b>	PCMCIA 11M Wireless LAN Card	<b>Model</b>	WE250-IF
<b>Channel</b>	Channel 1	<b>Phase</b>	L
<b>Environmental Conditions</b>	23°C, 60%RH	<b>Tested By</b>	Gary Chang

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.45000	0.20	26.56	-	26.76	-	48.00	-	-21.24	-
2	0.51300	0.20	26.69	-	26.89	-	48.00	-	-21.11	-
3	2.94900	0.29	23.34	-	23.63	-	48.00	-	-24.37	-
4	7.58289	0.58	28.25	-	28.83	-	48.00	-	-19.17	-
5	16.57399	1.03	33.22	-	34.25	-	48.00	-	-13.75	-
6	27.77615	1.33	24.25	-	25.58	-	48.00	-	-22.42	-

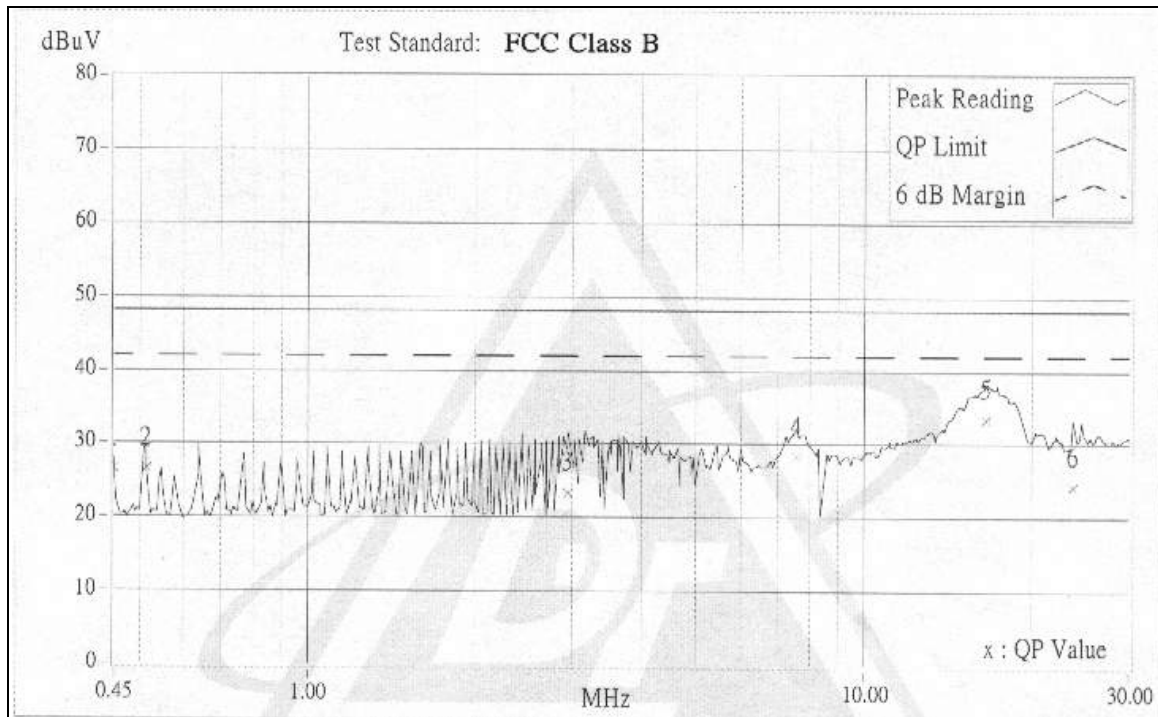


- Remarks:
1. "\*" : Undetectable
  2. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  3. "-" : NA
  4. The emission levels of other frequencies were very low against the limit.
  5. Margin value = Emission level - Limit value
  6. Emission Level = Correction Factor + Reading Value.



<b>EUT</b>	PCMCIA 11M Wireless LAN Card	<b>Model</b>	WE250-IF
<b>Channel</b>	Channel 1	<b>Phase</b>	N
<b>Environmental Conditions</b>	23°C, 60%RH	<b>Tested By</b>	Gary Chang

No	Freq.	Corr. Factor	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.45000	0.20	29.53	-	29.73	-	48.00	-	-18.27	-
2	0.51300	0.20	25.17	-	25.37	-	48.00	-	-22.63	-
3	0.51300	0.20	25.27	-	25.47	-	48.00	-	-22.53	-
4	5.38027	0.45	25.69	-	26.14	-	48.00	-	-21.86	-
5	16.47285	0.93	29.03	-	29.96	-	48.00	-	-18.04	-
6	24.68792	1.28	21.68	-	22.96	-	48.00	-	-25.04	-

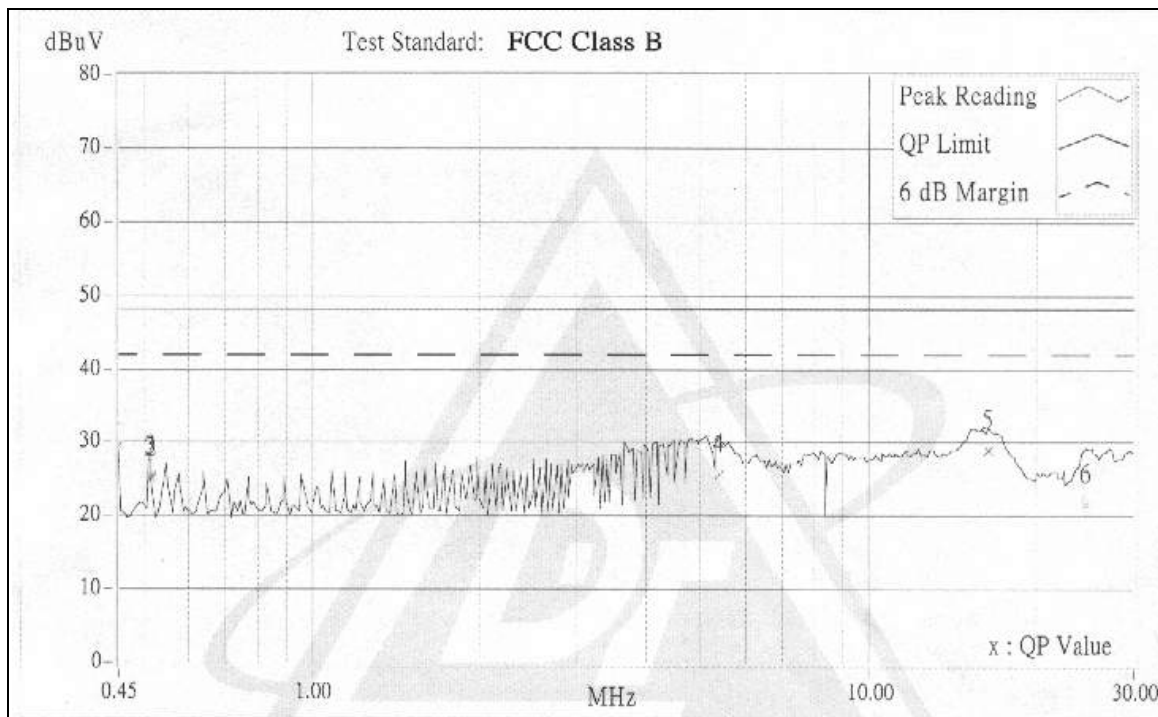


- Remarks:
1. "\*": Undetectable
  2. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  3. "-": NA
  4. The emission levels of other frequencies were very low against the limit.
  5. Margin value = Emission level - Limit value
  6. Emission Level = Correction Factor + Reading Value.



<b>EUT</b>	PCMCIA 11M Wireless LAN Card	<b>Model</b>	WE250-IF
<b>Channel</b>	Channel 6	<b>Phase</b>	L
<b>Environmental Conditions</b>	23°C, 60%RH	<b>Tested By</b>	Gary Chang


No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.51000	0.20	25.96	-	26.16	-	48.00	-	-21.84	-
2	0.76200	0.20	26.12	-	26.32	-	48.00	-	-21.68	-
3	2.92800	0.29	29.37	-	29.66	-	48.00	-	-18.34	-
4	7.51517	0.58	29.12	-	29.70	-	48.00	-	-18.30	-
5	16.43942	1.03	34.51	-	35.54	-	48.00	-	-12.46	-
6	26.51786	1.46	25.43	-	26.89	-	48.00	-	-21.11	-

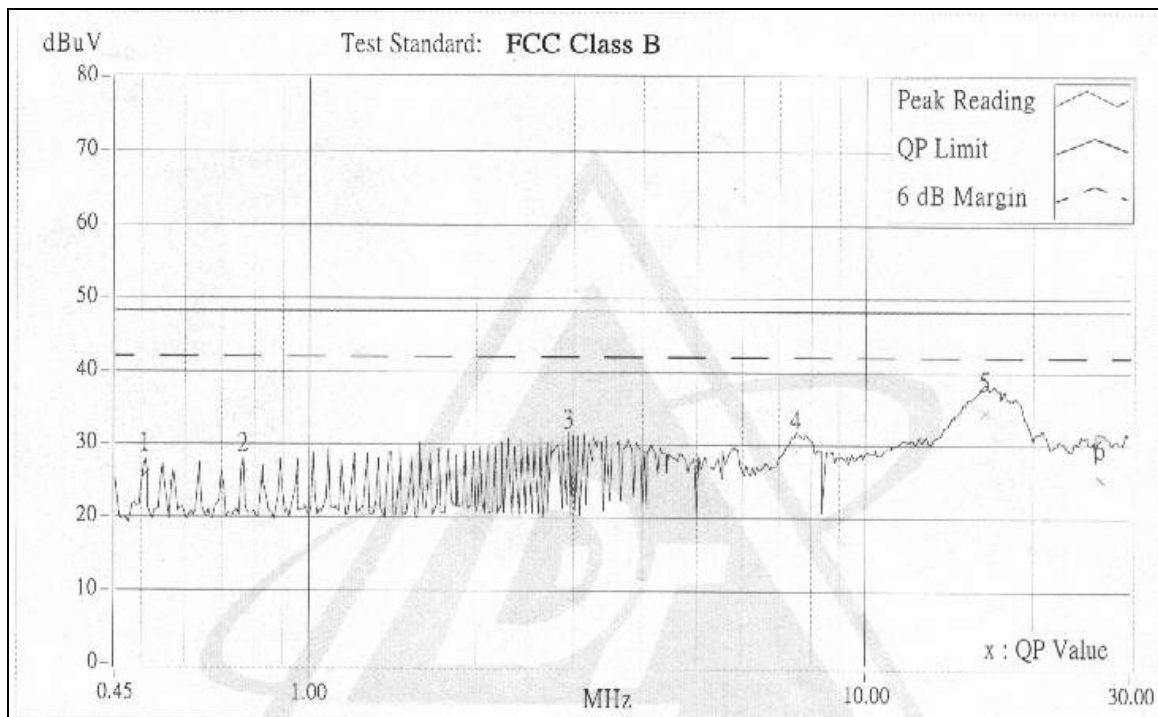

- Remarks:
1. "\*": Undetectable
  2. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  3. "-": NA
  4. The emission levels of other frequencies were very low against the limit.
  5. Margin value = Emission level - Limit value
  6. Emission Level = Correction Factor + Reading Value.

<b>EUT</b>	PCMCIA 11M Wireless LAN Card	<b>Model</b>	WE250-IF
<b>Channel</b>	Channel 6	<b>Phase</b>	N
<b>Environmental Conditions</b>	23, 60%RH	<b>Tested By</b>	Gary Chang

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.50992	0.20	25.31	-	25.51	-	48.00	-	-22.49	-
2	0.51000	0.20	25.35	-	25.55	-	48.00	-	-22.45	-
3	1.47162	0.20	22.53	-	22.73	-	48.00	-	-25.27	-
4	3.64316	0.36	26.18	-	26.54	-	48.00	-	-21.46	-
5	16.22894	0.92	28.82	-	29.74	-	48.00	-	-18.26	-
6	26.97128	1.34	21.89	-	23.23	-	48.00	-	-24.77	-

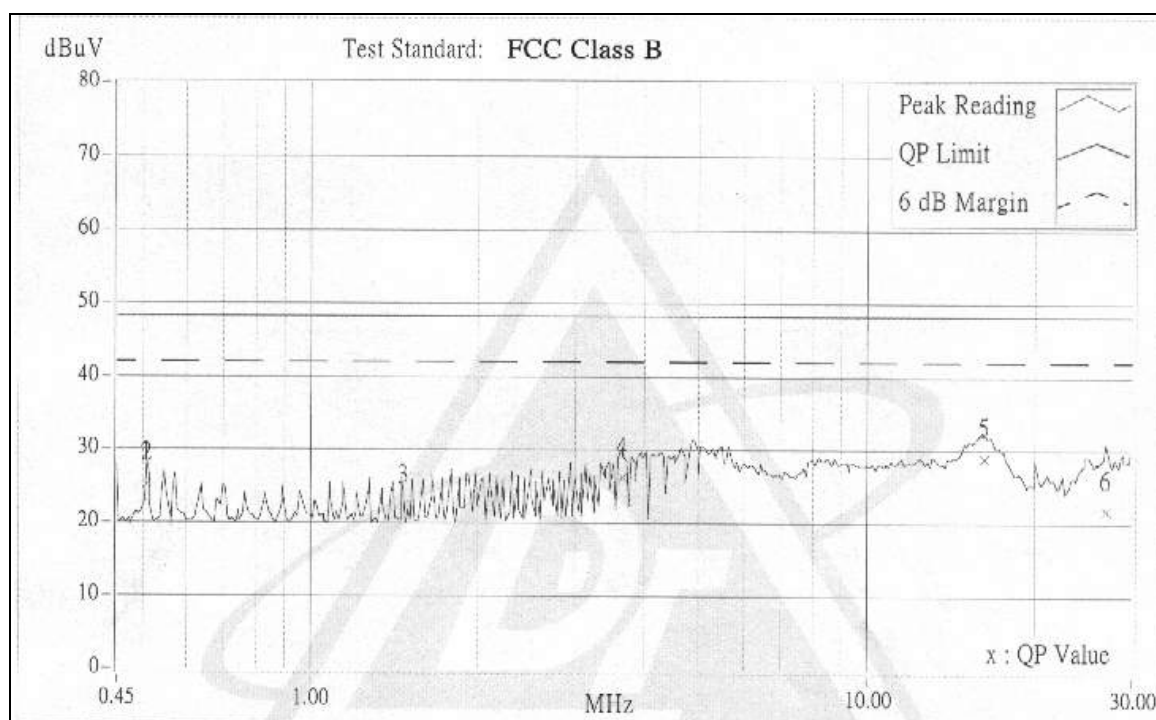


- Remarks:
1. "\*": Undetectable
  2. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  3. "-": NA
  4. The emission levels of other frequencies were very low against the limit.
  5. Margin value = Emission level - Limit value
  6. Emission Level = Correction Factor + Reading Value.



<b>EUT</b>	PCMCIA 11M Wireless LAN Card	<b>Model</b>	WE250-IF
<b>Channel</b>	Channel 11	<b>Phase</b>	L
<b>Environmental Conditions</b>	23°C, 60%RH	<b>Tested By</b>	Gary Chang

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.50400	0.20	24.75	-	24.95	-	48.00	-	-23.05	-
2	0.75900	0.20	25.31	-	25.51	-	48.00	-	-22.49	-
3	3.10500	0.31	28.57	-	28.88	-	48.00	-	-19.12	-
4	7.73764	0.59	27.94	-	28.53	-	48.00	-	-19.47	-
5	16.81605	1.04	34.91	-	35.95	-	48.00	-	-12.05	-
6	26.59813	1.46	26.40	-	27.86	-	48.00	-	-20.14	-

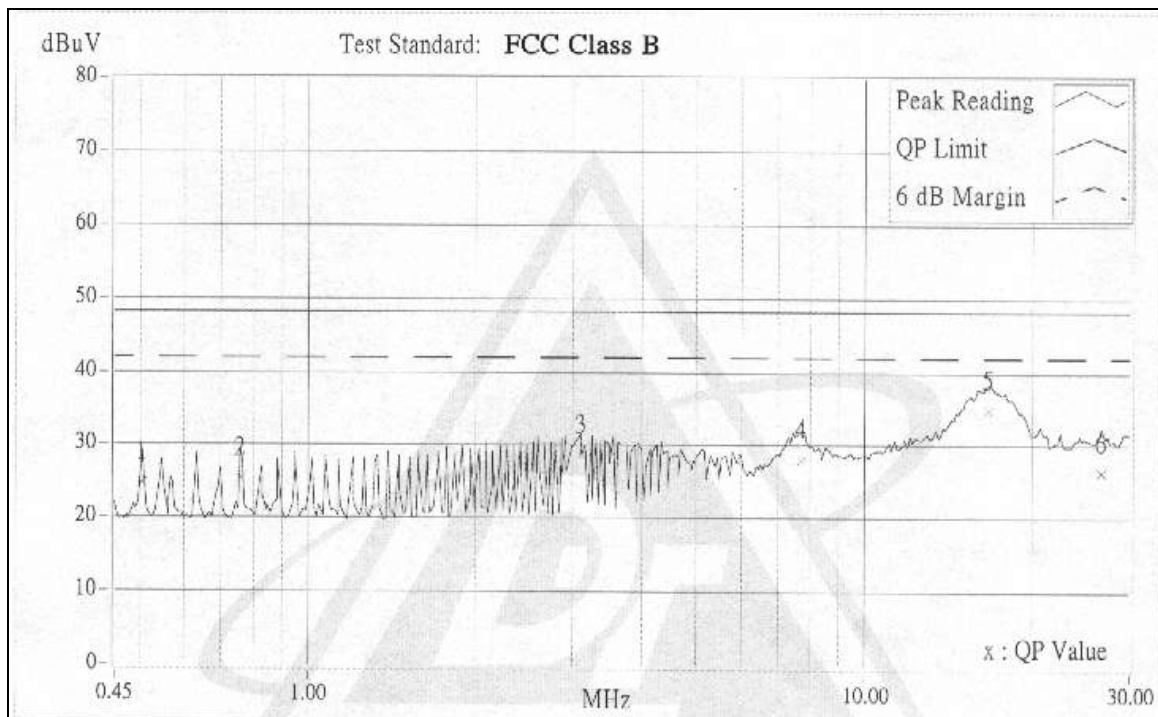


- Remarks:
1. "\*": Undetectable
  2. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  3. "-": NA
  4. The emission levels of other frequencies were very low against the limit.
  5. Margin value = Emission level - Limit value
  6. Emission Level = Correction Factor + Reading Value.





<b>EUT</b>	PCMCIA 11M Wireless LAN Card	<b>Model</b>	WE250-IF
<b>Channel</b>	Channel 11	<b>Phase</b>	N
<b>Environmental Conditions</b>	23°C, 60%RH	<b>Tested By</b>	Gary Chang

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.50100	0.20	20.59	-	20.79	-	48.00	-	-27.21	-
2	0.54600	0.20	24.12	-	24.32	-	48.00	-	-23.68	-
3	5.12194	0.44	27.57	-	28.01	-	48.00	-	-19.99	-
4	8.72000	0.56	19.66	-	20.22	-	48.00	-	-27.78	-
5	16.55403	0.93	25.90	-	26.83	-	48.00	-	-21.17	-
6	25.17200	1.30	20.07	-	21.37	-	48.00	-	-26.63	-

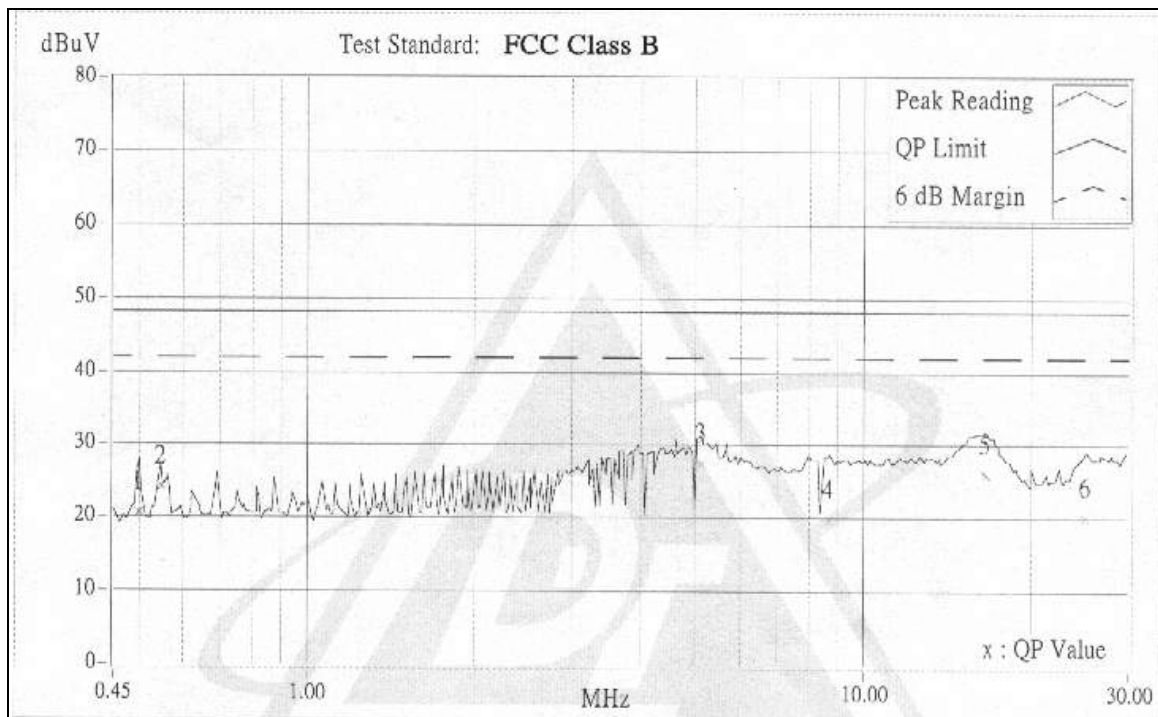

- Remarks:
1. "\*": Undetectable
  2. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  3. "-": NA
  4. The emission levels of other frequencies were very low against the limit.
  5. Margin value = Emission level - Limit value
  6. Emission Level = Correction Factor + Reading Value.



## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Field strength limits are at the distance of 3 meters, emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field Strength of Fundamental	
	$\mu\text{V}/\text{meter}$	$\text{dB}\mu\text{V}/\text{meter}$
30-88	100	40.0
88-216	150	43.5
216-960	200	46.0
Above 960	500	54.0

As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

### LIMIT OF RADIATED EMISSION OF FCC PART 15, SUBPART B FOR FREQUENCY ABOVE 1000 MHz

FREQUENCY (MHz)	Class B (at 3m)	
	$\text{uV}/\text{m}$	$\text{dBuV}/\text{m}$
Above 1000	500	54.0

- Note: 1. The lower limit shall apply at the transition frequencies.  
 2. Emission level ( $\text{dBuV}/\text{m}$ ) =  $20 \log$  Emission level ( $\text{uV}/\text{m}$ ).  
 3. All emanation from a class B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

#### 4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
*HP Spectrum Analyzer	8590L	3544A01176	May 7, 2002
*HP Preamplifier	8447D	2944A08485	Nov. 4, 2001
* HP Preamplifier	8449B	3008A01201	Dec. 13, 2001
* ROHDE & SCHWARZ TEST RECEIVER	ESMI	839013/007 839379/002	Jan. 25, 2002
SCHWARZBECK Tunable Dipole Antenna	VHA 9103 UHA 9105	E101051 E101055	Nov. 23, 2001
* CHASE BILOG Antenna	CBL6112A	2221	Aug. 4, 2001
* EMCO Turn Table	1060	1115	NA
* SHOSHIN Tower	AP-4701	A6Y005	NA
* Software	AS61D	NA	NA
* ANRITSU RF Switches	MP59B	M35046	Aug. 4, 2001
* TIMES RF cable	LMR-600	CABLE-ST5-01	Aug. 4, 2001
* Horn Antenna	BBHA9120-D	D130	July 10, 2001
Open Field Test Site	Site 5	ADT-R05	July 28, 2001
VCCI Site Registration No.	Site 5	R-1039	NA

NOTE: 1. The measurement uncertainty is less than +/- 3.0dB, which is calculated as per the NAMAS document NIS81.

2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.


3. "\*" = These equipments are used for the final measurement.

#### 4.2.3 TEST PROCEDURES

1. The EUT was placed on the turn table 0.8 meter above ground in 3 meter open area test site.
2. Set the resolution bandwidth to 120KHz in the test receiver and select Peak function to scan the frequency below 1 GHz.
3. Shift the interference-receiving antenna located in antenna tower upwards and downwards between 1 and 4 meters above ground and find out the local peak emission on frequency domain.
4. Locate the interference-receiving antenna at the position where the local peak reach the maximum emission.
5. Rotate the turn table and stop at the angle where the measurement device has maximum reading
6. Shift the interference-receiving antenna again to detect the maximum emission of the local peak
7. If the reading of the local peak under Peak function is lower than limit by 6dB, then Quasi Peak detection is not needed and this reading should be recorded. And if it is higher than Peak limit, then the test is fail. Others, switch the receiver to Quasi Peak function, set the resolution bandwidth to 100kHz and repeat the procedures C ~ F. If the reading is lower than limit, this reading should be recorded, otherwise, the test is fail.
8. Set the resolution and video bandwidth of the spectrum analyzer to 1MHz and repeat procedures C ~ F for frequency band from 1 GHz to 10 times carrier frequency.
9. If the reading for the local peak is lower than the Average limit, no further testing is needed in this local peak and this reading should be recorded. If it is higher than Average limit but lower than Peak limit, then set the resolution bandwidth to 1MHz and video bandwidth to 300Hz. Repeat procedures C ~ F. If the maximum reading is lower than Average limit, then this reading should be recorded. If it is higher, then the test is fail.

- Note:1. The frequency range of verification is either from 30 MHz to 1GHz or from 30 MHz up to 10 times carrier frequency of EUT (whichever is the highest frequency range).
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for frequency below 1GHz.
  3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 300 Hz for frequency above 1GHz.

## 4.2.4 TEST SETUP

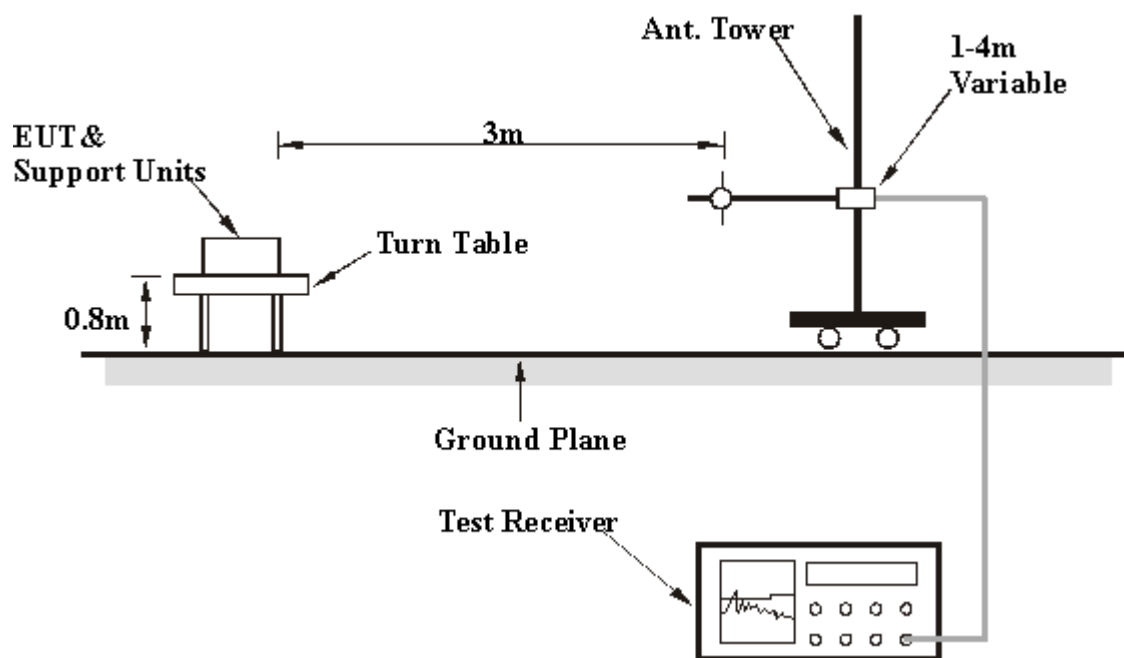

For the actual test configuration, please refer to the related Item in this test report (**Photographs of the Test Configuration**).

## 4.2.5 TEST RESULTS

## Digital Portion

<b>EUT</b>	PCMCIA 11M Wireless LAN Card	<b>Model</b>	WE250-IF
<b>Mode</b>	Channel 1	<b>Detector Function</b>	Quasi-Peak
<b>Frequency Range</b>	30-1000 MHz	<b>Test Distance</b>	3M
<b>Environmental Conditions</b>	23°C, 60%RH	<b>Tested By</b>	Gary Chang

**ANTENNA POLARITY: VERTICAL**

Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
263.98	12.07	45.25	33.2	46.0	-12.8	185	-7
308.36	11.08	44.97	33.9	46.0	-12.1	261	293
440.93	7.80	45.79	38.0	46.0	-8.0	133	11
527.93	6.29	41.84	35.5	46.0	-10.5	210	357
660.30	5.39	36.71	31.3	46.0	-14.7	219	29
747.88	3.98	32.49	28.5	46.0	-17.5	210	163
792.87	3.78	35.79	32.0	46.0	-14.0	110	143

**ANTENNA POLARITY: HORIZONTAL**

Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
220.01	14.59	44.59	30.0	46.0	-16.0	107	352
264.01	12.07	46.86	34.8	46.0	-11.2	100	351
308.36	11.08	40.72	29.6	46.0	-16.4	102	345
351.96	9.75	43.87	34.1	46.0	-11.9	121	12
440.25	7.81	39.94	32.1	46.0	-13.9	135	251
880.00	2.83	34.00	31.2	46.0	-14.8	163	5

- Notes:
- 1 Emission level (dBuV/m) = Reading value (dBuV) - Correction Factor (dB)
  - 2 Correction Factor (dB) = Pre-amplifier Factor (dB)-Ant. Factor (dB)  
-Cable loss (dB)
  - 3 The other emission levels were very low against the limit.
  - 4 Margin value = Emission level - Limit value

**RF Portion**

<b>EUT</b>	PCMCIA 11M Wireless LAN Card	<b>Model</b>	WE250-IF
<b>Mode</b>	Channel 1	<b>Detector Function</b>	Peak, Average
<b>Frequency Range</b>	Above 1000 MHz	<b>Test Distance</b>	3M
<b>Environmental Conditions</b>	23°C , 60%RH	<b>Tested By</b>	Gary Chang

<b>ANTENNA POLARITY: Vertical</b>		<b>Detector Function :</b>				<b>6dB Bandwidth : 1MHz</b>				<b>Frequency Range : Above 1GHz</b>	
Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)		Antenna Height (cm)	Table Angle (Degree)
		P.K.	A.V.	P.K.	A.V.	P.K.	A.V.	P.K.	A.V.		
2037.9	-29.61	20.44	-	50.1	-	74.0	54.0	-23.9	-	100	142
*2413.3	-31.04	70.65	65.49	101.7	96.5	-	-	-	-	103	280
4075.2	-34.79	18.86	-	53.7	-	74.0	54.0	-20.3	-	140	129
4824.0	-36.55	15.89	-	52.4	-	74.0	54.0	-21.6	-	156	101

<b>ANTENNA POLARITY: Horizontal</b>		<b>Detector Function :</b>				<b>6dB Bandwidth:1MHz</b>				<b>Frequency Range: Above 1GHz</b>	
Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)		Antenna Height (cm)	Table Angle (Degree)
		P.K.	A.V.	P.K.	A.V.	P.K.	A.V.	P.K.	A.V.		
2037.7	-29.61	25.26	22.20	54.9	51.8	74.0	54.0	-20.9	-2.2	100	124
*2413.3	-31.04	75.32	70.21	106.4	101.3	-	-	-	-	100	126
4075.4	-34.79	16.50	-	51.3	-	74.0	54.0	-22.7	-	100	95
4823.5	-36.55	15.46	-	52.0	-	74.0	54.0	-22.0	-	228	185

- NOTES: 1. Emission level (dBuV/m) = Reading value (dBuV)-Correction Factor (dB).  
2. Correction Factor (dB) = Preamplifier Factor (dB)-Ant. Factor (dB)  
-Cable loss (dB)  
3. The other emission levels were very low against the limit.  
4. Margin value = Emission level - Limit value  
5. The limit value is defined as per 15.247  
6. “ \* “ : Fundamental frequency



<b>EUT</b>	PCMCIA 11M Wireless LAN Card	<b>Model</b>	WE250-IF
<b>Mode</b>	Channel 6	<b>Detector Function</b>	Peak, Average
<b>Frequency Range</b>	Above 1000 MHz	<b>Test Distance</b>	3M
<b>Environmental Conditions</b>	23°C , 60%RH	<b>Tested By</b>	Gary Chang

<b>ANTENNA POLARITY: Vertical</b>		<b>Detector Function :</b>				<b>6dB Bandwidth:1MHz</b>				<b>Frequency Range: Above 1GHz</b>	
Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)		Antenna Height (cm)	Table Angle (Degree)
		P.K.	A.V.	P.K.	A.V.	P.K.	A.V.	P.K.	A.V.		
2062.0	-29.69	20.97	-	50.7	-	74.0	54.0	-23.3	-	100	142
*2438.9	-31.16	71.00	66.00	102.2	97.2	-	-	-	-	103	280
4125.5	-34.90	19.27	16.91	54.2	51.8	74.0	54.0	-19.8	-2.2	140	129
4873.6	-36.69	14.75	-	51.4	-	74.0	54.0	-22.6	-	156	101

<b>ANTENNA POLARITY: Horizontal</b>		<b>Detector Function :</b>				<b>6dB Bandwidth:1MHz.</b>				<b>Frequency Range: Above 1GHz.</b>	
Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)		Antenna Height (cm)	Table Angle (Degree)
		P.K.	A.V.	P.K.	A.V.	P.K.	A.V.	P.K.	A.V.		
2062.7	-29.69	24.57	22.20	54.3	51.9	74.0	54.0	-19.7	-2.1	100	122
*2438.5	-31.16	75.93	70.70	107.1	101.9	-	-	-	-	100	126
4124.8	-34.87	16.31	-	51.2	-	74.0	54.0	-22.8	-	100	338
4874.9	-36.69	15.48	-	52.2	-	74.0	54.0	-21.8	-	113	45

- NOTES: 1. Emission level (dBuV/m) = Reading value (dBuV)-Correction Factor (dB).  
 2. Correction Factor (dB) = Preamplifier Factor (dB)-Ant. Factor (dB)  
 -Cable loss (dB)  
 3. The other emission levels were very low against the limit.  
 4. Margin value = Emission level - Limit value  
 5. The limit value is defined as per 15.247  
 6. “ \* “ : Fundamental frequency

<b>EUT</b>	PCMCIA 11M Wireless LAN Card	<b>Model</b>	WE250-IF
<b>Mode</b>	Channel 11	<b>Detector Function</b>	Peak, Average
<b>Frequency Range</b>	Above 1000MHz	<b>Test Distance</b>	3M
<b>Environmental Conditions</b>	23°C, 60%RH	<b>Tested By</b>	Gary Chang

<b>ANTENNA POLARITY: Vertical</b>		<b>Detector Function :</b>				<b>6dB Bandwidth:1MHz.</b>				<b>Frequency Range: Above 1GHz</b>	
Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)		Antenna Height (cm)	Table Angle (Degree)
		P.K.	A.V.	P.K.	A.V.	P.K.	A.V.	P.K.	A.V.		
2088.0	-29.81	18.18	-	48.0	-	74.0	54.0	-26.0	-	100	49
*2463.5	-31.24	71.43	65.02	102.7	96.3	-	-	-	-	100	259
2483.6	-31.31	12.94	-	44.3	-	74.0	54.0	-29.7	-	102	48
4176.0	-35.00	18.18	13.20	53.2	48.2	74.0	54.0	-20.8	-5.8	124	117
4924.1	-36.83	13.33	-	50.2	-	74.0	54.0	-23.8	-	100	330

<b>ANTENNA POLARITY: Horizontal</b>		<b>Detector Function :</b>				<b>6dB Bandwidth:1MHz.</b>				<b>Frequency Range: Above 1GHz</b>	
Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)		Antenna Height (cm)	Table Angle (Degree)
		P.K.	A.V.	P.K.	A.V.	P.K.	A.V.	P.K.	A.V.		
2087.7	-29.81	24.24	22.20	54.1	52.0	74.0	54.0	-19.9	-2.0	100	127
*2462.0	-31.24	72.00	67.00	103.2	98.2	-	-	-	-	100	124
2483.7	-31.31	21.73	-	53.0	-	74.0	54.0	-21.0	-	100	126
4176.0	-35.00	16.07	-	51.1	-	74.0	54.0	-22.9	-	100	19
4924.0	-36.83	13.20	-	50.0	-	74.0	54.0	-24.0	-	100	274

NOTES: 1. Emission level (dBuV/m) = Reading value (dBuV)-Correction Factor (dB).

2. Correction Factor (dB) = Preamplifier Factor (dB)-Ant. Factor (dB)  
-Cable loss (dB)

3. The other emission levels were very low against the limit.

4. Margin value = Emission level - Limit value

5. The limit value is defined as per 15.247

6. “ \* “ : Fundamental frequency





### 4.3 6dB BANDWIDTH MEASUREMENT

#### 4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The Limit of 6dB Bandwidth Measurement is 0.5 MHz.

#### 4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
ROHDE & SCHWARZ TEST RECEIVER	ESMI	839379/002	Dec. 28, 2001
HP ATTENUATOR	8496B	3247A18505	Cal. on use
HP PLOTTER	7475A	2641V27755	N/A


#### Notes:

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

### 4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100 kHz VBW. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.

### 4.3.4 TEST SETUP

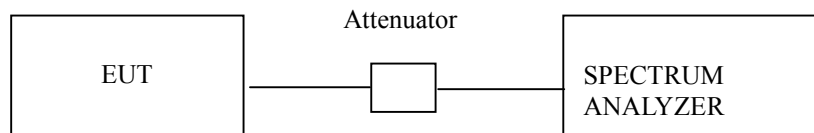

For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

### 4.3.5 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.




## 4.3.6 TEST RESULTS

<b>EUT</b>	PCMCIA 11M Wireless LAN Card	<b>Model</b>	WE250-IF
<b>Environmental Conditions</b>	23°C, 60%RH	<b>Tested By</b>	Gary Chang

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	10.02	0.5	PASS
6	2437	10.44	0.5	PASS
11	2462	10.42	0.5	PASS




CHI

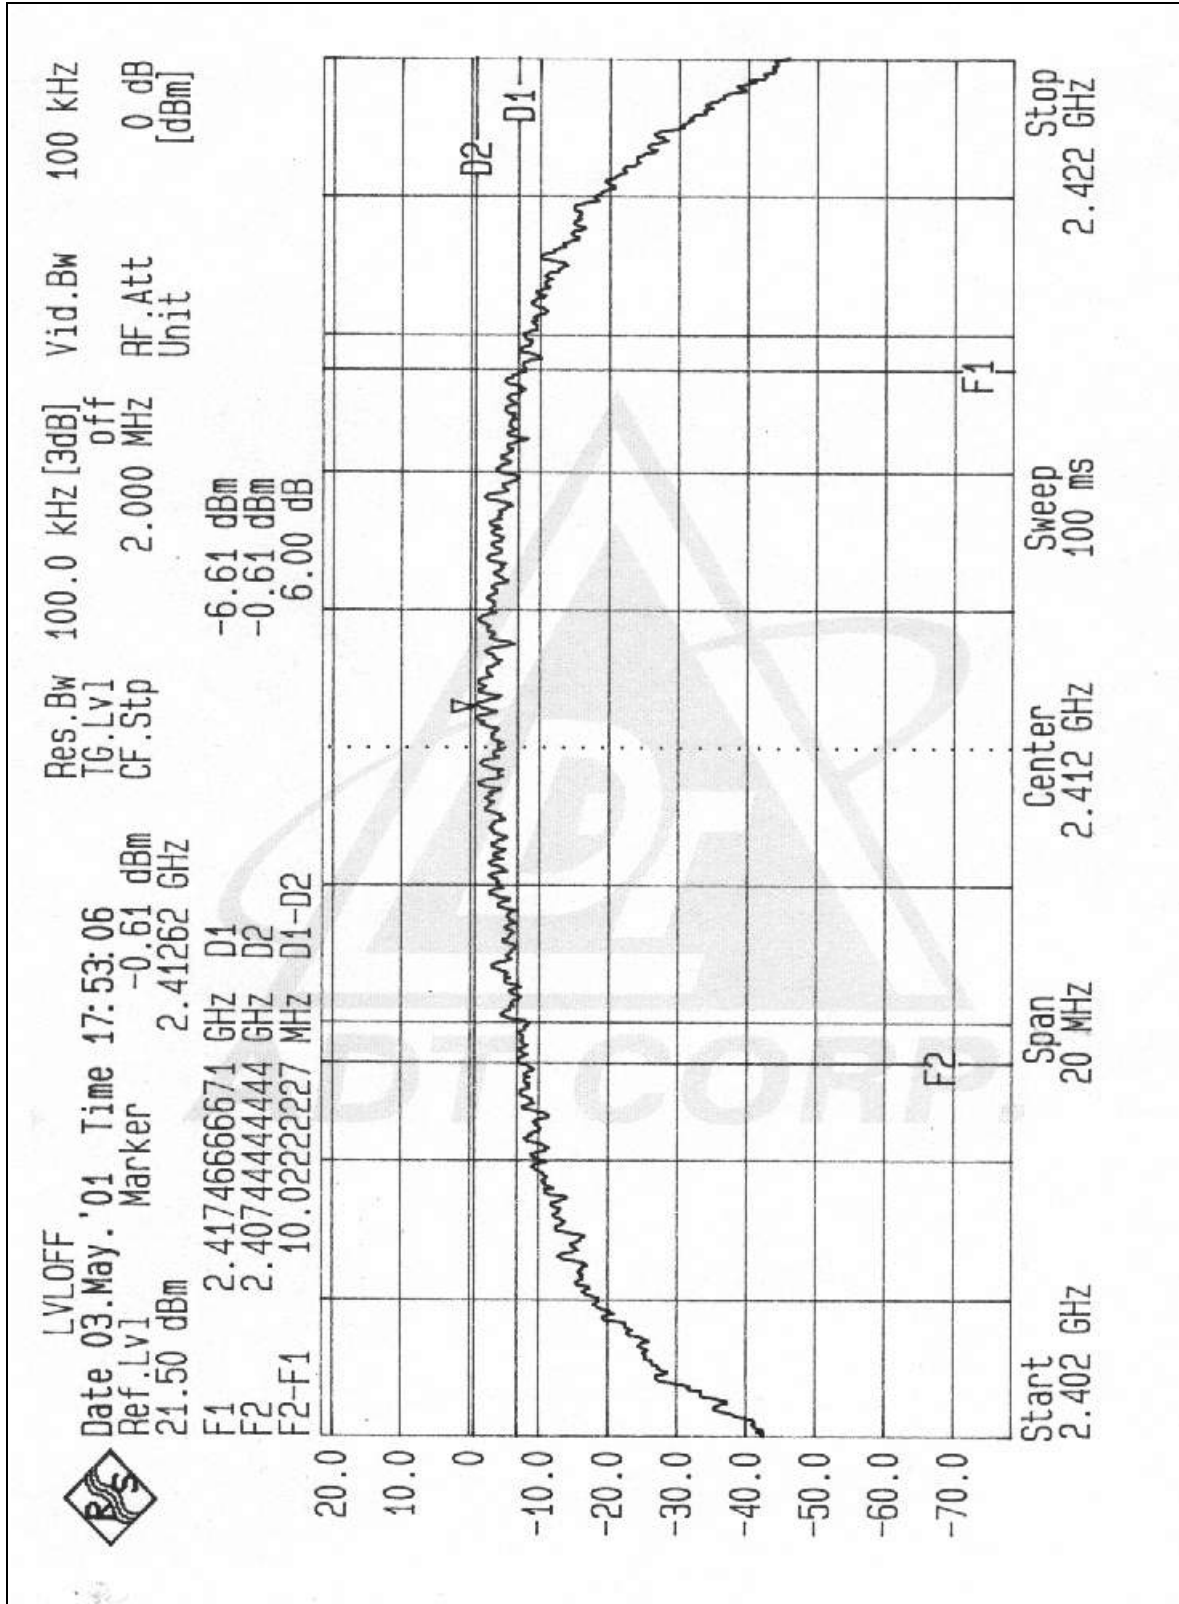




CH6

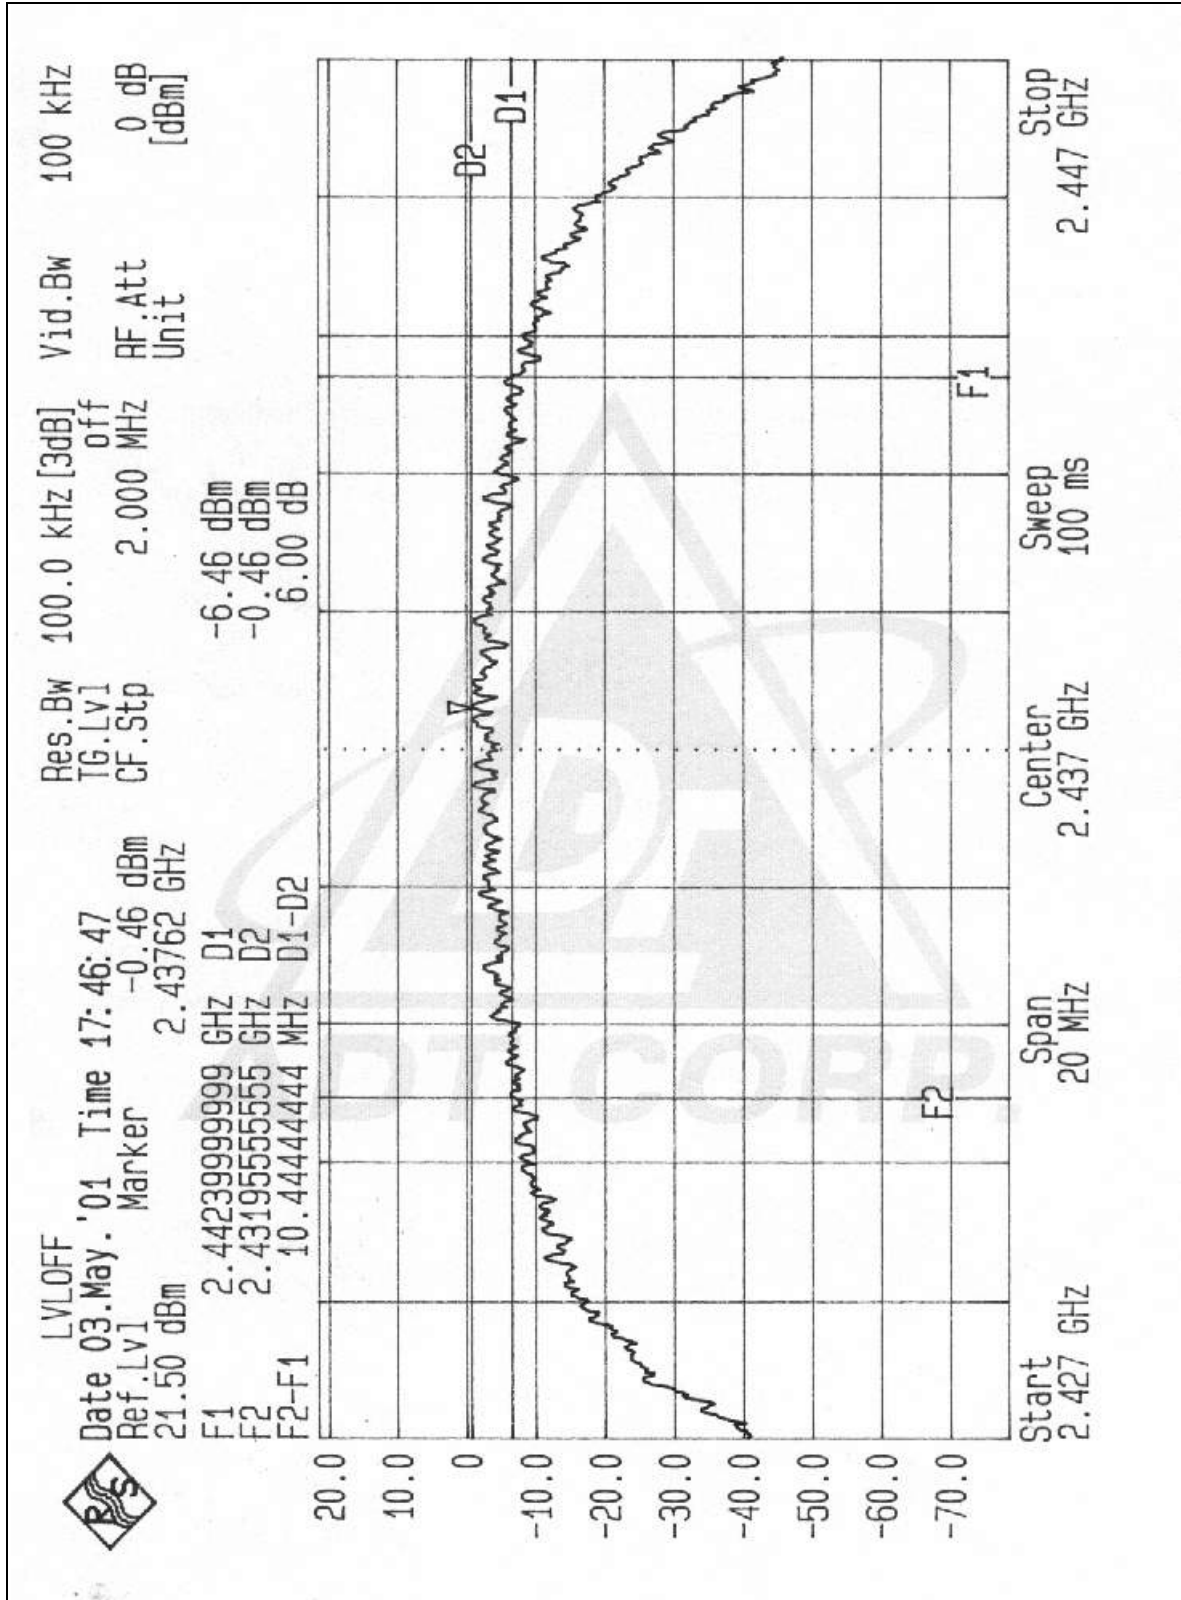



CH11

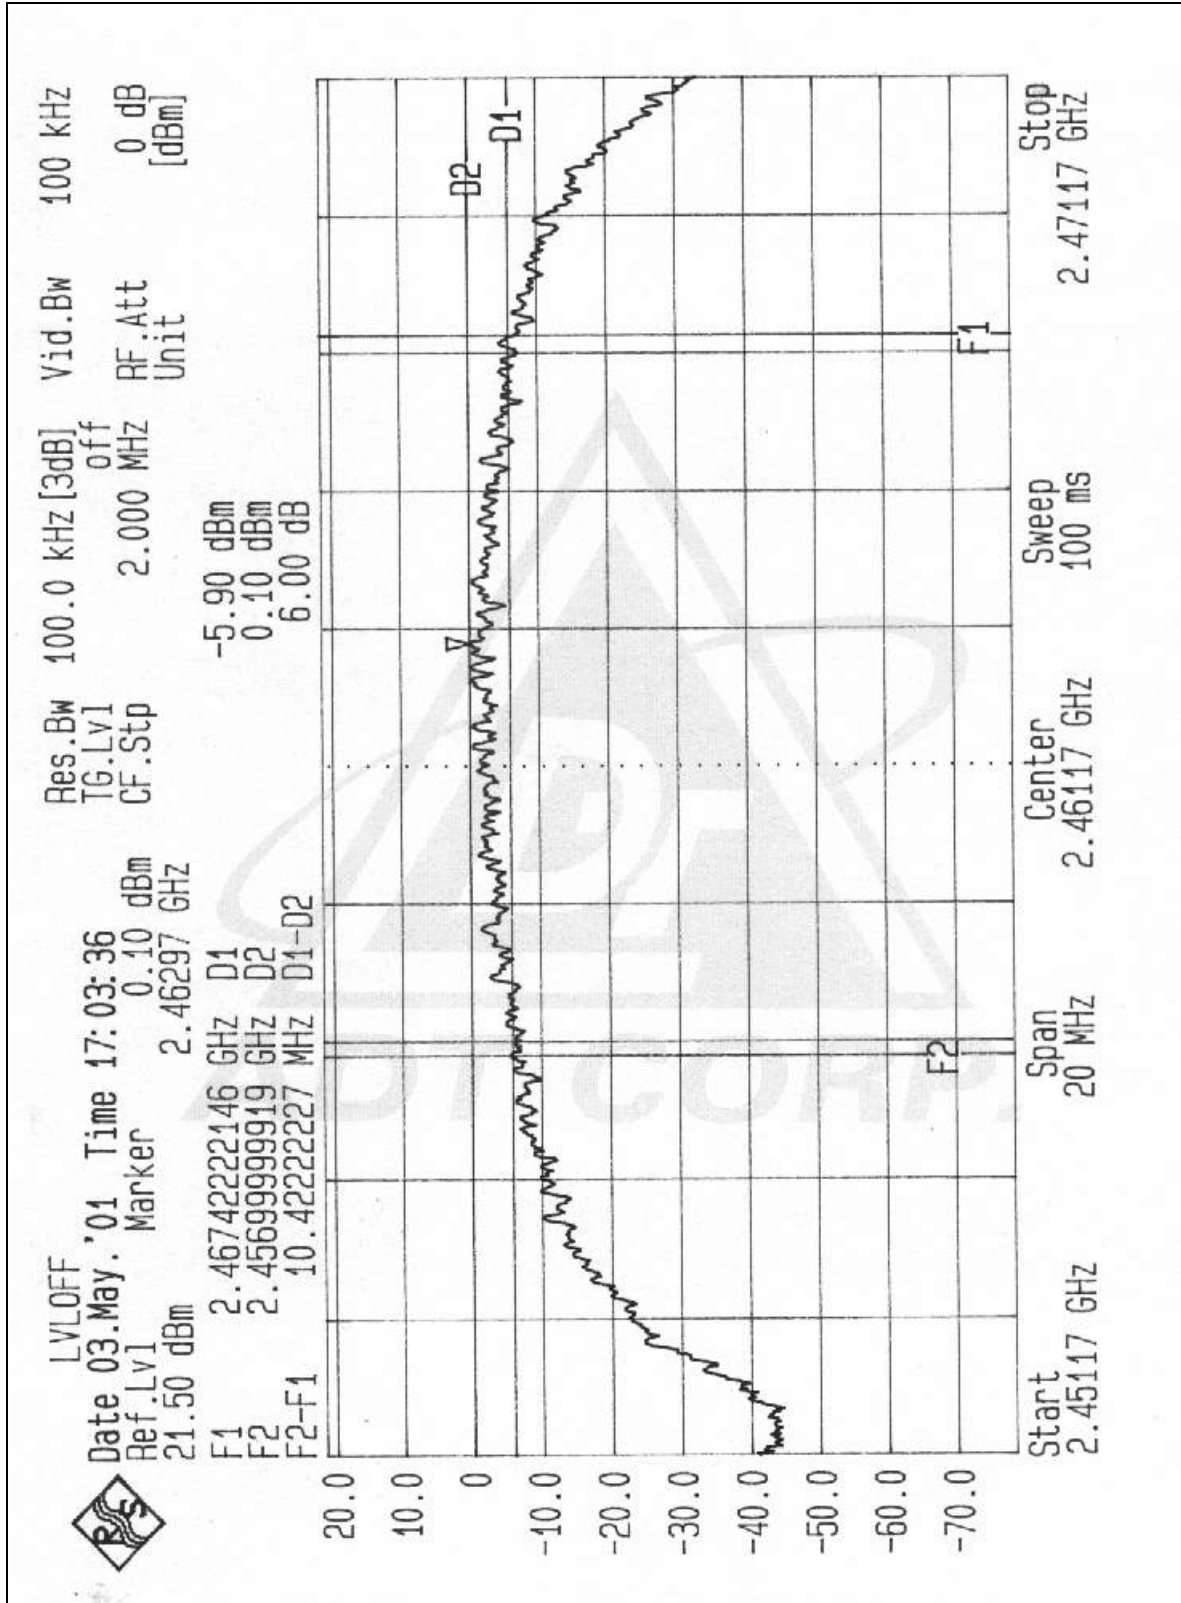



#### 4.4 MAXIMUM PEAK OUTPUT POWER

##### 4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Limit of Maximum Peak Output Power Measurement is 30dBm.

##### 4.4.2 INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
ROHDE & SCHWARZ TEST RECEIVER	ESMI	839379/002	Dec. 28, 2001
HP ATTENUATOR	8496B	3247A18505	Cal. on use
HP PLOTTER	7475A	2641V27755	N/A

##### Notes:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.




#### 4.4.3 TEST PROCEDURES

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. The center frequency of the spectrum analyzer is set to the fundamental frequency and using 3 MHz RBW and 3 MHz VBW.
3. The span of the spectrum analyzer should be larger than 6dB BandWidth plus 10MHz.
4. Use Peak Search to read the peak power after Maximum Hold function is activated.
5. Shift the marker to +/- 3MHz and +/-6MHz, and record the reading.
6. The Maximum Peak Output Power is the linear summation of the 5 readings in (4) and (5).

Note: This measurement is the total power of 15MHz bandwidth which is far more wider than 6dB bandwidth.

#### 4.4.4 TEST SETUP

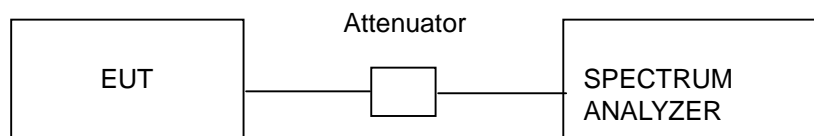

For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

#### 4.4.5 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.



## 4.4.6 TEST RESULTS

Output Power Into Antenna:

<b>EUT</b>	PCMCIA 11M Wireless LAN Card	<b>Model</b>	WE250-IF
<b>Environmental Conditions</b>	23°C, 60%RH	<b>Tested By</b>	Gary Chang

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	17.40	30	PASS
6	2437	17.18	30	PASS
11	2462	17.58	30	PASS