



Engineering and Testing for EMC and Safety Compliance

TYPE CERTIFICATION REPORT

VEGA Grieshaber KG
Am Hohenstein 113
77761 Schiltach
Germany

MODEL: VEGAPULS 68
FCC ID: O6QPULS68

June 2, 2004

STANDARDS REFERENCED FOR THIS REPORT	
PART 2: 2001	FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS
PART 15: 2001	RADIO FREQUENCY DEVICES - §15.209: RADIATED EMISSIONS LIMITS
RSS-210	LOW POWER LICENCE-EXEMPT RADIOCOMMUNICATION DEVICES (ALL FREQUENCY BANDS)
ANSI C63.4-2001	STANDARD FORMAT MEASUREMENT/TECHNICAL REPORT PERSONAL COMPUTER AND PERIPHERALS

Frequency Range	Output Power (W) Conducted	Frequency Tolerance (ppm)	Emission Designator
26 GHz	0.01	N/A	N/A

REPORT PREPARED BY TEST ENGINEER: DESMOND FRASER

Document Number: V2004074

This report may not be reproduced, except in full, without the written approval of Rhein Tech Laboratories, Inc.

360 Herndon Parkway
Suite 1400
Herndon, VA 20170
Phone: 703-689-0368 Fax: 703-689-2056

TABLE OF CONTENTS

1	GENERAL INFORMATION	5
1.1	TEST FACILITY	5
1.2	RELATED SUBMITTAL(S)/GRANT(S).....	5
2	CONFORMANCE STATEMENT	6
3	TEST INFORMATION	7
3.1	EXERCISING THE EUT	7
3.2	TEST SYSTEM DETAILS.....	7
3.3	CONFIGURATION OF TESTED SYSTEM	8
4	CONDUCTED LIMITS - §15.207.....	9
5	RADIATED EMISSION LIMITS - §15.209.....	9
5.1	RADIATED EMISSION LIMITS TEST PROCEDURE.....	9
5.2	FIELD STRENGTH CALCULATION.....	9
5.3	RADIATED EMISSION LIMITS TEST DATA	9
5.4	TEST EQUIPMENT USED FOR TESTING.....	10
6	TEST PLOTS	11
7	CONCLUSION	14

TABLE OF TABLES

TABLE 4-1:	FIELD STRENGTH OF CARRIER WITH WORST CASE PLASTIC HOUSING	9
TABLE 4-2:	FIELD STRENGTH OF CARRIER WITH WORST CASE PLASTIC HOUSING	10
TABLE 4-3:	RADIATED SPURIOUS EMISSIONS TEST EQUIPMENT	10
TABLE 5-1:	EQUIPMENT UNDER TEST (EUT).....	7

TABLE OF PLOTS

PLOT 6-1	PULSE WIDTH AND RISE TIME NORMAL MEASUREMENT MODE	11
PLOT 6-2	EUT 19.5 DBI HORN ANTENNA 100% DUTY CYCLE PEAK MODE	12
PLOT 6-3	EUT 19.5 DBI HORN ANTENNA 100% DUTY CYCLE AVERAGE MODE	13

TABLE OF FIGURES

FIGURE 3-1:	CONFIGURATION OF TESTED SYSTEM	8
-------------	--------------------------------------	---

TABLE OF APPENDICES

APPENDIX A:	AGENCY AUTHORIZATION	15
APPENDIX B:	CONFIDENTIALITY REQUEST	16
APPENDIX C:	LABEL INFORMATION.....	17
APPENDIX D:	OPERATIONAL DESCRIPTION.....	19
APPENDIX E:	BLOCK DIAGRAM	20
APPENDIX F:	SCHEMATICS	21
APPENDIX G:	MANUAL	22
APPENDIX H:	TEST CONFIGURATION PHOTOGRAPHS.....	23
APPENDIX I:	EXTERNAL PHOTOGRAPHS	25
APPENDIX J:	INTERNAL PHOTOGRAPHS	39

TABLE OF PHOTOGRAPHS

PHOTOGRAPH 1:	FCC ID LABEL LOCATION.....	18
PHOTOGRAPH 2:	RADIATED EMISSIONS FRONT VIEW	23
PHOTOGRAPH 3:	RADIATED EMISSIONS REAR VIEW	24
PHOTOGRAPH 4:	EUT PLASTIC HOUSING FRONT VIEW	25
PHOTOGRAPH 5:	EUT PLASTIC HOUSING INSIDE VIEW	26
PHOTOGRAPH 6:	EUT PLASTIC HOUSING FITTING	27
PHOTOGRAPH 7:	EUT ALUMINUM HOUSING	28
PHOTOGRAPH 8:	EUT ALUMINUM HOUSING FRONT VIEW.....	29
PHOTOGRAPH 9:	EUT DOUBLE ALUMINUM CHAMBER HOUSING FITTING	30
PHOTOGRAPH 10:	EUT DOUBLE ALUMINUM CHAMBER HOUSING FITTING FRONT VIEW	31
PHOTOGRAPH 11:	EUT DOUBLE ALUMINUM CHAMBER HOUSING REAR VIEW	32
PHOTOGRAPH 12:	EUT STAINLESS STEEL HOUSING FITTING	33
PHOTOGRAPH 13:	EUT STAINLESS STEEL HOUSING FRONT VIEW	34
PHOTOGRAPH 14:	EUT STAINLESS STEEL HOUSING TOP VIEW	35
PHOTOGRAPH 15:	EUT WITH 19.5 DBI HORN ANTENNA	36
PHOTOGRAPH 16:	19.5 DBI HORN ANTENNA	37
PHOTOGRAPH 17:	EUT ANTENNA PORT	38
PHOTOGRAPH 18:	EUT LCD DISPLAY TOP VIEW	39
PHOTOGRAPH 19:	EUT LCD DISPLAY BOTTOM VIEW	40
PHOTOGRAPH 20:	EUT LCD DISPLAY INSIDE VIEW	41
PHOTOGRAPH 21:	EUT LCD DISPLAY – PCB BOTTOM VIEW	42
PHOTOGRAPH 22:	EUT LCD DISPLAY – PCB TOP VIEW	43
PHOTOGRAPH 23:	EUT MODULE – ANTENNA PORT VIEW	44
PHOTOGRAPH 24:	EUT MODULE FRONT VIEW	45
PHOTOGRAPH 25:	EUT MODULE REAR VIEW	46
PHOTOGRAPH 26:	EUT MODULE INSIDE VIEW	47
PHOTOGRAPH 27:	EUT MODULE PARTS INSIDE VIEW	48
PHOTOGRAPH 28:	EUT MODULE PARTS SIDE VIEW	49
PHOTOGRAPH 29:	EUT MODULE TOP VIEW	50
PHOTOGRAPH 30:	EUT POWER MODULE PCB1 TOP VIEW.....	51
PHOTOGRAPH 31:	EUT POWER MODULE PCB1 BOTTOM VIEW	52
PHOTOGRAPH 32:	EUT MODULE PCB2 DIGITAL PART TOP VIEW	53
PHOTOGRAPH 33:	EUT MODULE PCB2 DIGITAL PART BOTTOM VIEW	54
PHOTOGRAPH 34:	EUT MODULE RF PCB SHIELD TOP VIEW.....	55
PHOTOGRAPH 35:	EUT MODULE RF PCB SHIELD BOTTOM VIEW	56
PHOTOGRAPH 36:	EUT MODULE RF PCB WITH PORT TOP VIEW	57
PHOTOGRAPH 37:	EUT MODULE RF PCB WITHOUT PORT BOTTOM VIEW	58

1 GENERAL INFORMATION

The following Type Certification Report is prepared on behalf of VEGA Grieshaber KG, in accordance with the Federal Communications Commission and Industry Canada Rules and Regulations. The Equipment Under Test (EUT) was Model VEGAPULS 68; FCC ID: O6QPULS68. The test results reported in this document relate only to the item that was tested.

All measurements contained in this application were conducted in accordance with FCC Rules and Regulations CFR 47, Industry Canada RSS-210, and ANSI C63.4 Methods of Measurement of Radio Noise Emissions, 2001. The instrumentation utilized for the measurements conforms to the ANSI C63.4 standard for EMI and Field Strength Instrumentation. Calibration checks are performed regularly on the instruments, and all accessories including high pass filter, coaxial attenuator, preamplifier and cables.

1.1 TEST FACILITY

The open area test site and conducted measurement facility used to collect the radiated data is located on the parking lot of Rhein Tech Laboratories, Inc. 360 Herndon Parkway, Suite 1400, Herndon, Virginia 20170. This site has been fully described in a report dated March 3, 2000, submitted to and approved by the Federal Communications Commission to perform AC line conducted and radiated emissions testing (ANSI C63.4 2001).

1.2 RELATED SUBMITTAL(S)/GRANT(S)


This is an original application report.

2 CONFORMANCE STATEMENT

STANDARDS REFERENCED FOR THIS REPORT	
PART 2: 2001	FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS
PART 15: 2001	RADIO FREQUENCY DEVICES - §15.209: RADIATED EMISSIONS LIMITS
ANSI C63.4-2001	STANDARD FORMAT MEASUREMENT/TECHNICAL REPORT PERSONAL COMPUTER AND PERIPHERALS

Frequency Range	Output Power (W) Conducted	Frequency Tolerance (ppm)	Emission Designator
26 GHz	0.01	N/A	N/A

I, the undersigned, hereby declare that the equipment tested and referenced in this report conforms to the identified standard(s) as described in this attached test record. No modifications were made to the equipment during testing in order to achieve compliance with these standards. Furthermore, there was no deviation from, additions to, or exclusions from, the above standards for Certification methodology.

Signature: 

Date: June 2, 2004

Typed/Printed Name: Desmond Fraser


Position: President

Signature: 

Date: June 2, 2004

Typed/Printed Name: Desmond Fraser

Position: Test Engineer

 Accredited by the National Voluntary Accreditation Program for the specific scope of accreditation under Lab Code 200061-0.

Note: This report may not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

3 TEST INFORMATION

3.1 EXERCISING THE EUT

The EUT was configured to continuously transmit data at 100% duty cycle in measurement mode in which the device maintains its full power. The manufacturer confirmed the conducted power under normal measurement mode to be 10 mW. The normal operating measurement mode is a radar pulse with a duty cycle less than 1:100. By configuring the unit to transmit continuously in the continuous measurement mode, a desensitization factor was not required. This approach was used because the EUT produces extremely low output power. The EUT was set up at an antenna-to-EUT test distance of 0.3 m in order to achieve sufficient dynamic range including the use of harmonic mixer as a result of the carrier low output power. The unit's spurious emissions were also investigated and tested in the restricted and non restricted band from 9 kHz to 110 GHz. The tests were performed with the EUT polarized horizontally and vertically in order to determine worst-case emissions. The EUT supports only one channel at 26.5 GHz.

3.2 TEST SYSTEM DETAILS

Listed below are the identifiers and descriptions of all equipment, cables, and internal devices used with the EUT for this test, as applicable.

TABLE 3-1: EQUIPMENT UNDER TEST (EUT)

DESCRIPTION	MANUFACTURER	MODEL	SERIAL NO.	FCC ID	CABLE DESCRIPTIONS	RTL BAR CODE
Transmitter (EUT)	VEGA Grieshaber KG	VEGAPULS 68	N/A	O6QPULS68	Unshielded	15811
Antenna	VEGA Grieshaber KG	19.5 dBi Horn	N/A	N/A	N/A	N/A

3.3 CONFIGURATION OF TESTED SYSTEM

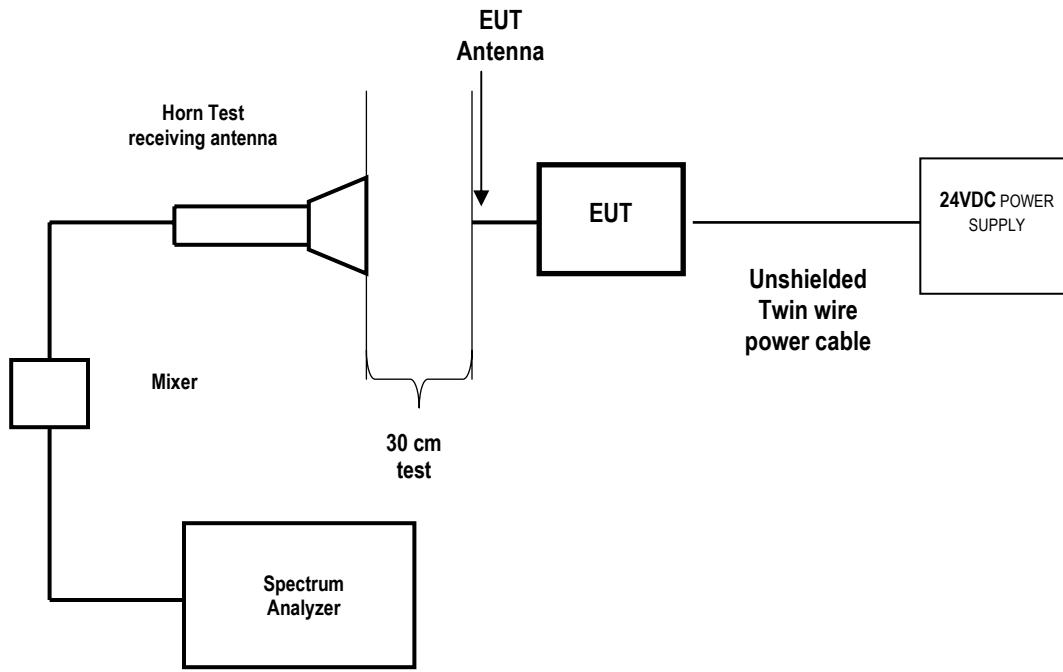


FIGURE 3-1: CONFIGURATION OF TESTED SYSTEM

4 CONDUCTED LIMITS - §15.207

Conducted emissions are not applicable to the EUT; the manufacturer does not provide AC-to-DC adapters because the required 24 VDC are generated by the industrial site, at which the EUT is monitoring hazardous and non-hazardous fluids.

5 RADIATED EMISSION LIMITS - §15.209

5.1 RADIATED EMISSION LIMITS TEST PROCEDURE

Radiated Spurious Emissions (harmonics and spurious emissions) in the restricted and non-restricted bands were investigated from 0.009 kHz to 110 GHz. The test methods used during testing conform to the ANSI C63.4, 2001. The restricted bands are listed in Part 15.205. The maximum permitted average field strength for the restricted band is listed in Part 15.209. The EUT was tested in three orthogonal planes namely X, Y, and Z. The test antenna was horizontally and vertically polarized during testing. The general limit under Part 15.209 was applied for all frequencies 0.009 kHz to 110 GHz per FCC 15.209. There was no spurious noise detected from 0.009 kHz to 110 GHz except the carrier at 26 GHz. The EUT was investigated and tested with four housings, namely Stainless Steel, Aluminum, Double Chamber Aluminum, and Plastic. The Plastic housing configuration demonstrated the worst case results. The data below is for the worst case configuration and four antenna configurations.

5.2 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the antenna factor and cable factor from the measured Spectrum Analyzer reading.

$$\text{Spectrum Analyzer Level Corrected (dBuV/m)} = \text{Spectrum Analyzer Level (dBuV/m)} + \text{AF (dB/m)} + \text{CL (dB)}$$

AF = antenna factor
 CL = cable loss

5.3 RADIATED EMISSION LIMITS TEST DATA

TABLE 5-1: FIELD STRENGTH OF CARRIER WITH WORST CASE PLASTIC HOUSING

Frequency (GHz)	Detector	Antenna POL	Spectrum Analyzer Level (dBuV)	Cable Loss (dB)	Antenna Gain	Spectrum Analyzer Level Corrected (dBuV/m)	FCC Limit (dBuV)	Margin (dB)
26.5	Peak	H	20.3 ^(1,2,3)	0	26.0	46.3	74.0	-27.7
26.5	Avg	H	14.3 ^(1,2,3)	0	26.0	40.3	54.0	-13.7

Note 1: Corrected by -20 dB due to 30 centimeter antenna test distance

Note 2: The mixer conversion loss plus cable loss is factored within the Spectrum Analyzer level reading

Note 3: Duty cycle correction was not used in the final calculation

TABLE 5-2: FIELD STRENGTH OF CARRIER WITH WORST CASE PLASTIC HOUSING

Frequency (GHz)	Detector	Antenna POL	Spectrum Analyzer Level (dBuV)	Cable Loss (dB)	Antenna Gain	Spectrum Analyzer Level Corrected (dBuV/m)	FCC Limit (dBuV)	Margin (dB)
0.009-110	Peak	-(4)-	---	1	26.0	---	74.0	---
0.009-110	Avg	-(4)-	---	1	26.0	---	54.0	---

Note 4: No emission above the noise floor detected

TEST PERSONNEL:


DESMOND FRASER		APRIL 14, 2004
TEST TECHNICIAN/ENGINEER	SIGNATURE	DATE OF TEST

5.4 TEST EQUIPMENT USED FOR TESTING


TABLE 5-3: RADIATED SPURIOUS EMISSIONS TEST EQUIPMENT

RTL ASSET #	MANUFACTURER	MODEL	PART TYPE	SERIAL NUMBER	Calibration Due Date
900717	Hewlett Packard	11970U	Harmonic Mixer (40 - 60 GHz)	2332A01110	2/19/05
901218	EMCO	3160-09	Horn Antenna (18 - 26 GHz)	960281-003	6/14/05
900392	Hewlett Packard	11970K	Harmonic Mixer (18 - 26 GHz)	3525A00159	2/01/05
900715	Hewlett Packard	11970V	Harmonic Mixer (50 - 75 GHz)	2521A00512	7/19/05
900716	Hewlett Packard	11970W	Harmonic Mixer (75 - 110 GHz)	2521A00710	6/08/05
900126	Hewlett Packard	11970A	Harmonic Mixer (26 - 40 GHz)	2332A01199	6/08/05
900056	ATM	19-443-6	Horn Antenna (40 - 60 GHz)	8041704-01	6/08/05
901218	EMCO	3160-09	Horn Antenna (25 - 40 GHz)	960452-007	6/08/05
900826	ATM	08-443-6	Horn Antenna (90 - 140 GHz)	8041904-01	6/08/05
900719	ATM	05-443-6	Horn Antenna (140 - 220 GHz)	50685	6/08/05
90066	ATM	10-443-6	Horn Antenna (75 - 110GHz)	805 1905-1	6/08/05
901262	EMCO	3160-09	Horn Antenna (1 - 18 GHz)	6748	2/04/05
900723	Hewlett Packard		Amplifier (1 GHz - 26 GHz)	NA	6/08/05
900744	Olsen	Mixer	Mixer (90 - 220 GHz)	F80814-1	1/04/05
900744	Olsen	Mixer	Mixer (140 - 220 GHz)	G80814-1	1/04/05
900444	Miteq	Amplifier	Amplifier (30 - 1000 MHz)	PR1040	6/08/05
900791	Schaffner - Chase	CBL6112	Antenna (25 MHz - 2 GHz)	2099	7/07/05
900151	Rohde & Schwarz	HFH2-Z2	Loop Antenna (9 kHz - 30 MHz)	827525	8/09/03
900772	EMCO	3161-02	Antenna (2 - 4 GHz)	9804-1044	7/08/04
900321	EMCO	3161-03	Antenna (4 - 8.2 GHz)	9508-1020	7/08/04
900323	EMCO	3161-07	Antenna (8.2 - 12 GHz)	9508-1054	7/08/06

6 TEST PLOTS

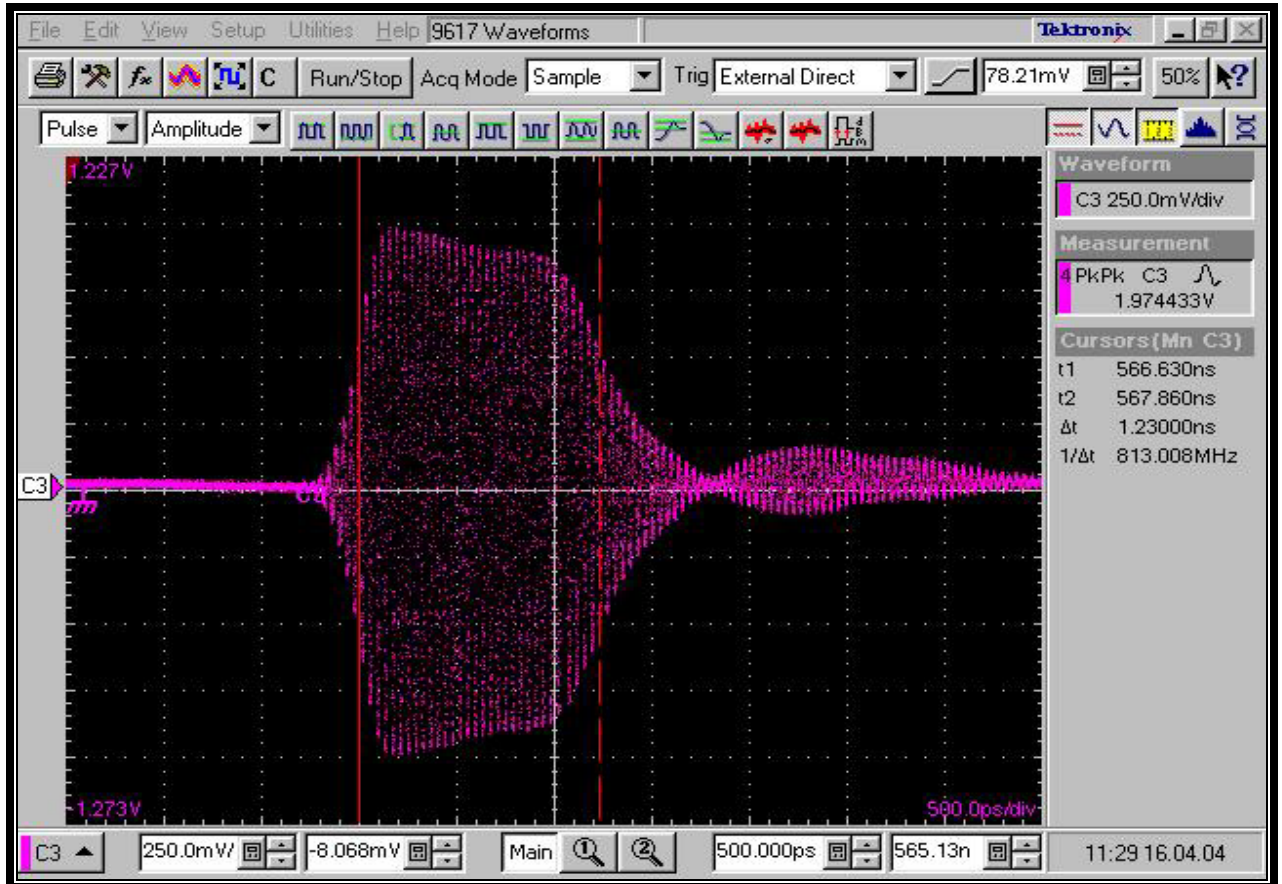

PLOT 6-1 PULSE WIDTH and RISE TIME NORMAL MEASUREMENT MODE

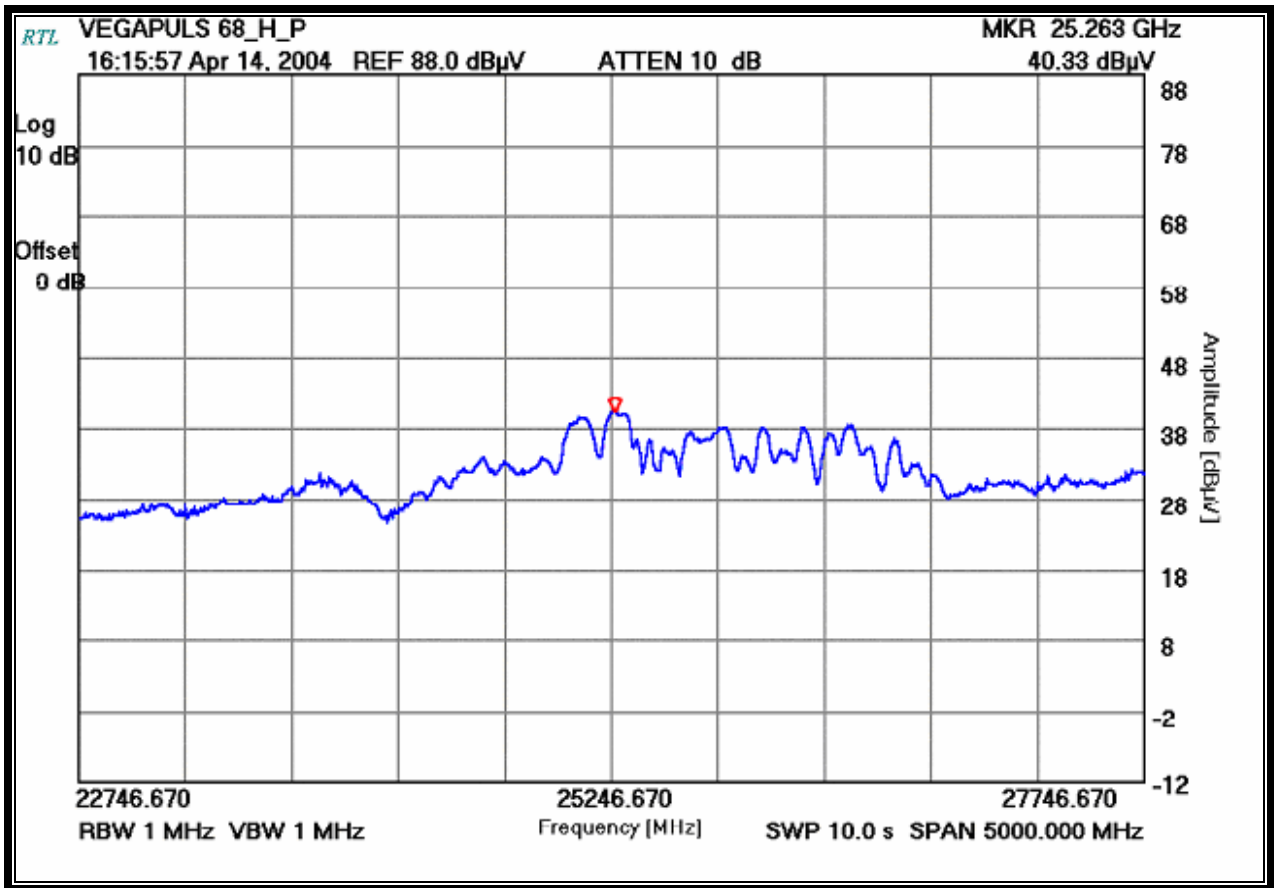

PLOT 6-2 EUT 19.5 DBI HORN ANTENNA 100% DUTY CYCLE PEAK MODE



PLOT 6-3 EUT 19.5 DBI HORN ANTENNA 100% DUTY CYCLE AVERAGE MODE

Rhein Tech Laboratories
360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Client: VEGA Grieshaber KG
Model: VEGAPULS 68
FCC ID: O6QPULS68
Standards: FCC 15.209/RSS-210
Report Number: V2004074

7 CONCLUSION

The data in this measurement report shows that the VEGA Grieshaber KG Model VEGAPULS 68, FCC ID: O6QPULS68, complies with all the requirements of Parts 2, and 15 of the FCC Rules and Regulations, and Industry Canada RSS-210.