
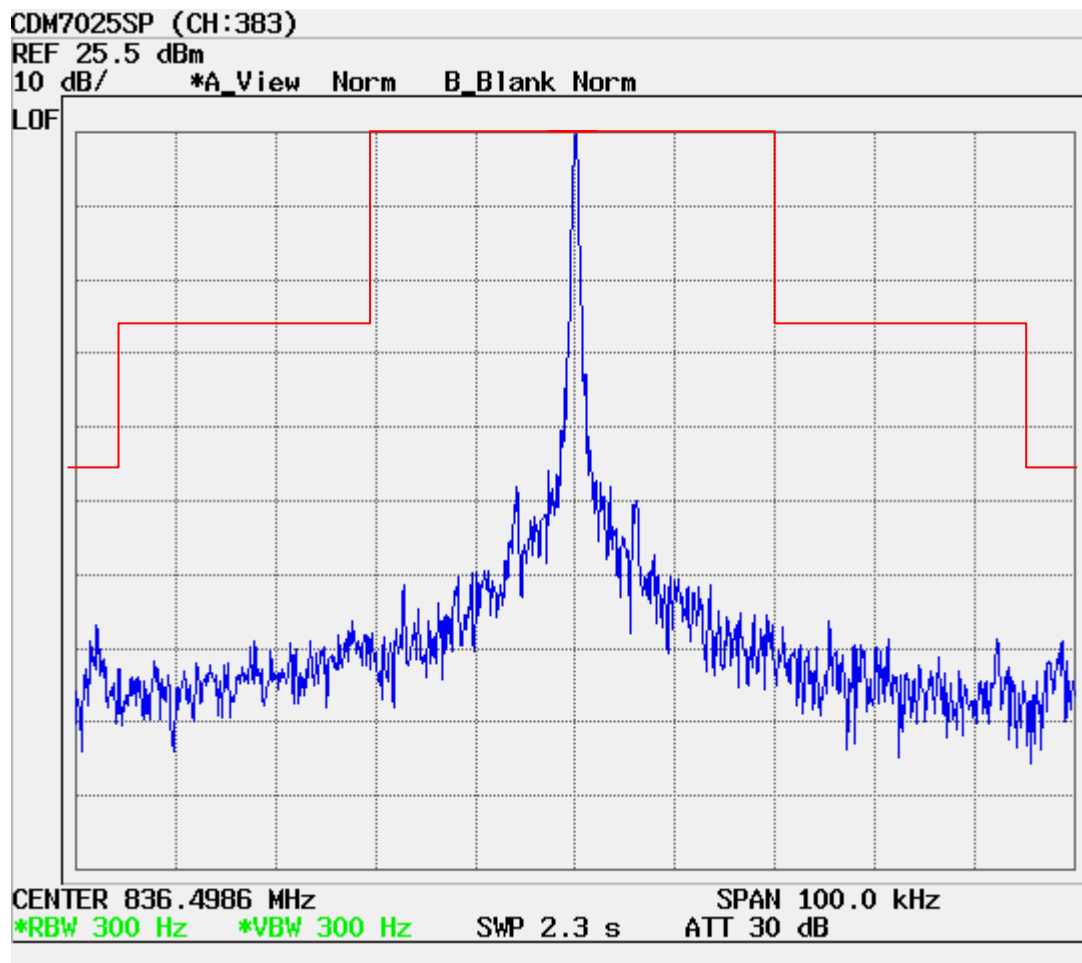
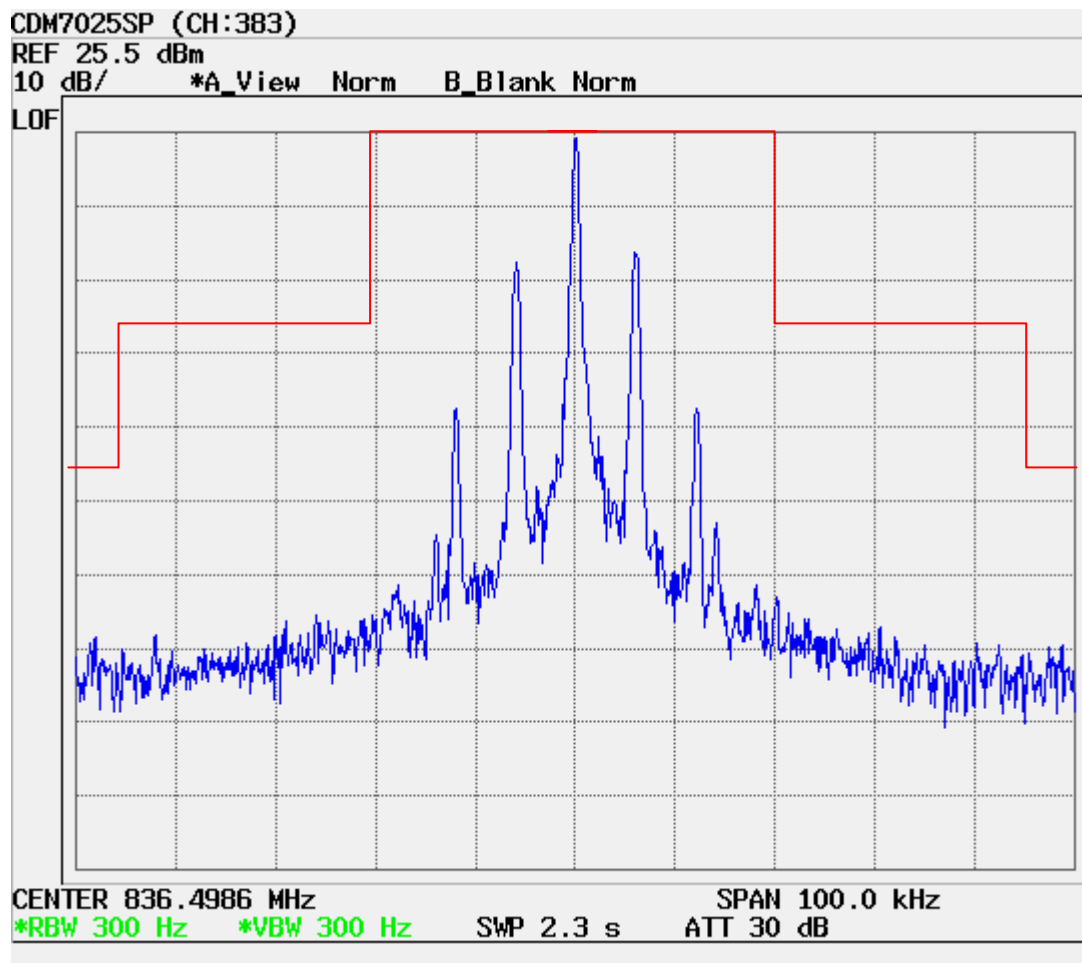


ATTACHMENT D – TEST PLOTS


■ AMPS MODE (0383 CH.) Test Mode: Unmodulated Signal


AMPS MODE (0383 CH.) Test Mode: SAT

■ AMPS MODE (0383 CH.) Test Mode: ST

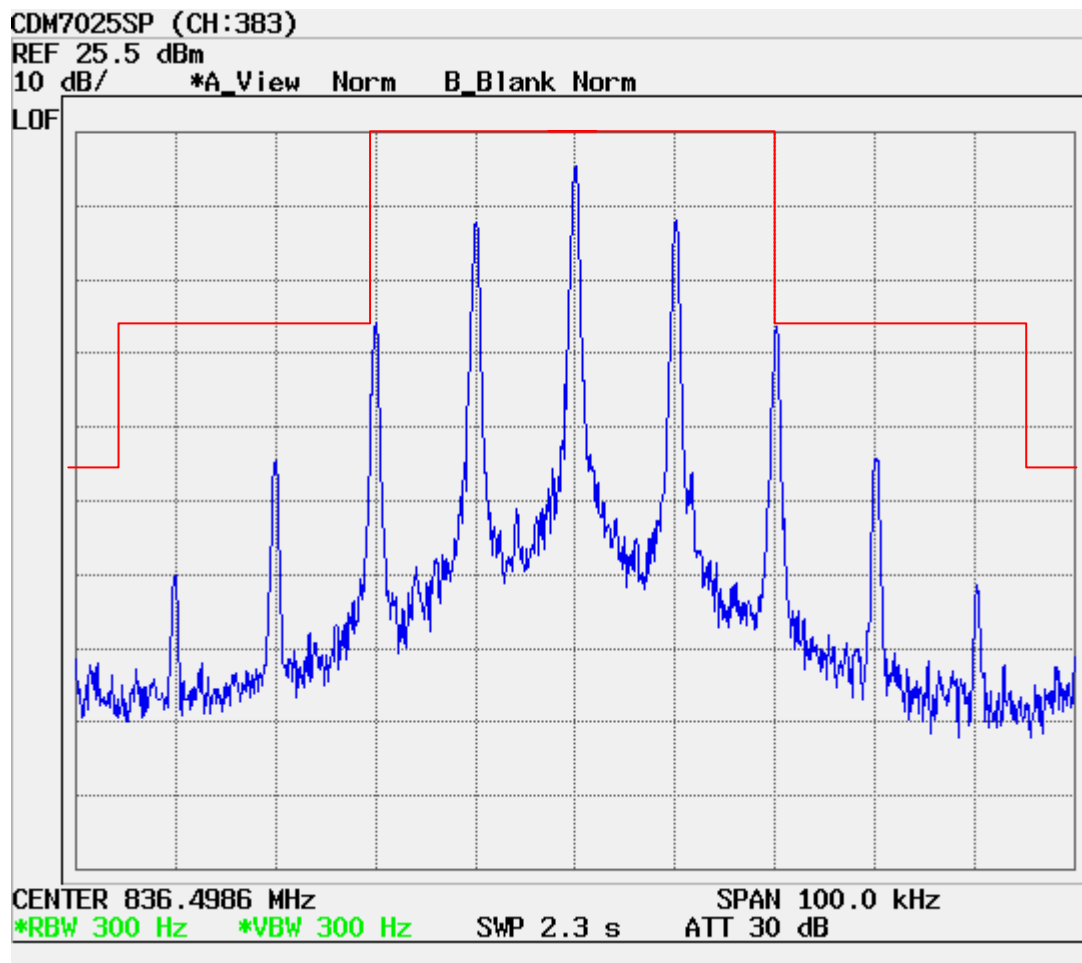


■ AMPS MODE (0383 CH.) Test Mode: SAT+ST

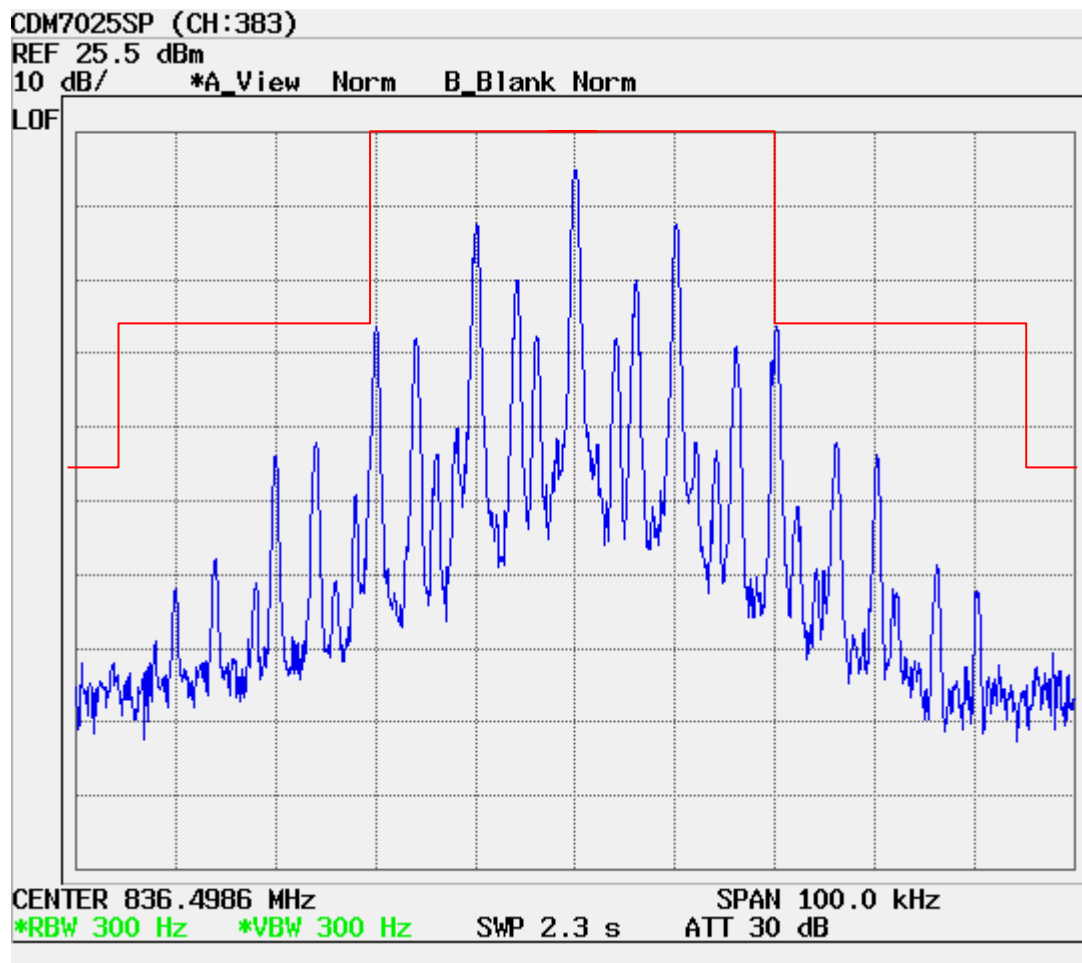


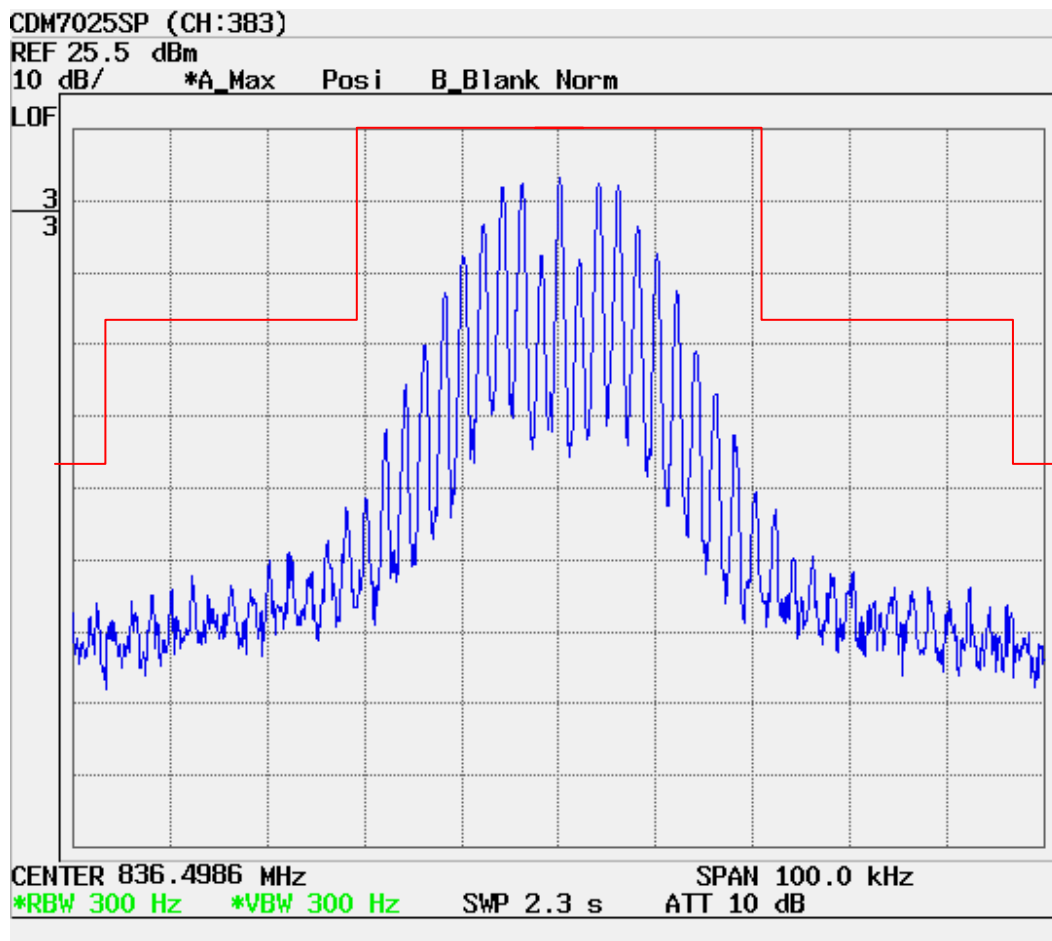
■ AMPS MODE (0383 CH.) Test Mode: Voice

■ AMPS MODE (0383 CH.) Test Mode: Wide Band Data

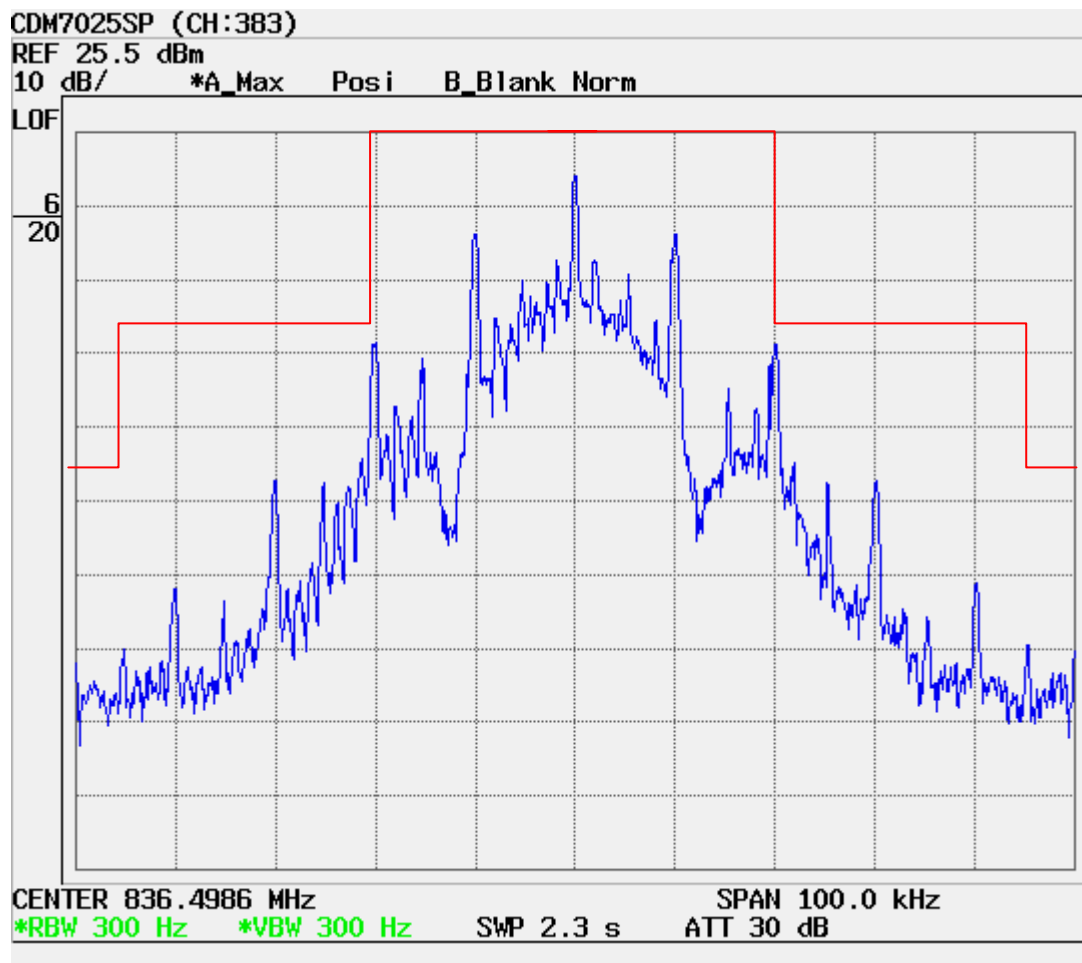


■ AMPS MODE (0991 CH.) Conducted Spurious

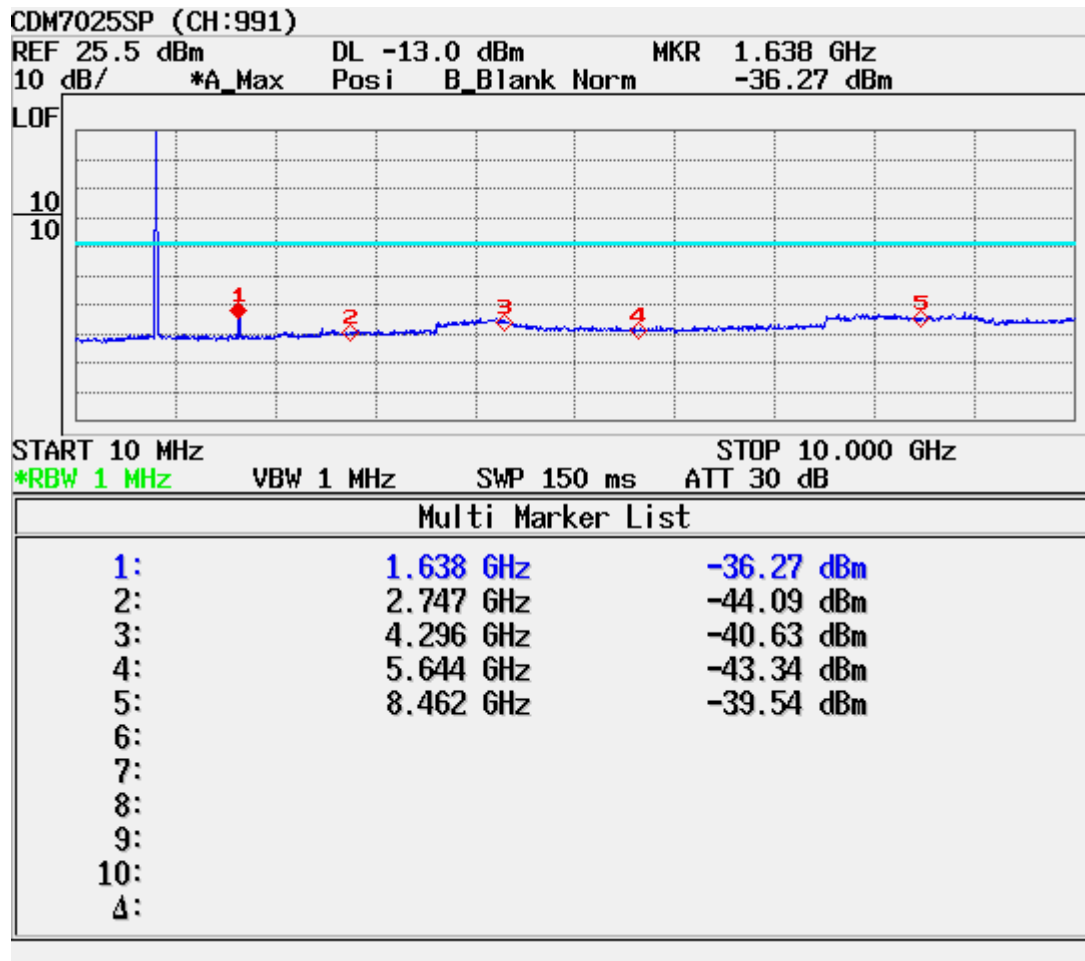


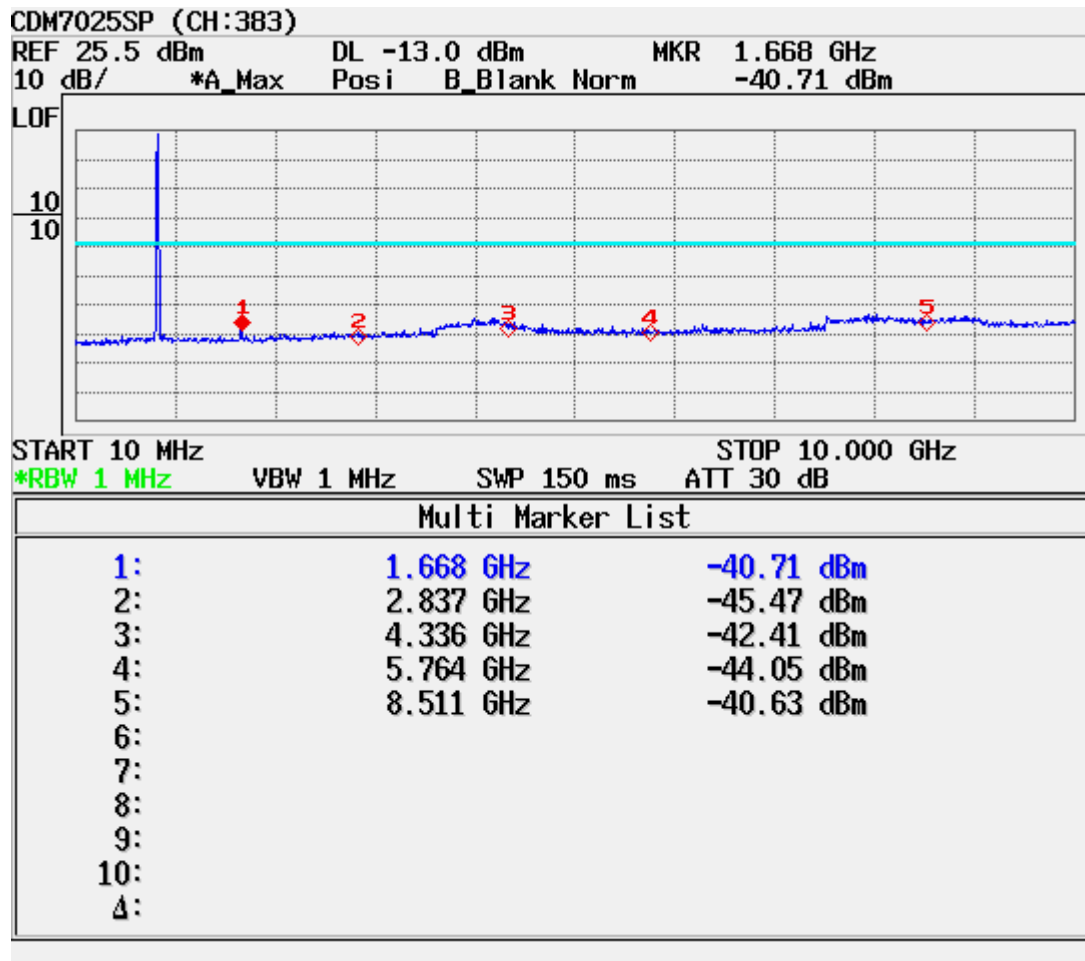AMPS MODE (0383 CH.) Conducted Spurious


■ AMPS MODE (0799 CH.) Conducted Spurious

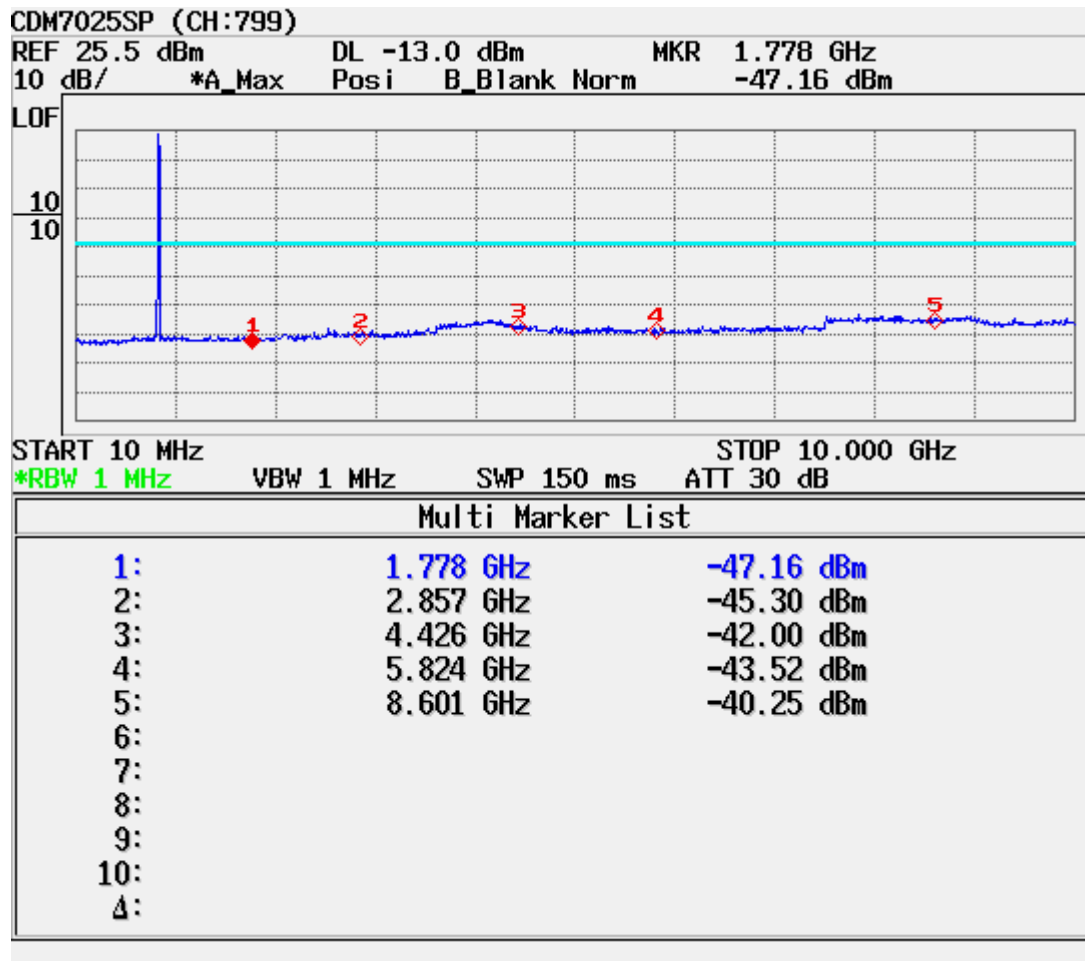


■ CDMA MODE (1013 CH.) Conducted Spurious

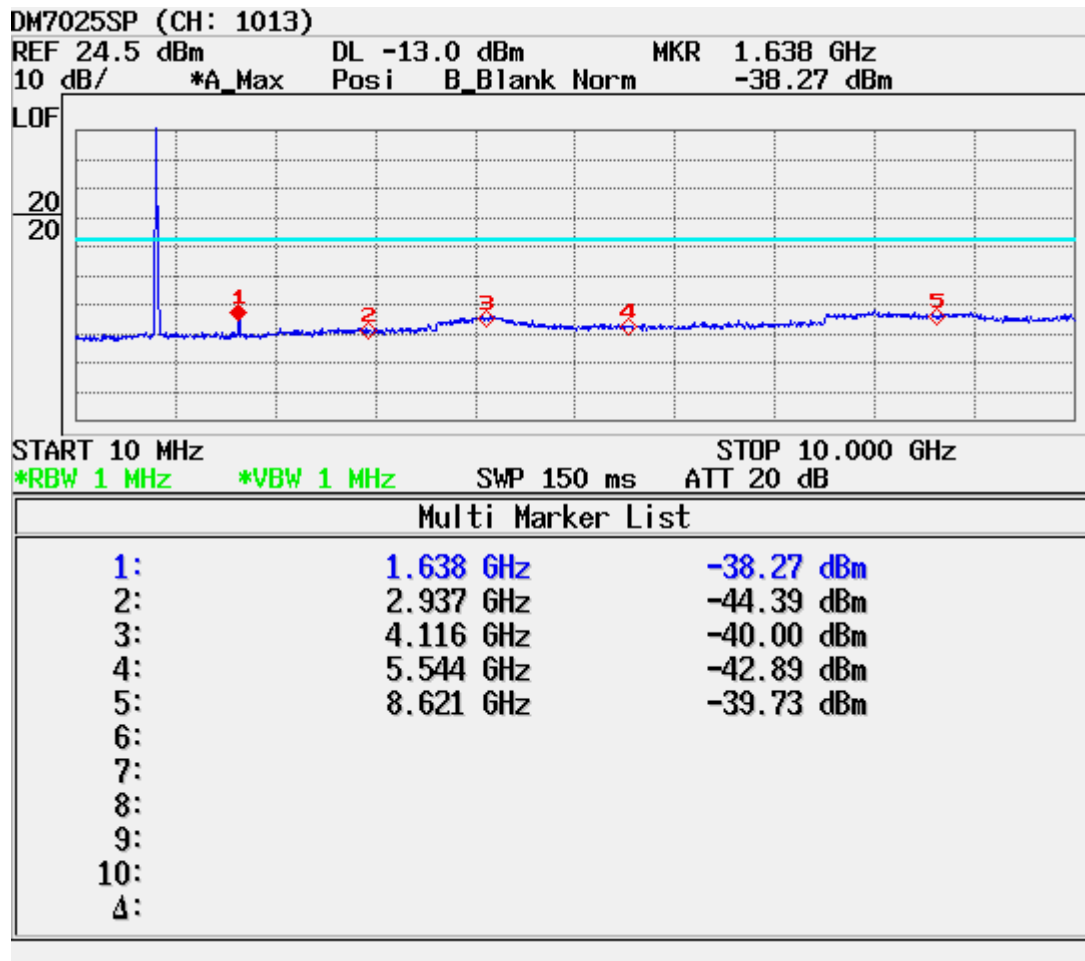


■ CDMA MODE (0363 CH.) Conducted Spurious

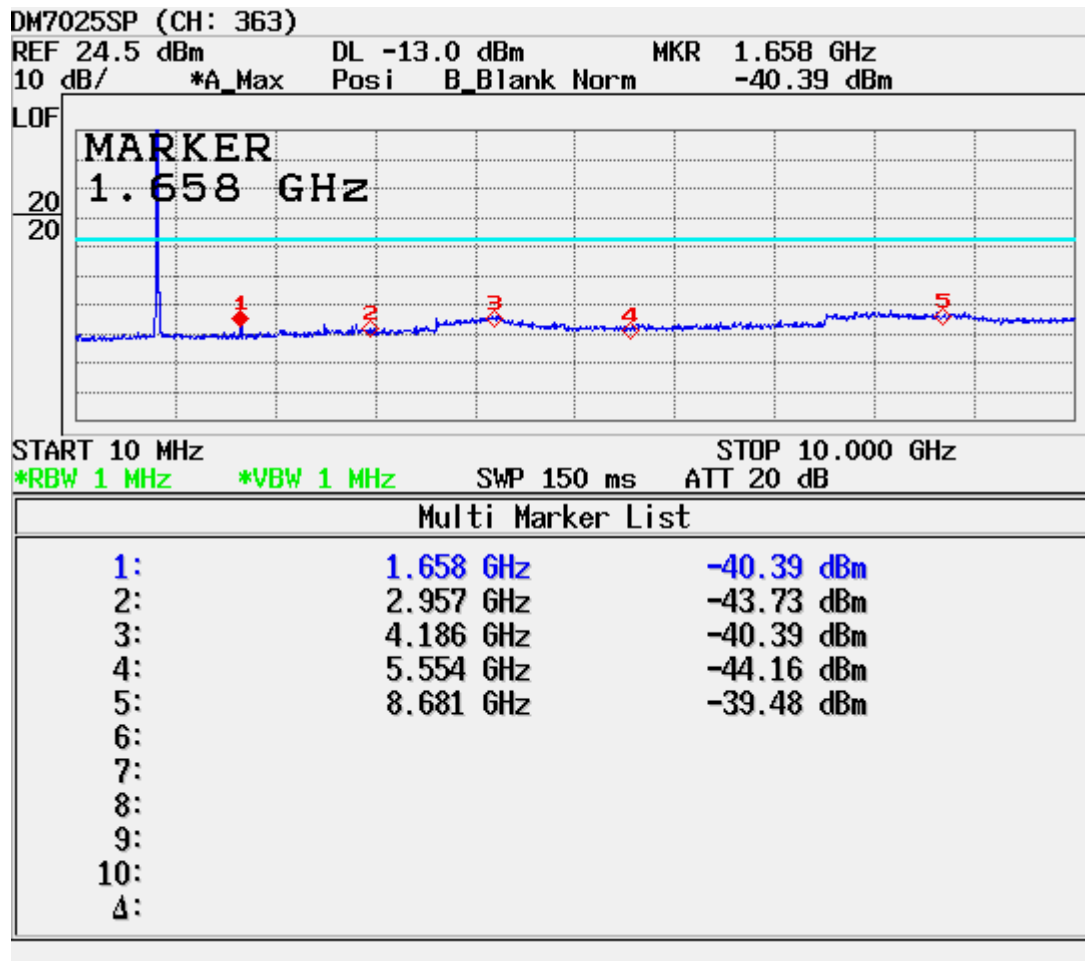


■ CDMA MODE (0777 CH.) Conducted Spurious

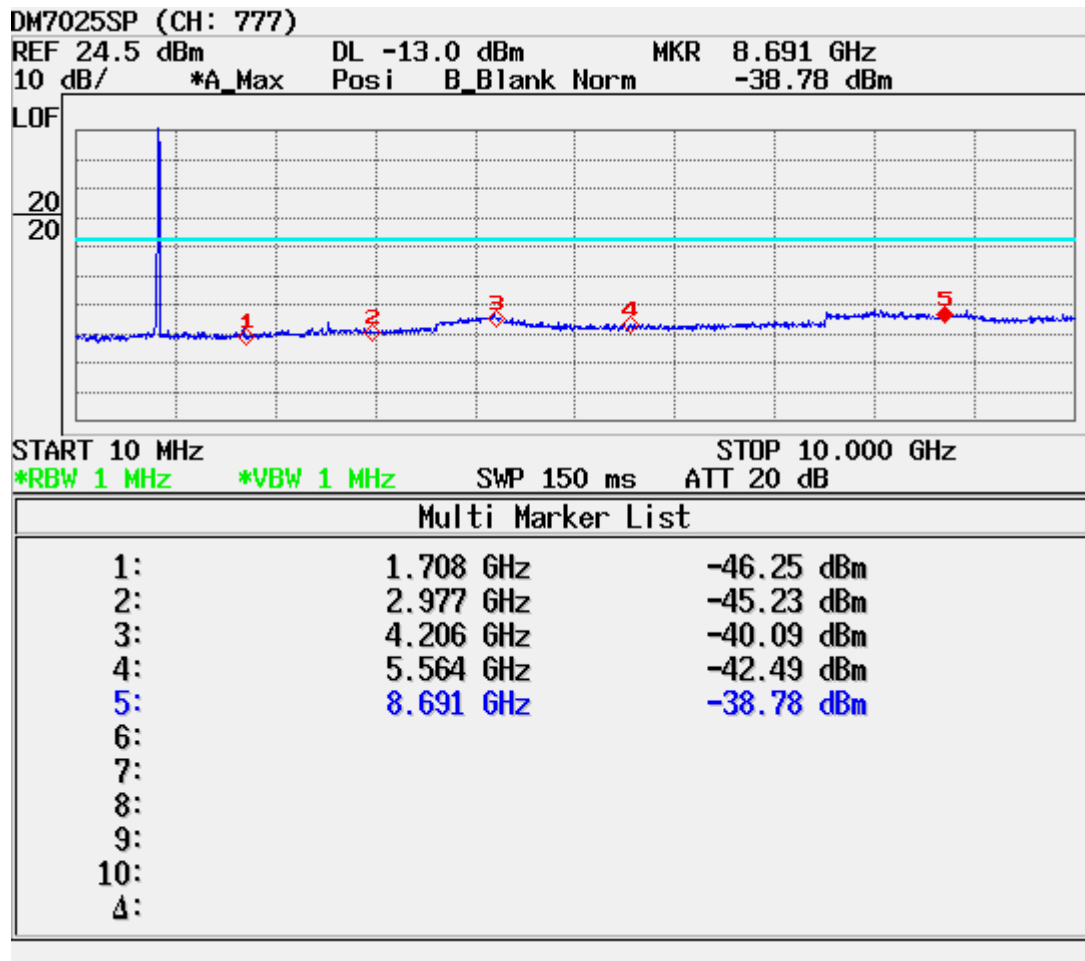


■ PCS CDMA MODE (0025 CH.) Conducted Spurious

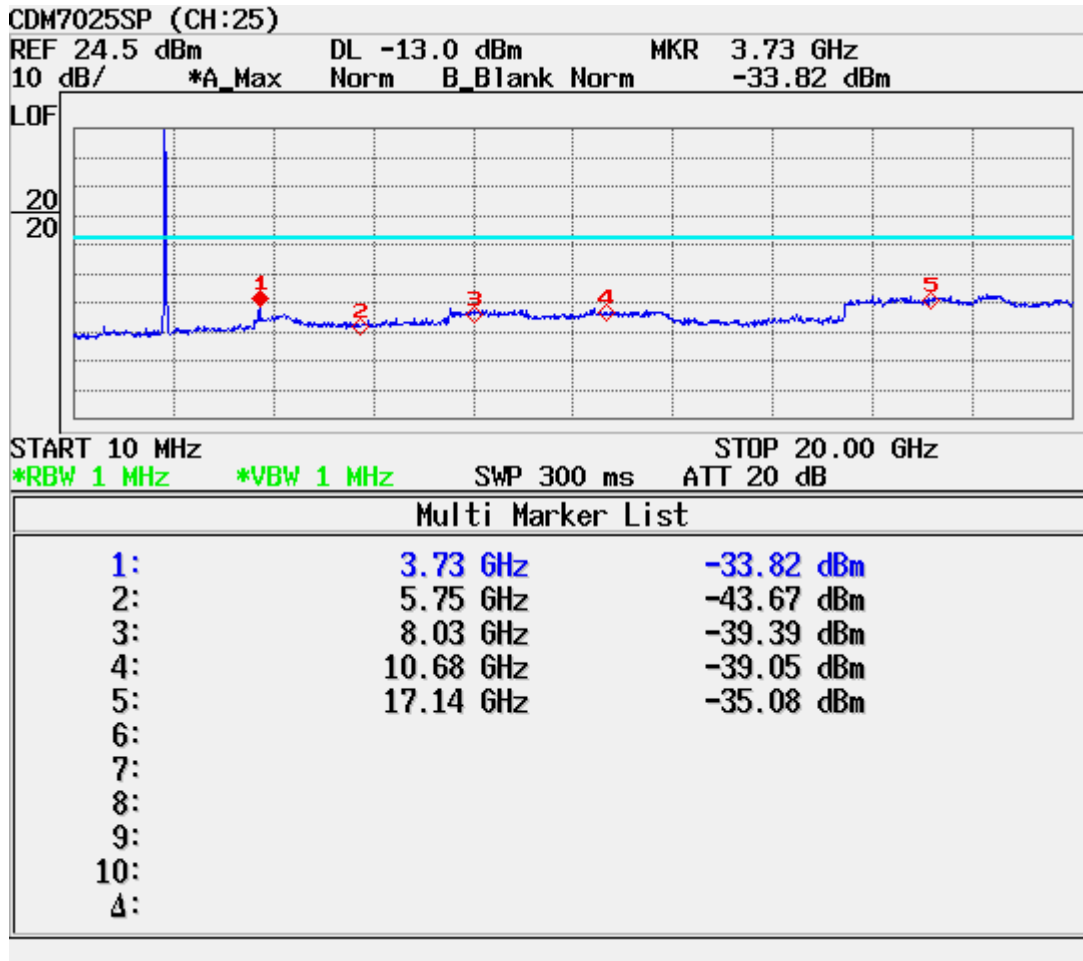


■ PCS CDMA MODE (0600 CH.) Conducted Spurious

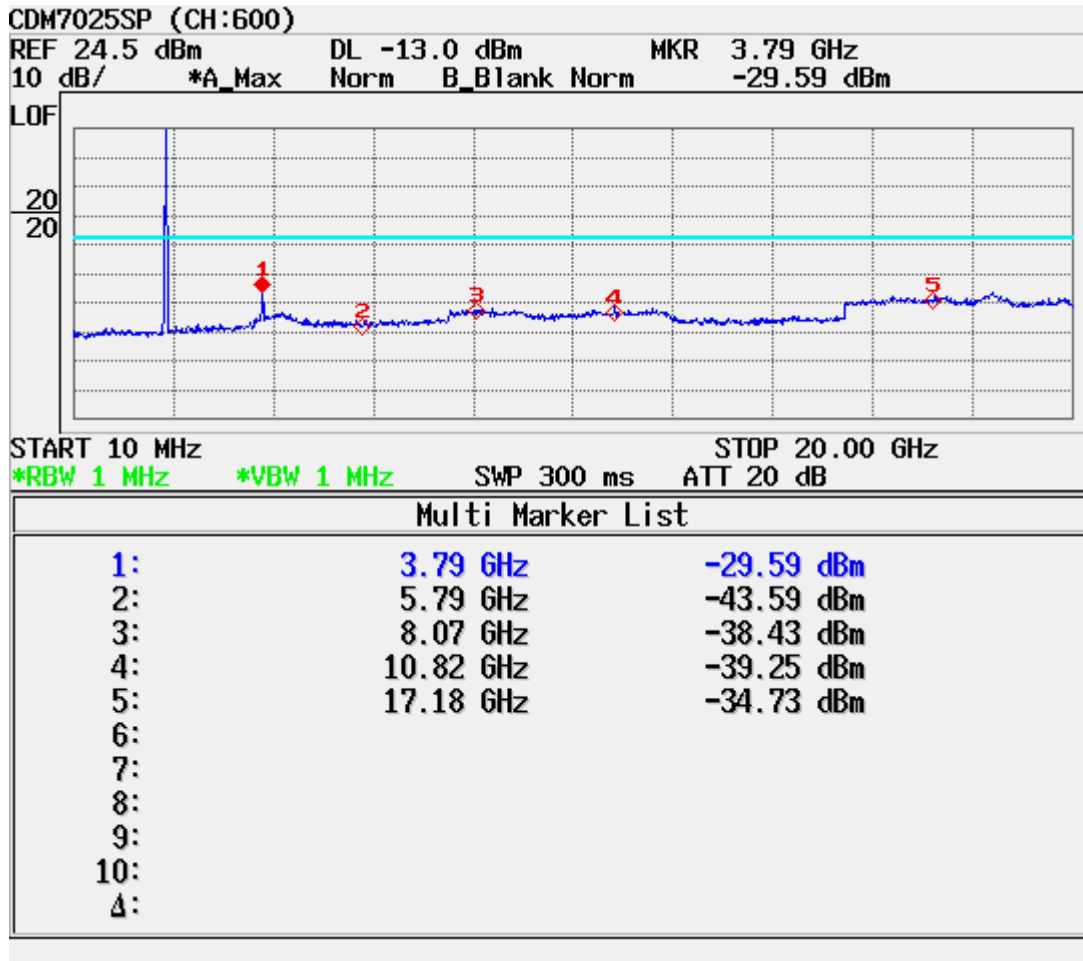


■ PCS CDMA MODE (1175 CH.) Conducted Spurious

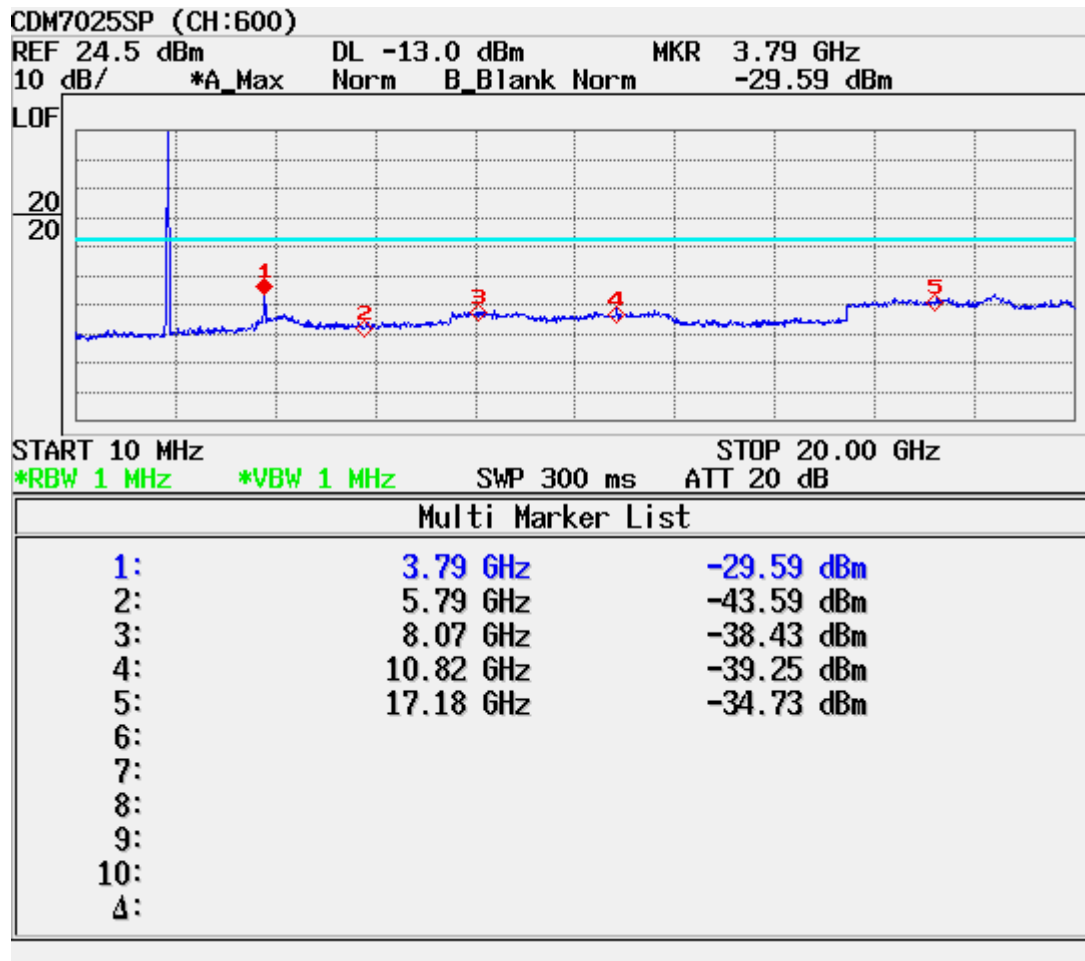


■ CDMA MODE (0363 CH.) : Channel Power

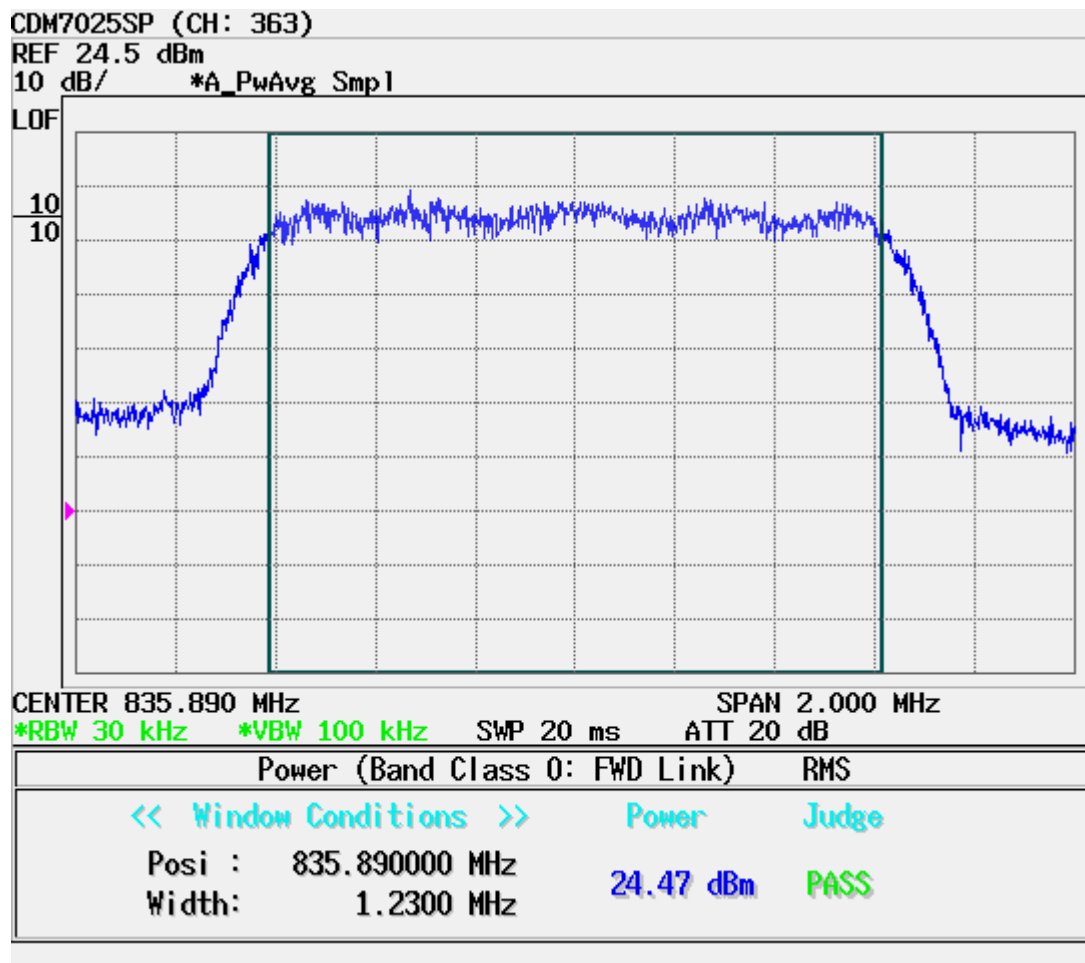


■ PCS CDMA MODE (0600 CH.) : Channel Power

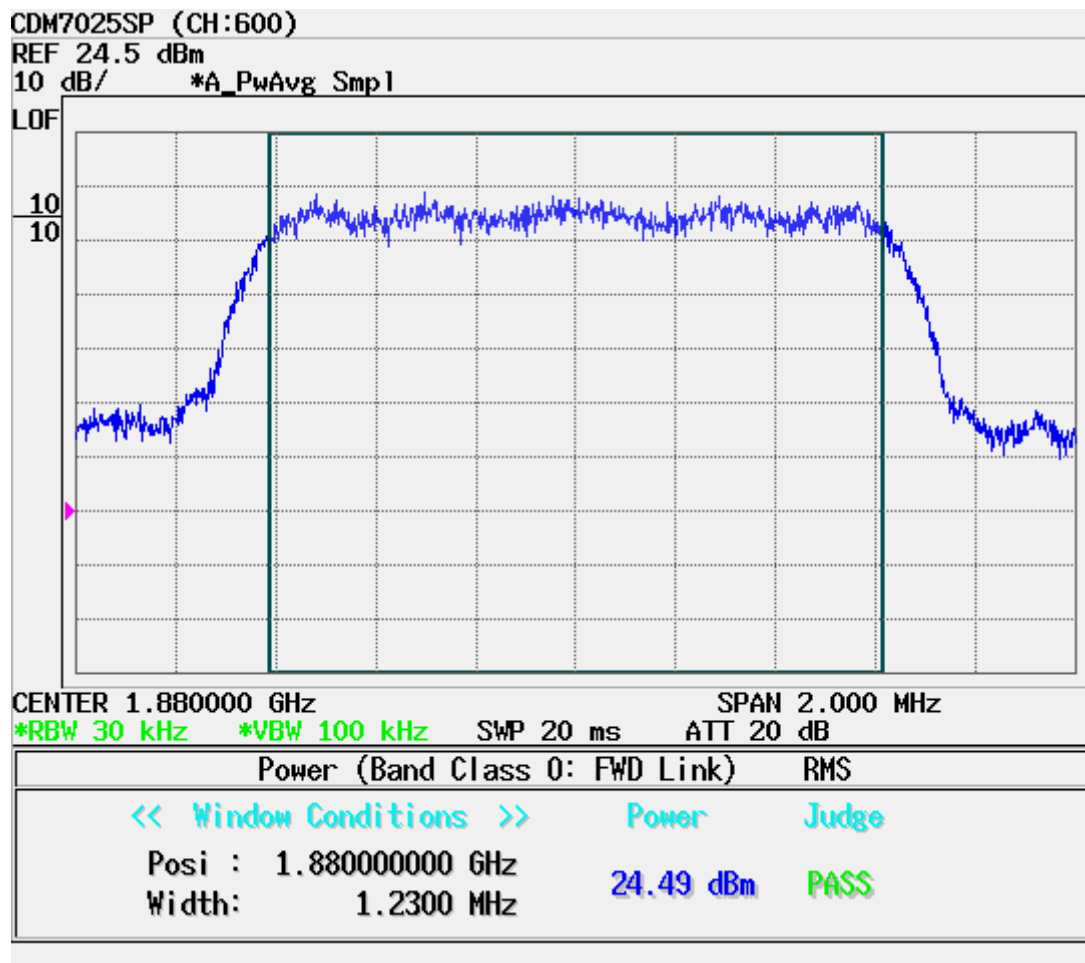


■ CDMA Mode (0363 CH.) : Occupied Bandwidth

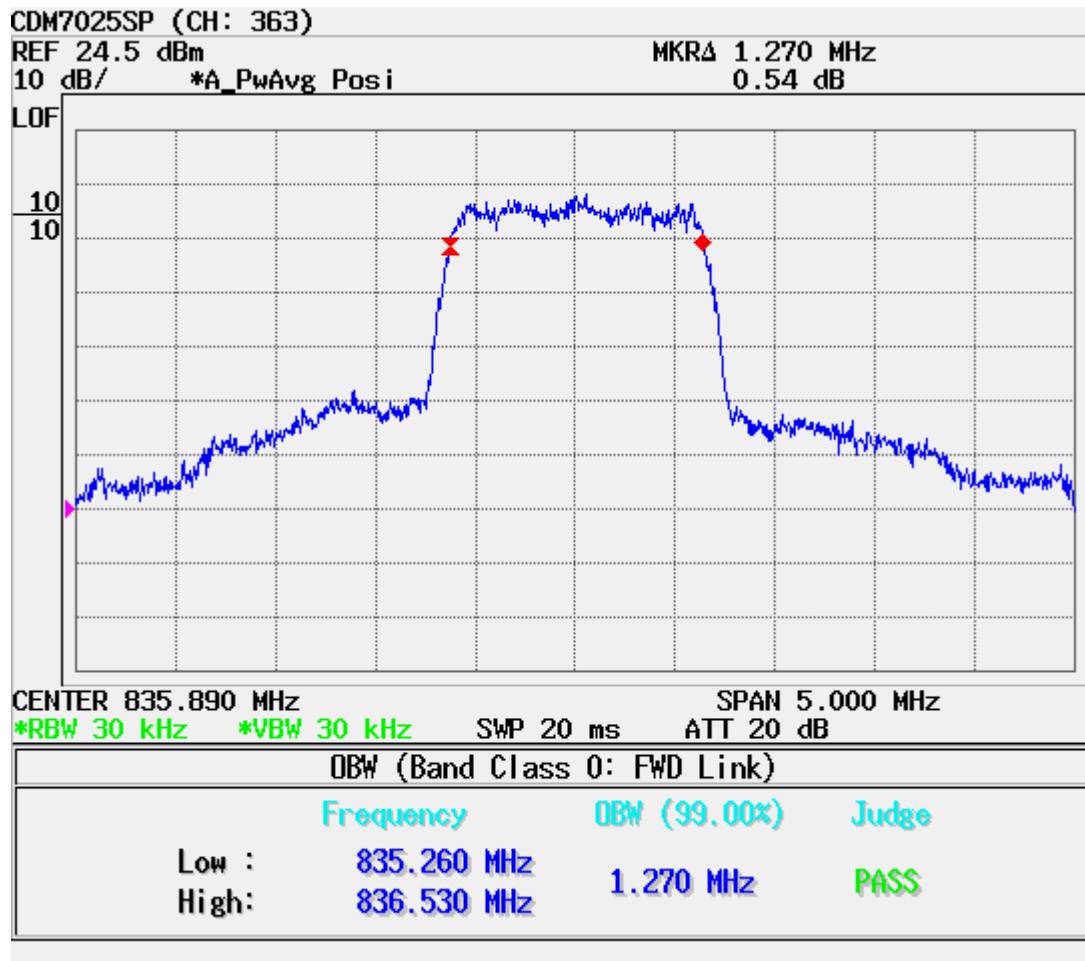


■ PCS CDMA Mode (0600 CH) : Occupied Bandwidth

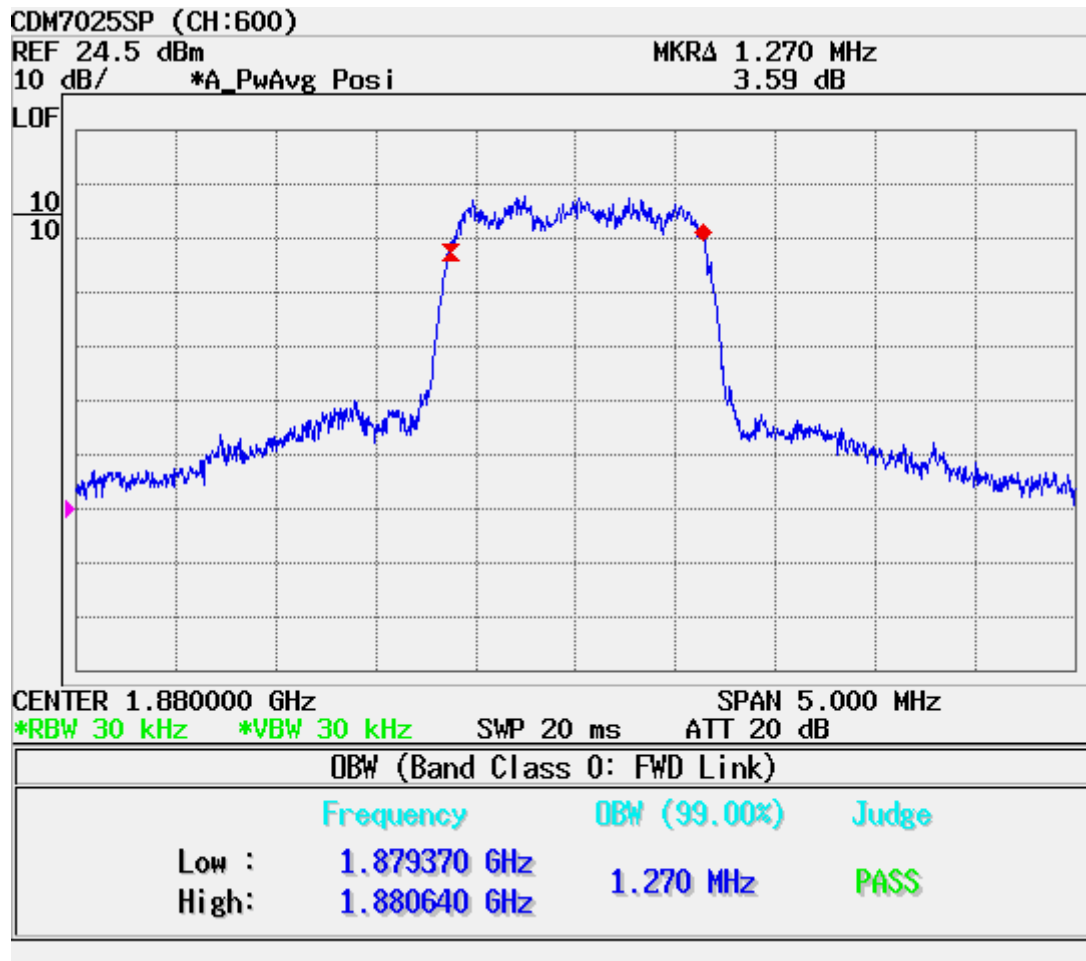

■ AMPS Mode (991 CH.) Block edge

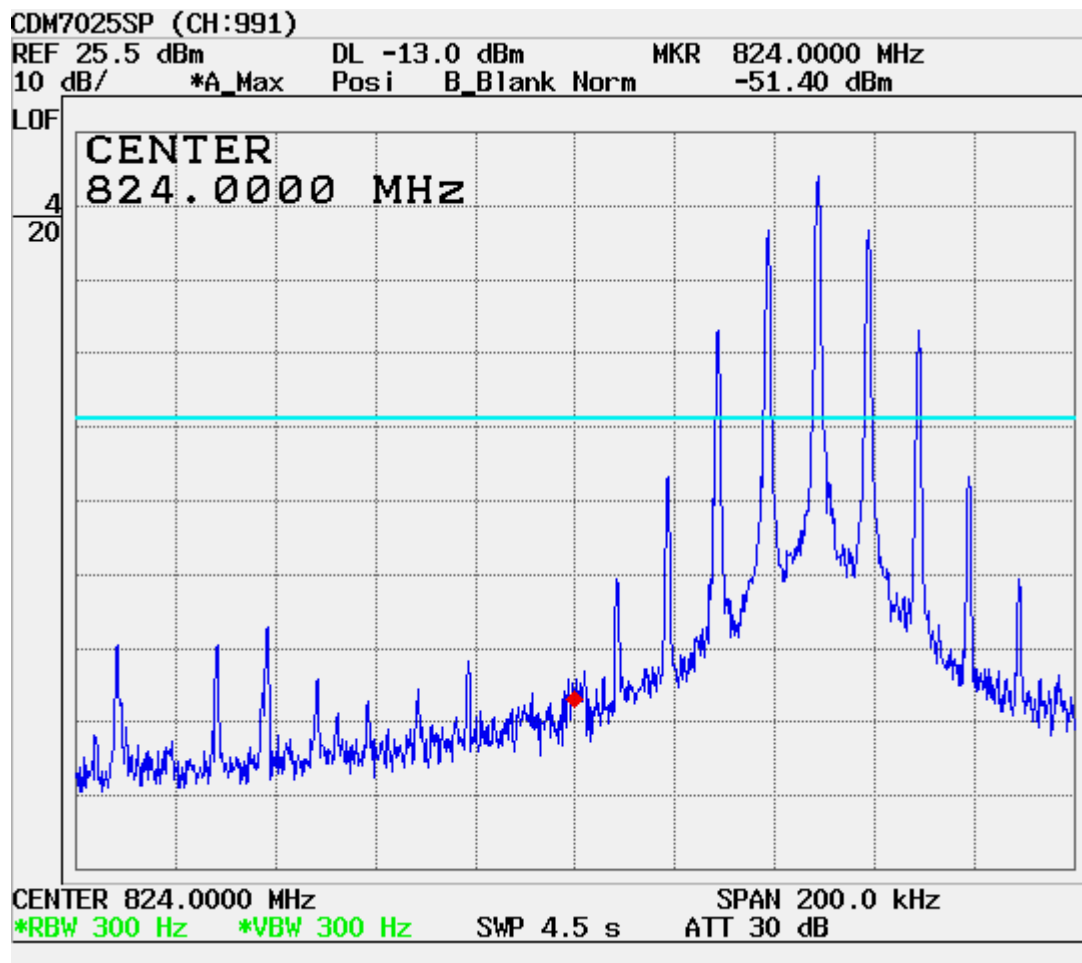


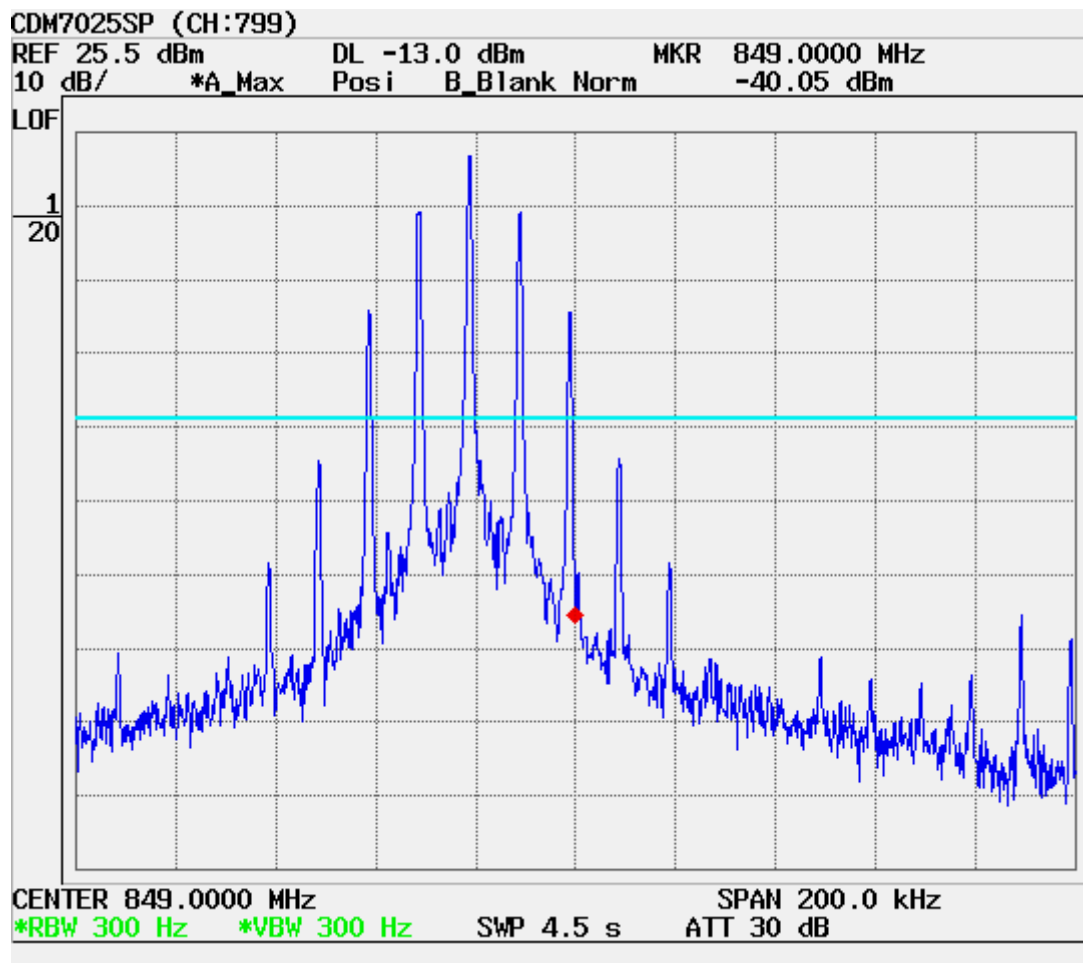■ AMPS Mode (799 CH.) Band edge

■ CDMA Cellular (1013 CH.) Band Edge



■ CDMA Cellular (777 CH.) Band Edge

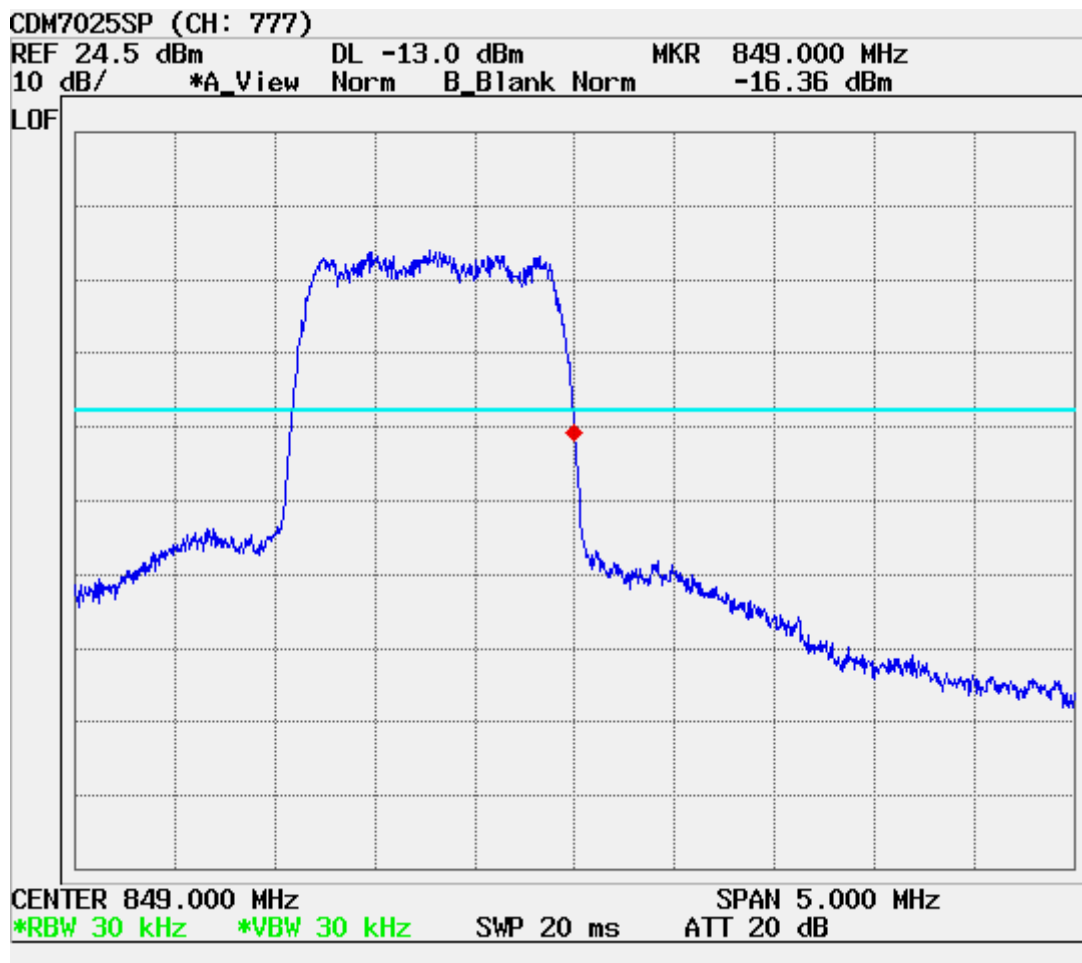


■ PCS Mode Band Edge (25 CH.)




■ PCS Mode Band Edge (1175 CH.)




■ CDMA (1013 CH) Test Mode: POWER OUT

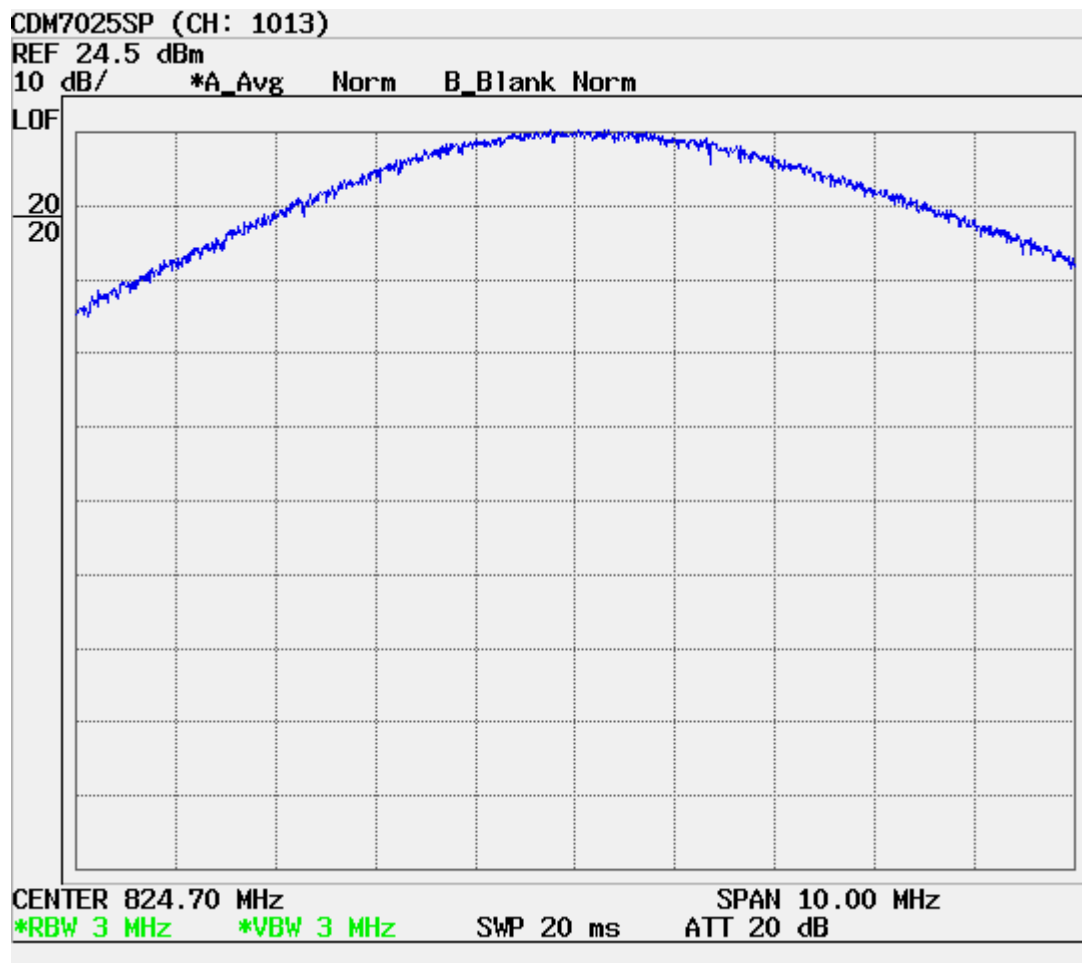


■ CDMA (0363 CH) Test Mode: POWER OUT

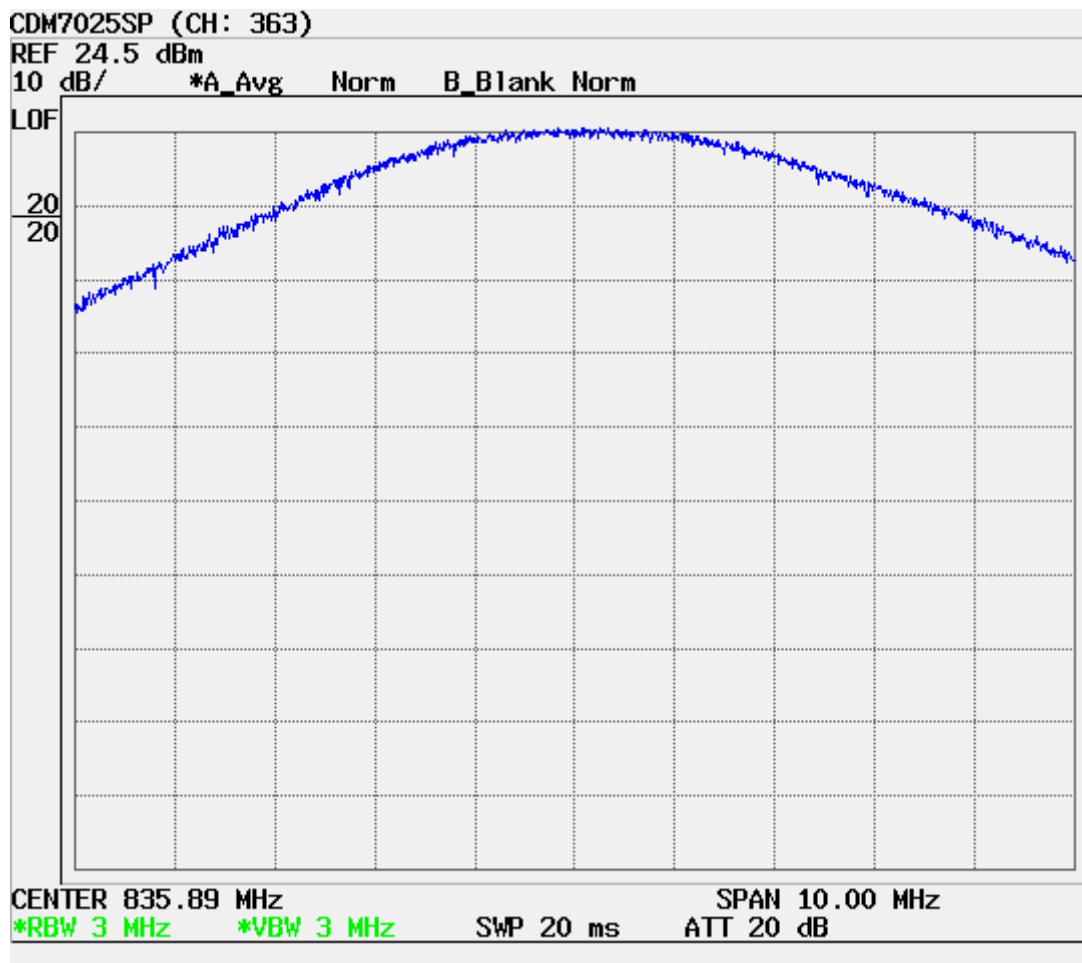


■ CDMA (0777 CH) Test Mode: POWER OUT

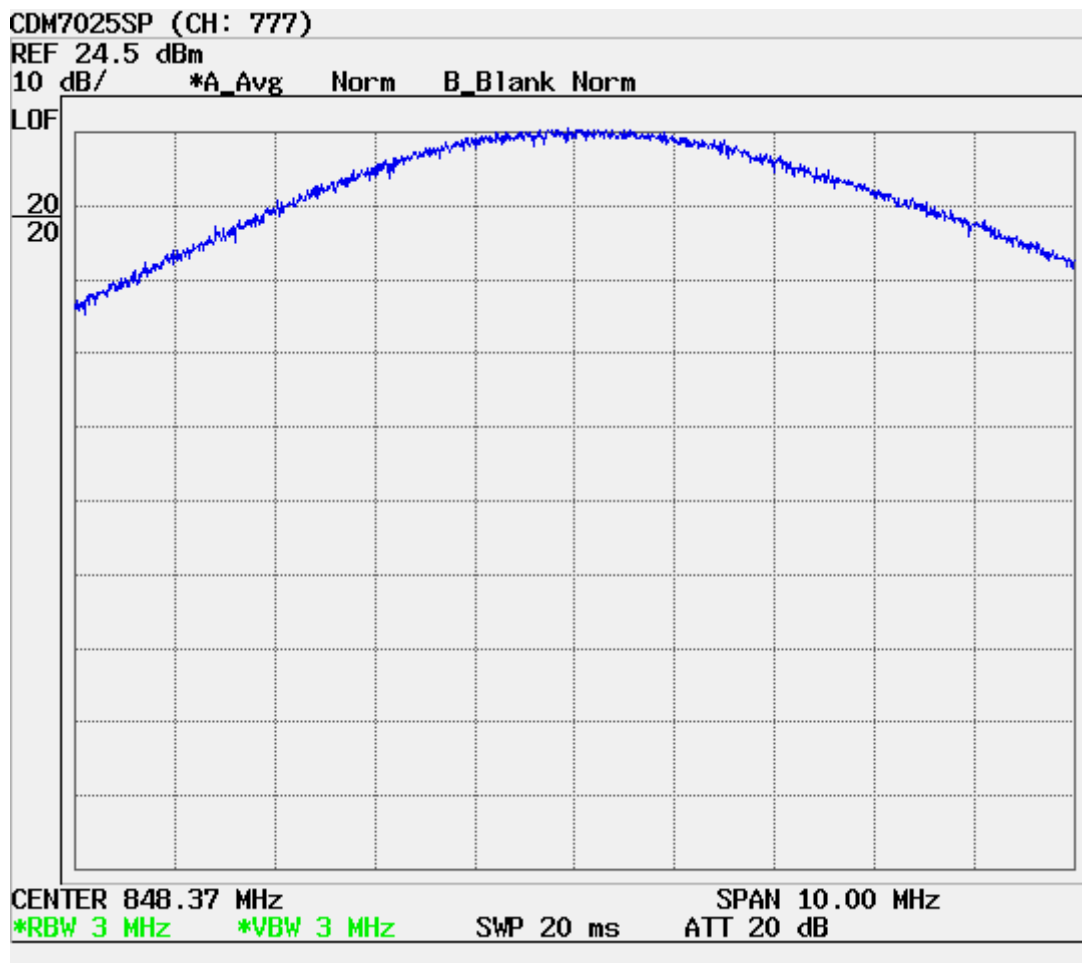


■ PCS CDMA (0025 CH) Test Mode: POWER OUT

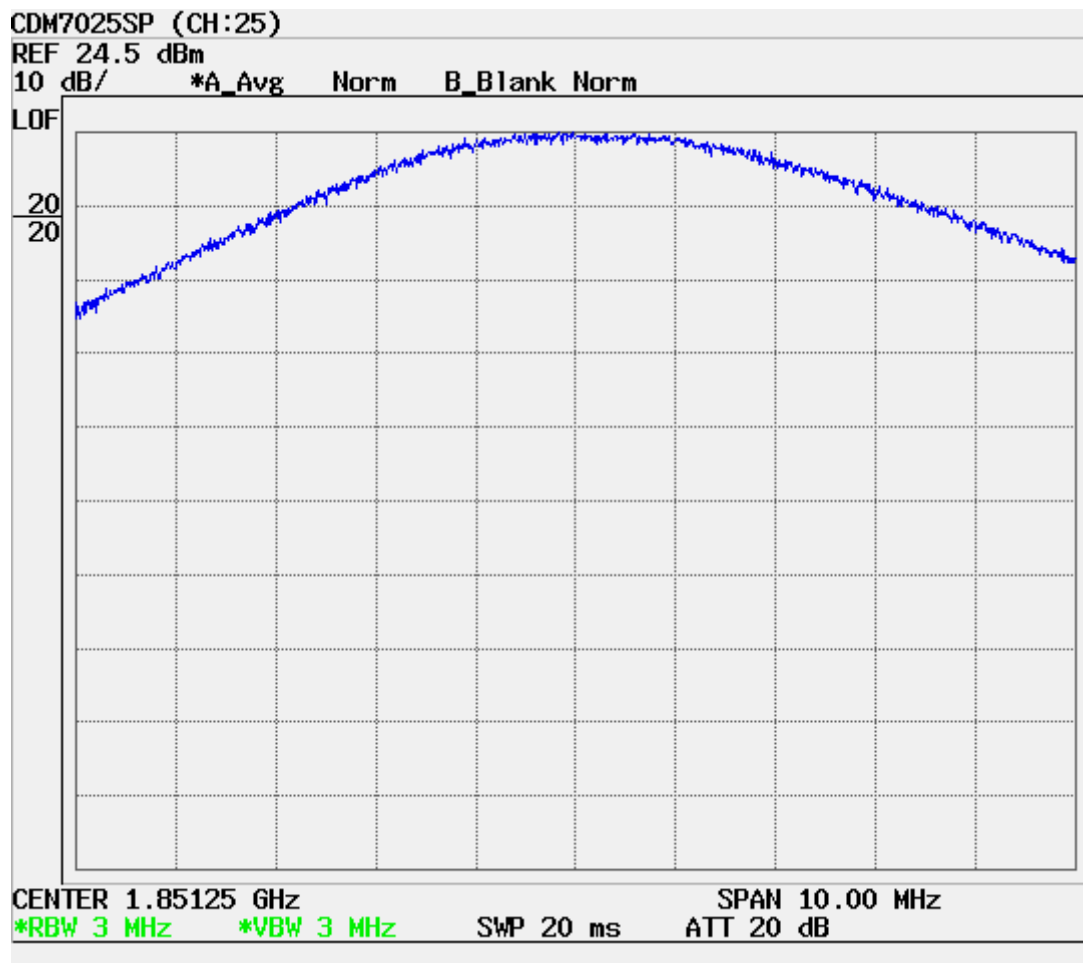



■ PCS CDMA (0600 CH) Test Mode: POWER OUT

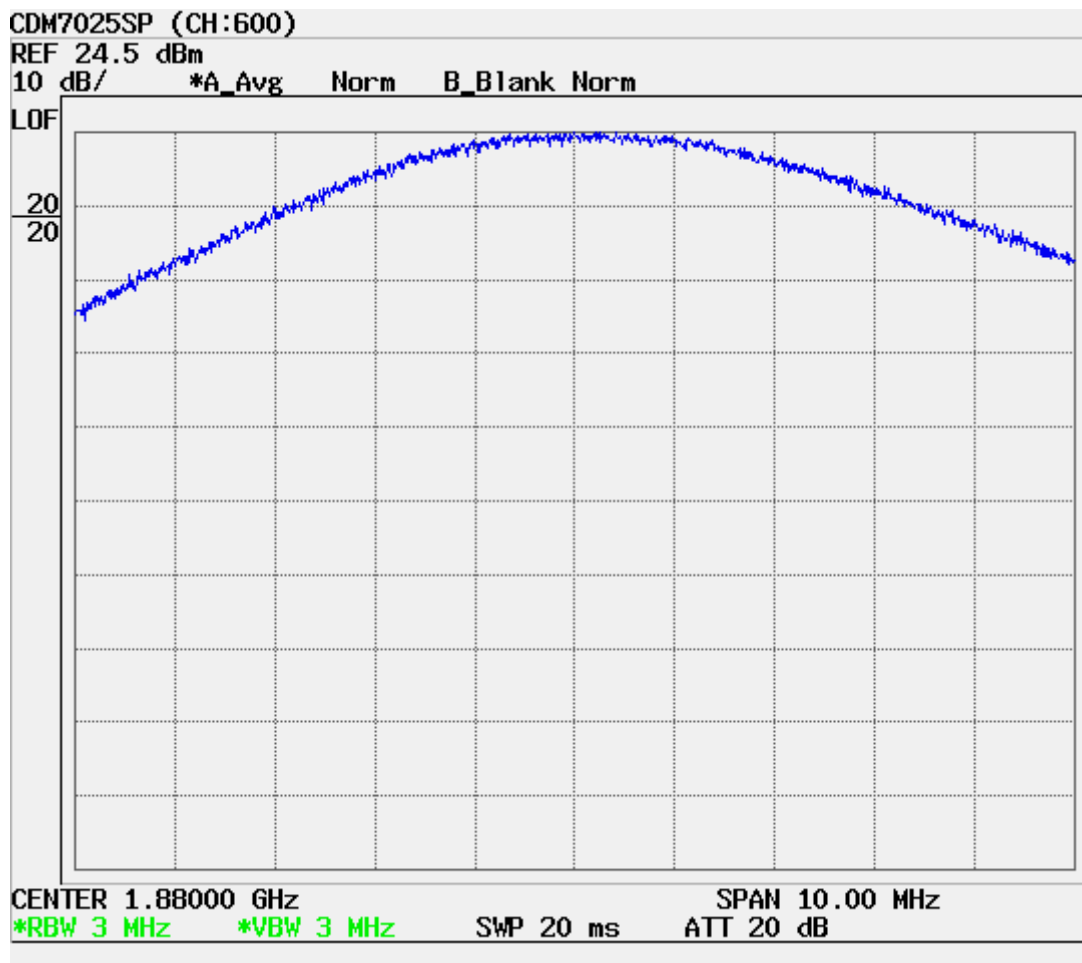


■ PCS CDMA (1175 CH) Test Mode: POWER OUT

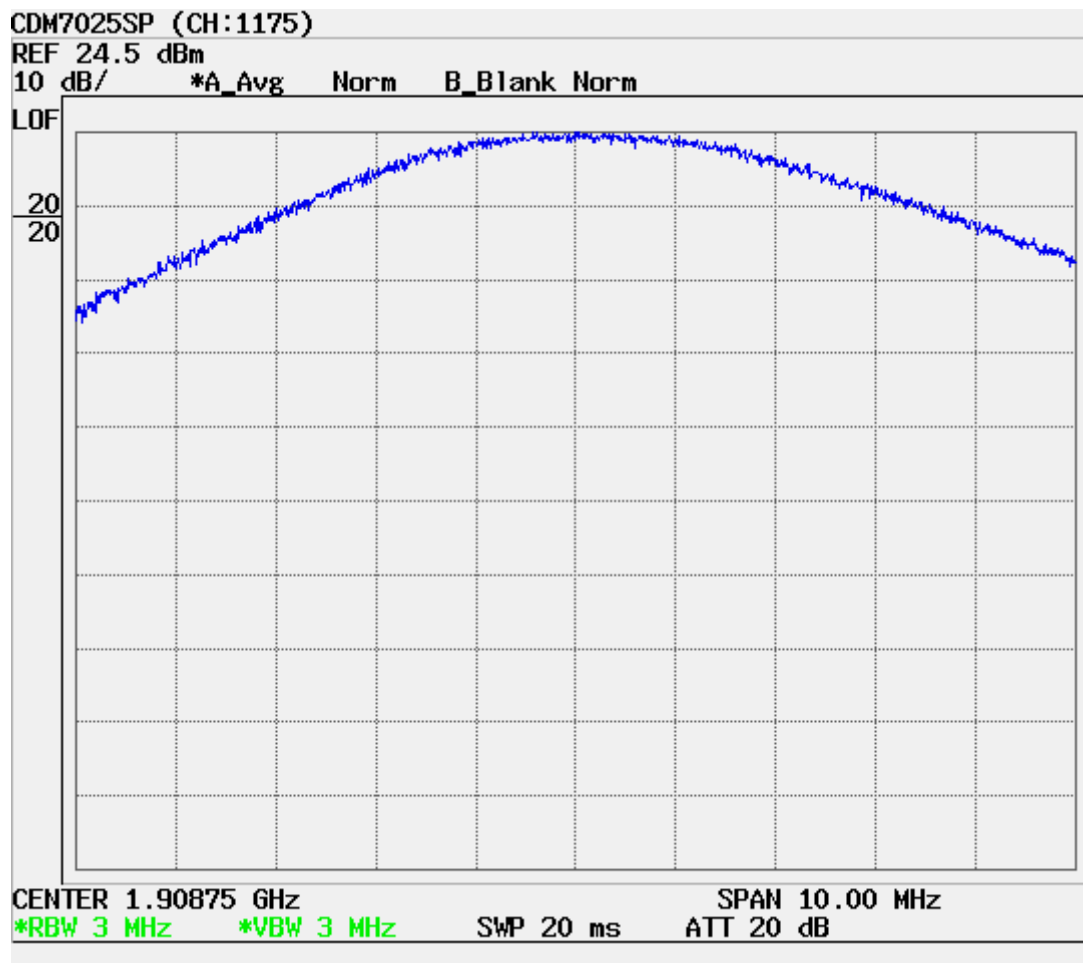

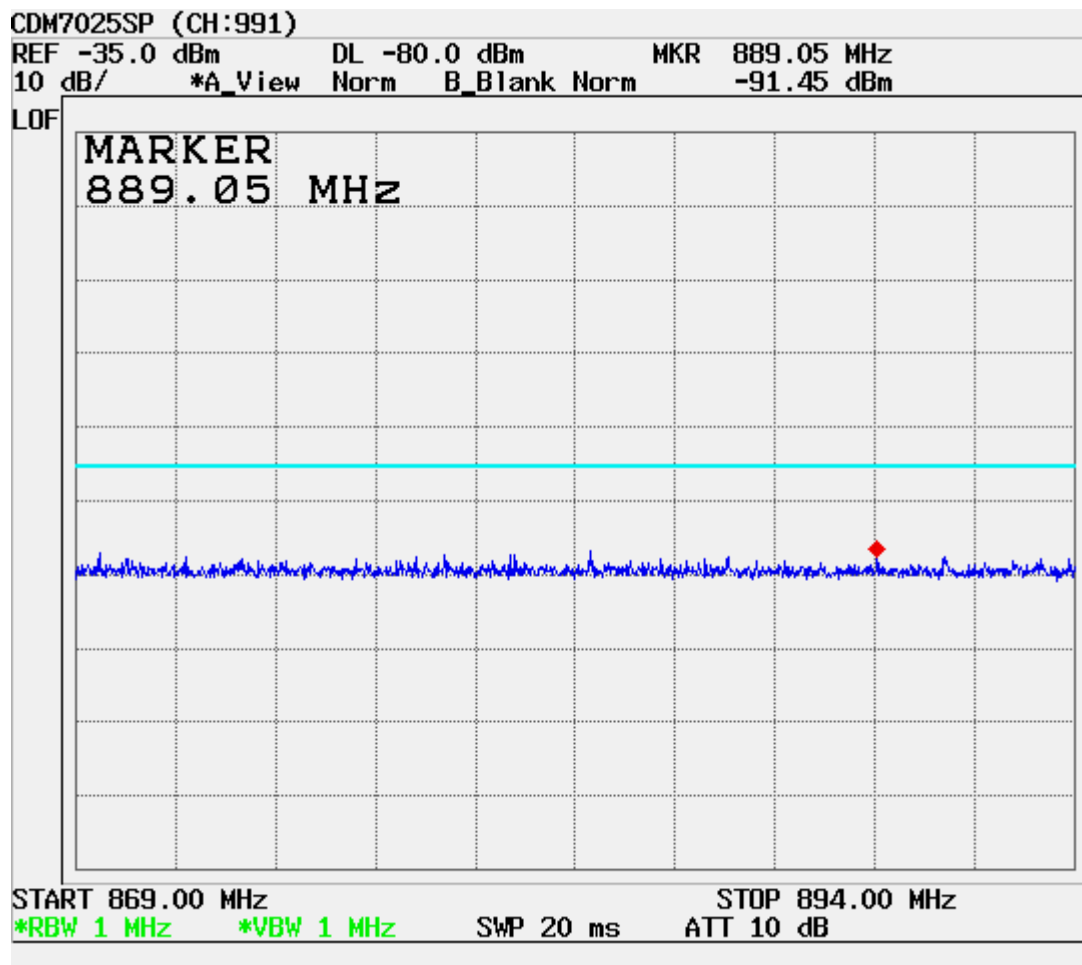

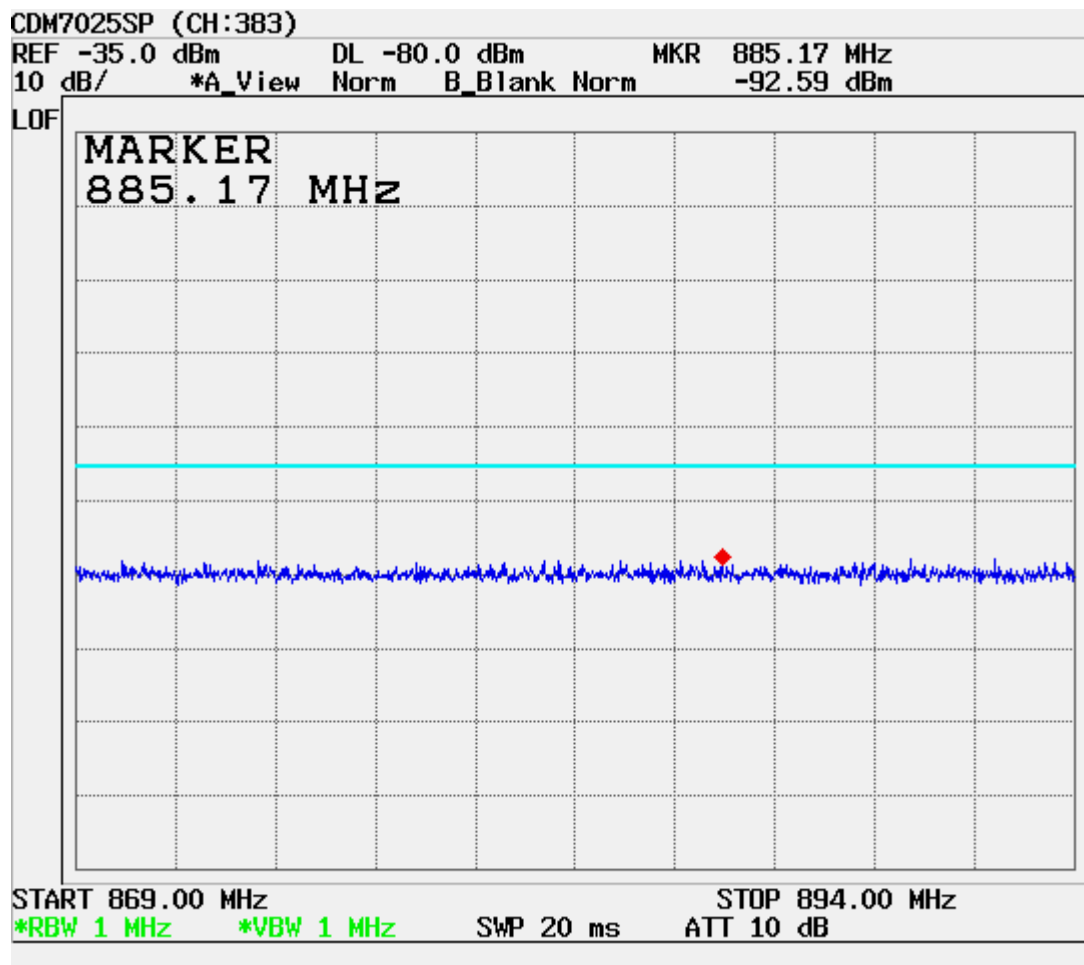

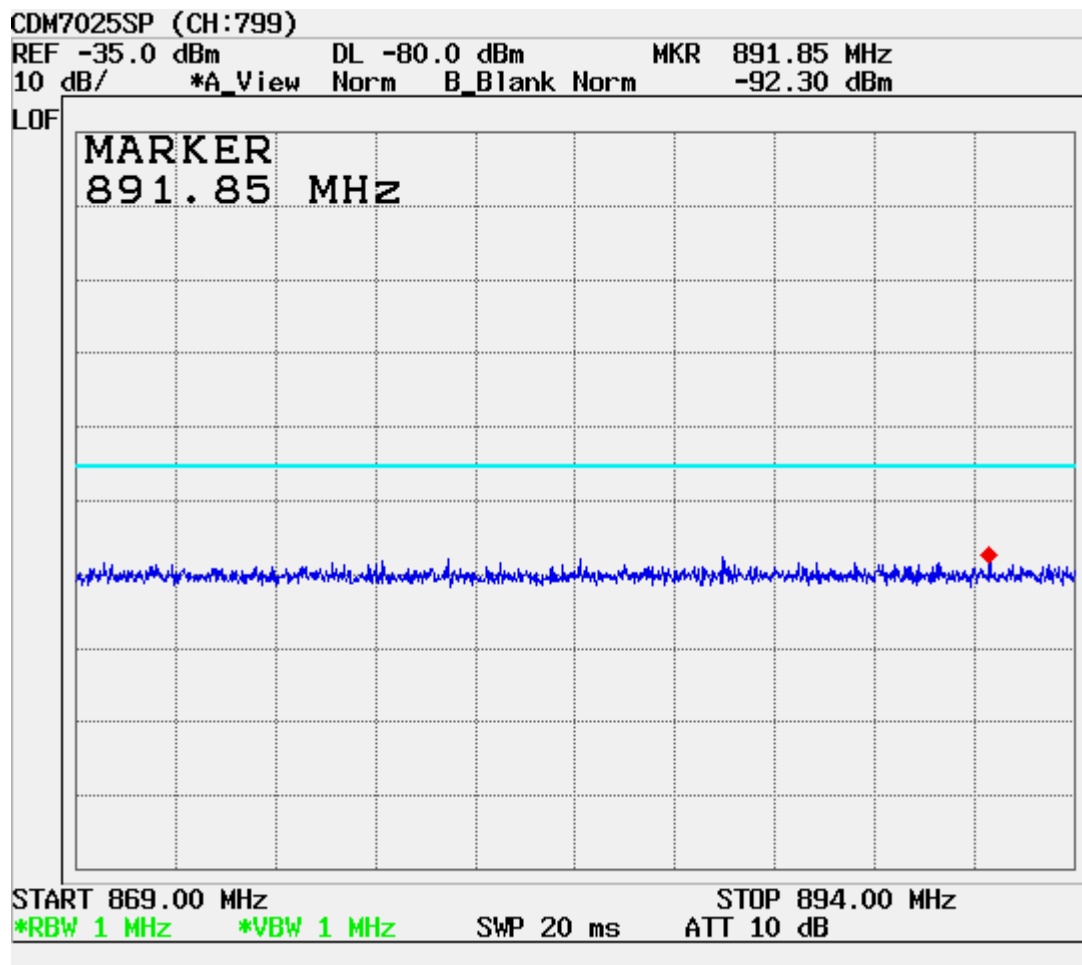

CDM7025SP (CH: 1013)

REF -35.0 dBm

DL -80.0 dBm

MKR 870.20 MHz

10 dB/


*A_View

Norm

B_Blank Norm

-90.54 dBm

LOF

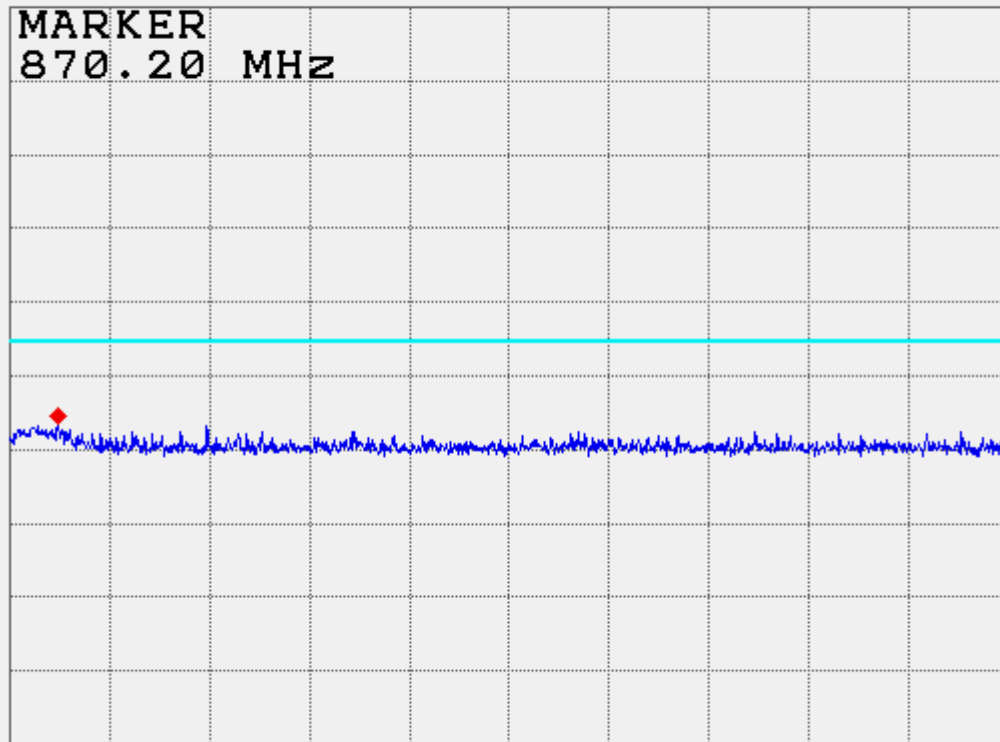MARKER
870.20 MHz

START 869.00 MHz


STOP 894.00 MHz


*RBW 1 MHz

*VBW 1 MHz

SWP 20 ms

ATT 10 dB

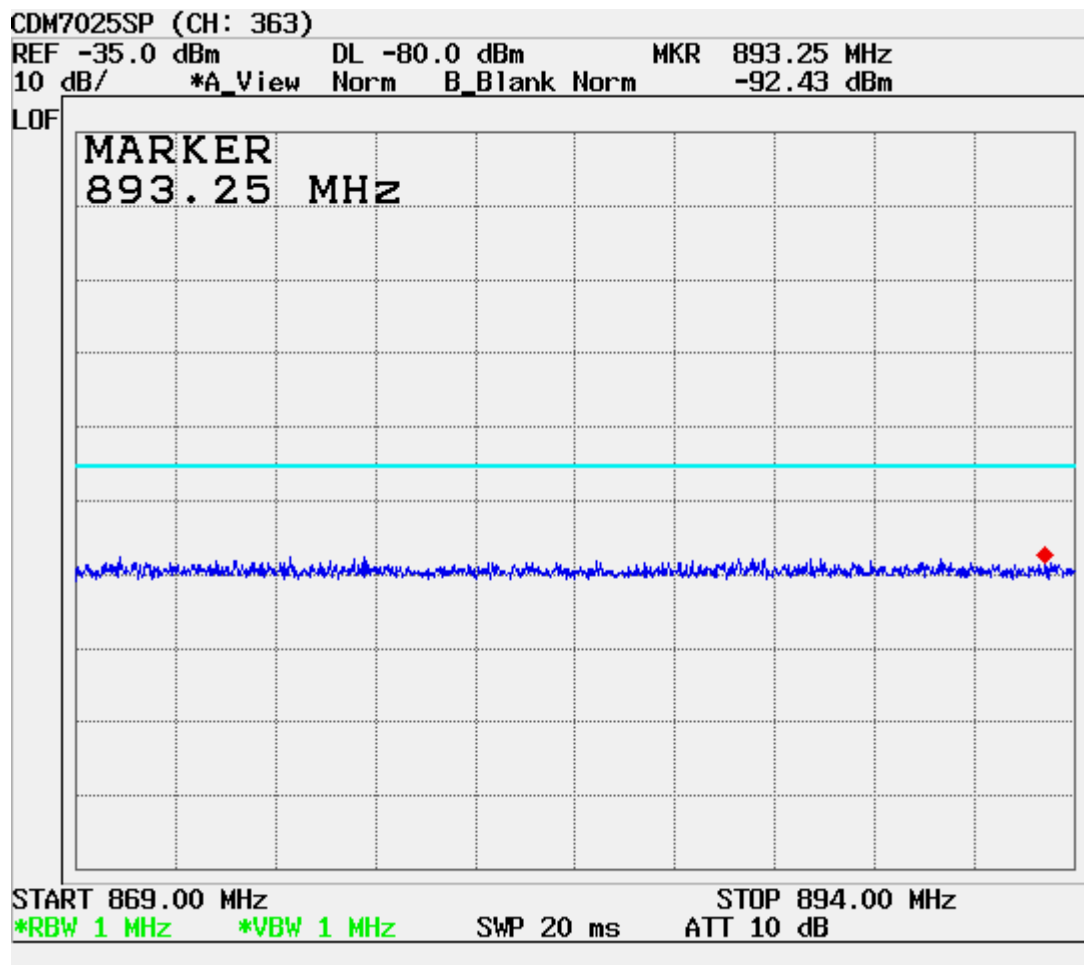

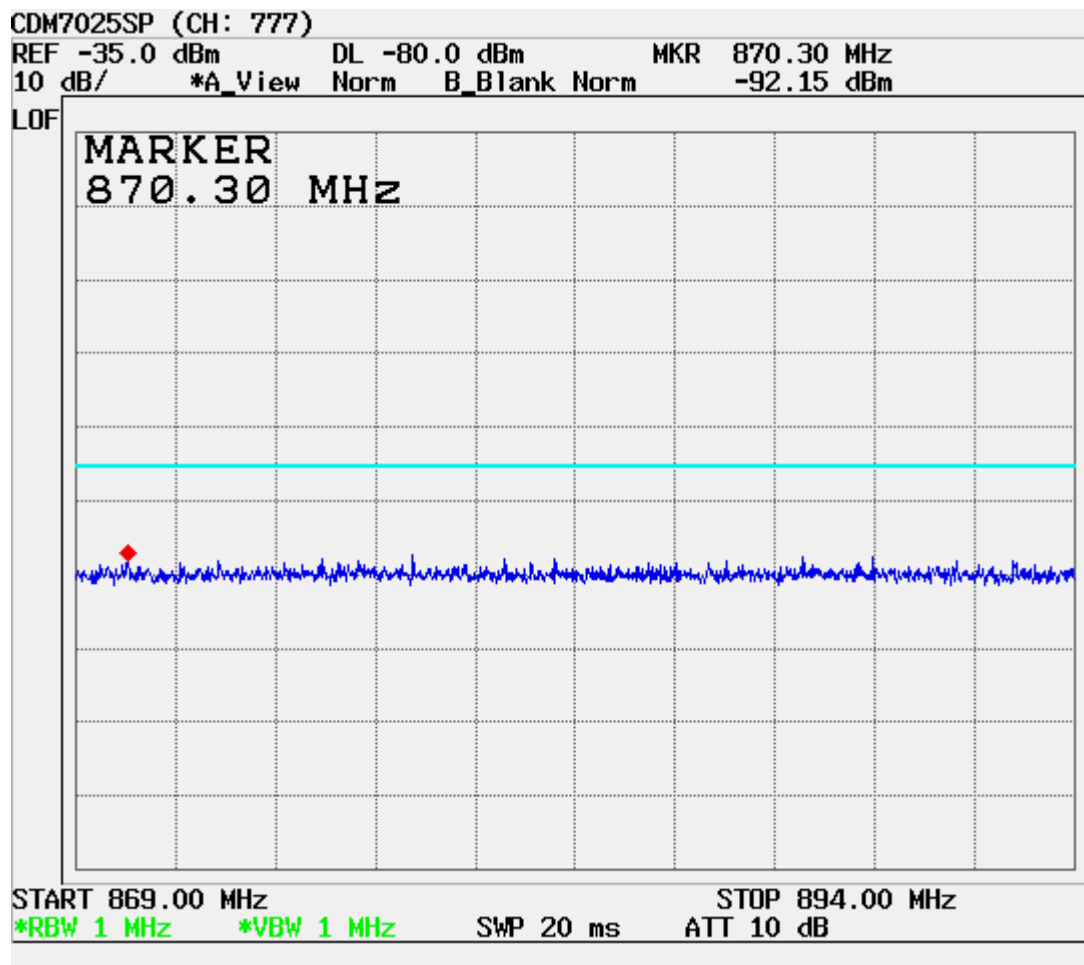


Frequency Response of Audio Low Pass Filter

■ SUBJECT: Modulation Characteristics(FCC Part 22)

■ FCC ID: 06Y-CDM7025SP

■ EUT: UTStarcom Inc. / Tri-Mode Phone

FREQ	RESPONSE	LIMIT
1000	0	0.00
1500	0	0.00
2000	-2.32	0.00
2500	-3.54	0.00
3000	-4.78	0.00
3500	-7.59	-2.68
4000	-14.28	-5.00
4500	-27.86	-7.04
5000	-41.22	-8.87
5500	-41.22	-10.53
6000	-41.22	-12.04
6500	-41.22	-13.43
7000	-41.22	-14.72
7500	-41.22	-15.92
8000	-41.22	-17.04
8500	-41.22	-18.09
9000	-41.22	-19.08
9500	-41.22	-20.02
10000	-41.22	-20.92
15000	-41.22	-27.96
30000	-41.22	-28
60000	-41.22	-28
100000	-41.22	-28

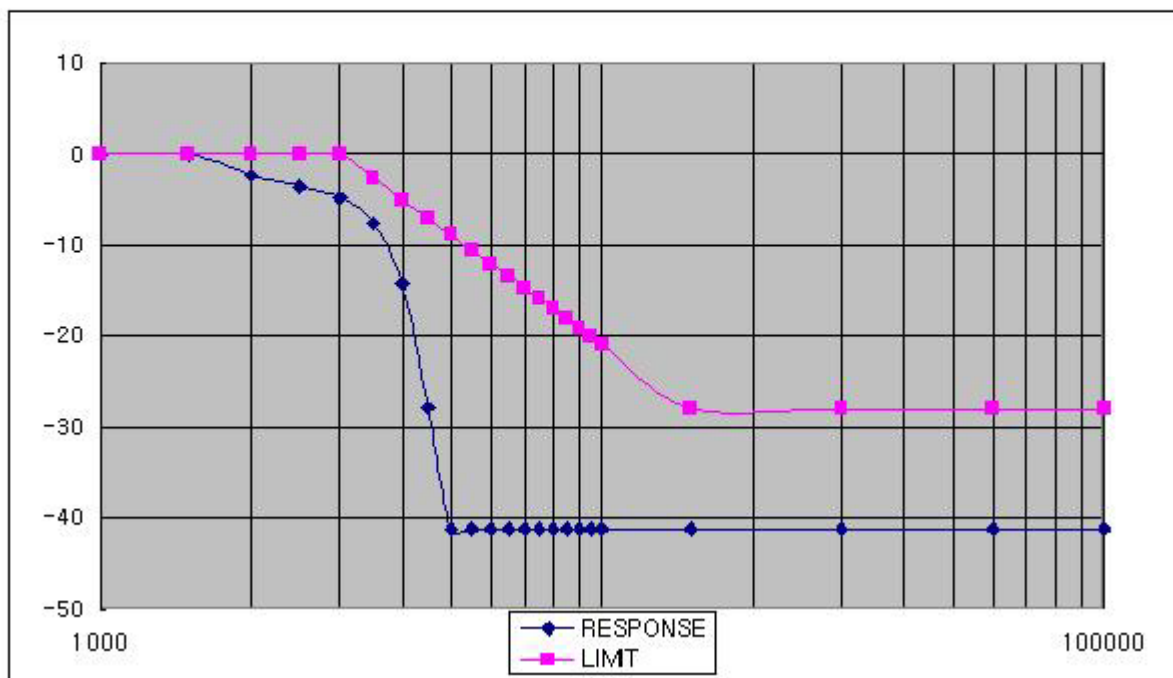


Modulation Limiting

■ SUBJECT: Modulation Characteristics(FCC Part 22)

■ FCC ID: 06Y-CDM7025SP

■ EUT: UTStarcom Inc. / Tri-Mode Phone

Input(dBV)	300Hz	1004Hz	3000Hz	LIMIT(±12KHz)
20	8,4	10,3	9,8	12
15	7,9	10,1	9,7	12
10	6,8	9,8	9,6	12
5	4,7	8,8	9,4	12
0	3,5	7,2	9,3	12
-5	2,9	5,6	8,8	12
-10	2,7	4,3	8,5	12
-15	2,6	3,9	7,9	12
-20	2,2	3,4	7,0	12

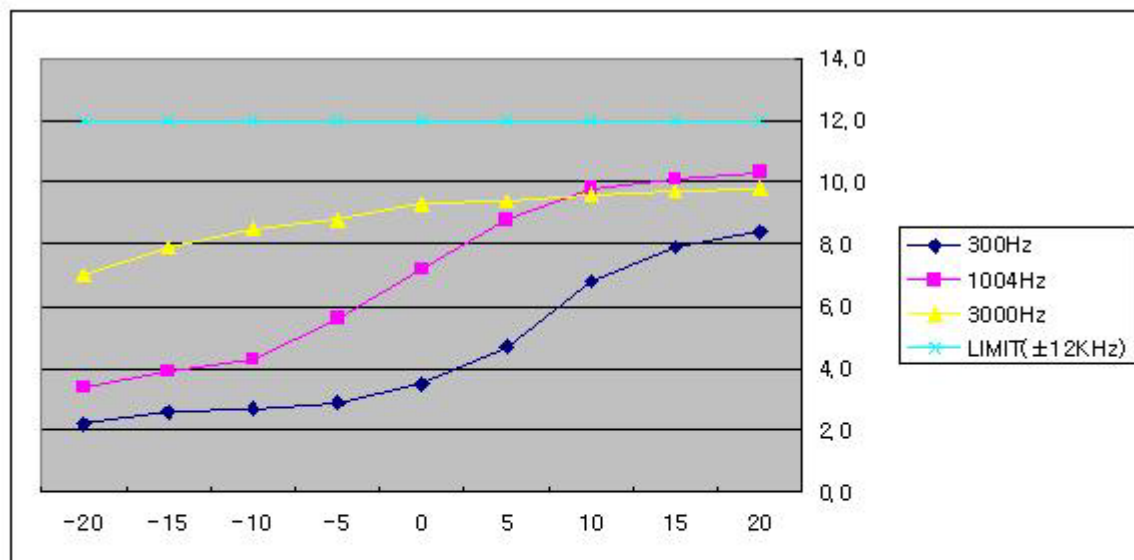

TEST METHOD

1. CONNECT MODULATION
2. 1KHz 60% DEVIATION(7.2KHz) AUDUST
3. VARY INPUT LEVEL (5dB)
4. VARY FREQUENCY AT 300Hz, 1004Hz, 3000Hz)

Transmitter Audio Frequency Response

- SUBJECT: Modulation Characteristics(FCC Part22)
- FCC ID: 06Y-CDM7025SP
- EUT: UTStarcom Inc. / Tri-Mode Phone

FREQUENCY	RESONSE	LIMIT	
		-3	1
300	-11.46	-13.46	-9.46
400	-8.89	-10.96	-6.96
500	-6.84	-9.02	-5.02
600	-5.12	-7.44	-3.44
700	-3.46	-6.10	-2.10
800	-2.79	-4.94	-0.94
900	-0.85	-3.92	0.08
1000	0	-3.00	1.00
1200	1.46	-1.42	2.68
1400	2.58	-0.08	3.92
1600	3.81	1.08	5.08
1800	4.66	2.11	6.11
2000	6.13	3.02	7.02
2200	6.85	3.85	7.85
2500	7.18	4.96	8.96
2600	6.69	4.96	9.30
2800	6.72	4.96	9.94
3000	6.62	4.96	10.54
3000	6.6	-40.00	10.54
3200	6.3	-40.00	9.42
3400	4.1	-40.00	8.37
3600	-0.2	-40.00	7.37
3800	-10.8	-40.00	6.43
4000	-18.9	-40.00	5.54
4200	-28.0	-40.00	4.69
4500	-28.0	-40.00	3.60
4800	-28.0	-40.00	2.38
5100	-28.0	-40.00	1.32
5400	-28.0	-40.00	0.33
5700	-28.0	-40.00	-0.61
5900	-28.0	-40.00	-1.21
5900	-28.0	-40.00	-24.46
6100	-28.0	-40.00	-24.46
6100	-28.0	-40.00	-1.79
6500	-28.0	-40.00	-2.89
8000	-28.0	-40.00	-6.50
10000	-28.0	-40.00	-10.38
13000	-28.0	-40.00	-14.93
15000	-28.0	-40.00	-17.42
15000	-28.0	-40.00	-17.46
30000	-28.0	-40.00	-17.46

