

ATTACHMENT O – SAR TEST PLOTS (1 of 3)

Test Laboratory: HCT

MODEL: CDM7075

Company : UTStarcom Inc.

Mode : CDMA 835 / Channel : 1013

Liquid Temperature : 21.3 °C

Date Tested : February 02, 2006

DUT: CDM7075; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 825$ MHz; $\sigma = 0.864$ mho/m; $\epsilon_r = 41.7$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn614; Calibrated: 2005-04-21

- Phantom: SAM 835/900 MHz; Type: SAM

Left touch 1013/Area Scan (51x101x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 1.28 mW/g


Left touch 1013/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 32.0 V/m; Power Drift = 0.028 dB

Peak SAR (extrapolated) = 1.66 W/kg

SAR(1 g) = 1.22 mW/g; SAR(10 g) = 0.844 mW/g

Maximum value of SAR (measured) = 1.32 mW/g

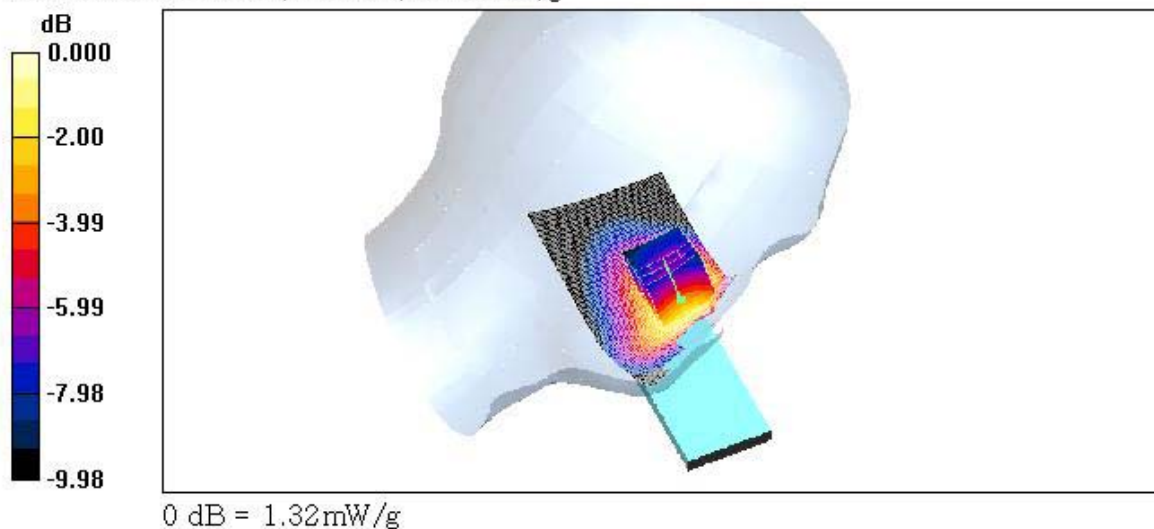

Test Laboratory: HCT

MODEL: CDM7075

Company : UTStarcom Inc.

Mode : CDMA 835 / Channel : 1013

Liquid Temperature : 21.3 °C

Date Tested : February 02, 2006

DUT: CDM7075; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 825 \text{ MHz}$; $\sigma = 0.864 \text{ mho/m}$; $\epsilon_r = 41.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn614; Calibrated: 2005-04-21

- Phantom: SAM 835/900 MHz; Type: SAM

Left touch 1013/Area Scan (51x101x1): Measurement grid: $\Delta x = 15\text{mm}$, $\Delta y = 15\text{mm}$

Maximum value of SAR (interpolated) = 1.33 mW/g


Left touch 1013/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8\text{mm}$, $\Delta y = 8\text{mm}$, $\Delta z = 5\text{mm}$

Reference Value = 32.3 V/m; Power Drift = -0.129 dB

Peak SAR (extrapolated) = 1.69 W/kg

SAR(1 g) = 1.2 mW/g; SAR(10 g) = 0.831 mW/g

Maximum value of SAR (measured) = 1.27 mW/g

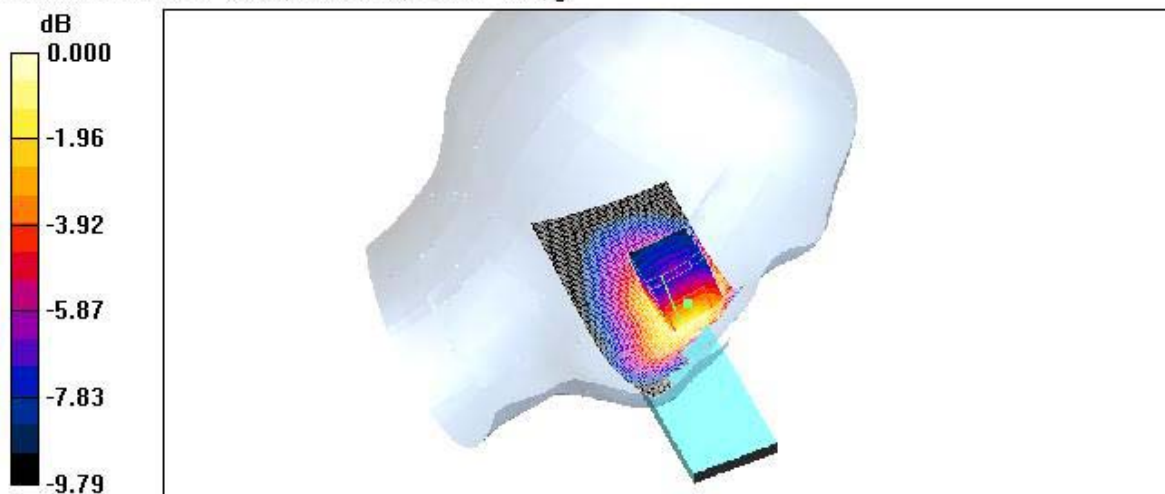

0 dB = 1.27mW/g

Test Laboratory: HCT

MODEL: CDM7075

Company : UTStarcom Inc.

Mode : CDMA 835 / Channel : 384

Liquid Temperature : 21.3 °C

Date Tested : February 02, 2006

DUT: CDM7075; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.876$ mho/m; $\epsilon_r = 41.5$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn614; Calibrated: 2005-04-21

- Phantom: SAM 835/900 MHz; Type: SAM

Left touch 384/Area Scan (51x101x1): Measurement grid: $\Delta x = 15$ mm, $\Delta y = 15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.36 mW/g

Left touch 384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8$ mm, $\Delta y = 8$ mm, $\Delta z = 5$ mm


Reference Value = 32.5 V/m; Power Drift = -0.139 dB

Peak SAR (extrapolated) = 1.76 W/kg

SAR(1 g) = 1.29 mW/g; SAR(10 g) = 0.882 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.38 mW/g

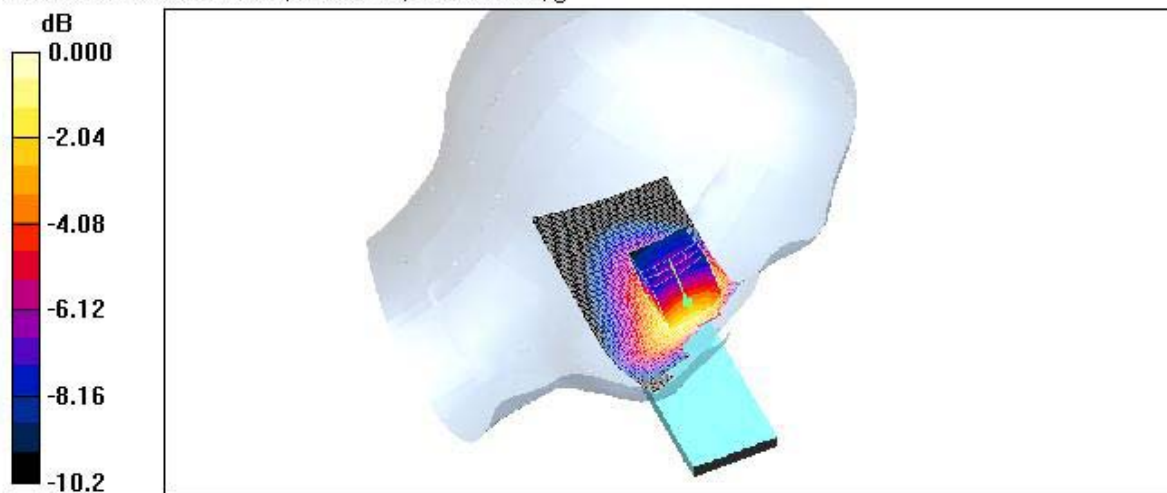

0 dB = 1.38mW/g

Test Laboratory: HCT

MODEL: CDM7075

Company : UTStarcom Inc.

Mode : CDMA 835 / Channel : 384

Liquid Temperature : 21.3 °C

Date Tested : February 02, 2006

DUT: CDM7075; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.52 \text{ MHz}$; $\sigma = 0.876 \text{ mho/m}$; $\epsilon_r = 41.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn614; Calibrated: 2005-04-21

- Phantom: SAM 835/900 MHz; Type: SAM

Left touch 384/Area Scan (51x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.09 mW/g

Left touch 384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 29.3 V/m; Power Drift = 0.008 dB

Peak SAR (extrapolated) = 1.41 W/kg

SAR(1 g) = 1.03 mW/g; SAR(10 g) = 0.704 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.10 mW/g

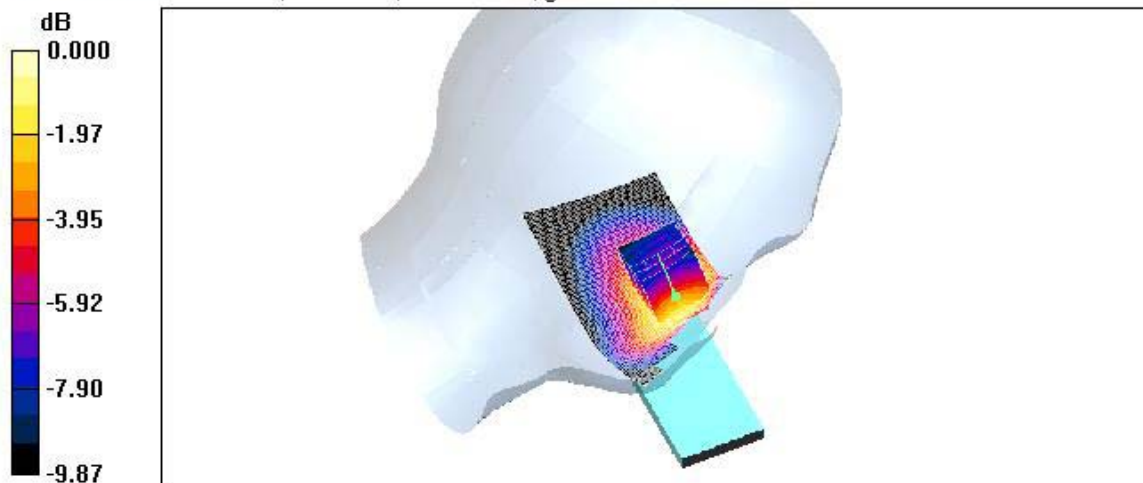

0 dB = 1.10mW/g

Test Laboratory: HCT

MODEL: CDM7075

Company : UTStarcom Inc.

Mode : CDMA 835 / Channel : 777

Liquid Temperature : 21.3 °C

Date Tested : February 02, 2006

DUT: CDM7075; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 848.31 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 848.31$ MHz; $\sigma = 0.886$ mho/m; $\epsilon_r = 41.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn614; Calibrated: 2005-04-21

- Phantom: SAM 835/900 MHz; Type: SAM

Left touch 777/Area Scan (51x101x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.24 mW/g

Left touch 777/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 31.0 V/m; Power Drift = -0.194 dB

Peak SAR (extrapolated) = 1.60 W/kg

SAR(1 g) = 1.17 mW/g; SAR(10 g) = 0.806 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.26 mW/g

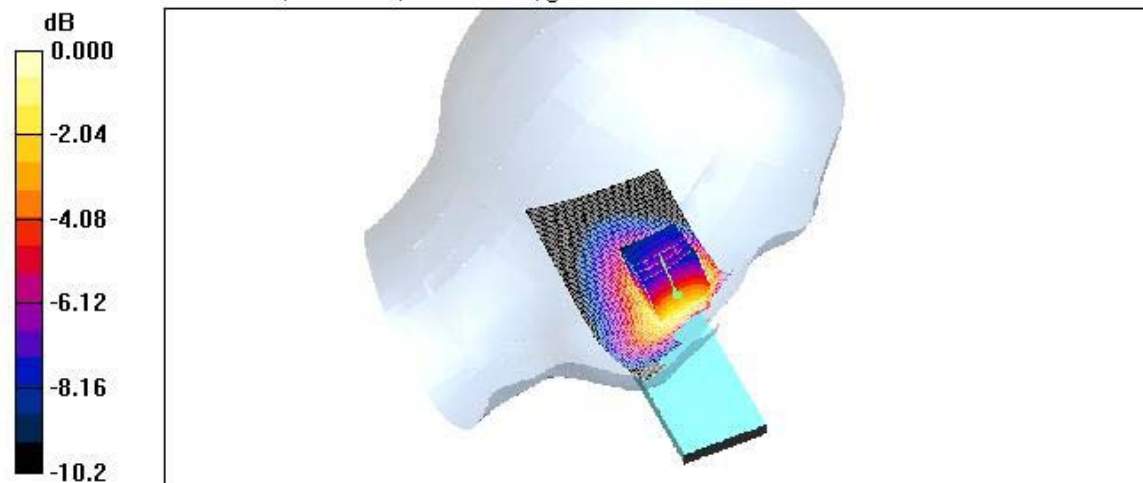

0 dB = 1.26mW/g

Test Laboratory: HCT

MODEL: CDM7075

Company : UTStarcom Inc.

Mode : CDMA 835 / Channel : 777

Liquid Temperature : 21.3 °C

Date Tested : February 02, 2006

DUT: CDM7075; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 848.31 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 848.31$ MHz; $\sigma = 0.886$ mho/m; $\epsilon_r = 41.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn614; Calibrated: 2005-04-21

- Phantom: SAM 835/900 MHz; Type: SAM

Left touch 777/Area Scan (51x101x1): Measurement grid: $\Delta x = 15$ mm, $\Delta y = 15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.22 mW/g

Left touch 777/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8$ mm, $\Delta y = 8$ mm, $\Delta z = 5$ mm


Reference Value = 30.8 V/m; Power Drift = -0.151 dB

Peak SAR (extrapolated) = 1.57 W/kg

SAR(1 g) = 1.14 mW/g; SAR(10 g) = 0.782 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.20 mW/g

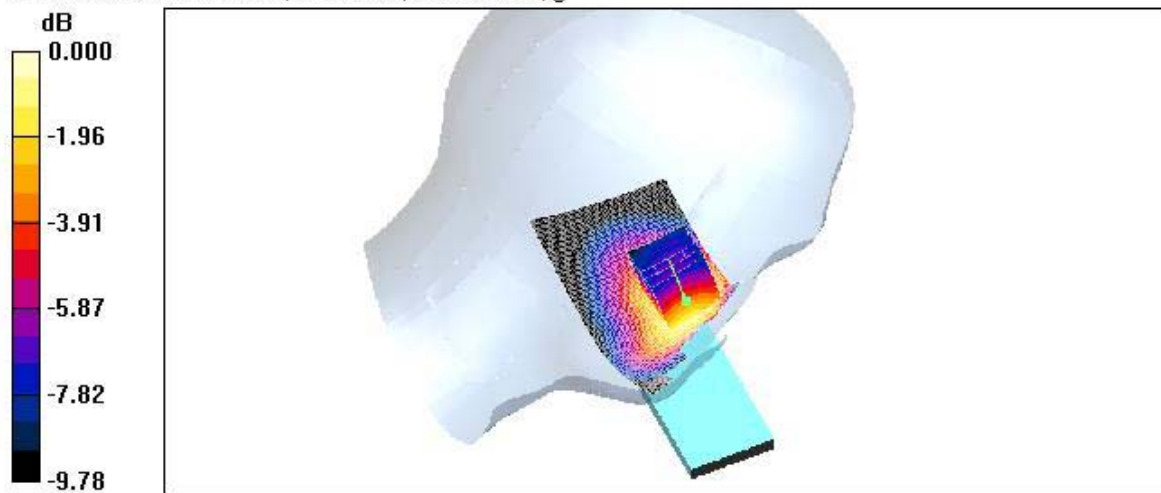

0 dB = 1.20mW/g

Test Laboratory: HCT

MODEL: CDM7075

Company : UTStarcom Inc.

Mode : CDMA 835 / Channel : 1013

Liquid Temperature : 21.3 °C

Date Tested : February 02, 2006

DUT: CDM7075; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC, Frequency: 824.7 MHz,Duty Cycle: 1:1

Medium parameters used: $f = 825 \text{ MHz}$; $\sigma = 0.864 \text{ mho/m}$; $\epsilon_r = 41.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn614; Calibrated: 2005-04-21

- Phantom: SAM 835/900 MHz; Type: SAM

Right touch 1013/Area Scan (51x101x1): Measurement grid: $\Delta x = 15 \text{ mm}$, $\Delta y = 15 \text{ mm}$

Maximum value of SAR (interpolated) = 1.22 mW/g


Right touch 1013/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8 \text{ mm}$, $\Delta y = 8 \text{ mm}$, $\Delta z = 5 \text{ mm}$

Reference Value = 31.0 V/m; Power Drift = -0.091 dB

Peak SAR (extrapolated) = 1.54 W/kg

SAR(1 g) = 1.13 mW/g; SAR(10 g) = 0.786 mW/g

Maximum value of SAR (measured) = 1.19 mW/g

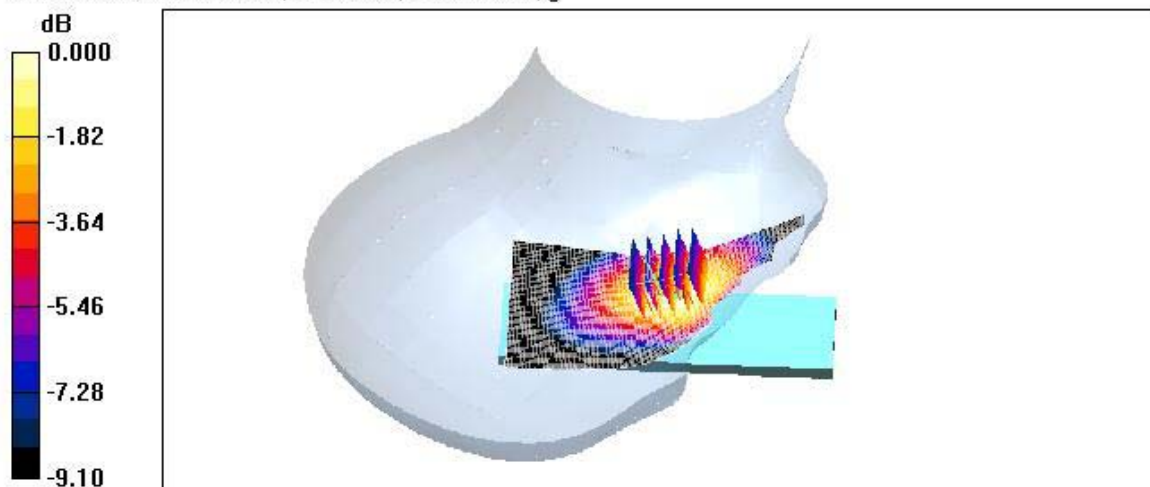

Test Laboratory: HCT

MODEL: CDM7075

Company: UTStarcom Inc.

Mode: CDMA 835 / Channel: 1013

Liquid Temperature: 21.3 °C

Date Tested: February 02, 2006

DUT: CDM7075; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 825 \text{ MHz}$; $\sigma = 0.864 \text{ mho/m}$; $\epsilon_r = 41.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn614; Calibrated: 2005-04-21

- Phantom: SAM 835/900 MHz; Type: SAM

Right touch 1013/Area Scan (51x101x1): Measurement grid: $\Delta x = 15\text{mm}$, $\Delta y = 15\text{mm}$

Maximum value of SAR (interpolated) = 1.20 mW/g


Right touch 1013/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8\text{mm}$, $\Delta y = 8\text{mm}$, $\Delta z = 5\text{mm}$

Reference Value = 31.8 V/m; Power Drift = 0.092 dB

Peak SAR (extrapolated) = 1.66 W/kg

SAR(1 g) = 1.17 mW/g; SAR(10 g) = 0.818 mW/g

Maximum value of SAR (measured) = 1.24 mW/g

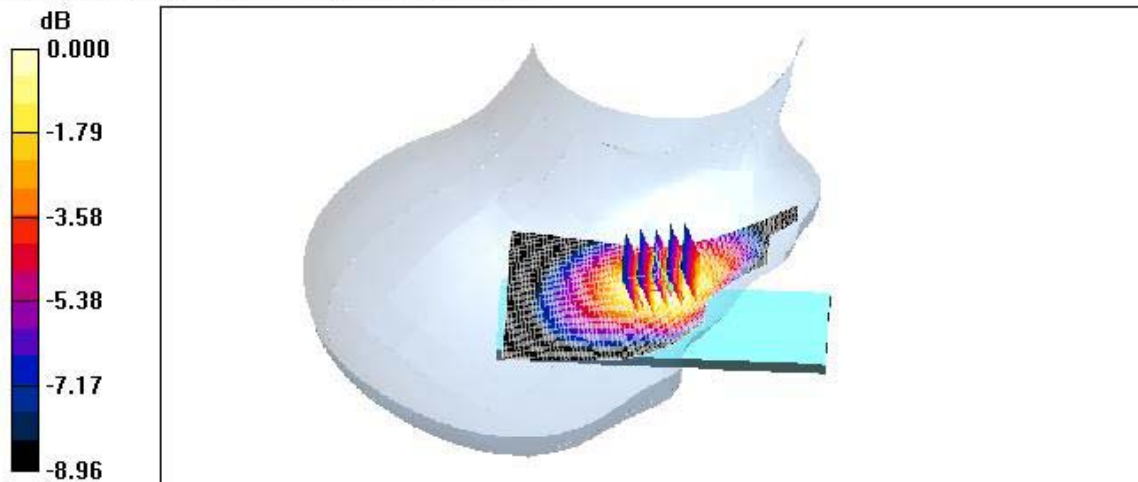

0 dB = 1.24mW/g

Test Laboratory: HCT

MODEL: CDM7075

Company : UTStarcom Inc.

Mode : CDMA 835 / Channel : 384

Liquid Temperature : 21.3 °C

Date Tested : February 02, 2006

DUT: CDM7075; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.876$ mho/m; $\epsilon_r = 41.5$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn614; Calibrated: 2005-04-21

- Phantom: SAM 835/900 MHz; Type: SAM

Right touch 384/Area Scan (51x101x1): Measurement grid: $\Delta x = 15$ mm, $\Delta y = 15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.35 mW/g

Right touch 384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8$ mm, $\Delta y = 8$ mm, $\Delta z = 5$ mm


Reference Value = 31.8 V/m; Power Drift = -0.021 dB

Peak SAR (extrapolated) = 1.75 W/kg

SAR(1 g) = 1.28 mW/g; SAR(10 g) = 0.881 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.34 mW/g

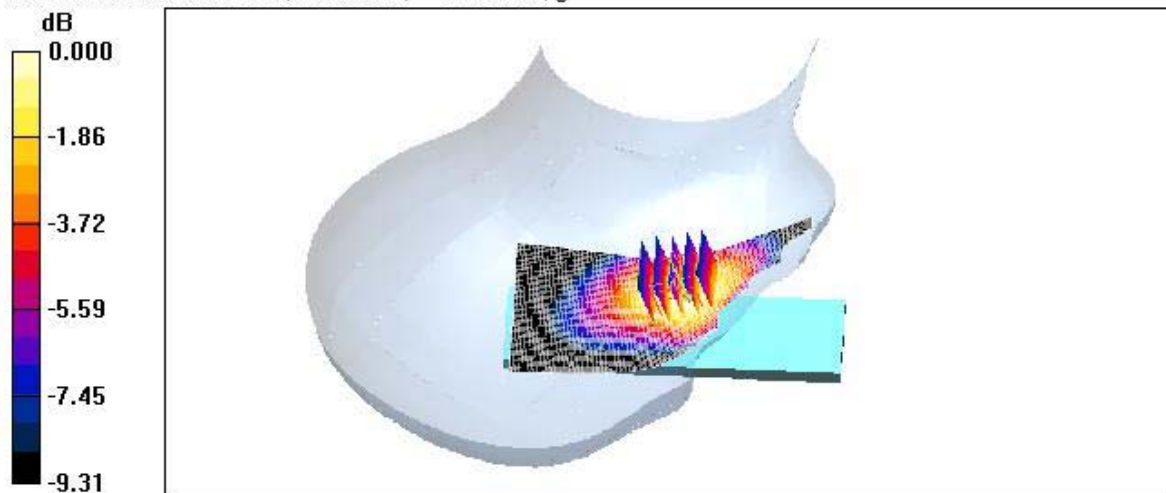

Test Laboratory: HCT

MODEL: CDM7075

Company : UTStarcom Inc.

Mode : CDMA 835 / Channel : 384

Liquid Temperature : 21.3 °C

Date Tested : February 02, 2006

DUT: CDM7075; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.876$ mho/m; $\epsilon_r = 41.5$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn614; Calibrated: 2005-04-21

- Phantom: SAM 835/900 MHz; Type: SAM

Right touch 384/Area Scan (51x101x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.20 mW/g

Right touch 384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 30.9 V/m; Power Drift = -0.167 dB

Peak SAR (extrapolated) = 1.53 W/kg

SAR(1 g) = 1.11 mW/g; SAR(10 g) = 0.772 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.19 mW/g

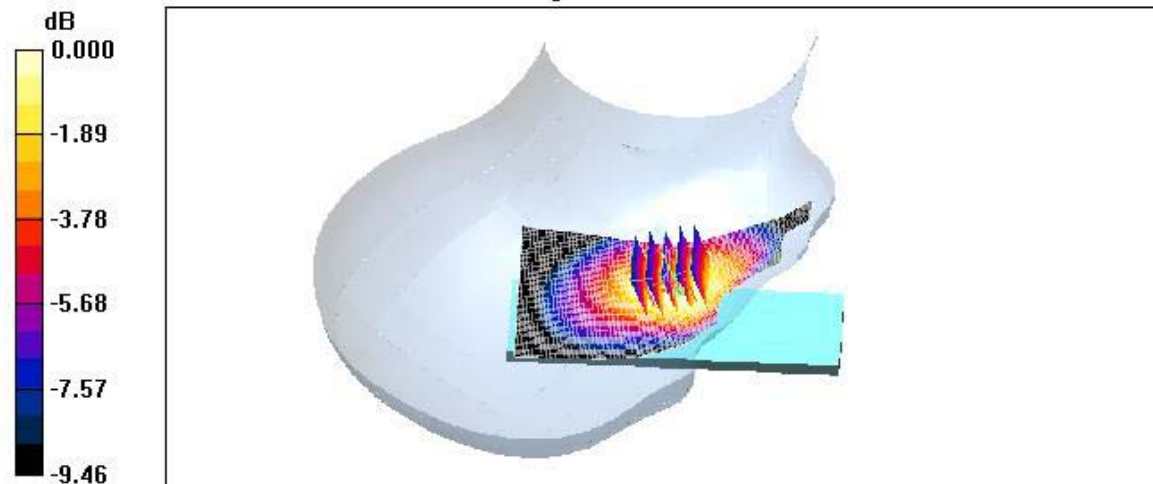

0 dB = 1.19mW/g

Test Laboratory: HCT

MODEL: CDM7075

Company : UTStarcom Inc.

Mode : CDMA 835 / Channel : 777

Liquid Temperature : 21.3 °C

Date Tested : February 02, 2006

DUT: CDM7075; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 848.31 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 848.31$ MHz; $\sigma = 0.886$ mho/m; $\epsilon_r = 41.3$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn614; Calibrated: 2005-04-21

- Phantom: SAM 835/900 MHz; Type: SAM

Right touch 777/Area Scan (51x101x1): Measurement grid: $\Delta x = 15$ mm, $\Delta y = 15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.31 mW/g

Right touch 777/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8$ mm, $\Delta y = 8$ mm, $\Delta z = 5$ mm


Reference Value = 31.6 V/m; Power Drift = -0.154 dB

Peak SAR (extrapolated) = 1.69 W/kg

SAR(1 g) = 1.22 mW/g; SAR(10 g) = 0.837 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.29 mW/g

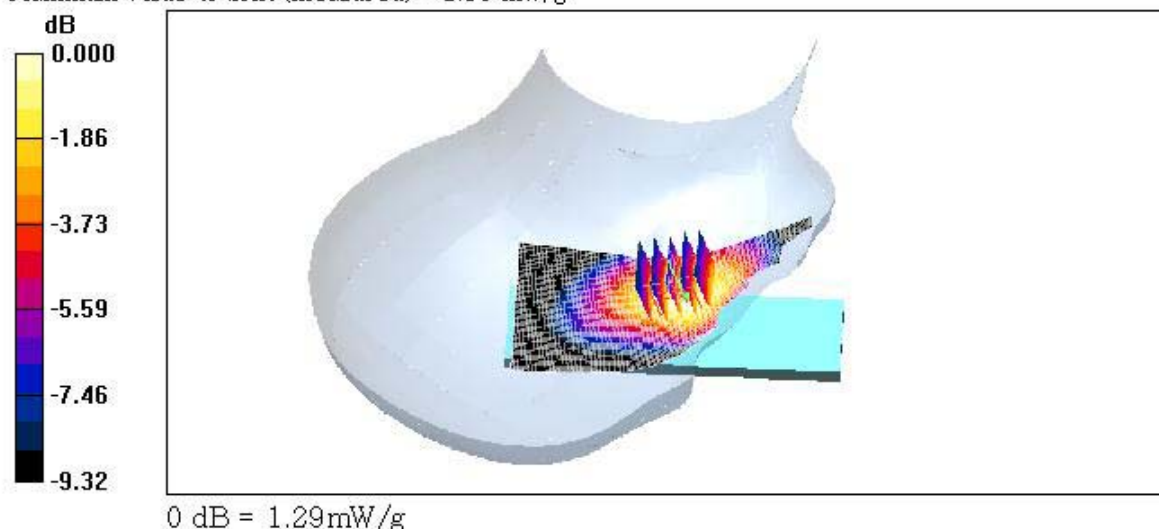

Test Laboratory: HCT

MODEL: CDM7075

Company : UTStarcom Inc.

Mode : CDMA 835 / Channel : 777

Liquid Temperature : 21.3 °C

Date Tested : February 02, 2006

DUT: CDM7075; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 848.31 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 848.31$ MHz; $\sigma = 0.886$ mho/m; $\epsilon_r = 41.3$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn614; Calibrated: 2005-04-21

- Phantom: SAM 835/900 MHz; Type: SAM

Right touch 777/Area Scan (51x101x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.38 mW/g

Right touch 777/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 33.7 V/m; Power Drift = -0.038 dB

Peak SAR (extrapolated) = 1.77 W/kg

SAR(1 g) = 1.28 mW/g; SAR(10 g) = 0.882 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.36 mW/g

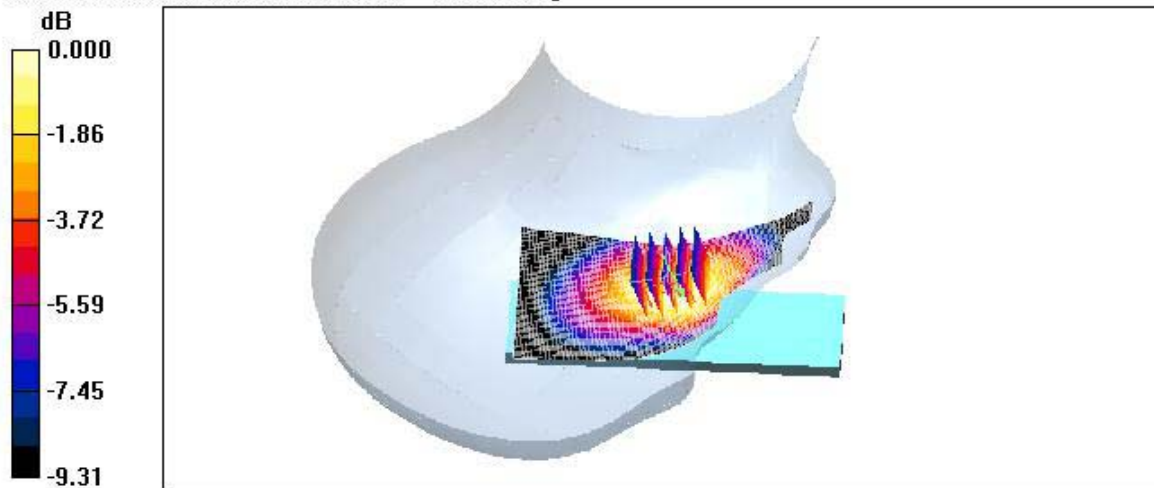

0 dB = 1.36mW/g

Test Laboratory: HCT

MODEL: CDM7075

Company : UTStarcom Inc.

Mode : CDMA 835 / Channel : 384

Liquid Temperature : 21.3 °C

Date Tested : February 02, 2006

DUT: CDM7075; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC, Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.52 \text{ MHz}$; $\sigma = 0.876 \text{ mho/m}$; $\epsilon_r = 41.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn614; Calibrated: 2005-04-21

- Phantom: SAM 835/900 MHz; Type: SAM

Left tilt 384/Area Scan (51x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.460 mW/g

Left tilt 384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 21.5 V/m; Power Drift = 0.142 dB

Peak SAR (extrapolated) = 0.529 W/kg

SAR(1 g) = 0.433 mW/g; SAR(10 g) = 0.326 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.451 mW/g

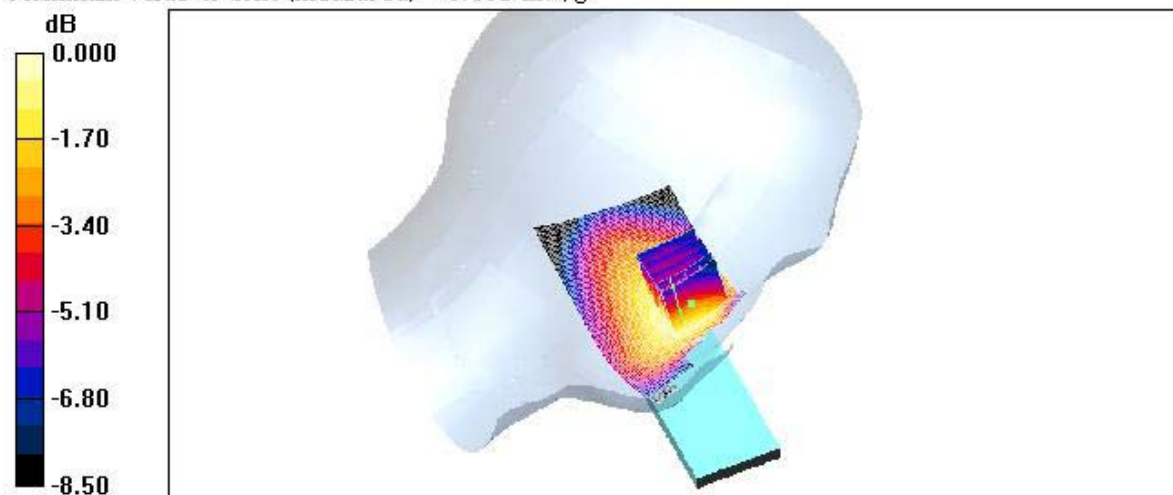

0 dB = 0.451mW/g

Test Laboratory: HCT

MODEL: CDM7075

Company : UTStarcom Inc.

Mode : CDMA 835 / Channel : 384

Liquid Temperature : 21.3 °C

Date Tested : February 02, 2006

DUT: CDM7075; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC, Frequency: 836.52 MHz, Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.876$ mho/m; $\epsilon_r = 41.5$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn614; Calibrated: 2005-04-21

- Phantom: SAM 835/900 MHz; Type: SAM

Left tilt 384/Area Scan (51x101x1): Measurement grid: $\Delta x = 15$ mm, $\Delta y = 15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.301 mW/g

Left tilt 384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8$ mm, $\Delta y = 8$ mm, $\Delta z = 5$ mm


Reference Value = 16.6 V/m; Power Drift = -0.058 dB

Peak SAR (extrapolated) = 0.329 W/kg

SAR(1 g) = 0.266 mW/g; SAR(10 g) = 0.203 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.279 mW/g

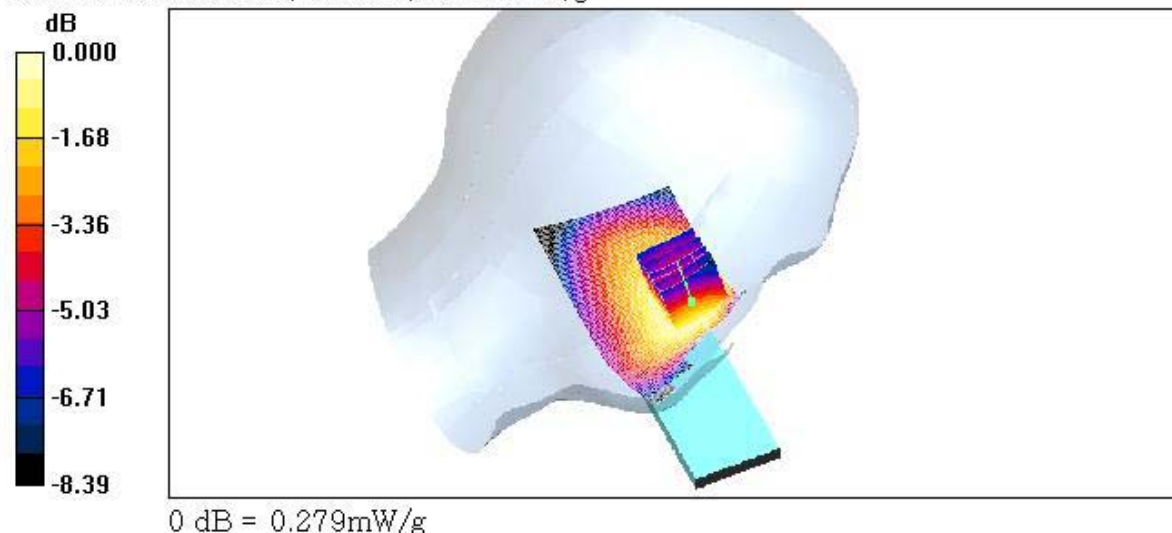

Test Laboratory: HCT

MODEL: CDM7075

Company : UTStarcom Inc.

Mode : CDMA 835 / Channel : 384

Liquid Temperature : 21.3 °C

Date Tested : February 02, 2006

DUT: CDM7075; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.876$ mho/m; $\epsilon_r = 41.5$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn614; Calibrated: 2005-04-21

- Phantom: SAM 835/900 MHz; Type: SAM

Right tilt 384/Area Scan (51x101x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.428 mW/g

Right tilt 384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 21.0 V/m; Power Drift = -0.003 dB

Peak SAR (extrapolated) = 0.505 W/kg

SAR(1 g) = 0.413 mW/g; SAR(10 g) = 0.320 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.431 mW/g

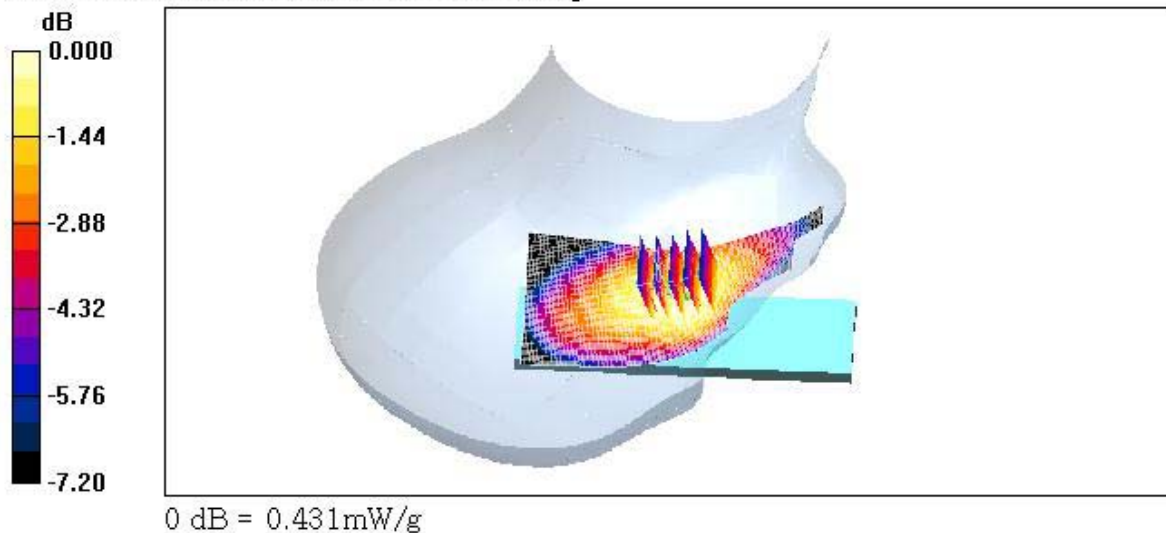

Test Laboratory: HCT

MODEL: CDM7075

Company : UTStarcom Inc.

Mode : CDMA 835 / Channel : 384

Liquid Temperature : 21.3 °C

Date Tested : February 02, 2006

DUT: CDM7075; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.876$ mho/m; $\epsilon_r = 41.5$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn614; Calibrated: 2005-04-21

- Phantom: SAM 835/900 MHz; Type: SAM

Right tilt 384/Area Scan (51x101x1): Measurement grid: $\Delta x = 15$ mm, $\Delta y = 15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.287 mW/g

Right tilt 384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8$ mm, $\Delta y = 8$ mm, $\Delta z = 5$ mm

Reference Value = 16.3 V/m; Power Drift = 0.018 dB

Peak SAR (extrapolated) = 0.330 W/kg

SAR(1 g) = 0.278 mW/g; SAR(10 g) = 0.213 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.296 mW/g

