

ATTACHMENT O – SAR TEST PLOTS

Test Laboratory: HCT

MODEL: CDM7075(BODY)
Company : UTStarcom Inc.
Mode : CDMA 835 / Channel : 1013
Liquid Temperature : 21.3 °C
Date Tested : February 02, 2006

DUT: CDM7075-Body; Type: Folder; Serial: #1


Communication System: CDMA 835MHz FCC; Frequency: 824.7 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 825 \text{ MHz}$; $\sigma = 0.978 \text{ mho/m}$; $\epsilon_r = 55$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.27, 6.27, 6.27); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn614; Calibrated: 2005-04-21
- Phantom: SAM 835/900 MHz; Type: SAM

CDMA Body 1013/Area Scan (51x81x1): Measurement grid: $\Delta x = 15\text{mm}$, $\Delta y = 15\text{mm}$
Maximum value of SAR (interpolated) = 0.936 mW/g

CDMA Body 1013/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8\text{mm}$, $\Delta y = 8\text{mm}$, $\Delta z = 5\text{mm}$
Reference Value = 31.6 V/m; Power Drift = -0.190 dB
Peak SAR (extrapolated) = 1.12 W/kg
SAR(1 g) = 0.867 mW/g; SAR(10 g) = 0.627 mW/g
Maximum value of SAR (measured) = 0.917 mW/g

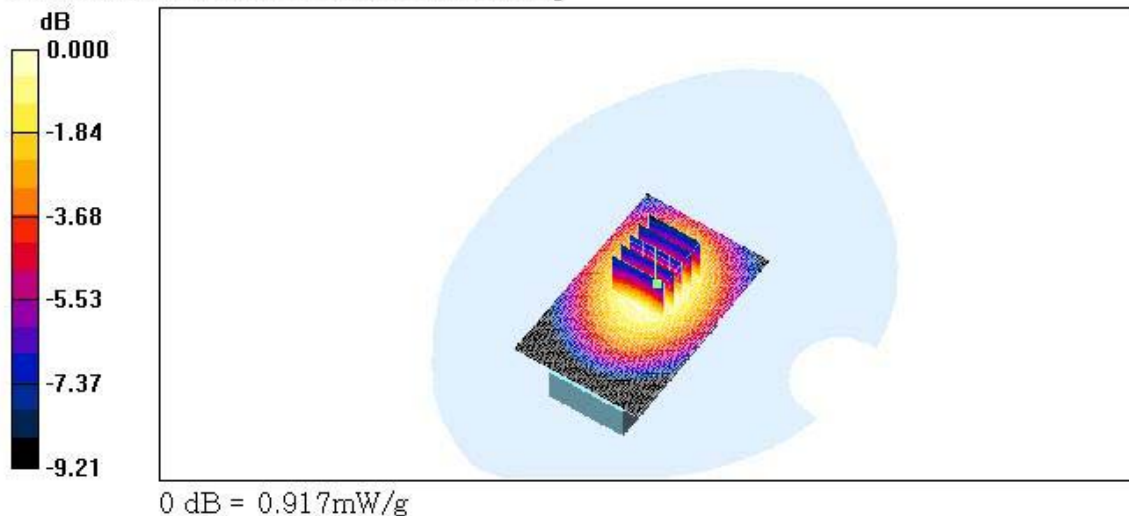

Test Laboratory: HCT

MODEL: CDM7075(BODY)
Company : UTStarcom Inc.
Mode : CDMA 835 / Channel : 1013
Liquid Temperature : 21.3 °C
Date Tested : February 02, 2006

DUT: CDM7075-Body; Type: Folder; Serial: #1


Communication System: CDMA 835MHz FCC; Frequency: 824.7 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 825 \text{ MHz}$; $\sigma = 0.978 \text{ mho/m}$; $\epsilon_r = 55$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.27, 6.27, 6.27); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn614; Calibrated: 2005-04-21
- Phantom: SAM 835/900 MHz; Type: SAM

CDMA Body 1013/Area Scan (51x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 1.10 mW/g

CDMA Body 1013/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 34.6 V/m; Power Drift = -0.189 dB
Peak SAR (extrapolated) = 1.32 W/kg
SAR(1 g) = 1.02 mW/g; SAR(10 g) = 0.743 mW/g
Maximum value of SAR (measured) = 1.07 mW/g

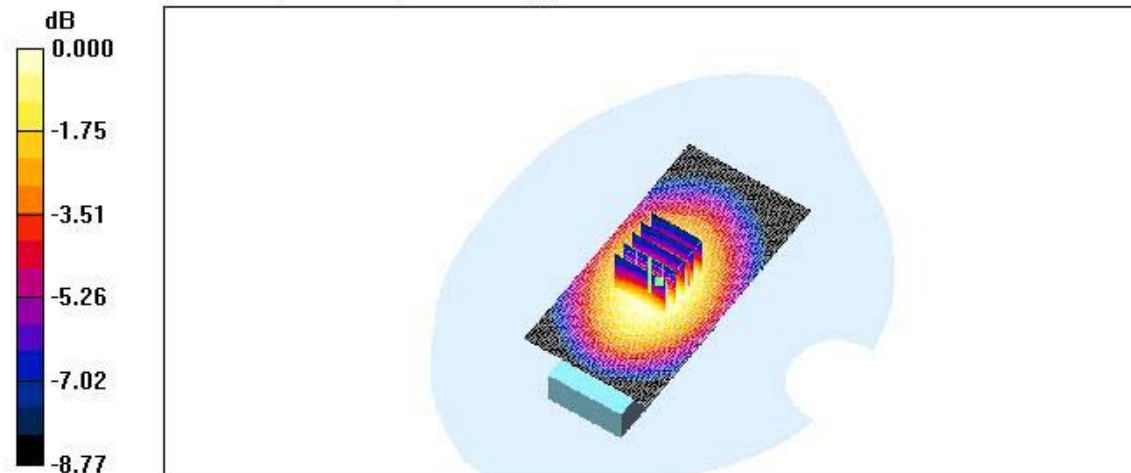

0 dB = 1.07mW/g

Test Laboratory: HCT

MODEL: CDM7075(BODY)
Company : UTStarcom Inc.
Mode : CDMA 835 / Channel : 384
Liquid Temperature : 21.3 °C
Date Tested : February 02, 2006

DUT: CDM7075-Body; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 836.52 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.52 \text{ MHz}$; $\sigma = 0.993 \text{ mho/m}$; $\epsilon_r = 54.9$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.27, 6.27, 6.27); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn614; Calibrated: 2005-04-21
- Phantom: SAM 835/900 MHz; Type: SAM

CDMA Body 384/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (interpolated) = 1.04 mW/g


CDMA Body 384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 32.8 V/m; Power Drift = -0.151 dB

Peak SAR (extrapolated) = 1.25 W/kg

SAR(1 g) = 0.956 mW/g; SAR(10 g) = 0.691 mW/g

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 1.01 mW/g

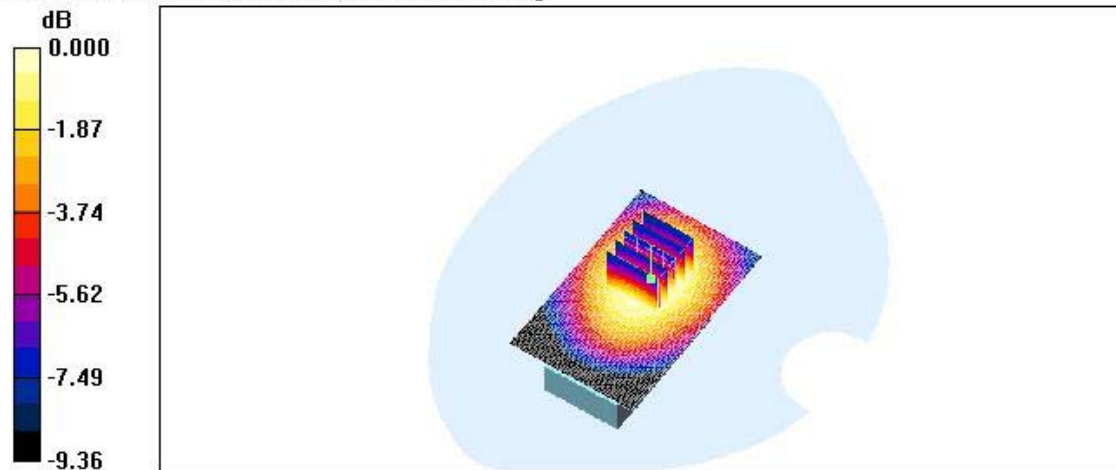

0 dB = 1.01 mW/g

Test Laboratory: HCT

MODEL: CDM7075(BODY)
Company : UTStarcom Inc.
Mode : CDMA 835 / Channel : 384
Liquid Temperature : 21.3 °C
Date Tested : February 02, 2006

DUT: CDM7075-Body; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 836.52 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.52 \text{ MHz}$; $\sigma = 0.993 \text{ mho/m}$; $\epsilon_r = 54.9$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.27, 6.27, 6.27); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn614; Calibrated: 2005-04-21
- Phantom: SAM 835/900 MHz; Type: SAM

CDMA Body 384/Area Scan (51x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (interpolated) = 0.967 mW/g


CDMA Body 384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 32.7 V/m; Power Drift = 0.199 dB

Peak SAR (extrapolated) = 1.18 W/kg

SAR(1 g) = 0.908 mW/g; SAR(10 g) = 0.658 mW/g

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 0.954 mW/g

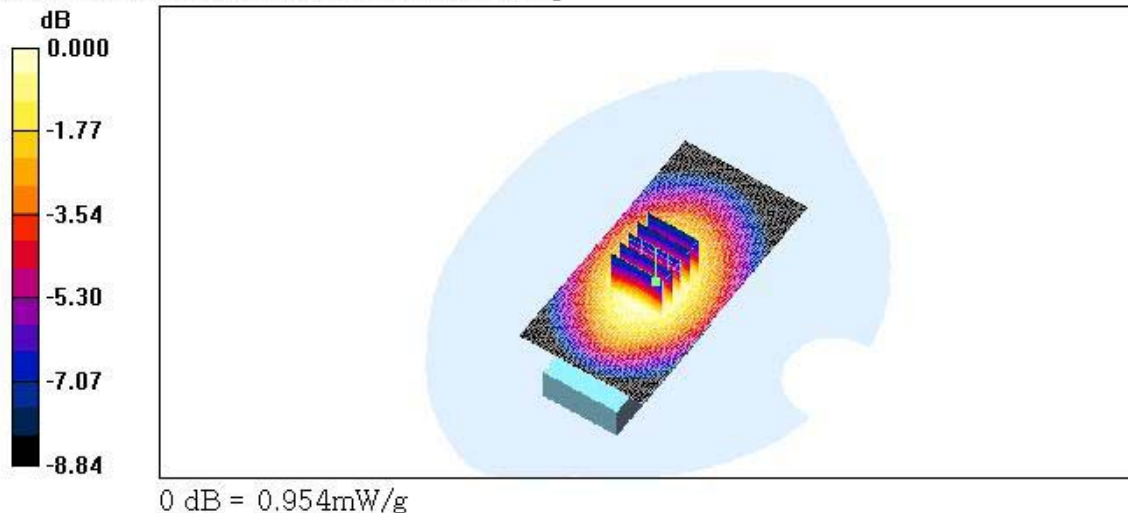

Test Laboratory: HCT

MODEL: CDM7075(BODY)
Company : UTStarcom Inc.
Mode : CDMA 835 / Channel : 777
Liquid Temperature : 21.3 °C
Date Tested : February 02, 2006

DUT: CDM7075-Body; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 848.31 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 848.31$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 54.7$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.27, 6.27, 6.27); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn614; Calibrated: 2005-04-21
- Phantom: SAM 835/900 MHz; Type: SAM

CDMA Body 777/Area Scan (51x81x1): Measurement grid: $\Delta x = 15$ mm, $\Delta y = 15$ mm

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (interpolated) = 1.07 mW/g


CDMA Body 777/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8$ mm, $\Delta y = 8$ mm, $\Delta z = 5$ mm

Reference Value = 32.9 V/m; Power Drift = -0.142 dB

Peak SAR (extrapolated) = 1.30 W/kg

SAR(1 g) = 0.993 mW/g; SAR(10 g) = 0.714 mW/g

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 1.05 mW/g

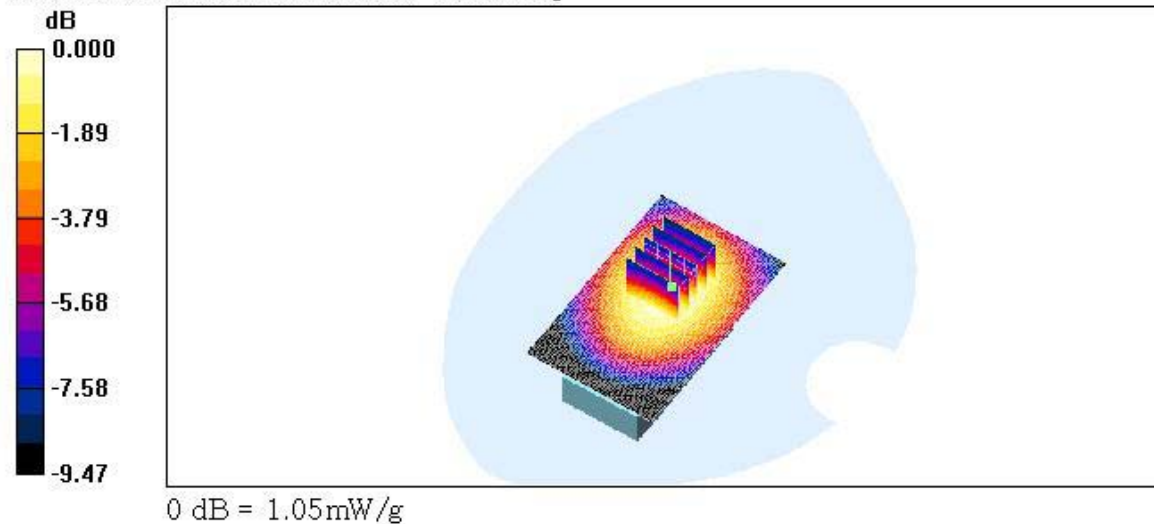

Test Laboratory: HCT

MODEL: CDM7075(BODY)
Company : UTStarcom Inc.
Mode : CDMA 835 / Channel : 777
Liquid Temperature : 21.3 °C
Date Tested : February 02, 2006

DUT: CDM7075-Body; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 848.31 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 848.31 \text{ MHz}$; $\sigma = 1.01 \text{ mho/m}$; $\epsilon_r = 54.7$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.27, 6.27, 6.27); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn614; Calibrated: 2005-04-21
- Phantom: SAM 835/900 MHz; Type: SAM

CDMA Body 777/Area Scan (51x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (interpolated) = 1.08 mW/g


CDMA Body 777/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 33.5 V/m; Power Drift = -0.143 dB

Peak SAR (extrapolated) = 1.36 W/kg

SAR(1 g) = 1.02 mW/g; SAR(10 g) = 0.734 mW/g

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 1.07 mW/g

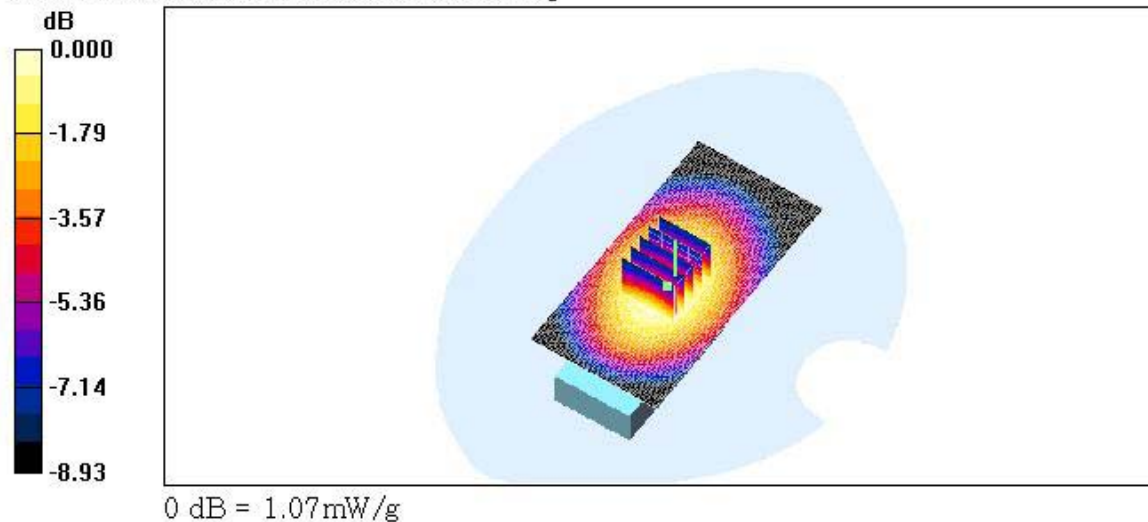

Test Laboratory: HCT

MODEL: CDM7075(BODY)
Company : UTStarcom Inc.
Mode : PCS 1900 / Channel : 25
Liquid Temperature : 21.5 °C
Date Tested : February 03, 2006

DUT: CDM7075-Body; Type: Folder; Serial: #1

Communication System: PCS1900; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1851.25 \text{ MHz}$; $\sigma = 1.45 \text{ mho/m}$; $\epsilon_r = 52.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(4.44, 4.44, 4.44); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn614; Calibrated: 2005-04-21
- Phantom: SAM 1800/1900 MHz; Type: SAM

PCS Body 25/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.06 mW/g

PCS Body 25/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 20.4 V/m; Power Drift = -0.021 dB

Peak SAR (extrapolated) = 1.39 W/kg

SAR(1 g) = 0.943 mW/g; SAR(10 g) = 0.575 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.03 mW/g

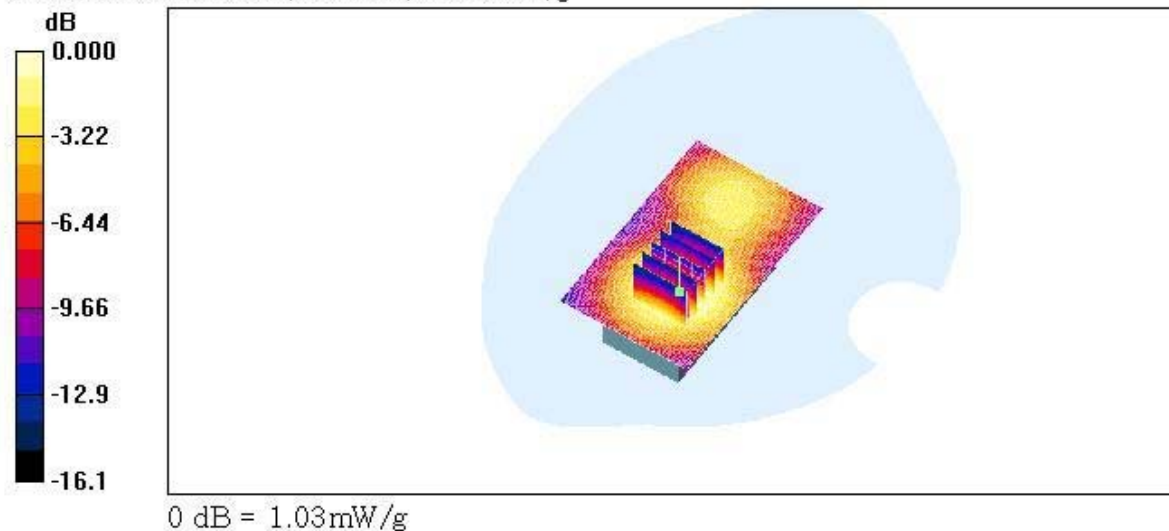

Test Laboratory: HCT

MODEL: CDM7075(BODY)

Company : UTStarcom Inc.

Mode : PCS 1900 / Channel : 25

Liquid Temperature : 21.5 °C

Date Tested : February 03, 2006

DUT: CDM7075-Body; Type: Folder; Serial: #1

Communication System: PCS 1900; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1851.25 \text{ MHz}$; $\sigma = 1.45 \text{ mho/m}$; $\epsilon_r = 52.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(4.44, 4.44, 4.44); Calibrated: 2005-08-30

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn614; Calibrated: 2005-04-21

- Phantom: SAM 1800/1900 MHz; Type: SAM

PCS Body 25/Area Scan (51x111x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.824 mW/g

PCS Body 25/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 11.2 V/m; Power Drift = 0.039 dB

Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.766 mW/g; SAR(10 g) = 0.465 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.838 mW/g

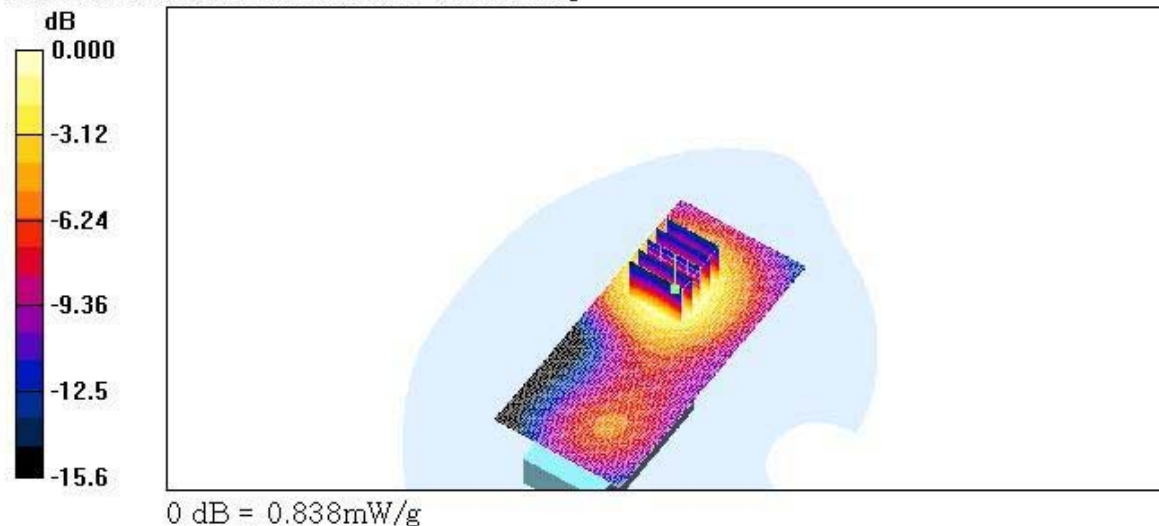

Test Laboratory: HCT

MODEL: CDM7075(BODY)
Company : UTStarcom Inc.
Mode : PCS1900 / Channel : 600
Liquid Temperature : 21.5 °C
Date Tested : February 03, 2006

DUT: CDM7075-Body; Type: Folder; Serial: #1

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.48 \text{ mho/m}$; $\epsilon_r = 52.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section


DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(4.44, 4.44, 4.44); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn614; Calibrated: 2005-04-21
- Phantom: SAM 1800/1900 MHz; Type: SAM

PCS Body 600/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 1.10 mW/g

PCS Body 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 21.7 V/m; Power Drift = 0.050 dB
Peak SAR (extrapolated) = 1.47 W/kg
SAR(1 g) = 0.976 mW/g; SAR(10 g) = 0.591 mW/g
Maximum value of SAR (measured) = 1.07 mW/g

PCS Body 600/Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 21.7 V/m; Power Drift = 0.050 dB
Peak SAR (extrapolated) = 1.06 W/kg
SAR(1 g) = 0.664 mW/g; SAR(10 g) = 0.391 mW/g
Maximum value of SAR (measured) = 0.721 mW/g

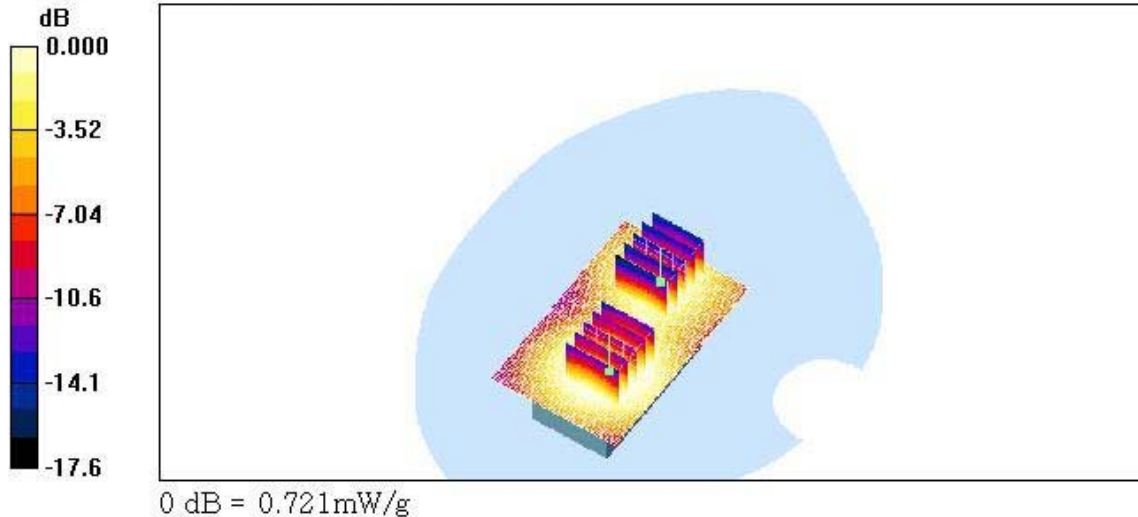

Test Laboratory: HCT

MODEL: CDM7075(BODY)
Company : UTStarcom Inc.
Mode : PCS 1900 / Channel : 600
Liquid Temperature : 21.5 °C
Date Tested : February 03, 2006

DUT: CDM7075-Body; Type: Folder; Serial: #1

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.48 \text{ mho/m}$; $\epsilon_r = 52.4$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(4.44, 4.44, 4.44); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn614; Calibrated: 2005-04-21
- Phantom: SAM 1800/1900 MHz; Type: SAM

PCS Body 600/Area Scan (51x111x1): Measurement grid: $\Delta x = 15\text{mm}$, $\Delta y = 15\text{mm}$
Maximum value of SAR (interpolated) = 0.779 mW/g


PCS Body 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8\text{mm}$, $\Delta y = 8\text{mm}$, $\Delta z = 5\text{mm}$

Reference Value = 12.5 V/m; Power Drift = -0.073 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.732 mW/g; SAR(10 g) = 0.446 mW/g

Maximum value of SAR (measured) = 0.791 mW/g

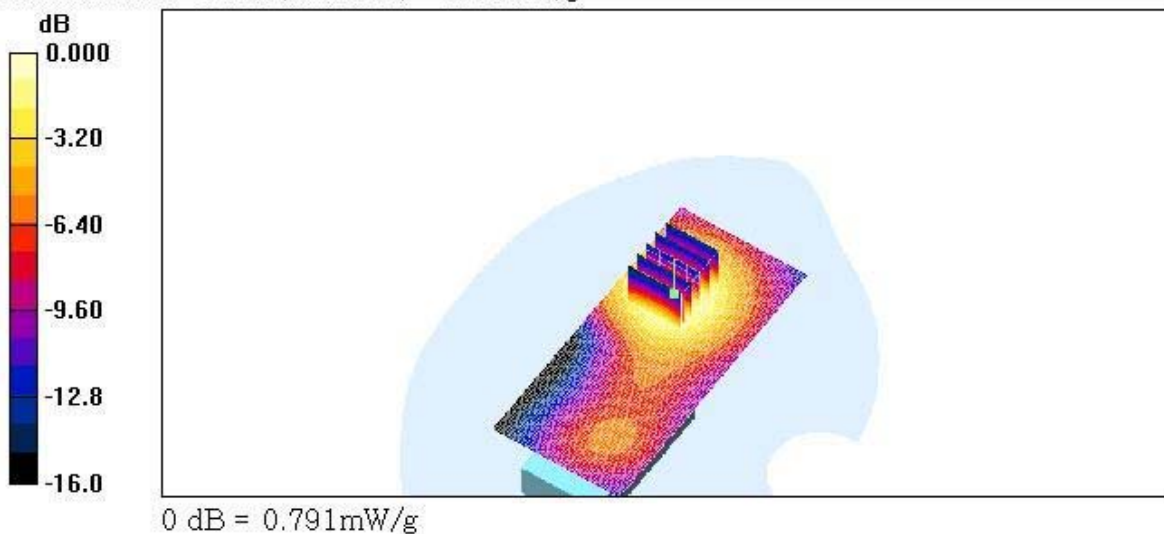

Test Laboratory: HCT

MODEL: CDM7075(BODY)
Company : UTStarcom Inc.
Mode : PCS 1900 / Channel: 1175
Liquid Temperature : 21.5 °C
Date Tested : February 03, 2006

DUT: CDM7075-Body; Type: Folder; Serial: #1

Communication System: PCS1900; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1908.75$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(4.44, 4.44, 4.44); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn614; Calibrated: 2005-04-21
- Phantom: SAM 1800/1900 MHz; Type: SAM

PCS Body 1175/Area Scan (51x81x1): Measurement grid: $\Delta x = 15$ mm, $\Delta y = 15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.983 mW/g

PCS Body 1175/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8$ mm, $\Delta y = 8$ mm, $\Delta z = 5$ mm

Reference Value = 19.3 V/m; Power Drift = -0.192 dB

Peak SAR (extrapolated) = 1.37 W/kg

SAR(1 g) = 0.891 mW/g; SAR(10 g) = 0.528 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.971 mW/g

PCS Body 1175/Zoom Scan (5x5x7)/Cube 1: Measurement grid: $\Delta x = 8$ mm, $\Delta y = 8$ mm, $\Delta z = 5$ mm


Reference Value = 19.3 V/m; Power Drift = -0.192 dB

Peak SAR (extrapolated) = 0.919 W/kg

SAR(1 g) = 0.575 mW/g; SAR(10 g) = 0.336 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.623 mW/g

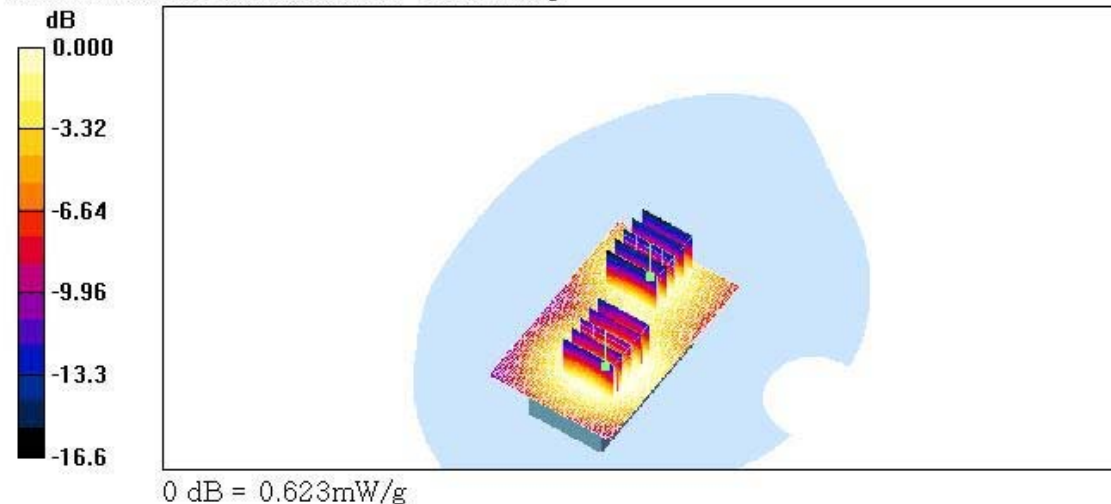

Test Laboratory: HCT

MODEL: CDM7075(BODY)
Company : UTStarcom Inc.
Mode : PCS 1900 / Channel : 1175
Liquid Temperature : 21.5 °C
Date Tested : February 03, 2006

DUT: CDM7075-Body; Type: Folder; Serial: #1

Communication System: PCS 1900; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1908.75$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(4.44, 4.44, 4.44); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn614; Calibrated: 2005-04-21
- Phantom: SAM 1800/1900 MHz; Type: SAM

PCS Body 1175/Area Scan (51x101x1): Measurement grid: $\Delta x = 15$ mm, $\Delta y = 15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.967 mW/g

PCS Body 1175/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8$ mm, $\Delta y = 8$ mm, $\Delta z = 5$ mm


Reference Value = 15.3 V/m; Power Drift = -0.165 dB

Peak SAR (extrapolated) = 1.44 W/kg

SAR(1 g) = 0.939 mW/g; SAR(10 g) = 0.569 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.01 mW/g

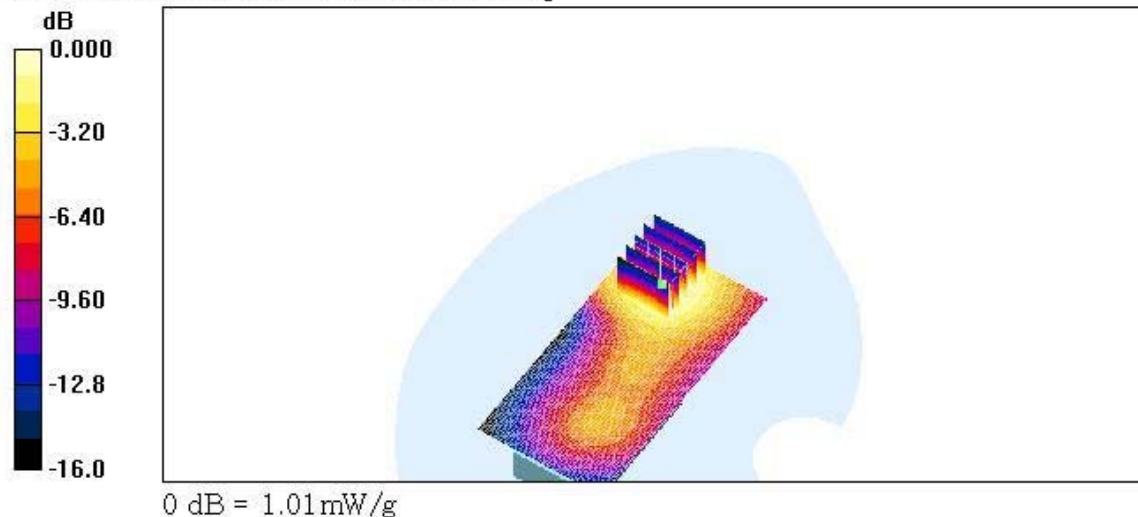

DUT: CDM7075; Type: Folder; Serial: #1
Program Name: CDM7075

Communication System: CDMA 835MHz FCC; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.876$ mho/m; $\epsilon_r = 41.5$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn614; Calibrated: 2005-04-21
- Phantom: SAM 835/900 MHz; Type: SAM

Left touch 384/Z Scan (1x1x41): Measurement grid: $dx=20$ mm, $dy=20$ mm, $dz=5$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.21 mW/g

0.116, 0.574

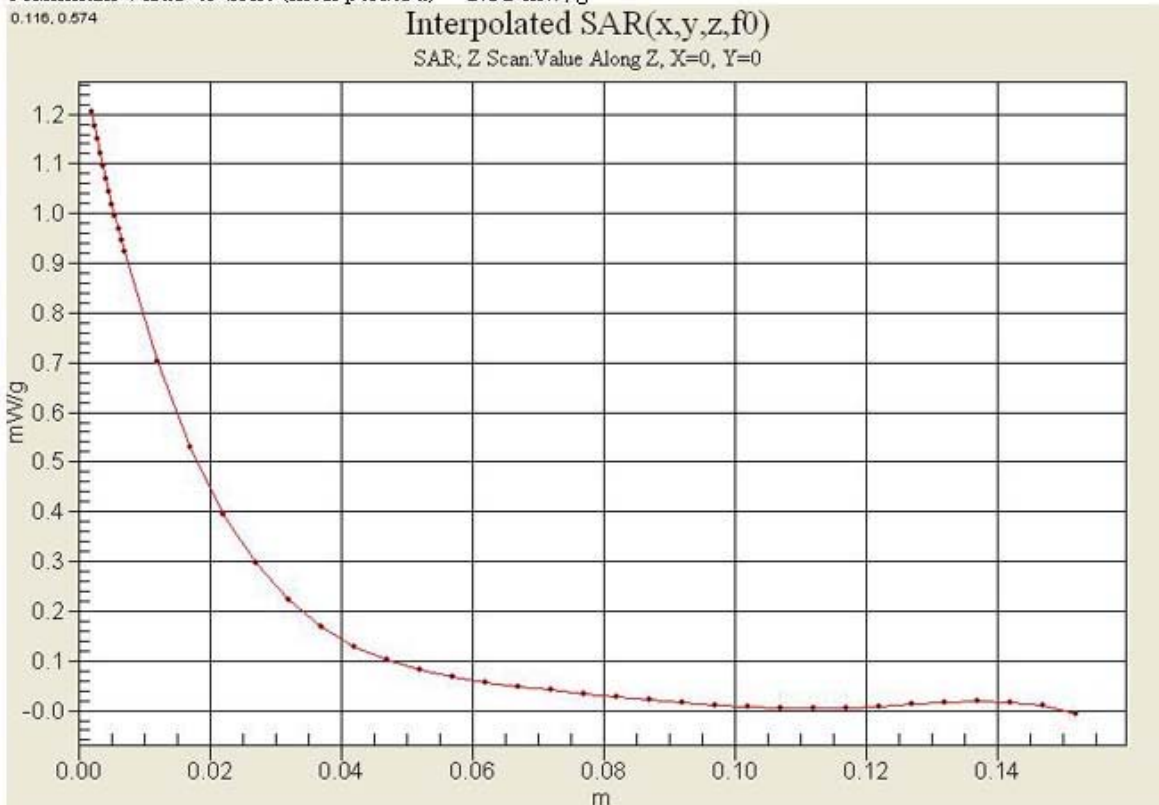

DUT: CDM7075; Type: Folder; Serial: #1
Program Name: CDM7075

Communication System: PCS 1900; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1908.75$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³

Phantom section: Right Section


DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(5.14, 5.14, 5.14); Calibrated: 2005-08-30
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn614; Calibrated: 2005-04-21
- Phantom: SAM 1800/1900 MHz; Type: SAM

Right touch 1175/Z Scan (1x1x41): Measurement grid: $\Delta x = 20$ mm, $\Delta y = 20$ mm, $\Delta z = 5$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.15 mW/g

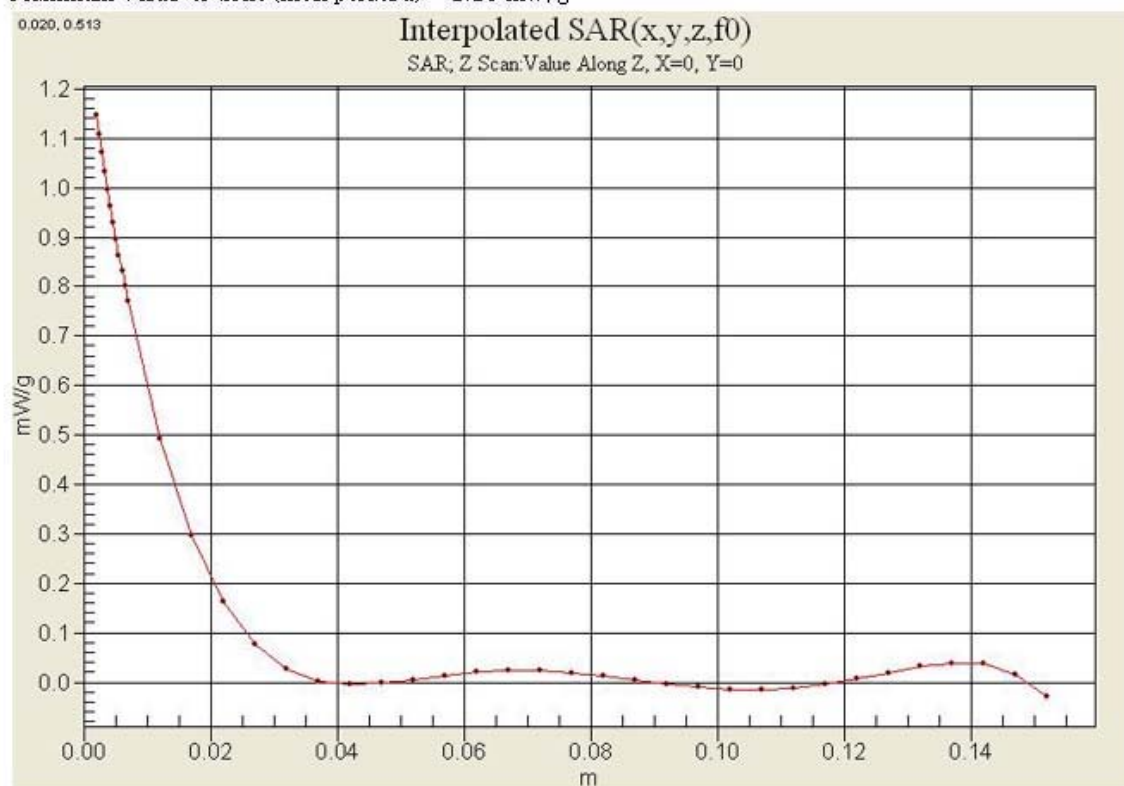


DUT: CDM7075-Body; Type: Folder; Serial: #1
Program Name: CDM7075

Communication System: CDMA 835MHz FCC; Frequency: 824.7 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 825 \text{ MHz}$; $\sigma = 0.978 \text{ mho/m}$; $\epsilon_r = 55$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607, ConvF(6.27, 6.27, 6.27); Calibrated: 2005-08-30
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn614; Calibrated: 2005-04-21
- Phantom: SAM 835/900 MHz; Type: SAM

CDMA Body 1013/Z Scan (1x1x41): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$, $dz=5\text{mm}$
Maximum value of SAR (interpolated) = 0.800 mW/g

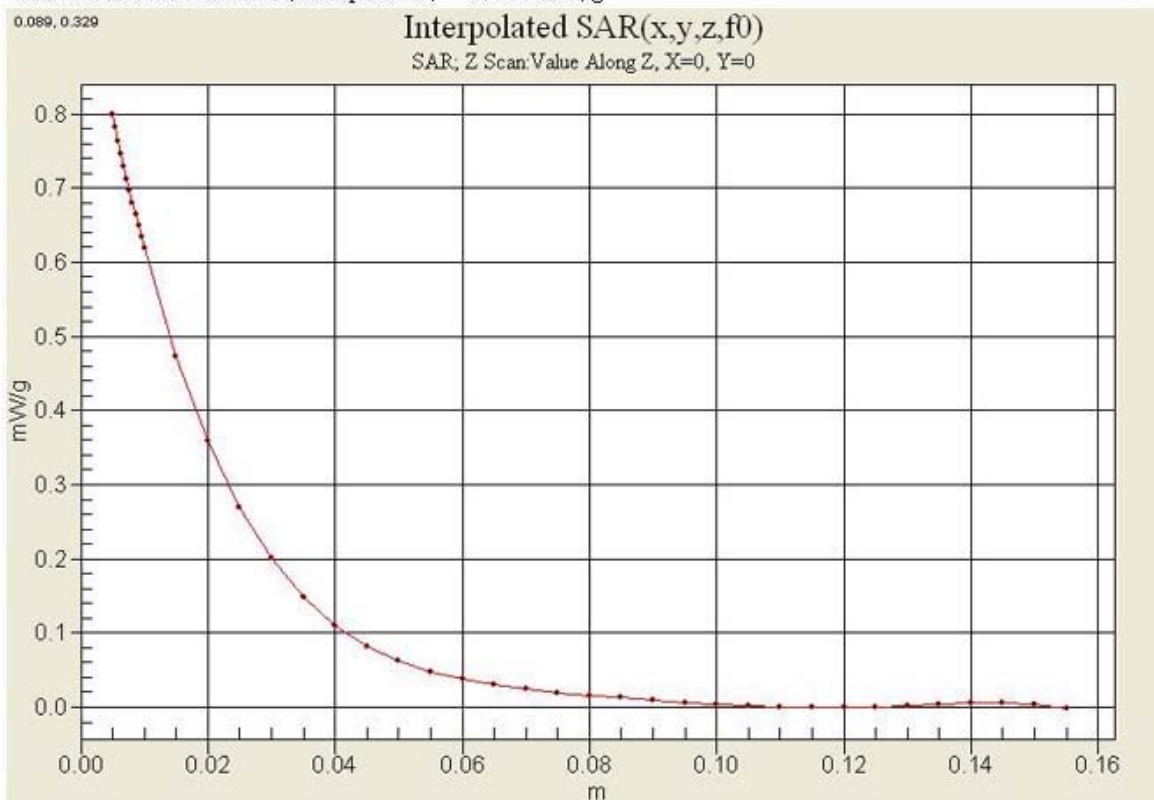

DUT: CDM7075-Body; Type: Folder; Serial: #1
Program Name: CDM7075

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 52.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(4.44, 4.44, 4.44); Calibrated: 2005-08-30
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn614; Calibrated: 2005-04-21
- Phantom: SAM 1800/1900 MHz; Type: SAM

PCS Body 600/Z Scan (1x1x41): Measurement grid: $dx=20$ mm, $dy=20$ mm, $dz=5$ mm

Maximum value of SAR (interpolated) = 0.560 mW/g

