



Engineering and Testing for EMC and Safety Compliance

CERTIFICATION APPLICATION REPORT
FCC PART 24

Test Lab: Rhein Tech Laboratories, Inc. Phone: 703-689-0368 360 Herndon Parkway Fax: 703-689-2056 Suite 1400 Web: www.rheintech.com Herndon, VA 20170 Contact: ATCBINFO@rheintech.com		Applicant: UTStarcom, Inc. Phone: 732-516-7524 33 Wood Avenue South Fax: 732-767-5283 3 rd Floor Iselin, NJ 08830 USA Contact: Tom Borrelli (borrelli@utstar.com)	
FCC ID:	O6Y-FSU810	GRANTEE FRN NUMBER:	0005823877
PLAT FORM:	Transmitter	RTL WORK ORDER NUMBER:	2004227
MODEL:	FSU810	RTL QUOTE NUMBER:	QRTL04-433
DATE OF TEST REPORT:	December 20, 2004		
American National Standard Institute:	ANSI/TIA-603-B-2002		
FCC Classification:	PCB – Licensed Base Station for Part 24		
FCC Rule Part(s):	Part 24: Personal Communications Services Subpart E – Broadband PCS		
Digital Interface Information	Digital Interface was found to be compliant		
Frequency Range (MHz)	Power (W)	Frequency Tolerance	Emission Designator
1880.15-1909.85	0.085	0.61 ppm	262KDXW

I, the undersigned, hereby declare that the equipment tested and referenced in this report conforms to the identified standard(s) as described in this test report. No modifications were made to the equipment during testing in order to achieve compliance with these standards. Furthermore, there was no deviation from, additions to, or exclusions from, the FCC Part 2, FCC Part 15, FCC Part 24, ANSI C63.4 and ANSI/TIA-603-B-2002.

Signature: 

Typed/Printed Name: Desmond Fraser

Date: December 20, 2004

Position: President

This report may not be reproduced, except in full, without the written approval of Rhein Tech Laboratories, Inc.

TABLE OF CONTENTS

1	GENERAL INFORMATION	5
1.1	SCOPE	5
1.2	TEST FACILITY	5
1.3	RELATED SUBMITTAL(S)/GRANT(S)	5
2	EQUIPMENT INFORMATION	6
2.1	JUSTIFICATION	6
2.2	EXERCISING THE EUT	6
2.3	MODIFICATIONS	6
2.4	TEST SYSTEM DETAILS	7
2.5	CONFIGURATION OF TESTED SYSTEM	8
3	DC VOLTAGES AND CURRENTS - PART §2.1033(C)(8)	9
3.1	DC VOLTAGES AND CURRENTS TEST EQUIPMENT	9
4	RF POWER OUTPUT - §2.1046	10
4.1	ANSI/TIA-603-B-2002, SECTION 2.2.17 TEST PROCEDURE	10
4.2	EFFECTIVE ISOTROPIC RADIATED POWER LIMITS - §24.232(B) TEST PROCEDURE	10
4.3	RF POWER TEST EQUIPMENT	10
4.4	EFFECTIVE ISOTROPIC RADIATED POWER TEST DATA- §2.1046	11
5	OCCUPIED BANDWIDTH - §2.1049; NECESSARY BANDWIDTH §2.202 (OCCUPIED BANDWIDTH) – PART 24.238(B) (EMISSION BANDWIDTH)	13
5.1	TEST PROCEDURE	13
5.2	OCCUPIED BANDWIDTH TEST EQUIPMENT	13
5.3	TEST DATA (CHANNEL 1: OCCUPIED BANDWIDTH = 262 KHZ)	14
6	CONDUCTED SPURIOUS AND HARMONIC EMISSIONS - §2.1051	15
6.1	TEST PROCEDURE	15
6.2	CONDUCTED SPURIOUS AND HARMONIC EMISSIONS TEST EQUIPMENT	15
6.3	CONDUCTED SPURIOUS AND HARMONIC TEST DATA - §2.1051	16
7	RADIATED SPURIOUS AND HARMONIC EMISSIONS - §2.1053	19
7.1	RADIATED SPURIOUS AND HARMONIC EMISSIONS - §2.1053	19
7.2	RADIATED SPURIOUS TEST EQUIPMENT	19
7.3	FIELD STRENGTH OF SPURIOUS RADIATION TEST DATA - §2.1053	20
8	BAND-EDGE COMPLIANCE - PART 24.238	29
8.1	TEST PROCEDURE	29
8.2	TEST DATA	30
9	FREQUENCY STABILITY / TEMPERATURE VARIATION - §2.1055	49
9.1	MEASUREMENT METHOD:	49
9.2	FREQUENCY STABILITY TEST EQUIPMENT	49
9.3	TIME PERIOD AND PROCEDURE:	49
9.4	FREQUENCY STABILITY § 24.235	50
9.5	FREQUENCY STABILITY TEST DATA - §2.1055	50
10	CONCLUSION	53

TABLE INDEX

TABLE 2-1:	EQUIPMENT UNDER TEST (EUT)	7
TABLE 2-2:	EQUIPMENT USED TO SET UP EUT	7
TABLE 3-1:	DC VOLTAGES AND CURRENTS TEST EQUIPMENT	9
TABLE 3-2:	DC VOLTAGES AND CURRENTS DATA	9
TABLE 4-1:	POWER OUTPUT AT THE ANTENNA PORT DATA - §2.1046	10
TABLE 4-2:	RF POWER TEST EQUIPMENT	10
TABLE 4-3:	RADIATED POWER DATA - §2.1046 – WHIP ANTENNA	11
TABLE 4-4:	RADIATED POWER DATA - §2.1046 – PATCH ANTENNA	11
TABLE 4-5:	RADIATED POWER DATA - §2.1046 – ROD ANTENNA	11
TABLE 5-1:	OCCUPIED BANDWIDTH TEST EQUIPMENT	13
TABLE 6-1:	CONDUCTED SPURIOUS AND HARMONIC EMISSIONS TEST EQUIPMENT	15
TABLE 6-2:	CONDUCTED SPURIOUS AND HARMONIC DATA §2.1051	16
TABLE 6-3:	CONDUCTED SPURIOUS AND HARMONIC DATA §2.1051	17
TABLE 6-4:	CONDUCTED SPURIOUS AND HARMONIC DATA §2.1051	18
TABLE 7-1:	RADIATED SPURIOUS TEST EQUIPMENT	19
TABLE 7-2:	FIELD STRENGTH OF SPURIOUS RADIATION TEST DATA §2.1053; WHIP ANTENNA	20
TABLE 7-3:	FIELD STRENGTH OF SPURIOUS RADIATION TEST DATA §2.1053; PATCH ANTENNA	21
TABLE 7-4:	FIELD STRENGTH OF SPURIOUS RADIATION TEST DATA §2.1053; ROD ANTENNA	22
TABLE 7-5:	FIELD STRENGTH OF SPURIOUS RADIATION TEST DATA §2.1053; WHIP ANTENNA	23
TABLE 7-6:	FIELD STRENGTH OF SPURIOUS RADIATION TEST DATA §2.1053; PATCH ANTENNA	24
TABLE 7-7:	FIELD STRENGTH OF SPURIOUS RADIATION TEST DATA §2.1053; ROD ANTENNA	25
TABLE 7-8:	FIELD STRENGTH OF SPURIOUS RADIATION TEST DATA §2.1053; WHIP ANTENNA	26
TABLE 7-9:	FIELD STRENGTH OF SPURIOUS RADIATION TEST DATA §2.1053; PATCH ANTENNA	27
TABLE 7-10:	FIELD STRENGTH OF SPURIOUS RADIATION TEST DATA §2.1053; ROD ANTENNA	28
TABLE 8-1:	BAND-EDGE TEST EQUIPMENT	29
TABLE 8-2:	BAND EDGE COMPLIANCE – WHIP ANTENNA	30
TABLE 8-3:	BAND EDGE COMPLIANCE – PATCH ANTENNA	30
TABLE 8-4:	BAND EDGE COMPLIANCE – ROD ANTENNA	30
TABLE 9-1:	FREQUENCY STABILITY TEST EQUIPMENT	49
TABLE 9-2:	TEMPERATURE FREQUENCY STABILITY DATA - §2.1055	50
TABLE 9-3:	VOLTAGE FREQUENCY STABILITY DATA - §2.1055	51

PLOT INDEX

PLOT 5-1:	OCCUPIED BANDWIDTH (-26 DB)	14
PLOT 8-1:	LOWER BAND EDGE BLOCK B - WHIP ANTENNA	31
PLOT 8-2:	UPPER BAND EDGE BLOCK B - WHIP ANTENNA	32
PLOT 8-3:	LOWER BAND EDGE BLOCK F - WHIP ANTENNA	33
PLOT 8-4:	UPPER BAND EDGE BLOCK F - WHIP ANTENNA	34
PLOT 8-5:	LOWER BAND EDGE BLOCK C - WHIP ANTENNA	35
PLOT 8-6:	UPPER BAND EDGE BLOCK C - WHIP ANTENNA	36
PLOT 8-7:	LOWER BAND EDGE BLOCK B - PATCH ANTENNA	37
PLOT 8-8:	UPPER BAND EDGE BLOCK B - PATCH ANTENNA	38
PLOT 8-9:	LOWER BAND EDGE BLOCK F - PATCH ANTENNA	39
PLOT 8-10:	UPPER BAND EDGE BLOCK F - PATCH ANTENNA	40
PLOT 8-11:	LOWER BAND EDGE BLOCK C - PATCH ANTENNA	41
PLOT 8-12:	UPPER BAND EDGE BLOCK C - PATCH ANTENNA	42
PLOT 8-13:	LOWER BAND EDGE BLOCK B - ROD ANTENNA	43
PLOT 8-14:	UPPER BAND EDGE BLOCK B - ROD ANTENNA	44
PLOT 8-15:	LOWER BAND EDGE BLOCK F - ROD ANTENNA	45
PLOT 8-16:	UPPER BAND EDGE BLOCK F - ROD ANTENNA	46
PLOT 8-17:	LOWER BAND EDGE BLOCK C - ROD ANTENNA	47
PLOT 8-18:	UPPER BAND EDGE BLOCK C - ROD ANTENNA	48
PLOT 9-1:	TEMPERATURE FREQUENCY STABILITY DATA - §2.1055	51
PLOT 9-2:	VOLTAGE FREQUENCY STABILITY	52

APPENDIX INDEX

APPENDIX A:	RF EXPOSURE COMPLIANCE	54
APPENDIX B:	AGENCY AUTHORIZATION LETTER	58
APPENDIX C:	CONFIDENTIALITY REQUEST LETTER.....	59
APPENDIX D:	PRODUCT DESCRIPTION	60
APPENDIX E:	LABEL AND LABEL LOCATION	61
APPENDIX F:	ANTENNA SPECIFICATIONS.....	62
APPENDIX G:	BILL OF MATERIAL (PARTS LIST)	63
APPENDIX H:	SCHEMATIC	64
APPENDIX I:	TEST/TUNE PROCEDURE.....	65
APPENDIX J:	MANUAL	66
APPENDIX K:	TEST PHOTOGRAPHS	67
APPENDIX L:	EXTERNAL PHOTOGRAPHS	73
APPENDIX M:	INTERNAL PHOTOGRAPHS	81

PHOTOGRAPH INDEX

PHOTOGRAPH 1:	FCC ID LABEL AND LOCATION	61
PHOTOGRAPH 2:	RADIATED FRONT VIEW WITH WHIP ANTENNA	67
PHOTOGRAPH 3:	RADIATED BACK VIEW WITH WHIP ANTENNA.....	68
PHOTOGRAPH 4:	RADIATED FRONT VIEW WITH PATCH ANTENNA	69
PHOTOGRAPH 5:	RADIATED BACK VIEW WITH PATCH ANTENNA	70
PHOTOGRAPH 6:	RADIATED FRONT VIEW WITH ROD ANTENNA	71
PHOTOGRAPH 7:	RADIATED BACK VIEW WITH ROD ANTENNA	72
PHOTOGRAPH 8:	TOP VIEW.....	73
PHOTOGRAPH 9:	BOTTOM VIEW	74
PHOTOGRAPH 10:	RIGHT SIDE VIEW SHOWING ANTENNA CONNECTOR.....	75
PHOTOGRAPH 11:	REAR VIEW SHOWING POWER, RJ-11 AND DATA CONNECTIONS	76
PHOTOGRAPH 12:	WHIP ANTENNA	77
PHOTOGRAPH 13:	PATCH ANTENNA.....	78
PHOTOGRAPH 14:	ROD ANTENNA.....	79
PHOTOGRAPH 15:	6.8 V DC POWER SUPPLY	80
PHOTOGRAPH 16:	TOP OF POWER SWITCH/LED PCB.....	81
PHOTOGRAPH 17:	INSIDE TOP COVER SHOWING BACK SIDE OF POWER SWITCH/LED PCB.....	82
PHOTOGRAPH 18:	TOP OF PCB IN BASE	83
PHOTOGRAPH 19:	TOP OF PCB	84
PHOTOGRAPH 20:	TOP OF PCB WITH SHIELDS REMOVED	85
PHOTOGRAPH 21:	BOTTOM OF PCB	86

1 GENERAL INFORMATION

1.1 SCOPE

FCC Rules Part 24 (E) Personal Communications Services – Broadband PCS

All measurements contained in this application were conducted in accordance with the FCC Rules and Regulations CFR47 and ANSI/TIA-603-B-2002 Land Mobile FM or PM Communications Equipment Measurement and Performance Standards. The instrumentation utilized for the measurements conforms to the ANSI C63.4 standard for EMI and Field Strength Instrumentation. Calibration checks are performed regularly on the instruments, and all accessories including high pass filter, coaxial attenuator, preamplifier and cables.

1.2 TEST FACILITY

The open area test site and conducted measurement facility used to collect the radiated data is located at 360 Herndon Parkway, Suite 1400, Herndon, Virginia 20170. This site has been fully described in a report and approved by the Federal Communications Commission to perform AC line conducted and radiated emissions testing (ANSI C63.4 2003).

1.3 RELATED SUBMITTAL(S)/GRANT(S)

This is a new application submittal. The digital interface and receiver were investigated and found compliant. A DoC report can be provided upon request.

2 EQUIPMENT INFORMATION

2.1 JUSTIFICATION

To complete the test configuration required by the FCC, the transmitter was software-controlled by the manufacturer to operate in a continuous mode. The final data was taken as a substitution measurement. The device is provided with an external antenna connector. EIRP measurement is provided to support the RF exposure requirements for the antennas listed in this application filing.

2.2 EXERCISING THE EUT

The FSU810 is a desk phone transmitter designed to link to a PHS phone network which transmits at a frequency within the range 1880.15 MHz – 1909.85 MHz. Three channels were investigated: 1880.15 MHz, 1895.15 MHz, and 1909.85 MHz, in three orthogonal planes, with the receiving antenna in both horizontal and vertical polarities, from 1 meter to 4 meters in height.

2.3 MODIFICATIONS

No modifications were necessary for compliance. There were no deviations from the test standards(s) and/or methods.

2.4 TEST SYSTEM DETAILS

The test sample was received on December 3, 2004. The FCC Identifiers for all equipment, plus descriptions of all cables used in the tested system, are:

TABLE 2-1: EQUIPMENT UNDER TEST (EUT)

Part	Manufacturer	Model	Serial Number	FCC ID	Cable Description	RTL Bar Code
Radio	UTStarcom	FSU810	136516936	O6Y-FSU810	1 m RJ-11	16357
4.8V Ni-MH Battery	UTStarcom	HZSN1600AA	BY0013EF	N/A	10 cm unshielded	16399
Radio	UTStarcom	FSU810	136516934	O6Y-FSU810	1 m RJ-11	16356
4.8V Ni-MH Battery	UTStarcom	HZSN1600AA	BY0007D4	N/A	10 cm unshielded	16396
10 dBi Antenna	UTStarcom	QXX0318900	B03721	N/A	5 m shielded I/O	16358
4.5 dBi Omni Antenna	UTStarcom	QTA0000500	00009	N/A	1.6 m Shielded	16359
2.5 dBi Whip Antenna	UTStarcom	N/A	N/A	N/A	N/A	16397
2.5 dBi Whip Antenna	UTStarcom	N/A	N/A	N/A	N/A	16398
AC Adapter	UTStarcom	S686502A	CY150445	N/A	1.7 m unshielded DC power; 1.8 m unshielded AC power	16360
AC Adapter	UTStarcom	S686502A	CB200409	N/A	1.7 m unshielded DC power; 1.8 m unshielded AC power	16361

TABLE 2-2: EQUIPMENT USED TO SET UP EUT

Part	Manufacturer	Model	Serial Number	FCC ID	Cable Description	RTL Bar Code
Interface Box	UTStarcom	SO-Writer	91003913100	NA	1.8m shielded serial cable; 0.5m shielded I/O cable	16378
AC Adapter	UTStarcom	UT618/UT618+	CB200308	N/A	1.7m shielded power	16381

2.5 CONFIGURATION OF TESTED SYSTEM

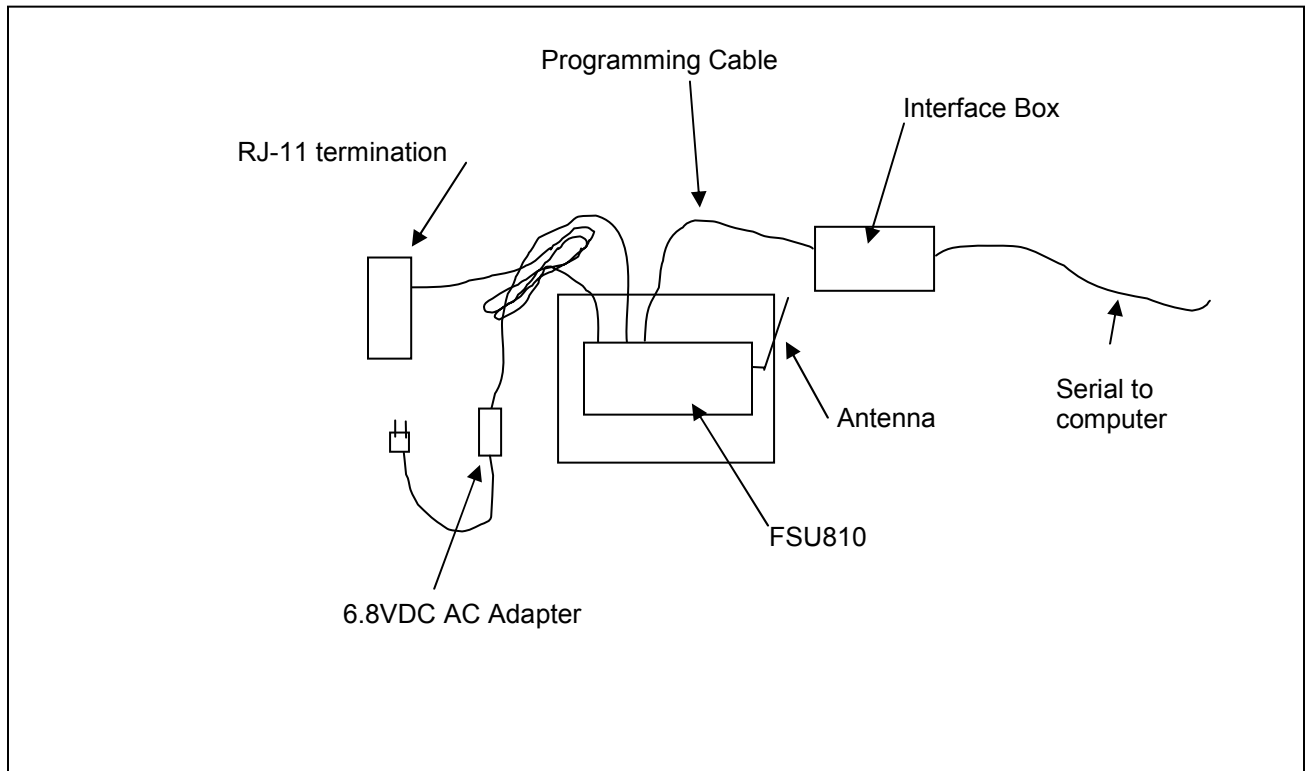


FIGURE 2-1: CONFIGURATION OF TESTED SYSTEM

3 DC VOLTAGES AND CURRENTS - PART §2.1033(C)(8)

The DC voltages applied to, and DC currents into, the several elements of the final radio frequency amplifying device for normal operation over the power range.

3.1 DC VOLTAGES AND CURRENTS TEST EQUIPMENT

TABLE 3-1: DC VOLTAGES AND CURRENTS TEST EQUIPMENT


RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due
901350	Meterman	33XR	Multimeter	N/A	7/21/05

TABLE 3-2: DC VOLTAGES AND CURRENTS DATA

	Typical
Voltage (DC)	6.8
Current (mA)	41.6

TEST PERSONNEL:

Daniel W. Baltzell
EMC Test Engineer



Signature


December 21, 2004
Date Of Test

4 RF POWER OUTPUT - §2.1046

TABLE 4-1: POWER OUTPUT AT THE ANTENNA PORT DATA - §2.1046

Channel	Frequency (MHz)	Peak Power Meter Level (dBm)
206	1880.15	19.1
1	1895.15	19.2
50	1909.85	19.3

TEST PERSONNEL:

Daniel W. Baltzell		December 17, 2004
EMC Test Engineer	Signature	Date Of Test

4.1 ANSI/TIA-603-B-2002, SECTION 2.2.17 TEST PROCEDURE

Substitution method.

4.2 EFFECTIVE ISOTROPIC RADIATED POWER LIMITS - §24.232(B) TEST PROCEDURE

Mobile/portable stations are limited to 2 watts EIRP peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

4.3 RF POWER TEST EQUIPMENT

TABLE 4-2: RF POWER TEST EQUIPMENT

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due
901053	Schaffner Chase	CBL6112B	Bi-Log Antenna (20 MHz - 2 GHz)	2648	9/20/05
901020	Hewlett Packard	8564E	Portable Spectrum Analyzer (9 kHz - 40 GHz)	3943A01719	8/11/05
900928	Hewlett Packard	83752A	Synthesized Sweeper (0.01 - 20 GHz)	3610A00866	9/5/05
900814	Electro-Metrics	EM-6961 (RGA-60)	Double Ridged Guide Antenna (1 - 18 GHz)	2310	2/17/06
901184	Agilent Technologies	E4416A	EPM-P Power Meter, single channel	GB41050573	8/2/05
901186	Agilent Technologies	E9323A (50MHz-6GHz)	Peak & Average Power Sensor	US40410380	8/2/05

4.4 EFFECTIVE ISOTROPIC RADIATED POWER TEST DATA- §2.1046

TABLE 4-3: RADIATED POWER DATA - §2.1046 – WHIP ANTENNA

Channel	Test Detector	Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)
206	Pk	1880.15	84.3	9.6	4.1	7.0	12.5	0.018
1	Pk	1895.15	83.7	9.1	4.1	7.0	12.0	0.016
50	Pk	1909.85	87.0	12.6	4.1	7.0	15.5	0.035

TABLE 4-4: RADIATED POWER DATA - §2.1046 – PATCH ANTENNA

Channel	Test Detector	Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)
206	Pk	1880.15	86.0	11.3	4.1	7.0	14.2	0.026
251	Pk	1895.15	87.5	12.9	4.1	7.0	15.8	0.038
50	Pk	1909.85	87.3	12.9	4.1	7.0	15.8	0.038

TABLE 4-5: RADIATED POWER DATA - §2.1046 – ROD ANTENNA

Channel	Test Detector	Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)
206	Pk	1880.15	87.5	12.8	4.1	7.0	15.7	0.037
251	Pk	1895.15	88.7	14.1	4.1	7.0	17.0	0.050
50	Pk	1909.85	88.5	14.1	4.1	7.0	17.0	0.050

Notes: Pk = Peak Detector

EIRP Measurements by Substitution Method.

The EUT was placed on a turntable 3 meters from the receive antenna. The field of maximum intensity was found by rotating the EUT approximately 360 degrees and changing the height of the receive antenna from 1 to 4 meters. The field strength was maximized using a calibrated spectrum analyzer using a 1 MHz resolution bandwidth for each channel being tested, and adjusted to a peak and average level using a power meter attached at the end of the receive antenna. A double ridge horn antenna was substituted in place of the EUT. The horn antenna was fed by a signal generator and adjusted until the previous level was attained. This level was recorded and was further corrected by subtracting the cable loss from the signal generator to the transmit antenna and adding the horn gain.

i.e., $S_g - CL + G_n = \text{EIRP (dBm)}$


S_g = Signal Generator Level (dBm)

CL = Cable Loss (dB)

G_n = Transmitting horn antenna gain (dBi)

TEST PERSONNEL:

Daniel W. Baltzell
EMC Test Engineer



Signature

December 20, 2004
Date Of Test

5 OCCUPIED BANDWIDTH - §2.1049; NECESSARY BANDWIDTH §2.202 (OCCUPIED BANDWIDTH) – PART 24.238(B) (EMISSION BANDWIDTH)

Channel 50 was found to be the worst case and is shown below.

Type of Emission: DXW

Necessary bandwidth designator derived from measurement of emission bandwidth (-26 dB) (263 kHz):
263KDXW

OCCUPIED BANDWIDTH (99% POWER BANDWIDTH) - COMPLIANCE WITH THE EMISSION MASKS

5.1 TEST PROCEDURE

ANSI/TIA-603-B-2002, section 2.2.11

Device with digital modulation: operation to its maximum extent.

Note: Reference level is average conducted power measurement.


5.2 OCCUPIED BANDWIDTH TEST EQUIPMENT

TABLE 5-1: OCCUPIED BANDWIDTH TEST EQUIPMENT

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due
900931	Hewlett Packard	8566B	Spectrum Analyzer (100 Hz – 22 GHz)	3138A07771	6/23/05

5.3 TEST DATA (CHANNEL 1: OCCUPIED BANDWIDTH = 262 KHZ)

PLOT 5-1: OCCUPIED BANDWIDTH (-26 DB)

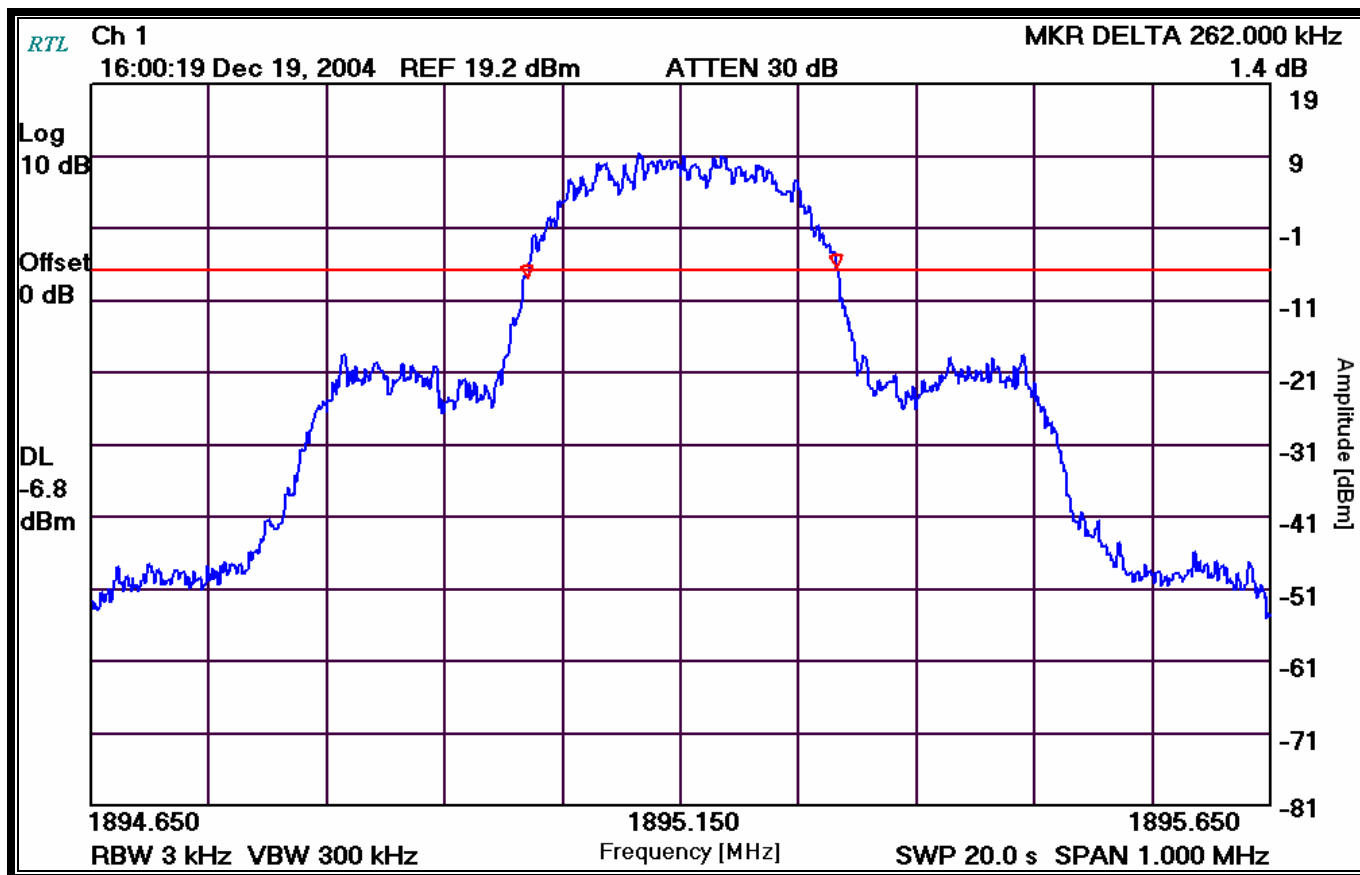

TEST PERSONNEL:

Daniel W. Baltzell
 EMC Test Engineer

Signature

December 19, 2004
 Date Of Test

6 CONDUCTED SPURIOUS AND HARMONIC EMISSIONS - §2.1051

6.1 TEST PROCEDURE

ANSI/TIA-603-B-2002, Section 2.2.13

The transmitter antenna terminal is connected with the 50 Ω impedance input to the spectrum analyzer.
The worst case average channel test data is provided.

6.2 CONDUCTED SPURIOUS AND HARMONIC EMISSIONS TEST EQUIPMENT

TABLE 6-1: CONDUCTED SPURIOUS AND HARMONIC EMISSIONS TEST EQUIPMENT

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due
900931	Hewlett Packard	8566B	Spectrum Analyzer (100 Hz – 22 GHz)	3138A07771	6/23/05

6.3 CONDUCTED SPURIOUS AND HARMONIC TEST DATA - §2.1051

Operating Frequency (MHz): 1880.15
 Channel: 206
 Measured Power at the Antenna Port (dBm): 19.1
 Modulation: DXW
 Limit (dBc): 32.1

TABLE 6-2: CONDUCTED SPURIOUS AND HARMONIC DATA §2.1051

Frequency (MHz)	Measured Level (dBc)	Margin (dB)
1880.150	69.7	-37.6
3760.300	64.0	-31.9
5640.450	76.2	-44.1
7520.600	79.3	-47.2
9400.750	88.9	-56.8
11280.900	85.6	-53.5
13161.050	83.7	-51.6
15041.200	81.6	-49.5
16921.350	80.9	-48.8
18801.500	69.7	-37.6

TEST PERSONNEL:

Daniel W. Baltzell
 EMC Test Engineer



Signature

December 17, 2004
 Date Of Test


Operating Frequency (MHz): 1895.15
Channel: 01
Measured Power at the Antenna Port (dBm): 19.2
Modulation: DXW
Limit (dBc): 32.2

TABLE 6-3: CONDUCTED SPURIOUS AND HARMONIC DATA §2.1051

Frequency (MHz)	Measured Level (dBc)	Margin (dB)
3790.300	73.6	-41.4
5685.450	69.6	-37.4
7580.600	81.8	-49.6
9475.750	84.1	-51.9
11370.900	89.7	-57.5
13266.050	85.4	-53.2
15161.200	85.0	-52.8
17056.350	85.5	-53.3
18951.500	81.2	-49.0
3790.300	73.6	-41.4
5685.450	69.6	-37.4

TEST PERSONNEL:

Daniel W. Baltzell
 EMC Test Engineer



Signature

December 17, 2004
 Date Of Test

Operating Frequency (MHz): 1909.85
Channel: 50
Measured Power at the Antenna Port (dBm): 19.3
Modulation: DXW
Limit (dBc): 32.3

TABLE 6-4: CONDUCTED SPURIOUS AND HARMONIC DATA §2.1051

Frequency (MHz)	Measured Level (dBc)	Margin (dB)
3819.700	77.3	-45.0
5729.550	69.0	-36.7
7639.400	81.1	-48.8
9549.250	82.8	-50.5
11459.100	90.3	-58.0
13368.950	86.2	-53.9
15278.800	84.6	-52.3
17188.650	86.3	-54.0
19098.500	81.9	-49.6

TEST PERSONNEL:

Daniel W. Baltzell
EMC Test Engineer



Signature

December 17, 2004
Date Of Test

7 RADIATED SPURIOUS AND HARMONIC EMISSIONS - §2.1053

7.1 RADIATED SPURIOUS AND HARMONIC EMISSIONS - §2.1053

Substitution method. The EUT was terminated with a 50 ohm termination and placed on a turntable 3 meters from the receive antenna. The field of maximum intensity was found by rotating the EUT approximately 360 degrees and changing the height of the receive antenna from 1 to 4 meters. The field strength was recorded from a calibrated spectrum analyzer for each channel being tested. A double ridge horn antenna was substituted in place of the EUT. The horn antenna was fed by a signal generator and adjusted until the previous level was attained. The signal generator level was recorded. It was further corrected by subtracting the cable loss from the signal generator to the dipole, and adding the horn gain. The worst case average channel test data is provided.

7.2 RADIATED SPURIOUS TEST EQUIPMENT

TABLE 7-1: RADIATED SPURIOUS TEST EQUIPMENT

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due
901053	Schaffner Chase	CBL6112B	Bi-Log Antenna (20 MHz - 2 GHz)	2648	9/20/05
900932	Hewlett Packard	8449B OPT H02	Preamplifier (1 - 26.5 GHz)	3008A00505	5/5/05
901020	Hewlett Packard	8564E	Portable Spectrum Analyzer (9 kHz - 40 GHz)	3943A01719	8/11/05
900928	Hewlett Packard	83752A	Synthesized Sweeper (0.01 - 20 GHz)	3610A00866	9/5/05
900814	Electro-Metrics	EM-6961 (RGA-60)	Double Ridged Guide Antenna (1 - 18 GHz)	2310	2/17/06
900772	EMCO	3161-02	Horn Antenna (2 - 4 GHz)	9804-1044	5/20/07
900321	EMCO	3161-03	Horn Antennas (4 - 8,2GHz)	9508-1020	5/20/07
900323	EMCO	3160-7	Horn Antennas (8,2 - 12,4 GHz)	9605-1054	5/20/07
900356	EMCO	3160-08	Horn Antenna (12.4 - 18 GHz)	9607-1044	5/20/07
900325	EMCO	3160-9	Horn Antennas (18 - 26.5 GHz)	9605-1051	5/20/07
901231	IW Microwave Products	KPS-1503-2400-KPS	High frequency RF cables	240"	1/30/05
901232	IW Microwave Products	KPS-1503-2400-KPS	High frequency RF cables	240"	1/30/05
901235	IW Microwave Products	KPS-1503-360-KPS	High frequency RF cables	36"	1/30/05
901242	Rhein Tech Labs	WRT-000-0003	Wood rotating table	N/A	Not Required
900878	Rhein Tech Labs	AM3-1197-0005	3 meter antenna mast, polarizing	Outdoor Range 1	Not Required

7.3 FIELD STRENGTH OF SPURIOUS RADIATION TEST DATA - §2.1053

Operating Frequency (MHz): 1880.15
 Channel: 206
 Measured EIRP (dBm): 12.5
 Modulation: DXW
 Distance (m): 3
 Limit (dBc): 25.5

TABLE 7-2: FIELD STRENGTH OF SPURIOUS RADIATION TEST DATA §2.1053; WHIP ANTENNA

Frequency (MHz)	Signal Generator Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Corrected Level (dBc)	Margin (dB)
3760.300	-42.4	5.9	8.0	52.8	-27.3
5640.450	-50.4	7.3	8.7	61.5	-36.0
7520.600	-43.4	8.9	9.7	55.1	-29.6
9400.750	-45.9	9.9	10.3	58.0	-32.5
11280.900	-43.3	11.1	10.7	56.2	-30.7
13161.050	-37.7	12.0	12.5	49.7	-24.2
15041.200	-33.9	12.1	10.7	47.8	-22.3
16921.350	-33.7	13.1	13.2	46.1	-20.6
18801.500	-32.5	13.9	6.8	52.1	-26.6

Operating Frequency (MHz): 1880.15
Channel: 206
Measured EIRP (dBm): 14.2
Modulation: DXW
Distance (m): 3
Limit (dBc): 27.2

TABLE 7-3: FIELD STRENGTH OF SPURIOUS RADIATION TEST DATA §2.1053; PATCH ANTENNA

Frequency (MHz)	Signal Generator Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Corrected Level (dBc)	Margin (dB)
3760.300	-44.9	5.9	8.0	57.0	-29.8
5640.450	-54.1	7.3	8.7	66.9	-39.7
7520.600	-43.6	8.9	9.7	57.0	-29.8
9400.750	-46.1	9.9	10.3	59.9	-32.7
11280.900	-36.9	11.1	10.7	51.5	-24.3
13161.050	-25.4	12.0	12.5	39.1	-11.9
15041.200	-34.2	12.1	10.7	49.8	-22.6
16921.350	-34.5	13.1	13.2	48.6	-21.4
18801.500	-32.2	13.9	6.8	53.5	-26.3

Operating Frequency (MHz): 1880.15
Channel: 206
Measured EIRP (dBm): 15.7
Modulation: DXW
Distance (m): 3
Limit (dBc): 28.7

TABLE 7-4: FIELD STRENGTH OF SPURIOUS RADIATION TEST DATA §2.1053; ROD ANTENNA

Frequency (MHz)	Signal Generator Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Corrected Level (dBc)	Margin (dB)
3760.300	-46.1	5.9	8.0	59.7	-31.0
5640.450	-53.6	7.3	8.7	67.9	-39.2
7520.600	-43.8	8.9	9.7	58.7	-30.0
9400.750	-45.8	9.9	10.3	61.1	-32.4
11280.900	-37.0	11.1	10.7	53.1	-24.4
13161.050	-38.4	12.0	12.5	53.6	-24.9
15041.200	-34.4	12.1	10.7	51.5	-22.8
16921.350	-35.0	13.1	13.2	50.6	-21.9
18801.500	-32.4	13.9	6.8	55.2	-26.5

Operating Frequency (MHz): 1895.15
Channel: 1
Measured EIRP (dBm): 12.0
Modulation: DXW
Distance (m): 3
Limit (dBc): 25.0

TABLE 7-5: FIELD STRENGTH OF SPURIOUS RADIATION TEST DATA §2.1053; WHIP ANTENNA

Frequency (MHz)	Signal Generator Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Corrected Level (dBc)	Margin (dB)
3790.300	-44.8	5.9	8.0	54.7	-29.7
5685.450	-50.9	7.3	8.7	61.5	-36.5
7580.600	-46.4	8.9	9.8	57.5	-32.5
9475.750	-45.9	9.9	10.5	57.3	-32.3
11370.900	-42.8	11.3	10.7	55.4	-30.4
13266.050	-35.9	11.7	12.7	46.9	-21.9
15161.200	-34.8	12.1	10.9	48.0	-23.0
17056.350	-34.1	13.3	12.8	46.6	-21.6
18951.500	-32.3	13.7	6.8	51.2	-26.2

Operating Frequency (MHz): 1895.15
Channel: 1
Measured EIRP (dBm): 15.8
Modulation: DXW
Distance (m): 3
Limit (dBc): 28.8

TABLE 7-6: FIELD STRENGTH OF SPURIOUS RADIATION TEST DATA §2.1053; PATCH ANTENNA

Frequency (MHz)	Signal Generator Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Corrected Level (dBc)	Margin (dB)
3790.300	-44.7	5.9	8.0	58.4	-29.6
5685.450	-53.2	7.3	8.7	67.6	-38.8
7580.600	-46.9	8.9	9.8	61.8	-33.0
9475.750	-45.9	9.9	10.5	61.1	-32.3
11370.900	-42.6	11.3	10.7	59.0	-30.2
13266.050	-30.5	11.7	12.7	45.3	-16.5
15161.200	-35.0	12.1	10.9	52.0	-23.2
17056.350	-35.1	13.3	12.8	51.4	-22.6
18951.500	-31.5	13.7	6.8	54.2	-25.4

Operating Frequency (MHz): 1895.15
Channel: 1
Measured EIRP (dBm): 17.0
Modulation: DXW
Distance (m): 3
Limit (dBc): 30.0

TABLE 7-7: FIELD STRENGTH OF SPURIOUS RADIATION TEST DATA §2.1053; ROD ANTENNA

Frequency (MHz)	Signal Generator Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Corrected Level (dBc)	Margin (dB)
3790.300	-45.6	5.9	8.0	60.5	-30.5
5685.450	-53.7	7.3	8.7	69.3	-39.3
7580.600	-46.8	8.9	9.8	62.9	-32.9
9475.750	-45.9	9.9	10.5	62.3	-32.3
11370.900	-41.1	11.3	10.7	58.7	-28.7
13266.050	-35.9	11.7	12.7	51.9	-21.9
15161.200	-35.1	12.1	10.9	53.3	-23.3
17056.350	-34.4	13.3	12.8	51.9	-21.9
18951.500	-32.5	13.7	6.8	56.4	-26.4

Operating Frequency (MHz): 1909.85
Channel: 50
Measured EIRP (dBm): 15.5
Modulation: DXW
Distance (m): 3
Limit (dBc): 28.5

TABLE 7-8: FIELD STRENGTH OF SPURIOUS RADIATION TEST DATA §2.1053; WHIP ANTENNA

Frequency (MHz)	Signal Generator Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Corrected Level (dBc)	Margin (dB)
3819.700	-43.8	5.9	8.0	57.2	-28.7
5729.550	-49.3	7.4	8.7	63.5	-35.0
7639.400	-48.6	9.0	10.0	63.1	-34.6
9549.250	-46.7	9.9	10.6	61.5	-33.0
11459.100	-43.6	11.3	10.7	59.7	-31.2
13368.950	-31.3	11.8	12.8	45.8	-17.3
15278.800	-34.1	12.2	11.0	50.8	-22.3
17188.650	-34.7	13.2	12.2	51.2	-22.7
19098.500	-33.1	13.6	6.8	55.4	-26.9

Operating Frequency (MHz): 1909.85
Channel: 50
Measured EIRP (dBm): 15.8
Modulation: DXW
Distance (m): 3
Limit (dBc): 28.8

TABLE 7-9: FIELD STRENGTH OF SPURIOUS RADIATION TEST DATA §2.1053; PATCH ANTENNA

Frequency (MHz)	Signal Generator Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Corrected Level (dBc)	Margin (dB)
3819.700	-43.4	5.9	8.0	57.1	-28.3
5729.550	-52.4	7.4	8.7	66.9	-38.1
7639.400	-47.3	9.0	10.0	62.1	-33.3
9549.250	-36.0	9.9	10.6	51.1	-22.3
11459.100	-43.4	11.3	10.7	59.8	-31.0
13368.950	-40.6	11.8	12.8	55.4	-26.6
15278.800	-37.3	12.2	11.0	54.3	-25.5
17188.650	-38.2	13.2	12.2	55.0	-26.2
19098.500	-36.7	13.6	6.8	59.3	-30.5


Operating Frequency (MHz): 1909.85
Channel: 50
Measured EIRP (dBm): 17.0
Modulation: DXW
Distance (m): 3
Limit (dBc): 30.0

TABLE 7-10: FIELD STRENGTH OF SPURIOUS RADIATION TEST DATA §2.1053; ROD ANTENNA

Frequency (MHz)	Signal Generator Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Corrected Level (dBc)	Margin (dB)
3819.700	-44.6	5.9	8.0	59.5	-29.5
5729.550	-53.5	7.4	8.7	69.2	-39.2
7639.400	-48.1	9.0	10.0	64.1	-34.1
9549.250	-37.3	9.9	10.6	53.6	-23.6
11459.100	-39.5	11.3	10.7	57.1	-27.1
13368.950	-35.5	11.8	12.8	51.5	-21.5
15278.800	-34.1	12.2	11.0	52.3	-22.3
17188.650	-34.3	13.2	12.2	52.3	-22.3
19098.500	-32.1	13.6	6.8	55.9	-25.9

TEST PERSONNEL:

Daniel W. Baltzell
 EMC Test Engineer



Signature

December 20, 2004
 Date Of Test

8 BAND-EDGE COMPLIANCE - PART 24.238

8.1 TEST PROCEDURE:

Delta Marker method : The resolution of the spectrum analyzer is adjusted to 1% of the emission bandwidth after the reference level is adjusted to the EIRP level using a resolution and video bandwidth of 1 MHz. The frequency is centered on the band edge of interest with a span capable of showing the peak; a delta-to-peak is performed with the display line set at -13 dBm ($43+10\text{LogP}$).

TABLE 8-1: BAND-EDGE TEST EQUIPMENT

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due
901053	Schaffner Chase	CBL6112B	Bi-Log Antenna (20 MHz - 2 GHz)	2648	9/20/05
901020	Hewlett Packard	8564E	Portable Spectrum Analyzer (9 kHz - 40 GHz)	3943A01719	8/11/05

8.2 TEST DATA

TABLE 8-2: BAND EDGE COMPLIANCE – WHIP ANTENNA

Block applicable	Frequency (MHz)	Spurious at block edge (dBm)	Limit (dBm)	Margin (dB)
B	1865.10	-41.6	-13.0	-28.6
B	1885.00	-44.5	-13.0	-31.5
F	1890.00	-44.9	-13.0	-31.9
F	1895.14	-24.6	-13.0	-11.6
C	1894.86	-23.7	-13.0	-10.7
C	1910.04	-27.5	-13.0	-14.5


TABLE 8-3: BAND EDGE COMPLIANCE – PATCH ANTENNA

Block applicable	Frequency (MHz)	Spurious at block edge (dBm)	Limit (dBm)	Margin (dB)
B	1865.20	-41.4	-13.0	-28.4
B	1885.00	-45.9	-13.0	-32.9
F	1890.00	-47.3	-13.0	-34.3
F	1895.13	-22.7	-13.0	-9.7
C	1894.86	-21.5	-13.0	-8.5
C	1910.14	-21.0	-13.0	-8.0

TABLE 8-4: BAND EDGE COMPLIANCE – ROD ANTENNA

Block applicable	Frequency (MHz)	Spurious at block edge (dBm)	Limit (dBm)	Margin (dB)
B	1870.00	-44.2	-13.0	-31.2
B	1885.00	-45.9	-13.0	-32.9
F	1890.00	-44.5	-13.0	-31.5
F	1895.04	-22.4	-13.0	-9.4
C	1894.87	-25.5	-13.0	-12.5
C	1910.03	-26.1	-13.0	-13.1

PLOT 8-1: LOWER BAND EDGE BLOCK B - WHIP ANTENNA

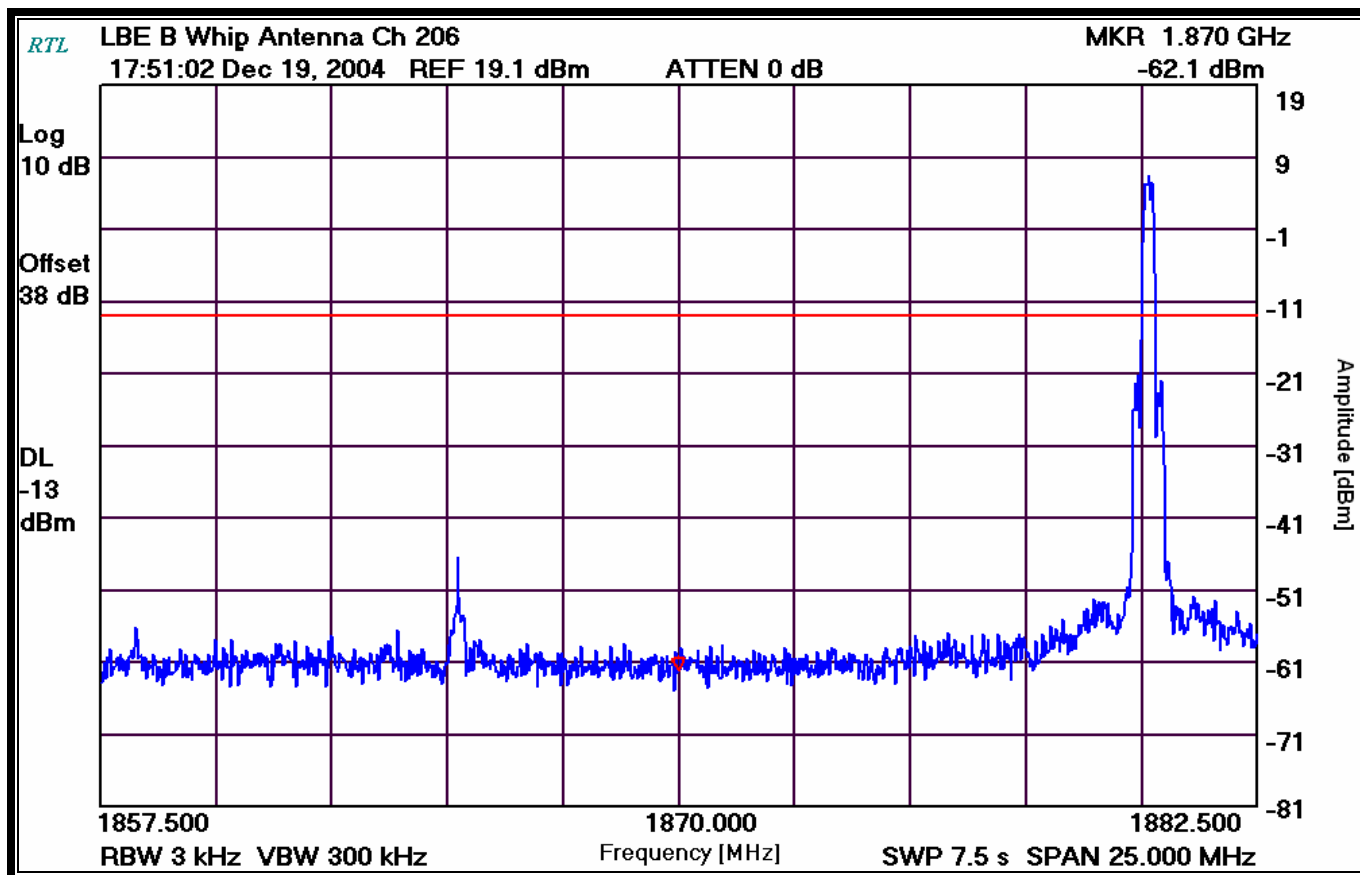


TEST PERSONNEL:

Daniel W. Baltzell
 EMC Test Engineer

Signature

December 19, 2004
 Date Of Test

PLOT 8-2: UPPER BAND EDGE BLOCK B - WHIP ANTENNA

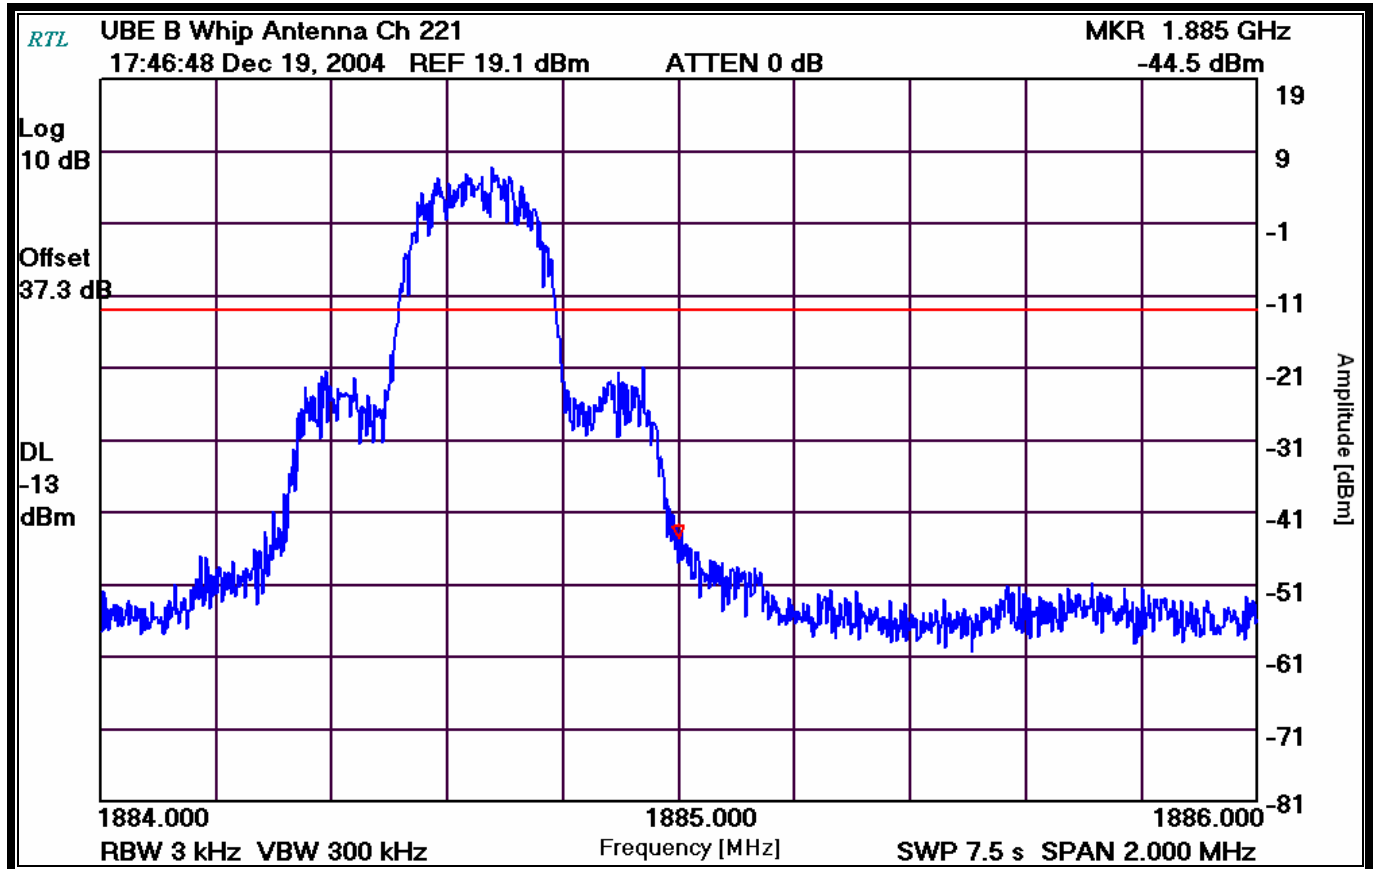


TEST PERSONNEL:

Daniel W. Baltzell
 EMC Test Engineer

Signature

December 19, 2004
 Date Of Test

PLOT 8-3: LOWER BAND EDGE BLOCK F - WHIP ANTENNA

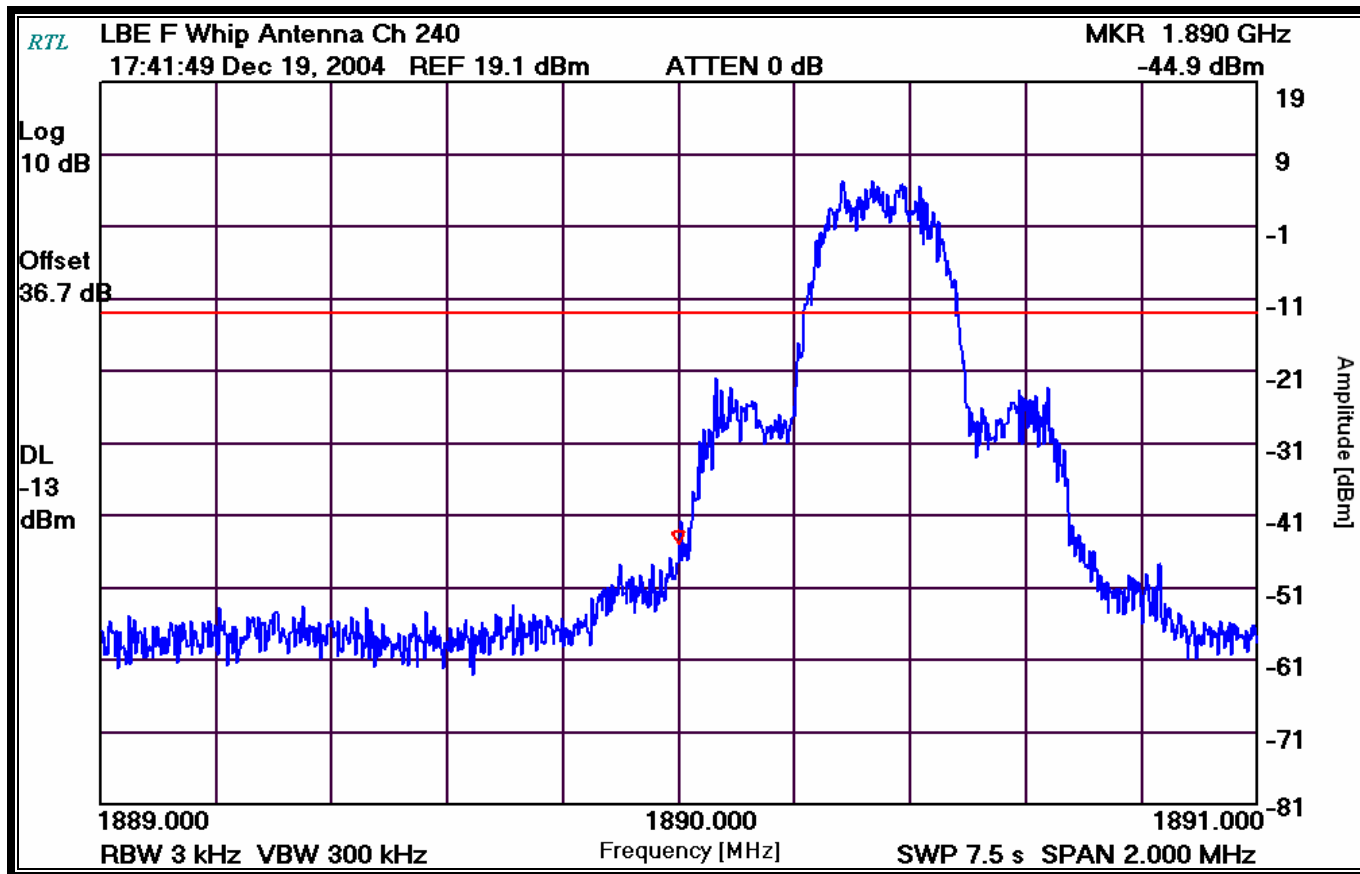


TEST PERSONNEL:

Daniel W. Baltzell
 EMC Test Engineer

Signature

December 19, 2004
 Date Of Test

PLOT 8-4: UPPER BAND EDGE BLOCK F - WHIP ANTENNA

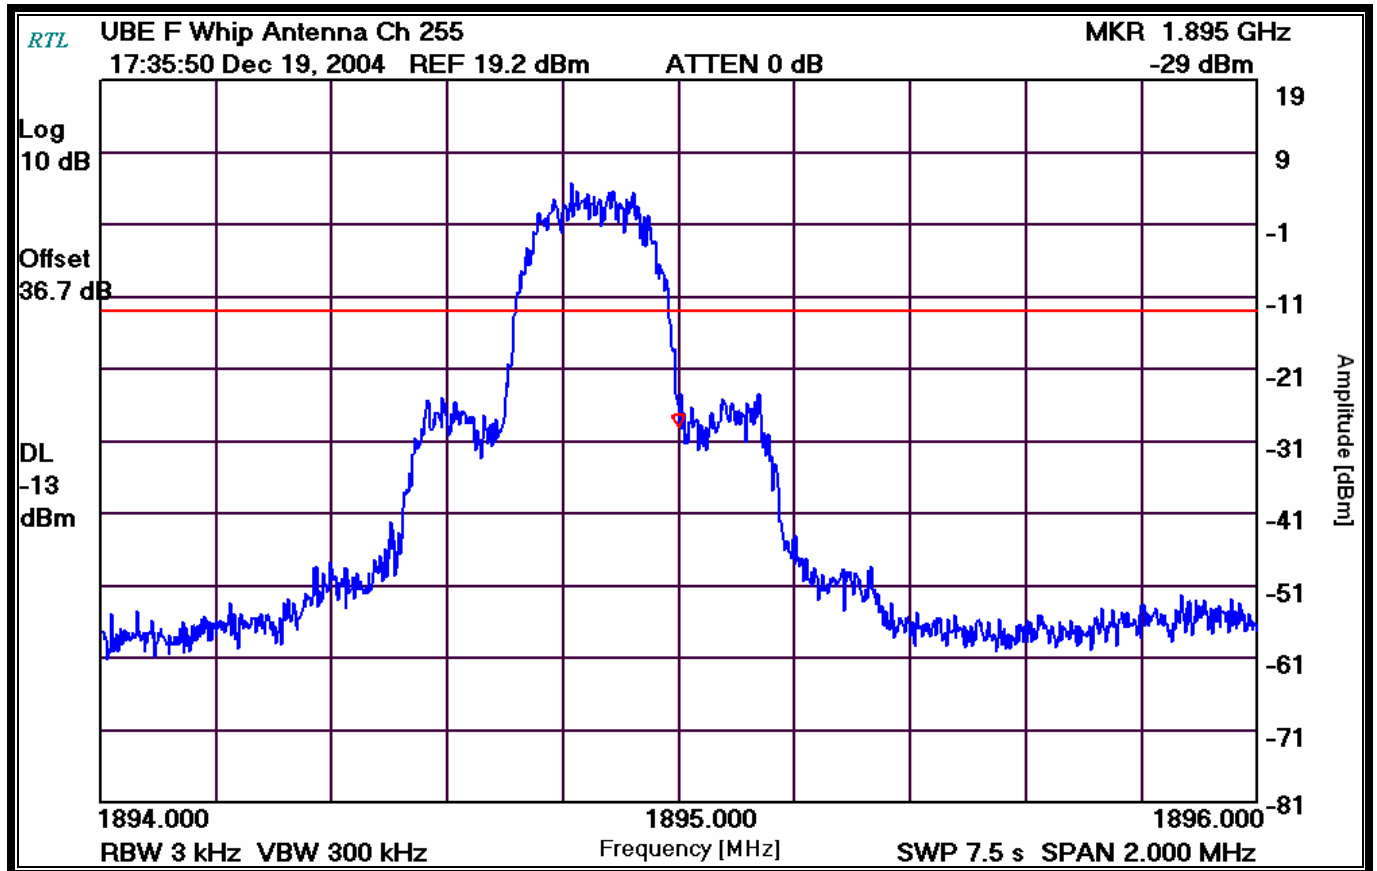


TEST PERSONNEL:

Daniel W. Baltzell
 EMC Test Engineer

Signature

December 19, 2004
 Date Of Test

PLOT 8-5: LOWER BAND EDGE BLOCK C - WHIP ANTENNA

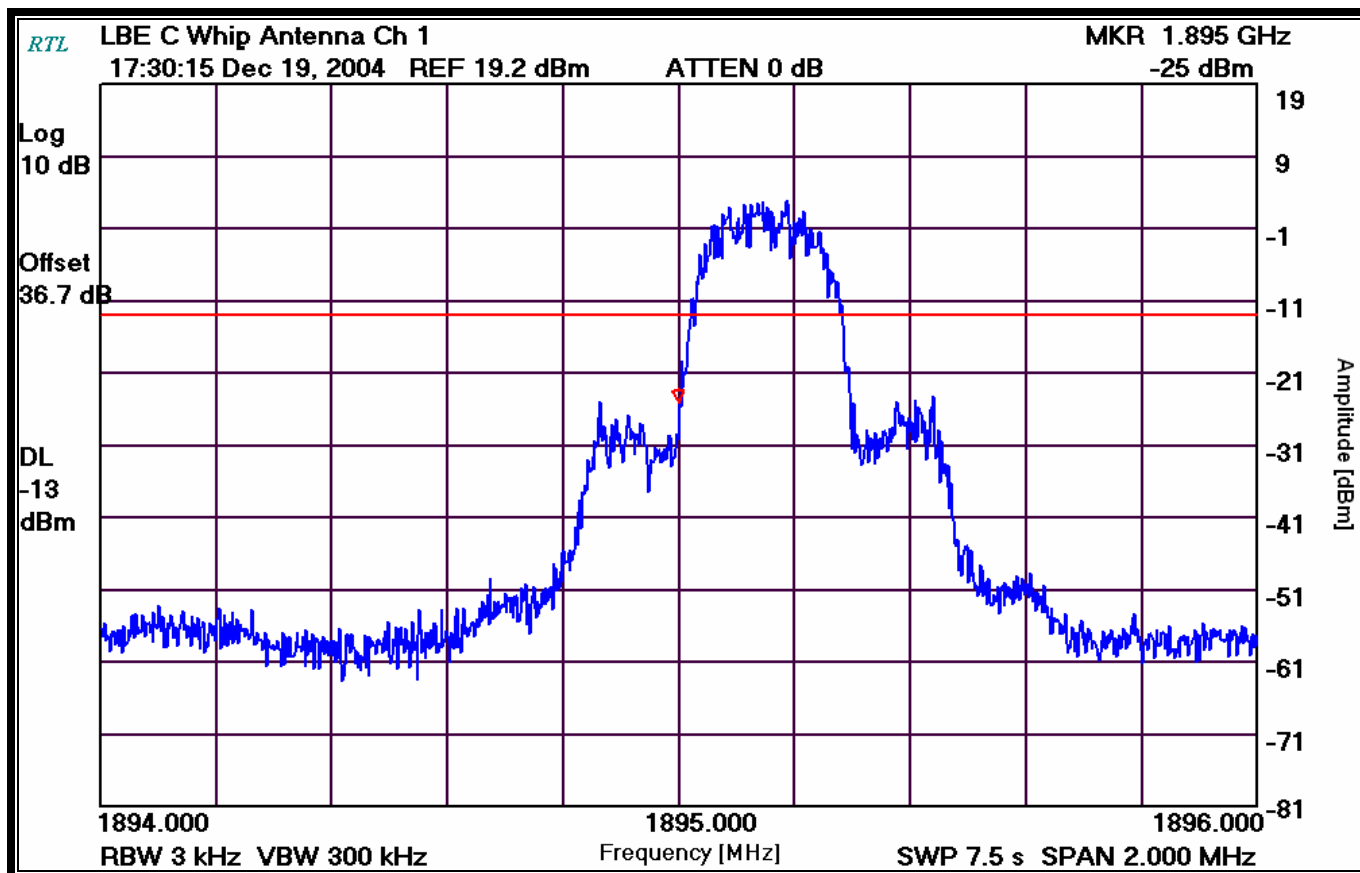


TEST PERSONNEL:

Daniel W. Baltzell
 EMC Test Engineer

Signature

December 19, 2004
 Date Of Test

PLOT 8-6: UPPER BAND EDGE BLOCK C - WHIP ANTENNA

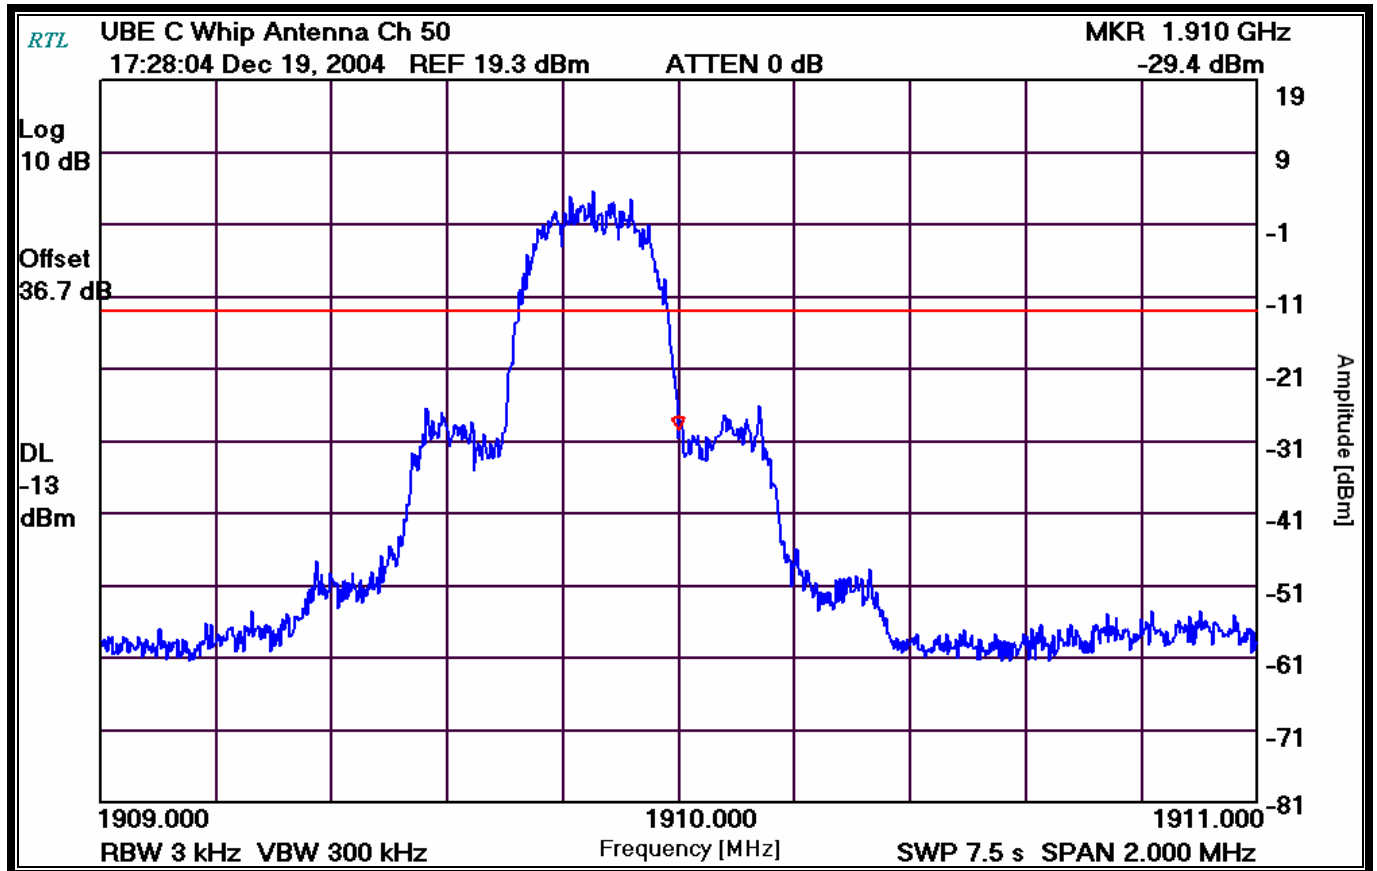


TEST PERSONNEL:

Daniel W. Baltzell
 EMC Test Engineer

Signature

December 19, 2004
 Date Of Test

PLOT 8-7: LOWER BAND EDGE BLOCK B - PATCH ANTENNA

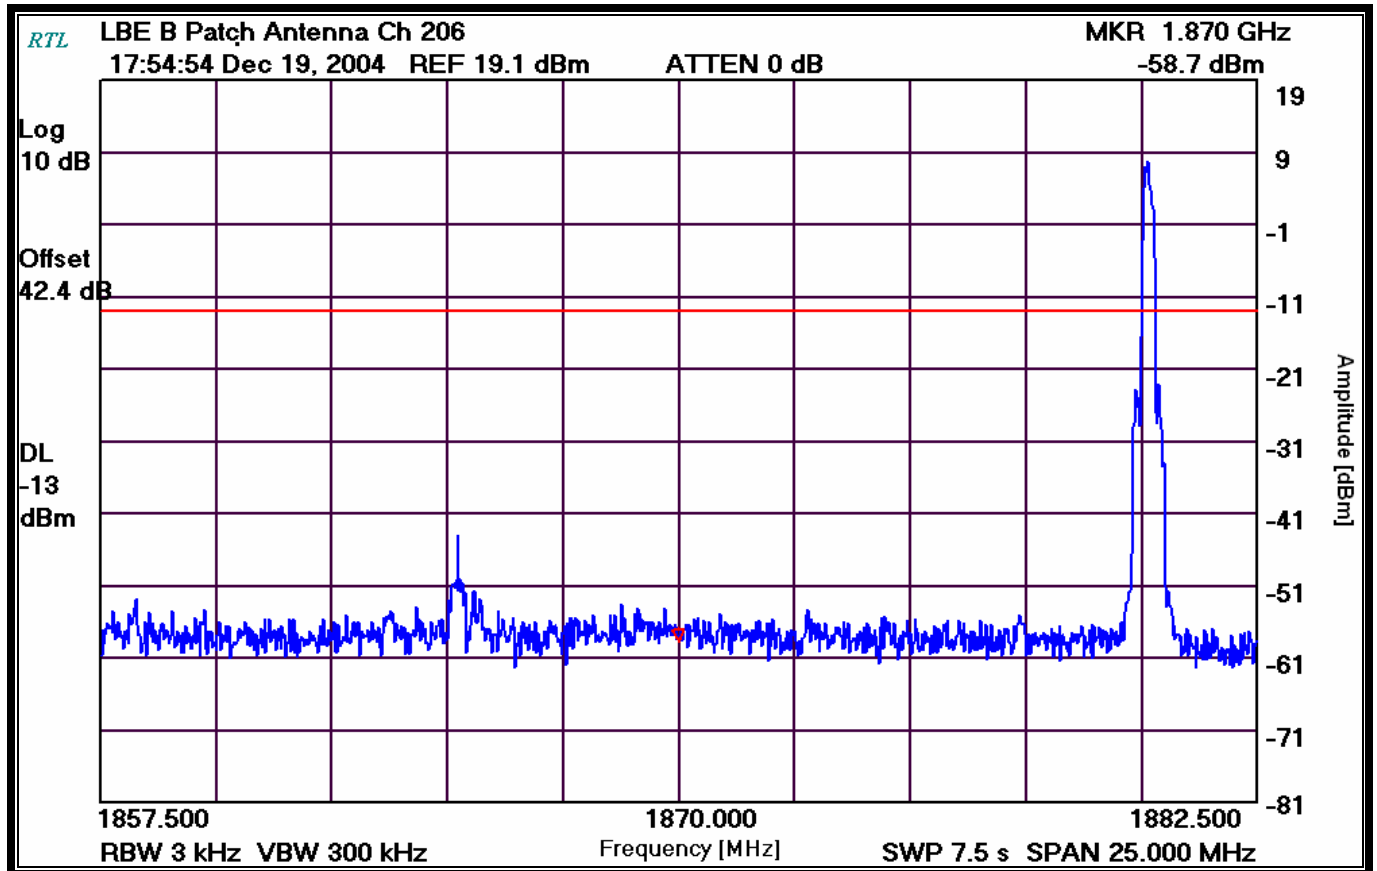


TEST PERSONNEL:

Daniel W. Baltzell
 EMC Test Engineer

Signature

December 19, 2004
 Date Of Test

PLOT 8-8: UPPER BAND EDGE BLOCK B - PATCH ANTENNA

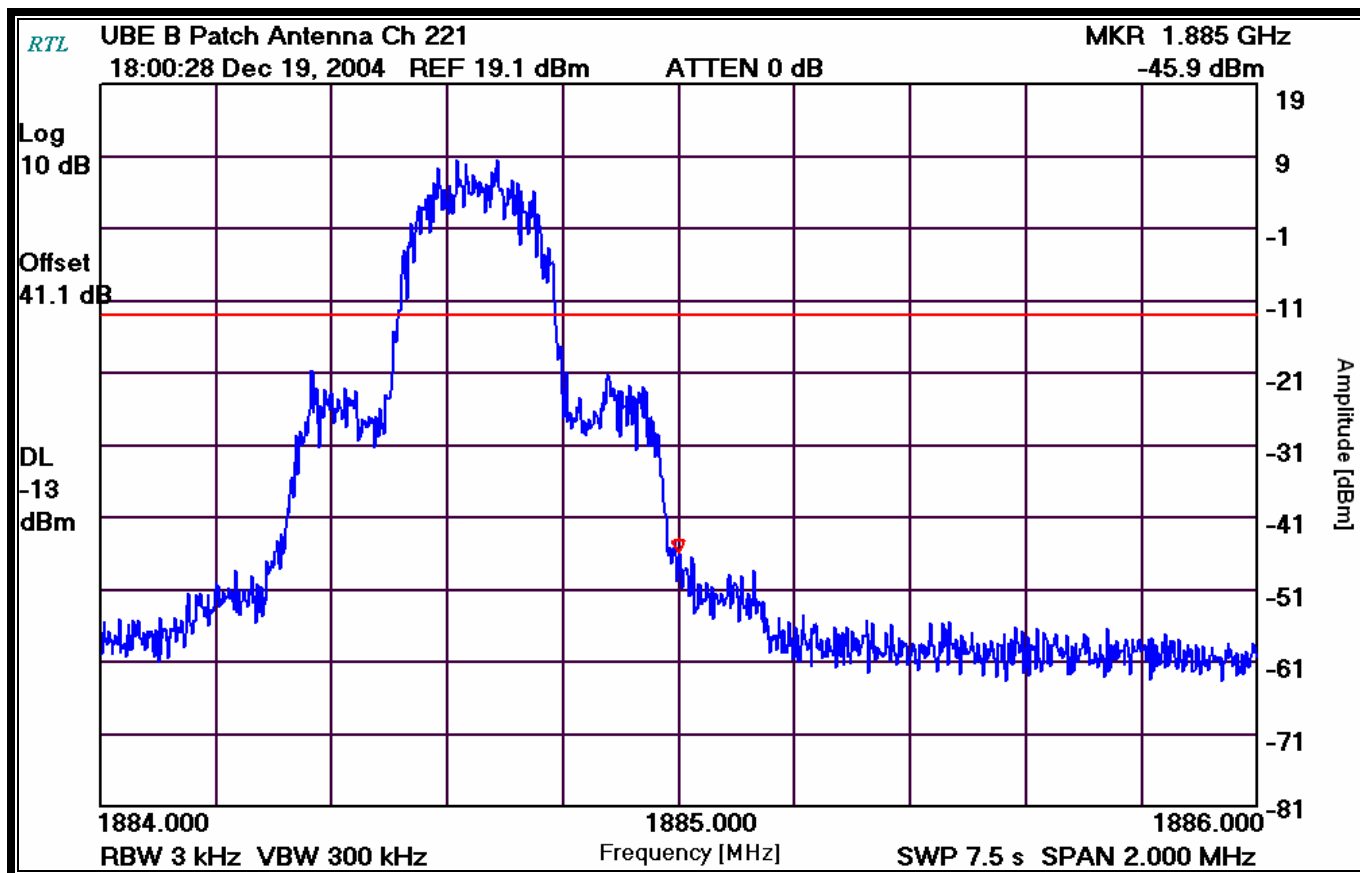


TEST PERSONNEL:

Daniel W. Baltzell
 EMC Test Engineer

Signature

December 19, 2004
 Date Of Test

PLOT 8-9: LOWER BAND EDGE BLOCK F - PATCH ANTENNA

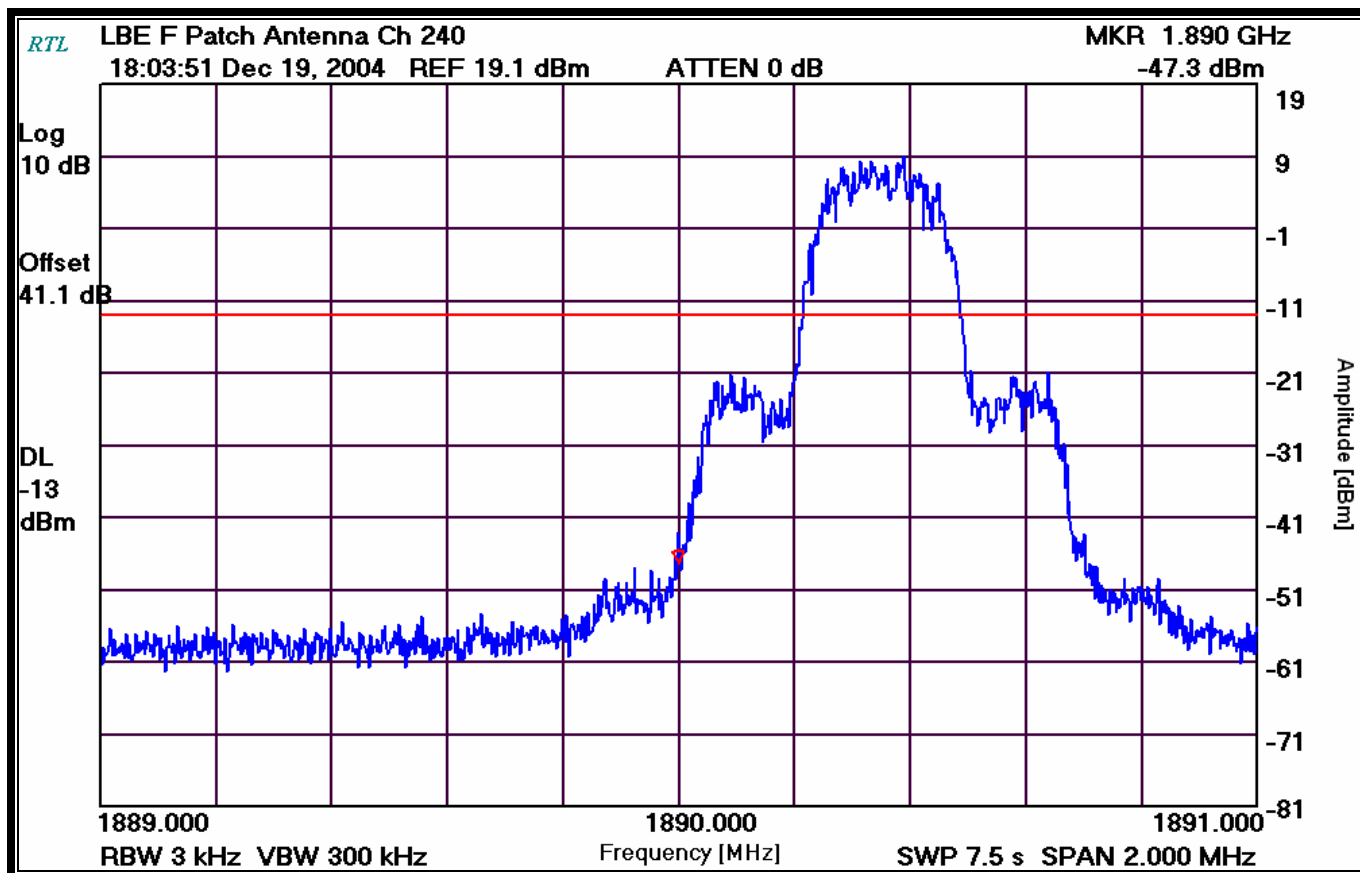


TEST PERSONNEL:

Daniel W. Baltzell
 EMC Test Engineer

Signature

December 19, 2004
 Date Of Test

PLOT 8-10: UPPER BAND EDGE BLOCK F - PATCH ANTENNA

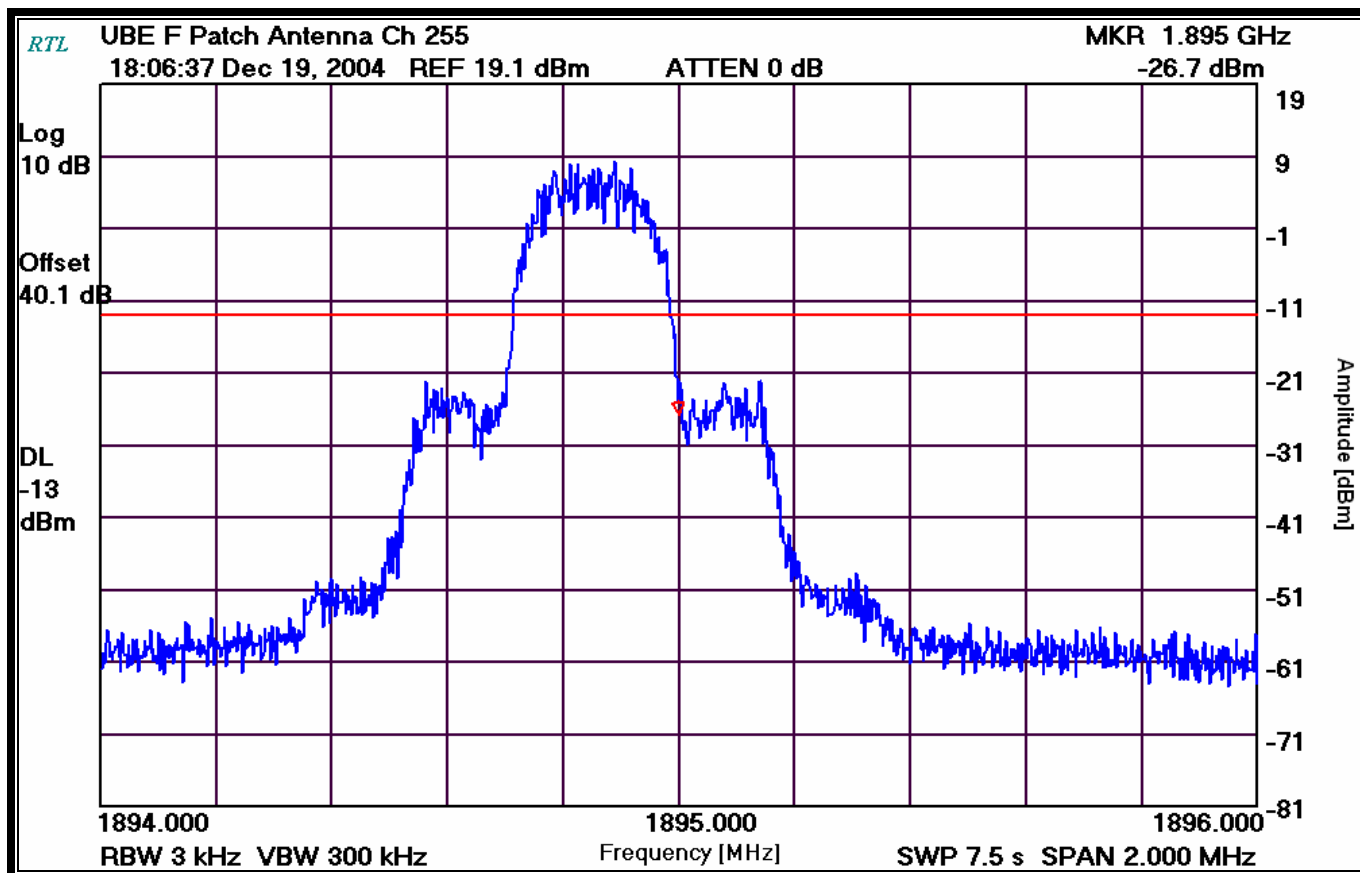


TEST PERSONNEL:

Daniel W. Baltzell
 EMC Test Engineer

Signature

December 19, 2004
 Date Of Test

PLOT 8-11: LOWER BAND EDGE BLOCK C - PATCH ANTENNA

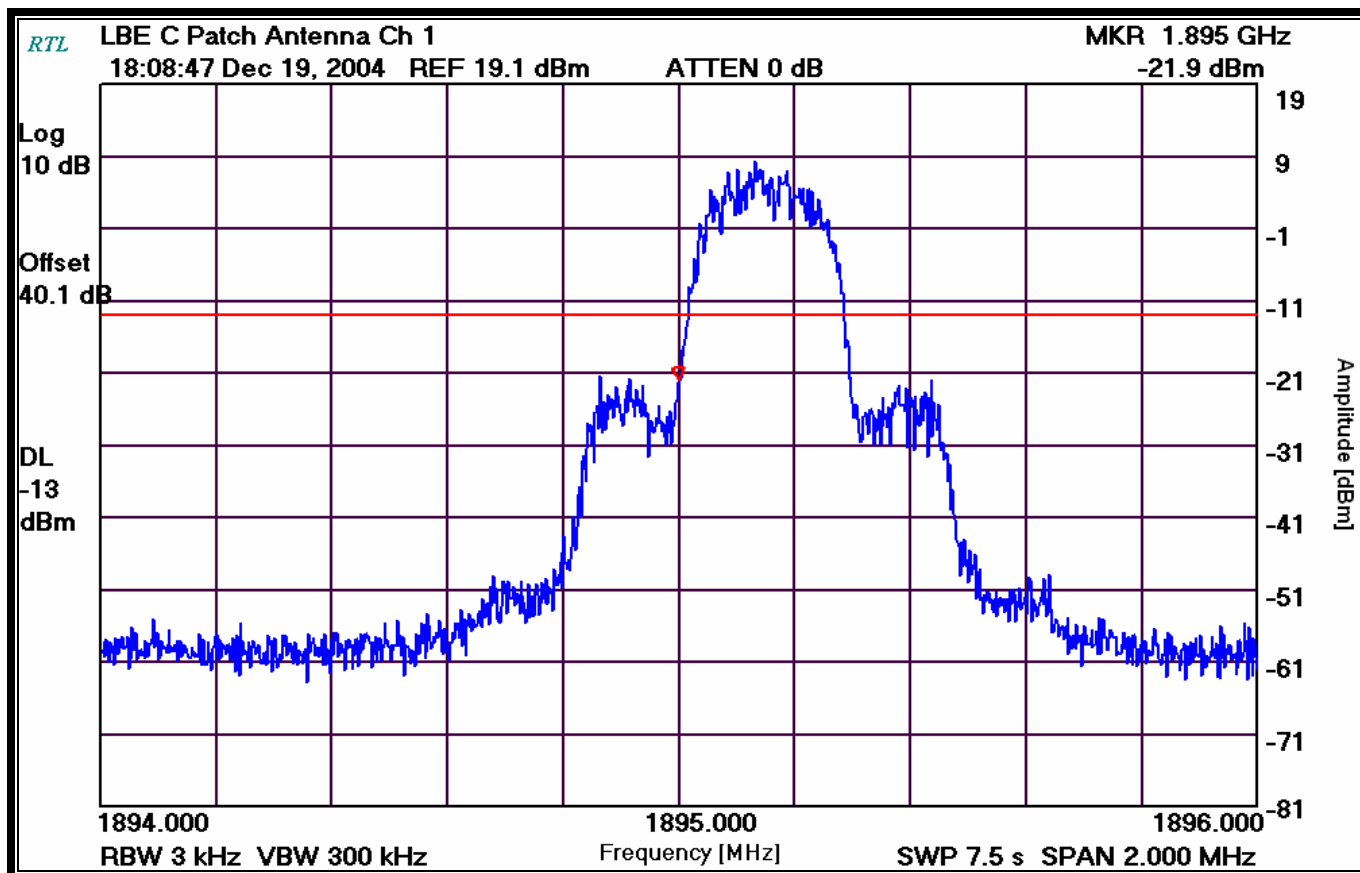


TEST PERSONNEL:

Daniel W. Baltzell
 EMC Test Engineer

Signature

December 19, 2004
 Date Of Test

PLOT 8-12: UPPER BAND EDGE BLOCK C - PATCH ANTENNA

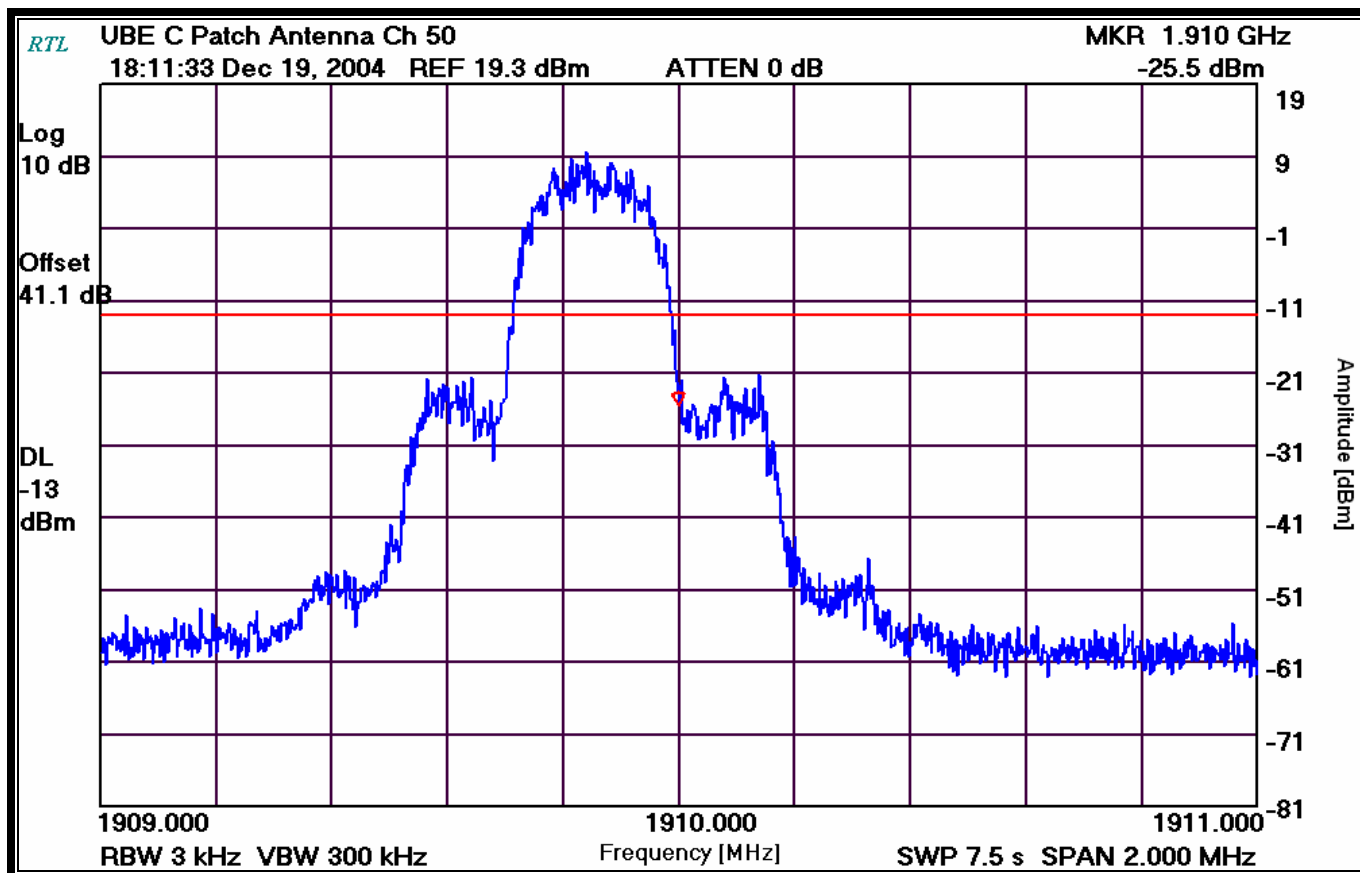

TEST PERSONNEL:


Daniel W. Baltzell
 EMC Test Engineer

Signature

December 19, 2004
 Date Of Test

PLOT 8-13: LOWER BAND EDGE BLOCK B - ROD ANTENNA

CH 206

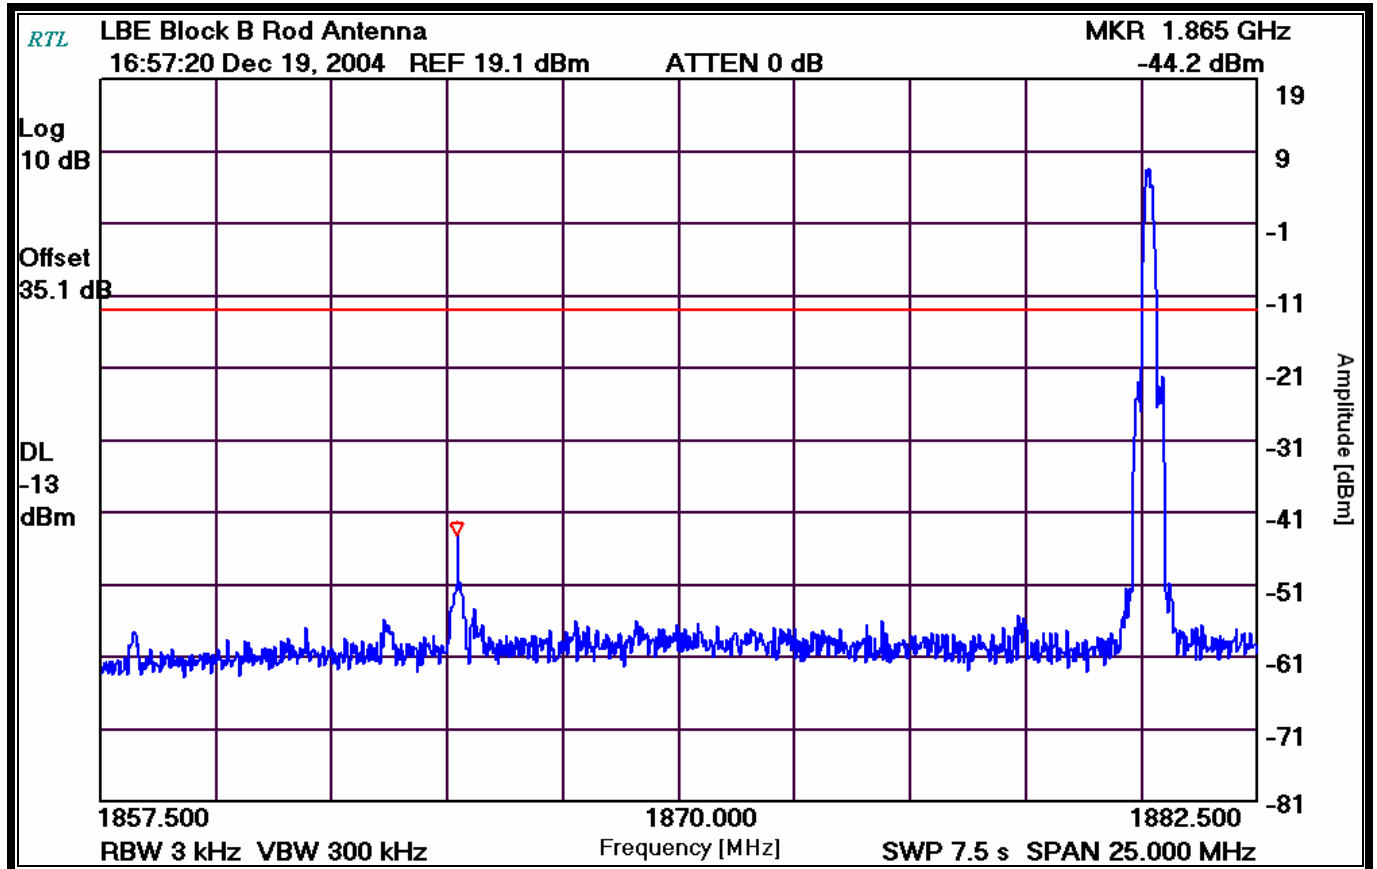

TEST PERSONNEL:


Daniel W. Baltzell
EMC Test Engineer

Signature

December 19, 2004
Date Of Test

PLOT 8-14: UPPER BAND EDGE BLOCK B - ROD ANTENNA

CH 221

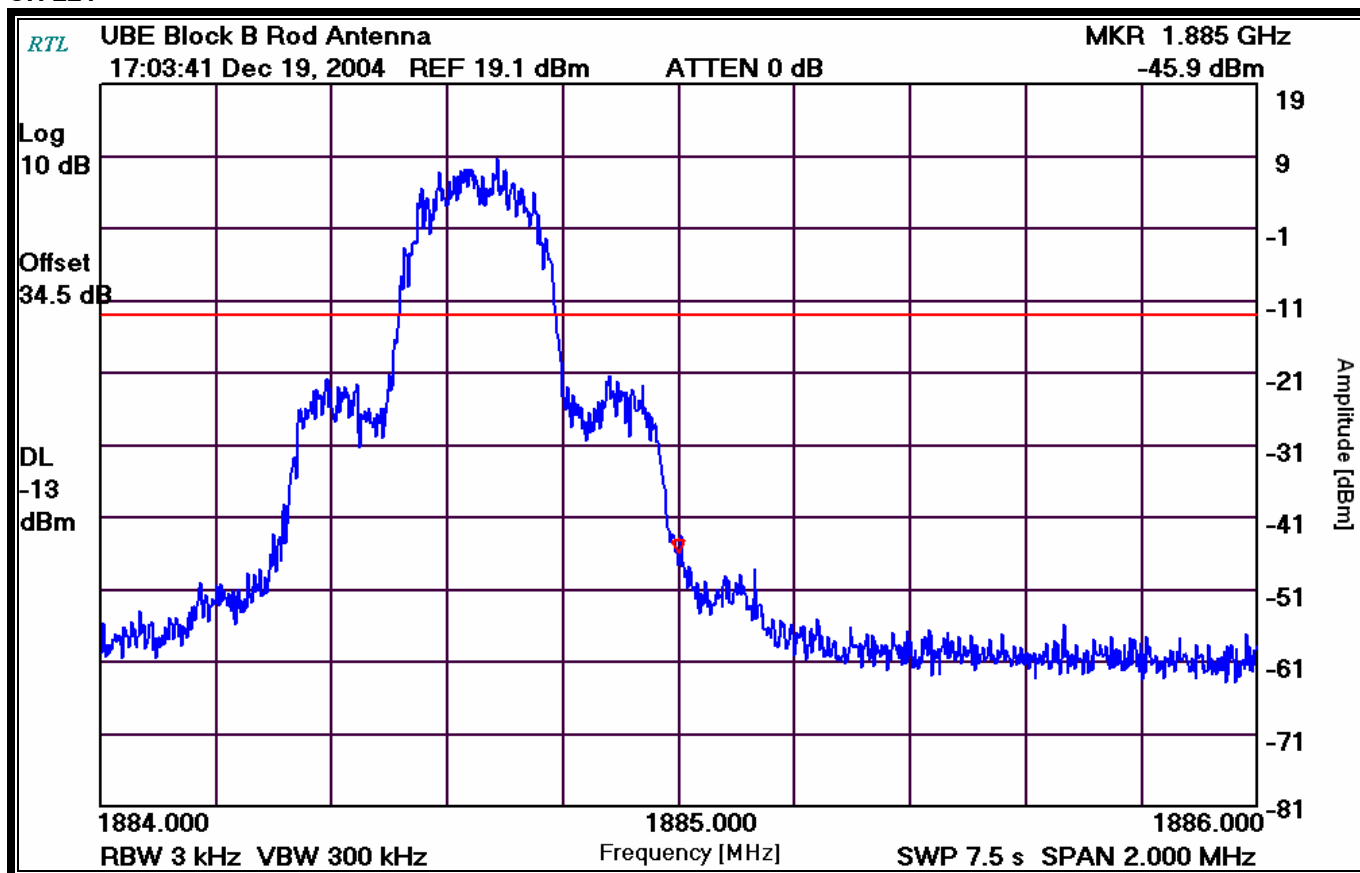

TEST PERSONNEL:


Daniel W. Baltzell
 EMC Test Engineer

Signature

December 19, 2004
 Date Of Test

PLOT 8-15: LOWER BAND EDGE BLOCK F - ROD ANTENNA

CH 240

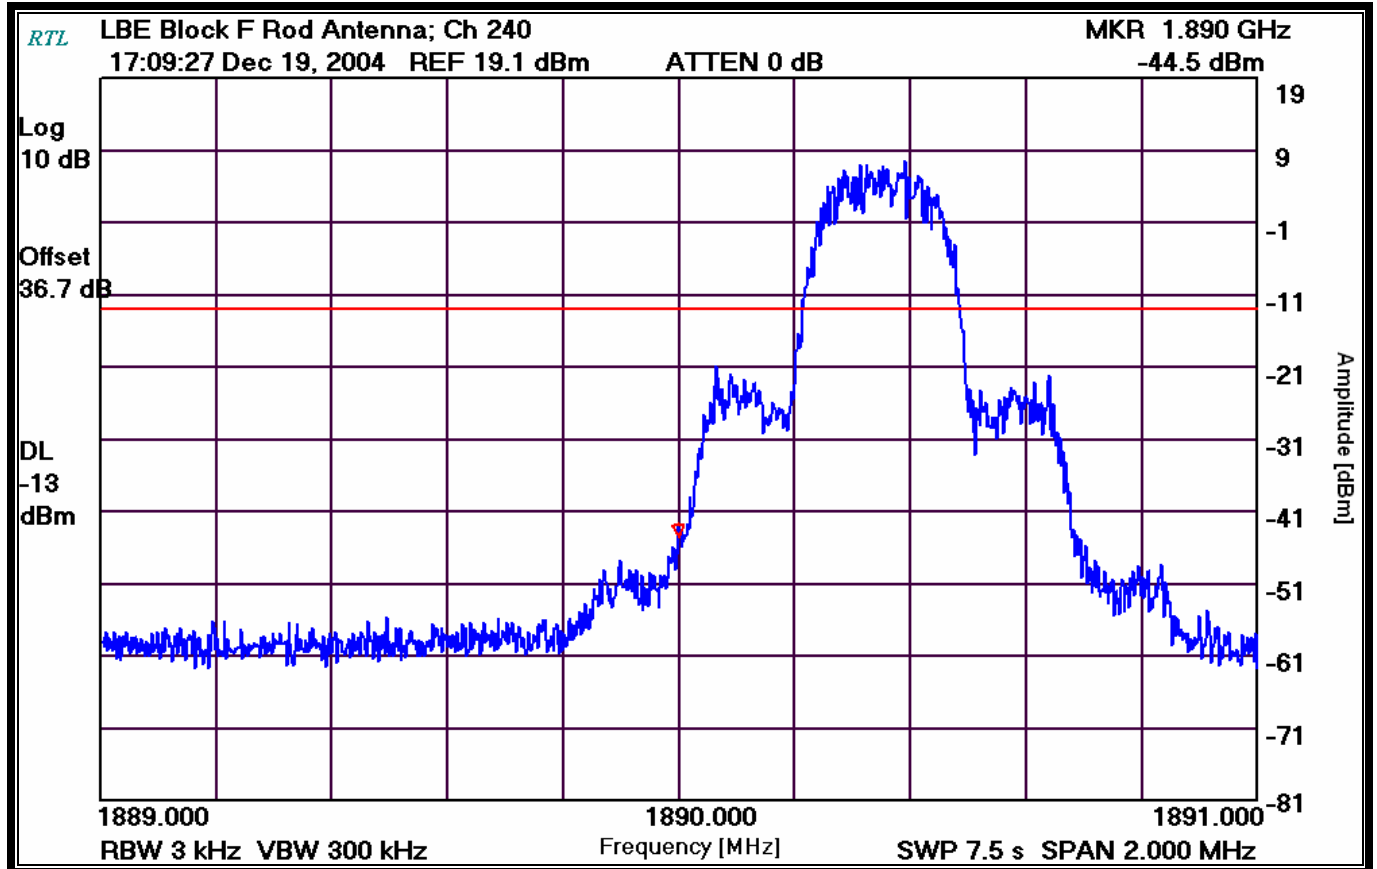

TEST PERSONNEL:


Daniel W. Baltzell
 EMC Test Engineer

Signature

December 19, 2004
 Date Of Test

PLOT 8-16: UPPER BAND EDGE BLOCK F - ROD ANTENNA

CH 255 delta 29.2

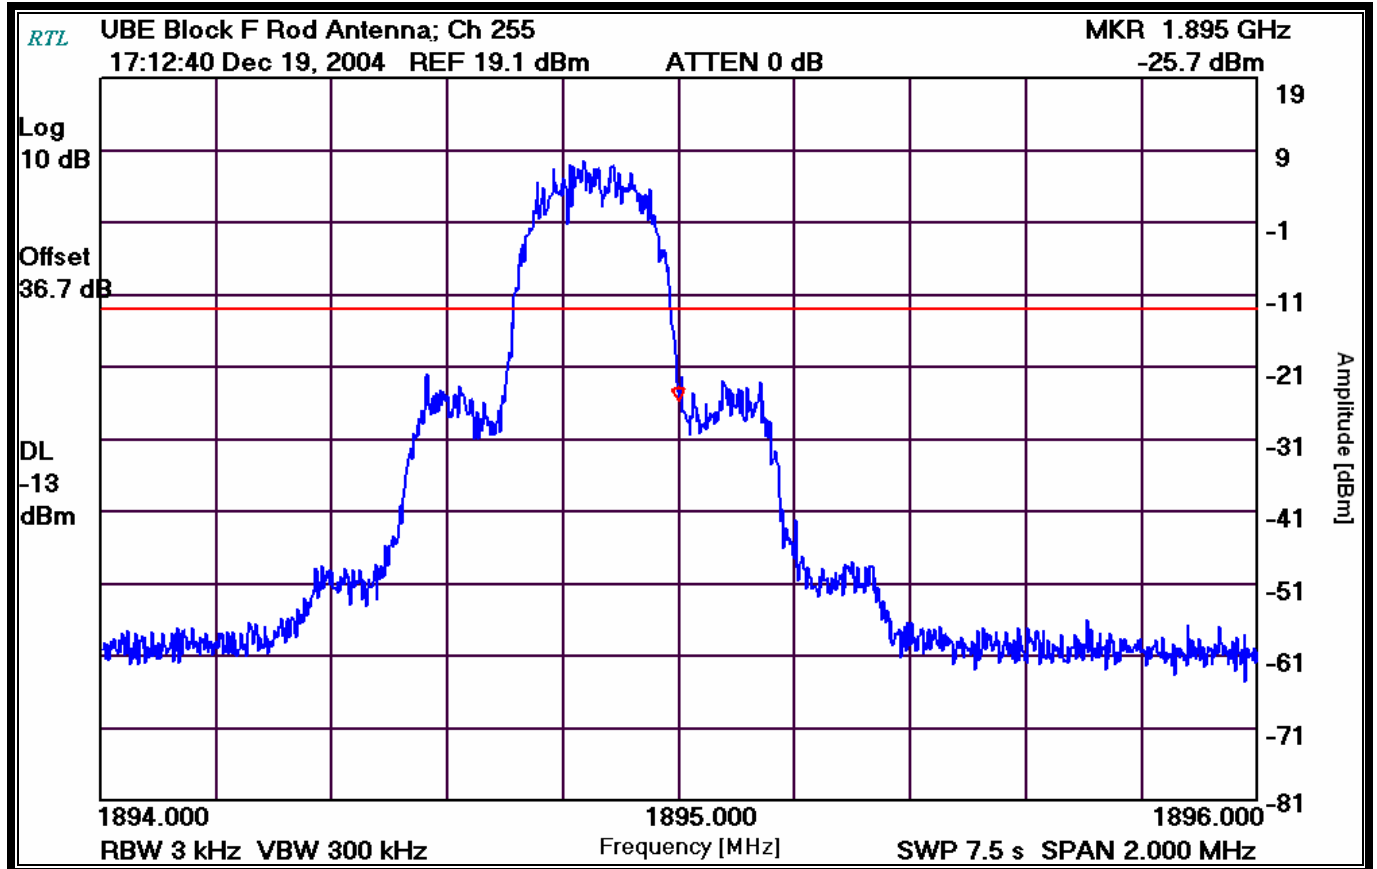


TEST PERSONNEL:

Daniel W. Baltzell
 EMC Test Engineer

Signature

December 19, 2004
 Date Of Test

PLOT 8-17: LOWER BAND EDGE BLOCK C - ROD ANTENNA

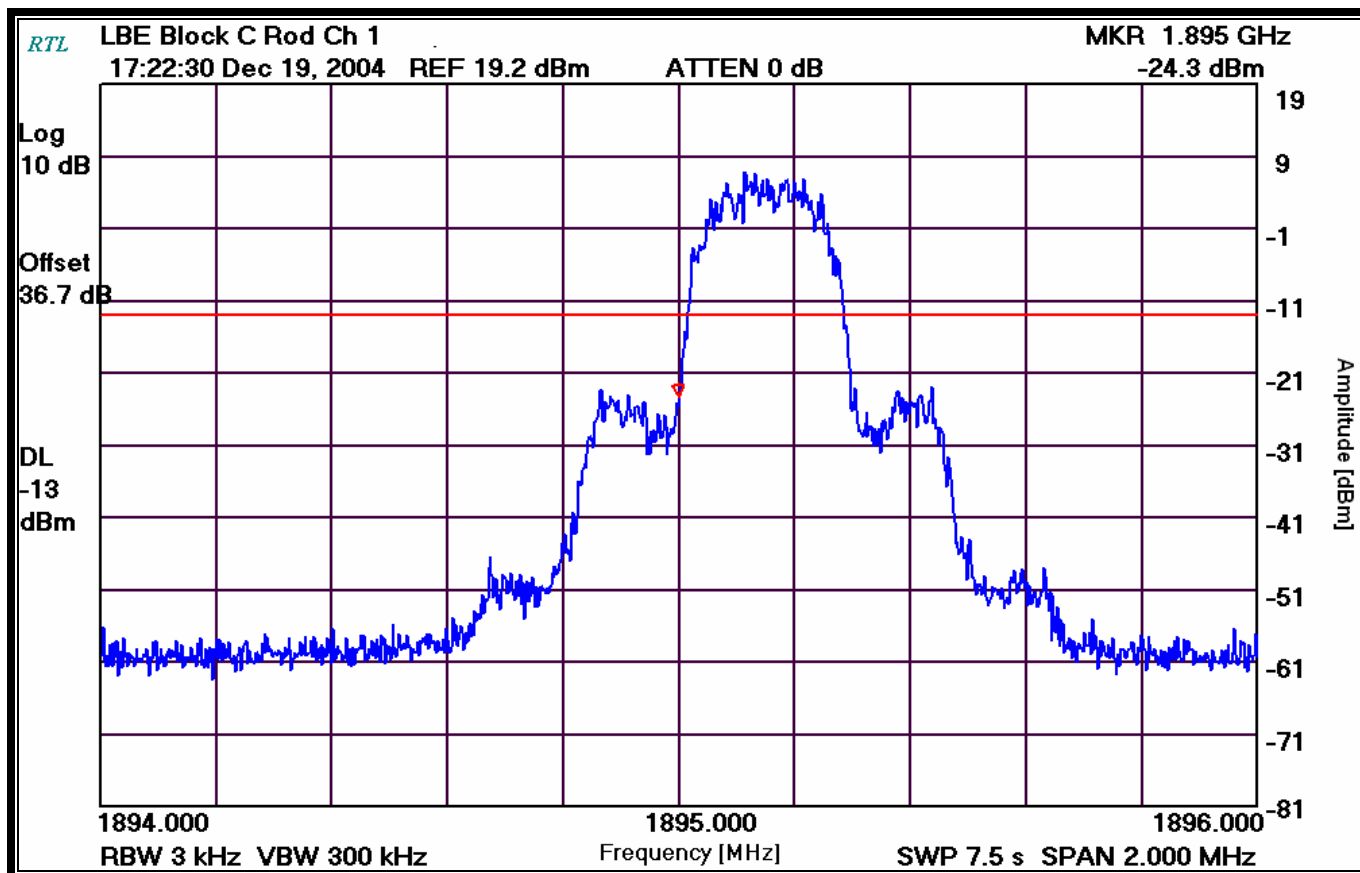


TEST PERSONNEL:

Daniel W. Baltzell
 EMC Test Engineer

Signature

December 19, 2004
 Date Of Test

PLOT 8-18: UPPER BAND EDGE BLOCK C - ROD ANTENNA

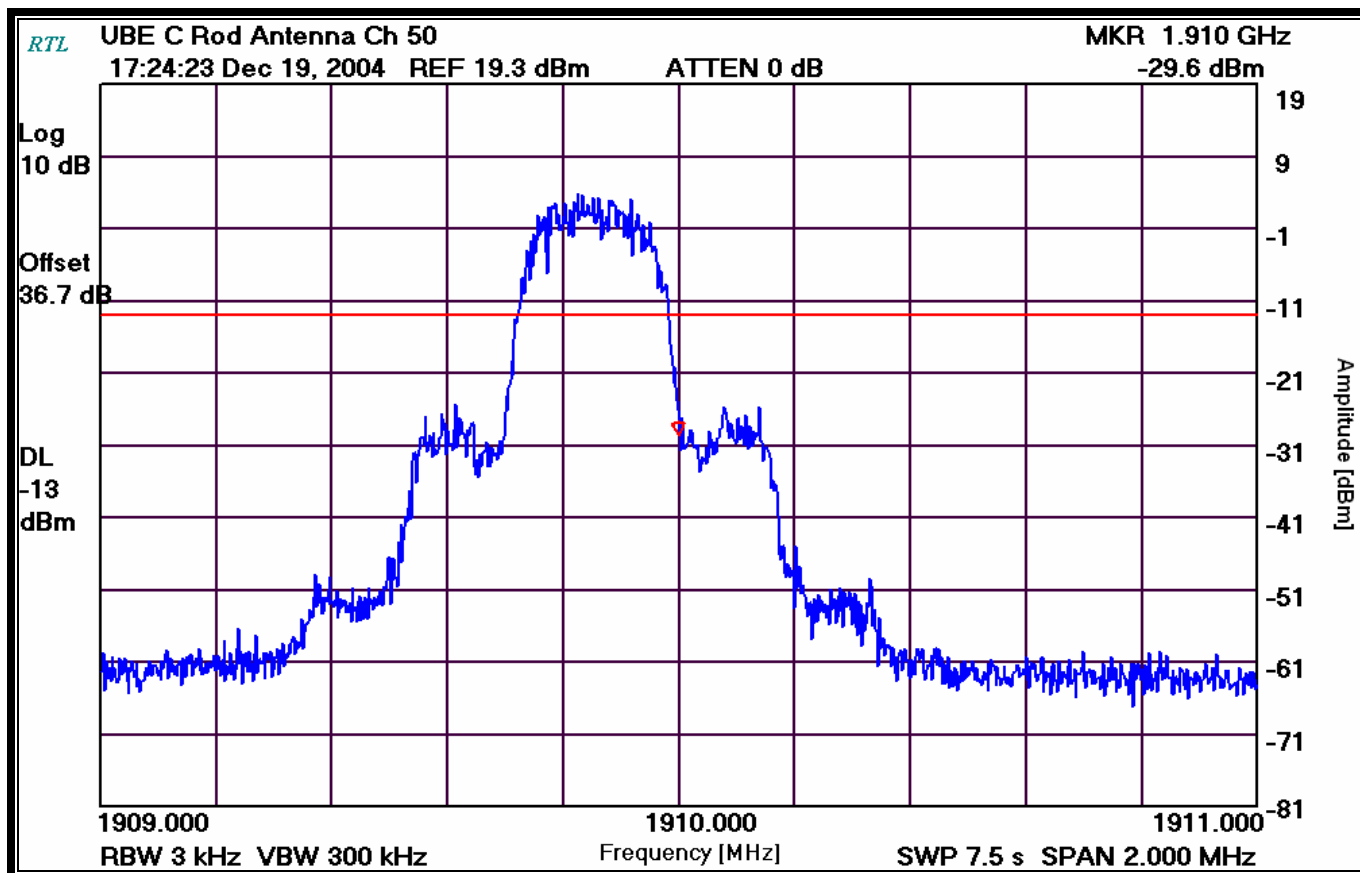

TEST PERSONNEL:

Daniel W. Baltzell
 EMC Test Engineer

Signature

December 19, 2004
 Date Of Test

9 FREQUENCY STABILITY / TEMPERATURE VARIATION - §2.1055

The frequency stability and RF power, measured at the antenna connector, are plotted against supply voltage variations and temperature variations at the highest power levels for each modulation type. All measurements are made at the center of the frequency band.

9.1 MEASUREMENT METHOD:

The frequency stability of the transmitter was measured by:

1. Temperature: The temperature was varied from -30°C to +50°C at intervals no more than 10°C throughout the temperature range using an environmental chamber. A period of time sufficient to stabilize all of the components in the equipment shall be allowed prior to each frequency measurement.
2. Primary Supply Voltage: The primary supply voltage was varied from 85% to 115% of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied. The EUT was tested down to the battery endpoint.

9.2 FREQUENCY STABILITY TEST EQUIPMENT

TABLE 9-1: FREQUENCY STABILITY TEST EQUIPMENT

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due
900946	Tenney Engineering, Inc	TH65	Temperature Chamber	11380	2/3/05
901020	Hewlett Packard	8564E	Portable Spectrum Analyzer (9 kHz - 40 GHz)	3943A01719	8/11/05
901350	Meterman	33XR	DMM	N/A	7/21/05

9.3 TIME PERIOD AND PROCEDURE:

1. The carrier frequency of the transmitter was measured at room temperature (25°C to provide a reference).
2. The equipment was subjected to a "soak" at -30°C without any power applied.
3. After the "soak" at -30°C, the measurement of the carrier frequency of the transmitter was accomplished after applying power to the transmitter.
4. Frequency measurements were made at 10°C intervals up to +50°C, then back to room temperature. A minimum period of 30 minutes was provided to allow stabilization of the equipment at each temperature level.

9.4 FREQUENCY STABILITY § 24.235

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

9.5 FREQUENCY STABILITY TEST DATA - §2.1055

Operating Frequency (MHz): 1895.15
Channel: 1
Reference Voltage (VDC): 6.8
Deviation Limit (ppm): 2.5

TABLE 9-2: TEMPERATURE FREQUENCY STABILITY DATA - §2.1055

Temperature	Frequency Measured (MHz)	Ppm
-30	1895.150000	0.00
-20	1895.150217	0.11
-10	1895.150158	0.08
0	1895.149050	-0.50
10	1895.149867	-0.07
20	1895.150000	0.00
30	1895.148842	-0.61
40	1895.150775	0.41
50	1895.150000	0.00

TEST PERSONNEL:

Daniel W. Baltzell
EMC Test Engineer



Signature

December 20, 2004
Date Of Test

PLOT 9-1: TEMPERATURE FREQUENCY STABILITY DATA - §2.1055

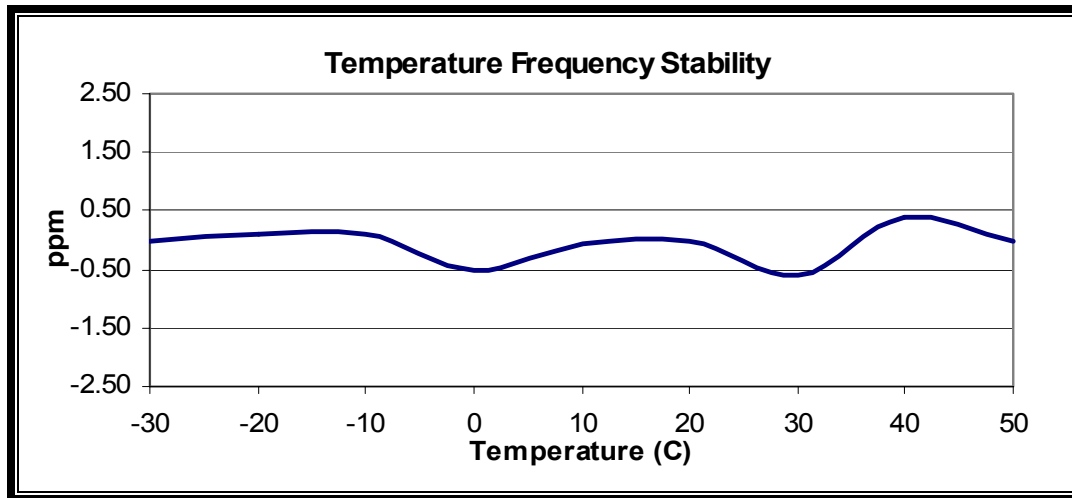


TABLE 9-3: VOLTAGE FREQUENCY STABILITY DATA - §2.1055

Battery endpoint = 4.89 VDC

Voltage	Frequency Measured (MHz)	Ppm
4.89	1895.1506080	0.32
5.11	1895.1505500	0.29
5.78	1895.1509860	0.52
6.80	1895.1502920	0.15
7.20	1895.1503830	0.20
7.82	1895.1503000	0.16


TEST PERSONNEL:

Daniel W. Baltzell
 EMC Test Engineer

Signature

December 20, 2004
 Date Of Test

PLOT 9-2: VOLTAGE FREQUENCY STABILITY

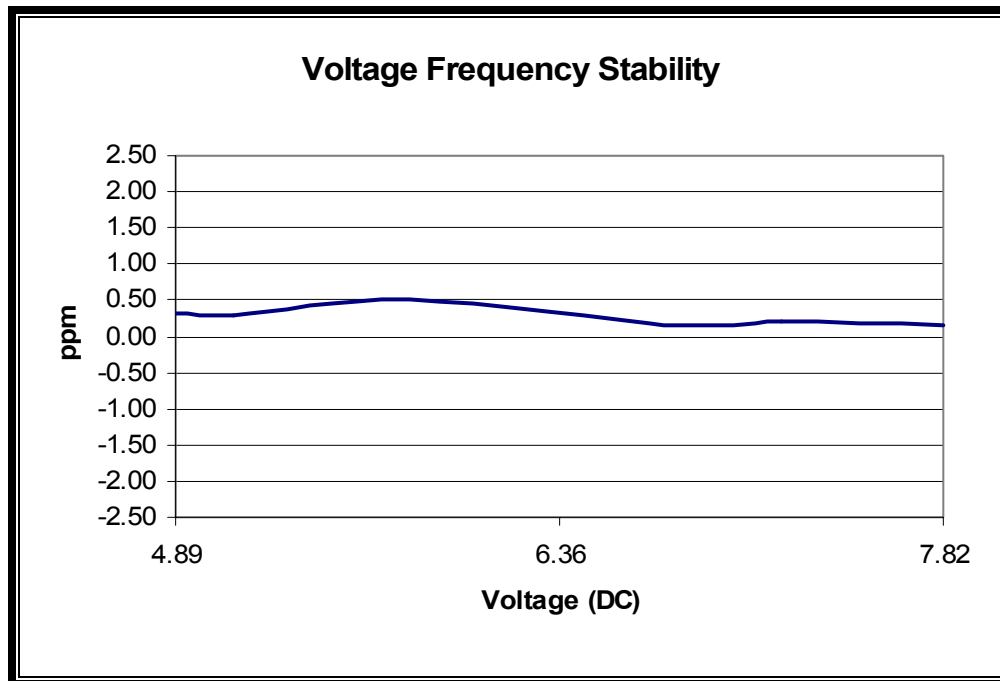

TEST PERSONNEL:

Daniel W. Baltzell
EMC Test Engineer

Signature

December 21, 2004
Date Of Test

10 CONCLUSION

The data in this measurement report shows that the UTStarcom, Inc. Model FSU810, FCC ID: O6Y-FSU810, complies with all the requirements of Parts 2 and 24 of the FCC Rules.