



Engineering and Testing for EMC and Safety Compliance

CERTIFICATION APPLICATION REPORT
FCC PART 24

Test Lab: Rhein Tech Laboratories, Inc. Phone: 703-689-0368 360 Herndon Parkway Fax: 703-689-2056 Suite 1400 Web: www.rheintech.com Herndon, VA 20170 Contact: ATCBINFO@rheintech.com		Applicant: UTStarcom, Inc. Phone: 732-516-7524 33 Wood Avenue South Fax: 732-767-5283 3 rd Floor Email: warangur@utstar.com Iselin, NJ 08830 USA Contact: Bill Aranguren	
FCC ID:	O6Y-UT106	GRANTEE FRN NUMBER:	0005823877
PLAT FORM:	Transmitter	RTL WORK ORDER NUMBER:	2004125
MODEL:	UT106	RTL QUOTE NUMBER:	QRTL04-285
DATE OF TEST REPORT:	November 18, 2004		
American National Standard Institute:	ANSI/TIA-603-B-2002		
FCC Classification:	PCE – Licensed Portable Transmitter Held to Ear		
FCC Rule Part(s):	Part 24: Personal Communications Services Subpart E – Broadband PCS		
Digital Interface Information	Digital Interface was found to be compliant		
Frequency Range (MHz)	Power (W)	Frequency Tolerance	Emission Designator
1880.15-1909.85	0.170	1.2 ppm	288KDXW

I, the undersigned, hereby declare that the equipment tested and referenced in this report conforms to the identified standard(s) as described in this test report. Modifications were made to the equipment during testing in order to achieve compliance with these standards; please see section 2.3 for details.

Furthermore, there was no deviation from, additions to, or exclusions from, the FCC Part 2, FCC Part 15, FCC Part 24, ANSI C63.4 and ANSI/TIA-603-B-2002.

Signature: 

Date: November 18, 2004

Typed/Printed Name: Desmond Fraser

Position: President

This report may not be reproduced, except in full, without the written approval of Rhein Tech Laboratories, Inc.
The test results relate only to the item that was tested.

Note: This report may not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

TABLE OF CONTENTS

1	GENERAL INFORMATION	5
1.1	SCOPE	5
1.2	TEST FACILITY	5
1.3	RELATED SUBMITTAL(S)/GRANT(S)	5
2	EQUIPMENT INFORMATION	6
2.1	JUSTIFICATION	6
2.2	EXERCISING THE EUT	6
2.3	MODIFICATIONS	6
2.4	TEST SYSTEM DETAILS	7
2.5	CONFIGURATION OF TESTED SYSTEM	7
3	DC VOLTAGES AND CURRENTS - PART §2.1033(C)(8)	8
3.1	DC VOLTAGES AND CURRENTS TEST EQUIPMENT	8
4	RF POWER OUTPUT - §2.1046	9
4.1	ANSI/TIA-603-B-2002, SECTION 2.2.17 TEST PROCEDURE	9
4.2	EFFECTIVE ISOTROPIC RADIATED POWER LIMITS - §24.232 (B)TEST PROCEDURE	9
4.3	RF POWER TEST EQUIPMENT	9
4.4	EFFECTIVE ISOTROPIC RADIATED POWER TEST DATA- §2.1046	10
5	OCCUPIED BANDWIDTH - §2.1049; NECESSARY BANDWIDTH §2.202 (OCCUPIED BANDWIDTH) – PART 24.238 (B) (EMISSION BANDWIDTH)	11
5.1	TEST PROCEDURE	11
5.2	OCCUPIED BANDWIDTH TEST EQUIPMENT	11
5.3	TEST DATA (CHANNEL 50: OCCUPIED BANDWIDTH = 288 KHZ)	12
6	RADIATED SPURIOUS AND HARMONIC EMISSIONS - §2.1053	13
6.1	RADIATED SPURIOUS AND HARMONIC EMISSIONS - §2.1053	13
6.2	RADIATED SPURIOUS TEST EQUIPMENT	13
6.3	FIELD STRENGTH OF SPURIOUS RADIATION TEST DATA - §2.1053	14
7	BAND-EDGE COMPLIANCE - PART 24.238	17
7.1	TEST PROCEDURE	17
7.2	TEST DATA	17
8	FREQUENCY STABILITY / TEMPERATURE VARIATION - §2.1055	24
8.1	MEASUREMENT METHOD	24
8.2	FREQUENCY STABILITY TEST EQUIPMENT	24
8.3	TIME PERIOD AND PROCEDURE	24
8.4	FREQUENCY STABILITY § 24.235	25
8.5	FREQUENCY STABILITY TEST DATA - §2.1055	25
9	CONCLUSION	28

TABLE INDEX

TABLE 2-1:	EQUIPMENT UNDER TEST (EUT)	7
TABLE 3-1:	DC VOLTAGES AND CURRENTS TEST EQUIPMENT	8
TABLE 3-2:	DC VOLTAGES AND CURRENTS DATA	8
TABLE 4-1:	POWER OUTPUT AT THE ANTENNA PORT DATA - §2.1046	9
TABLE 4-2:	RF POWER TEST EQUIPMENT	9
TABLE 4-3:	RADIATED POWER DATA - §2.1046 – WHIP ANTENNA	10
TABLE 5-1:	OCCUPIED BANDWIDTH TEST EQUIPMENT	11
TABLE 6-1:	RADIATED SPURIOUS TEST EQUIPMENT	13
TABLE 6-2:	FIELD STRENGTH OF SPURIOUS RADIATION TEST DATA §2.1053; 1880.15 MHZ	14
TABLE 6-3:	FIELD STRENGTH OF SPURIOUS RADIATION TEST DATA §2.1053; 1895.15 MHZ	15
TABLE 6-4:	FIELD STRENGTH OF SPURIOUS RADIATION TEST DATA §2.1053; 1909.85 MHZ	16
TABLE 7-1:	BAND-EDGE TEST EQUIPMENT	17
TABLE 7-2:	BAND EDGE COMPLIANCE	17
TABLE 8-1:	FREQUENCY STABILITY TEST EQUIPMENT	24
TABLE 8-2:	TEMPERATURE FREQUENCY STABILITY DATA - §2.1055	25
TABLE 8-3:	VOLTAGE FREQUENCY STABILITY DATA - §2.1055	26

PLOT INDEX

PLOT 5-1:	OCCUPIED BANDWIDTH (-26 DB)	12
PLOT 7-1:	LOWER BAND EDGE BLOCK B	18
PLOT 7-2:	UPPER BAND EDGE BLOCK B	19
PLOT 7-3:	LOWER BAND EDGE BLOCK F	20
PLOT 7-4:	UPPER BAND EDGE BLOCK F	21
PLOT 7-5:	LOWER BAND EDGE BLOCK C	22
PLOT 7-6:	UPPER BAND EDGE BLOCK C	23
PLOT 8-1:	TEMPERATURE FREQUENCY STABILITY DATA - §2.1055	26
PLOT 8-2:	VOLTAGE FREQUENCY STABILITY	27

APPENDIX INDEX

APPENDIX A:	RF EXPOSURE COMPLIANCE FCC RULES AND REGULATIONS PART 1.1307, 1.1310, 2.1091, 2.1093:	29
APPENDIX B:	AGENCY AUTHORIZATION LETTER	30
APPENDIX C:	CONFIDENTIALITY REQUEST LETTER.....	31
APPENDIX D:	PRODUCT DESCRIPTION	32
APPENDIX E:	TEST / TUNE PROCEDURE	33
APPENDIX F:	BILL OF MATERIAL	34
APPENDIX G:	SCHEMATICS	35
APPENDIX H:	LABEL AND LABEL LOCATION	36
APPENDIX I:	MANUAL	37
APPENDIX J:	TEST PHOTOGRAPHS	38
APPENDIX K:	EXTERNAL PHOTOGRAPHS	42
APPENDIX L:	INTERNAL PHOTOGRAPHS	47

PHOTOGRAPH INDEX

PHOTOGRAPH 1:	FCC ID LABEL SAMPLE AND LOCATION	36
PHOTOGRAPH 2:	RADIATED FRONT VIEW	38
PHOTOGRAPH 3:	RADIATED BACK VIEW	39
PHOTOGRAPH 4:	CONDUCTED FRONT VIEW	40
PHOTOGRAPH 5:	CONDUCTED BACK VIEW	41
PHOTOGRAPH 6:	FRONT VIEW	42
PHOTOGRAPH 7:	BOTTOM VIEW SHOWING RECHARGE CONNECTOR	43
PHOTOGRAPH 8:	REAR VIEW	44
PHOTOGRAPH 9:	TOP OF CHARGER	45
PHOTOGRAPH 10:	BOTTOM OF CHARGER	46
PHOTOGRAPH 11:	INSIDE BACK COVER	47
PHOTOGRAPH 12:	INSIDE FRONT COVER	48
PHOTOGRAPH 13:	PCB IN BACK COVER	49
PHOTOGRAPH 14:	BACK OF PCB WITH SPEAKER	50
PHOTOGRAPH 15:	FRONT OF KEYPAD	51
PHOTOGRAPH 16:	BACK OF KEYPAD	52
PHOTOGRAPH 17:	FRONT OF PCB WITH LCD	53
PHOTOGRAPH 18:	BACK OF PCB	54
PHOTOGRAPH 19:	FRONT OF PCB	55

1 GENERAL INFORMATION

1.1 SCOPE

FCC Rules Part 24 (E) Personal Communications Services – Broadband PCS

All measurements contained in this application were conducted in accordance with the FCC Rules and Regulations CFR47 and ANSI/TIA-603-B-2002 Land Mobile FM or PM Communications Equipment Measurement and Performance Standards. The instrumentation utilized for the measurements conforms to the ANSI C63.4 standard for EMI and Field Strength Instrumentation. Calibration checks are performed regularly on the instruments, and all accessories including high pass filter, coaxial attenuator, preamplifier and cables.

1.2 TEST FACILITY

The open area test site and conducted measurement facility used to collect the radiated data is located at 360 Herndon Parkway, Suite 1400, Herndon, Virginia 20170. This site has been fully described in a report and approved by the Federal Communications Commission to perform AC line conducted and radiated emissions testing (ANSI C63.4 1992).

1.3 RELATED SUBMITTAL(S)/GRANT(S)

This is a new application submittal. The digital interface and receiver were investigated and found compliant. A DoC report can be provided upon request. The IF, LO and up to the 2nd LO were investigated.

2 EQUIPMENT INFORMATION

2.1 JUSTIFICATION

To complete the test configuration required by the FCC, the transmitter was software-controlled by the manufacturer to operate in a continuous mode. The final data was taken as a substitution measurement. The device is provided with an external antenna connector. EIRP measurement is provided to support the RF exposure requirements for the antennas listed in this application filing.

2.2 EXERCISING THE EUT

The UT106 is a desk phone transmitter designed to link to a PHS phone network which transmits at a frequency within the range 1880.15 MHz – 1909.85 MHz. Four channels were investigated: 1880.15 MHz, 1893.65 MHz, 1902.35 MHz, and 1909.85 MHz, in three orthogonal planes, with the receiving antenna in both horizontal and vertical polarities, from 1 meter to 4 meters in height. There were no deviations from the test standard(s) and/or methods.

2.3 MODIFICATIONS

No modifications were made to the unit under test to achieve compliance with standards.

2.4 TEST SYSTEM DETAILS

The test sample was received on August 12, 2004. The FCC Identifiers for all equipment, plus descriptions of all cables used in the tested system, are:

TABLE 2-1: EQUIPMENT UNDER TEST (EUT)

PART	MANUFACTURER	MODEL	SERIAL NUMBER	FCC ID	CABLE DESCRIPTION	RTL BAR CODE
Phone	UTStarcom	UT106	PSID:130801284	06Y-UT106	NA	16125
Phone	UTStarcom	UT106	PSID:130801237	06Y-UT106	NA	16124
2VDC/210mA AC Adapter	UTStarcom	UT108	CB200309	N/A	1.75m unshielded power	016127
Battery	UTStarcom	HZSL053040B	20040620	N/A	2.5 cm unshielded	N/A

2.5 CONFIGURATION OF TESTED SYSTEM

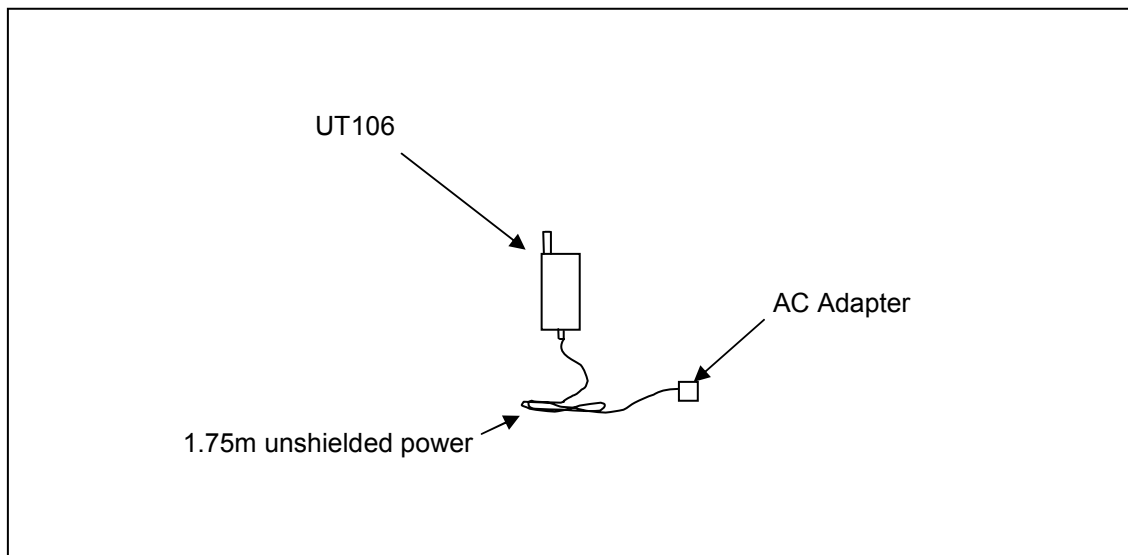


FIGURE 1: CONFIGURATION OF TESTED SYSTEM

3 DC VOLTAGES AND CURRENTS - PART §2.1033(C)(8)

The DC voltages applied to, and DC currents into, the several elements of the final radio frequency amplifying device for normal operation over the power range.

3.1 DC VOLTAGES AND CURRENTS TEST EQUIPMENT

TABLE 3-1: DC VOLTAGES AND CURRENTS TEST EQUIPMENT


RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due
901247	Wavetek	DM25XT	Multimeter	40804098	2/14/05

TABLE 3-2: DC VOLTAGES AND CURRENTS DATA

	Typical
Voltage (DC)	3.6
Current (mA)	29.5

TEST PERSONNEL:

Daniel W. Baltzell
EMC Test Engineer



Signature

August 26, 2004
Date Of Test

4 RF POWER OUTPUT - §2.1046

TABLE 4-1: POWER OUTPUT AT THE ANTENNA PORT DATA - §2.1046

4.1 ANSI/TIA-603-B-2002, SECTION 2.2.17 TEST PROCEDURE

Substitution method.

4.2 EFFECTIVE ISOTROPIC RADIATED POWER LIMITS - §24.232 (B)TEST PROCEDURE

Mobile/portable stations are limited to 2 watts EIRP peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

4.3 RF POWER TEST EQUIPMENT

TABLE 4-2: RF POWER TEST EQUIPMENT

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due
901053	Schaffner Chase	CBL6112B	Bi-Log Antenna (20 MHz - 2 GHz)	2648	9/20/05
901020	Hewlett Packard	8564E	Portable Spectrum Analyzer (9 kHz - 40 GHz)	3943A01719	8/11/05
900928	Hewlett Packard	83752A	Synthesized Sweeper (0.01 - 20 GHz)	3610A00866	9/5/05
900814	Electro-Metrics	EM-6961 (RGA-60)	Double Ridged Guide Antenna (1 - 18 GHz)	2310	2/17/06
901184	Agilent Technologies	E4416A	EPM-P Power Meter, single channel	GB41050573	8/2/05
901186	Agilent Technologies	E9323A (50MHz-6GHz)	Peak & Average Power Sensor	US40410380	8/2/05

4.4 EFFECTIVE ISOTROPIC RADIATED POWER TEST DATA- §2.1046

TABLE 4-3: RADIATED POWER DATA - §2.1046 – WHIP ANTENNA

Channel	Test Detector	Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)
206	Pk	1880.15	68.0	15.9	1.1	7.2	22.0	0.158
1	Pk	1895.15	68.3	16.0	1.3	7.2	21.9	0.155
50	Pk	1909.85	67.7	16.2	1.1	7.2	22.3	0.170

Notes: Pk = Peak Detector

EIRP Measurements by Substitution Method.

The EUT was placed on a turntable 3 meters from the receive antenna. The field of maximum intensity was found by rotating the EUT approximately 360 degrees and changing the height of the receive antenna from 1 to 4 meters. The field strength was maximized using a calibrated spectrum analyzer using a 1 MHz resolution bandwidth for each channel being tested, and adjusted to an peak and average level using a power meter attached at the end of the receive antenna. A double ridge horn antenna was substituted in place of the EUT. The horn antenna was fed by a signal generator and adjusted until the previous level was attained. This level was recorded and was further corrected by subtracting the cable loss from the signal generator to the transmit antenna and adding the horn gain.

i.e., $S_g - CL + G_n = EIRP \text{ (dBm)}$

S_g = Signal Generator Level (dBm)

CL = Cable Loss (dB)

G_n = Transmitting horn antenna gain (dBi)

TEST PERSONNEL:

Daniel W. Baltzell
 EMC Test Engineer



Signature

August 25, 2004
 Date Of Test

5 OCCUPIED BANDWIDTH - §2.1049; NECESSARY BANDWIDTH §2.202 (OCCUPIED BANDWIDTH) – PART 24.238 (B) (EMISSION BANDWIDTH)

Channel 50 was found to be the worst case and is shown below.

Type of Emission: DXW

Necessary bandwidth designator derived from measurement of emission bandwidth (-26 dB) (263 kHz):
263KDXW

OCCUPIED BANDWIDTH (99% POWER BANDWIDTH) - COMPLIANCE WITH THE EMISSION MASKS

5.1 TEST PROCEDURE

ANSI/TIA-603-B-2002, section 2.2.11

Device with digital modulation: operation to its maximum extent

Note: Reference level is average conducted power measurement.


5.2 OCCUPIED BANDWIDTH TEST EQUIPMENT

TABLE 5-1: OCCUPIED BANDWIDTH TEST EQUIPMENT

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due
901020	Hewlett Packard	8564E	Portable Spectrum Analyzer (9 kHz - 40 GHz)	3943A01719	8/11/05

5.3 TEST DATA (CHANNEL 50: OCCUPIED BANDWIDTH = 288 KHZ)

PLOT 5-1: OCCUPIED BANDWIDTH (-26 DB)

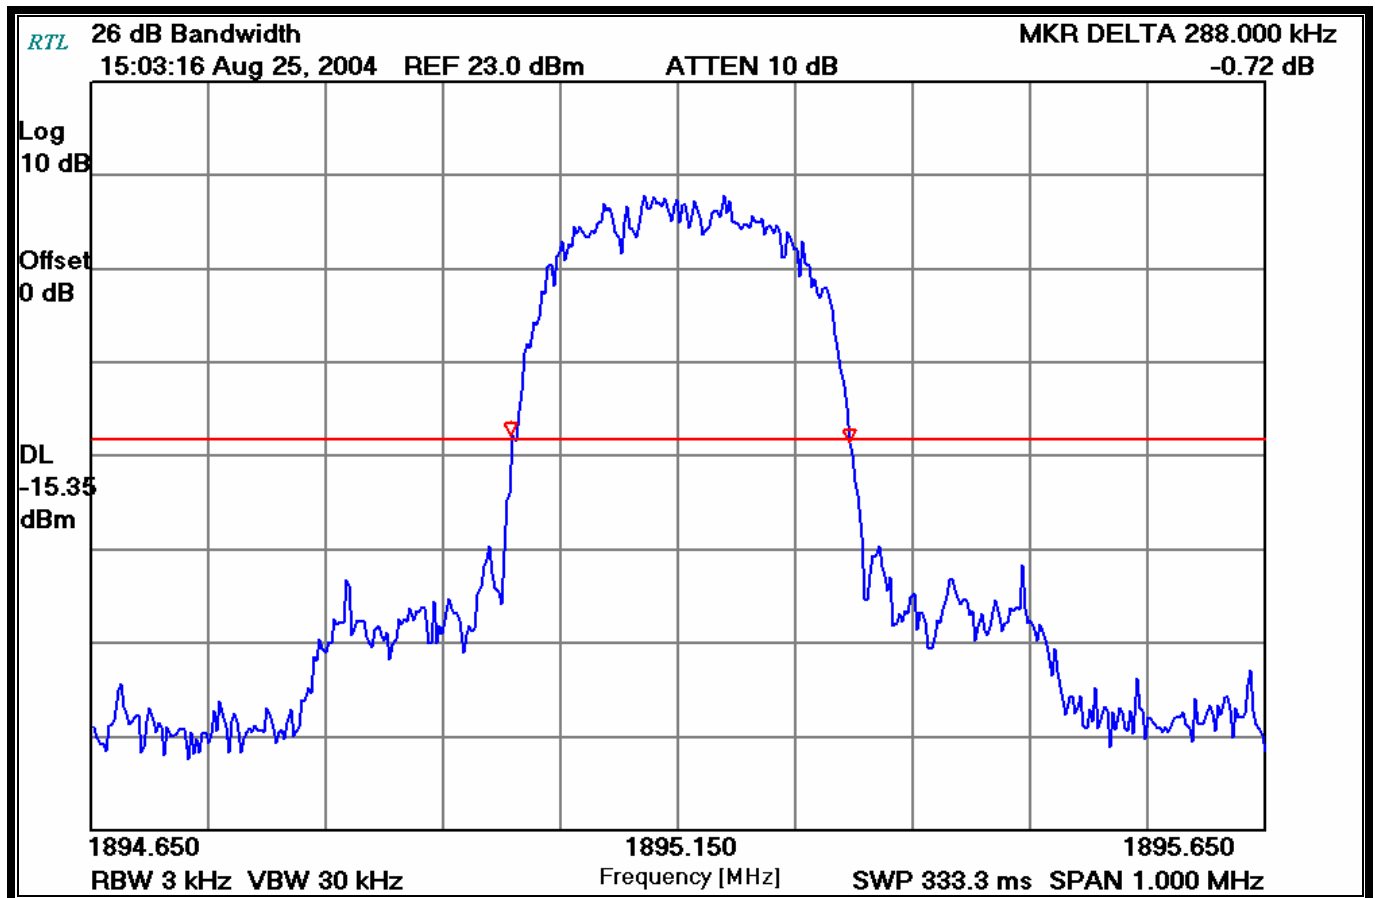

TEST PERSONNEL:

Daniel W. Baltzell
EMC Test Engineer

Signature

August 25, 2004
Date Of Test

6 RADIATED SPURIOUS AND HARMONIC EMISSIONS - §2.1053

6.1 RADIATED SPURIOUS AND HARMONIC EMISSIONS - §2.1053

Substitution method. The EUT was terminated with a 50 ohm termination and placed on a turntable 3 meters from the receive antenna. The field of maximum intensity was found by rotating the EUT approximately 360 degrees and changing the height of the receive antenna from 1 to 4 meters. The field strength was recorded from a calibrated spectrum analyzer for each channel being tested. A double ridge horn antenna was substituted in place of the EUT. The horn antenna was fed by a signal generator and adjusted until the previous level was attained. The signal generator level was recorded. It was further corrected by subtracting the cable loss from the signal generator to the dipole and adding the horn gain. The worst case average channel test data is provided.

6.2 RADIATED SPURIOUS TEST EQUIPMENT

TABLE 6-1: RADIATED SPURIOUS TEST EQUIPMENT

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due
901053	Schaffner Chase	CBL6112B	Bi-Log Antenna (20 MHz - 2 GHz)	2648	9/20/05
900932	Hewlett Packard	8449B OPT H02	Preamplifier (1 - 26.5 GHz)	3008A00505	5/5/05
901020	Hewlett Packard	8564E	Portable Spectrum Analyzer (9 kHz - 40 GHz)	3943A01719	8/11/05
900928	Hewlett Packard	83752A	Synthesized Sweeper (0.01 - 20 GHz)	3610A00866	8/5/05
900814	Electro-Metrics	EM-6961 (RGA-60)	Double Ridged Guide Antenna (1 - 18 GHz)	2310	2/17/06

6.3 FIELD STRENGTH OF SPURIOUS RADIATION TEST DATA - §2.1053

Operating Frequency (MHz): 1880.15
 Channel: 206
 Measured EIRP (dBm): 22.0
 Modulation: DXW
 Distance (m): 3
 Limit (dBc): 35.0

TABLE 6-2: FIELD STRENGTH OF SPURIOUS RADIATION TEST DATA §2.1053; 1880.15 MHZ

Frequency (MHz)	Signal Generator Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Corrected Signal Generator Level (dBm)	Corrected Level (dBc)	Margin (dB)
3760.300	-29.5	7.9	9.5	-27.9	49.9	-14.9
5640.450	-22.9	8.1	10.4	-20.6	42.6	-7.6
7520.600	-28.6	9.9	11.0	-27.5	49.5	-14.5
9400.750	-28.1	10.5	11.1	-27.5	49.5	-14.5
11280.900	-39.7	11.4	11.8	-39.3	61.3	-26.3
13161.050	-34.2	11.7	12.0	-33.9	55.9	-20.9
15041.200	-33.1	13.2	12.4	-33.9	55.9	-20.9
16921.350	-34.9	14.1	13.6	-35.4	57.4	-22.4
18801.500	-39.7	14.5	12.9	-41.3	63.3	-28.3

Operating Frequency (MHz): 1895.15
Channel: 1
Measured EIRP (dBm): 21.9
Modulation: DXW
Distance (m): 3
Limit (dBc): 34.9

TABLE 6-3: FIELD STRENGTH OF SPURIOUS RADIATION TEST DATA §2.1053; 1895.15 MHZ

Frequency (MHz)	Signal Generator Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Corrected Signal Generator Level (dBm)	Corrected Level (dBc)	Margin (dB)
3790.300	-37.0	8.1	9.5	-35.6	57.5	-22.6
5685.450	-21.5	8.0	10.5	-19.0	40.9	-6.0
7580.600	-22.4	10.3	10.8	-21.9	43.8	-8.9
9475.750	-22.9	10.6	11.2	-22.3	44.2	-9.3
11370.900	-39.9	11.2	11.8	-39.3	61.2	-26.3
13266.050	-33.5	12.2	12.0	-33.7	55.6	-20.7
15161.200	-37.4	13.5	13.1	-37.8	59.7	-24.8
17056.350	-36.9	14.2	13.0	-38.1	60.0	-25.1
18951.500	-33.5	14.6	13.7	-34.4	56.3	-21.4

Operating Frequency (MHz): 1909.85
 Channel: 50
 Measured EIRP (dBm): 22.3
 Modulation: DXW
 Distance (m): 3
 Limit (dBc): 35.3

TABLE 6-4: FIELD STRENGTH OF SPURIOUS RADIATION TEST DATA §2.1053; 1909.85 MHZ

Frequency (MHz)	Signal Generator Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Corrected Signal Generator Level (dBm)	Corrected Level (dBc)	Margin (dB)
3819.700	-34.9	8.0	9.5	-33.4	55.7	-20.4
5729.550	-20.9	8.1	10.5	-18.5	40.8	-5.5
7639.400	-21.0	9.8	10.6	-20.2	42.5	-7.2
9549.250	-19.0	10.5	11.2	-18.3	40.6	-5.3
11459.100	-37.1	11.0	11.7	-36.4	58.7	-23.4
13368.950	-36.6	12.7	12.0	-37.3	59.6	-24.3
15278.800	-38.9	13.6	13.7	-38.8	61.1	-25.8
17188.650	-38.9	14.4	12.4	-40.9	63.2	-27.9
19098.500	-33.8	14.7	13.9	-34.6	56.9	-21.6

TEST PERSONNEL:

Daniel W. Baltzell
 EMC Test Engineer



Signature

August 25, 2004
 Date Of Test

7 BAND-EDGE COMPLIANCE - PART 24.238

7.1 TEST PROCEDURE

Delta Marker method : The resolution of the spectrum analyzer is adjusted to 1% of the emission bandwidth after the reference level is adjusted to the EIRP level using a resolution and video bandwidth of 1 MHz. The frequency is centered on the band edge of interest with a span capable of showing the peak; a delta-to-peak is performed with the display line set at -13 dBm (43+10LogP).

TABLE 7-1: BAND-EDGE TEST EQUIPMENT

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due
901053	Schaffner Chase	CBL6112B	Bi-Log Antenna (20 MHz - 2 GHz)	2648	9/20/05
901020	Hewlett Packard	8564E	Portable Spectrum Analyzer (9 kHz - 40 GHz)	3943A01719	8/11/05
900932	Hewlett Packard	8449B OPT H02	Preamplifier (1-26.5 GHz)	3008A00505	5/5/05
901231	IW Microwave Products	KPS-1503-2400-KPS	High frequency RF cables	240"	1/30/05
901232	IW Microwave Products	KPS-1503-2400-KPS	High frequency RF cables	240"	1/30/05
901235	IW Microwave Products	KPS-1503-360-KPS	High frequency RF cables	36"	1/30/05


7.2 TEST DATA

TABLE 7-2: BAND EDGE COMPLIANCE

Block Applicable	Frequency (MHz)	Channel Number	Channel Frequency	Spurious at block edge (dBm)	Limit (dBm)	Margin (dB)
B	1870.00	206	1880.15	-48.1	-13.0	-35.1
B	1885.00	221	1884.65	-39.6	-13.0	-26.6
F	1890.00	240	1890.35	-31.6	-13.0	-18.6
F	1895.00	255	1894.85	-16.1	-13.0	-3.1
C	1894.87	1	1895.15	-17.1	-13.0	-4.1
C	1910.00	50	1909.85	-18.1	-13.0	-5.1

TEST PERSONNEL:


Daniel W. Baltzell
EMC Test Engineer




Signature

August 24, 2004
Date Of Test


PLOT 7-1: LOWER BAND EDGE BLOCK B

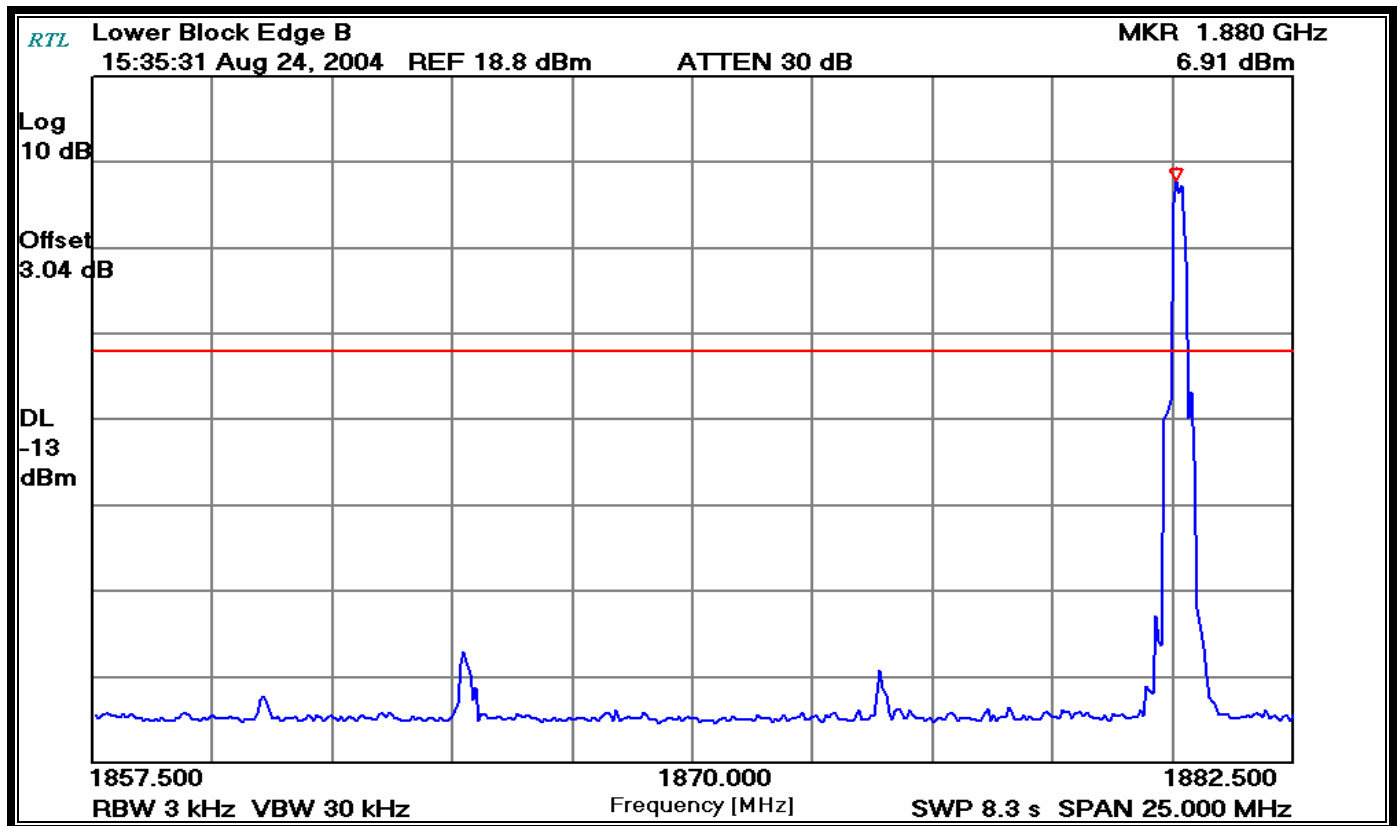


PLOT 7-2: UPPER BAND EDGE BLOCK B

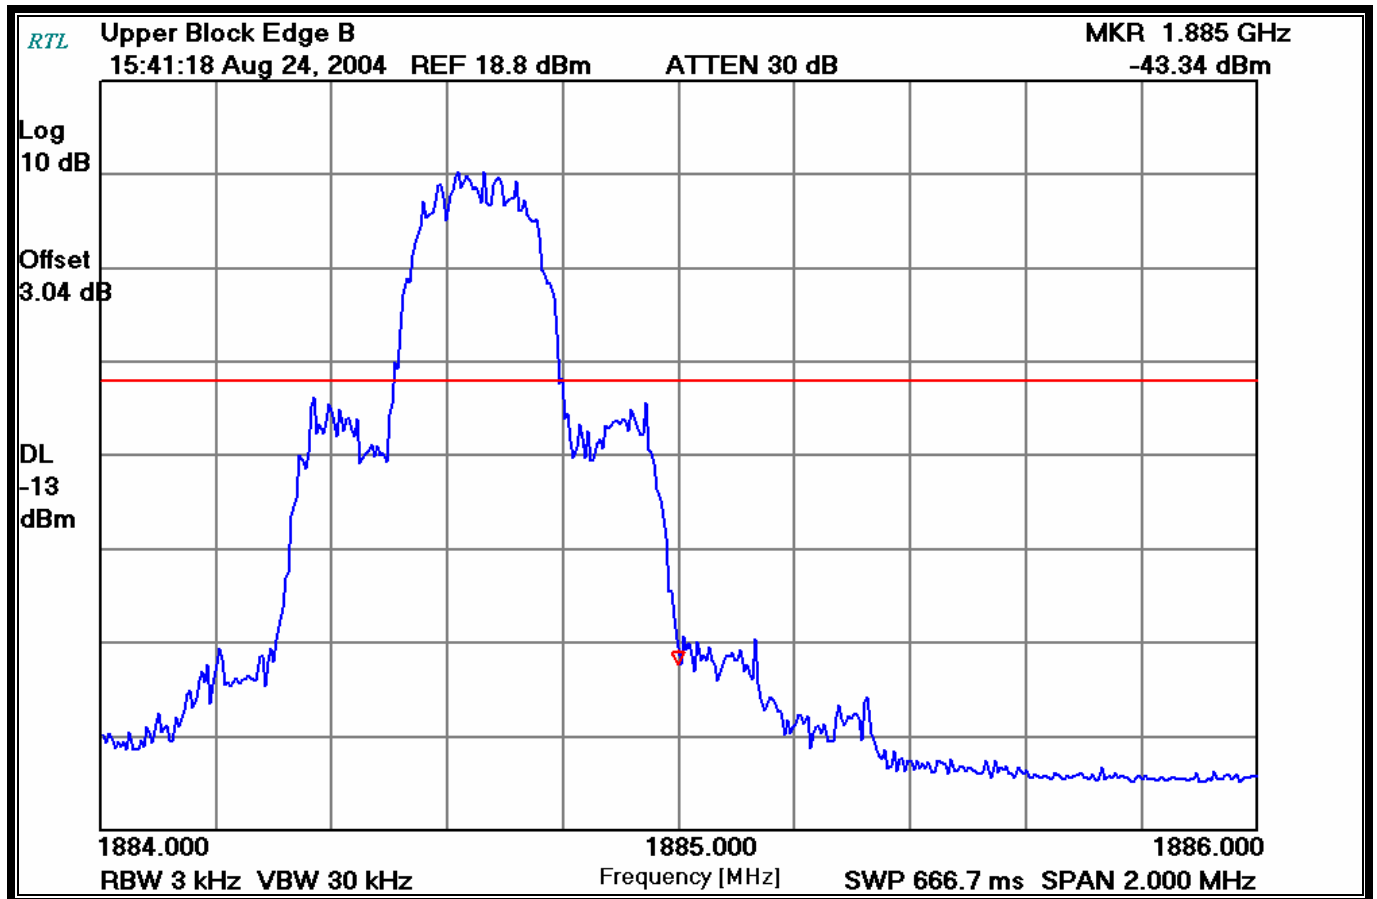


PLOT 7-3: LOWER BAND EDGE BLOCK F

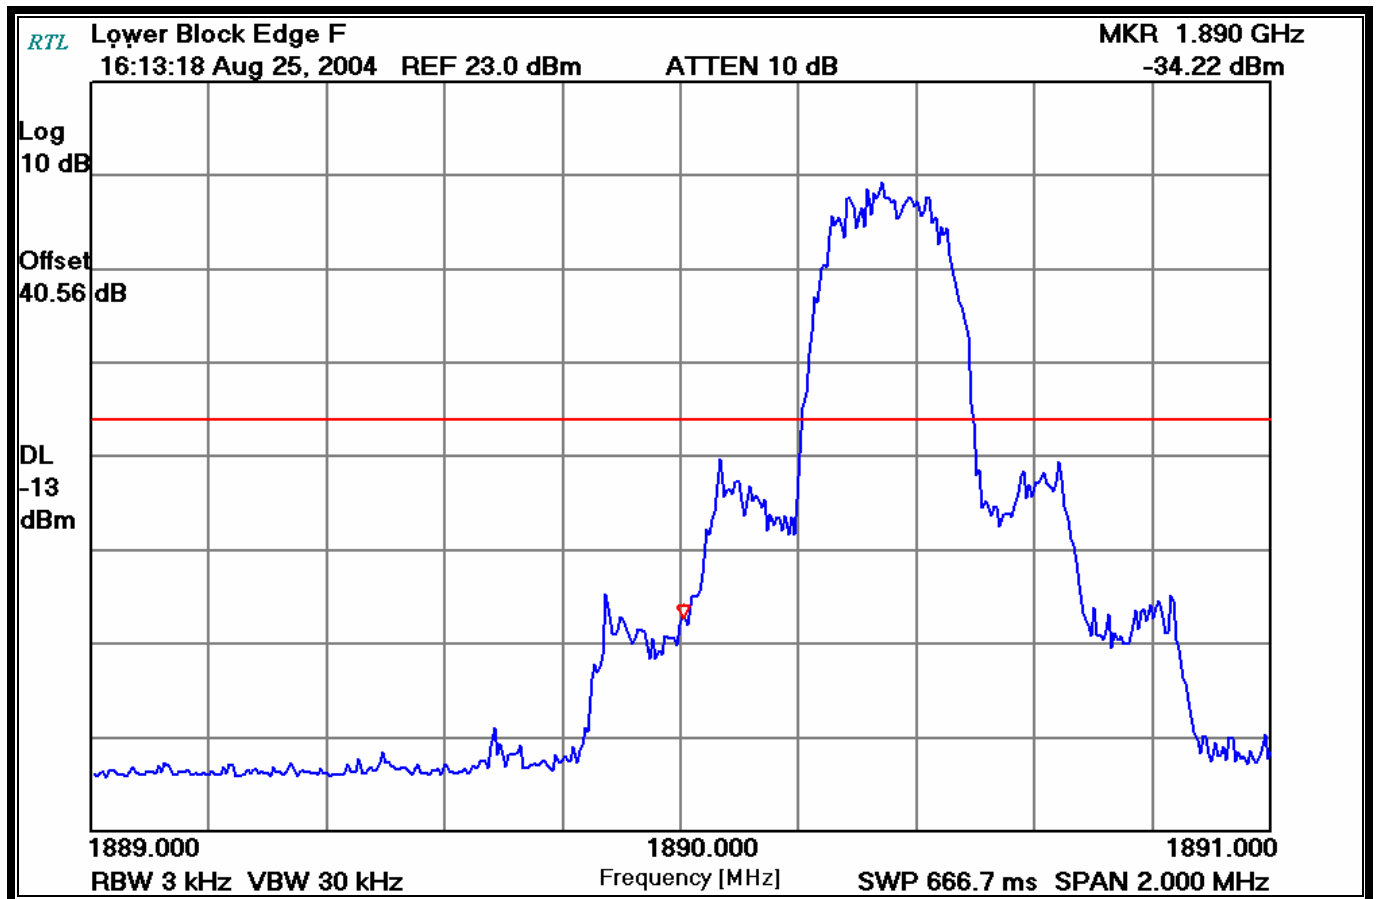


PLOT 7-4: UPPER BAND EDGE BLOCK F

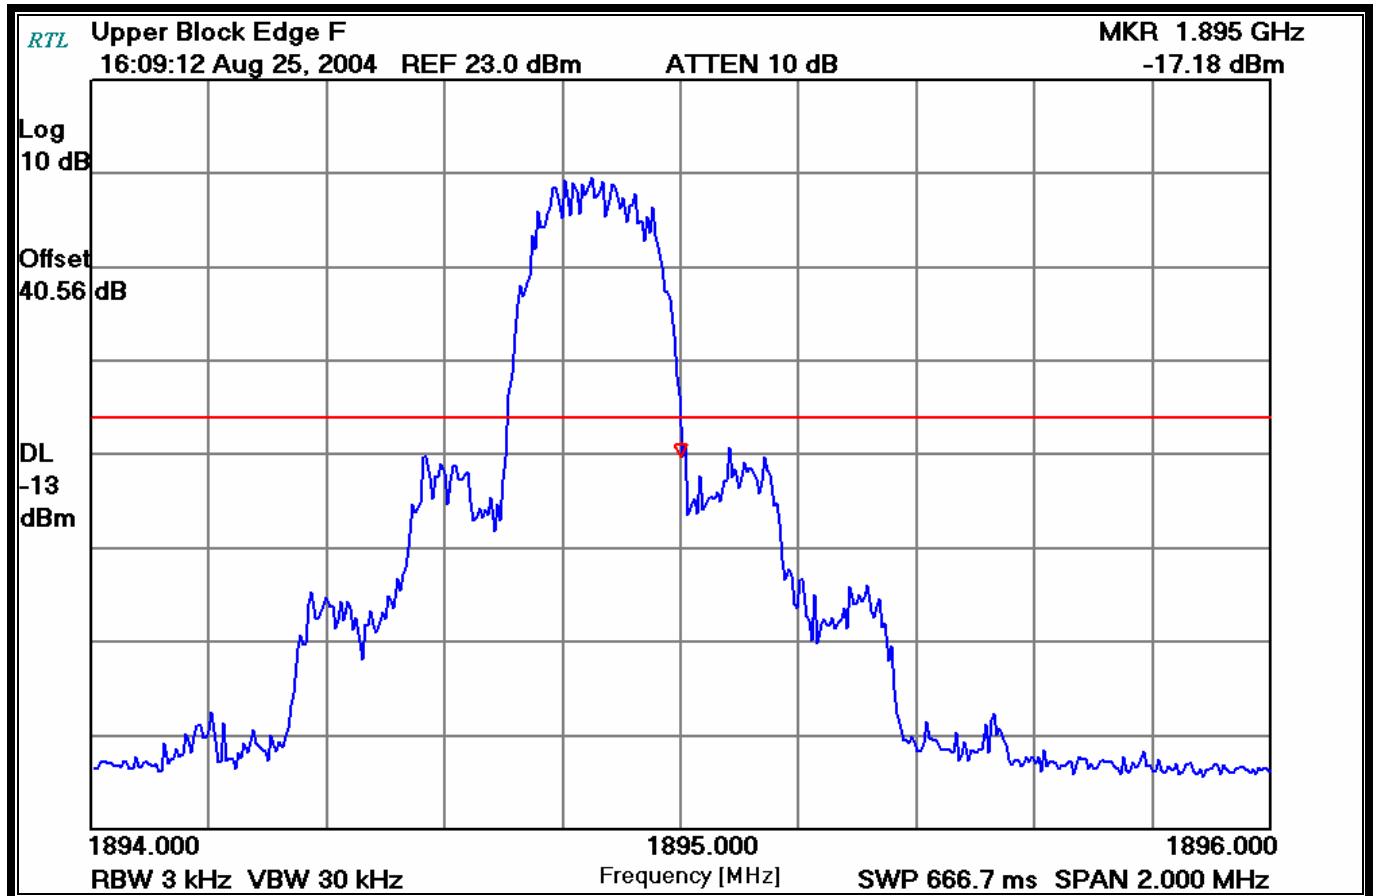

PLOT 7-5: LOWER BAND EDGE BLOCK C

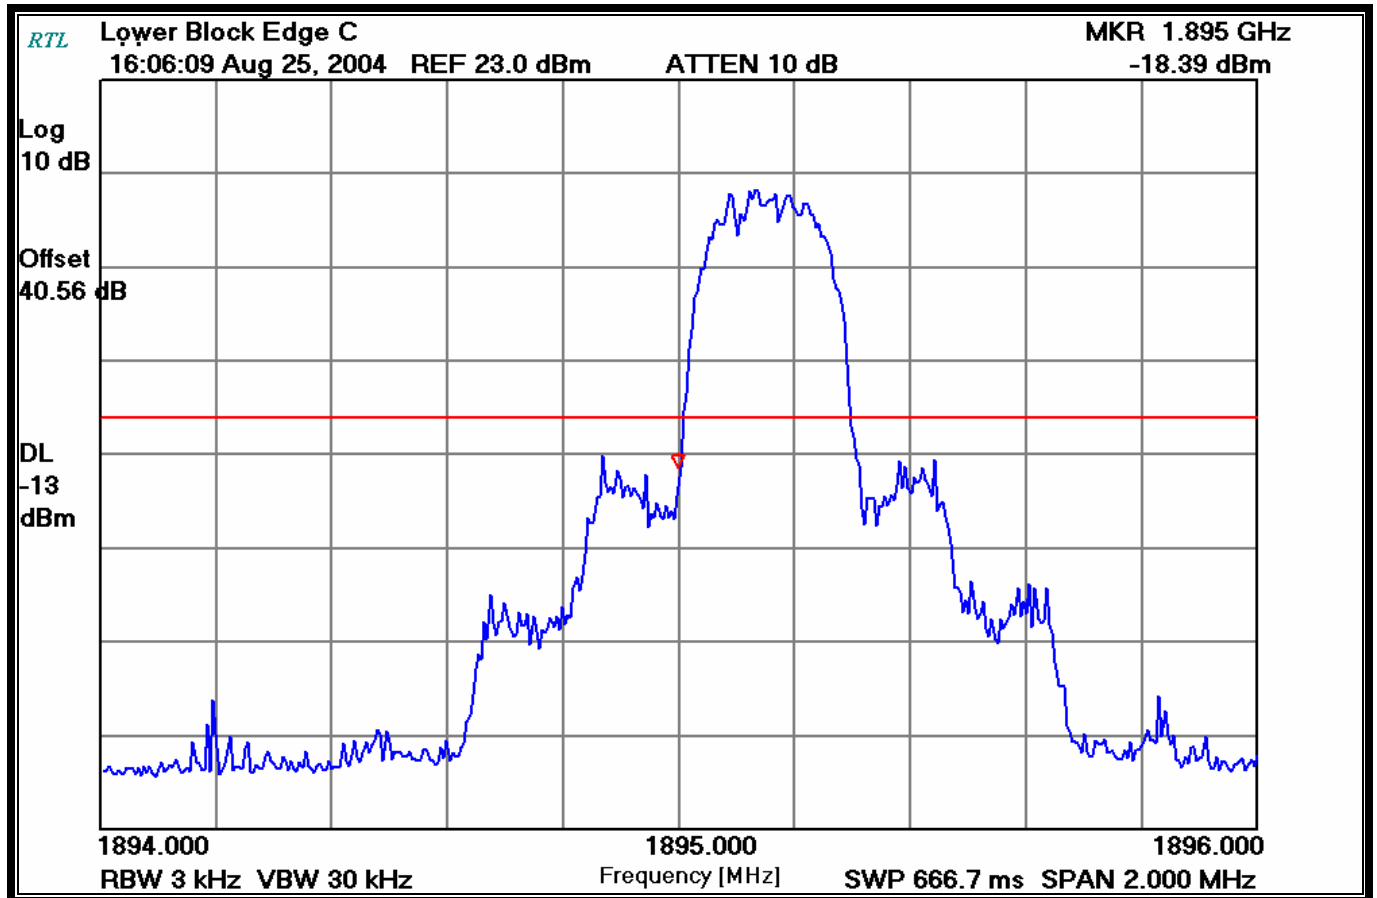

PLOT 7-6: UPPER BAND EDGE BLOCK C

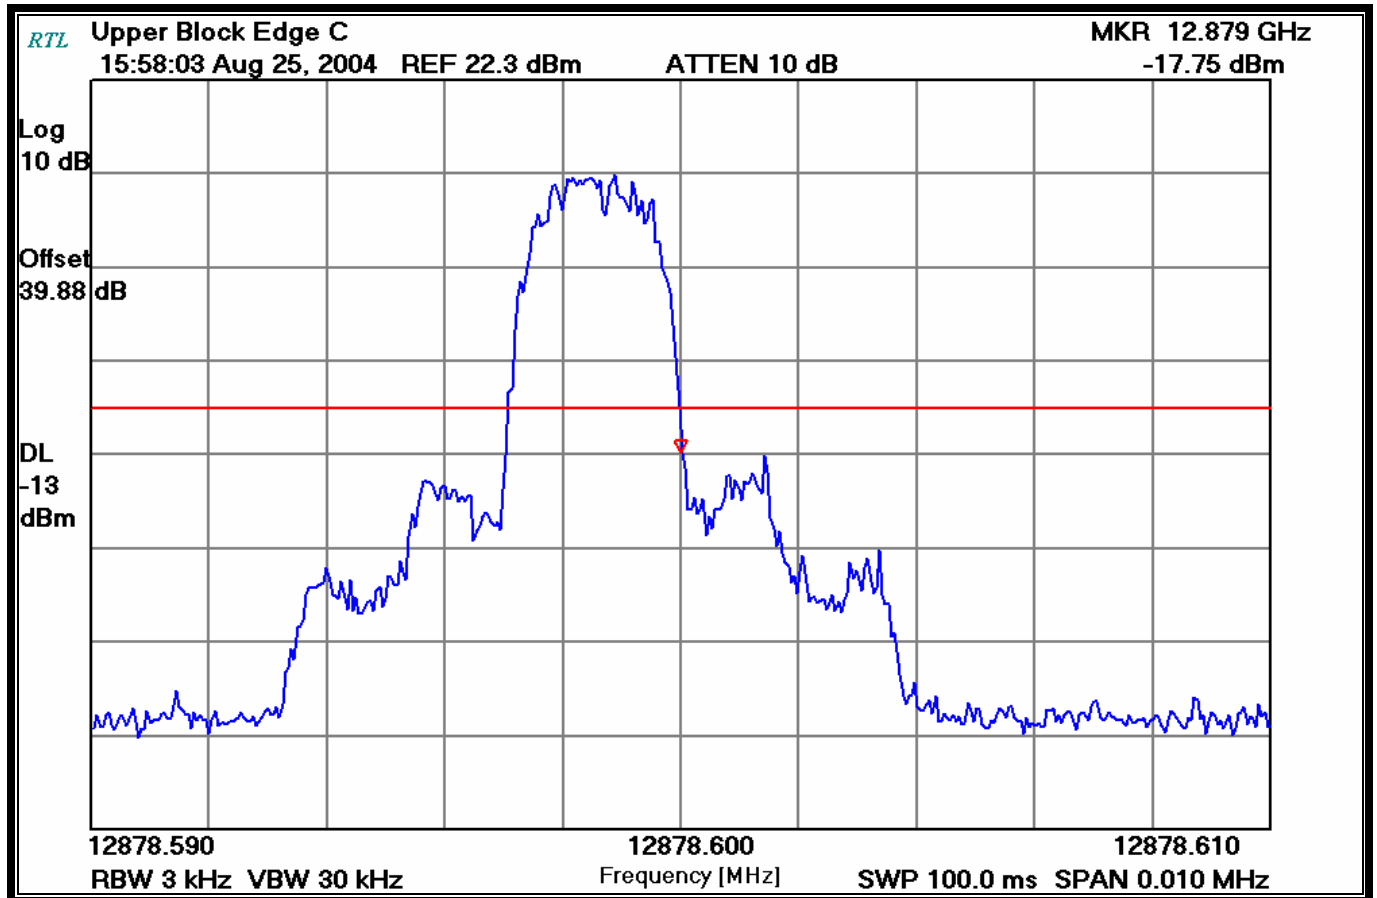

TEST PERSONNEL:

Daniel W. Baltzell
 EMC Test Engineer

Signature

August 24 and 25, 2004
 Dates Of Test

8 FREQUENCY STABILITY / TEMPERATURE VARIATION - §2.1055

The frequency stability and RF power, measured at the antenna connector using a communications test set as the specified load, are plotted against supply voltage variations and temperature variations at the highest power levels for each modulation type. All measurements are made at the center of the frequency band.

8.1 MEASUREMENT METHOD

The frequency stability of the transmitter was measured by:

1. Temperature: The temperature was varied from -30°C to +50°C at intervals no more than 10°C throughout the temperature range using an environmental chamber. A period of time sufficient to stabilize all of the components in the equipment shall be allowed prior to each frequency measurement.
2. Primary Supply Voltage: The primary supply voltage was varied from 85% to 115% of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied. The EUT was tested down to the battery endpoint.

8.2 FREQUENCY STABILITY TEST EQUIPMENT

TABLE 8-1: FREQUENCY STABILITY TEST EQUIPMENT

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due
900946	Tenney Engineering, Inc	TH65	Temperature Chamber	11380	2/3/05
901020	Hewlett Packard	8564E	Portable Spectrum Analyzer (9 kHz - 40 GHz)	3943A01719	8/11/05

8.3 TIME PERIOD AND PROCEDURE

1. The carrier frequency of the transmitter was measured at room temperature (20°C to provide a reference).
2. The equipment was subjected to a "soak" at -30°C without any power applied.
3. After the "soak" at -30°C, the measurement of the carrier frequency of the transmitter was made within a three-minute interval after applying power to the transmitter.
4. Frequency measurements were made at 10°C intervals up to +50°C, then back to room temperature. A minimum period of one hour was provided to allow stabilization of the equipment at each temperature level.

8.4 FREQUENCY STABILITY § 24.235

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

8.5 FREQUENCY STABILITY TEST DATA - §2.1055


Operating Frequency (MHz): 1895.15
Channel: 1
Reference Voltage (VDC): 3.6
Deviation Limit (ppm): 2.5

TABLE 8-2: TEMPERATURE FREQUENCY STABILITY DATA - §2.1055

Temperature	Frequency Measured (MHz)	ppm
-30	1895.148392	-0.85
-20	1895.149204	-0.42
-10	1895.149642	-0.19
0	1895.150842	0.44
10	1895.150117	0.06
20	1895.150000	0.00
30	1895.150425	0.22
40	1895.149267	-0.39
50	1895.150492	0.26

TEST PERSONNEL:

Daniel W. Baltzell
EMC Test Engineer



Signature

August 24, 2004
Date Of Test

PLOT 8-1: TEMPERATURE FREQUENCY STABILITY DATA - §2.1055

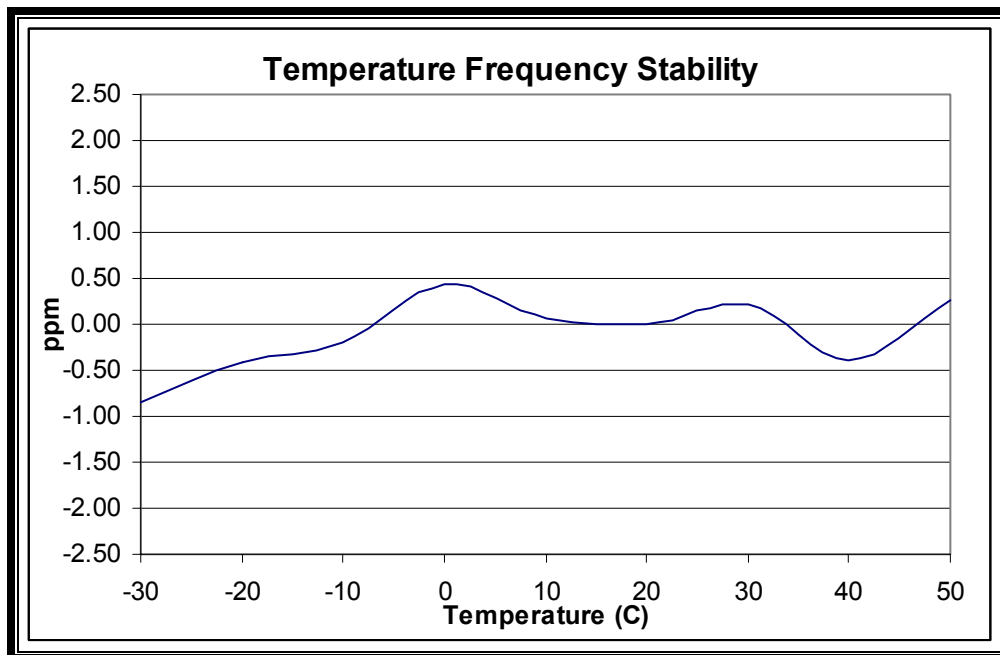


TABLE 8-3: VOLTAGE FREQUENCY STABILITY DATA - §2.1055

Battery endpoint = 2.76 VDC

Voltage	Frequency Measured (MHz)	ppm
2.76	1895.152106	1.11
3.06	1895.151789	0.94
3.60	1895.151789	0.94
4.14	1895.152206	1.16


TEST PERSONNEL:

Daniel W. Baltzell
 EMC Test Engineer

Signature

August 26, 2004
 Date Of Test

PLOT 8-2: VOLTAGE FREQUENCY STABILITY

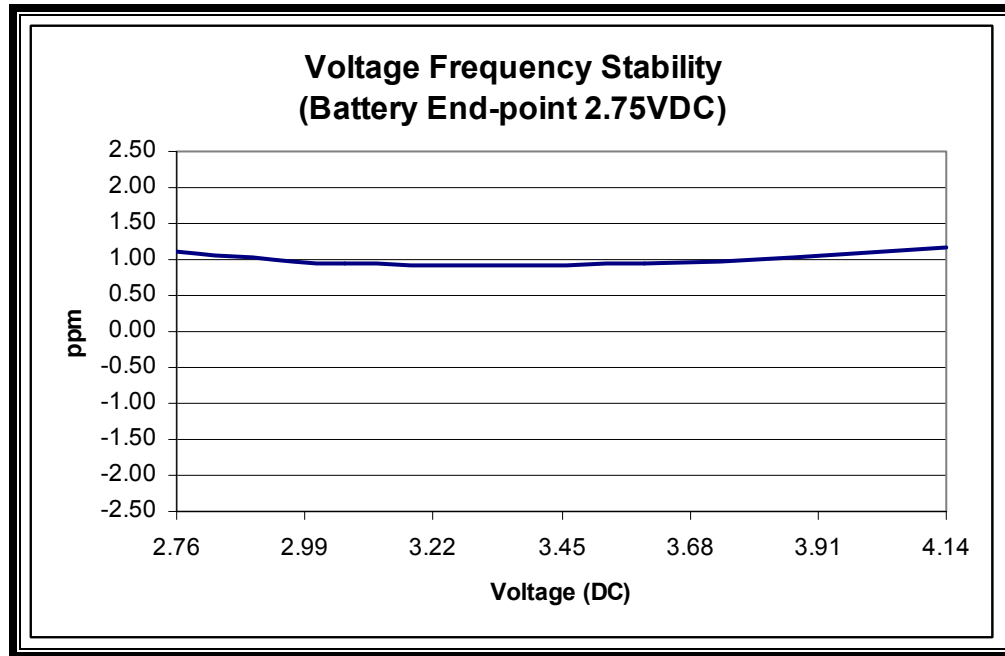

TEST PERSONNEL:

Daniel W. Baltzell
EMC Test Engineer

Signature

August 26, 2004
Date Of Test

9 CONCLUSION

The data in this measurement report shows that the UTStarcom, Inc. Model # UT106, FCC ID: O6Y-UT106, complies with all the requirements of Parts 2 and 24 of the FCC Rules.