



C2000 (Body)

SAM I Phantom; Flat Section; Position: (90°,90°); Frequency: 835 MHz
Probe: ET3DV6 - SN1609; ConvF(6.47,6.47,6.47); Crest factor: 1.0; Body 835 MHz: $s = 0.98$
 ρ/m $\epsilon_r = 53.9$ $r = 1.00$ g/cm³
Cube 5x5x7; SAR (1g): 0.259 mW/g, SAR (10g): 0.182 mW/g
Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0
Powerdrift: -0.22 dB
Comment:
MODEL: C2000
Company : UTStarcom Inc.
Test Position: Body / Antenna: in
Mode: AMPS / Channel: 991 (824.04MHz)
Conducted Power: 27.0 dBm
Liquid Temperature: 21.4°C
Date Tested : February 17, 2005

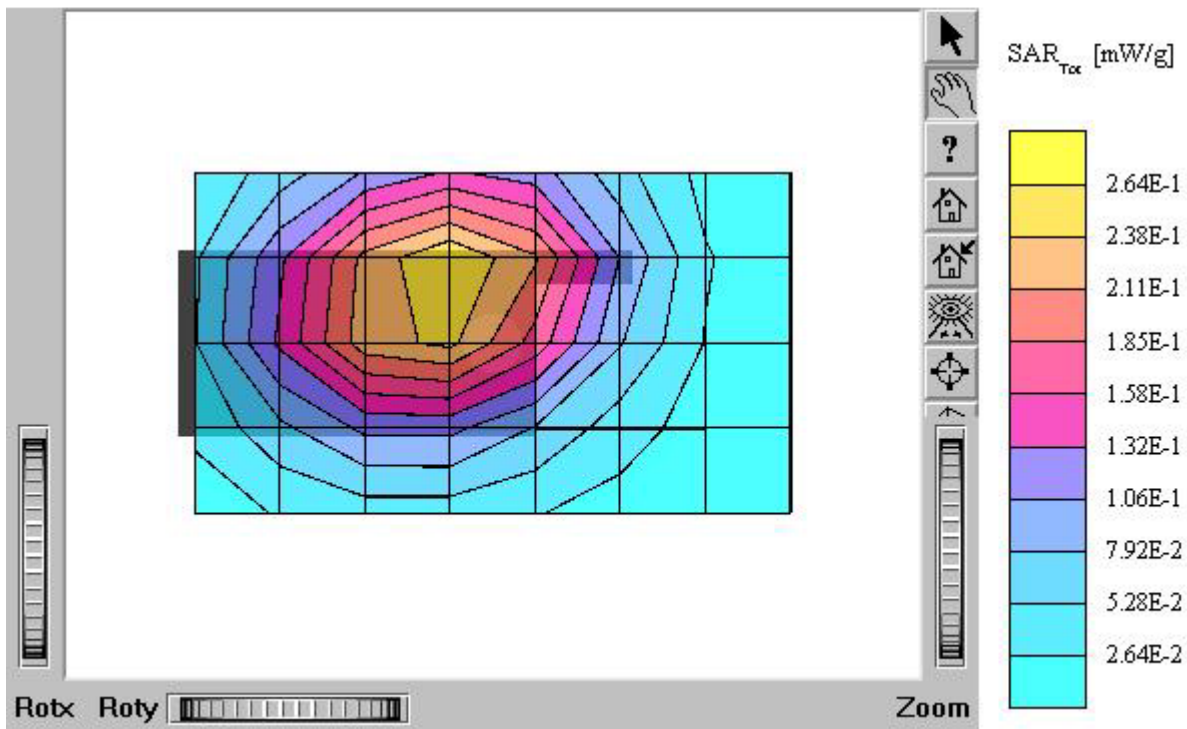


C2000 (Body)

SAM I Phantom; Flat Section; Position: (90°,90°); Frequency: 835 MHz
Probe: ET3DV6 - SN1609; ConvF(6.47,6.47,6.47); Crest factor: 1.0; Body 835 MHz: $s = 0.98$
 ρ_{ho}/m $e_r = 53.9$ $r = 1.00$ g/cm³
Cube 5x5x7; SAR (1g): 0.244 mW/g, SAR (10g): 0.173 mW/g
Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0
Powerdrift: -0.20 dB
Comment:
MODEL: C2000
Company : UTStarcom Inc.
Test Position: Body / Antenna: out
Mode: AMPS / Channel: 991 (824.04MHz)
Conducted Power: 27.0 dBm
Liquid Temperature: 21.4°C
Date Tested : February 17, 2005

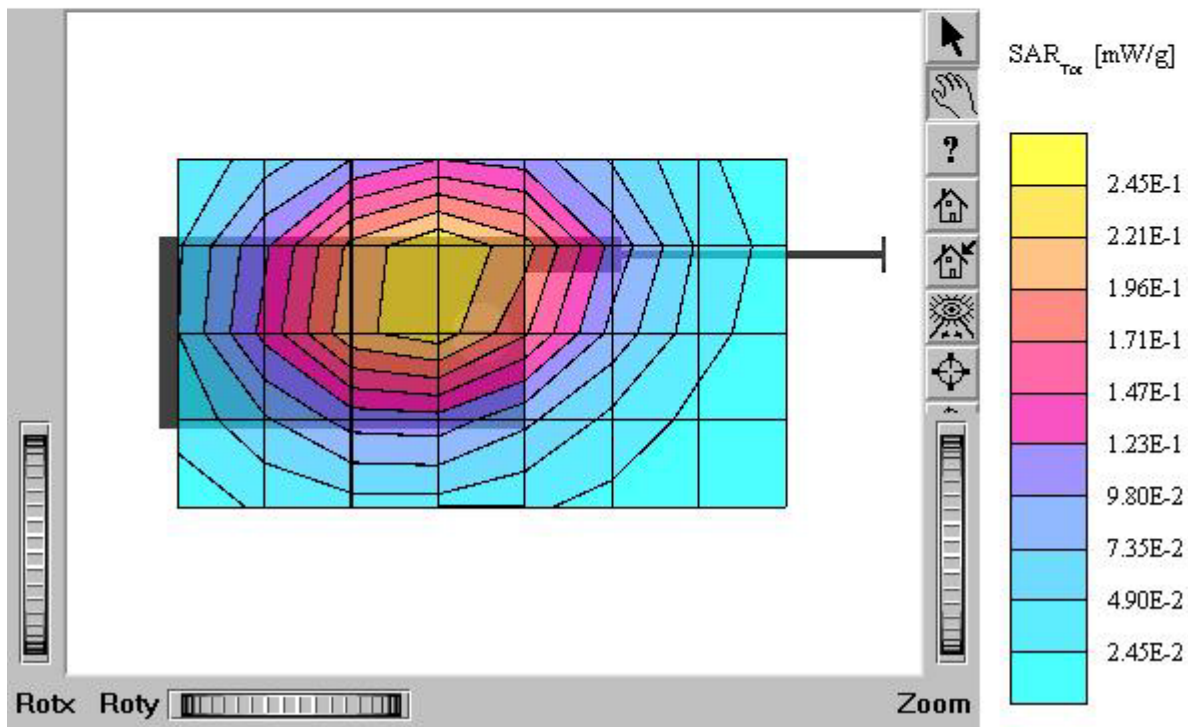


C2000 (Body)

SAM I Phantom; Flat Section; Position: (90°,90°); Frequency: 835 MHz
Probe: ET3DV6 - SN1609; ConvF(6.47,6.47,6.47); Crest factor: 1.0; Body 835 MHz: $s = 0.98$
 $\rho_{\text{ho/m}} e_r = 53.9$ $r = 1.00$ g/cm³
Cube 5x5x7; SAR (1g): 0.512 mW/g, SAR (10g): 0.358 mW/g
Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0
Powerdrift: -0.12 dB
Comment:
MODEL: C2000
Company : UTStarcom Inc.
Test Position: Body / Antenna: in
Mode: AMPS / Channel: 383 (836.49MHz)
Conducted Power: 27.0 dBm
Liquid Temperature: 21.4°C
Date Tested : February 17, 2005

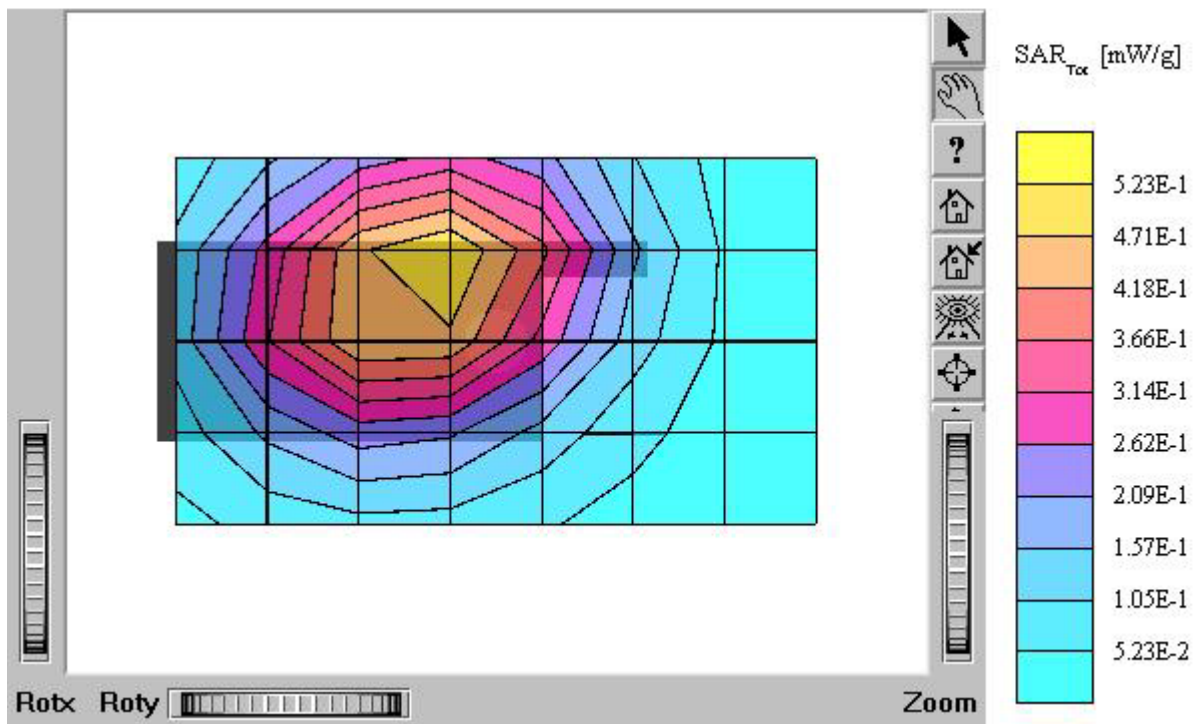


C2000 (Body)

SAM I Phantom; Flat Section; Position: (90°,90°); Frequency: 835 MHz
Probe: ET3DV6 - SN1609; ConvF(6.47,6.47,6.47); Crest factor: 1.0; Body 835 MHz: $s = 0.98$
 $\rho_{\text{ho/m}}$ $\epsilon_r = 53.9$ $\rho = 1.00$ g/cm³
Cube 5x5x7; SAR (1g): 0.437 mW/g, SAR (10g): 0.308 mW/g
Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0
Powerdrift: -0.22 dB
Comment:
MODEL: C2000
Company : UTStarcom Inc.
Test Position: Body / Antenna: out
Mode: AMPS / Channel: 383 (836.49MHz)
Conducted Power: 27.0 dBm
Liquid Temperature: 21.4°C
Date Tested : February 17, 2005

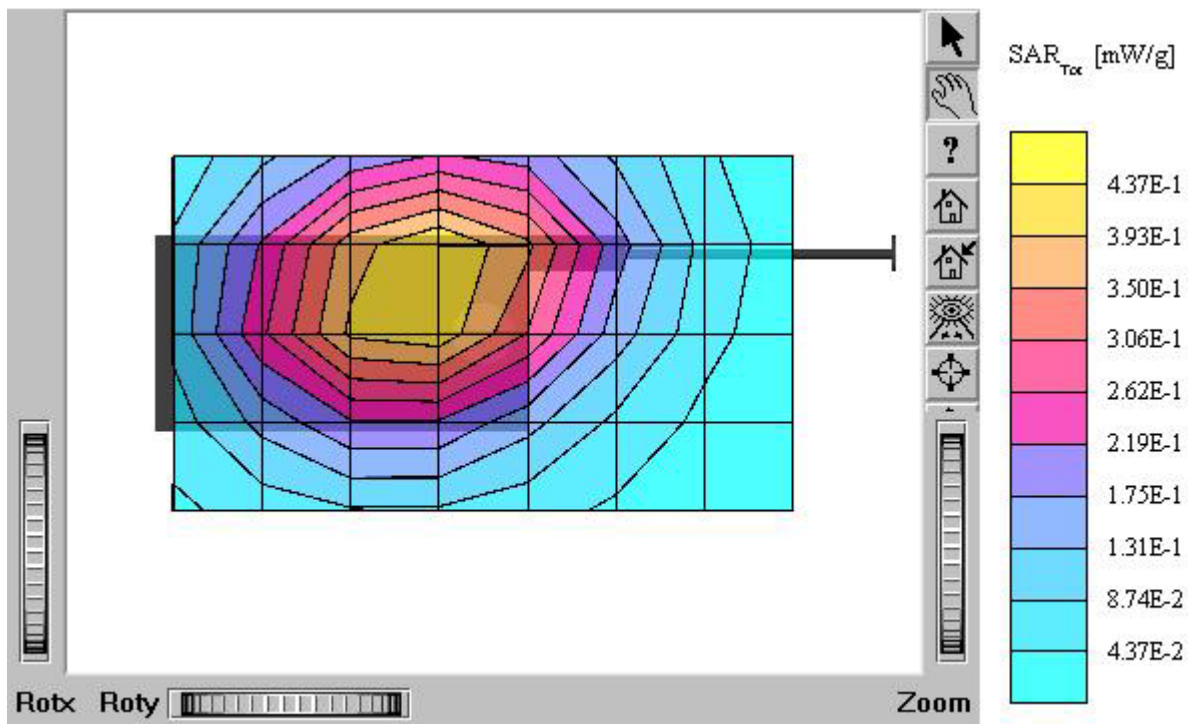


C2000 (Body)

SAM I Phantom; Flat Section; Position: (90°,90°); Frequency: 835 MHz
Probe: ET3DV6 - SN1609; ConvF(6.47,6.47,6.47); Crest factor: 1.0; Body 835 MHz: $s = 0.98$
 ρ/m $\epsilon_r = 53.9$ $r = 1.00$ g/cm³
Cube 5x5x7; SAR (1g): 0.341 mW/g, SAR (10g): 0.238 mW/g
Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0
Powerdrift: -0.12 dB
Comment:
MODEL: C2000
Company : UTStarcom Inc.
Test Position: Body / Antenna: in
Mode: AMPS / Channel: 799 (848.97MHz)
Conducted Power: 27.0 dBm
Liquid Temperature: 21.4°C
Date Tested : February 17, 2005

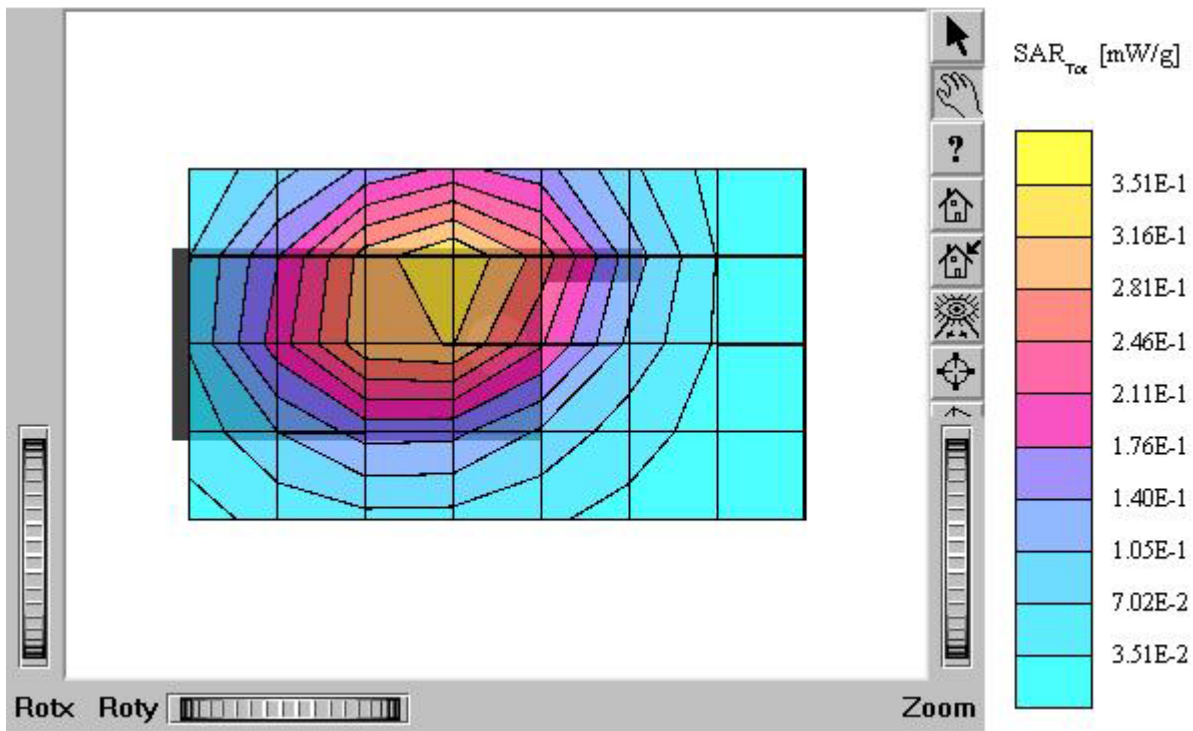


C2000 (Body)

SAM I Phantom; Flat Section; Position: (90°,90°); Frequency: 835 MHz
Probe: ET3DV6 - SN1609; ConvF(6.47,6.47,6.47); Crest factor: 1.0; Body 835 MHz: $s = 0.98$
 mho/m $\epsilon_r = 53.9$ $\rho = 1.00$ g/cm³
Cube 5x5x7; SAR (1g): 0.280 mW/g, SAR (10g): 0.196 mW/g
Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0
Powerdrift: -0.26 dB
Comment:
MODEL: C2000
Company : UTStarcom Inc.
Test Position: Body / Antenna: out
Mode: AMPS / Channel: 799 (848.97MHz)
Conducted Power: 27.0 dBm
Liquid Temperature: 21.4°C
Date Tested : February 17, 2005

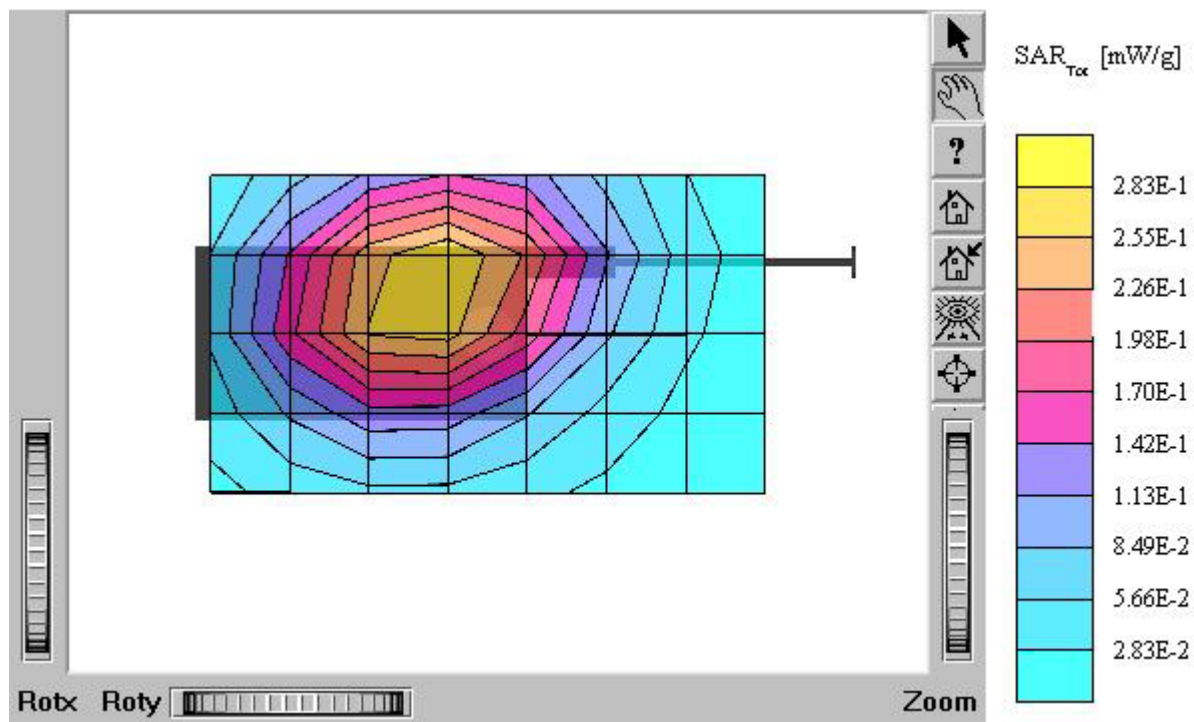


C2000 (Body)

SAM I Phantom; Flat Section; Position: (90°,90°); Frequency: 835 MHz
Probe: ET3DV6 - SN1609; ConvF(6.47,6.47,6.47); Crest factor: 1.0; Body 835 MHz: $s = 0.98$
 ρ/m , $\epsilon_r = 53.9$, $\rho = 1.00$ g/cm³
Cube 5x5x7; SAR (1g): 0.135 mW/g, SAR (10g): 0.0959 mW/g
Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0
Powerdrift: -0.29 dB
Comment:
MODEL: C2000
Company : UTStarcom Inc.
Test Position: Body / Antenna: in
Mode: CDMA / Channel: 1013 (824.70MHz)
Conducted Power : 25.0 dBm
Liquid Temperature: 21.4°C
Date Tested : February 17, 2005

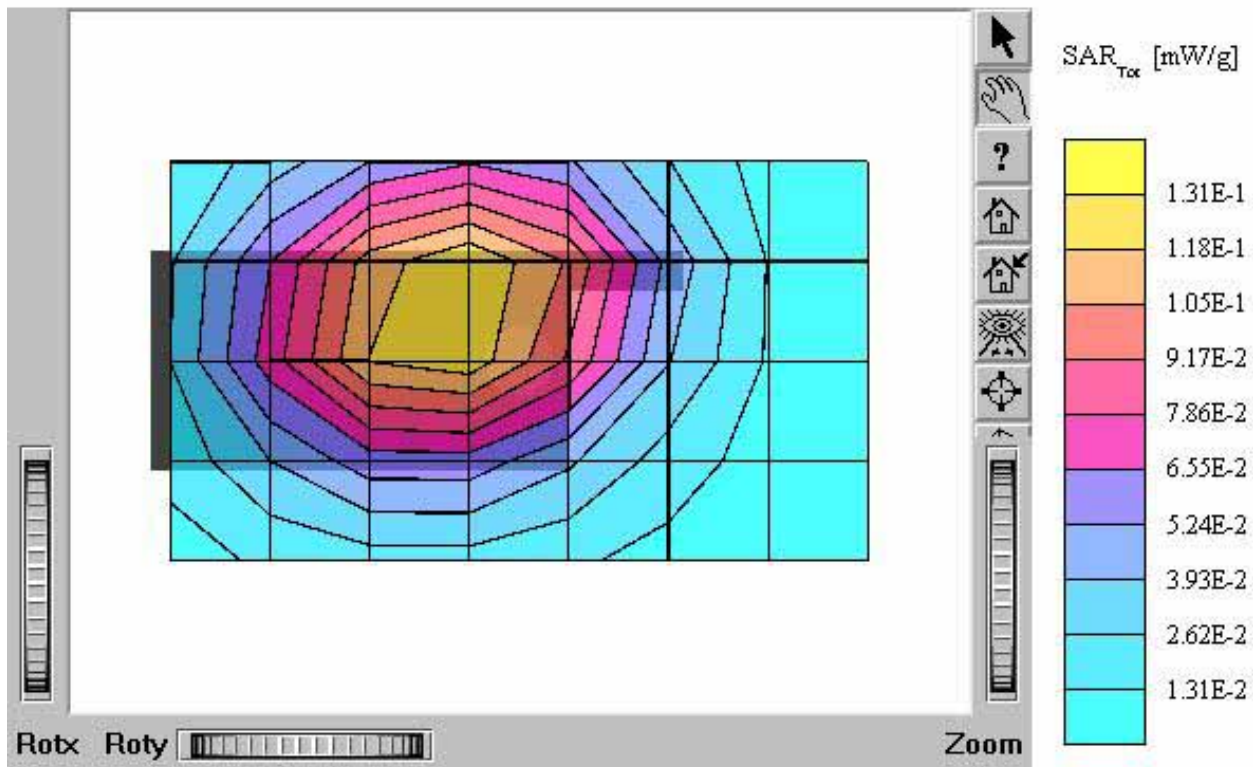


C2000 (Body)

SAM I Phantom; Flat Section; Position: (90°, 90°); Frequency: 835 MHz
Probe: ET3DV6 - SN1609; ConvF(6.47, 6.47, 6.47); Crest factor: 1.0; Body 835 MHz: $s = 0.98$
 mho/m , $\epsilon_r = 53.9$, $\rho = 1.00$ g/cm³
Cube 5x5x7; SAR (1g): 0.123 mW/g, SAR (10g): 0.0879 mW/g
Coarse: $D_x = 20.0$, $D_y = 20.0$, $D_z = 10.0$
Powerdrift: -0.09 dB
Comment:
MODEL: C2000
Company: UTStarcom Inc.
Test Position: Body / Antenna: out
Mode: CDMA / Channel: 1013 (824.70MHz)
Conducted Power: 25.0 dBm
Liquid Temperature: 21.4°C
Date Tested: February 17, 2005

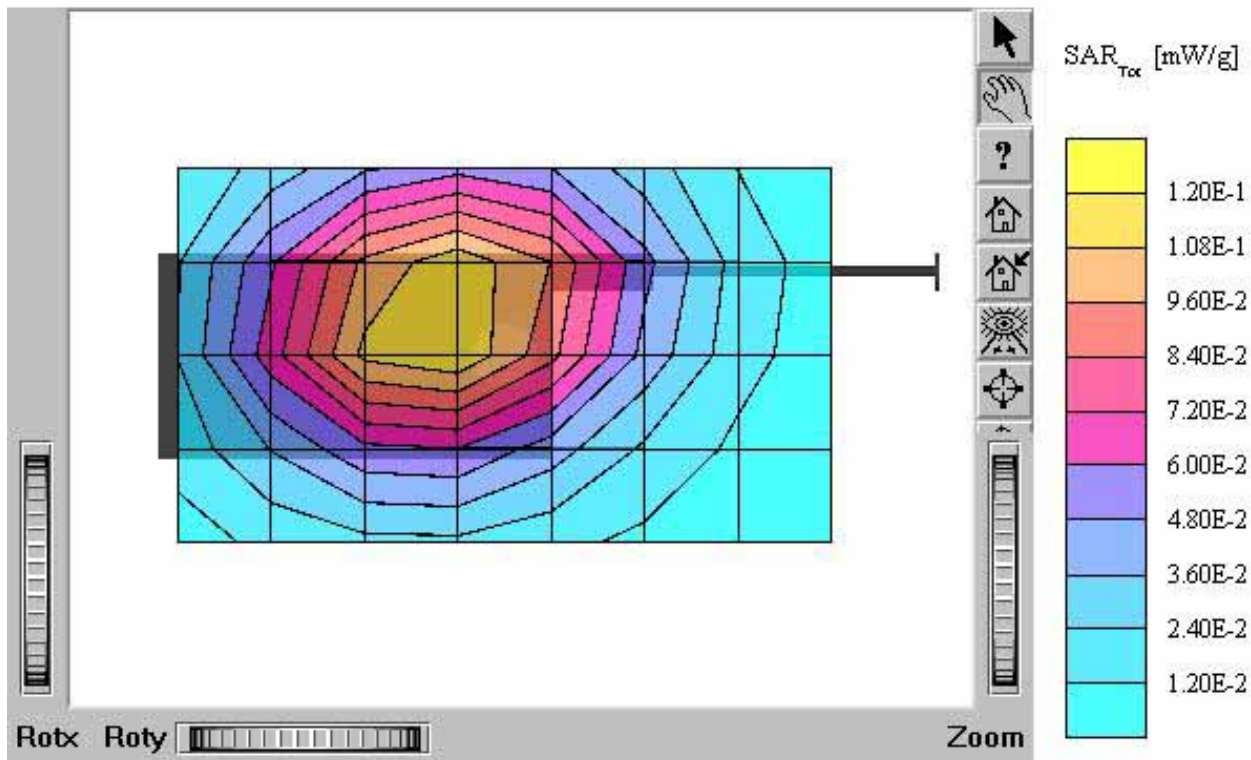


C2000 (Body)

SAM I Phantom; Flat Section; Position: (90°,90°); Frequency: 835 MHz
Probe: ET3DV6 - SN1609; ConvF(6.47,6.47,6.47); Crest factor: 1.0; Body 835 MHz: $s = 0.98$
 ρ/m $\epsilon_r = 53.9$ $r = 1.00$ g/cm³
Cube 5x5x7; SAR (1g): 0.297 mW/g, SAR (10g): 0.209 mW/g
Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0
Powerdrift: -0.05 dB
Comment:
MODEL: C2000
Company : UTStarcom Inc.
Test Position: Body / Antenna: in
Mode: CDMA / Channel: 363 (835.89MHz)
Conducted Power : 25.0 dBm
Liquid Temperature: 21.4°C
Date Tested : February 17, 2005

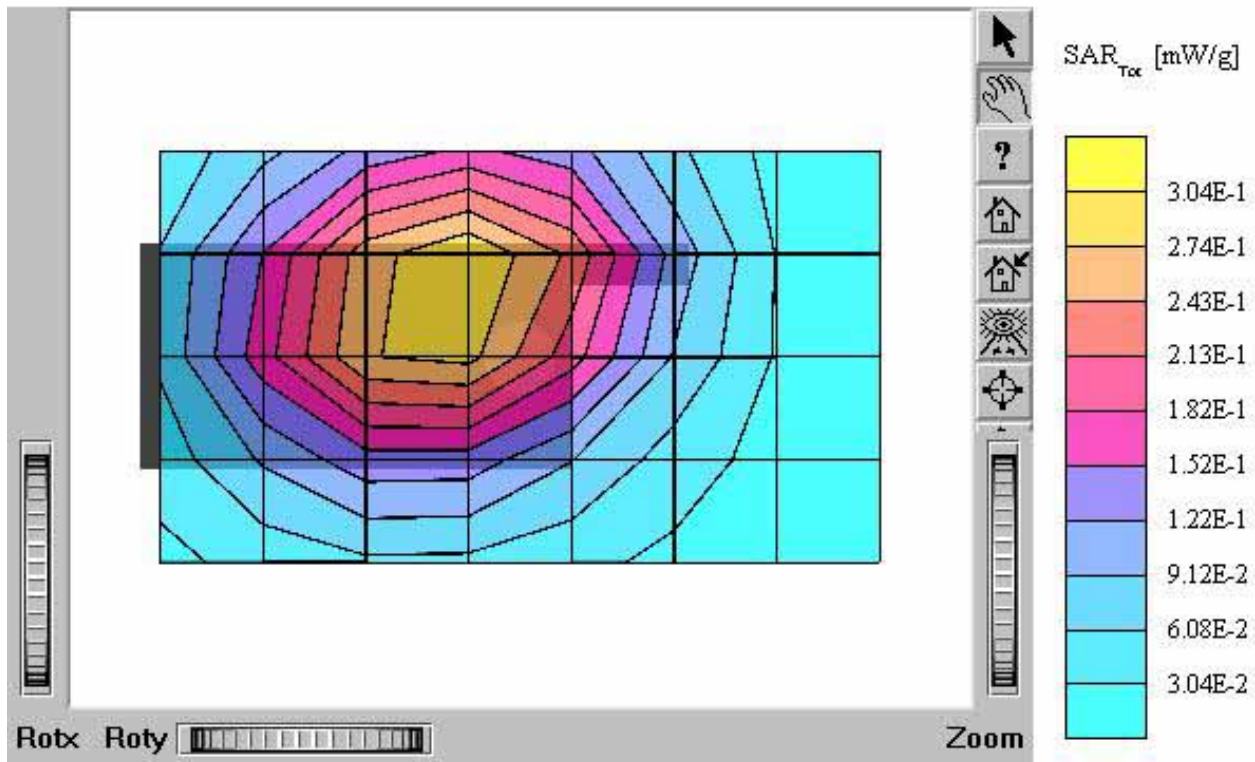

C2000 (Body)

SAM I Phantom; Flat Section; Position: (90°,90°); Frequency: 835 MHz
Probe: ET3DV6 - SN1609; ConvF(6.47,6.47,6.47); Crest factor: 1.0; Body 835 MHz: $s = 0.98$
 $\rho_{\text{ho}}/\text{m}$, $\epsilon_r = 53.9$ $\rho = 1.00 \text{ g/cm}^3$
Cube 5x5x7; SAR (1g): 0.295 mW/g, SAR (10g): 0.208 mW/g
Coarse: $D_x = 20.0$, $D_y = 20.0$, $D_z = 10.0$
Powerdrift: -0.15 dB
Comment:
MODEL: C2000
Company : UTStarcom Inc.
Test Position: Body / Antenna: out
Mode: CDMA / Channel: 363 (835.89MHz)
Conducted Power : 25.0 dBm
Liquid Temperature: 21.4°C
Date Tested : February 17, 2005

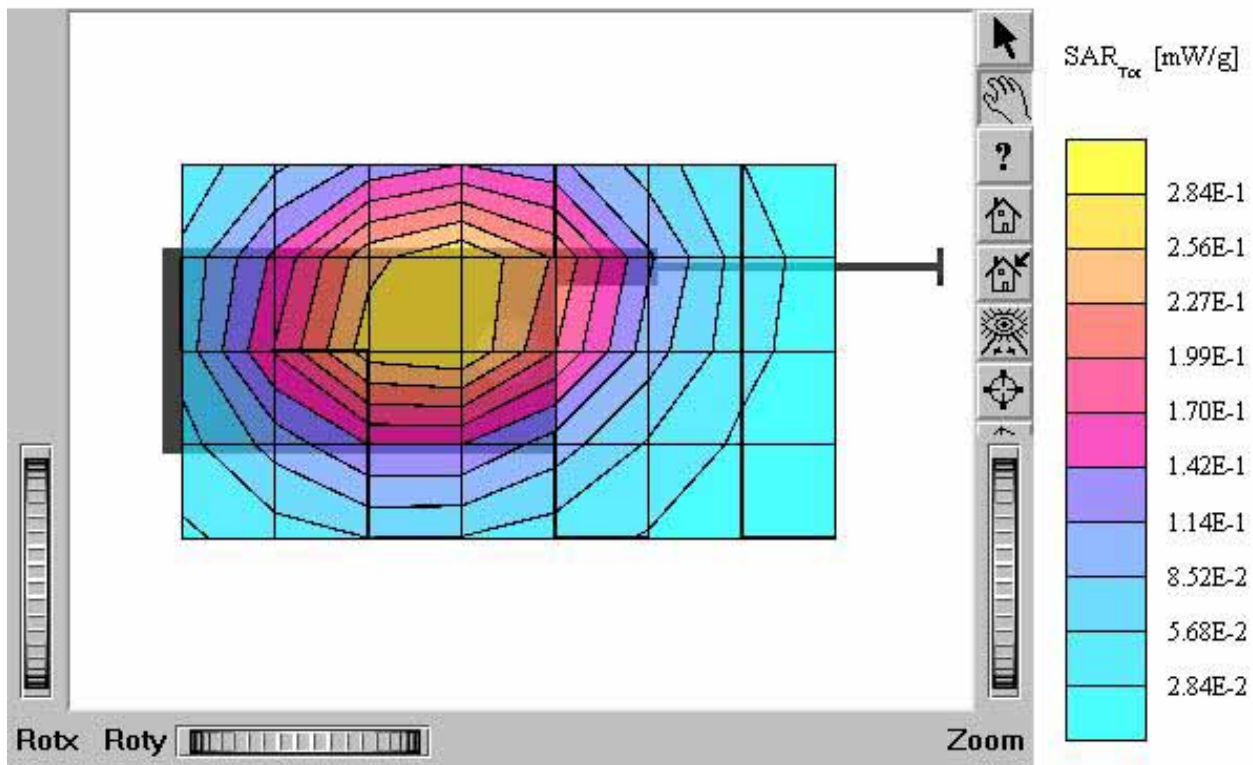

C2000 (Body)

SAM I Phantom; Flat Section; Position: (90°,90°); Frequency: 835 MHz
Probe: ET3DV6 - SN1609; ConvF(6.47,6.47,6.47); Crest factor: 1.0; Body 835 MHz: $s = 0.98$
 mho/m $\epsilon_r = 53.9$ $\rho = 1.00$ g/cm³
Cube 5x5x7; SAR (1g): 0.191 mW/g, SAR (10g): 0.134 mW/g
Coarse: $D_x = 20.0$, $D_y = 20.0$, $D_z = 10.0$
Powerdrift: -0.18 dB
Comment:
MODEL: C2000
Company : UTStarcom Inc.
Test Position: Body / Antenna: in
Mode: CDMA / Channel: 777 (848.31MHz)
Conducted Power : 25.0 dBm
Liquid Temperature: 21.4°C
Date Tested : February 17, 2005

