


C2000 (Body)

SAM I Phantom; Flat Section; Position: (90°,90°); Frequency: 835 MHz
Probe: ET3DV6 - SN1609; ConvF(6.47,6.47,6.47); Crest factor: 1.0; Body 835 MHz: $s = 0.98$
 $\rho/m \epsilon_r = 53.9$ $r = 1.00$ g/cm³
Cube 5x5x7; SAR (1g): 0.160 mW/g, SAR (10g): 0.112 mW/g
Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0
Powerdrift: -0.11 dB
Comment:
MODEL: C2000
Company : UTStarcom Inc.
Test Position: Body / Antenna: out
Mode: CDMA / Channel: 777 (848.31MHz)
Conducted Power : 25.0 dBm
Liquid Temperature: 21.4°C
Date Tested : February 17, 2005

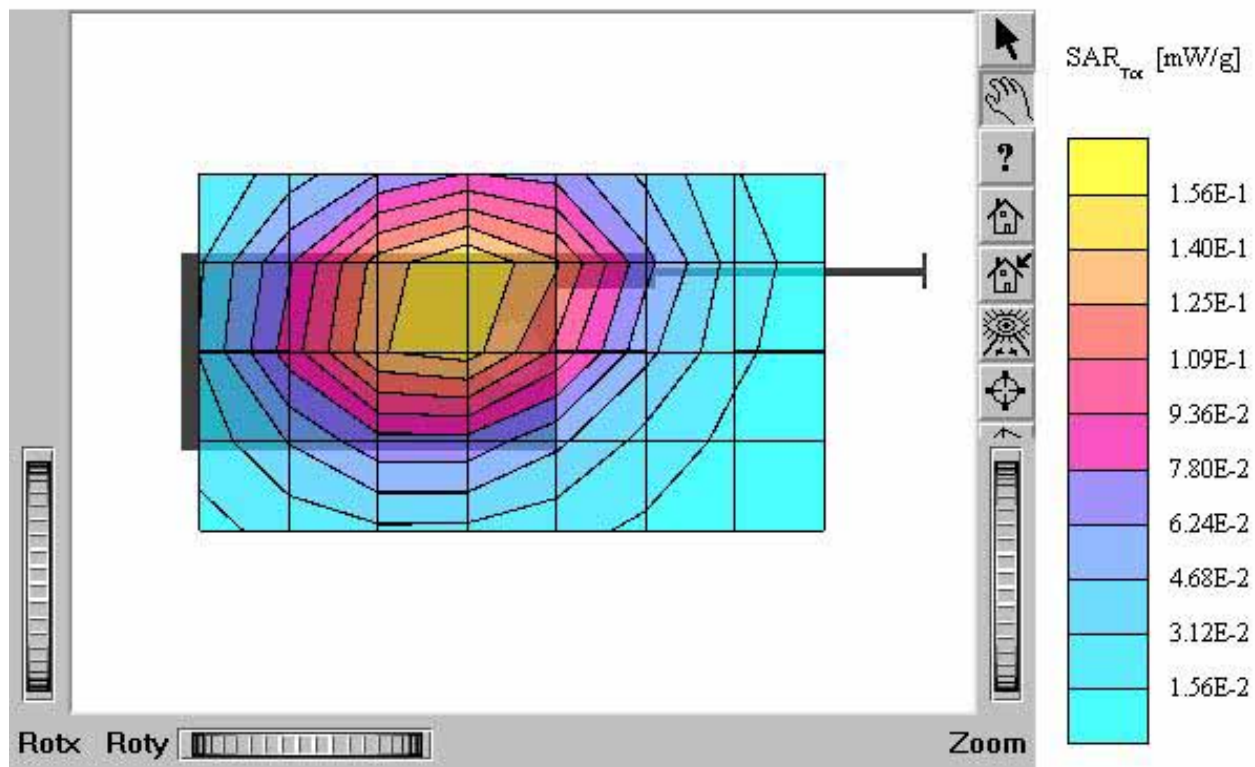

C2000 (Body)

SAM II Phantom; Flat Section; Position: (90°,90°); Frequency: 1900 MHz

Probe: ET3DV6 - SN1609; ConvF(4.60,4.60,4.60); Crest factor: 1.0; Body 1900 MHz: $s = 1.58$ $\rho_{\text{ho/m e}} = 50.9$ $r = 1.00$ g/cm³

Cube 5x5x7; SAR (1g): 0.310 mW/g, SAR (10g): 0.187 mW/g

Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0

Powerdrift: -0.22 dB

Comment:

MODEL: C2000

Company : UTStarcom Inc.


Test Position : Body / Antenna: in

Mode: PCS CDMA / Channel: 25 (1851.25MHz)

Conducted Power : 25.0 dBm


Liquid Temperature: 21.4°C

Date Tested : February 17, 2005

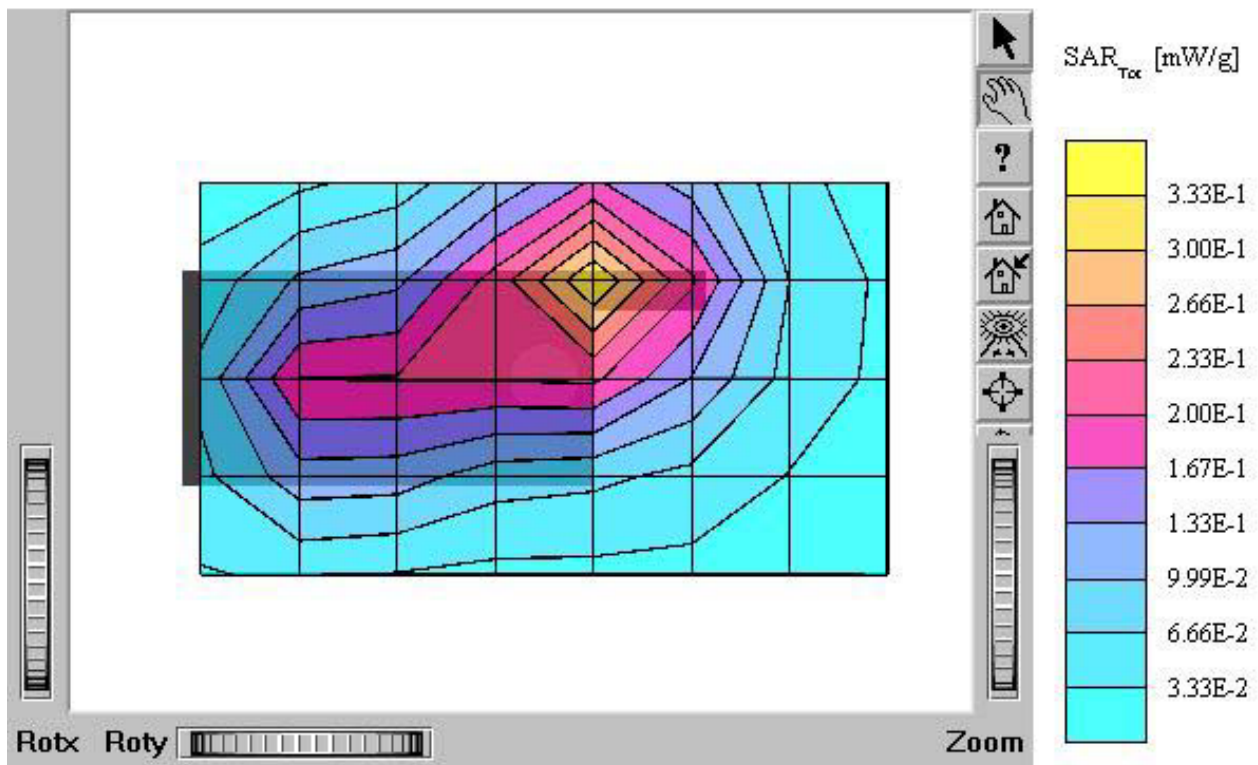

C2000 (Body)

SAM II Phantom: Flat Section; Position: (90°,90°); Frequency: 1900 MHz
Probe: ET3DV6 - SN1609; ConvF(4.60,4.60,4.60); Crest factor: 1.0; Body 1900 MHz: $s = 1.58$
 $\rho_{\text{mho/m}}$ $\epsilon_r = 50.9$ $\rho = 1.00 \text{ g/cm}^3$
Cube 5x5x7: SAR (1g): 0.268 mW/g, SAR (10g): 0.164 mW/g
Coarse: $D_x = 20.0$, $D_y = 20.0$, $D_z = 10.0$
Powerdrift: -0.11 dB
Comment:
MODEL: C2000
Company : UTStarcom Inc.
Mode: PCS CDMA / Channel: 25 (1851.25MHz)
Conducted Power : 25.0 dBm
Liquid Temperature: 21.4°C
Date Tested : February 17, 2005

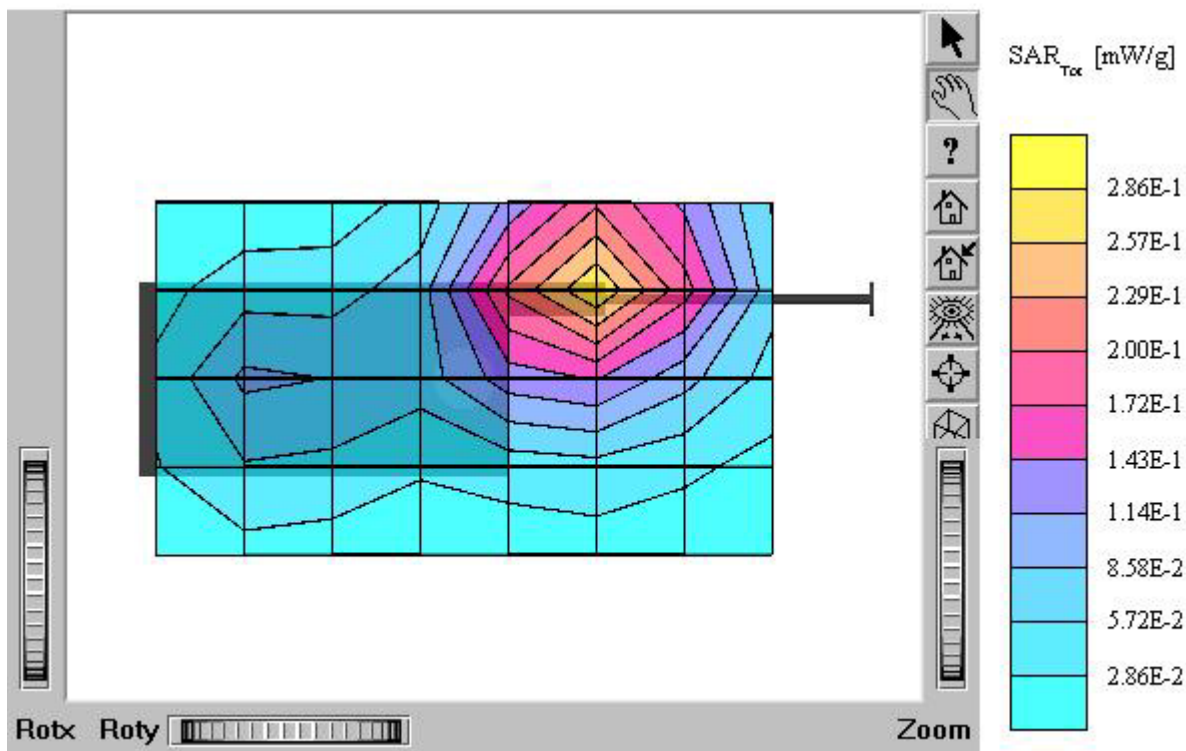

C2000 (Body)

SAM II Phantom; Flat Section; Position: (90°, 90°); Frequency: 1900 MHz

Probe: ET3DV6 - SN1609; ConvF(4.60, 4.60, 4.60); Crest factor: 1.0; Body 1900 MHz: $s = 1.58$ $\rho_{\text{ho/m e,}} = 50.9$ $r = 1.00$ g/cm³

Cube 5x5x7; SAR (1g): 0.283 mW/g, SAR (10g): 0.165 mW/g

Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0

Powerdrift: 0.06 dB

Comment:

MODEL: C2000

Company : UTStarcom Inc.


Test Position : Body / Antenna: in

Mode: PCS CDMA / Channel: 600 (1880.00MHz)

Conducted Power : 25.0 dBm


Liquid Temperature: 21.4°C

Date Tested : February 17, 2005

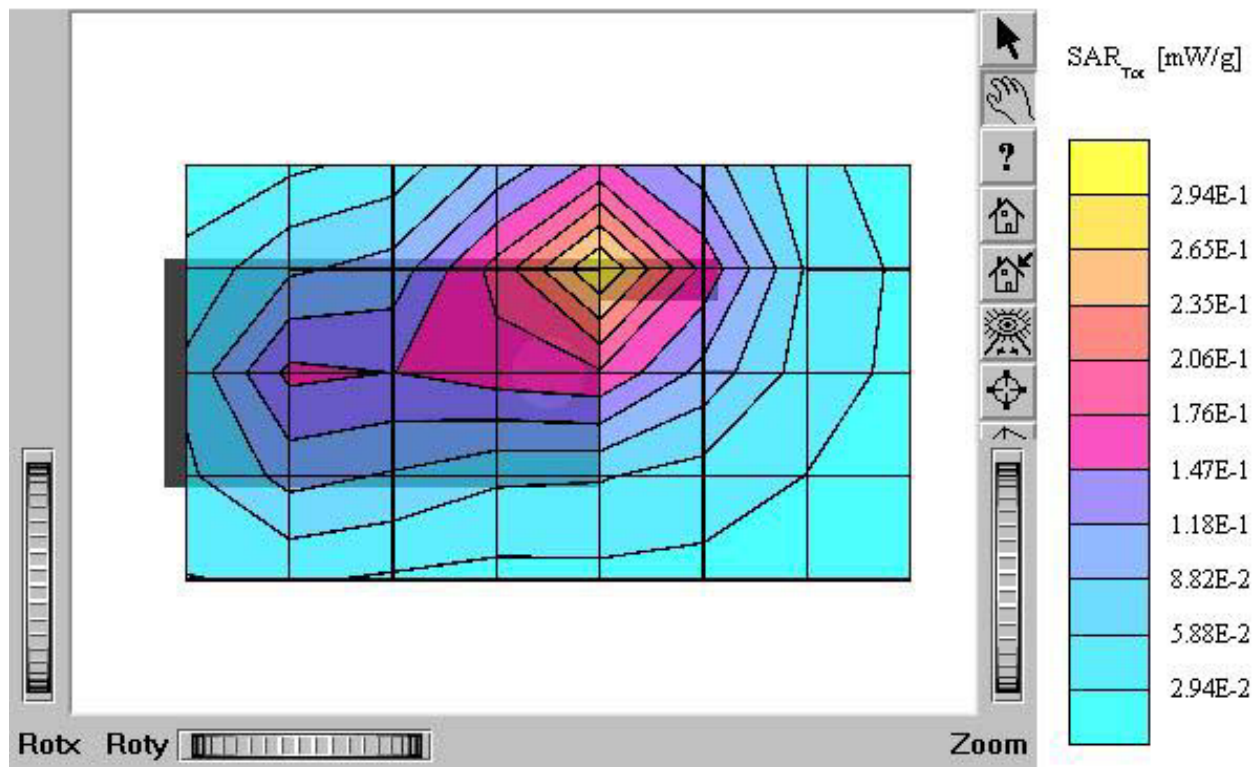


C2000 (Body)

SAM II Phantom: Flat Section; Position: (90°,90°); Frequency: 1900 MHz
Probe: ET3DV6 - SN1609; ConvF(4.60,4.60,4.60); Crest factor: 1.0; Body 1900 MHz: $s = 1.58$
 ρ_{ho}/m $e_r = 50.9$ $r = 1.00$ g/cm³
Cube 5x5x7: SAR (1g): 0.317 mW/g, SAR (10g): 0.193 mW/g
Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0
Powerdrift: -0.07 dB
Comment:
MODEL: C2000
Company : UTStarcom Inc.
Test Position : Body / Antenna: out
Mode: PCS CDMA / Channel: 600 (1880.00MHz)
Conducted Power : 25.0 dBm
Liquid Temperature: 21.4°C
Date Tested : February 17, 2005

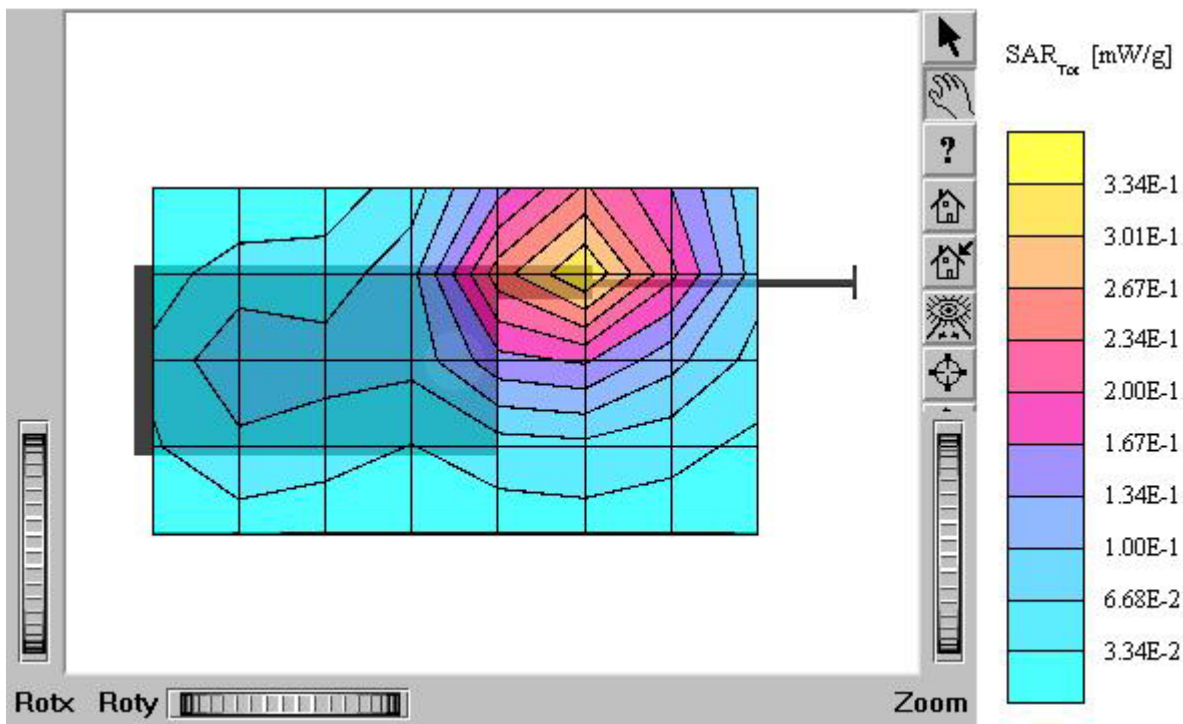


C2000 (Body)

SAM II Phantom; Flat Section; Position: (90°,90°); Frequency: 1900 MHz
Probe: ET3DV6 - SN1609; ConvF(4.60,4.60,4.60); Crest factor: 1.0; Body 1900 MHz: $s = 1.58$
 mho/m $\epsilon_r = 50.9$ $\rho = 1.00 \text{ g/cm}^3$
Cube 5x5x7; SAR (1g): 0.213 mW/g, SAR (10g): 0.129 mW/g
Coarse: $D_x = 20.0$, $D_y = 20.0$, $D_z = 10.0$
Powerdrift: -0.04 dB
Comment:
MODEL: C2000
Company : UTStarcom Inc.
Test Position : Body / Antenna: in
Mode: PCS CDMA / Channel: 1175 (1908.75MHz)
Conducted Power : 25.0 dBm
Liquid Temperature: 21.4°C
Date Tested : February 17, 2005

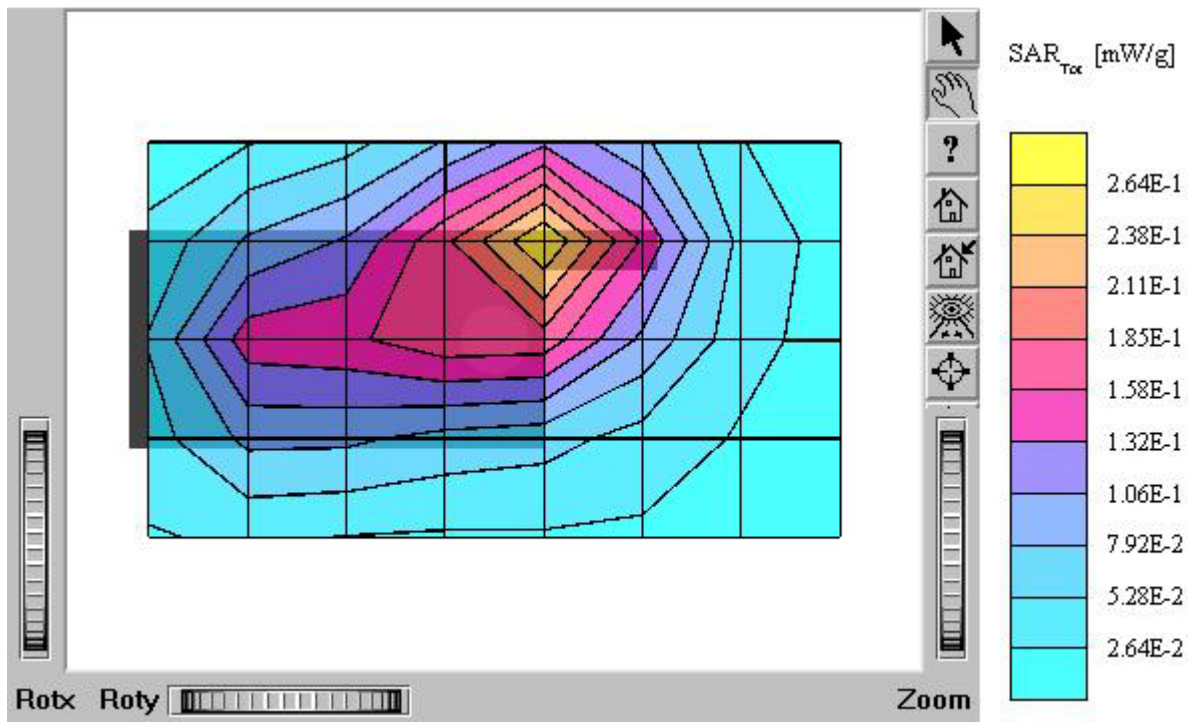

C2000 (Body)

SAM II Phantom: Flat Section; Position: (90°,90°); Frequency: 1900 MHz
Probe: ET3DV6 - SN1609; ConvF(4.60,4.60,4.60); Crest factor: 1.0; Body 1900 MHz: $s = 1.58$
 ρ_{ho}/m $e_r = 50.9$ $r = 1.00$ g/cm³
Cube 5x5x7: SAR (1g): 0.344 mW/g, SAR (10g): 0.205 mW/g
Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0
Powerdrift: -0.29 dB
Comment:
MODEL: C2000
Company : UTStarcom Inc.
Test Position : Body / Antenna: out
Mode: PCS CDMA / Channel: 1175 (1908.75MHz)
Conducted Power : 25.0 dBm
Liquid Temperature: 21.4°C
Date Tested : February 17, 2005

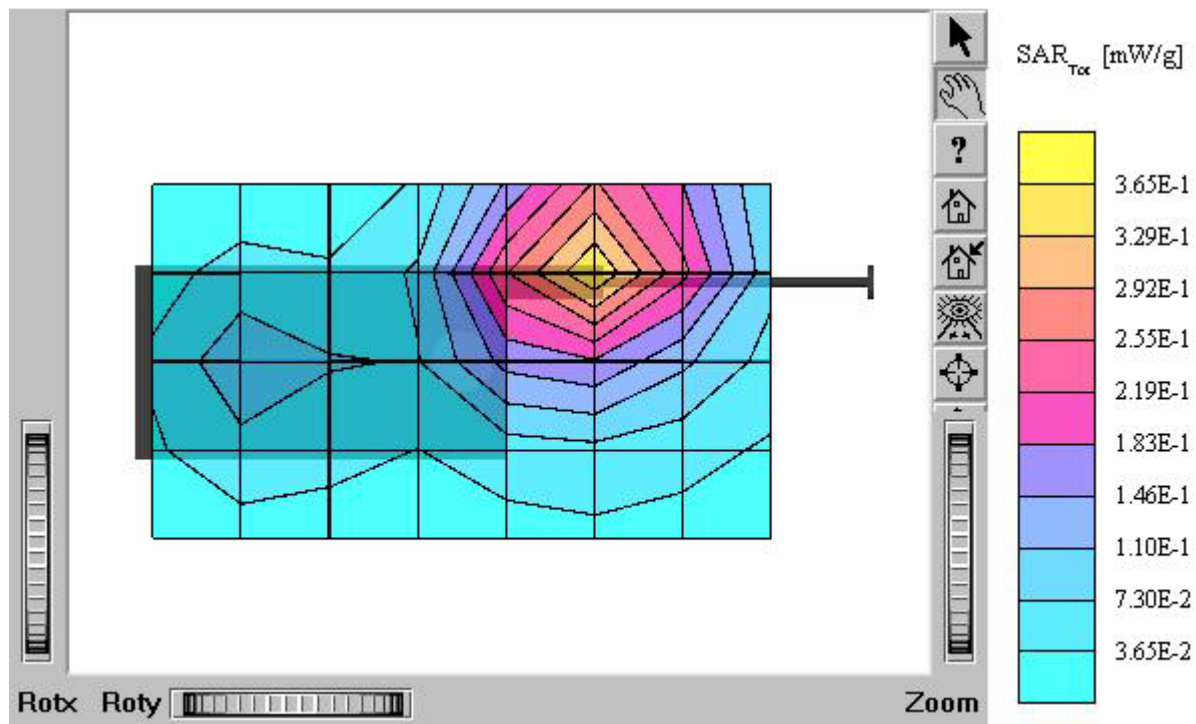

C2000 (Body)

SAM I Phantom: Section: Position: ; Frequency: 835 MHz

Probe: ET3DV6 - SN1609; ConvF(6.47,6.47,6.47); Crest factor: 1.0; Body 835 MHz: $s = 0.98$
 $\rho = 53.9 \text{ g/cm}^3$ $r = 1.00$

:

Z-Axis: $D_x = 0.0$, $D_y = 0.0$, $D_z = 5.0$

Comment:

MODEL: C2000

Company : UTStarcom Inc.


Test Position: Body / Antenna: in

Mode: AMPS / Channel: 383 (836.49MHz)

Conducted Power: 27.0 dBm

Liquid Temperature: 21.4°C

Date Tested : February 17, 2005

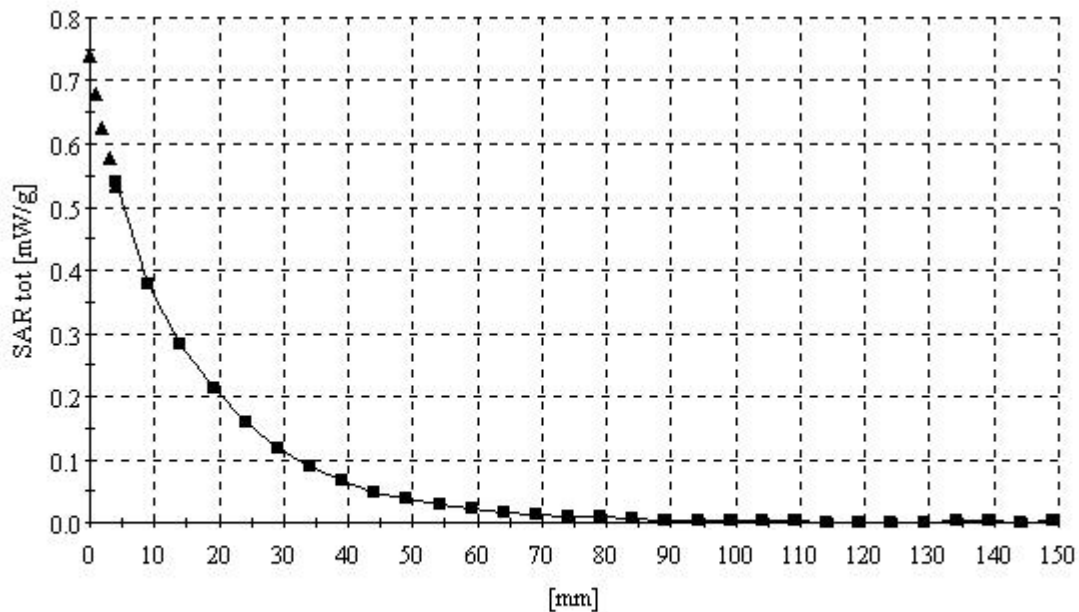

C2000 (Body)

SAM I Phantom; Section; Position; ; Frequency: 835 MHz

Probe: ET3DV6 - SN1609; ConvF(6.47,6.47,6.47); Crest factor: 1.0; Body 835 MHz: $s = 0.98$
 $\rho_{\text{ho/m}} e_r = 53.9$ $r = 1.00$ g/cm³

Z-Axis: Dx = 0.0, Dy = 0.0, Dz = 5.0

Comment:

MODEL: C2000

Company : UTStarcom Inc.


Test Position: Body / Antenna: in

Mode: CDMA / Channel: 363 (835.89MHz)

Conducted Power : 25.0 dBm

Liquid Temperature: 21.4°C

Date Tested : February 17, 2005

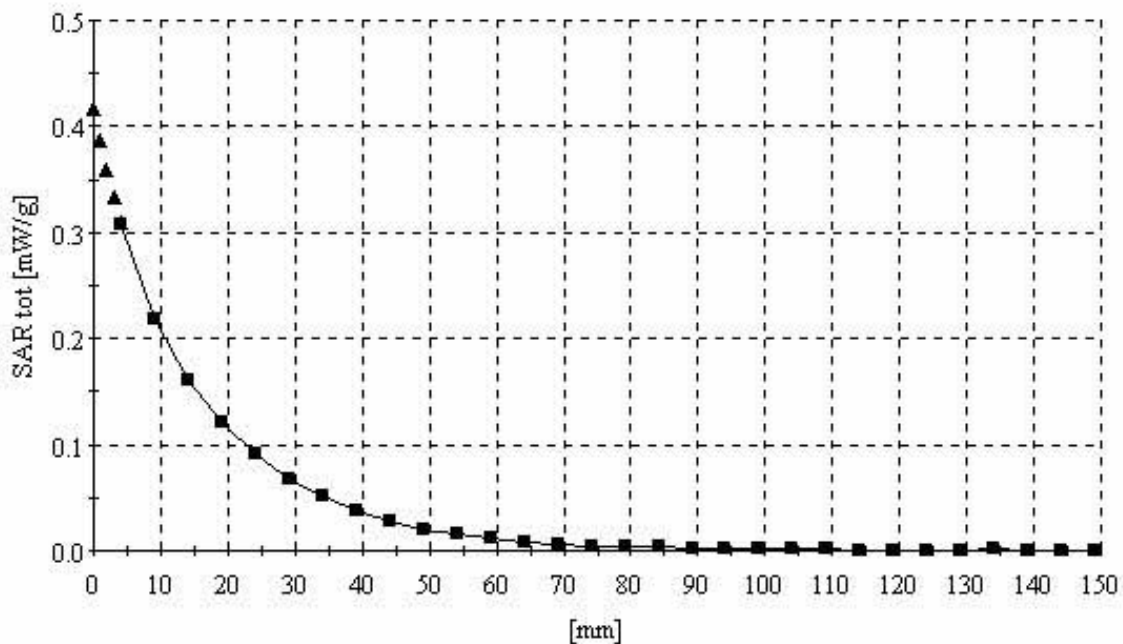

C2000 (Body)

SAM II Phantom: Section: Position: ; Frequency: 1900 MHz

Probe: ET3DV6 - SN1609; ConvF(4.60,4.60,4.60); Crest factor: 1.0; Body 1900 MHz: $s = 1.58$
 ρ_{ho}/m $e_r = 50.9$ $r = 1.00$ g/cm³

:

Z-Axis: Dx = 0.0, Dy = 0.0, Dz = 5.0

Comment:

MODEL: C2000

Company : UTStarcom Inc.

Test Position : Body / Antenna: out

Mode: PCS CDMA / Channel: 1175 (1908.75MHz)

Conducted Power : 25.0 dBm

Liquid Temperature: 21.4°C

Date Tested : February 17, 2005

