



ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR FCC CLASS B CERTIFICATION

Test report file number : E042R-038

Applicant : Humax Co., Ltd.

Address : Humax Building, 212-1, Yubang-Dong, Yongin-City, Gyunggi-Do, 449-080, Korea

Manufacturer : Humax Co., Ltd.

Address : Humax Building, 212-1, Yubang-Dong, Yongin-City, Gyunggi-Do, 449-080, Korea

Type of Equipment : Digital Satellite Receiver

FCC ID. : O6ZDTC210

Model Name : DTC210

Multiple Model Name : N/A

Serial number : 3D20000081

Total page of Report : 17 pages (including this page)

Date of Incoming : January 06, 2004

Date of Issuing : February 14, 2004

SUMMARY

The equipment complies with the requirements of **FCC CFR 47 PART 15 SUBPART B, SECTION 15.101.**

This test report contains only the result of a single test of the sample supplied for the examination. It is not a general valid assessment of the features of the respective products of the mass-production

Prepared by: _____

Yung-Min, Choi / Project Engineer
EMC Div.
ONETECH Corp.

Reviewed by: _____

Geul-Won, Lee / Chief Engineer
EMC Div.
ONETECH Corp.



CONTENTS

Page

1. VERIFICATION OF COMPLIANCE	4
2. GENERAL INFORMATION	5
2.1 PRODUCT DESCRIPTION	5
2.2 MODEL DIFFERENCES	5
2.3 RELATED SUBMITTAL(S) / GRANT(S)	5
2.4 TEST SYSTEM DETAILS	6
2.5 TEST METHODOLOGY	6
2.6 TEST FACILITY	6
3. SYSTEM TEST CONFIGURATION	7
3.1 JUSTIFICATION	7
3.2 OPERATING CONDITION OF THE EUT	7
3.3 CABLE DESCRIPTION	7
3.4 NOISE SUPPRESSION PARTS ON CABLE	7
3.5 EQUIPMENT MODIFICATIONS	8
3.6 CONFIGURATION OF TEST SYSTEM	8
3.6.1 Line Conducted Test	8
3.6.2 Radiated Emission Test	8
3.6.3 Output Signal Level Test	8
3.6.4 Output Terminal Conducted Spurious Emission test	8
3.6.5 Transfer Switch Isolation Test	9
4. PRELIMINARY TEST	9
4.1 AC POWER LINE CONDUCTED EMISSION TEST	9
4.2 RADIATED EMISSIONS TESTS	9
5. FINAL RESULT OF MEASUREMENT	10
5.1 CONDUCTED EMISSION TEST	10
5.2 RADIATED EMISSION TEST	12
5.3 OUTPUT TERMINAL SIGNAL LEVEL TEST	13
5.4 OUTPUT TERMINAL CONDUCTED SPURIOUS EMISSIONS TEST	14
5.5 TRANSFER SWITCH ISOLATION TEST	15



6. FIELD STRENGTH CALCULATION16

7. LIST OF TEST EQUIPMENT17



1. VERIFICATION OF COMPLIANCE

- . APPLICANT : Humax Co., Ltd.
- . ADDRESS : Humax Building, 212-1, Yubang-Dong, Yongin-City, Gyunggi-Do, 449-080, Korea
- . CONTACT PERSON : Mr. Jung-Jae, Choi/ Engineering Manager
- . TELEPHONE NO : +82-31-600-6362
- . FCC ID : O6ZDTC210
- . MODEL NO/NAME : DTC210
- . SERIAL NUMBER : N/A
- . DATE : February 14, 2004

DEVICE TYPE	TV INTERFACE DEVICE - UNINTENTIONAL RADIATOR
E.U.T. DESCRIPTION	Digital Satellite Receiver
THIS REPORT CONCERNS	ORIGINAL GRANT
MEASUREMENT PROCEDURES	MP-3, ANSI C63.4: 2001
TYPE OF EQUIPMENT TESTED	PRE-PRODUCTION
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	CERTIFICATION
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SECTION 15.101
MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE	No
FINAL TEST WAS CONDUCTED ON	3 METER OPEN AREA TEST SITE

- . This device has shown compliance with the conducted emissions limits in 15.107 adopted under FCC 02-107 (ET Docket 98-80). The device may be marketed after July 11, 2005 affected by the 15.37(j) transition provisions.
- . The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.



2. GENERAL INFORMATION

2.1 Product Description

The Humax Co., Ltd., Model DTC210 (referred to as the EUT in this report) is a Digital Satellite Receiver that can receive digital satellite, digital broadcast (ATSC), cable TV service. The EUT has RF remote antenna connection to communicate with RF remote controller (FCC ID: G95REM002). Product specification described herein was obtained from product data sheet or user's manual.

CHASSIS TYPE	Metal
LIST OF EACH OSC. OR CRY. FREQ.(FREQ.>=1MHz)	27.0MHz(System Clock), 4.9152MHz(Modem Clock), 20.25MHz(NTSC Video Clock), 26.8MHz(ATSC Channel Clock), 10.111MHz(QPSK Channel Clock), 18.432MHz(NTSC Audio Clock) 18.432MHz(Smart Card Clock)
POWER REQUIREMENT	AC100-120V, 50/60Hz, MAX. 40W
NUMBER OF LAYERS	6 Layers
ATSC/NTSC TUNER Type NO. / MFR	FCV1236 / Philips
RF MODULATOR Type NO. / MFR	RMVP13450DX / SAMSUNG
TYPE OF ANTENNA	75 Ohm, F-type connector
RF REMOTE RECEIVER	Receiving Frequency: 308.5MHz
EXTERNAL TERMINALS	RCA 2EA(Audio L. R/Video), Y/Pb/Pr, RGB, DVI, Optical/Coaxial Digital Audio, S-Video, RF Input 2/Output 1. RF Antenna, VCR Control Output, Modem RJ11

2.2 Model Differences

The difference(s) compared to the EUT is as follows: none

2.3 Related Submittal(s) / Grant(s)

Original submittal only



2.4 Test System Details

The model numbers for all the equipments which were used in the tested system is:

Model	Manufacturer	FCC ID	Description	Connected to
DTC210	Humax Co., Ltd.	O6ZDTC210	Digital Satellite Receiver (EUT)	-
GHV-S9990	GoldStar	N/A	VCR	EUT
LT150AA	KTV	BRFLT150AA	LCD TV Receiver & Monitor	EUT
HDTV996	SENCORE	N/A	VSB Player	EUT
RF-100	DOCTOR DESIGN	N/A	Set Top Box RF Generator	EUT
CM2000	CONEXANT	N/A	DSS Modulator	-

2.5 Test Methodology

The measurement for Radiated Emission, Line Conducted Emission, Output signal levels and Output Terminal Conducted Spurious Emission were performed in accordance with the procedures described in MP-3 and ANSI C63.4: 2001. Radiated testing was performed at a distance of 3 meters from EUT to the antenna.

2.6 Test Facility

The open area test site and conducted measurement facilities are located on at 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-Kun, Kyunggi-Do 464-080 Korea. Description details of test facilities were submitted to the Commission on January 18, 2002. (Registration Number: 92819)



3. SYSTEM TEST CONFIGURATION

3.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	Humax Co., Ltd.	DTC210 MAIN B/D REV.1.0	N/A
Front Board	Humax Co., Ltd.	DTC-210 FRONT B/D REV 1.0	N/A
Reset Board	Humax Co., Ltd.	DTC-210 RESET B/D REV 1.0	N/A
RF Remote Receiver Board	N/A	RF Remote Receiver B/D REV.1.0	N/A
Power Board	Dong Yang Instrument	PU104D-1	N/A

3.2 Operating Condition of The EUT

According to the requirements in Subpart B of Part 15, the measurement is made at each function of the EUT being connected with appropriate cables and peripherals for termination.

This model DTC210 has video/audio output terminals in RCA-type plugs, Satellite antenna input, TV antenna input, Cable input and RF output terminal. Therefore, every measurement was investigated in the operation modes. The EUT was received a signal through signal generator directly with receiving RF remote signal.

3.3 Cable Description

	Power Cord Shielded (Y/N)	I/O cable Shielded (Y/N)	Length (M)
Digital Satellite Receiver (EUT)	N	N Y	1.5(P), 1.5(D) 1.5(D)
VCR	N	N	1.5(P), 1.2(D)
LCD Monitor	N	Y	0.8(D)

* The marked "(D)" means the Data Cable and "(P)" means the Power Cable.

3.4 Noise Suppression Parts on Cable

	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
Digital Satellite Receiver (EUT)	N	N/A	Y	BOTH END
VCR	N	N/A	Y	BOTH END
LCD Monitor	Y	AC/DC Adapter	Y	BOTH END



3.5 Equipment Modifications

To achieve compliance to FCC part 15 rules, the following change(s) was made by ONETECH Corp. during compliance testing:

“There was no Modified items during EMI test”

3.6 Configuration of Test System

3.6.1 Line Conducted Test

The EUT was connected to LISN, all supporting equipment were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.4: 2001 7.2.3 to determine the worse operating conditions.

3.6.2 Radiated Emission Test

Preliminary radiated emission test were conducted using the procedure in ANSI C63.4: 2001 8.3.1.1 to determine the worse operating conditions. Final radiated emission test were conducted at 3-meter open area test site.

3.6.3 Output Signal Level Test

The output voltage of video carrier frequency at the RF-output terminal of the EUT was measured at 3 and 4 channel connecting directly to a spectrum analyzer with 50ohm input impedance via 75-to-50ohm matching pad. Indicated voltage on screen of measuring instrument was converted to the voltage of 75ohm system.

Data conversion method is as follows.

$$V_{75}[\text{uV}] = 10^{(V_r + CF)/20}[\text{uV}]$$

here, V_{75} : Voltage at the RF-out terminal of 75ohm in uV,
 V_r : Voltage read at analyzer with 50ohm input-impedance in dBuV,
CF : Conversion Factor of the matching pad in dB.

3.6.4 Output Terminal Conducted Spurious Emission test

Any other spectrum at RF-output terminal appearing on frequencies removed by more than 4.6 MHz below or 7.4 MHz above the video carrier frequency of EUT was searched at 3 and 4 channel.

Data conversion method is as follows.

$$V_{75}[\text{uV}] = 10^{(V_r + CF + AT)/20}[\text{uV}]$$

here, V_{75} : Voltage at the RF-out terminal of 75ohm in uV,
 V_r : Voltage read at analyzer with 50ohm input-impedance in dBuV,
CF : Conversion Factor of the matching pad in dB,
AT : Attenuation of attenuator in dB.



3.6.5 Transfer Switch Isolation Test

As a transfer switch was equipped with EUT as an antenna-in, measurement of isolation were made at RF-input terminal with rated input impedance.

The maximum voltage of video carrier frequency of the EUT at the antenna input (RF-in) terminal of the switch was measured for both channels.

Data conversion method is as follows.

$$V_{75}[\text{uV}] = 10^{(V_r + CF - PG + AT)/20}[\text{uV}]$$

- here, V_{75} : Voltage at the RF-out terminal of 75ohm in uV,
- V_r : Voltage read at analyzer with 50ohm input-impedance in dBuV,
- CF : Conversion Factor of the matching pad in dB,
- PG : Gain of pre-amplifier in dB,
- AT: Attenuation of attenuator in dB.

4. PRELIMINARY TEST

4.1 AC Power line Conducted Emission Test

During Preliminary Tests, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
CH. 3 (Input: ATCS)	
CH 3 (Input: Digital Satellite)	
CH 3 (Input: CATV)	
CH. 4 (Input: ATCS)	
CH 4 (Input: Digital Satellite)	X
CH 4 (Input: CATV)	

4.2 Radiated Emissions Tests

During Preliminary Tests, the following operating modes were investigated.

Operation Mode	The Worse operating condition (Please check one only)
CH. 3 (Input: ATCS)	
CH 3 (Input: Digital Satellite)	
CH 3 (Input: CATV)	
CH. 4 (Input: ATCS)	
CH 4 (Input: Digital Satellite)	X
CH 4 (Input: CATV)	



5. FINAL RESULT OF MEASUREMENT

Preliminary test was done in normal operation mode. And the final measurement was selected for the maximized emission level.

5.1 Conducted Emission Test

Humidity Level : 51 % Temperature : 20 °C
 Limits apply to : FCC CFR 47, PART 15, SUBPART B, Section 15.107 (a)
 Type of Test : TV INTERFACE DEVICE
 Result : PASSED BY -5.11 dB at 4.92 MHz under peak mode

EUT : Digital Satellite Receiver Date: January 08, 2004
 Operating Condition : CH 4 (Input: Digital Satellite)
 Detector : CISPR Quasi-Peak (6 dB Bandwidth: 9 kHz)


Frequency (MHz)	Line	Peak (dBuV)		Margin (dB)
		Emission level	Q.P Limits	
2.72	N	44.85	56.00	-11.15
3.92	H	48.31	56.00	-7.69
4.05	N	48.57	56.00	-7.43
4.92	N	50.89	56.00	-5.11
5.18	N	50.82	56.00	-9.18
5.25	H	50.39	60.00	-9.61
Frequency (MHz)	Line	Average (dBuV)		Margin (dB)
		Emission level	Limits	
3.92	H	37.86	46.00	-8.14
4.05	N	39.34	46.00	-6.66
4.92	N	39.47	46.00	-6.53
5.18	N	41.52	46.00	-8.48
5.25	H	41.16	50.00	-8.84

Line Conducted Emission Tabulated Data


Remark : "H": Hot Line, "N": Neutral line, "P": Peak detect

See next page for an overview sweep performed with peak and average detector.

Tested by: Sue-Yong, Lee / Test Engineer

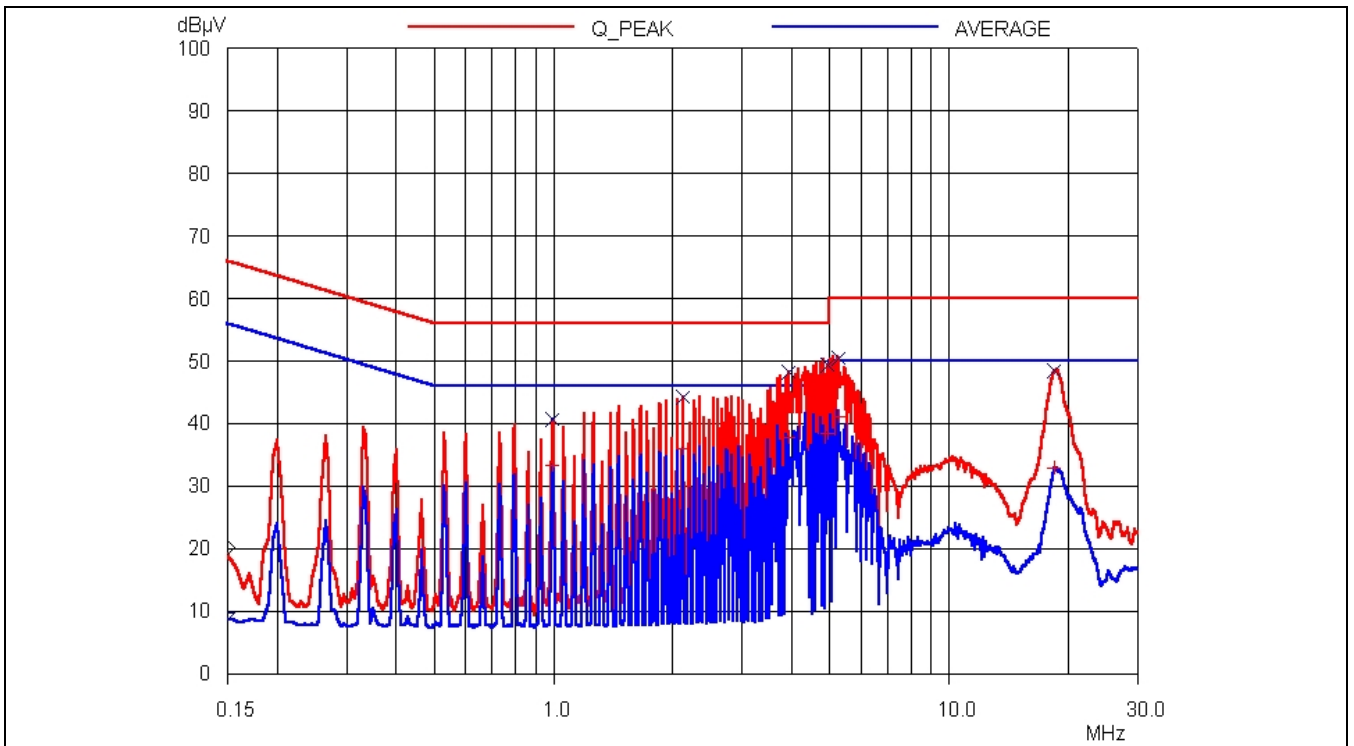

HOT LINE

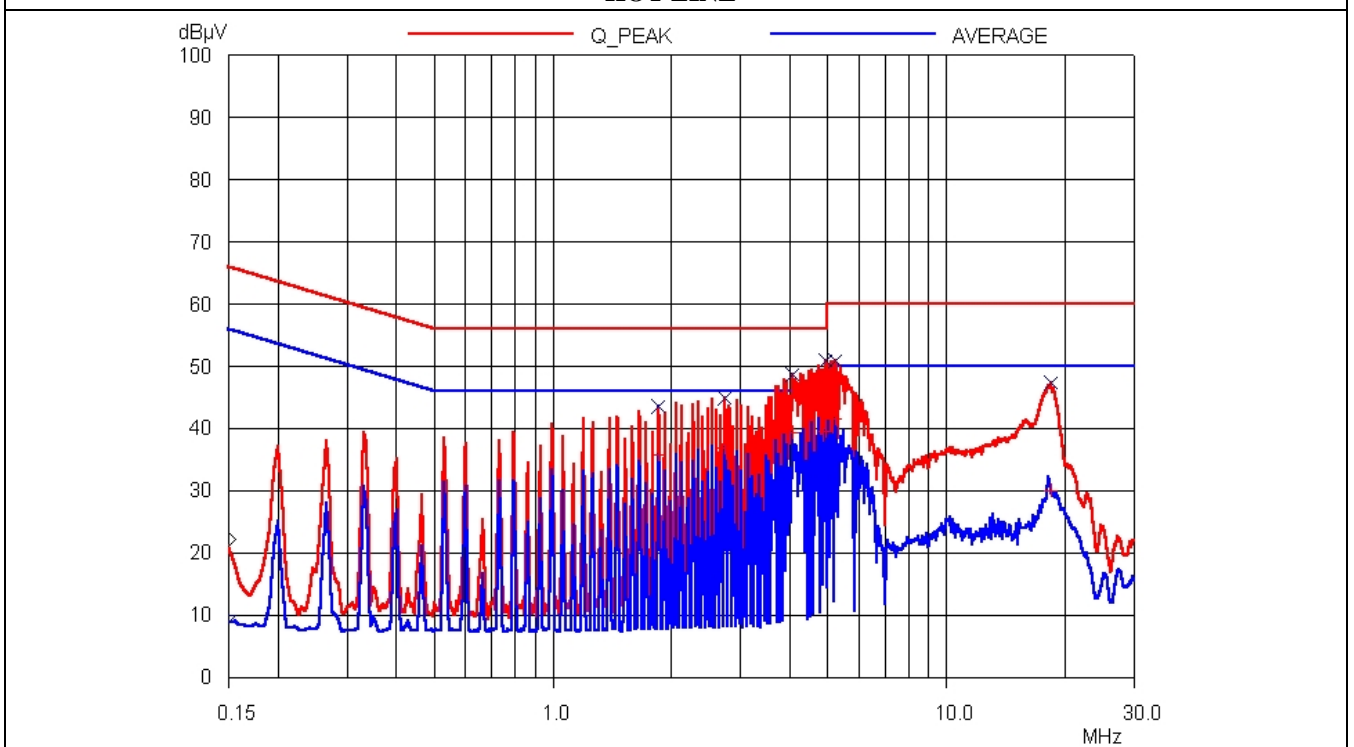

NEUTRAL LINE



5.2 Radiated Emission Test

The following table shows the highest levels of radiated emission on both polarizations of horizontal and vertical.

Humidity Level : 52 % Temperature : 17 °C
 Limits apply to : FCC CFR 47, PART 15, SUBPART B, Section 15.109 (a)
 Type of Test : TV INTERFACE DEVICE
 Result : PASSED BY -5.27 dB at 924.40 MHz

EUT : Digital Satellite Receiver Date: January 07, 2004
 Operating Condition : CH 4 (Input: Digital Satellite)
 Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)
 Distance : 3 Meter

Radiated Emission		Ant	Correction Factors		Total	FCC CLASS B	
Freq. (MHz)	Amp. (dBuV)	Pol.	Ant. (dBuV/m)	Cable (dB)	Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
74.14	19.70	V	7.31	1.00	28.01	40.00	-11.99
111.29	15.70	H	13.06	1.21	29.97	43.50	-13.53
148.39	21.80	H	13.89	1.34	37.03	43.50	-6.47
222.20	24.20	H	10.94	1.69	36.83	46.00	-9.17
259.60	26.40	H	12.39	1.85	40.64	46.00	-5.36
311.00	17.40	H	14.69	2.07	34.16	46.00	-11.84
371.40	17.90	H	14.58	2.37	34.85	46.00	-11.15
407.40	18.60	H	15.43	2.44	36.47	46.00	-9.53
482.20	20.80	V	17.30	2.62	40.72	46.00	-5.28
636.55	9.50	H	19.62	3.04	32.16	46.00	-13.84
924.40	13.60	H	23.10	4.03	40.73	46.00	-5.27

Radiated Emission Tabulated Data



5.3 Output Terminal Signal Level Test

The following table shows that the all modes of operation and worst-case emissions were investigated

Humidity Level : 50 %

Temperature : 19 °C

Limits apply to : FCC CFR 47, PART 15, SUBPART B (Section 15.115)

EUT : DIGITAL SATELLITE RECEIVER

Date: January 08, 2004

Detector : Span : 10MHz SWP : 2 sec

RBW : 100kHz VBW : 300kHz

Output Impedance of RF-Output Terminal: 75ohm

-. Video signal

CH	Freq.(MHz)	Reading(dBuV)	M/P Loss(dB)	Signal Level(uV)	Limit(uV)	Margin(dB)
3	61.53	58.8	6.0	1737.8	3000	-4.74
4	67.24	56.9	6.0	1396.4	3000	-6.64

-. Audio signal

CH	Freq.(MHz)	Reading(dBuV)	M/P Loss(dB)	Signal Level(uV)	Limit(uV)	Margin(dB)
3	56.64	43.40	6.0	295.1	671	-7.14
	65.90	42.80	6.0	275.4	671	-7.74
4	62.62	42.60	6.0	269.2	671	-7.93
	71.88	41.60	6.0	239.9	671	-8.93

MP = Impedance Matching Pad

*Sample Calculation at 61.53MHz = $10^{[(58.8+6.0)/20]} = 1737.8\mu\text{V}$

*Margin [dB] = $20 \log (R/L)$ where, R : Signal Level, [uV] or [uV/m],

L : Corresponding Limit, [uV] or [uV/m].

Tested by: Sue-Yong, Lee / Test Engineer



5.4 Output Terminal Conducted Spurious Emissions Test

The following table shows that frequency range of 30MHz to 1000MHz removed by more than 4.6 MHz below or 7.4 MHz above the video carrier frequency of EUT was investigated at each channel.

Humidity Level : 50 %

Temperature : 19 °C

Limits apply to : FCC CFR 47, PART 15, SUBPART B (Section 15.115)

EUT : DIGITAL SATELLITE RECEIVER

Date: January 08, 2004

Detector : Span : 10MHz SWP : 2 sec

RBW : 100kHz VBW : 300kHz

Output Impedance of RF-Output Terminal: 75ohm

CH.	Freq. (MHz)	Reading (dBuV)	M/P Loss (dB)	Output Level(uV)	Limit (uV)	Margin (dB)
3	158.00	12.60	6.00	8.51	95.00	-20.95
	395.00	11.90	6.00	7.85	95.00	-21.65
	728.00	10.80	6.00	6.92	95.00	-22.75
	924.00	12.30	6.00	8.22	95.00	-21.25
4	42.60	14.10	6.00	10.12	95.00	-19.45
	158.00	13.10	6.00	9.02	95.00	-20.45
	395.70	13.90	6.00	9.89	95.00	-19.65
	729.40	11.70	6.00	7.67	95.00	-21.85

* Sample Calculation at 158.0MHz = $10^{[(12.6 + 6.0)/20]} = 8.51\mu\text{V}$

*Margin [dB] = 20 log (R/L) where, R : Output Level, [uV] or [uV/m],

L : Corresponding Limit, [uV] or [uV/m].

Tested by: Sue-Yong, Lee / Test Engineer



5.5 Transfer Switch Isolation Test

The following table shows that the maximum voltage of video carrier frequency of the EUT at the antenna input (RF-in) terminal of the switch was measured for both channels.

Humidity Level : 53 % Temperature : 18 °C
Limits apply to : FCC CFR 47, PART 15, SUBPART B (Section 15.115)

EUT : DIGITAL SATELLITE RECEIVER Date: January 08, 2004
Detector : Span : 1 MHz SWP : 30 msec
RBW : 10 kHz VBW : 30 kHz

Output Impedance of RF-Output Terminal: 75ohm

CH.	Freq. (MHz)	Meter Reading (dBuV)	M/P Loss (dB)	Preamp Gain(dB)	Attn. (dB)	Signal Level (uV)	Limit (uV)	Margin (dB)
“There was no found any emission during the above test”								

Note : To clarify the emissions emanated from RF output terminal the EUT, RF pre-amplifier was utilized.
The gain of pre-amplifier at each frequency measured from the EUT was obtained after sufficient warm-up for stabilization of gain.

Tested by: Sue-Yong, Lee / Test Engineer



6. FIELD STRENGTH CALCULATION

Meter readings are compared to the specification limit correcting for antenna and cable losses

+ Meter reading (dBuV)

+ Cable Loss (dB)

+ Antenna Factor (Loss) (dB/meter)

= Corrected Reading (dBuV/meter)

- Specification Limit (dBuV/meter)

= dB Relative to Spec (+/- dB)



7. LIST OF TEST EQUIPMENT

No.	EQUIPMENTS	MFR.	MODEL	SER. NO.	LAST CAL	DUE CAL	USE
1.	Test receiver	R/S	ESVS 10	827864/005	DEC/03	12MONTH	■
2.	Test receiver	R/S	ESHS 10	834467/007	APR/03	12MONTH	■
3.	Spectrum analyzer	HP	8566B	3407A08547	AUG/03	12MONTH	
4.	Spectrum analyzer	HP	8568B	3109A05456	MAY/03	12MONTH	■
5.	RF preselector	HP	85685A	3107A01264	MAY/03	12MONTH	■
6.	Quasi-Peak Adapter	HP	85650A	3107A01542	MAY/03	12MONTH	■
7.	Matching Pad	TME	ZT-130	9F 954	N/A	N/A	■
8.	TRILOG Broadband Antenna	Schwarzbeck	VULB9163	VULB9163 166	FEB/03	12MONTH	■
9.	Biconical antenna	EMCO	3104C	9109-4443	MAY/03	12MONTH	■
				9109-4444	JUL/03	12MONTH	
		Schwarzbeck	VHA9103	91031852	JAN/04	12MONTH	
10.	Log Periodic antenna	EMCO	3146	9109-3213	AUG/02	12MONTH	■
				9109-3214	JUL/03	12MONTH	
				9109-3217	MAY/03	12MONTH	
		Schwarzbeck	9108-A(494)	62281001	JAN/04	12MONTH	
11.	LISN	EMCO	3825/2	9109-1867	AUG/03	12MONTH	■
				9109-1869	OCT/03	12MONTH	■
12.	Position Controller	EMCO	1090	9107-1038	N/A	N/A	■
13.	Turn Table	EMCO	1080-1.21	9109-1576	N/A	N/A	■
14.	Antenna Master	EMCO	1070-1	9109-1624	N/A	N/A	■