

# Radio Test Report

Report No.:STS2409015W01

Issued for

Gojo Industries, Inc.

One Gojo Plaza Suite 500P.O. Box 991, Akron, OH 44311  
United States

Product Name: Activity Counter

Brand Name: PURELL SMARTLINK(R)

Model Name: Activity Counter

Series Model(s): N/A

FCC ID: O76-X2HG2400A

Test Standards: FCC Part15.247

The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Shenzhen STS Test Services Co., Ltd.



TEST REPORT

Applicant's Name..... : Gojo Industries, Inc.
Address ..... : One Gojo Plaza Suite 500P.O. Box 991, Akron, OH 44311 United States
Manufacturer's Name ..... : Gojo Industries, Inc.
Address ..... : One Gojo Plaza Suite 500P.O. Box 991, Akron, OH 44311 United States

Product Description

Product Name ..... : Activity Counter
Brand Name ..... : PURELL SMARTLINK(R)
Model Name ..... : Activity Counter
Series Model(s) ..... : N/A

Test Standards..... : FCC Part15.247
Test Procedure ..... : ANSI C63.10-2020

This device described above has been tested by STS, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Shenzhen STS Test Services Co., Ltd.

Date of Test..... :
Date of receipt of test item ..... : 03 Sept. 2024
Date (s) of performance of tests..... : 03 Sept. 2024 ~ 23 Sept. 2024
Date of Issue..... : 25 Sept. 2024
Test Result..... : Pass

Testing Engineer : [Signature]
(Aaron Bu)

Technical Manager : [Signature]
(Tony Liu)

Authorized Signatory : [Signature]
(Bovey Yang)





## Table of Contents

<b>1. SUMMARY OF TEST RESULTS</b>	<b>6</b>
1.1 TEST FACTORY	7
1.2 MEASUREMENT UNCERTAINTY	7
<b>2. GENERAL INFORMATION</b>	<b>8</b>
2.1 GENERAL DESCRIPTION OF THE EUT	8
2.2 DESCRIPTION OF THE TEST MODES	9
2.3 TEST SOFTWARE AND POWER LEVEL	9
2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	10
2.6 EQUIPMENTS LIST	11
<b>3. EMC EMISSION TEST</b>	<b>12</b>
3.1 CONDUCTED EMISSION MEASUREMENT	12
3.2 TEST PROCEDURE	13
3.3 TEST SETUP	13
3.4 EUT OPERATING CONDITIONS	13
3.5 TEST RESULTS	13
<b>4. RADIATED EMISSION MEASUREMENT</b>	<b>14</b>
4.1 RADIATED EMISSION LIMITS	14
4.2 TEST PROCEDURE	16
4.3 TEST SETUP	17
4.4 EUT OPERATING CONDITIONS	17
4.5 FIELD STRENGTH CALCULATION	18
4.6 TEST RESULTS	18
<b>5. CONDUCTED SPURIOUS &amp; BAND EDGE EMISSION</b>	<b>39</b>
5.1 LIMIT	39
5.2 TEST PROCEDURE	39
5.3 TEST SETUP	39
5.4 EUT OPERATION CONDITIONS	39
5.5 TEST RESULTS	39
<b>6. POWER SPECTRAL DENSITY TEST</b>	<b>40</b>
6.1 LIMIT	40
6.2 TEST PROCEDURE	40
6.3 TEST SETUP	40

**Table of Contents**

6.4 EUT OPERATION CONDITIONS	40
6.5 TEST RESULTS	40
<b>7. BANDWIDTH TEST</b>	<b>41</b>
7.1 LIMIT	41
7.2 TEST PROCEDURE	41
7.3 TEST SETUP	41
7.4 EUT OPERATION CONDITIONS	41
7.5 TEST RESULTS	41
<b>8. PEAK OUTPUT POWER TEST</b>	<b>42</b>
8.1 LIMIT	42
8.2 TEST PROCEDURE	42
8.3 TEST SETUP	43
8.4 EUT OPERATION CONDITIONS	43
8.5 TEST RESULTS	43
<b>9. ANTENNA REQUIREMENT</b>	<b>44</b>
9.1 STANDARD REQUIREMENT	44
9.2 EUT ANTENNA	44
<b>APPENDIX 1-TEST DATA</b>	<b>45</b>
<b>1. DUTY CYCLE</b>	<b>45</b>
<b>2. MAXIMUM AVERAGE CONDUCTED OUTPUT POWER</b>	<b>49</b>
<b>3. MAXIMUM PEAK CONDUCTED OUTPUT POWER</b>	<b>53</b>
<b>4. -6DB BANDWIDTH</b>	<b>57</b>
<b>5. MAXIMUM POWER SPECTRAL DENSITY LEVEL</b>	<b>61</b>
<b>6. BAND EDGE</b>	<b>65</b>
<b>7. CONDUCTED RF SPURIOUS EMISSION</b>	<b>70</b>
<b>APPENDIX 2- EUT TEST PHOTO</b>	<b>77</b>



**Revision History**

Rev.	Issue Date	Report No.	Effect Page	Contents
00	25 Sept. 2024	STS2409015W01	ALL	Initial Issue



## 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:  
KDB 558074 D01 15.247 Meas Guidance v05r02.

<b>FCC Part 15.247,Subpart C</b>			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	N/A	--
15.247 (a)(2)	6dB Bandwidth	PASS	--
15.247 (b)(3)	Output Power	PASS	--
15.209	Radiated Spurious Emission	PASS	--
15.247 (d)	Conducted Spurious & Band Edge Emission	PASS	--
15.247 (e)	Power Spectral Density	PASS	--
15.205	Restricted bands of operation	PASS	--
Part 15.247(d)/ Part 15.209(a)	Band Edge Emission	PASS	--
15.203	Antenna Requirement	PASS	--

**NOTE:**

- (1) 'N/A' denotes test is not applicable in this Test Report.
- (2) All tests are according to ANSI C63.10-2020.



### 1.1 TEST FACTORY

SHENZHEN STS TEST SERVICES CO., LTD

Add. : 101, Building B, Zhuoke Science Park, No.190 Chongqing Road, ZhanChengShequ, Fuhai Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration Number: 625569

IC test Firm Registration Number: 12108A

A2LA Certificate No.: 4338.01

### 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately **95** %.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 0.755\text{dB}$
2	Unwanted Emissions, conducted	$\pm 2.874\text{dB}$
3	All emissions, radiated 9K-30MHz	$\pm 3.80\text{dB}$
4	All emissions, radiated 30M-1GHz	$\pm 4.18\text{dB}$
5	All emissions, radiated 1G-6GHz	$\pm 4.90\text{dB}$
6	All emissions, radiated >6G	$\pm 5.24\text{dB}$
7	Conducted Emission (9KHz-150KHz)	$\pm 2.19\text{dB}$
8	Conducted Emission (150KHz-30MHz)	$\pm 2.53\text{dB}$
9	Occupied Channel Bandwidth	$\pm 3.5\%$
10	Power Spectral Density, conducted	$\pm 1.245\text{dB}$
11	Duty Cycle	$\pm 3.2\%$

## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	Activity Counter	
Brand Name	PURELL SMARTLINK(R)	
Model Name	Activity Counter	
Series Model(s)	N/A	
Model Difference	N/A	
Product Description	The EUT is a Activity Counter	
	Operation Frequency:	2402~2480 MHz
	Modulation Type:	GFSK
	Radio Technology:	BLE
	Bluetooth Configuration:	LE(Support 1M PHY, 2M PHY)
	Number Of Channel:	40
	Antenna Type:	PCB Antenna
	Antenna Gain (dBi)	1.443
Channel List	Please refer to the Note 3.	
Rating	Input: DC4.5V/1A	
Battery	DC 1.5V * 3 AA	
Hardware version number	1.0.0	
Software version number	1.0.0	
Connecting I/O Port(s)	Please refer to the Note 1.	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User Manual.
2. The antenna information refer the manufacturer provide report, applicable only to the tested sample identified in the report. Due to the incorrect antenna information, a series of problems such as the accuracy of the test results will be borne by the customer.





3.

Channel List							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	10	2422	20	2442	30	2462
01	2404	11	2424	21	2444	31	2464
02	2406	12	2426	22	2446	32	2466
03	2408	13	2428	23	2448	33	2468
04	2410	14	2430	24	2450	34	2470
05	2412	15	2432	25	2452	35	2472
06	2414	16	2434	26	2454	36	2474
07	2416	17	2436	27	2456	37	2476
08	2418	18	2438	28	2458	38	2478
09	2420	19	2440	29	2460	39	2480

## 2.2 DESCRIPTION OF THE TEST MODES

For conducted test items and radiated spurious emissions

Each of these EUT operation mode(s) or test configuration mode(s) mentioned below was evaluated respectively.

Worst Mode	Description	Data/Modulation
Mode 1	TX CH00(2402MHz)	1M PHY /GFSK
Mode 2	TX CH19(2440MHz)	1M PHY /GFSK
Mode 3	TX CH39(2480MHz)	1M PHY /GFSK

Worst Mode	Description	Data/Modulation
Mode 4	TX CH00(2402MHz)	2M PHY /GFSK
Mode 5	TX CH19(2440MHz)	2M PHY /GFSK
Mode 6	TX CH39(2480MHz)	2M PHY /GFSK

Note:

(1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.

(2) We have been tested for all available U.S. voltage and frequencies (For 120V, 50/60Hz and DC 4.5) for which the device is capable of operation, and the worst case of DC 4.5V is shown in the report.

(3) The battery is new during the radiated and RF conducted test.

## 2.3 TEST SOFTWARE AND POWER LEVEL

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.

RF Function	Type	Mode Or Modulation type	ANT Gain(dBi)	Power Class	Software For Testing
BLE(With 2M PHY)	BLE_1M PHY	GFSK	1.443	0	Si Connect
	BLE_2M PHY	GFSK	1.443	0	

2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Spurious Emission Test



2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Necessary accessories

Item	Equipment	Mfr/Brand	Model/Type No.	Length	Note
N/A	N/A	N/A	N/A	N/A	N/A

Support units

Item	Equipment	Mfr/Brand	Model/Type No.	Length	Note

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (2) “YES” is means “with core”; “NO” is means “without core”.



## 2.6 EQUIPMENTS LIST

RF Radiation Test Equipment					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
Temperature & Humidity	SW-108	SuWei	N/A	2024.03.15	2025.03.14
Pre-Amplifier(0.1M-3GHz)	EM	EM330	060665	2024.02.23	2025.02.22
Pre-Amplifier(1G-18GHz)	SKET	LNPA-01018G-45	SK2018080901	2023.09.26	2024.09.25
Pre-Amplifier(18G-40GHz)	SKET	LNPA_1840-50	SK2018101801	2024.02.23	2025.02.22
Active loop Antenna	ZHINAN	ZN30900C	16035	2023.02.28	2025.02.27
Bilog Antenna	TESEQ	CBL6111D	34678	2022.09.30	2024.09.29
Horn Antenna	SCHWARZBECK	BBHA 9120D	02014	2023.09.24	2025.09.23
Horn Antenna	A-INFOMW	LB-180400-KF	J211020657	2023.10.10	2025.10.09
Positioning Controller	MF	MF-7802	MF-780208587	N/A	N/A
Signal Analyzer	R&S	FSV 40-N	101823	2023.09.26	2024.09.25
Switch Control Box	N/A	N/A	N/A	N/A	N/A
Filter Box	BALUN Technology	SU319E	BL-SZ1530051	N/A	N/A
Antenna Mast	MF	MFA-440H	N/A	N/A	N/A
Turn Table	MF	SC100_1	60531	N/A	N/A
AC Power Source	APC	KDF-11010G	F214050035	N/A	N/A
DC power supply	HONGSHENGFENG	DPS-305AF	17064939	2023.09.26	2024.09.25
Test SW	EZ-EMC	Ver.STSLAB-03A1 RE			
RF Connected Test					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Signal Analyzer	Agilent	N9020A	MY51510623	2024.02.23	2025.02.22
Power detector group	Keysight	NW2021031	N/A	2023.09.26	2024.09.25
Switch control box	MW	MW100-RFCB	N/A	N/A	N/A
Temperature & Humidity	SW-108	SuWei	N/A	2024.03.15	2025.03.14
Test SW	MW	MTS 8310_2.0.0.0			

### 3. EMC EMISSION TEST

#### 3.1 CONDUCTED EMISSION MEASUREMENT

##### 3.1.1 POWER LINE CONDUCTED EMISSION LIMITS

The radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table.

FREQUENCY (MHz)	Conducted Emission limit (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of “ \* ” marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.2 TEST PROCEDURE

- a. The EUT is 0.8 m from the horizontal ground plane and 0.4 m from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments are powered from additional LISN(s). The LISN provides 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN is at least 80 cm from the nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.3 TEST SETUP

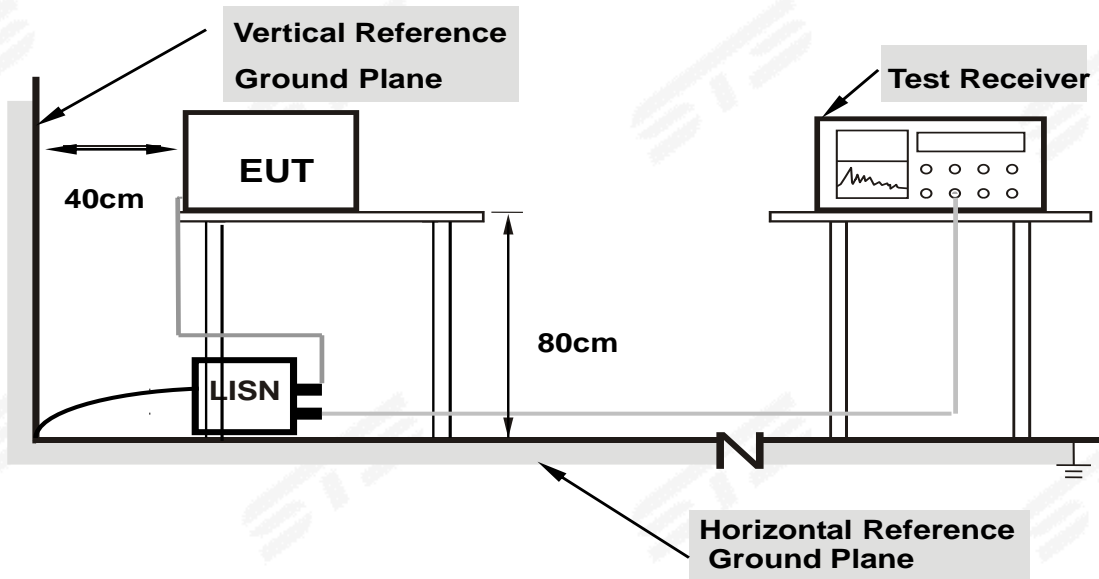

- Note: 1. Support units were connected to second LISN.**
- 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes support units.**

3.4 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

3.5 TEST RESULTS

Temperature:	--°C	Relative Humidity:	---%RH
Test Voltage:	N/A	Phase:	L/N
Test Mode:	N/A		

Note: product is battery operated and conducted emission test is not applicable.



#### 4. RADIATED EMISSION MEASUREMENT

##### 4.1 RADIATED EMISSION LIMITS

In any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the Restricted band specified on Part 15.205(a)&209(a) limit in the table and according to ANSI C63.10-2020 below has to be followed.

##### LIMITS OF RADIATED EMISSION MEASUREMENT (Frequency Range 9kHz-1000MHz)

Frequencies (MHz)	Field Strength (microrvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

##### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	(dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

##### LIMITS OF RESTRICTED FREQUENCY BANDS

FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (GHz)
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			



## For Radiated Emission

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/QP/AV
Start Frequency	9 KHz/150KHz(Peak/QP/AV)
Stop Frequency	150KHz/30MHz(Peak/QP/AV)
RB / VB (emission in restricted band)	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz); 200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/QP
Start Frequency	30 MHz(Peak/QP)
Stop Frequency	1000 MHz (Peak/QP)
RB / VB (emission in restricted band)	120 KHz / 300 KHz

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/AV
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier hamonic(Peak/AV)
RB / VB (emission in restricted band)	1 MHz / 3 MHz(Peak) 1 MHz/1/T MHz(AVG)

## For Restricted band

Spectrum Parameter	Setting
Detector	Peak/AV
Start/Stop Frequency	Lower Band Edge: 2310 to 2410 MHz Upper Band Edge: 2475 to 2500 MHz
RB / VB	1 MHz / 3 MHz(Peak) 1 MHz/1/T MHz(AVG)



Receiver Parameter	Setting
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

#### 4.2 TEST PROCEDURE

- a. The measuring distance at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- b. The EUT was placed on the top of a rotating table 0.8 m (above 1GHz is 1.5 m) above the ground at a 3 m anechoic chamber test site. The table was rotated 360 degree to determine the position of the highest radiation.
- c. The height of the equipment shall be 0.8 m (above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. Horizontal and vertical polarization of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and QuasiPeak detector mode will be re-measured.
- e. If the Peak Mode measured value is compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and no additional QP Mode measurement was performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.


Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.




### 4.3 TEST SETUP


#### (A) Radiated Emission Test-Up Frequency Below 30MHz

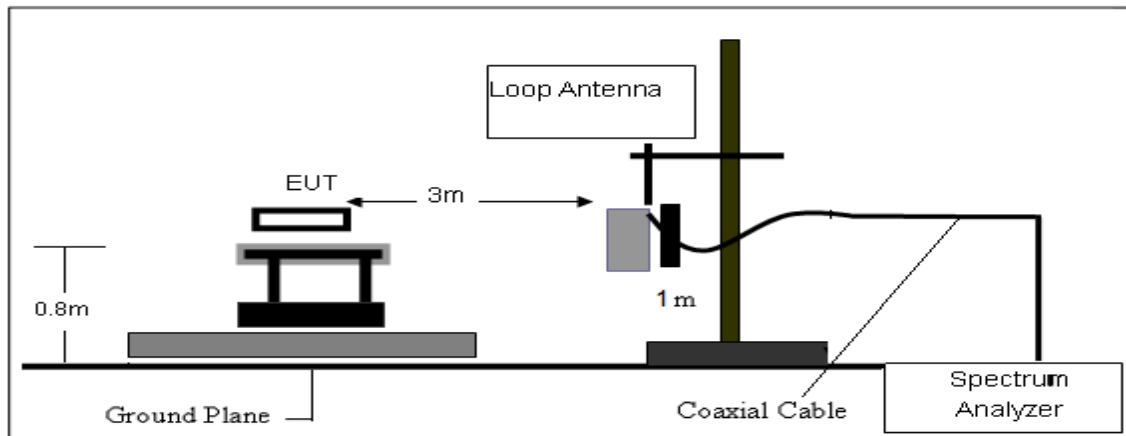

#### (B) Radiated Emission Test-Up Frequency 30MHz~1GHz

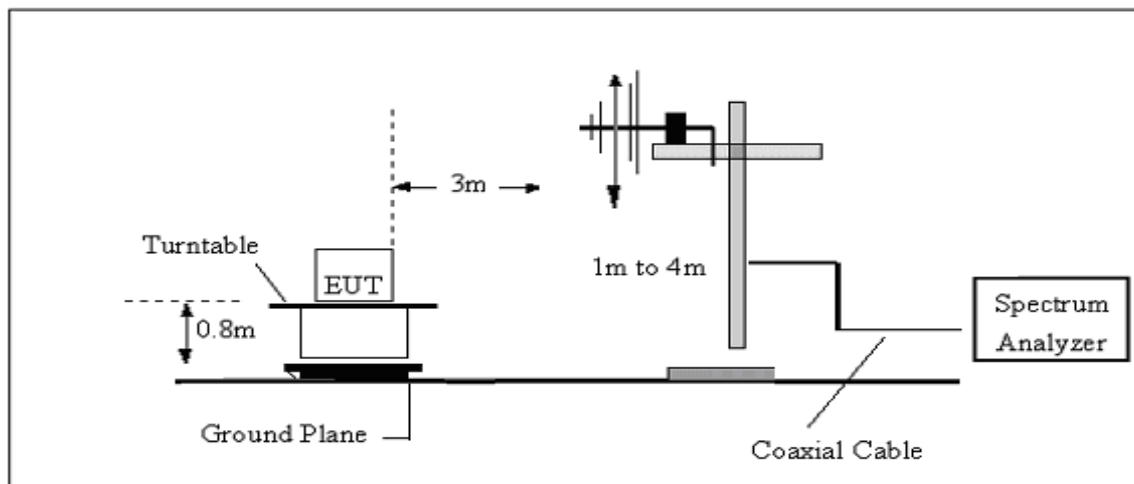

#### (C) Radiated Emission Test-Up Frequency Above 1GHz

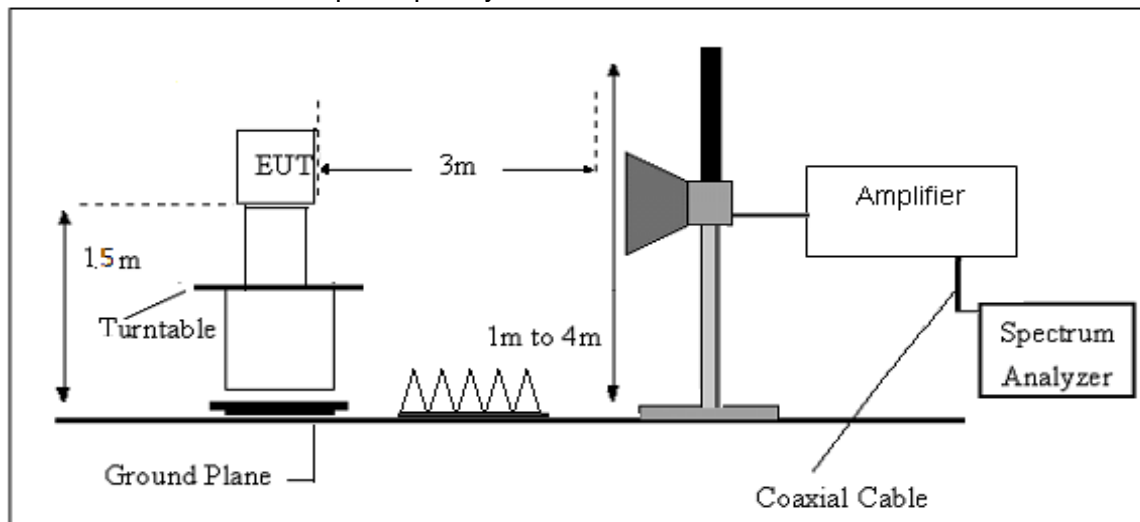

### 4.4 EUT OPERATING CONDITIONS

Please refer to section 3.4 of this report.



#### 4.5 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

For example

Frequency (MHz)	FS (dB $\mu$ V/m)	RA (dB $\mu$ V/m)	AF (dB)	CL (dB)	AG (dB)	Factor (dB)
300	40	58.1	12.2	1.6	31.9	-18.1

$$\text{Factor} = \text{AF} + \text{CL} - \text{AG}$$

#### 4.6 TEST RESULTS

(Between 9KHz – 30 MHz)

Temperature:	23.4°C	Relative Humidity:	60%RH
Test Voltage:	DC 4.5V By Battery	Polarization:	--
Test Mode:	TX Mode		

Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State P/F
--	--	--	--	PASS
--	--	--	--	PASS

**Note:**

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log (\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.



(30MHz -1000MHz)


1M PHY

Temperature:	23.4°C	Relative Humidity:	60%RH
Test Voltage:	DC 4.5V By Battery	Phase:	Horizontal
Test Mode:	Mode 1/2/3 (Mode 3 worst mode)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.9700	36.90	-13.35	23.55	40.00	-16.45	peak
2	94.0200	43.78	-20.89	22.89	43.50	-20.61	peak
3	392.7800	38.33	-11.46	26.87	46.00	-19.13	peak
4	430.6100	41.15	-10.14	31.01	46.00	-14.99	peak
5	733.2500	30.60	-2.35	28.25	46.00	-17.75	peak
6	981.5700	28.44	2.57	31.01	54.00	-22.99	peak

Remark:

1. Margin = Result (Result =Reading + Factor )-Limit
2. Factor= Antenna factor+Cable attenuation factor(cable loss)-Amplifier gain
3. All modes have been tested,only show the worst case.

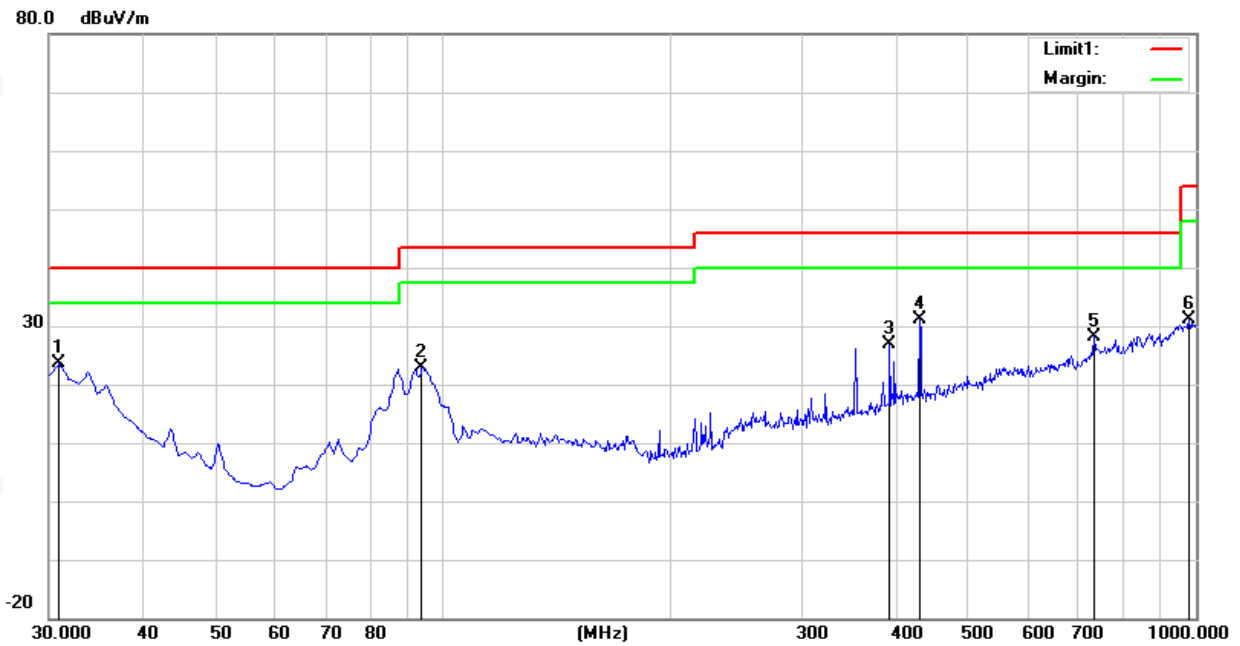




Temperature:	23.4°C	Relative Humidity:	60%RH
Test Voltage:	DC 4.5V By Battery	Phase:	Vertical
Test Mode:	Mode 1/2/3 (Mode 3 worst mode)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.9700	45.54	-13.35	32.19	40.00	-7.81	peak
2	65.8900	44.32	-25.60	18.72	40.00	-21.28	peak
3	125.0600	33.97	-18.22	15.75	43.50	-27.75	peak
4	288.0200	34.83	-15.26	19.57	46.00	-26.43	peak
5	629.4600	29.28	-5.07	24.21	46.00	-21.79	peak
6	901.0600	35.77	-0.43	35.34	46.00	-10.66	peak

Remark:

- 1. Margin = Result (Result =Reading + Factor )-Limit
- 2. Factor= Antenna factor+Cable attenuation factor(cable loss)-Amplifier gain
- 3. All modes have been tested,only show the worst case.

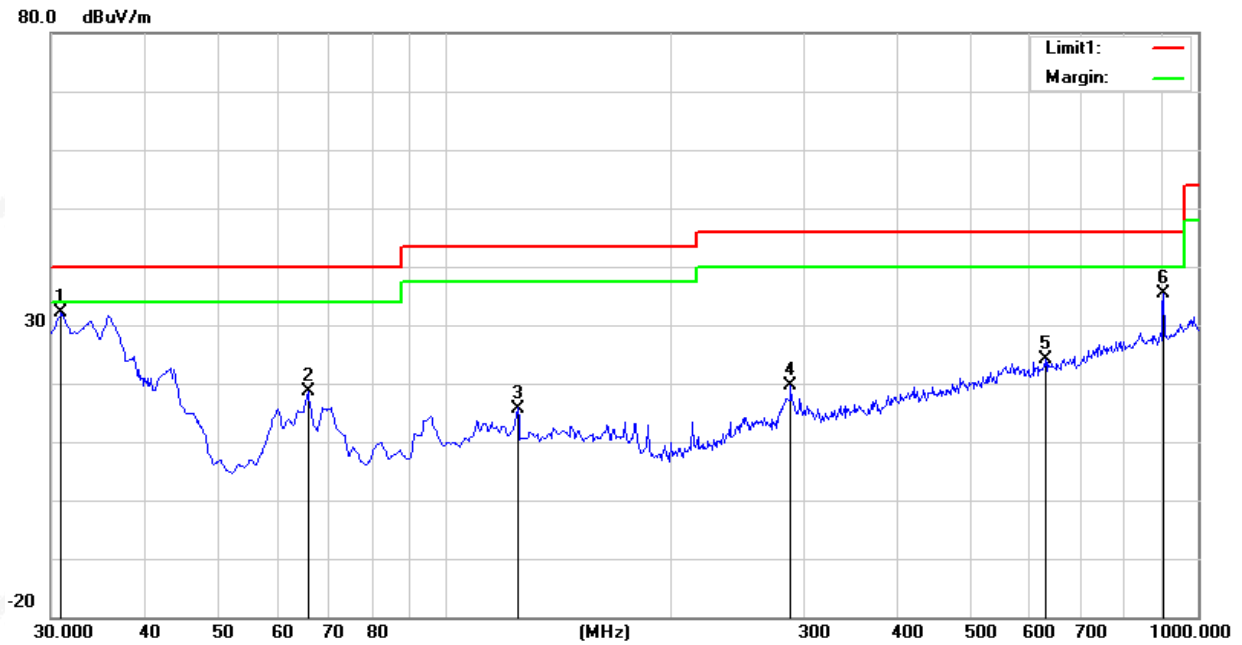




2M PHY

Temperature:	23.4°C	Relative Humidity:	60%RH
Test Voltage:	DC 4.5V By Battery	Phase:	Horizontal
Test Mode:	Mode 4/5/6 (Mode 6 worst mode)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.9700	36.01	-13.35	22.66	40.00	-17.34	peak
2	94.9900	47.62	-20.78	26.84	43.50	-16.66	peak
3	421.8800	29.77	-10.10	19.67	46.00	-26.33	peak
4	567.3800	28.71	-5.57	23.14	46.00	-22.86	peak
5	733.2500	30.36	-2.35	28.01	46.00	-17.99	peak
6	913.6700	36.96	-0.13	36.83	46.00	-9.17	peak

Remark:

- 1. Margin = Result (Result =Reading + Factor )-Limit
- 2. Factor= Antenna factor+Cable attenuation factor(cable loss)-Amplifier gain
- 3. All modes have been tested,only show the worst case.

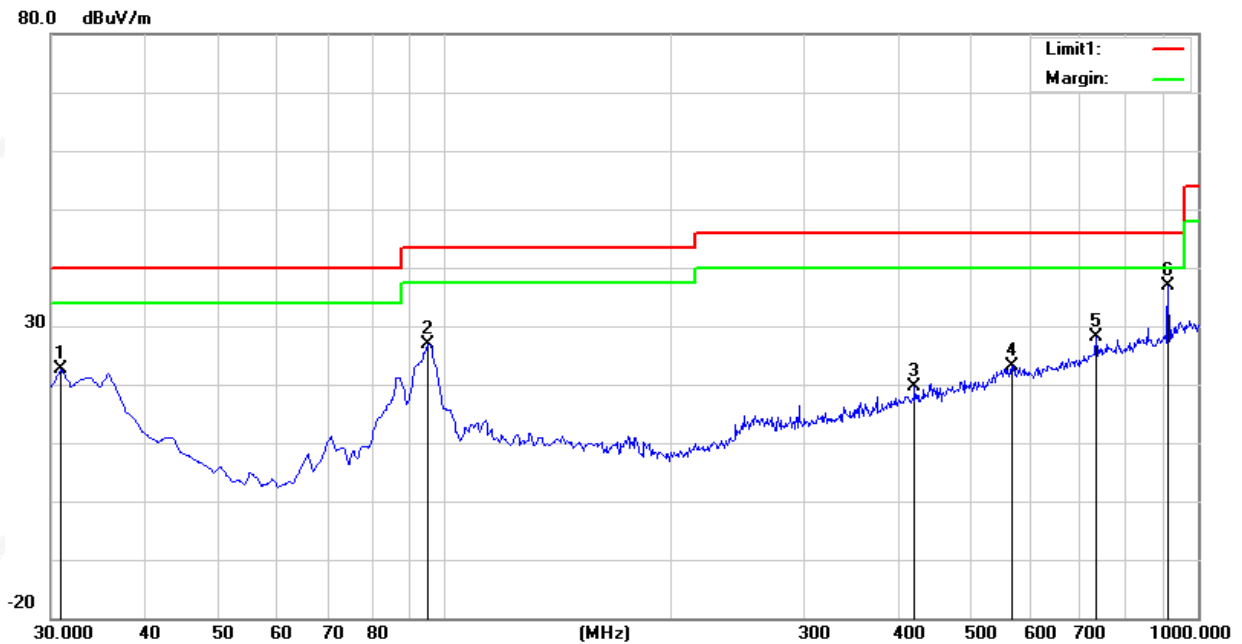




Temperature:	23.4°C	Relative Humidity:	60%RH
Test Voltage:	DC 4.5V By Battery	Phase:	Vertical
Test Mode:	Mode 4/5/6 (Mode 6 worst mode)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	35.8200	49.14	-15.91	33.23	40.00	-6.77	peak
2	65.8900	42.83	-25.60	17.23	40.00	-22.77	peak
3	94.9900	37.43	-20.78	16.65	43.50	-26.85	peak
4	285.1100	33.54	-15.43	18.11	46.00	-27.89	peak
5	667.2900	29.15	-4.64	24.51	46.00	-21.49	peak
6	901.0600	32.63	-0.43	32.20	46.00	-13.80	peak

Remark:

- 1. Margin = Result (Result =Reading + Factor) –Limit
- 2. Factor= Antenna factor+Cable attenuation factor(cable loss)-Amplifier gain
- 3. All modes have been tested,only show the worst case.

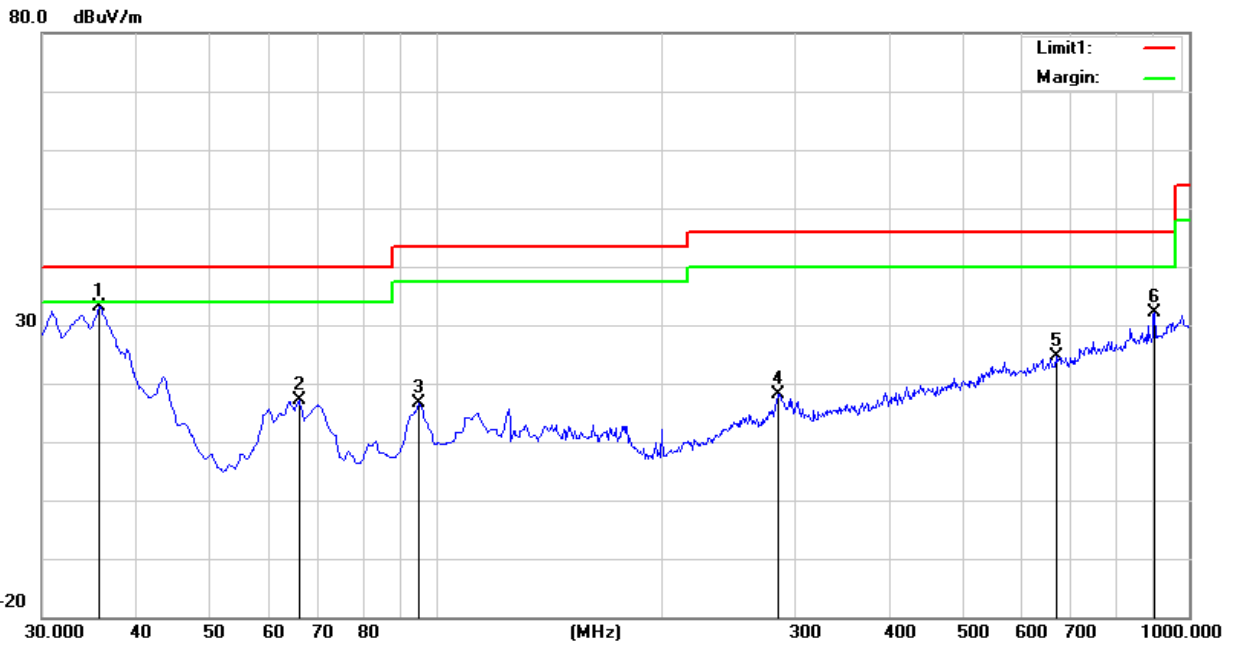




Above 1GHz Spurious emission Requirements

Remark: The emissions above 18GHz and below 26GHz are too small to be measured and are at least 10 dB below the limit. The frequency is mainly from the environment noise.

1M PHY  
Low  
Horizontal

RE\_FCC Test Case\_FCC 15C 1GHz-18GHz

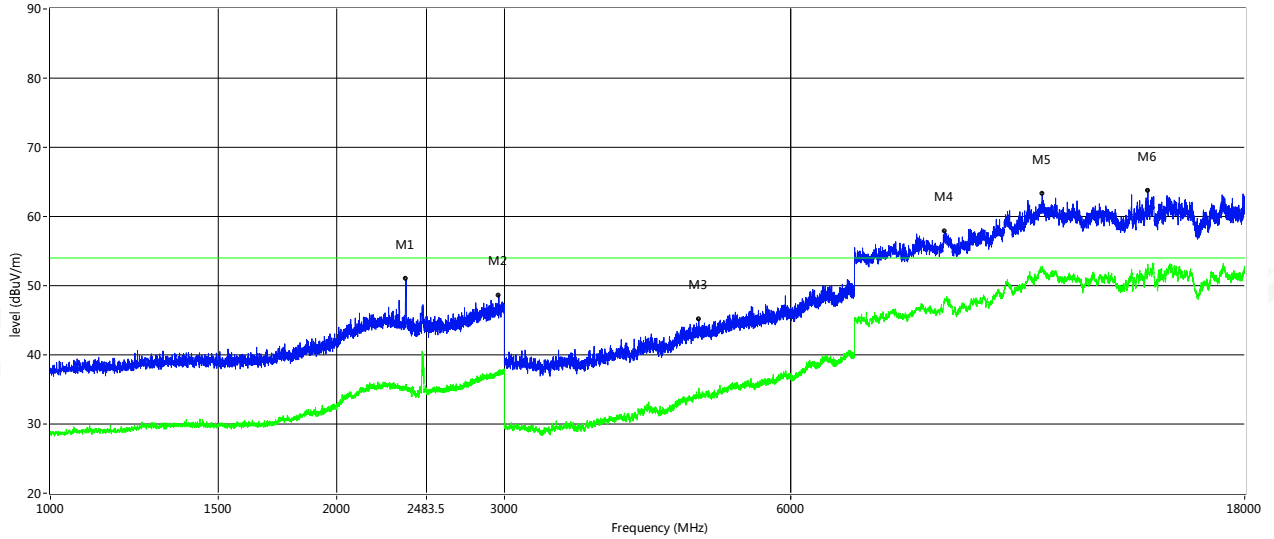


Frequency (MHz)	Peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	Table (o)	Height (cm)	ANT	Verdict
2365.000	50.95	35.72	4.26	74.0	54.0	-18.28	14.30	100	Horizontal	Pass
2960.000	48.63	37.77	5.94	74.0	54.0	-16.23	1.10	100	Horizontal	Pass
4803.000	45.09	34.47	-6.96	74.0	54.0	-19.53	117.50	100	Horizontal	Pass
8716.000	57.81	47.89	5.11	74.0	54.0	-6.11	228.30	100	Horizontal	Pass
11026.000	63.25	51.59	10.08	74.0	54.0	-2.41	3.80	100	Horizontal	Pass
14244.750	63.71	51.02	11.28	74.0	54.0	-2.98	187.50	100	Horizontal	Pass



Vertical

RE\_FCC Test Case\_FCC 15C 1GHz-18GHz

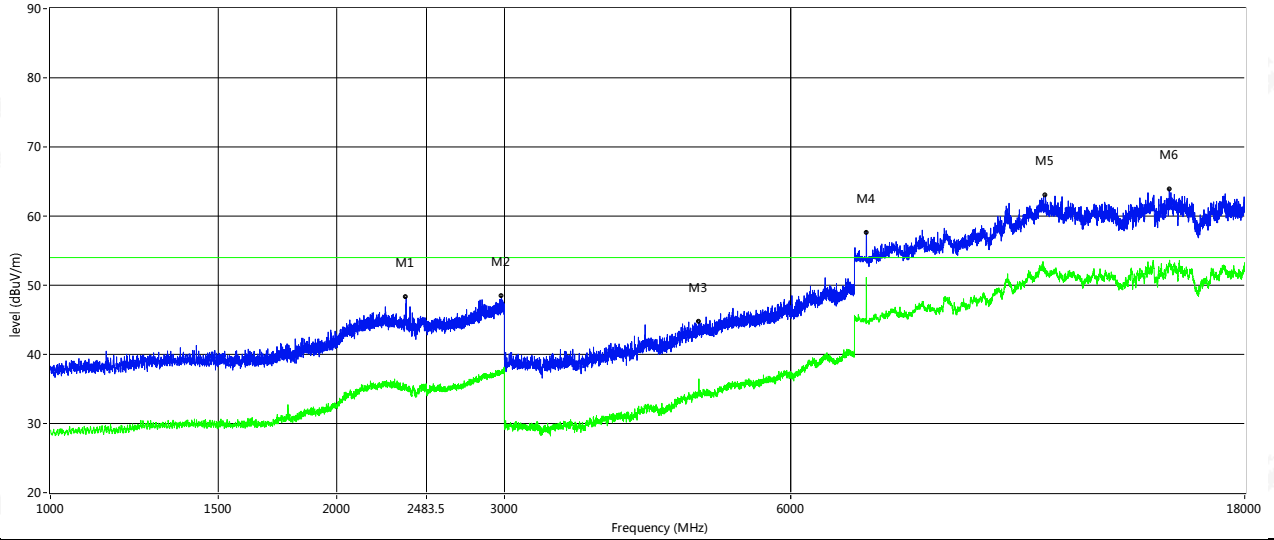


Frequency (MHz)	Peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	Table (o)	Height (cm)	ANT	Verdict
2365.500	48.24	35.51	4.25	74.0	54.0	-18.49	184.50	100	Vertical	Pass
2978.500	48.41	37.73	6.02	74.0	54.0	-16.27	360.30	100	Vertical	Pass
4804.000	44.70	36.46	-6.96	74.0	54.0	-17.54	92.80	100	Vertical	Pass
7203.500	67.62	51.12	2.69	74.0	54.0	-2.88	213.80	100	Vertical	Pass
11114.000	62.96	51.44	9.67	74.0	54.0	-2.56	196.80	100	Vertical	Pass
14997.000	63.79	51.08	10.38	74.0	54.0	-2.92	262.00	100	Vertical	Pass





Middle  
Horizontal

RE\_FCC Test Case\_FCC 15C 1GHz-18GHz

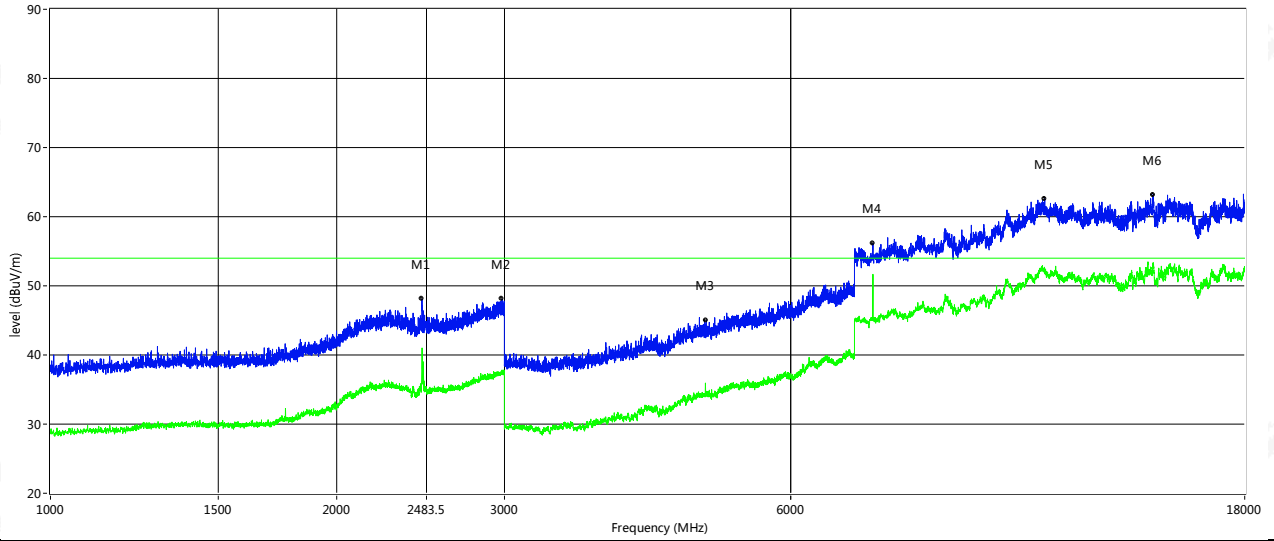


Frequency (MHz)	Peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	Table (o)	Height (cm)	ANT	Verdict
2457.500	48.08	40.58	4.05	74.0	54.0	-13.42	262.90	100	Horizontal	Pass
2982.500	48.07	37.25	6.03	74.0	54.0	-16.75	285.50	100	Horizontal	Pass
4884.000	45.04	34.76	-6.45	74.0	54.0	-19.24	272.50	100	Horizontal	Pass
7319.000	70.14	51.67	3.33	74.0	54.0	-2.33	222.50	100	Horizontal	Pass
11094.750	62.61	51.30	9.71	74.0	54.0	-2.70	301.60	100	Horizontal	Pass
14430.500	63.21	51.62	11.06	74.0	54.0	-2.38	188.20	100	Horizontal	Pass



Vertical

RE\_FCC Test Case\_FCC 15C 1GHz-18GHz

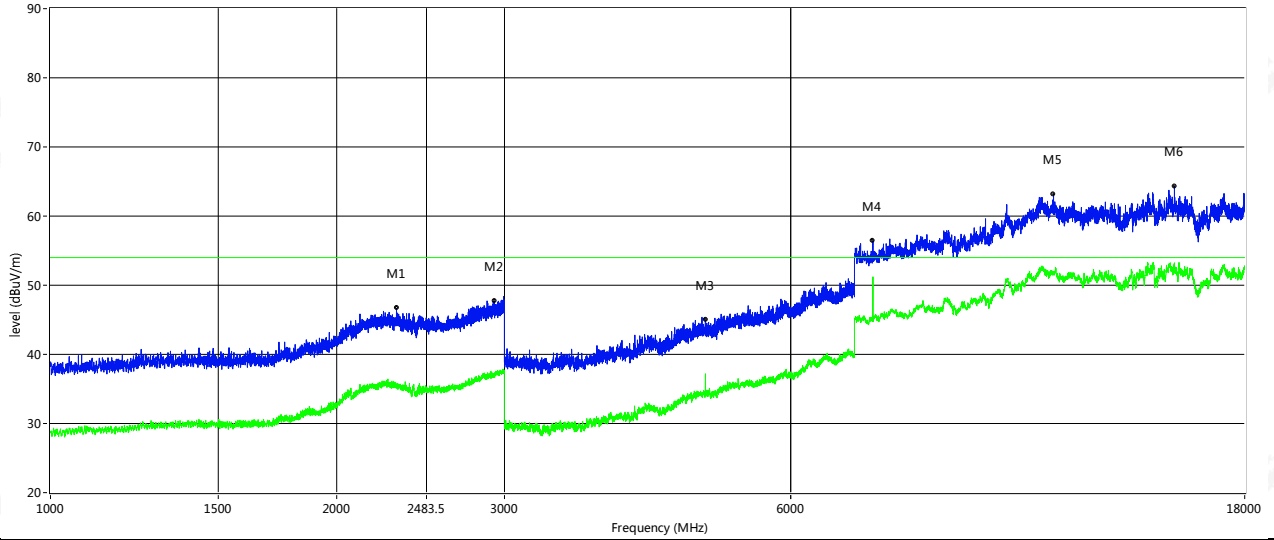


Frequency (MHz)	Peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	Table (o)	Height (cm)	ANT	Verdict
2310.500	46.68	35.29	4.54	74.0	54.0	-18.71	237.90	100	Vertical	Pass
2927.500	47.75	36.81	5.77	74.0	54.0	-17.19	240.70	100	Vertical	Pass
4884.000	45.01	36.09	-6.51	74.0	54.0	-17.91	94.30	100	Vertical	Pass
7319.000	66.45	51.22	3.33	74.0	54.0	-2.78	220.60	100	Vertical	Pass
11331.250	63.18	51.54	9.60	74.0	54.0	-2.46	190.90	100	Vertical	Pass
15184.000	64.31	51.22	10.92	74.0	54.0	-2.78	265.70	100	Vertical	Pass



Highest Horizontal

RE\_FCC Test Case\_FCC 15C 1GHz-18GHz

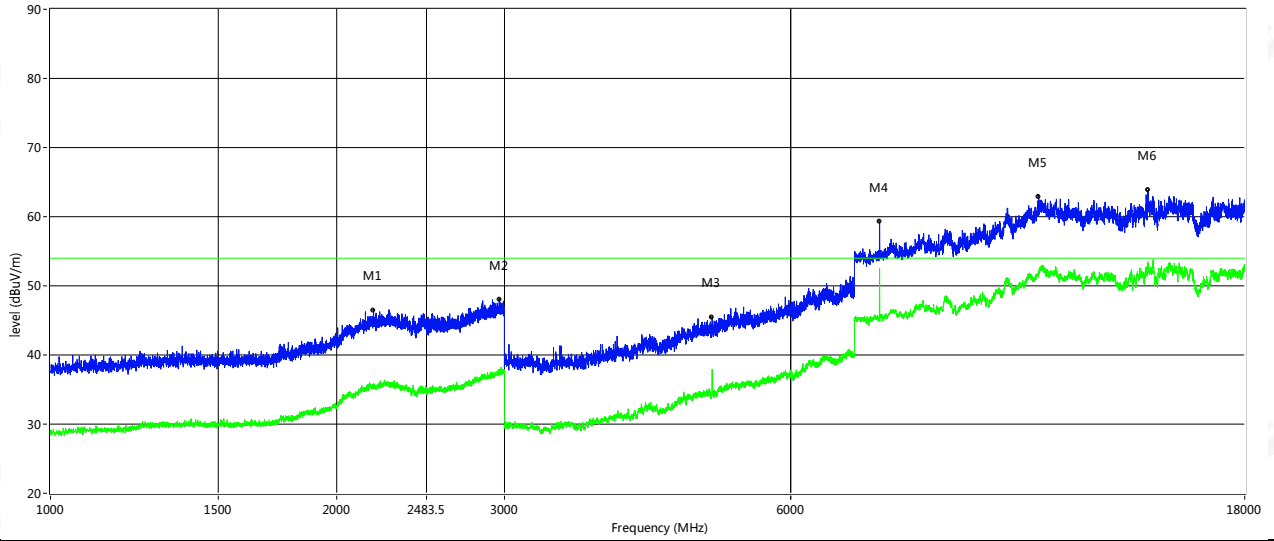


Frequency (MHz)	Peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	Table (o)	Height (cm)	ANT	Verdict
2186.000	46.42	35.89	4.25	74.0	54.0	-18.11	331.80	100	Horizontal	Pass
2963.000	48.01	37.16	5.95	74.0	54.0	-16.84	58.40	100	Horizontal	Pass
4960.000	45.47	37.95	-6.38	74.0	54.0	-16.05	0.00	100	Horizontal	Pass
7440.000	69.22	51.36	2.97	74.0	54.0	-2.64	221.60	100	Horizontal	Pass
10932.500	62.91	51.65	9.70	74.0	54.0	-2.35	283.90	100	Horizontal	Pass
14243.500	63.82	51.21	11.26	74.0	54.0	-2.79	38.80	100	Horizontal	Pass



Vertical

RE\_FCC Test Case\_FCC 15C 1GHz-18GHz

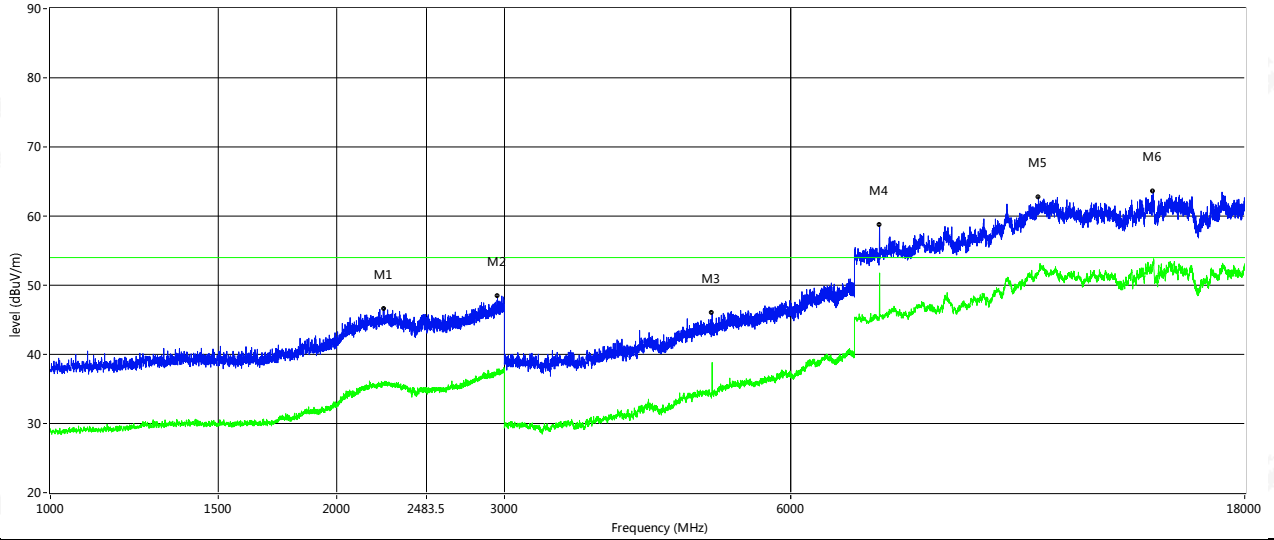


Frequency (MHz)	Peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	Table (o)	Height (cm)	ANT	Verdict
2241.500	46.63	35.58	4.55	74.0	54.0	-18.42	310.20	100	Vertical	Pass
2950.500	48.44	37.62	5.90	74.0	54.0	-16.38	296.90	100	Vertical	Pass
4960.000	45.94	38.82	-6.38	74.0	54.0	-15.18	55.70	100	Vertical	Pass
7437.250	68.68	51.04	2.97	74.0	54.0	-2.96	190.50	100	Vertical	Pass
10927.000	62.73	51.88	9.66	74.0	54.0	-2.12	87.10	100	Vertical	Pass
14425.000	63.51	51.89	11.13	74.0	54.0	-2.11	62.40	100	Vertical	Pass



2M PHY  
Low  
Horizontal

RE\_FCC Test Case\_FCC 15C 1GHz-18GHz

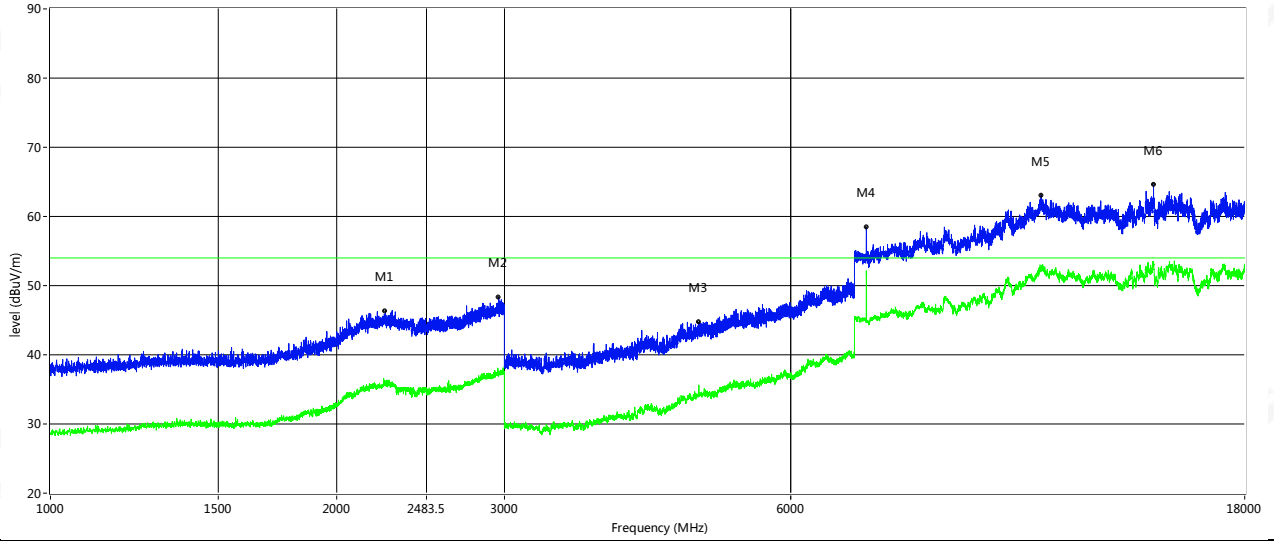


Frequency (MHz)	Peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	Table (o)	Height (cm)	ANT	Verdict
2249.500	46.29	35.69	4.63	74.0	54.0	-18.31	219.00	100	Horizontal	Pass
2959.000	48.34	37.11	5.93	74.0	54.0	-16.89	132.90	100	Horizontal	Pass
4804.000	44.73	34.61	-6.96	74.0	54.0	-19.39	0.00	100	Horizontal	Pass
7203.500	70.38	51.14	2.69	74.0	54.0	-2.86	218.10	100	Horizontal	Pass
10995.750	63.05	51.56	10.19	74.0	54.0	-2.44	122.40	100	Horizontal	Pass
14436.000	64.57	51.80	11.00	74.0	54.0	-2.20	204.90	100	Horizontal	Pass



Vertical

RE\_FCC Test Case\_FCC 15C 1GHz-18GHz

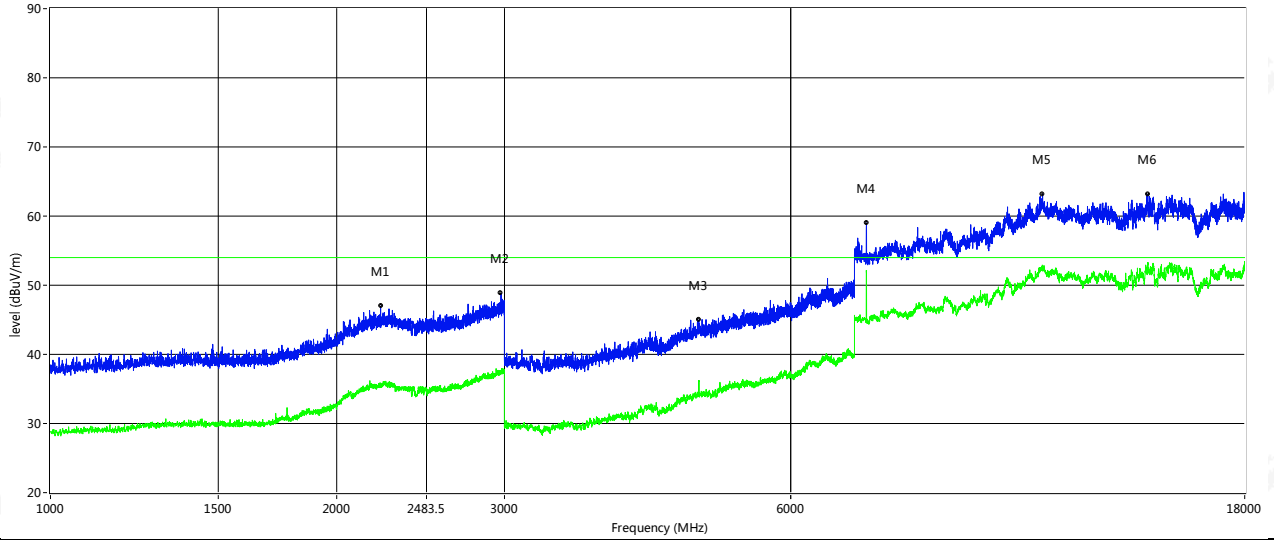


Frequency (MHz)	Peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	Table (o)	Height (cm)	ANT	Verdict
2223.500	46.99	35.35	4.35	74.0	54.0	-18.65	117.60	100	Vertical	Pass
2975.500	48.84	37.44	6.00	74.0	54.0	-16.56	63.90	100	Vertical	Pass
4803.000	44.97	36.22	-6.96	74.0	54.0	-17.78	360.20	100	Vertical	Pass
7206.250	70.01	51.69	2.71	74.0	54.0	-2.31	190.50	100	Vertical	Pass
11037.000	63.21	51.39	10.02	74.0	54.0	-2.61	4.50	100	Vertical	Pass
14238.000	63.13	51.26	11.31	74.0	54.0	-2.74	204.70	100	Vertical	Pass



Middle  
Horizontal

RE\_FCC Test Case\_FCC 15C 1GHz-18GHz

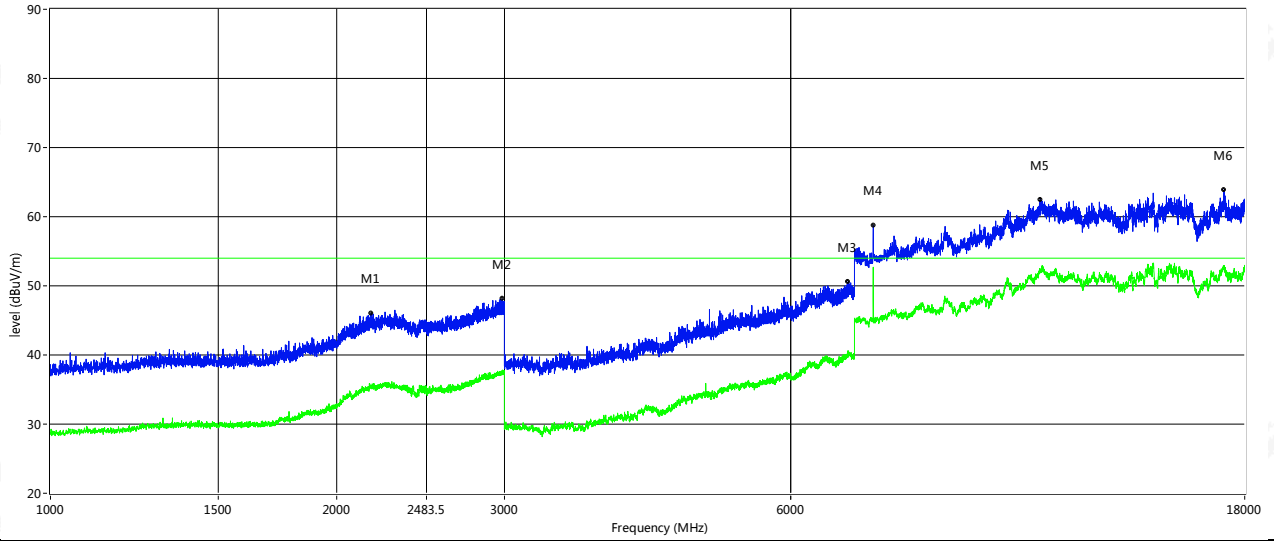


Frequency (MHz)	Peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	Table (o)	Height (cm)	ANT	Verdict
2171.500	45.99	35.39	4.40	74.0	54.0	-18.61	236.40	100	Horizontal	Pass
2986.500	48.10	37.38	6.05	74.0	54.0	-16.62	357.50	100	Horizontal	Pass
6892.000	50.58	40.64	0.42	74.0	54.0	-13.36	350.60	100	Horizontal	Pass
7327.250	70.72	50.17	3.29	74.0	54.0	-3.83	243.80	100	Horizontal	Pass
10973.750	62.48	51.02	10.02	74.0	54.0	-2.98	101.40	100	Horizontal	Pass
17120.000	63.88	51.69	10.37	74.0	54.0	-2.31	266.00	100	Horizontal	Pass



Vertical

RE\_FCC Test Case\_FCC 15C 1GHz-18GHz

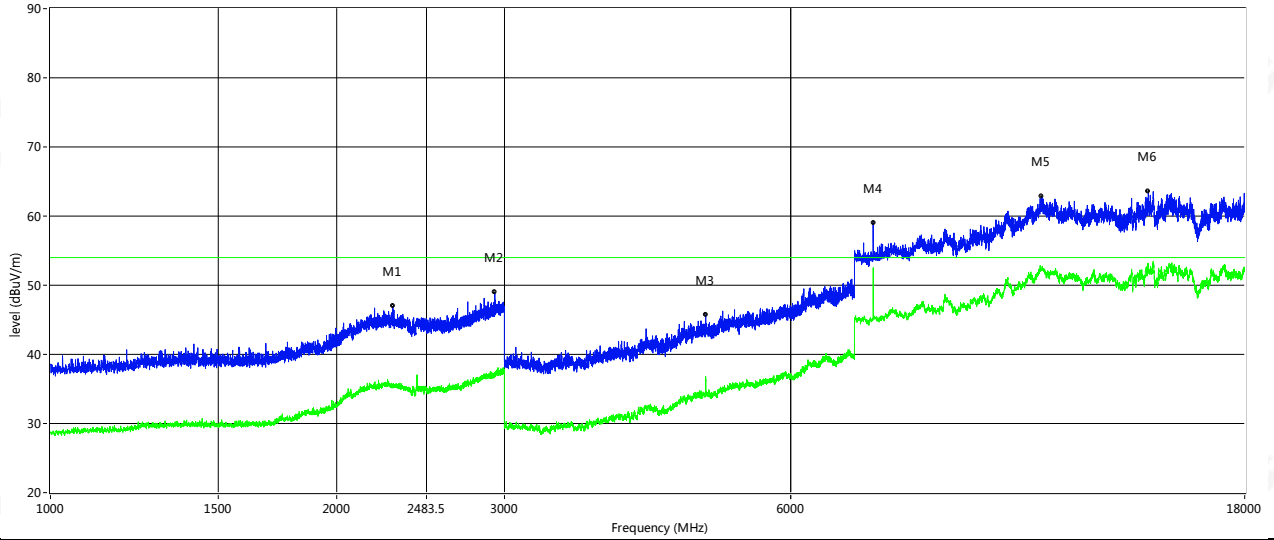


Frequency (MHz)	Peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	Table (o)	Height (cm)	ANT	Verdict
2290.000	46.96	35.14	4.59	74.0	54.0	-18.86	189.70	100	Vertical	Pass
2931.000	48.95	37.07	5.79	74.0	54.0	-16.93	252.10	100	Vertical	Pass
4884.000	45.72	36.20	-6.48	74.0	54.0	-17.80	76.20	100	Vertical	Pass
7324.500	69.07	51.54	3.30	74.0	54.0	-2.46	198.20	100	Vertical	Pass
11006.750	62.84	51.20	10.18	74.0	54.0	-2.80	89.90	100	Vertical	Pass
14254.500	63.60	51.74	11.18	74.0	54.0	-2.26	360.00	100	Vertical	Pass





High  
Horizontal

RE\_FCC Test Case\_FCC 15C 1GHz-18GHz

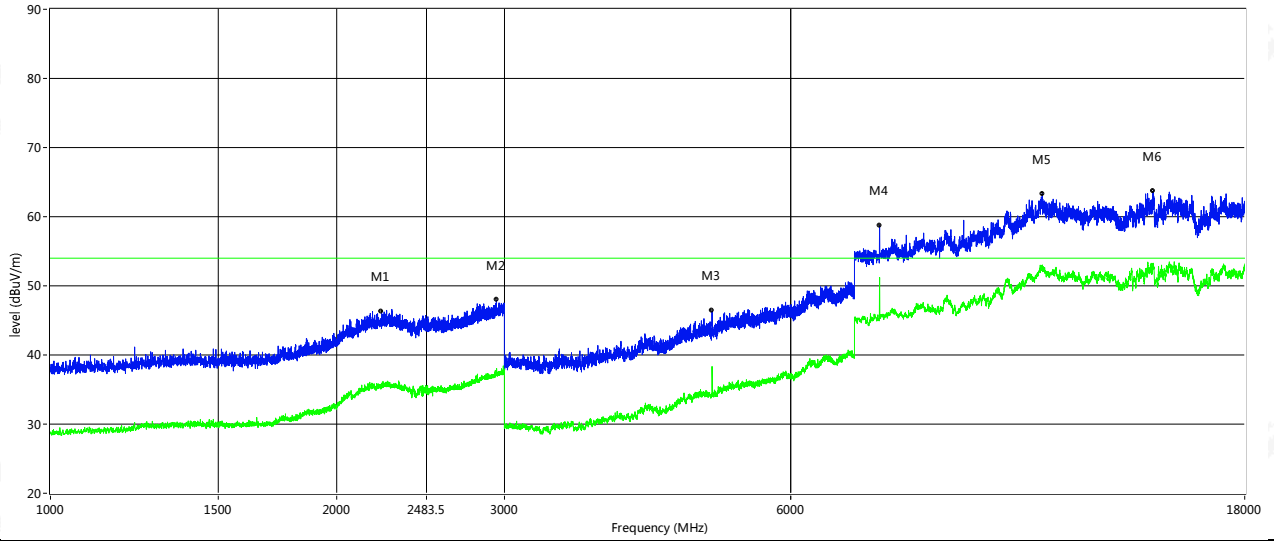


Frequency (MHz)	Peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	Table (o)	Height (cm)	ANT	Verdict
2228.500	46.28	35.20	4.41	74.0	54.0	-18.80	128.10	100	Horizontal	Pass
2942.500	47.93	37.24	5.85	74.0	54.0	-16.76	287.40	100	Horizontal	Pass
4959.000	46.36	38.34	-6.38	74.0	54.0	-15.66	28.80	100	Horizontal	Pass
7440.000	68.74	51.19	2.97	74.0	54.0	-2.81	233.60	100	Horizontal	Pass
11031.500	63.33	51.31	10.05	74.0	54.0	-2.69	216.00	100	Horizontal	Pass
14416.750	63.71	51.19	11.23	74.0	54.0	-2.81	147.40	100	Horizontal	Pass



Vertical

RE\_FCC Test Case\_FCC 15C 1GHz-18GHz

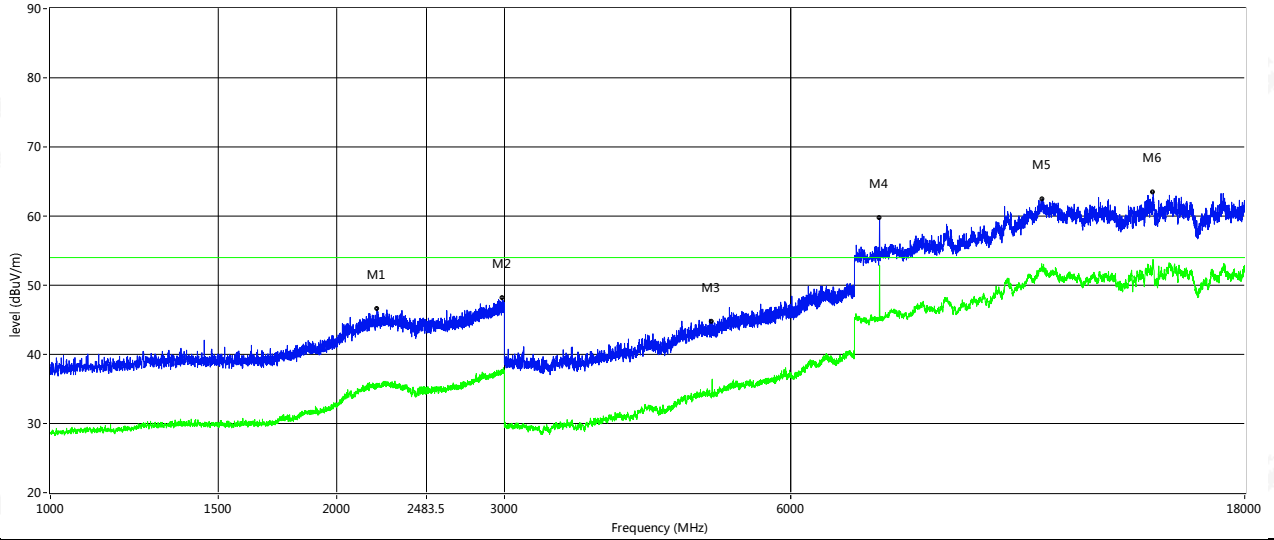


Frequency (MHz)	Peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	Table (o)	Height (cm)	ANT	Verdict
2204.500	46.56	35.45	4.15	74.0	54.0	-18.55	21.30	100	Vertical	Pass
2985.000	48.13	37.25	6.05	74.0	54.0	-16.75	333.50	100	Vertical	Pass
4959.000	44.70	36.06	-6.38	74.0	54.0	-17.94	360.30	100	Vertical	Pass
7440.000	67.73	51.85	2.97	74.0	54.0	-2.15	198.10	100	Vertical	Pass
11042.500	62.49	51.18	9.99	74.0	54.0	-2.82	48.80	100	Vertical	Pass
14425.000	63.46	51.08	11.13	74.0	54.0	-2.92	281.60	100	Vertical	Pass




4.6 TEST RESULTS (Restricted Bands Requirements)

**1M PHY**  
**GFSK-Low**  
Horizontal

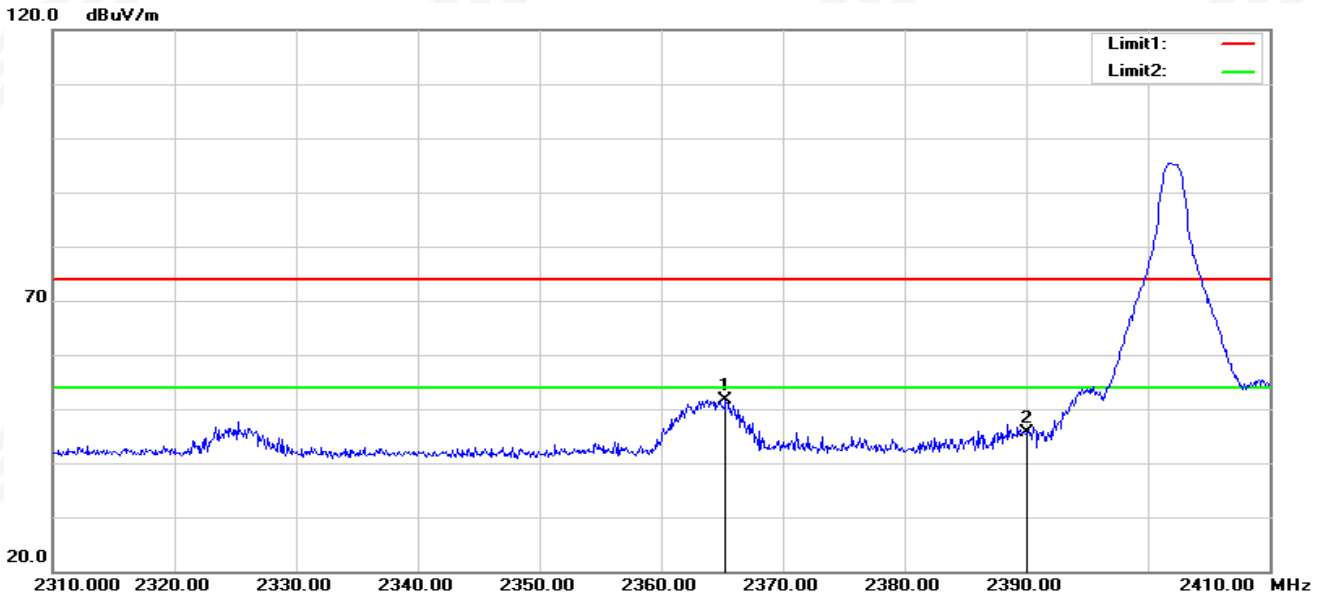

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2365.300	47.66	3.97	51.63	74.00	-22.37	peak
2	2390.000	41.28	4.34	45.62	74.00	-28.38	peak


Vertical

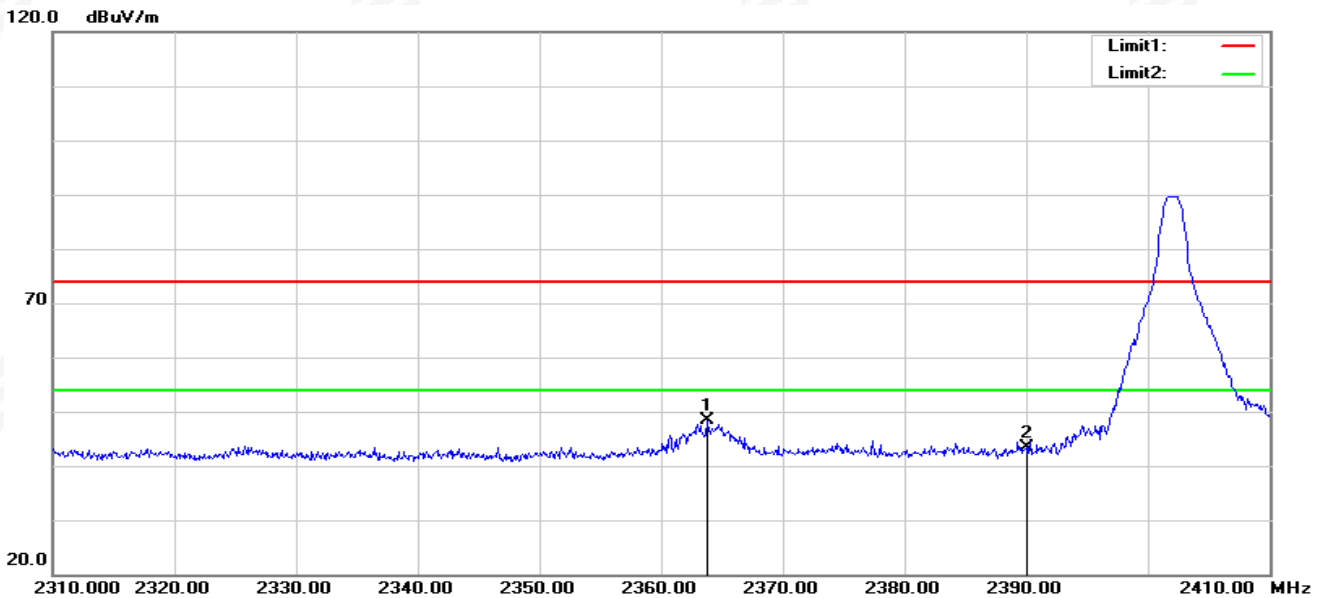

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2363.800	44.32	3.95	48.27	74.00	-25.73	peak
2	2390.000	39.03	4.34	43.37	74.00	-30.63	peak




**GFSK-High**  
Horizontal

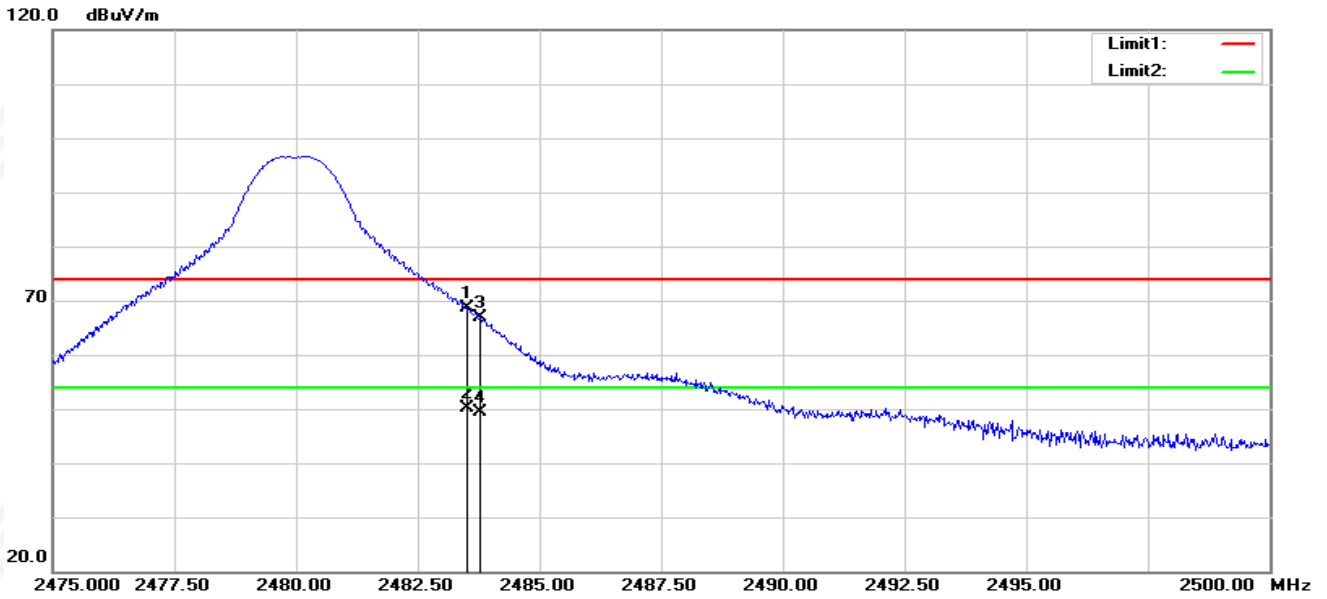

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	64.12	4.60	68.72	74.00	-5.28	peak
2	2483.500	45.55	4.60	50.15	54.00	-3.85	AVG
3	2483.775	62.26	4.60	66.86	74.00	-7.14	peak
4	2483.775	44.90	4.60	49.50	54.00	-4.50	AVG


Vertical

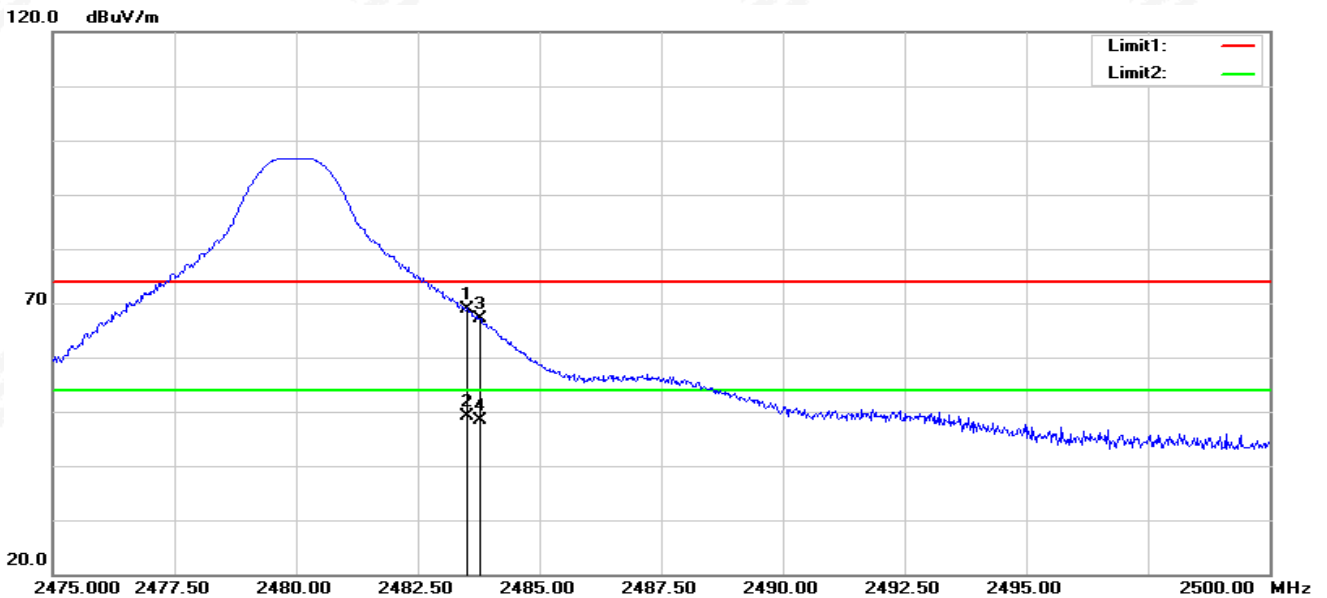

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	64.35	4.60	68.95	74.00	-5.05	peak
2	2483.500	44.61	4.60	49.21	54.00	-4.79	AVG
3	2483.775	62.42	4.60	67.02	74.00	-6.98	peak
4	2483.775	43.74	4.60	48.34	54.00	-5.66	AVG




**2M PHY  
GFSK-Low  
Horizontal**

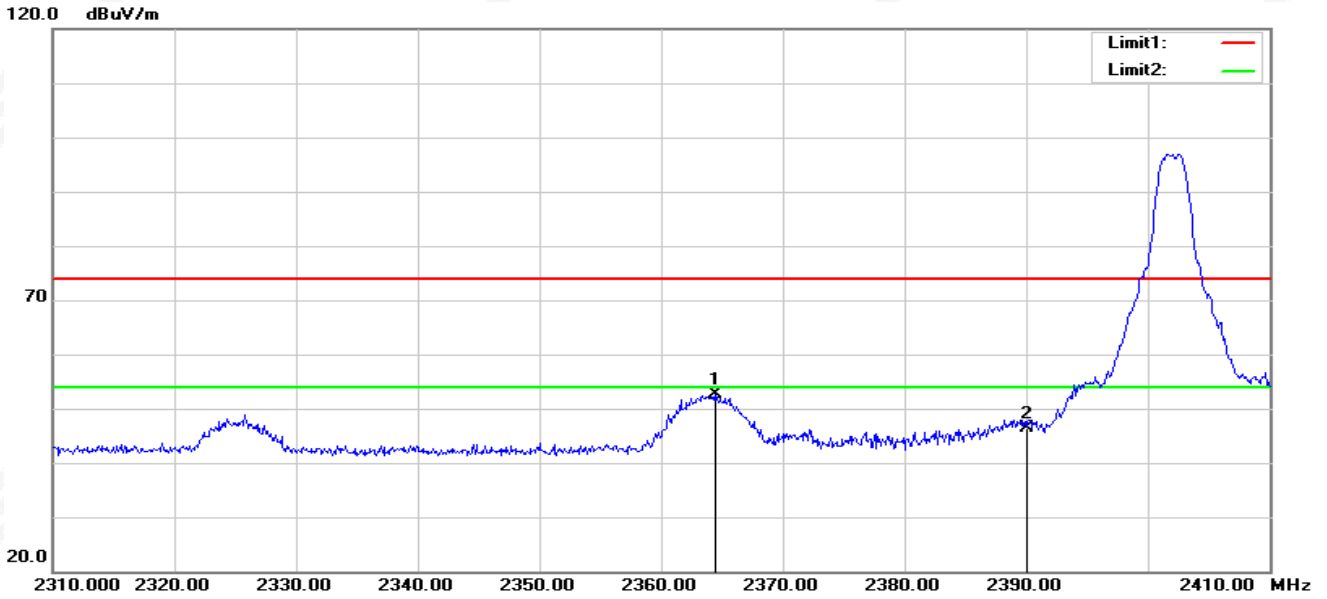

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2364.400	48.78	3.96	52.74	74.00	-21.26	peak
2	2390.000	42.16	4.34	46.50	74.00	-27.50	peak


**Vertical**

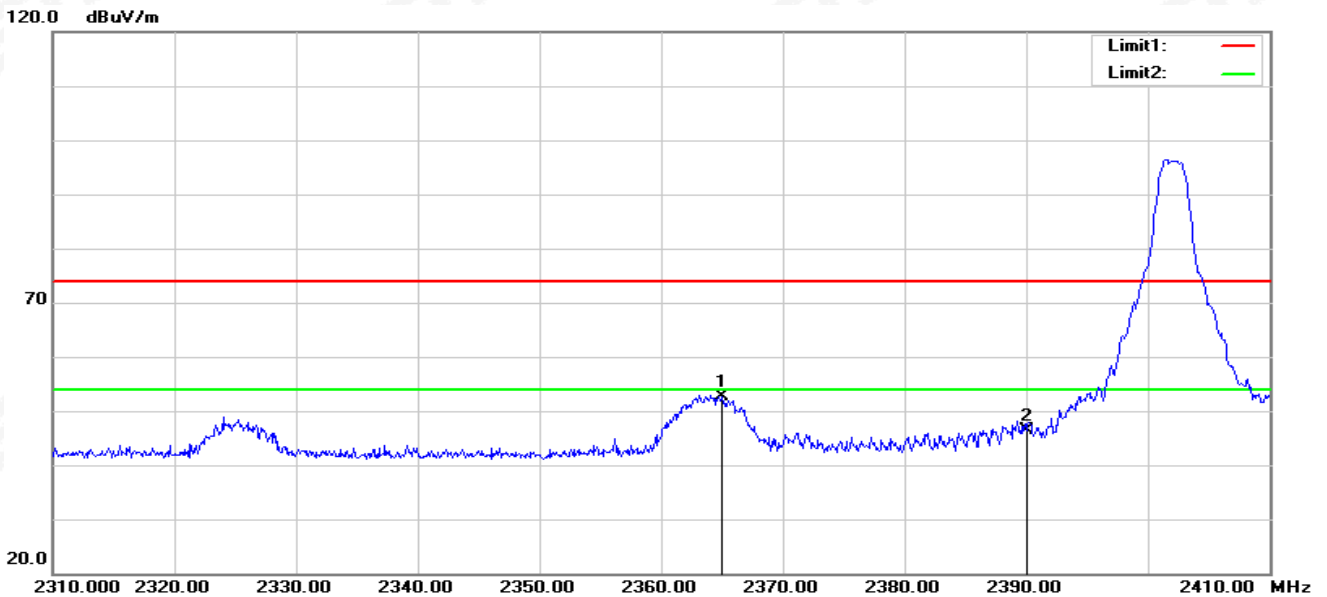

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2365.000	48.62	3.96	52.58	74.00	-21.42	peak
2	2390.000	42.10	4.34	46.44	74.00	-27.56	peak




**GFSK-High**  
Horizontal

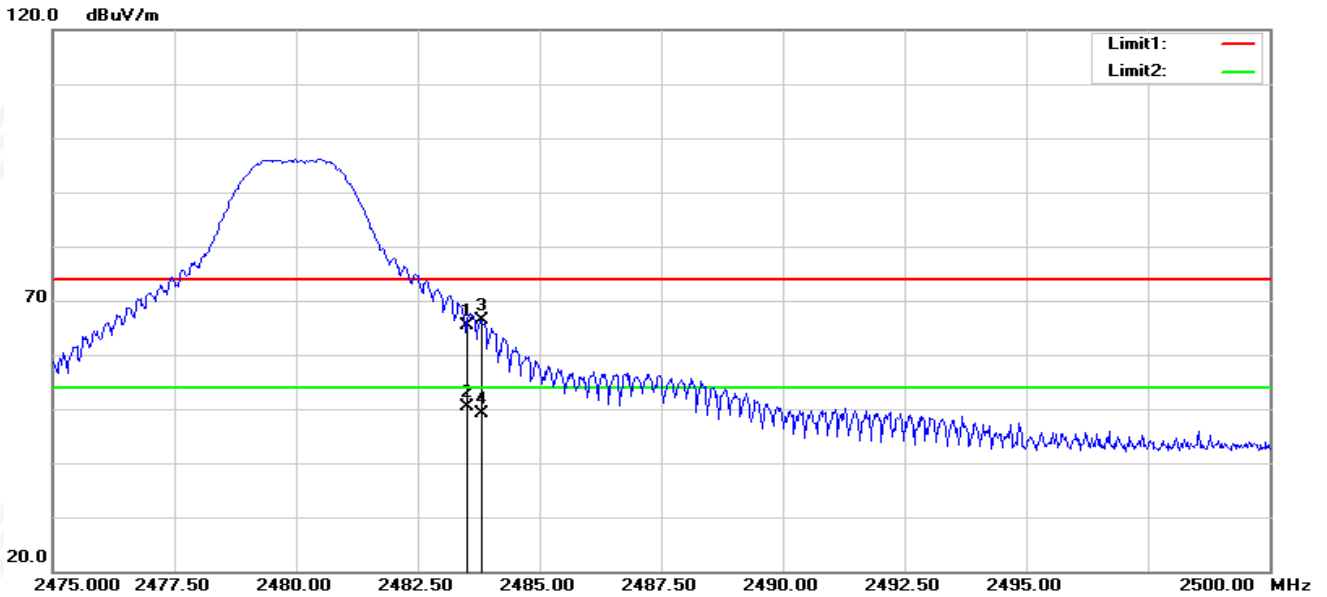

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	60.72	4.60	65.32	74.00	-8.68	peak
2	2483.500	45.84	4.60	50.44	54.00	-3.56	AVG
3	2483.800	61.82	4.60	66.42	74.00	-7.58	peak
4	2483.800	44.61	4.60	49.21	54.00	-4.79	AVG

Vertical

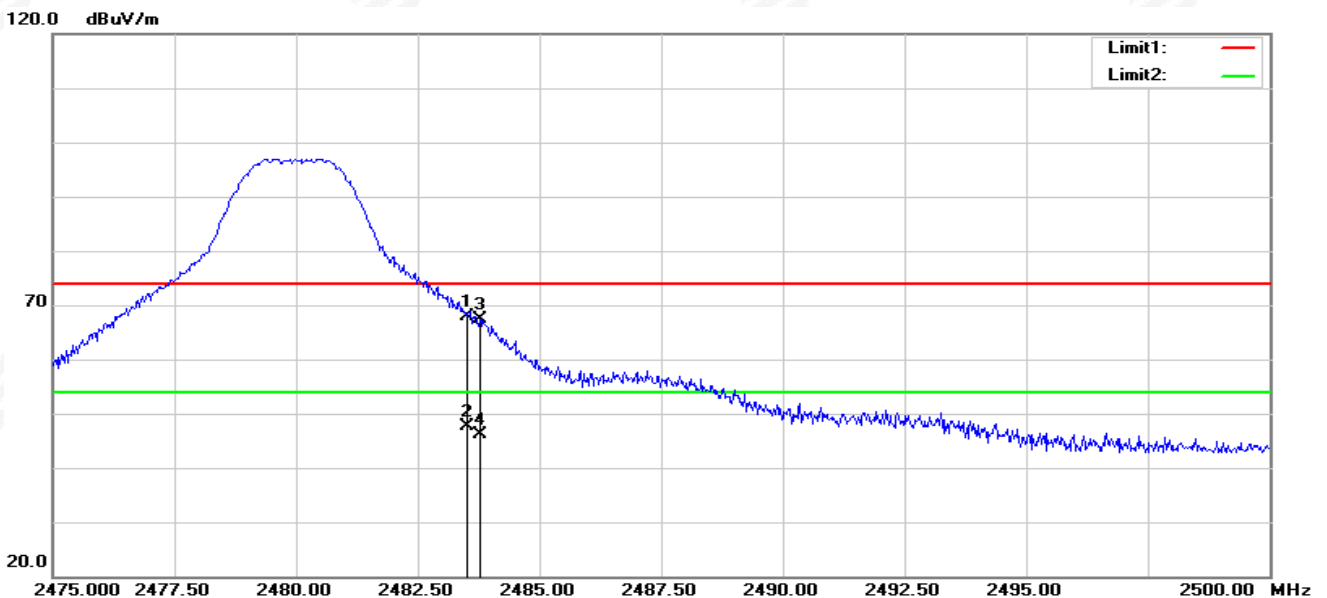

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	63.32	4.60	67.92	74.00	-6.08	peak
2	2483.500	43.07	4.60	47.67	54.00	-6.33	AVG
3	2483.775	62.88	4.60	67.48	74.00	-6.52	peak
4	2483.775	41.48	4.60	46.08	54.00	-7.92	AVG

Note: All modes have been measurement, only worst mode was reported.

## 5. CONDUCTED SPURIOUS & BAND EDGE EMISSION

### 5.1 LIMIT

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 5.2 TEST PROCEDURE

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	30 MHz to 10th carrier harmonic
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

For Band edge

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	Lower Band Edge: 2300 – 2407 MHz Upper Band Edge: 2475 – 2500 MHz
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

### 5.3 TEST SETUP



The EUT is connected to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50 Ohm; the path loss as the factor is calibrated to correct the reading. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

### 5.4 EUT OPERATION CONDITIONS

Please refer to section 3.4 of this report.

### 5.5 TEST RESULTS

Note: The test data please refer to APPENDIX 1.

## 6. POWER SPECTRAL DENSITY TEST

### 6.1 LIMIT

FCC Part 15.247, Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(e)	Power Spectral Density	$\leq 8$ dBm (RBW $\geq 3$ kHz)	2400-2483.5	PASS

### 6.2 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW to:  $100 \text{ kHz} \geq \text{RBW} \geq 3 \text{ kHz}$ .
4. Set the VBW  $\geq 3 \times \text{RBW}$ .
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### 6.3 TEST SETUP



### 6.4 EUT OPERATION CONDITIONS

Please refer to section 3.4 of this report.

### 6.5 TEST RESULTS

Note: The test data please refer to APPENDIX 1.



## 7. BANDWIDTH TEST

### 7.1 LIMIT

FCC Part 15.247, Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

### 7.2 TEST PROCEDURE

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 100 kHz, VBW  $\geq 3\text{RBW}$ , peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be  $\geq 6$  dB.

### 7.3 TEST SETUP



### 7.4 EUT OPERATION CONDITIONS

Please refer to section 3.4 of this report.

### 7.5 TEST RESULTS

Note: The test data please refer to APPENDIX 1.



## 8. PEAK OUTPUT POWER TEST

### 8.1 LIMIT

FCC Part 15.247, Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Output Power	1 watt or 30dBm	2400-2483.5	PASS

### 8.2 TEST PROCEDURE

One of the following procedures may be used to determine the averaging conducted output power of a DTS EUT.

Method AVGSA-2 uses trace averaging across ON and OFF times of the EUT transmissions, followed by duty cycle correction. The procedure for this method is as follows:

- Measure the duty cycle D of the transmitter output signal as described in 11.6.
- Set span to at least 1.5 times the OBW.
- Set RBW = 1% to 5% of the OBW, not to exceed 1 MHz.
- Set VBW  $\geq [3 \times \text{RBW}]$ .
- Number of points in sweep  $\geq [2 \times \text{span} / \text{RBW}]$ . (This gives bin-to-bin spacing  $\leq \text{RBW} / 2$ , so that narrowband signals are not lost between frequency bins.)
- Sweep time = auto.
- Detector = RMS (i.e., power averaging), if available. Otherwise, use the sample detector mode.
- Do not use sweep triggering. Allow the sweep to "free run."
- Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed such that the average accurately represents the true average over the ON and OFF periods of the transmitter.
- Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.
- Add  $[10 \log (1 / D)]$ , where D is the duty cycle, to the measured power to compute the average power during the actual transmission times (because the measurement represents an average over both the ON and OFF times of the transmission). For example, add  $[10 \log (1/0.25)] = 6 \text{ dB}$  if the duty cycle is 25%.

One of the following procedures may be used to determine the maximum peak conducted output power of a DTS EUT.

$\text{RBW} \geq \text{DTS bandwidth}$

The following procedure shall be used when an instrument with a resolution bandwidth that is greater than the DTS bandwidth is available to perform the measurement:

- Set the RBW  $\geq \text{DTS bandwidth}$ .
- Set VBW  $\geq [3 \times \text{RBW}]$ .
- Set span  $\geq [3 \times \text{RBW}]$ .
- Sweep time = auto couple.
- Detector = peak.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use peak marker function to determine the peak amplitude level.

Integrated band power method:

The following procedure can be used when the maximum available RBW of the instrument is less than the


DTS bandwidth:

- a) Set the RBW = 1 MHz.
- b) Set the VBW  $\geq [3 \times \text{RBW}]$ .
- c) Set the span  $\geq [1.5 \times \text{DTS bandwidth}]$ .
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select the peak detector). If the instrument does not have a band power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS channel bandwidth.

PKPM1 Peak power meter method:

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

### 8.3 TEST SETUP

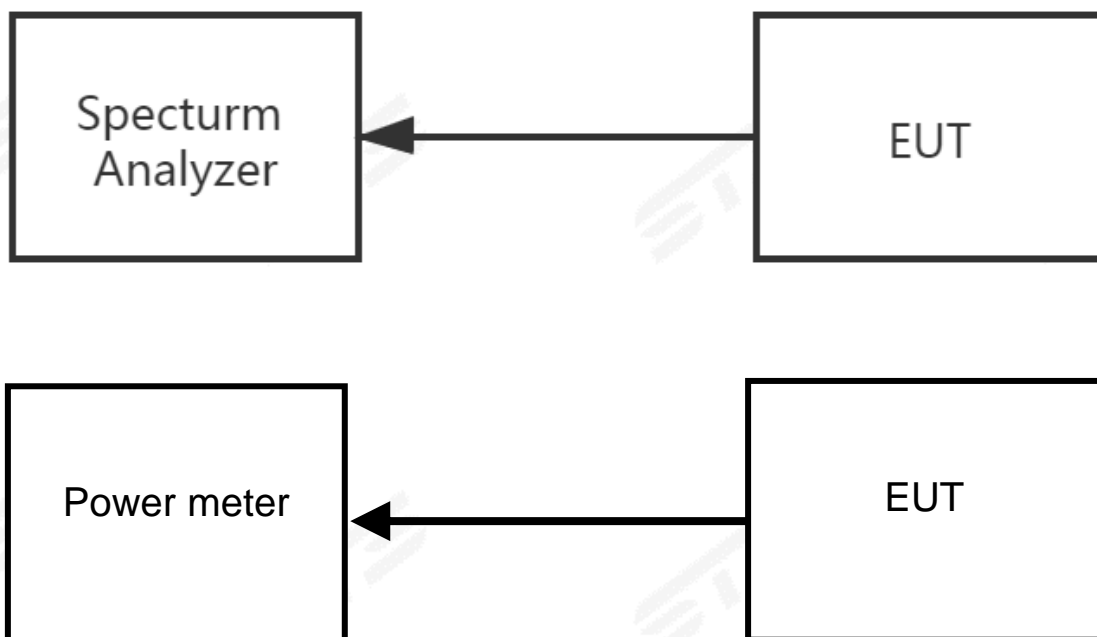

### 8.4 EUT OPERATION CONDITIONS

Please refer to section 3.4 of this report.

### 8.5 TEST RESULTS

Note: The test data please refer to APPENDIX 1.



## 9. ANTENNA REQUIREMENT

### 9.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 9.2 EUT ANTENNA


The EUT antenna is PCB Antenna. It comply with the standard requirement.



## APPENDIX 1-TEST DATA

## 1. Duty Cycle

Condition	Mode	Frequency (MHz)	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	BLE 1M	2402	85.52	0.68	0.47
NVNT	BLE 1M	2440	85.6	0.68	0.47
NVNT	BLE 1M	2480	85.52	0.68	0.47
NVNT	BLE 2M	2402	57.71	2.39	0.92
NVNT	BLE 2M	2440	57.71	2.39	0.92
NVNT	BLE 2M	2480	57.71	2.39	0.92

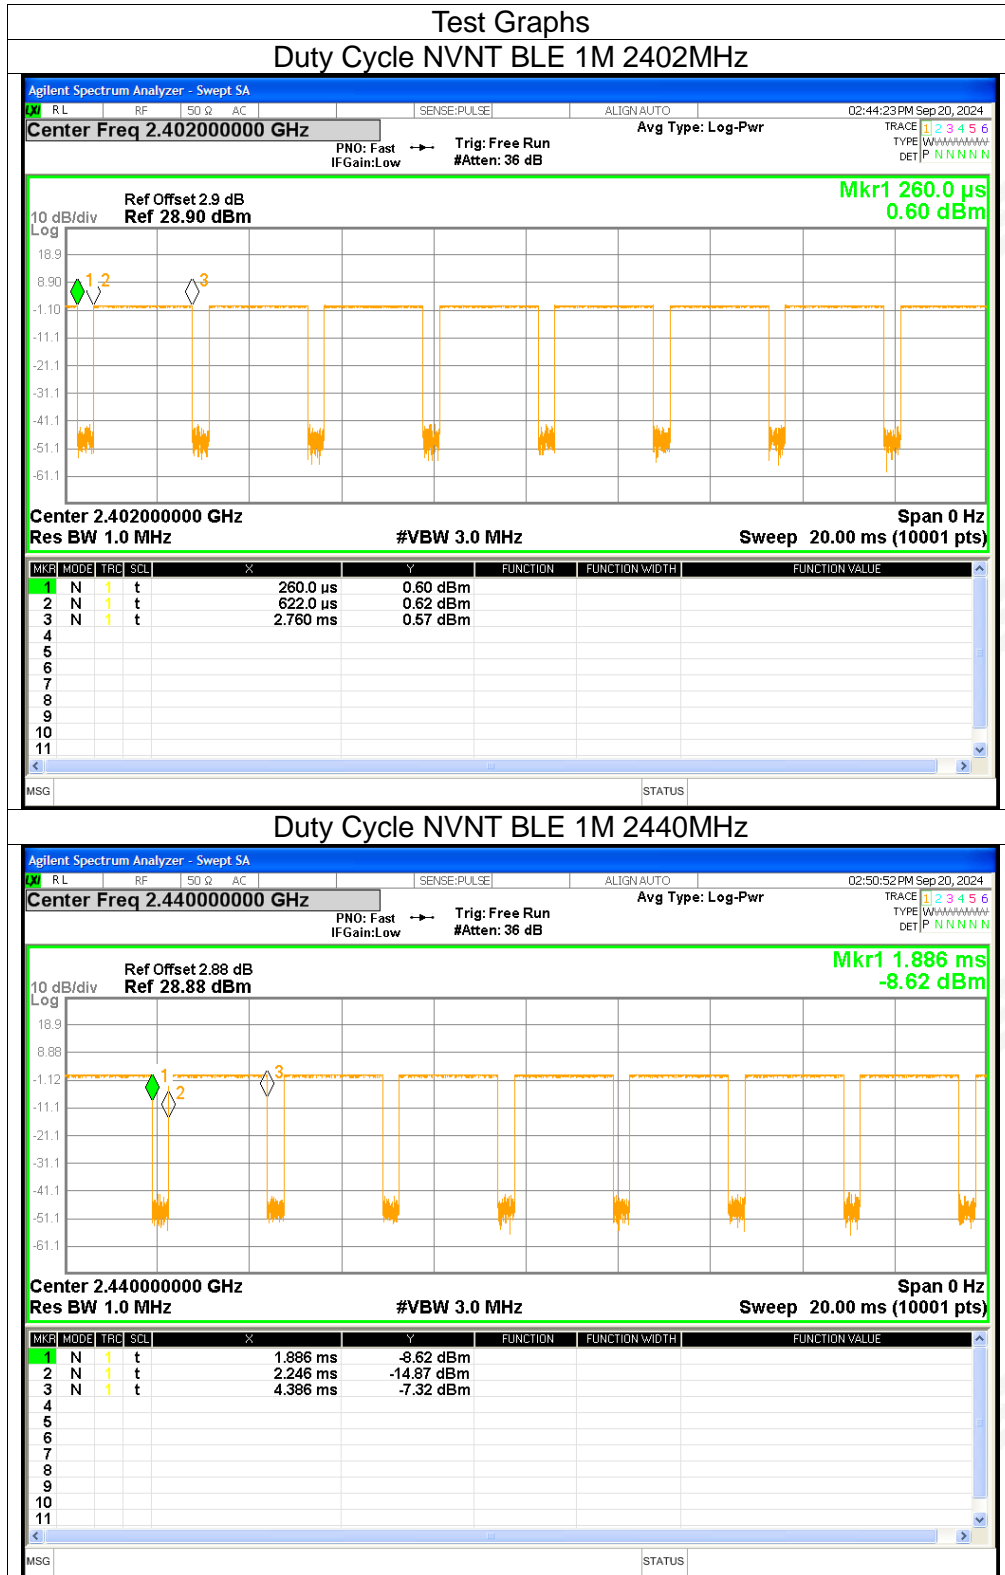















## 2. Maximum Average Conducted Output Power

Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	-0.1	0.68	0.58	<=30	Pass
NVNT	BLE 1M	2440	0.17	0.68	0.85	<=30	Pass
NVNT	BLE 1M	2480	0.32	0.68	1	<=30	Pass
NVNT	BLE 2M	2402	-1.89	2.39	0.5	<=30	Pass
NVNT	BLE 2M	2440	-1.61	2.39	0.78	<=30	Pass
NVNT	BLE 2M	2480	-1.44	2.39	0.95	<=30	Pass

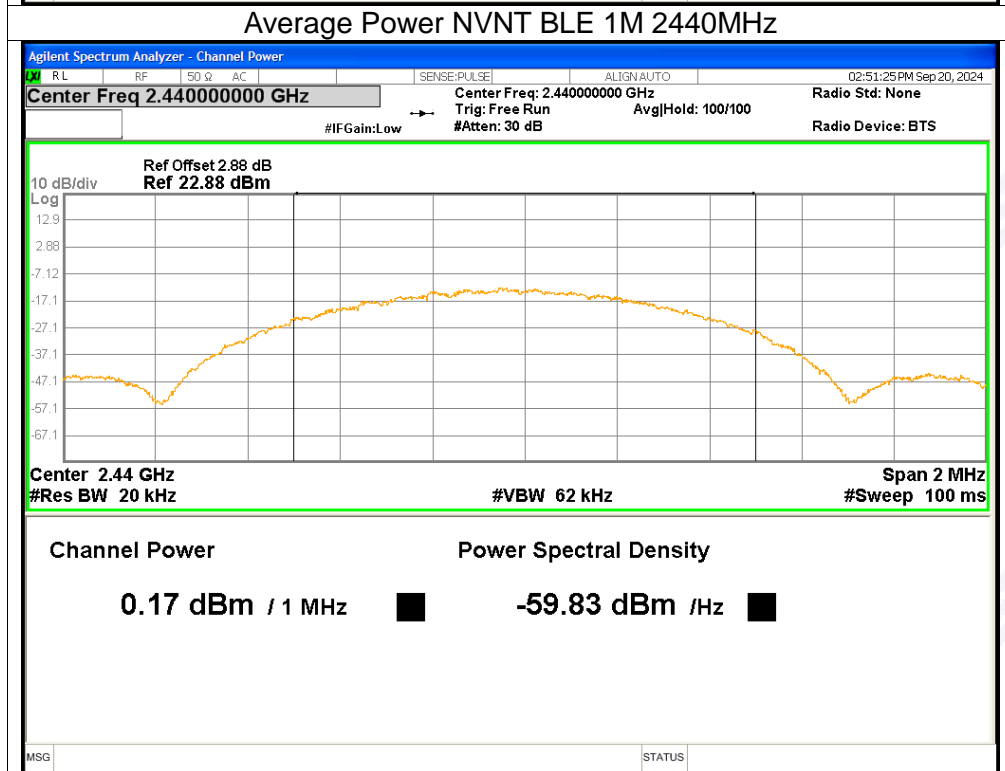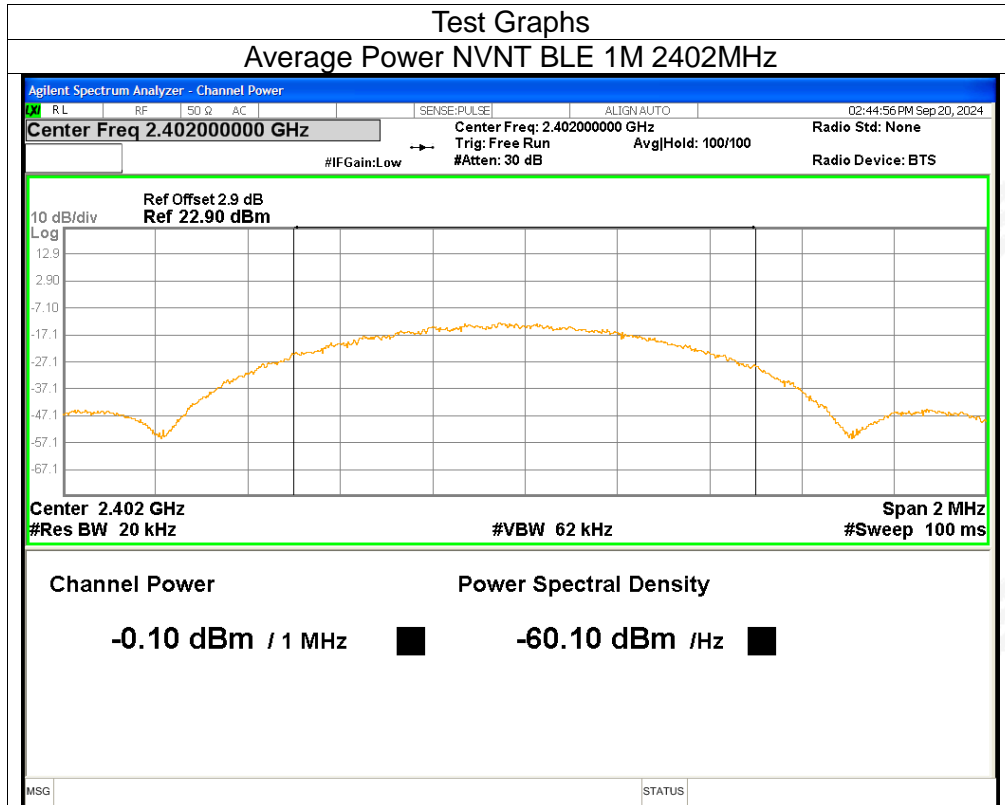

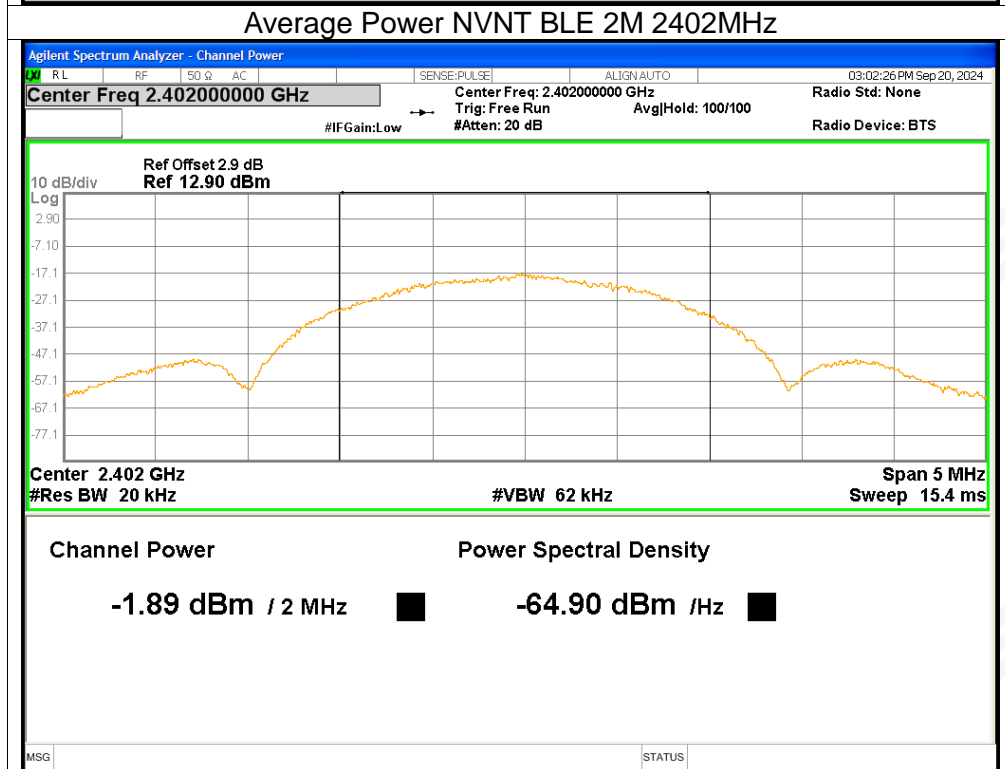
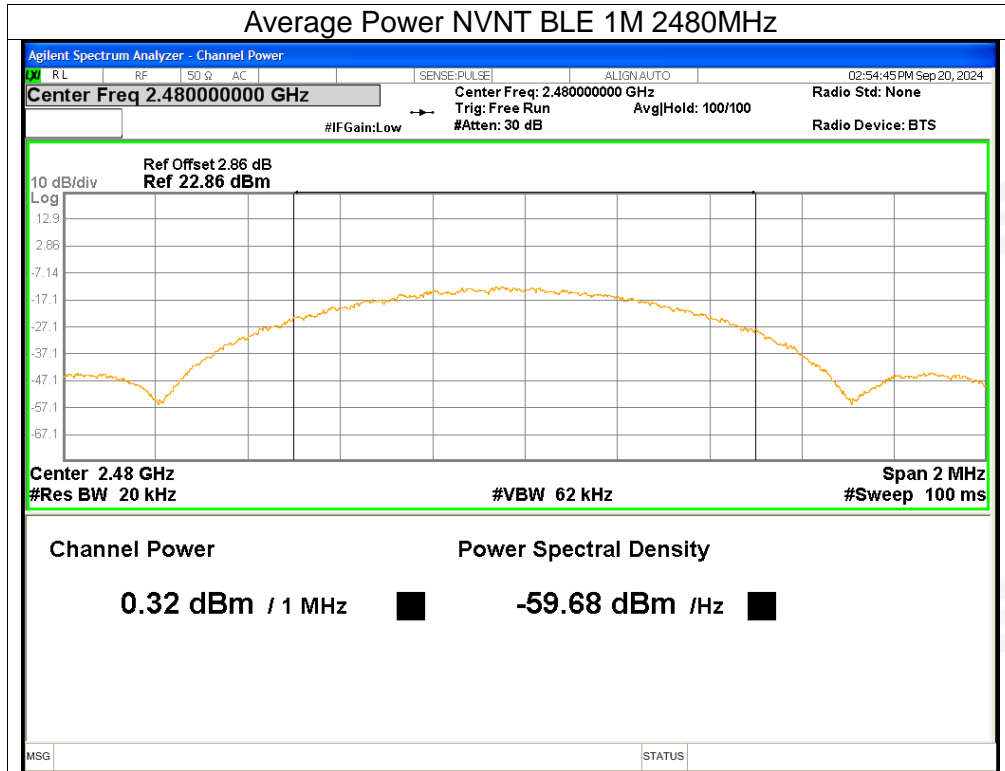


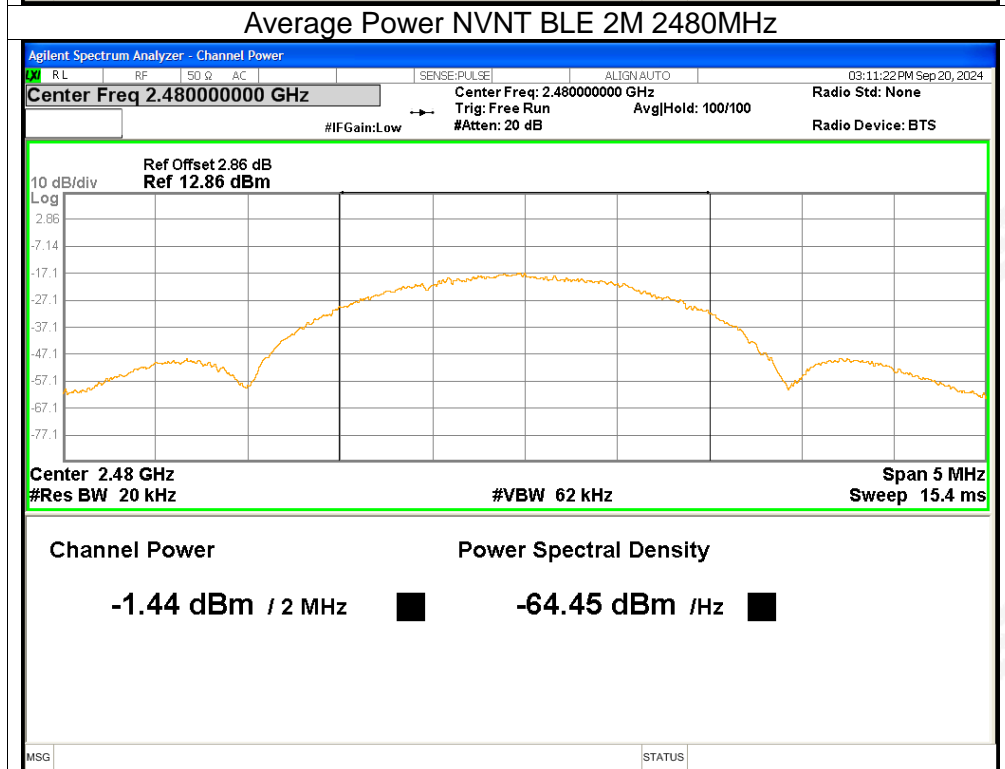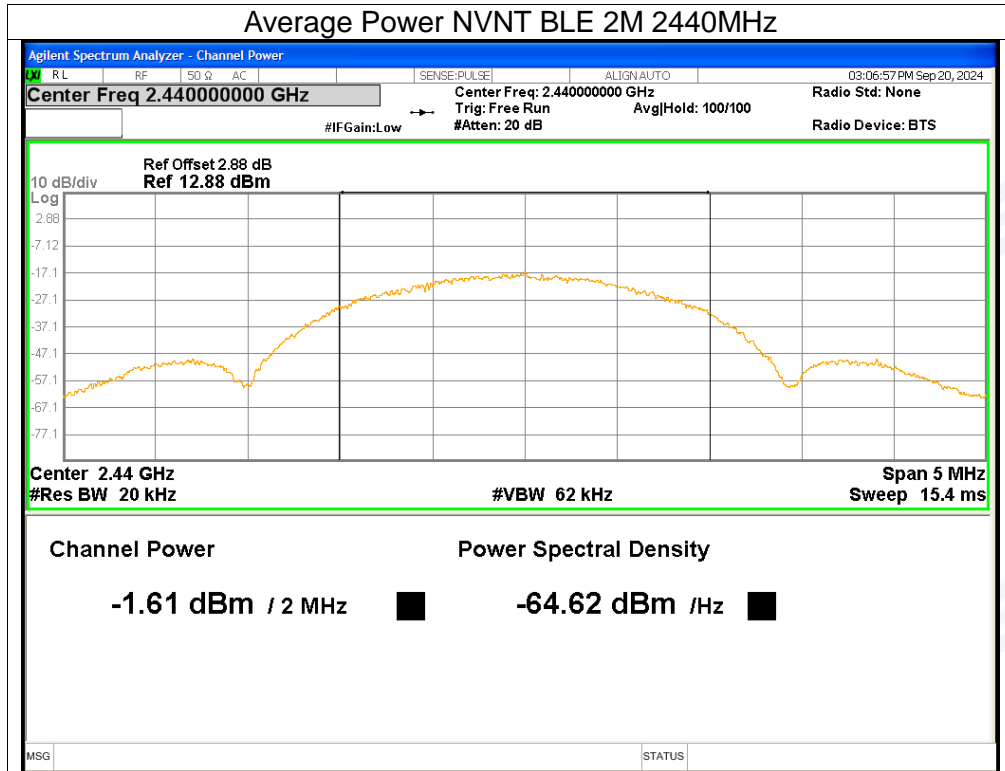




### 3. Maximum Peak Conducted Output Power

Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	0.74	<=30	Pass
NVNT	BLE 1M	2440	0.98	<=30	Pass
NVNT	BLE 1M	2480	1.16	<=30	Pass
NVNT	BLE 2M	2402	0.73	<=30	Pass
NVNT	BLE 2M	2440	0.94	<=30	Pass
NVNT	BLE 2M	2480	1.14	<=30	Pass

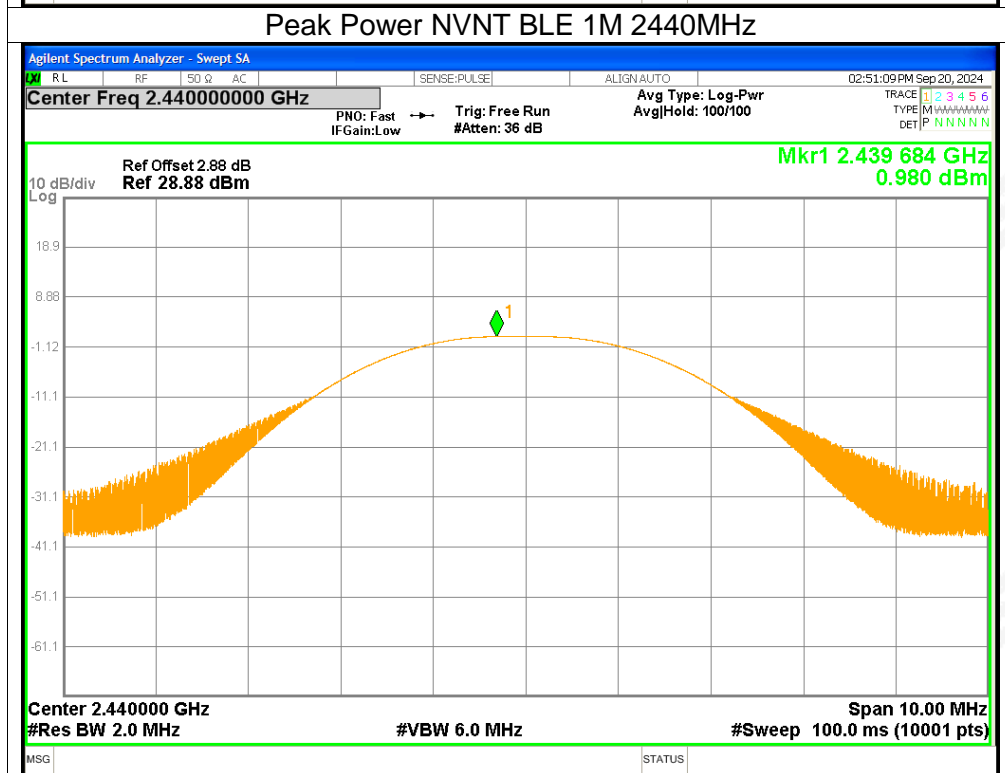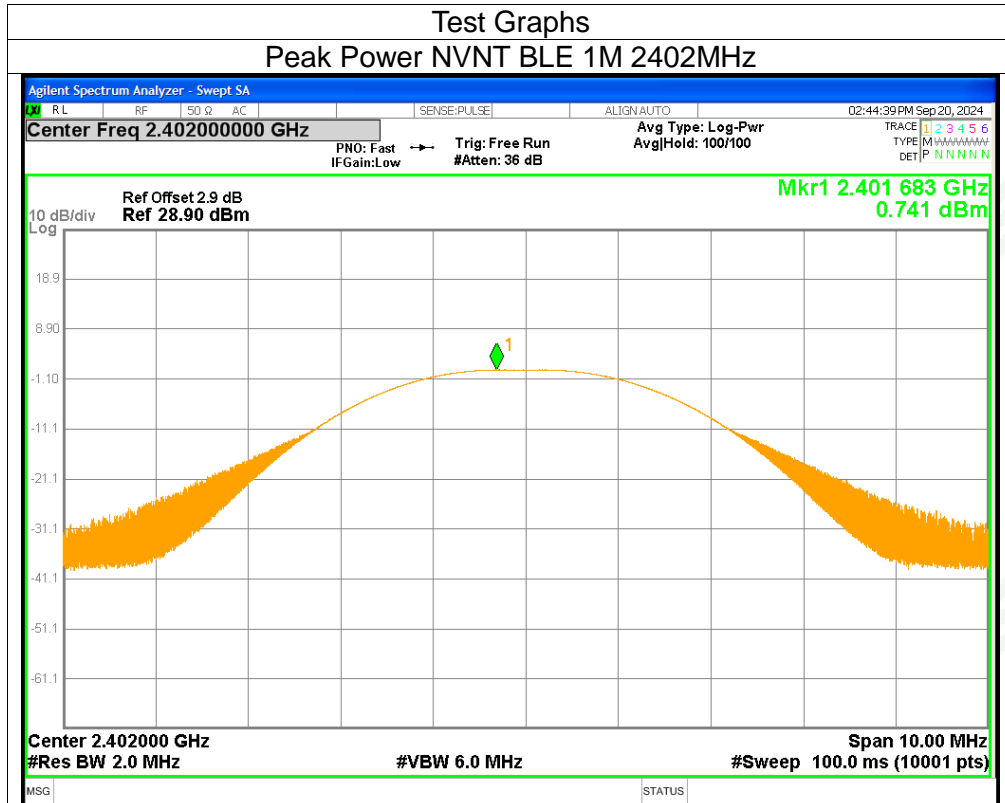






### Peak Power NVNT BLE 1M 2480MHz

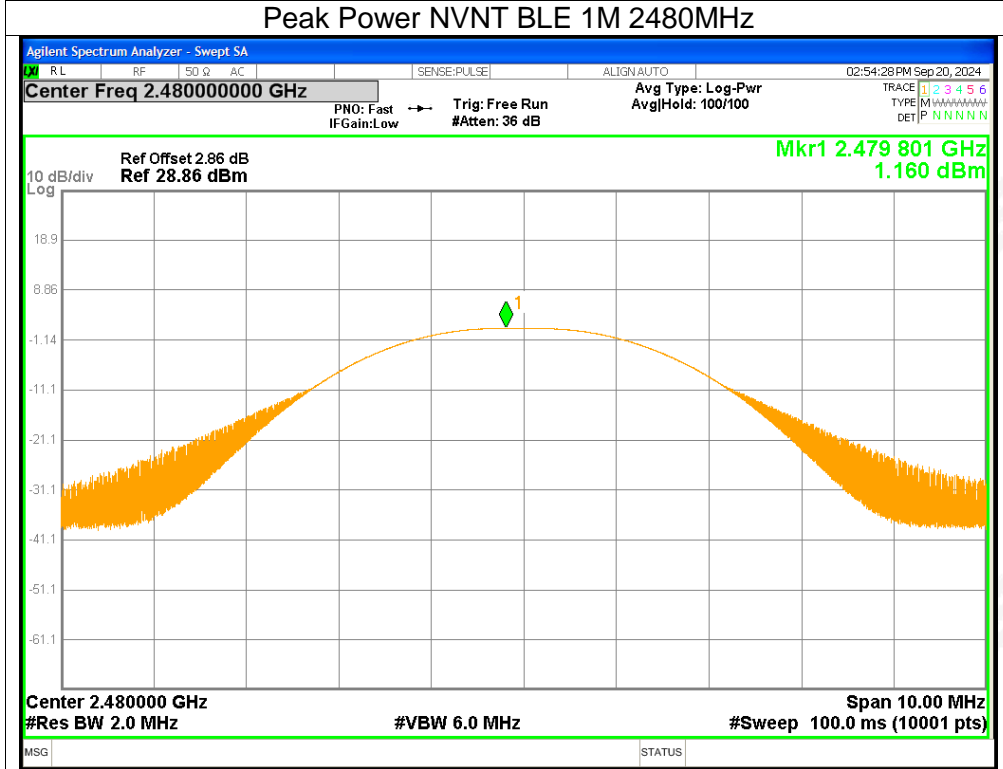

### Peak Power NVNT BLE 2M 2402MHz

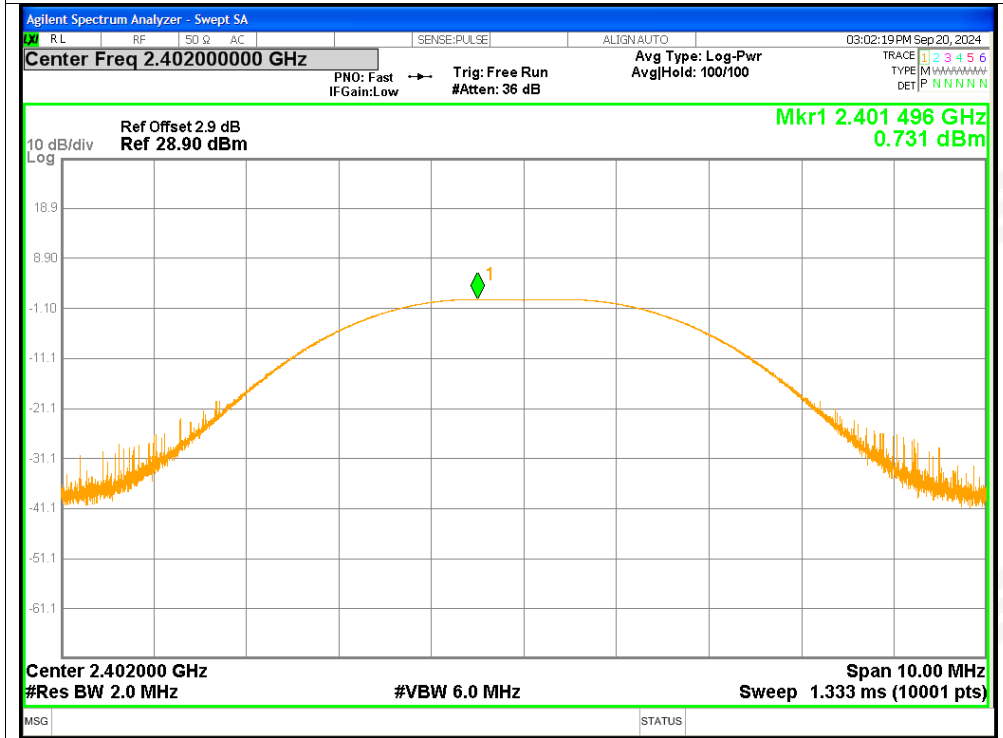

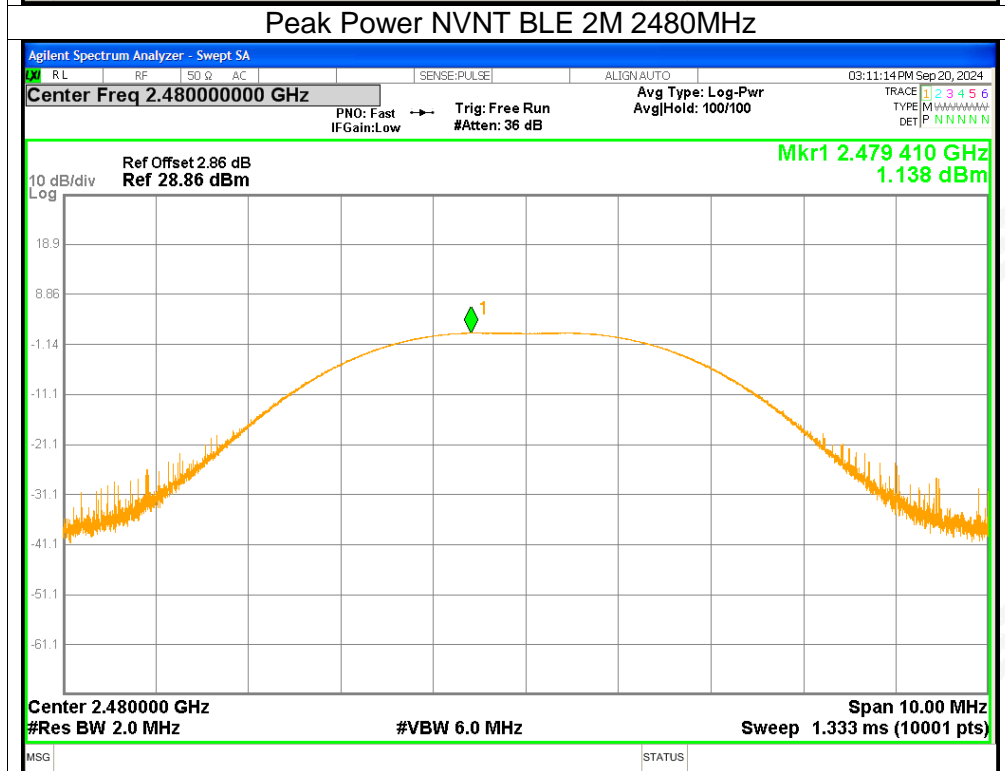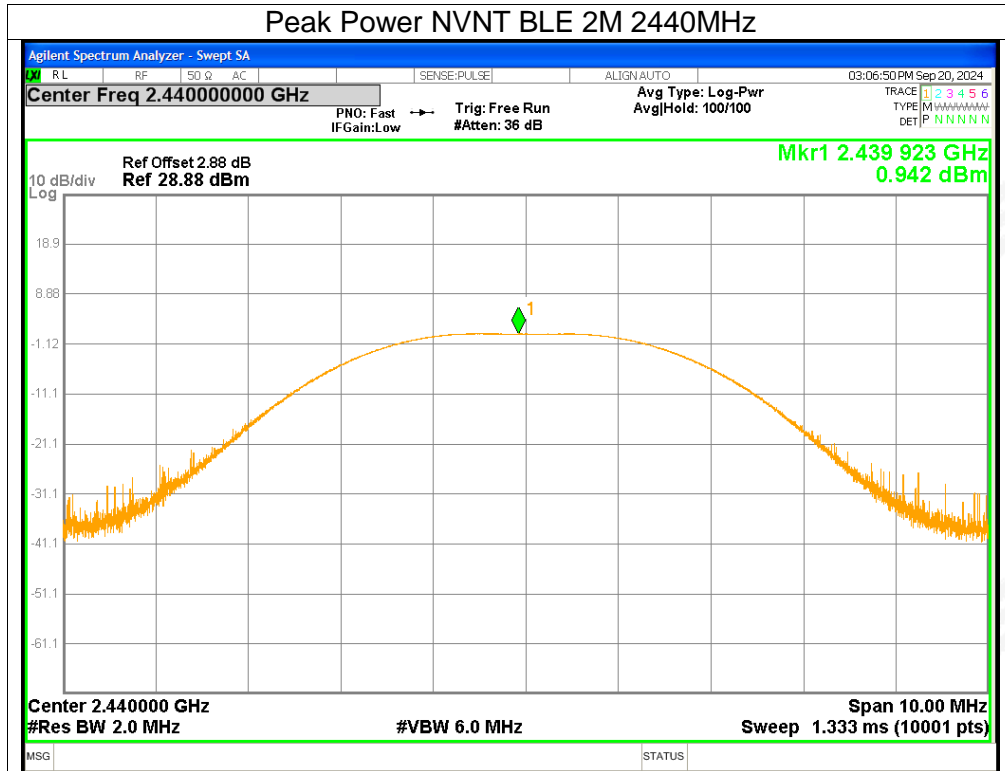








#### 4. -6dB Bandwidth


Condition	Mode	Frequency (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	0.6441	$\geq 0.5$	Pass
NVNT	BLE 1M	2440	0.6456	$\geq 0.5$	Pass
NVNT	BLE 1M	2480	0.6443	$\geq 0.5$	Pass
NVNT	BLE 2M	2402	1.1632	$\geq 0.5$	Pass
NVNT	BLE 2M	2440	1.1607	$\geq 0.5$	Pass
NVNT	BLE 2M	2480	1.101	$\geq 0.5$	Pass

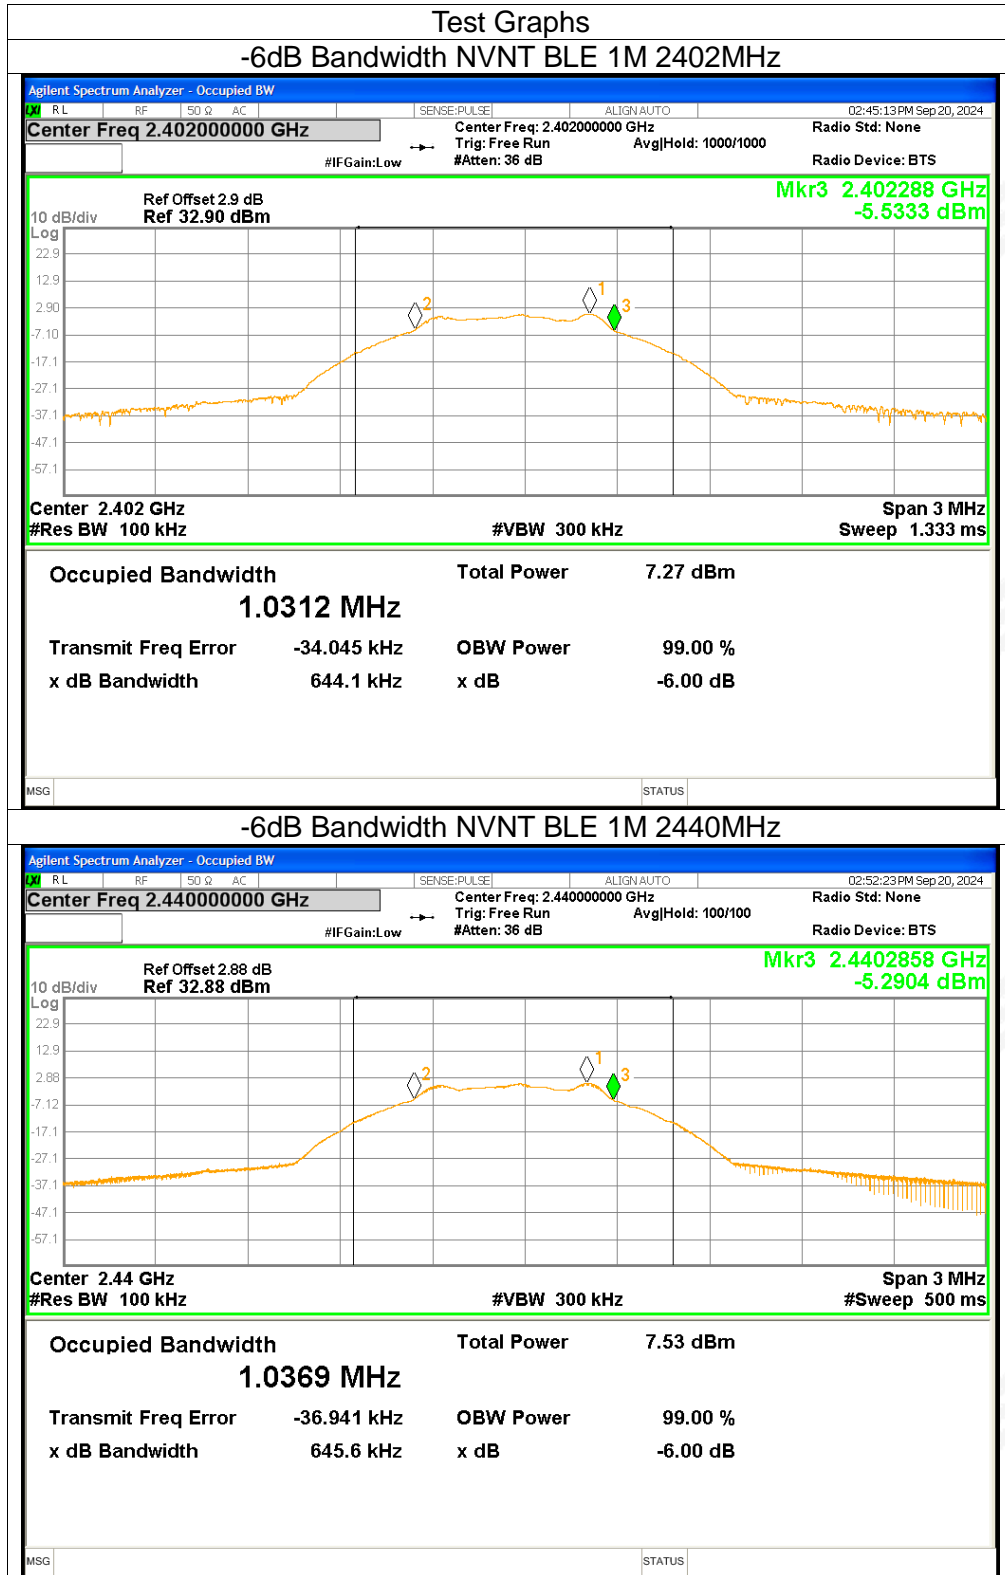

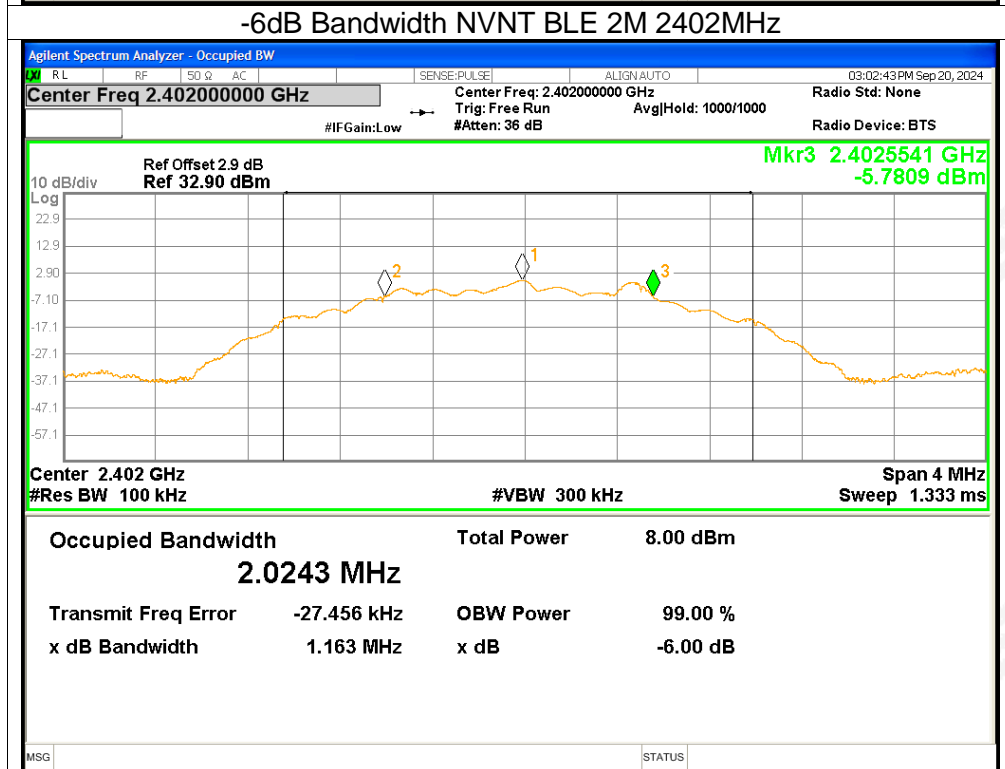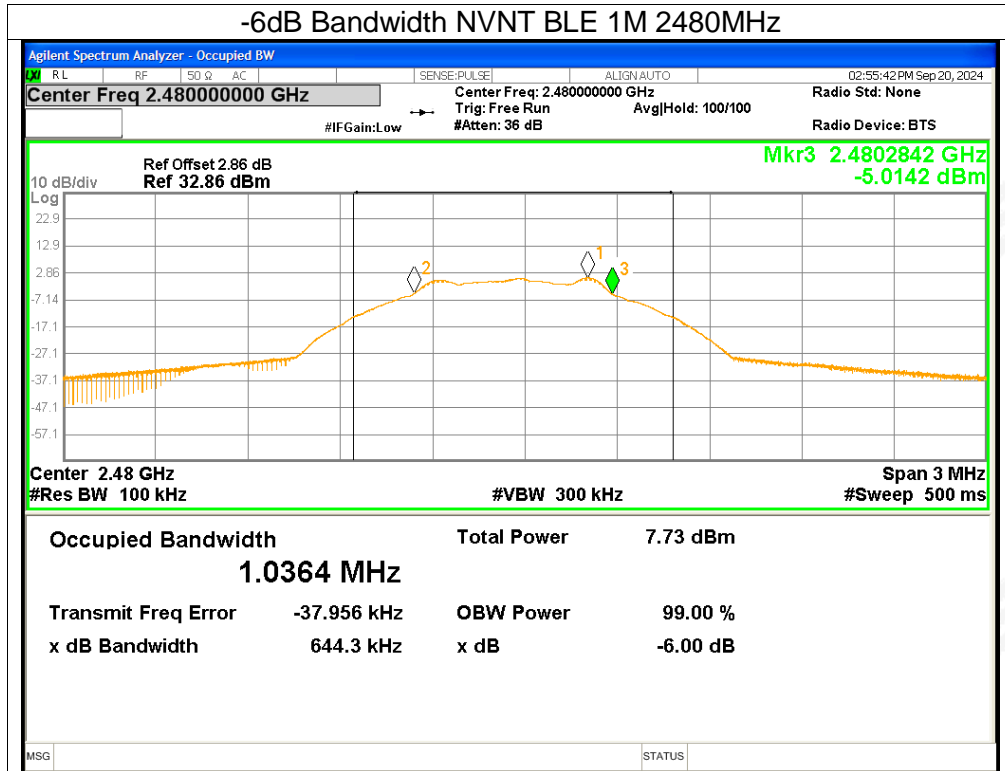




### -6dB Bandwidth NVNT BLE 2M 2440MHz

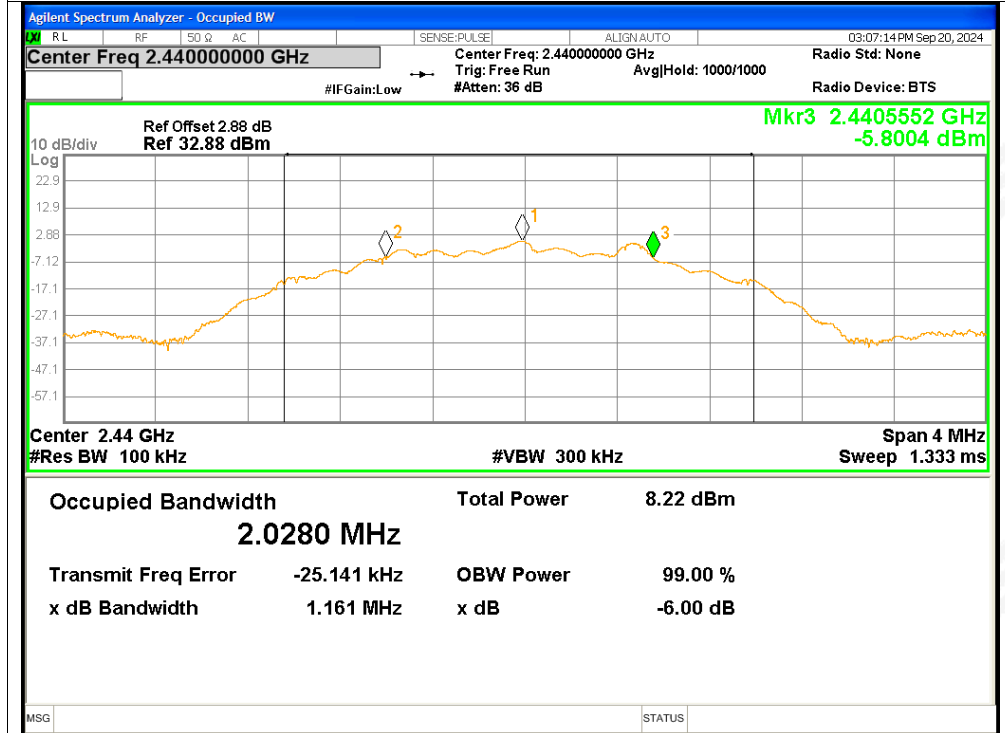


### -6dB Bandwidth NVNT BLE 2M 2480MHz


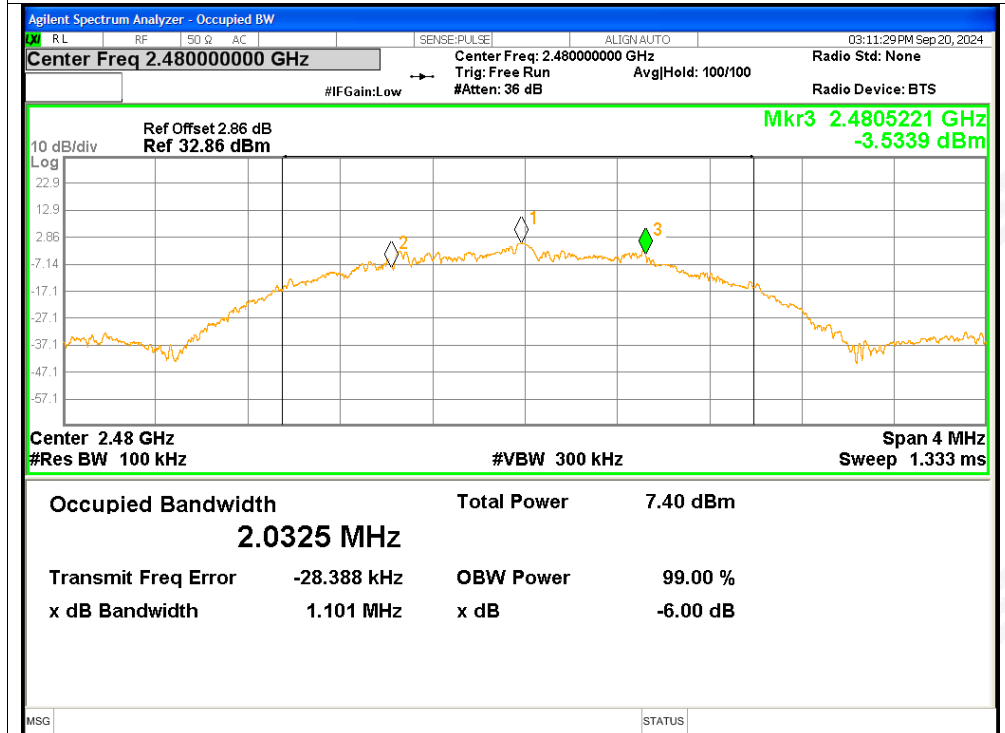






## 5. Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	BLE 1M	2402	-14.69	$\leq 8$	Pass
NVNT	BLE 1M	2440	-14.39	$\leq 8$	Pass
NVNT	BLE 1M	2480	-14.18	$\leq 8$	Pass
NVNT	BLE 2M	2402	-18.05	$\leq 8$	Pass
NVNT	BLE 2M	2440	-17.75	$\leq 8$	Pass
NVNT	BLE 2M	2480	-17.58	$\leq 8$	Pass

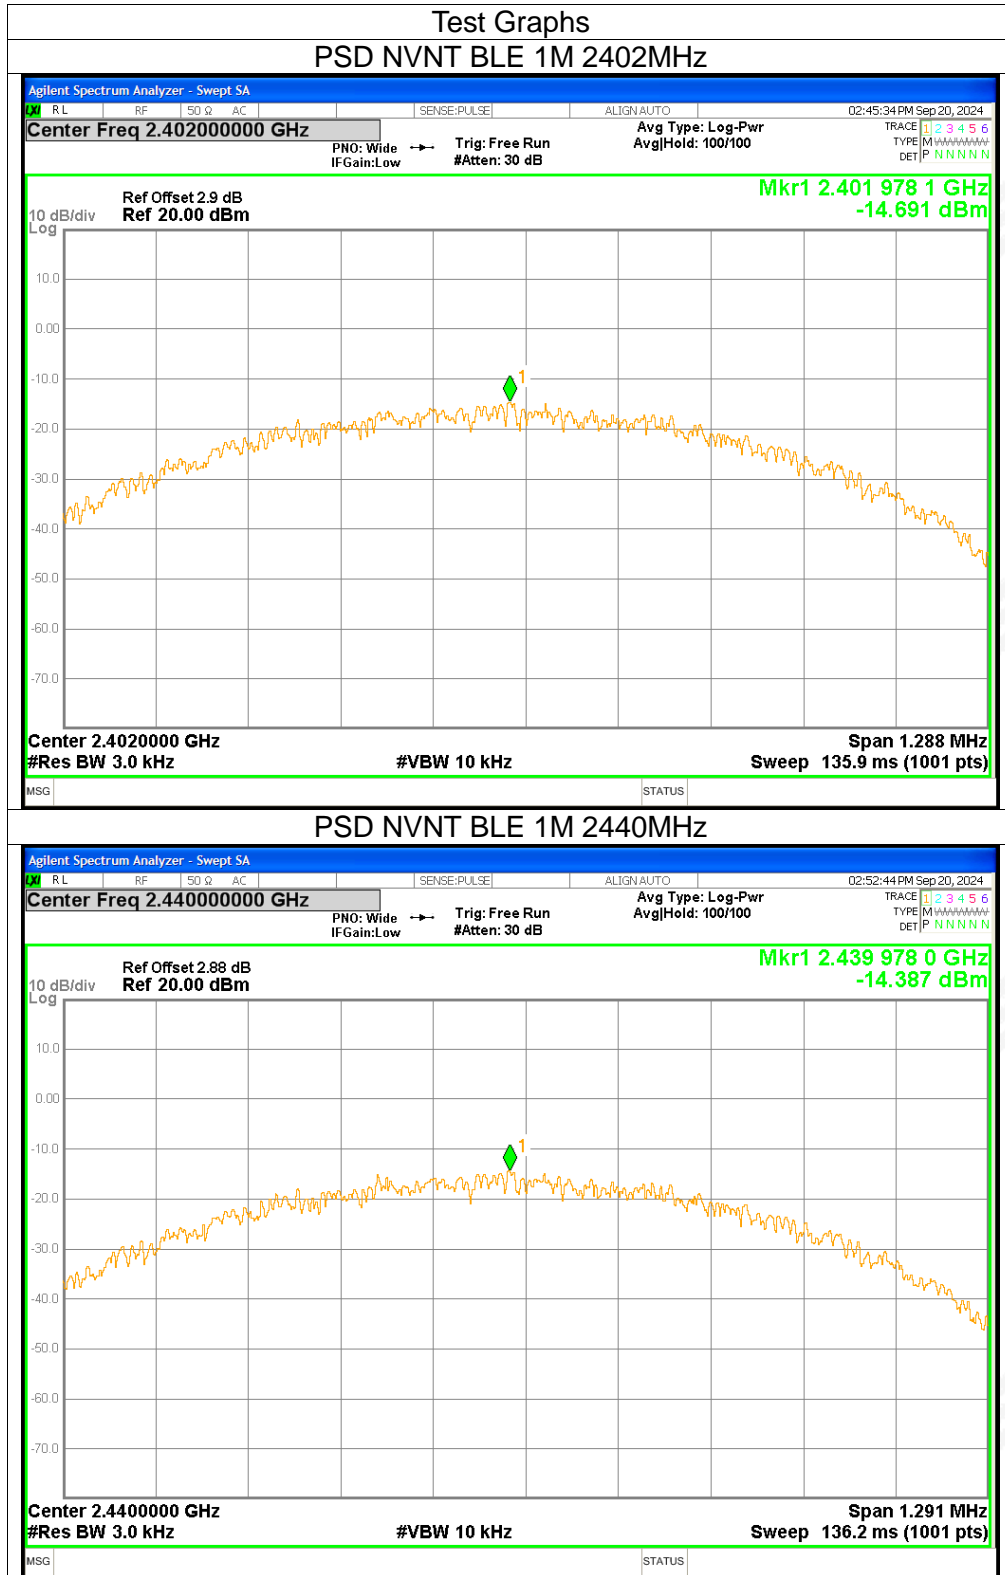

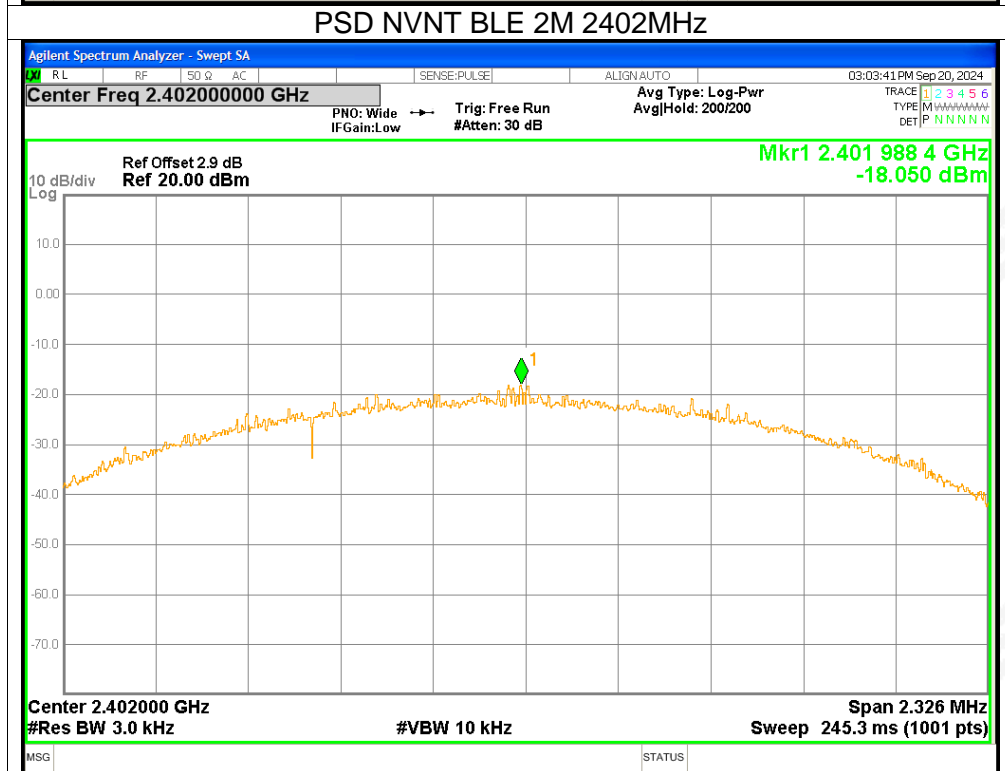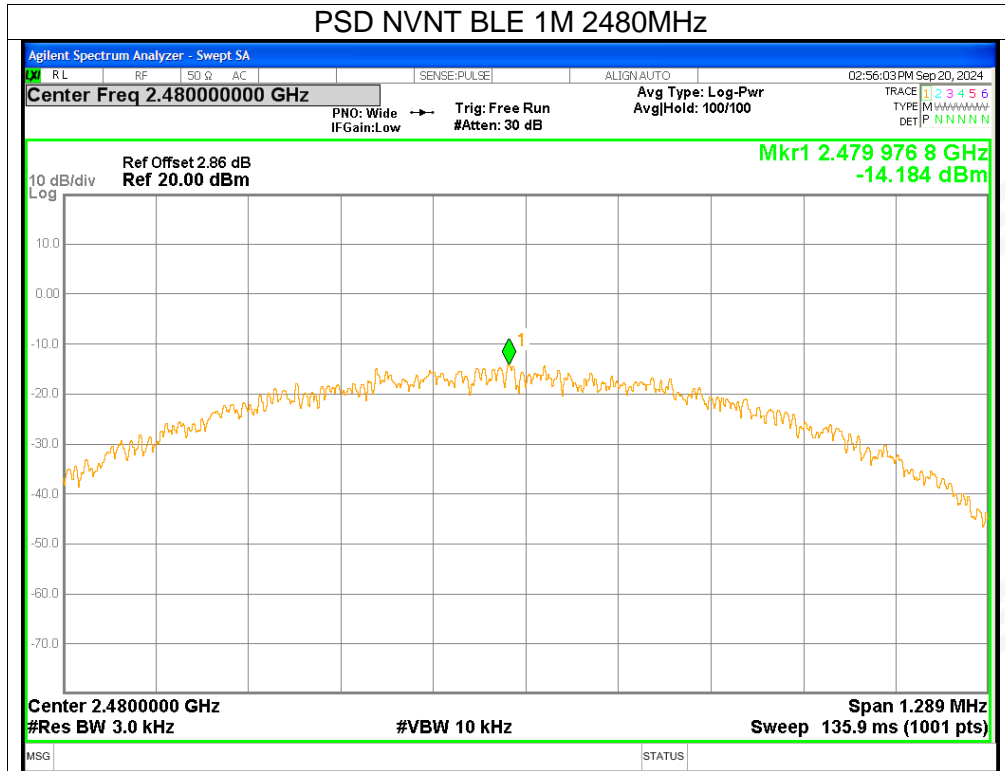

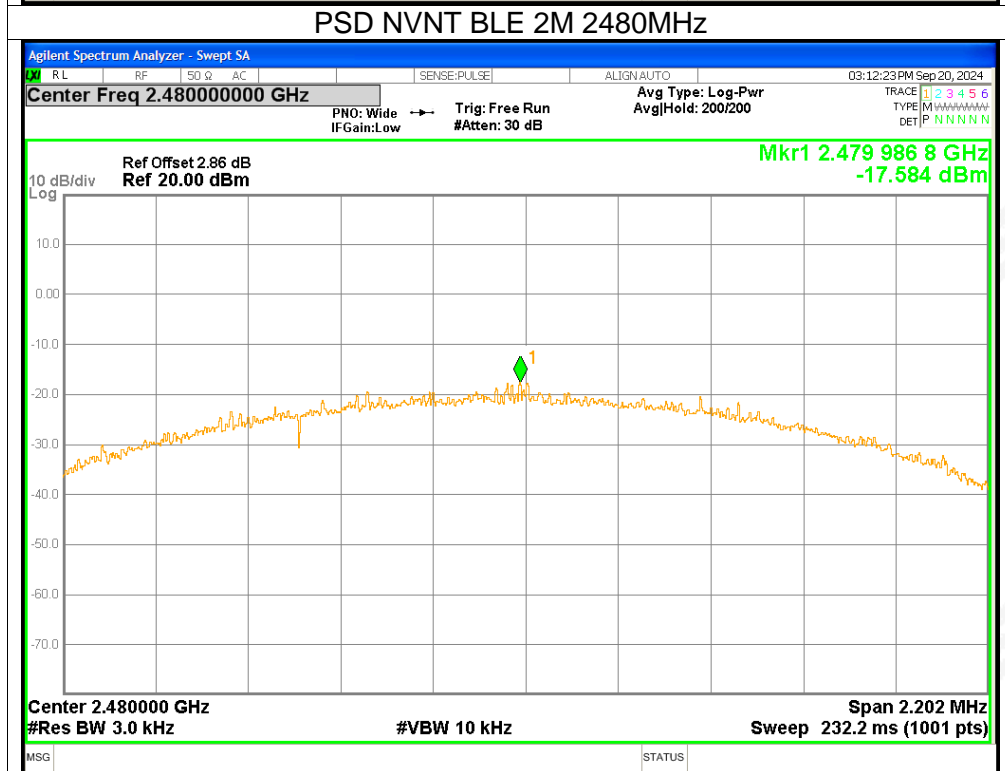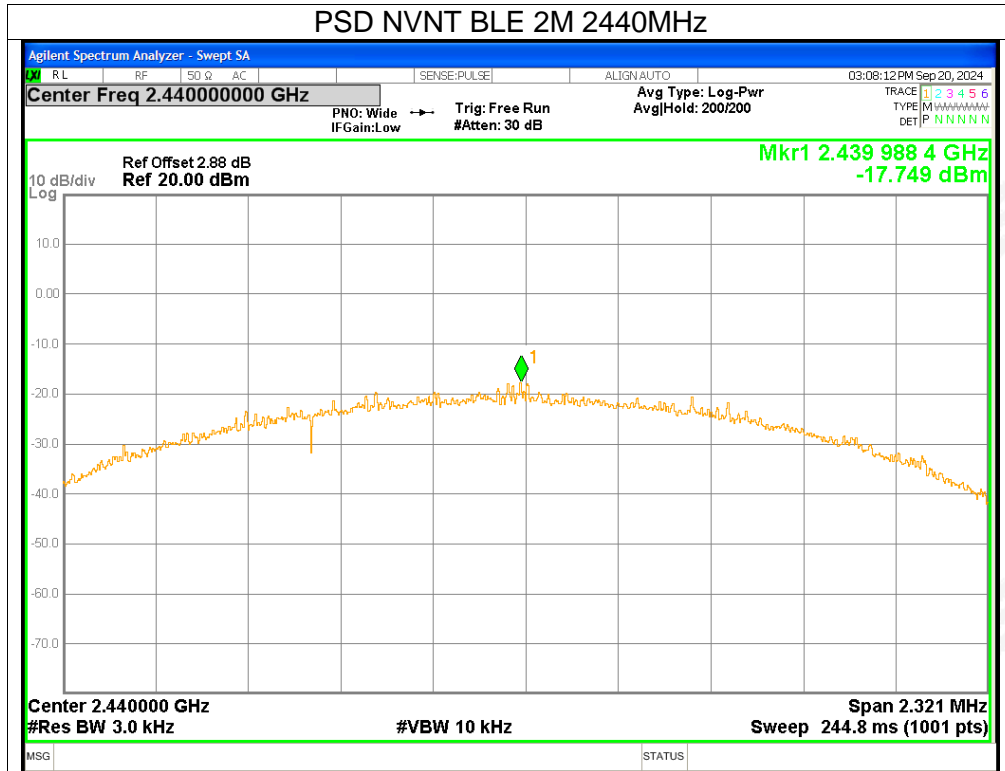







## 6. Band Edge

Condition	Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	-40.35	<=-20	Pass
NVNT	BLE 1M	2480	-49.12	<=-20	Pass
NVNT	BLE 2M	2402	-33.74	<=-20	Pass
NVNT	BLE 2M	2480	-46.93	<=-20	Pass



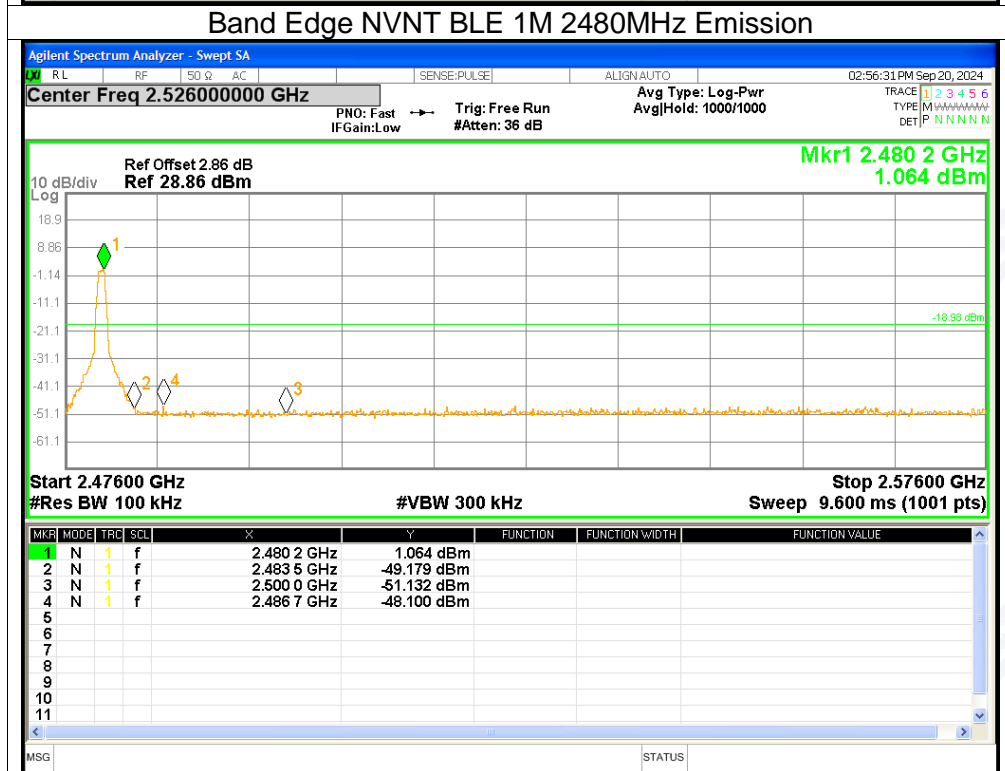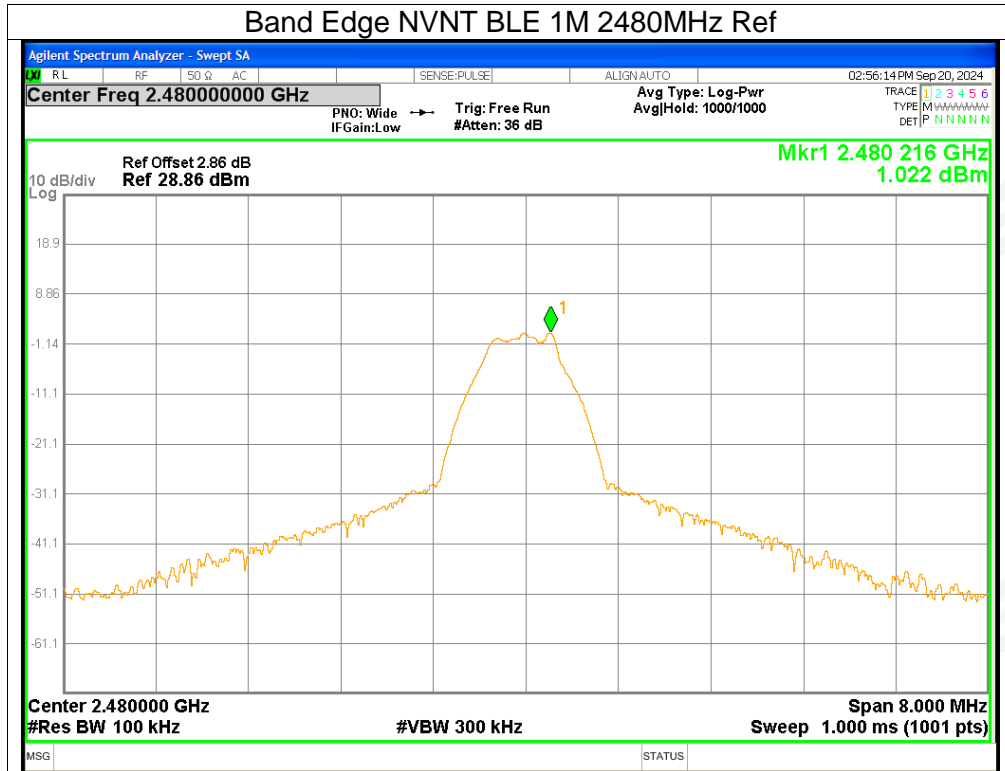









## 7. Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	-28.53	<=-20	Pass
NVNT	BLE 1M	2440	-29.42	<=-20	Pass
NVNT	BLE 1M	2480	-28.96	<=-20	Pass
NVNT	BLE 2M	2402	-32.62	<=-20	Pass
NVNT	BLE 2M	2440	-32.57	<=-20	Pass
NVNT	BLE 2M	2480	-30.07	<=-20	Pass

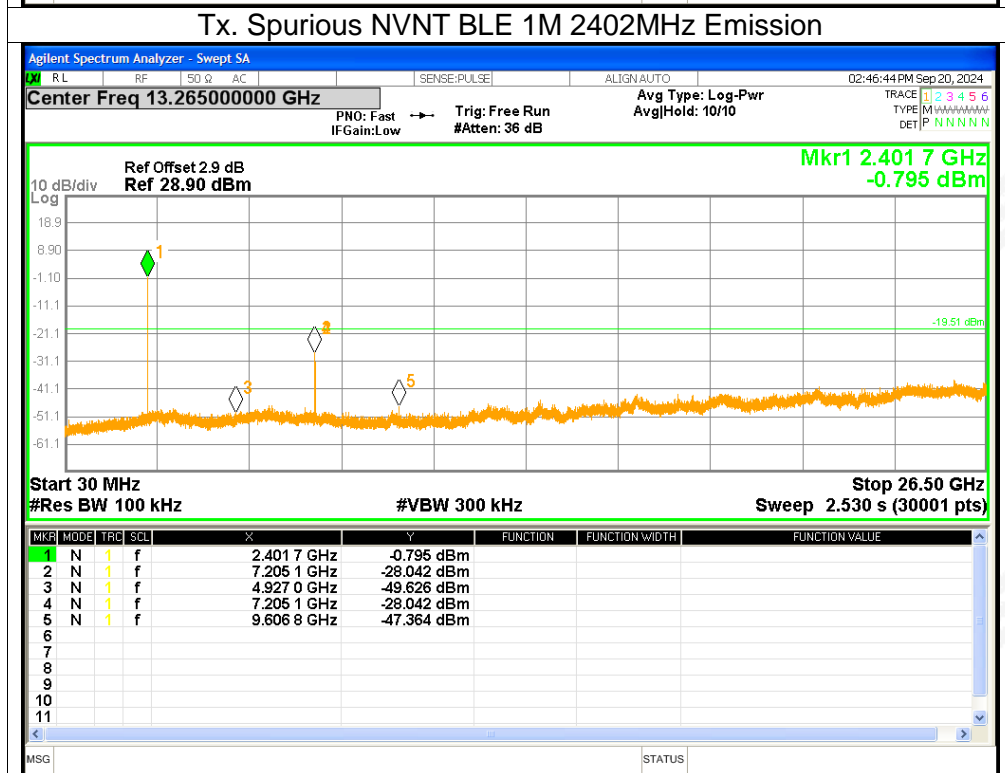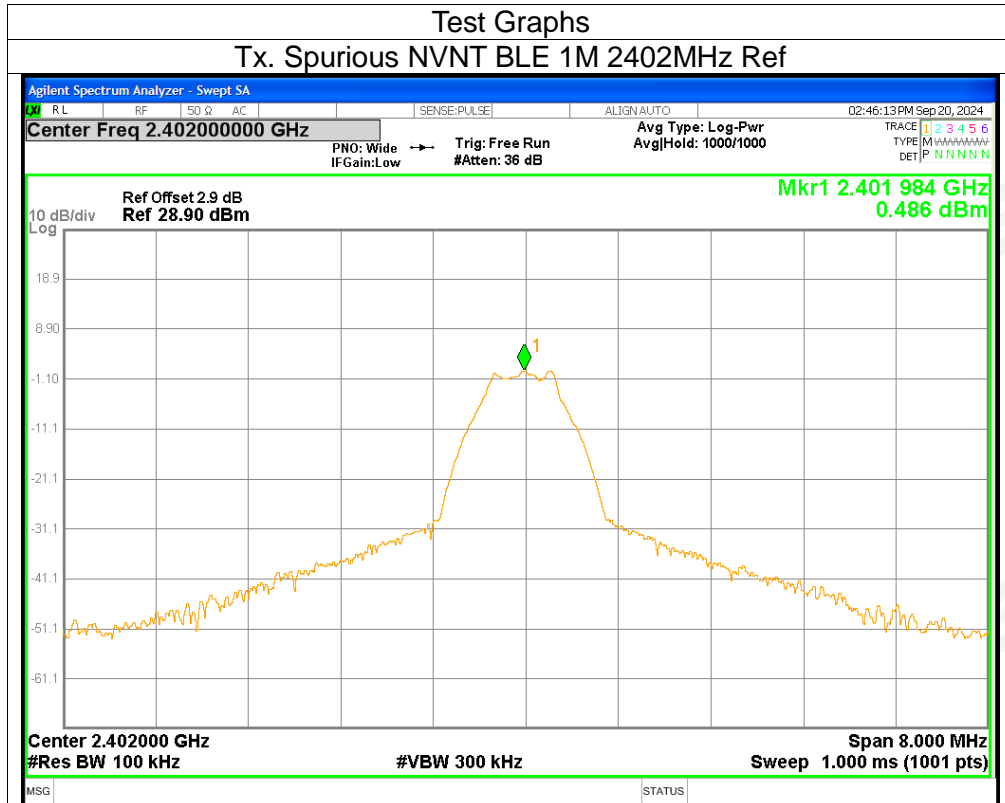









### Tx. Spurious NVNT BLE 1M 2480MHz Ref

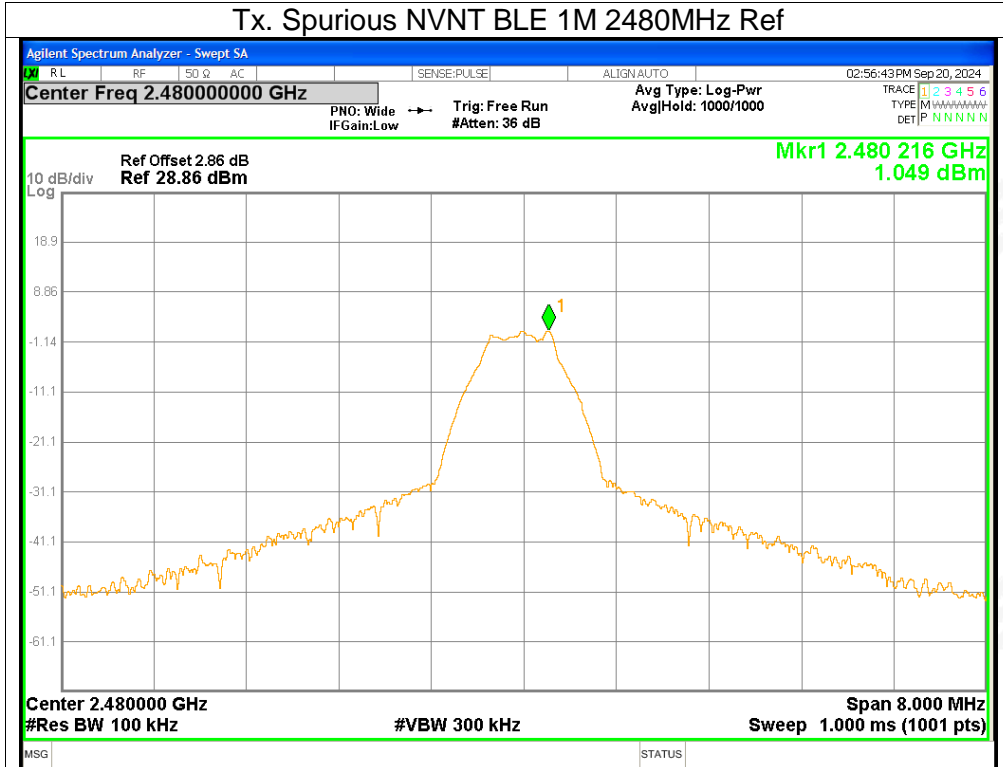

### Tx. Spurious NVNT BLE 1M 2480MHz Emission

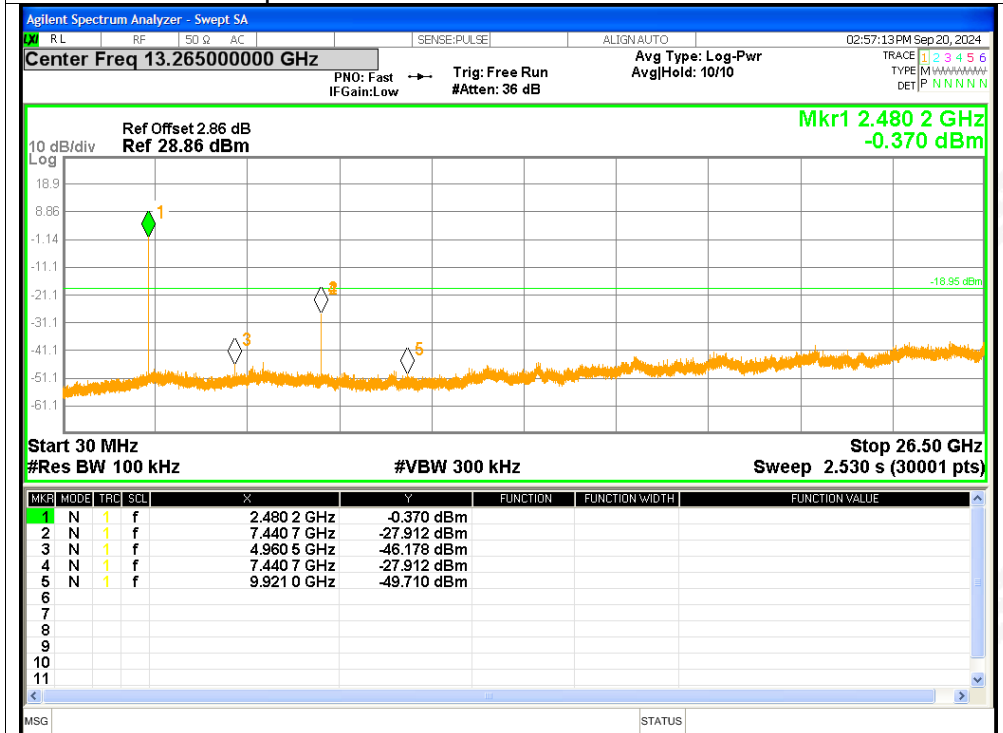









## APPENDIX 2- EUT TEST PHOTO

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

\*\*\*\*\*END OF THE REPORT\*\*\*\*\*