



FCC TEST REPORT

REPORT NO.: RF930714L01
MODEL NO.: WL RT 2454 NM0A40
(refer to page 6 for other models)
RECEIVED: May 22, 2004
TESTED: May 22, 2004~ May 27, 2004

APPLICANT: GLOBAL SUN TECHNOLOGY INC.

ADDRESS: NO.13 Tung Yuan Rd., Jung Li Industrial Park, Jung Li City, Tao Yuan Hsien, Taiwan, R. O. C.

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: No. 19, Hwa Ya 2nd Rd., Wen Hwa Tsuen, Kwei Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This test report consists of 74 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA or any government agencies. The test results in the report only apply to the tested sample.



0528
ILAC MRA



Table of Contents

1	CERTIFICATION	4
2	SUMMARY OF TEST RESULTS	5
2.1	MEASUREMENT UNCERTAINTY	5
3	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES	7
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	7
3.4	DESCRIPTION OF SUPPORT UNITS	8
3.5	CONFIGURATION OF SYSTEM UNDER TEST	9
4	TEST TYPES AND RESULTS	10
4.1	CONDUCTED EMISSION MEASUREMENT	10
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	10
4.1.2	TEST INSTRUMENTS	10
4.1.3	TEST PROCEDURES	11
4.1.4	DEVIATION FROM TEST STANDARD	11
4.1.5	TEST SETUP	12
4.1.6	EUT OPERATING CONDITIONS	13
4.1.7	TEST RESULTS	14
4.2	RADIATED EMISSION MEASUREMENT	20
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	20
4.2.2	TEST INSTRUMENTS	21
4.2.3	TEST PROCEDURES	22
4.2.4	DEVIATION FROM TEST STANDARD	22
4.2.5	TEST SETUP	23
4.2.6	EUT OPERATING CONDITIONS	23
4.2.7	TEST RESULTS	24
4.3	6dB BANDWIDTH MEASUREMENT	38
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	38
4.3.2	TEST INSTRUMENTS	38
4.3.3	TEST PROCEDURE	38
4.3.4	DEVIATION FROM TEST STANDARD	38



4.3.5	TEST SETUP	39
4.3.6	EUT OPERATING CONDITIONS	39
4.3.7	TEST RESULTS	40
4.4	MAXIMUM PEAK OUTPUT POWER	48
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	48
4.4.2	TEST INSTRUMENTS	48
4.4.3	TEST PROCEDURES	49
4.4.4	DEVIATION FROM TEST STANDARD	49
4.4.5	TEST SETUP	49
4.4.6	EUT OPERATING CONDITIONS	49
4.4.7	TEST RESULTS	50
4.5	POWER SPECTRAL DENSITY MEASUREMENT	51
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	51
4.5.2	TEST INSTRUMENTS	51
4.5.3	TEST PROCEDURE	52
4.5.4	DEVIATION FROM TEST STANDARD	52
4.5.5	TEST SETUP	52
4.5.6	EUT OPERATING CONDITIONS	52
4.5.7	TEST RESULTS	53
4.6	BAND EDGES MEASUREMENT	61
4.6.1	LIMITS OF BAND EDGES MEASUREMENT	61
4.6.2	TEST INSTRUMENTS	61
4.6.3	TEST PROCEDURE	61
4.6.4	DEVIATION FROM TEST STANDARD	61
4.6.5	EUT OPERATING CONDITION	62
4.6.6	TEST RESULTS	62
4.7	ANTENNA REQUIREMENT	71
4.7.1	STANDARD APPLICABLE	71
4.7.2	ANTENNA CONNECTED CONSTRUCTION	71
5	PHOTOGRAPHS OF THE TEST CONFIGURATION	72
6	INFORMATION ON THE TESTING LABORATORIES	74



1 CERTIFICATION

PRODUCT NAME : AT&T Plug&Share 54Mbps Wireless Router
MODEL NO. : WL RT 2454 NM0A40
(refer to page 6 for other models)
BRAND NAME : GLOBAL SUN
(refer to page 6 for other brand names)
APPLICANT : GLOBAL SUN TECHNOLOGY INC.
TESTED : May 22, 2004~ May 27, 2004
TEST ITEM : ENGINEERING SAMPLE
STANDARDS : FCC Part 15, Subpart C (Section 15.247),
ANSI C63.4-2001

The above equipment has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY: Stacy Hsueh , **DATE:** July 15, 2004
Stacy Hsueh

APPROVED BY: Cody Chang , **DATE:** July 15, 2004
Cody Chang /
Supervisor



2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit Minimum passing margin is -6.18dB at 0.220MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System. Limit: min. 500kHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit
15.247(c)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is -1.93dB at 799.99MHz
15.247(d)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit
15.247(c)	Band Edge Measurement Limit: 20dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit

NOTE: The information of measurement uncertainty is available upon the customer's request.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

Measurement	Frequency	Uncertainty
Conducted emissions	9k~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.73 dB
	200MHz ~1000MHz	3.74 dB
	1GHz ~ 18GHz	2.20 dB
	18GHz ~ 40GHz	1.88 dB



3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT NAME	AT&T Plug&Share 54Mbps Wireless Router
MODEL NO.	WL RT 2454 NM0A40
POWER SUPPLY	5Vdc from power adapter
MODULATION TYPE	BPSK, QPSK, CCK, 16QAM, 64QAM
RADIO TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	1/2/5.5/6/9/11/12/18/24/36/48/54Mbps
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11
OUTPUT POWER	15dBm
ANTENNA TYPE	Dipole antenna with 2.0dBi gain
DATA CABLE	NA
I/O PORTS	RJ45
ASSOCIATED DEVICES	NA

NOTE:

- The EUT was tested with the following adapter:

MODEL :	MA1-10050
INPUT :	100-120Vac, 0.5A 50-60Hz
OUTPUT :	5.0Vdc, 2.5A

- The EUT operates in the 2.4GHz frequency spectrum and compatible with the draft 802.11g standard to provide a wireless data rate of up to 54Mbps.
- Model WL RT 2454 NM0A40, 6800G are identical to each other except for their model number due and brand name to marketing requirement.

BRAND	Model
GLOBAL SUN	WL RT 2454 NM0A40
AT&T	6800G

- The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.



3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided to this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

NOTE:

1. Below 1GHz, the channel 1, 6, and 11 were pre-tested in chamber. The channel 11, the worst case, was chosen for final test.
2. Above 1GHz, the channel 1, 6, and 11 were tested individually.
3. From our experience and technical viewpoint, we have chosen data rates 11Mbps for CCK technique and 6Mbps for OFDM technique, as the worst cases for the test among other data rates.

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)
ANSI C63.4:2001

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP05L	16484462992	E2K24CLNS
2	PRINTER	EPSON	LQ-300+	DCGY054147	FCC DoC Approved
3	MODEM	ACEEX	1414V/3	0401008269	IFAXDM1414
4	PC	COMPAQ	D220M	SGH3330B90	FCC DoC Approved
5	LCD MONITOR	ACER	AL1721	ET.L0408.01040 4001E6PK00	FCC DoC Approved
6	USB KEYBOARD	BTC	5200U	G09302046570	E5XKB5122U
7	MOUSE	GENUINE	MS16	688031002104	FCC DoC Approved


NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.2m shielded cable
3	1.2m shielded cable
4	NA
5	1.8m shielded cable
6	1.5m shielded cable
7	1.8m shielded cable

NOTE:

1. All power cords of the above support units are non shielded (1.8m).
2. Item 2 act as a communication partner to transfer data.



3.5 CONFIGURATION OF SYSTEM UNDER TEST

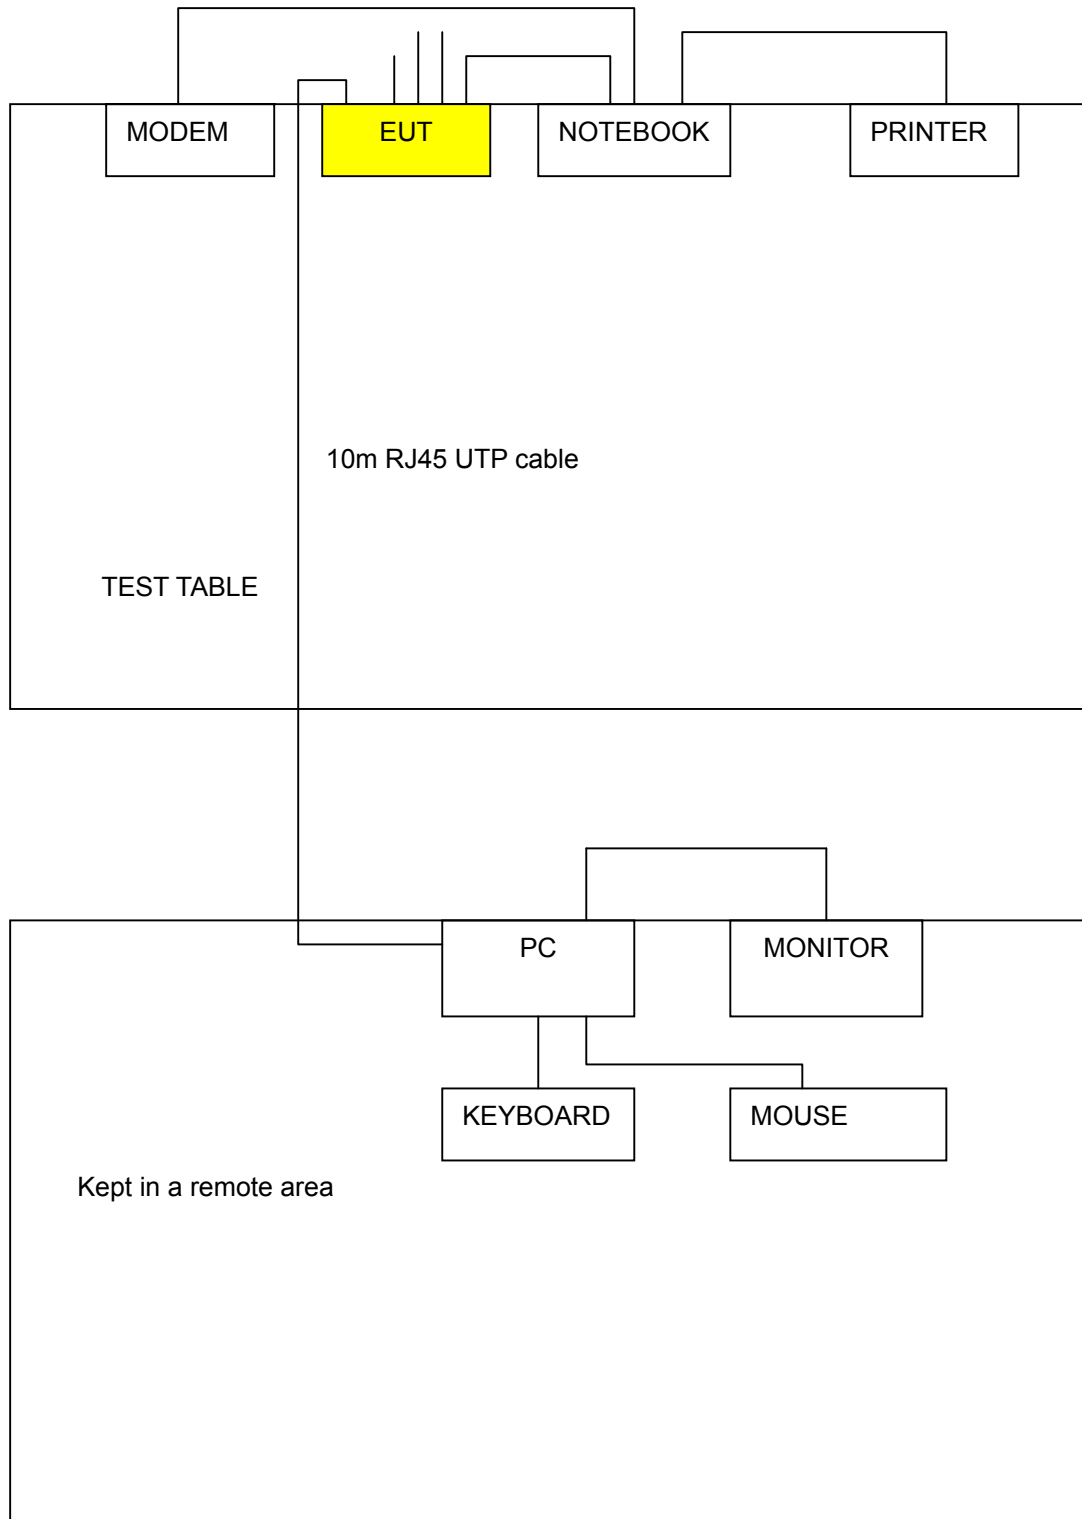



4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	100291	Dec. 12, 2004
RF signal cable Woken	5D-FB	Cable-HYC01-01	Mar. 02, 2005
LISN ROHDE & SCHWARZ	ESH3-Z5	847265/023	Oct. 22, 2004
LISN ROHDE & SCHWARZ	ESH3-Z5	100220	Dec. 10, 2004
Software ADT	ADT_Cond_V3	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 1.
 3. The VCCI Site Registration No. is C-2040.Hwa Ya Global Certification Office




4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels Limit -20dB was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

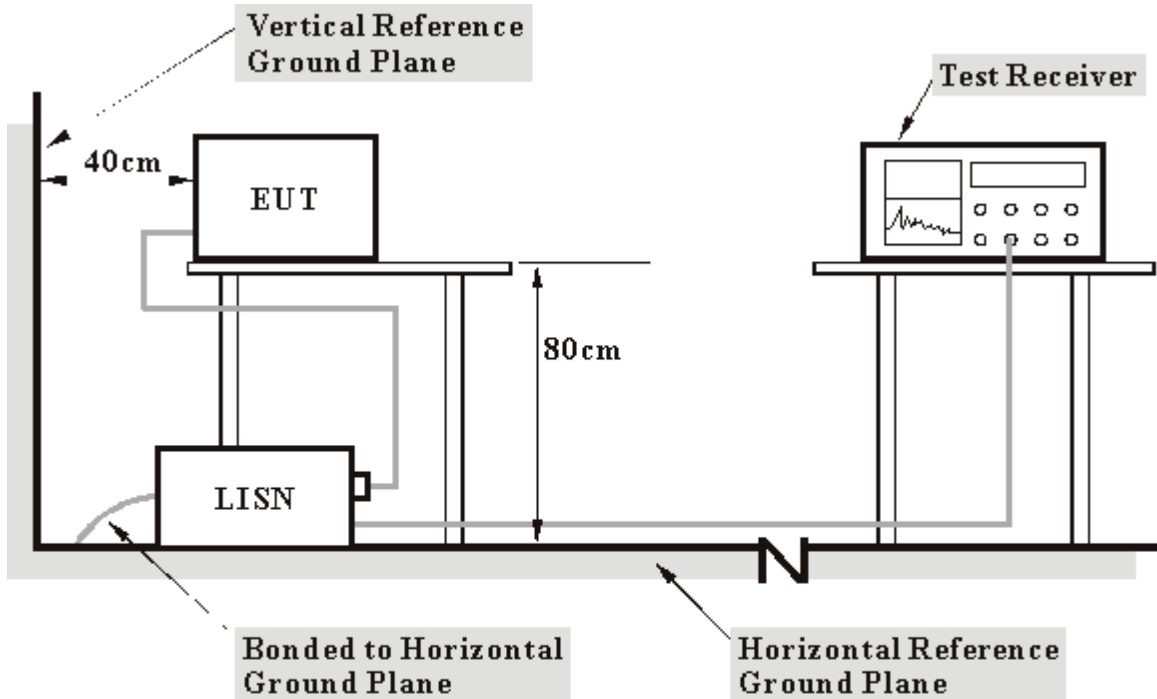

- Note:** 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



4.1.6 EUT OPERATING CONDITIONS

- a. Placed the EUT on the testing table.
- b. The computer system sent data to EUT by command "PING" via RJ45 cable.
- c. The computer system sent "H" messages to Color Monitor and Monitor displayed "H" patterns on its screen.
- d. The computer system sent "H" messages to modem.
- e. The computer system sent "H" messages to the printer, and the printer prints them on paper.
- f. Prepared another computer system to act as a communication partner and placed it outside of testing area.
- g. The communication partner ran a test program (provided by manufacturer) to enable EUT under transmission/receiving condition continuously at specific channel frequency via RJ45 cable.
- h. The communication partner sent data to EUT by command "PING".




4.1.7 TEST RESULTS

EUT	AT&T Plug&Share 54Mbps Wireless Router	MODEL	WL RT 2454 NM0A40
CHANNEL	Channel 1	6dB BANDWIDTH	9kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	25deg.C, 65%RH, 991hPa	TESTED BY: Match Tsui	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.224	0.12	54.03	38.83	54.15	38.95	62.66	52.66	-8.51	-13.71
2	0.295	0.12	51.15	37.54	51.27	37.66	60.40	50.40	-9.12	-12.73
3	0.576	0.13	35.07	-	35.20	-	56.00	46.00	-20.80	-
4	0.959	0.15	29.37	-	29.52	-	56.00	46.00	-26.48	-
5	9.574	0.30	19.44	-	19.74	-	60.00	50.00	-40.26	-
6	15.922	0.82	28.52	-	29.34	-	60.00	50.00	-30.66	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

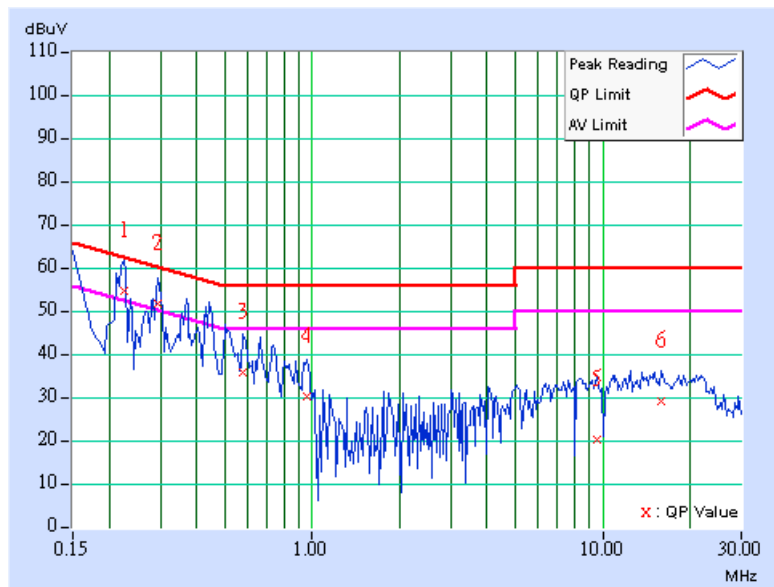




EUT	AT&T Plug&Share 54Mbps Wireless Router	MODEL	WL RT 2454 NM0A40
CHANNEL	Channel 1	6dB BANDWIDTH	9kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	25deg.C, 65%RH, 991hPa	TESTED BY: Match Tsui	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.220	0.11	55.43	46.52	55.54	46.63	62.81	52.81	-7.27	-6.18
2	0.291	0.11	49.44	-	49.55	-	60.51	50.51	-10.95	-
3	0.662	0.12	37.08	-	37.20	-	56.00	46.00	-18.80	-
4	0.806	0.13	32.89	-	33.02	-	56.00	46.00	-22.98	-
5	6.199	0.25	32.12	-	32.37	-	60.00	50.00	-27.63	-
6	11.012	0.35	31.17	-	31.52	-	60.00	50.00	-28.48	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

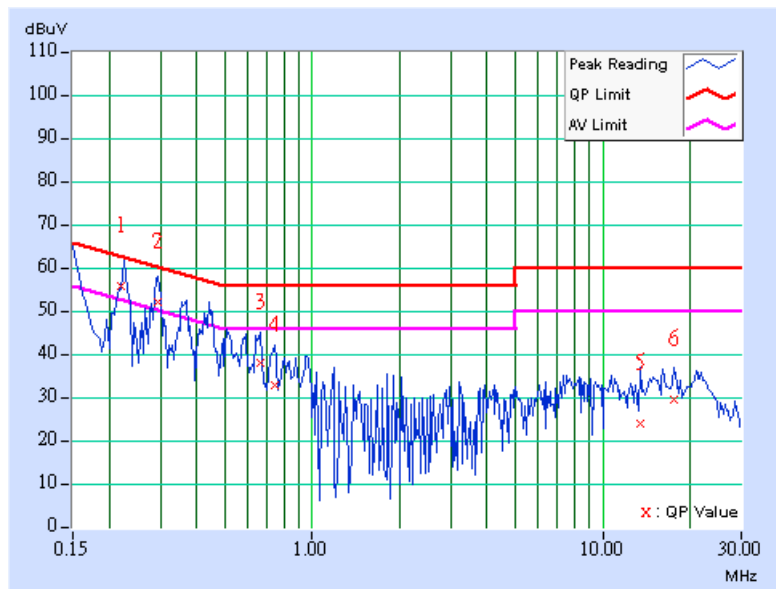




EUT	AT&T Plug&Share 54Mbps Wireless Router	MODEL	WL RT 2454 NM0A40
CHANNEL	Channel 6	6dB BANDWIDTH	9kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	25deg.C, 65%RH, 991hPa	TESTED BY: Match Tsui	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.219	0.12	55.13	46.35	55.25	46.47	62.84	52.84	-7.59	-6.37
2	0.295	0.12	51.19	36.45	51.31	36.57	60.40	50.40	-9.08	-13.82
3	0.662	0.13	37.28	-	37.41	-	56.00	46.00	-18.59	-
4	0.744	0.14	32.10	-	32.24	-	56.00	46.00	-23.76	-
5	13.398	0.63	23.25	-	23.88	-	60.00	50.00	-36.12	-
6	17.691	0.91	28.84	-	29.75	-	60.00	50.00	-30.25	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

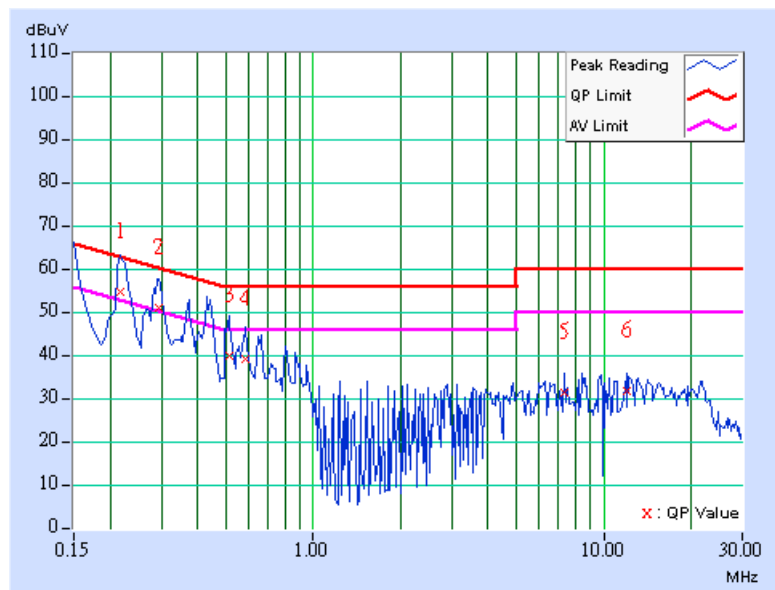




EUT	AT&T Plug&Share 54Mbps Wireless Router	MODEL	WL RT 2454 NM0A40
CHANNEL	Channel 6	6dB BANDWIDTH	9kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	25deg.C, 65%RH, 991hPa	TESTED BY: Match Tsui	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.216	0.11	54.49	46.04	54.60	46.15	62.96	52.96	-8.36	-6.81
2	0.295	0.11	50.85	36.66	50.96	36.77	60.40	50.40	-9.43	-13.62
3	0.513	0.12	39.66	-	39.78	-	56.00	46.00	-16.22	-
4	0.588	0.12	38.99	-	39.11	-	56.00	46.00	-16.89	-
5	7.359	0.28	31.15	-	31.43	-	60.00	50.00	-28.57	-
6	12.020	0.43	31.47	-	31.90	-	60.00	50.00	-28.10	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

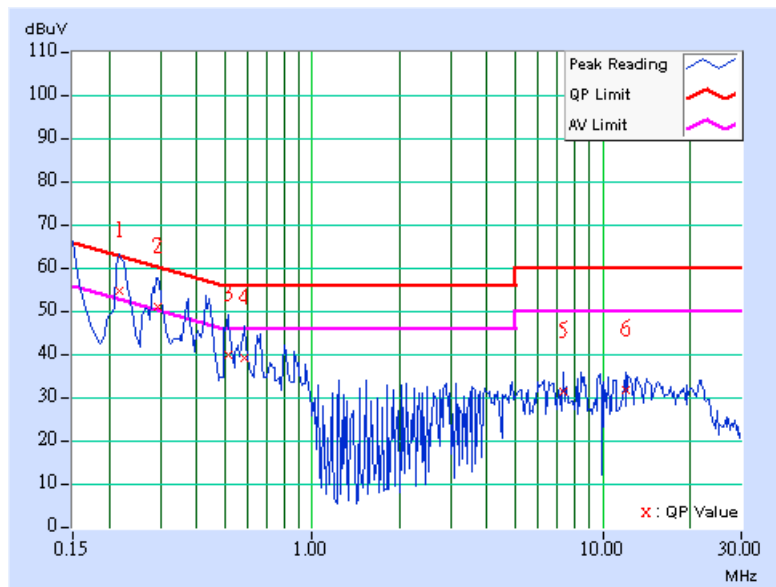




EUT	AT&T Plug&Share 54Mbps Wireless Router	MODEL	WL RT 2454 NM0A40
CHANNEL	Channel 11	6dB BANDWIDTH	9kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	25deg.C, 65%RH, 991hPa	TESTED BY: Match Tsui	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.220	0.12	55.17	46.09	55.29	46.21	62.82	52.82	-7.53	-6.61
2	0.295	0.12	51.21	36.32	51.33	36.44	60.40	50.40	-9.06	-13.95
3	0.588	0.13	38.99	-	39.12	-	56.00	46.00	-16.88	-
4	0.658	0.13	37.06	-	37.19	-	56.00	46.00	-18.81	-
5	10.836	0.38	33.33	-	33.71	-	60.00	50.00	-26.29	-
6	22.105	1.08	32.42	-	33.50	-	60.00	50.00	-26.50	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

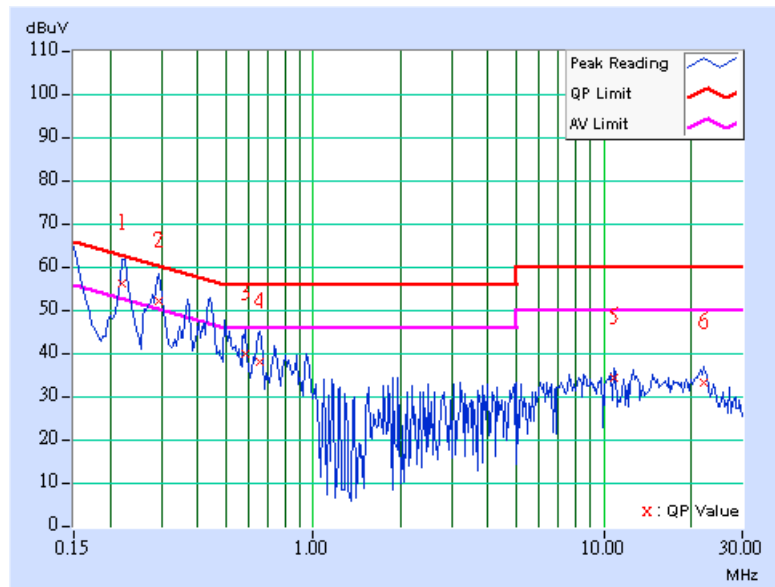




EUT	AT&T Plug&Share 54Mbps Wireless Router	MODEL	WL RT 2454 NM0A40
CHANNEL	Channel 11	6dB BANDWIDTH	9kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	25deg.C, 65%RH, 991hPa	TESTED BY: Match Tsui	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.221	0.11	55.67	45.76	55.78	45.87	62.79	52.79	-7.00	-6.91
2	0.295	0.11	50.59	35.90	50.70	36.01	60.40	50.40	-9.69	-14.38
3	0.584	0.12	38.69	-	38.81	-	56.00	46.00	-17.19	-
4	0.658	0.12	37.39	-	37.51	-	56.00	46.00	-18.49	-
5	9.016	0.28	34.26	-	34.54	-	60.00	50.00	-25.46	-
6	15.704	0.65	30.85	-	31.50	-	60.00	50.00	-28.50	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

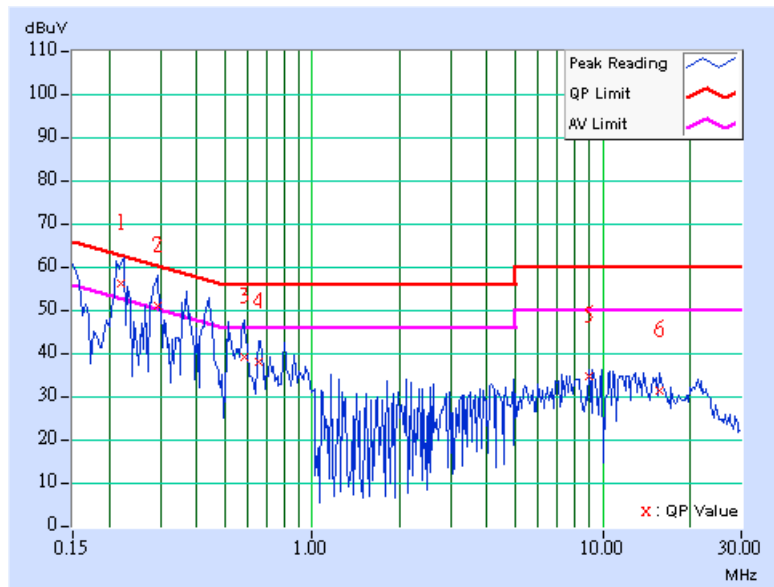



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESIB7	100188	Jan. 13, 2005
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Dec. 15, 2004
BILOG Antenna SCHWARZBECK	VULB9168	9168-157	Feb. 03, 2005
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-407	Feb. 03, 2005
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA 9170241	Feb. 23, 2005
Preamplifier Agilent	8449B	3008A01961	Jan. 22, 2005
Preamplifier Agilent	8447D	2944A10629	Jan. 14, 2005
RF signal cable HUBER+SUHNER	SUCOFLEX 104	218182/4	Mar. 04, 2005
RF signal cable HUBER+SUHNER	SUCOFLEX 104	218194/4	Mar. 04, 2005
Software ADT.	ADT_Radiated_V5.14	NA	NA
Antenna Tower ADT.	AT100	AT93021702	NA
Turn Table ADT.	TT100.	TT93021702	NA
Controller ADT.	SC100.	SC93021702	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 1.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The IC Site Registration No. is IC4924-2.



4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

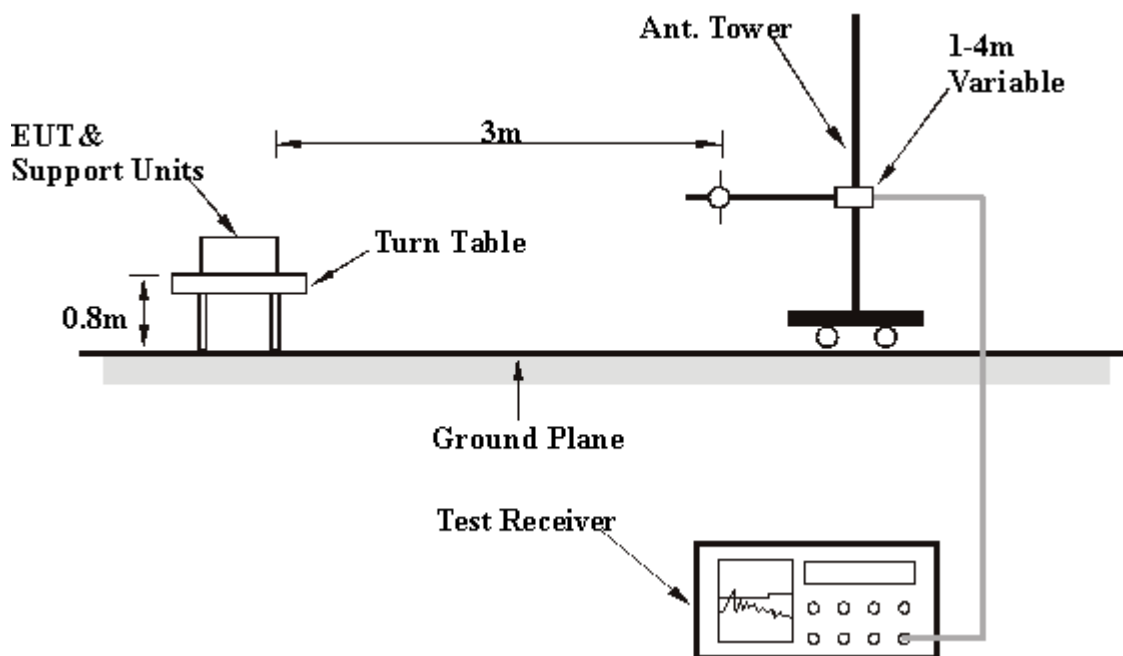

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6



4.2.7 TEST RESULTS

EUT	AT&T Plug&Share 54Mbps Wireless Router	MODEL	WL RT 2454 NM0A40
CHANNEL	Channel 11	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	24deg. C, 65%RH, 991hPa	TESTED BY: Match Tsui	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	39.72	28.74 QP	40.00	-11.26	1.75 H	262	13.56	15.18
2	109.70	32.57 QP	43.50	-10.93	1.50 H	280	20.60	11.97
3	146.63	36.61 QP	43.50	-6.89	2.00 H	259	22.04	14.58
4	160.24	38.96 QP	43.50	-4.54	1.50 H	292	24.10	14.87
5	249.66	43.35 QP	46.00	-2.65	1.00 H	283	30.14	13.22
6	300.20	34.93 QP	46.00	-11.07	1.00 H	31	20.43	14.50
7	319.64	36.59 QP	46.00	-9.41	1.00 H	76	21.64	14.95
8	348.80	36.73 QP	46.00	-9.27	1.00 H	49	21.11	15.62
9	374.07	30.46 QP	46.00	-15.54	1.00 H	313	14.28	16.18
10	479.04	37.43 QP	46.00	-8.57	1.75 H	64	18.98	18.45
11	640.38	43.33 QP	46.00	-2.67	1.00 H	82	21.78	21.55
12	799.78	42.26 QP	46.00	-3.74	1.00 H	118	18.44	23.82
13	961.12	38.95 QP	54.00	-15.05	1.25 H	226	13.28	25.68

REMARKS

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



EUT	AT&T Plug&Share 54Mbps Wireless Router	MODEL	WL RT 2454 NM0A40
CHANNEL	Channel 11	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	24deg. C, 65%RH, 991hPa	TESTED BY: Match Tsui	

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	58.70	36.91 QP	40.00	-3.09	1.00 V	96	23.07	13.84
2	94.15	37.31 QP	43.50	-6.19	1.50 V	277	26.79	10.52
3	160.24	35.32 QP	43.50	-8.18	1.00 V	253	20.46	14.87
4	249.66	39.05 QP	46.00	-6.95	1.00 V	115	25.84	13.22
5	300.20	31.01 QP	46.00	-14.99	1.50 V	334	16.50	14.50
6	374.07	36.78 QP	46.00	-9.22	1.00 V	355	20.60	16.18
7	449.88	33.20 QP	46.00	-12.80	1.25 V	58	15.13	18.07
8	479.04	43.57 QP	46.00	-2.43	1.00 V	85	25.12	18.45
9	550.96	35.19 QP	46.00	-10.81	1.00 V	67	15.48	19.72
10	639.98	40.05 QP	46.00	-5.95	1.93 V	93	18.51	21.55
11	751.18	34.62 QP	46.00	-11.38	1.50 V	55	11.08	23.54
12	799.99	44.07 QP	46.00	-1.93	1.26 V	110	20.25	23.82
13	960.00	31.82 QP	46.00	-14.18	1.50 V	148	6.15	25.67

REMARKS

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



EUT	AT&T Plug&Share 54Mbps Wireless Router	MODEL	WL RT 2454 NM0A40
CHANNEL	Channel 1	FREQUENCY RANGE	1~ 25GHz
MODE	CCK		
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 68%RH, 991hPa	TESTED BY: Match Tsui	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1090.00	44.42 PK	74.00	-29.58	1.07 H	315	16.56	27.86
1	1090.00	39.88 AV	54.00	-14.12	1.07 H	315	12.02	27.86
2	1120.00	45.41 PK	74.00	-28.59	1.24 H	200	17.51	27.90
2	1120.00	40.29 AV	54.00	-13.71	1.24 H	200	12.39	27.90
3	1600.00	45.73 PK	74.00	-28.27	1.22 H	339	16.94	28.79
3	1600.00	41.67 AV	54.00	-12.33	1.22 H	339	12.88	28.79
4	1920.00	49.96 PK	74.00	-24.04	1.25 H	88	20.44	29.52
4	1920.00	47.37 AV	54.00	-6.63	1.25 H	88	17.85	29.52
5	2038.00	57.00 PK	74.00	-17.00	1.17 H	74	26.66	30.34
6	2240.00	48.10 PK	74.00	-25.90	1.16 H	27	16.89	31.21
6	2240.00	44.61 AV	54.00	-9.39	1.16 H	27	13.4	31.21
7	2358.00	47.14 PK	74.00	-26.86	1.20 H	71	15.46	31.68
7	2358.00	39.43 AV	54.00	-14.57	1.20 H	71	7.75	31.68
8	2388.00	41.11 PK	74.00	-32.89	1.18 H	184	9.35	31.76
8	2388.00	33.42 AV	54.00	-20.58	1.18 H	184	1.66	31.76
9	*2412.00	103.87 PK			1.18 H	184	72.01	31.86
9	*2412.00	96.18 AV			1.18 H	184	64.32	31.86
10	4824.00	53.28 PK	74.00	-20.72	1.11 H	223	14.57	38.71
10	4824.00	39.36 AV	54.00	-14.64	1.11 H	223	0.65	38.71

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “ : Fundamental frequency.



EUT	AT&T Plug&Share 54Mbps Wireless Router	MODEL	WL RT 2454 NM0A40
CHANNEL	Channel 1	FREQUENCY RANGE	1~ 25GHz
MODE	CCK		
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 68%RH, 991hPa	TESTED BY: Match Tsui	

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1030.00	44.63 PK	74.00	-29.37	1.00 V	296	16.83	27.80
1	1030.00	38.52 AV	54.00	-15.48	1.00 V	296	10.72	27.80
2	1090.00	45.00 PK	74.00	-29.00	1.00 V	37	17.14	27.86
2	1090.00	40.31 AV	54.00	-13.69	1.00 V	37	12.45	27.86
3	1120.00	45.64 PK	74.00	-28.36	1.00 V	211	17.74	27.90
3	1120.00	40.68 AV	54.00	-13.32	1.00 V	211	12.78	27.90
4	1151.00	43.32 PK	74.00	-30.68	1.00 V	39	15.37	27.95
4	1151.00	37.43 AV	54.00	-16.57	1.00 V	39	9.48	27.95
5	1440.00	45.07 PK	74.00	-28.93	1.11 V	244	15.96	29.11
5	1440.00	39.99 AV	54.00	-14.01	1.11 V	244	10.88	29.11
6	1600.00	46.44 PK	74.00	-27.56	1.05 V	290	17.65	28.79
6	1600.00	40.82 AV	54.00	-13.18	1.05 V	290	12.03	28.79
7	1920.00	48.35 PK	74.00	-25.65	1.00 V	343	18.83	29.52
7	1920.00	45.36 AV	54.00	-8.64	1.00 V	343	15.84	29.52
8	2038.00	59.80 PK	74.00	-14.20	1.17 V	168	29.46	30.34
9	2240.00	48.92 PK	74.00	-25.08	1.00 V	57	17.71	31.21
9	2240.00	43.16 AV	54.00	-10.84	1.00 V	57	11.95	31.21
10	2358.00	51.90 PK	74.00	-22.10	1.04 V	279	20.22	31.68
10	2358.00	45.19 AV	54.00	-8.81	1.04 V	279	13.51	31.68
11	2388.00	50.41 PK	74.00	-23.59	1.02 V	120	18.65	31.76
11	2388.00	42.21 AV	54.00	-11.79	1.02 V	120	10.45	31.76
12	*2412.00	113.17 PK			1.02 V	120	81.31	31.86
12	*2412.00	104.97 AV			1.02 V	120	73.11	31.86
13	4824.00	50.82 PK	74.00	-23.18	1.01 V	274	12.11	38.71
13	4824.00	37.53 AV	54.00	-16.47	1.01 V	274	-1.18	38.71

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “ : Fundamental frequency.



EUT	AT&T Plug&Share 54Mbps Wireless Router	MODEL	WL RT 2454 NM0A40
CHANNEL	Channel 6	FREQUENCY RANGE	1~ 25GHz
MODE	CCK		
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 68%RH, 991hPa	TESTED BY: Match Tsui	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1090.00	44.66 PK	74.00	-29.34	1.13 H	315	16.80	27.86
1	1090.00	39.86 AV	54.00	-14.14	1.13 H	315	12.00	27.86
2	1600.00	46.42 PK	74.00	-27.58	1.21 H	4	17.63	28.79
2	1600.00	41.63 AV	54.00	-12.37	1.21 H	4	12.84	28.79
3	1920.00	50.33 PK	74.00	-23.67	1.27 H	99	20.81	29.52
3	1920.00	47.74 AV	54.00	-6.26	1.27 H	99	18.22	29.52
4	2063.00	56.14 PK	74.00	-17.86	1.18 H	224	25.63	30.51
5	2240.00	47.99 PK	74.00	-26.01	1.15 H	30	16.78	31.21
5	2240.00	44.15 AV	54.00	-9.85	1.15 H	30	12.94	31.21
6	*2437.00	105.77 PK			1.13 H	73	73.75	32.02
6	*2437.00	98.03 AV			1.13 H	73	66.01	32.02
7	4874.00	53.13 PK	74.00	-20.87	1.00 H	223	14.40	38.73
7	4874.00	39.83 AV	54.00	-14.17	1.00 H	223	1.10	38.73

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + CorrectionFactor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “ : Fundamental frequency.



EUT	AT&T Plug&Share 54Mbps Wireless Router	MODEL	WL RT 2454 NM0A40
CHANNEL	Channel 6	FREQUENCY RANGE	1~ 25GHz
MODE	CCK		
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 68%RH, 991hPa	TESTED BY: Match Tsui	

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1090.00	44.61 PK	74.00	-29.39	1.04 V	34	16.75	27.86
1	1090.00	39.90 AV	54.00	-14.10	1.04 V	34	12.04	27.86
2	1600.00	46.04 PK	74.00	-27.96	1.06 V	256	17.25	28.79
2	1600.00	40.25 AV	54.00	-13.75	1.06 V	256	11.46	28.79
3	1920.00	48.19 PK	74.00	-25.81	1.07 V	180	18.67	29.52
3	1920.00	44.70 AV	54.00	-9.30	1.07 V	180	15.18	29.52
4	2063.00	60.90 PK	74.00	-13.10	1.00 V	124	30.39	30.51
5	2240.00	47.80 PK	74.00	-26.20	1.04 V	258	16.59	31.21
5	2240.00	42.77 AV	54.00	-11.23	1.04 V	258	11.56	31.21
6	2376.00	50.18 PK	74.00	-23.82	1.27 V	262	18.45	31.73
6	2376.00	40.31 AV	54.00	-13.69	1.27 V	262	8.58	31.73
7	*2437.00	113.97 PK			1.29 V	148	81.95	32.02
7	*2437.00	105.79 AV			1.29 V	148	73.77	32.02
8	4874.00	41.14 PK	74.00	-32.86	1.23 V	343	2.41	38.73
8	4874.00	30.27 AV	54.00	-23.73	1.23 V	343	-8.46	38.73

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + CorrectionFactor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “ : Fundamental frequency.



EUT	AT&T Plug&Share 54Mbps Wireless Router	MODEL	WL RT 2454 NM0A40
CHANNEL	Channel 11	FREQUENCY RANGE	1~ 25GHz
MODE	CCK		
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 68%RH, 991hPa	TESTED BY: Match Tsui	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1120.00	45.74 PK	74.00	-28.26	1.21 H	201	17.84	27.90
1	1120.00	40.49 AV	54.00	-13.51	1.21 H	201	12.59	27.90
2	1600.00	45.23 PK	74.00	-28.77	1.20 H	153	16.44	28.79
2	1600.00	40.54 AV	54.00	-13.46	1.20 H	153	11.75	28.79
3	1920.00	50.26 PK	74.00	-23.74	1.25 H	87	20.74	29.52
3	1920.00	4.48 AV	54.00	-6.52	1.25 H	87	17.96	29.52
4	2088.00	55.91 PK	74.00	-18.09	1.09 H	192	25.24	30.67
5	2240.00	48.46 PK	74.00	-25.54	1.16 H	27	17.25	31.21
5	2240.00	44.66 AV	54.00	-9.34	1.16 H	27	13.45	31.21
6	*2462.00	105.80 PK			1.12 H	286	73.63	32.17
6	*2462.00	97.91 AV			1.12 H	286	65.74	32.17
7	2488.00	43.43 PK	74.00	-30.57	1.12 H	286	11.10	32.33
7	2488.00	35.54 AV	54.00	-18.46	1.12 H	286	3.21	32.33
8	4924.00	52.38 PK	74.00	-21.62	1.23 H	217	13.66	38.72
8	4924.00	40.08 AV	54.00	-13.92	1.23 H	217	1.36	38.72

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + CorrectionFactor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “ : Fundamental frequency.



EUT	AT&T Plug&Share 54Mbps Wireless Router	MODEL	WL RT 2454 NM0A40
CHANNEL	Channel 11	FREQUENCY RANGE	1~ 25GHz
MODE	CCK		
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 68%RH, 991hPa	TESTED BY: Match Tsui	

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1090.00	45.17 PK	74.00	-28.83	1.01 V	36	17.31	27.86
1	1090.00	40.71 AV	54.00	-13.29	1.01 V	36	12.85	27.86
2	1120.00	45.76 PK	74.00	-28.24	1.00 V	198	17.86	27.90
2	1120.00	40.42 AV	54.00	-13.58	1.00 V	198	12.52	27.90
3	1600.00	45.26 PK	74.00	-28.74	1.00 V	202	16.47	28.79
3	1600.00	41.02 AV	54.00	-12.98	1.00 V	202	12.23	28.79
4	1920.00	46.65 PK	74.00	-27.35	1.24 V	98	17.13	29.52
4	1920.00	43.13 AV	54.00	-10.87	1.24 V	98	13.61	29.52
5	2088.00	61.34 PK	74.00	-12.66	1.25 V	114	30.67	30.67
6	2240.00	47.34 PK	74.00	-26.66	1.21 V	123	16.13	31.21
6	2240.00	40.45 AV	54.00	-13.55	1.21 V	123	9.24	31.21
7	*2462.00	113.39 PK			1.45 V	220	81.22	32.17
7	*2462.00	105.60 AV			1.45 V	220	73.43	32.17
8	2488.00	51.02 PK	74.00	-22.98	1.45 V	220	18.69	32.33
8	2488.00	43.23 AV	54.00	-10.77	1.45 V	220	10.90	32.33
9	4924.00	50.75 PK	74.00	-23.25	1.00 V	262	12.03	38.72
9	4924.00	37.85 AV	54.00	-16.15	1.00 V	262	-0.87	38.72

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + CorrectionFactor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “ : Fundamental frequency.



EUT	AT&T Plug&Share 54Mbps Wireless Router	MODEL	WL RT 2454 NM0A40
CHANNEL	Channel 1	FREQUENCY RANGE	1~ 25GHz
MODE	OFDM		
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 68%RH, 991hPa	TESTED BY: Match Tsui	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1120.00	44.88 PK	74.00	-29.12	1.25 H	201	16.98	27.90
1	1120.00	39.95 AV	54.00	-14.05	1.25 H	201	12.05	27.90
2	1600.00	41.68 PK	74.00	-32.32	1.21 H	339	12.89	28.79
2	1600.00	41.49 AV	54.00	-12.51	1.21 H	339	12.7	28.79
3	1920.00	50.26 PK	74.00	-23.74	1.31 H	100	20.74	29.52
3	1920.00	47.97 AV	54.00	-6.03	1.31 H	100	18.45	29.52
4	2038.00	53.36 PK	74.00	-20.64	1.15 H	195	23.02	30.34
4	2038.00	51.63 AV	54.00	-2.37	1.15 H	195	21.29	30.34
5	2240.00	47.66 PK	74.00	-26.34	1.15 H	28	16.45	31.21
5	2240.00	43.25 AV	54.00	-10.75	1.15 H	28	12.04	31.21
6	2388.00	41.13 PK	74.00	-32.87	1.17 H	72	9.37	31.76
6	2388.00	31.88 AV	54.00	-22.12	1.17 H	72	0.28	31.76
7	*2412.00	100.53 PK			1.17 H	72	68.67	31.86
7	*2412.00	91.28 AV			1.17 H	72	59.42	31.86
8	4824.00	40.63 PK	74.00	-33.37	1.14 H	85	1.92	38.71
8	4824.00	28.23 AV	54.00	-25.77	1.14 H	85	-10.48	38.71

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “ : Fundamental frequency.



EUT	AT&T Plug&Share 54Mbps Wireless Router	MODEL	WL RT 2454 NM0A40
CHANNEL	Channel 1	FREQUENCY RANGE	1~ 25GHz
MODE	OFDM		
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 68%RH, 991hPa	TESTED BY: Match Tsui	

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1090.00	45.55 PK	74.00	-28.45	1.14 V	341	17.69	27.86
1	1090.00	39.24 AV	54.00	-14.76	1.14 V	341	11.38	27.86
2	1600.00	45.36 PK	74.00	-28.64	1.02 V	258	16.57	28.79
2	1600.00	40.38 AV	54.00	-13.62	1.02 V	258	11.59	28.79
3	1920.00	49.88 PK	74.00	-24.12	1.00 V	341	20.36	29.52
3	1920.00	46.54 AV	54.00	-7.46	1.00 V	341	17.02	29.52
4	2038.00	57.93 PK	74.00	-16.07	1.00 V	210	27.59	30.34
5	2240.00	47.90 PK	74.00	-26.10	1.03 V	257	16.69	31.21
5	2240.00	43.10 AV	54.00	-10.90	1.03 V	257	11.89	31.21
6	2358.00	51.36 PK	74.00	-22.64	1.04 V	164	19.68	31.68
6	2358.00	43.65 AV	54.00	-10.35	1.04 V	164	11.97	31.68
7	2388.00	48.04 PK	74.00	-25.96	1.29 V	207	16.28	31.76
7	2388.00	38.56 AV	54.00	-15.44	1.29 V	207	6.8	31.76
8	*2412.00	107.44 PK			1.29 V	207	75.58	31.86
8	*2412.00	97.96 AV			1.29 V	207	66.10	31.86
9	4824.00	41.93 PK	74.00	-32.07	1.00 V	62	3.22	38.71
9	4824.00	29.23 AV	54.00	-24.77	1.00 V	62	-9.48	38.71

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “ : Fundamental frequency.



EUT	AT&T Plug&Share 54Mbps Wireless Router	MODEL	WL RT 2454 NM0A40
CHANNEL	Channel 6	FREQUENCY RANGE	1~ 25GHz
MODE	OFDM		
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 68%RH, 991hPa	TESTED BY: Match Tsui	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1090.00	43.44 PK	74.00	-30.56	1.00 H	321	15.58	27.86
1	1090.00	37.97 AV	54.00	-16.03	1.00 H	321	10.11	27.86
2	1120.00	44.49 PK	74.00	-29.51	1.18 H	274	16.59	27.90
2	1120.00	38.70 AV	54.00	-15.30	1.18 H	274	10.80	27.90
3	1600.00	45.54 PK	74.00	-28.46	1.18 H	153	16.75	28.79
3	1600.00	39.79 AV	54.00	-14.21	1.18 H	153	11.00	28.79
4	1920.00	50.04 PK	74.00	-23.96	1.18 H	98	20.52	29.52
4	1920.00	47.22 AV	54.00	-6.78	1.18 H	98	17.70	29.52
5	2063.00	57.32 PK	74.00	-16.68	1.14 H	285	26.81	30.51
7	2240.00	48.45 PK	74.00	-25.55	1.42 H	29	17.24	31.21
7	2240.00	44.15 AV	54.00	-9.85	1.42 H	29	12.94	31.21
8	2354.00	45.94 PK	74.00	-28.06	1.45 H	281	14.27	31.67
8	2354.00	35.06 AV	54.00	-18.94	1.45 H	281	3.39	31.67
9	*2437.00	101.66 PK			1.14 H	73	69.64	32.02
9	*2437.00	92.34 AV			1.14 H	73	60.32	32.02
10	4874.00	49.63 PK	74.00	-24.37	1.00 H	243	10.90	38.73
10	4874.00	34.09 AV	54.00	-19.91	1.00 H	243	-4.64	38.73

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ” : Fundamental frequency.



EUT	AT&T Plug&Share 54Mbps Wireless Router	MODEL	WL RT 2454 NM0A40
CHANNEL	Channel 6	FREQUENCY RANGE	1~ 25GHz
MODE	OFDM		
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 68%RH, 991hPa	TESTED BY: Match Tsui	

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1090.00	45.08 PK	74.00	-28.92	1.00 V	355	17.22	27.86
1	1090.00	40.19 AV	54.00	-13.81	1.00 V	355	12.33	27.86
2	1120.00	45.92 PK	74.00	-28.08	1.00 V	213	18.02	27.90
2	1120.00	41.16 AV	54.00	-12.84	1.00 V	213	13.26	27.90
3	1600.00	45.56 PK	74.00	-28.44	1.00 V	204	16.77	28.79
3	1600.00	41.08 AV	54.00	-12.84	1.00 V	204	12.29	28.79
4	1920.00	49.62 PK	74.00	-24.38	1.00 V	341	20.10	29.52
4	1920.00	46.30 AV	54.00	-7.70	1.00 V	341	16.78	29.52
6	2063.00	61.14 PK	74.00	-12.86	1.00 V	123	30.63	30.51
7	2240.00	49.03 PK	74.00	-24.97	1.00 V	259	17.82	31.21
7	2240.00	43.79 AV	54.00	-10.21	1.00 V	259	15.58	31.21
8	2354.00	50.25 PK	74.00	-23.75	1.06 V	85	18.58	31.67
8	2354.00	38.70 AV	54.00	-15.30	1.06 V	85	7.03	31.67
9	*2437.00	108.05 PK			1.05 V	130	76.03	32.02
9	*2437.00	98.82 AV			1.05 V	130	66.80	32.02
10	4874.00	48.74 PK	74.00	-25.26	1.05 V	319	10.01	38.73
10	4874.00	35.54 AV	54.00	-18.46	1.05 V	319	-3.19	38.73

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “ : Fundamental frequency.



EUT	AT&T Plug&Share 54Mbps Wireless Router	MODEL	WL RT 2454 NM0A40
CHANNEL	Channel 11	FREQUENCY RANGE	1~ 25GHz
MODE	OFDM		
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 68%RH, 991hPa	TESTED BY: Match Tsui	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1090.00	43.94 PK	74.00	-30.06	1.00 H	320	16.08	27.86
1	1090.00	38.07 AV	54.00	-15.93	1.00 H	320	10.21	27.86
2	1120.00	44.97 PK	74.00	-29.03	1.18 H	273	17.07	27.90
2	1120.00	38.64 AV	54.00	-15.36	1.18 H	273	10.74	27.90
3	1600.00	46.44 PK	74.00	-27.56	1.20 H	337	17.65	28.79
3	1600.00	41.56 AV	54.00	-12.44	1.20 H	337	12.77	28.79
4	1920.00	50.80 PK	74.00	-23.20	1.26 H	95	21.28	29.52
4	1920.00	47.86 AV	54.00	-6.14	1.26 H	95	18.34	29.52
5	2088.00	60.02 PK	74.00	-13.98	1.10 H	78	29.35	30.67
6	2240.00	47.75 PK	74.00	-26.25	1.37 H	298	16.54	31.21
6	2240.00	42.89 AV	54.00	-11.11	1.37 H	298	11.68	31.21
7	2353.00	44.83 PK	74.00	-29.17	1.00 H	219	13.16	31.67
7	2353.00	33.13 AV	54.00	-20.87	1.00 H	219	1.46	31.67
8	*2462.00	101.07 PK			1.11 H	71	68.90	32.17
8	*2462.00	91.67 AV			1.11 H	71	59.50	32.17
9	2488.00	42.37 PK	74.00	-31.63	1.11 H	71	10.04	32.33
9	2488.00	32.97 AV	54.00	-21.03	1.11 H	71	0.64	32.33
10	4924.00	48.63 PK	74.00	-25.37	1.09 H	147	9.91	38.72
10	4924.00	34.70 AV	54.00	-19.30	1.09 H	147	-4.02	38.72

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “ : Fundamental frequency.



EUT	AT&T Plug&Share 54Mbps Wireless Router	MODEL	WL RT 2454 NM0A40
CHANNEL	Channel 11	FREQUENCY RANGE	1~ 25GHz
MODE	OFDM		
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 68%RH, 991hPa	TESTED BY: Match Tsui	

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1090.00	45.46 PK	74.00	-28.54	1.07 V	340	17.60	27.86
1	1090.00	39.90 AV	54.00	-14.10	1.07 V	340	12.04	27.86
2	1600.00	44.94 PK	74.00	-29.06	1.04 V	292	16.15	28.79
2	1600.00	40.35 AV	54.00	-13.65	1.04 V	292	11.56	28.79
3	1920.00	49.82 PK	74.00	-24.18	1.00 V	341	20.30	29.52
3	1920.00	46.62 AV	54.00	-7.38	1.00 V	341	17.10	29.52
4	2088.00	61.57 PK	74.00	-12.43	1.00 V	121	30.90	30.67
5	2240.00	48.30 PK	74.00	-25.70	1.02 V	258	17.09	31.21
5	2240.00	43.59 AV	54.00	-10.41	1.02 V	258	12.38	31.21
6	2354.00	48.98 PK	74.00	-25.02	1.03 V	277	17.31	31.67
6	2354.00	39.68 AV	54.00	-14.32	1.03 V	277	8.01	31.67
7	*2462.00	109.38 PK			1.04 V	128	77.21	32.17
7	*2462.00	100.40 AV			1.04 V	128	68.23	32.17
8	2488.00	50.68 PK	74.00	-23.32	1.04 V	128	18.35	32.33
8	2488.00	41.70 AV	54.00	-12.30	1.04 V	128	9.37	32.33
9	4924.00	48.60 PK	74.00	-25.40	1.00 V	242	9.88	38.72
9	4924.00	35.17 AV	54.00	-18.83	1.00 V	242	-3.55	38.72

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “ : Fundamental frequency.



4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURE


The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation



4.3.5 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.




4.3.7 TEST RESULTS

EUT	AT&T Plug&Share 54Mbps Wireless Router	MODEL	WL RT 2454 NM0A40
MODE	CCK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH, 991hPa	TESTED BY	Match Tsui

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	8.92	0.5	PASS
6	2437	8.84	0.5	PASS
11	2462	8.92	0.5	PASS




CH1

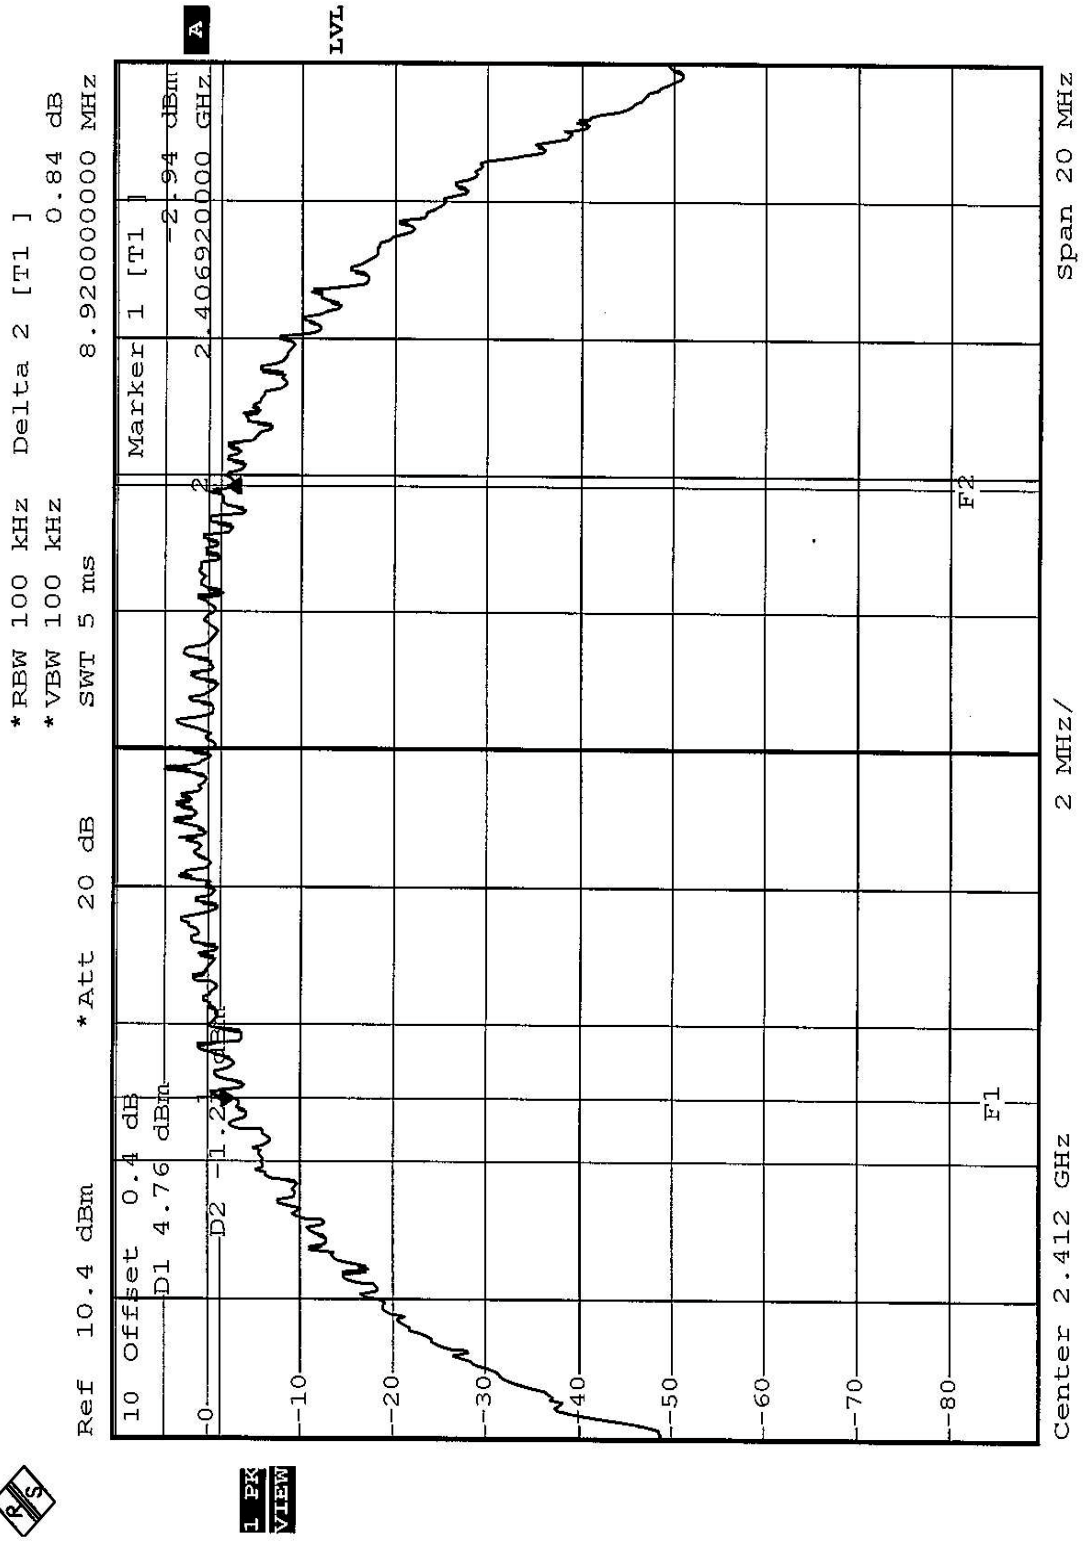



CH6

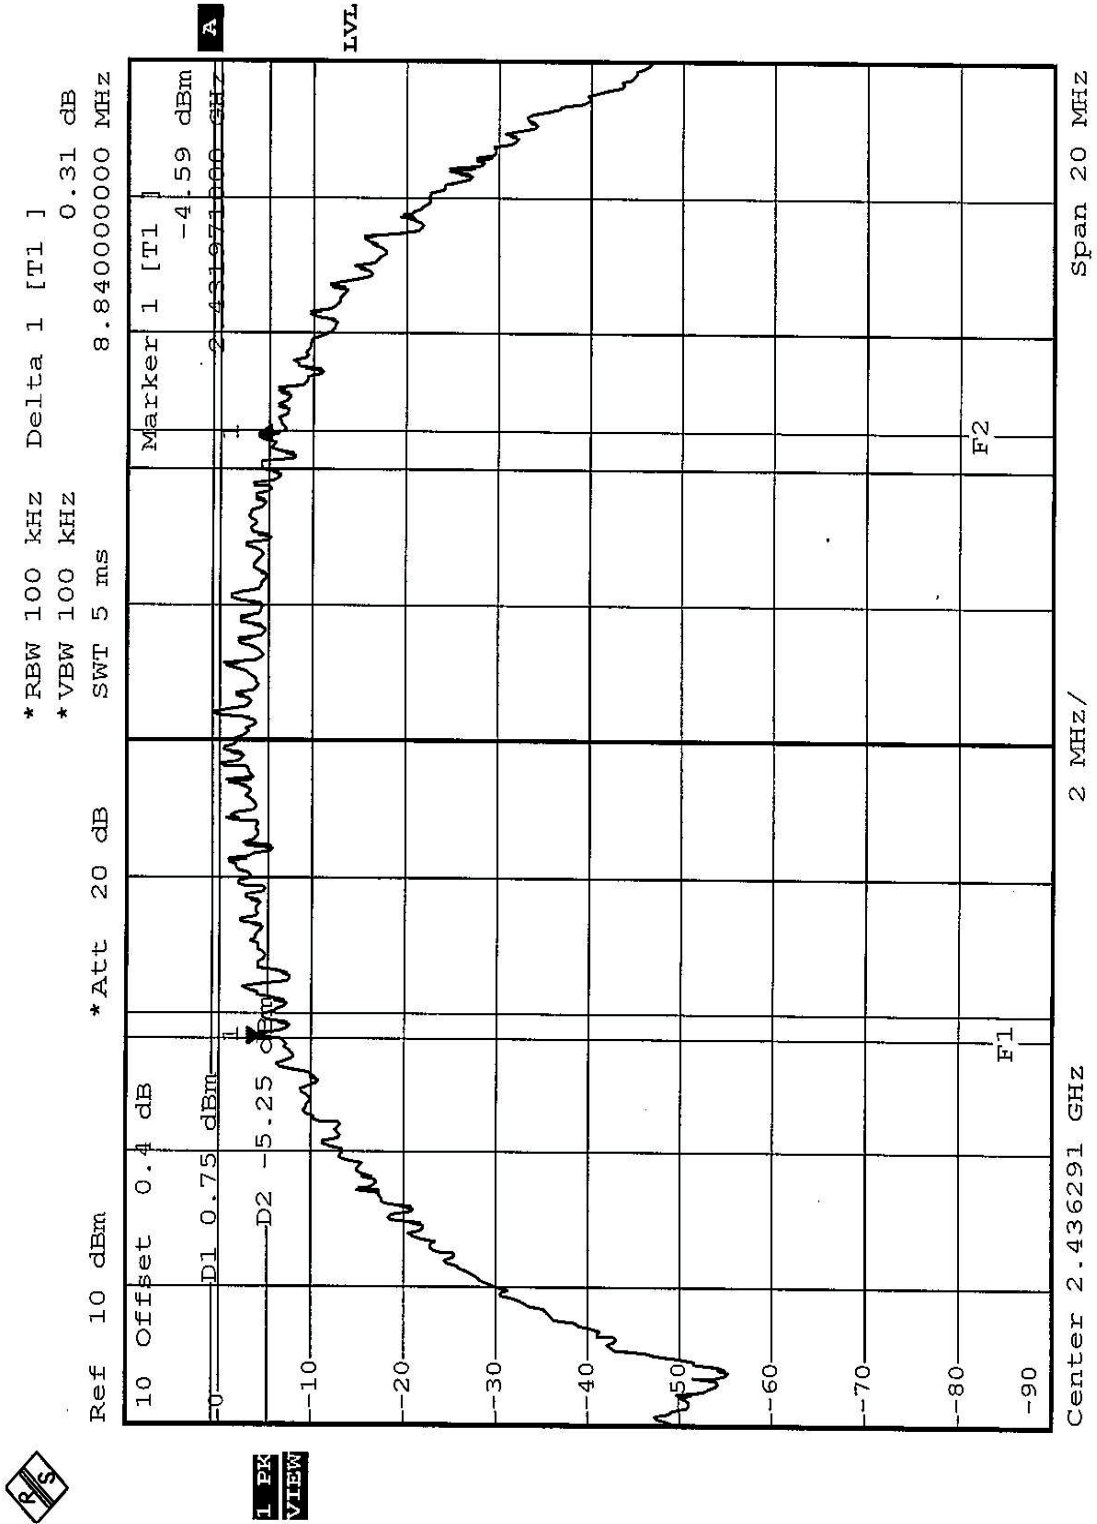




EUT	AT&T Plug&Share 54Mbps Wireless Router	MODEL	WL RT 2454 NM0A40
MODE	OFDM	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH, 991hPa	TESTED BY	Match Tsui

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	15.52	0.5	PASS
6	2437	15.48	0.5	PASS
11	2462	15.40	0.5	PASS




CH6

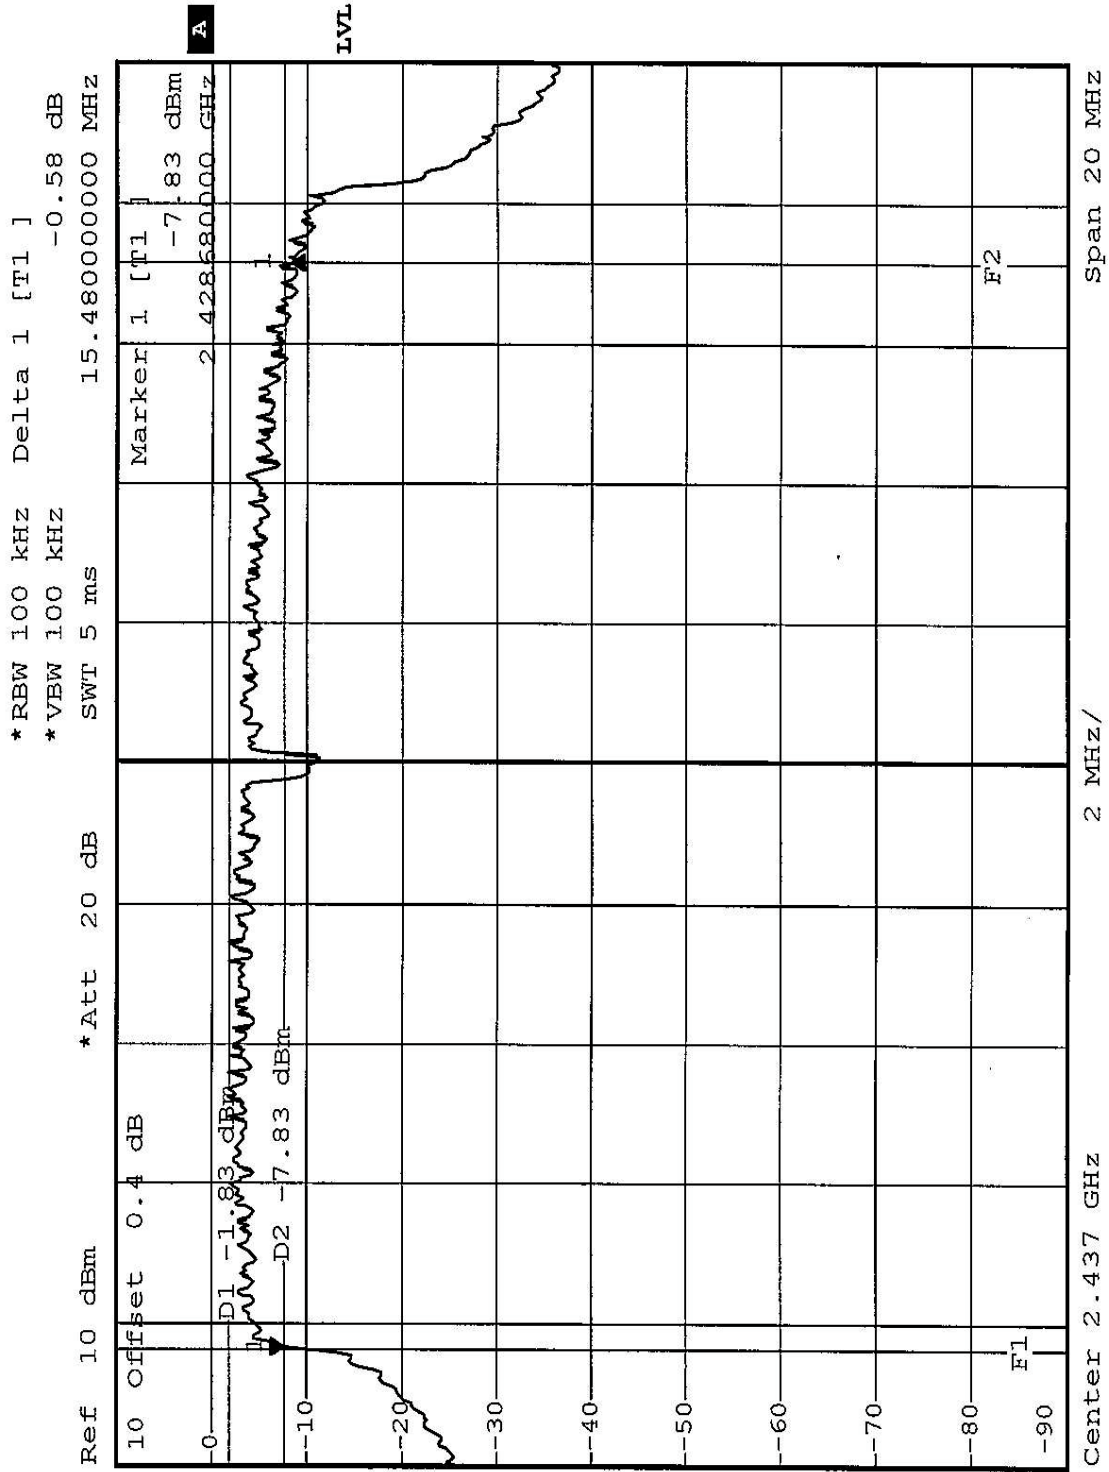

1 PK VIEW



CH11

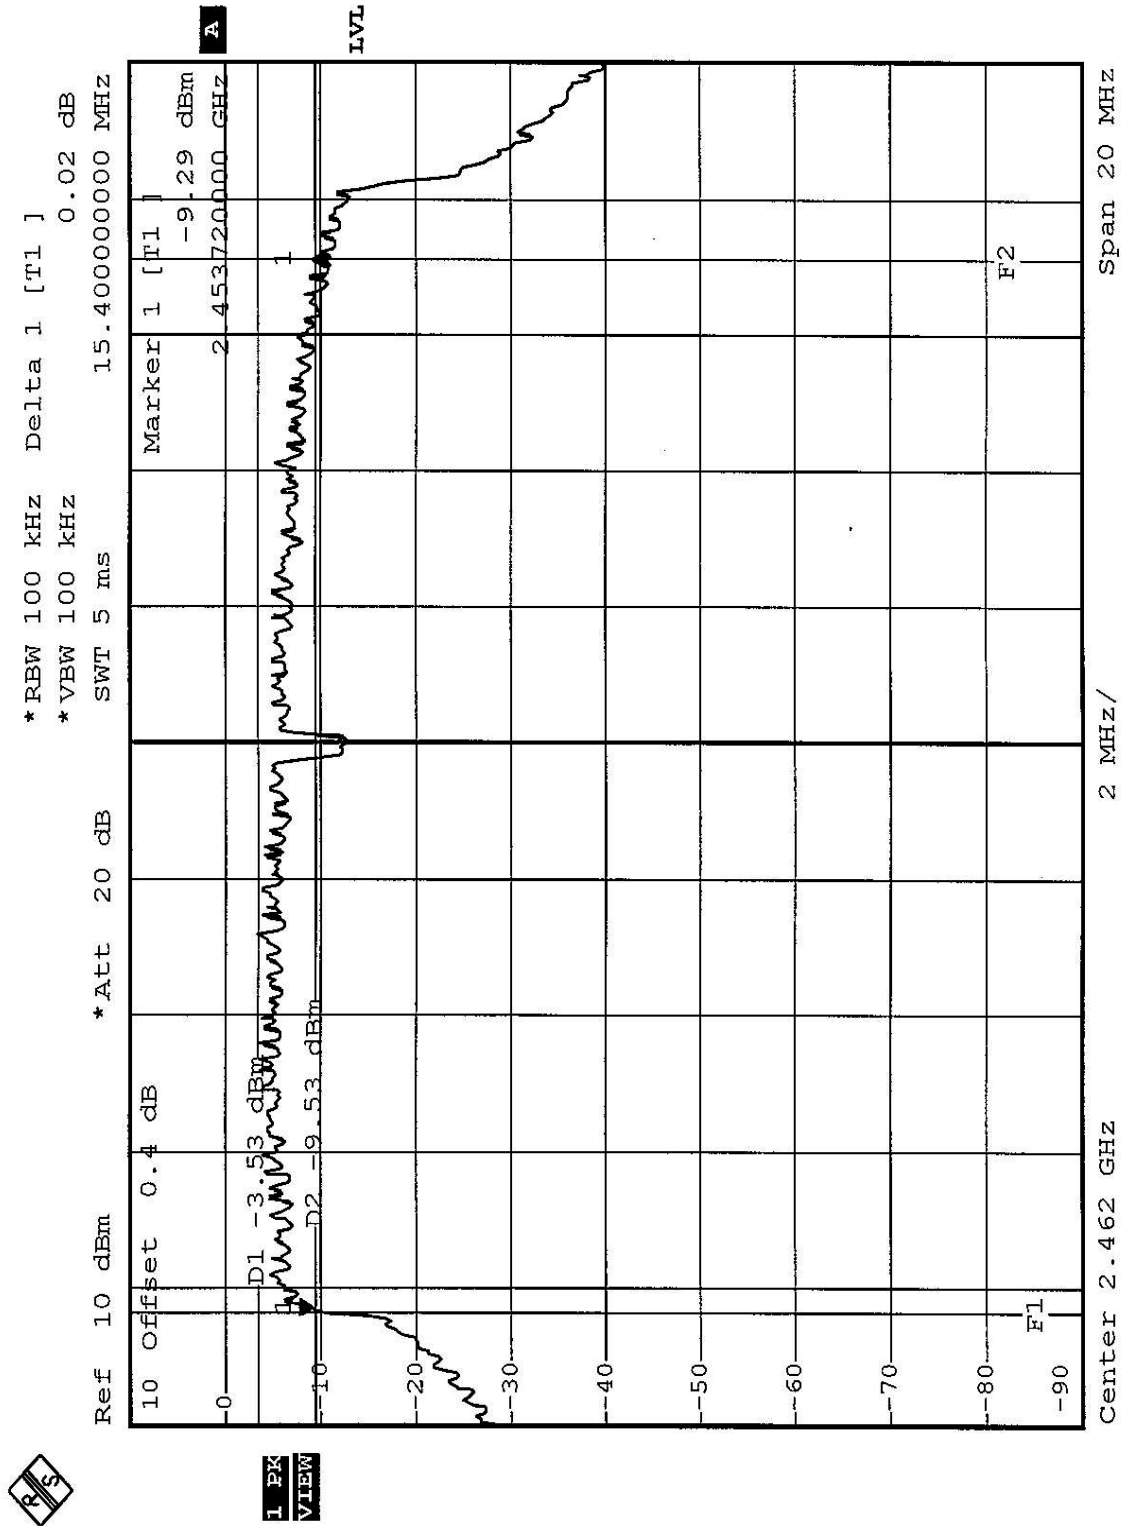

1 PK VIEW



4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004
AGILENT SIGNAL GENERATOR	E8257C	MY43320668	Dec. 31, 2004
TEKTRONIX OSCILLOSCOPE	TDS 220	C019167	Feb. 1, 2005
NARDA DETECTOR	4503A	FSCM99899	NA

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.



4.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to read the response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same reading on oscilloscope. Record the power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP



4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.1.6.



4.4.7 TEST RESULTS

EUT	AT&T Plug&Share 54Mbps Wireless Router	MODEL	WL RT 2454 NM0A40
MODE	CCK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH, 991hPa	TESTED BY	Steven Lu

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	15.00	30	PASS
6	2437	15.00	30	PASS
11	2462	15.00	30	PASS

EUT	AT&T Plug&Share 54Mbps Wireless Router	MODEL	WL RT 2454 NM0A40
MODE	OFDM	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH, 991hPa	TESTED BY	Steven Lu

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	15.00	30	PASS
6	2437	15.00	30	PASS
11	2462	15.00	30	PASS



4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITIONS

Same as 4.1.6




4.5.7 TEST RESULTS

EUT	AT&T Plug&Share 54Mbps Wireless Router	MODEL	WL RT 2454 NM0A40
MODE	CCK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH, 991hPa	TESTED BY	Match Tsui

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-6.65	8	PASS
6	2437	-6.47	8	PASS
11	2462	-6.53	8	PASS




CH1

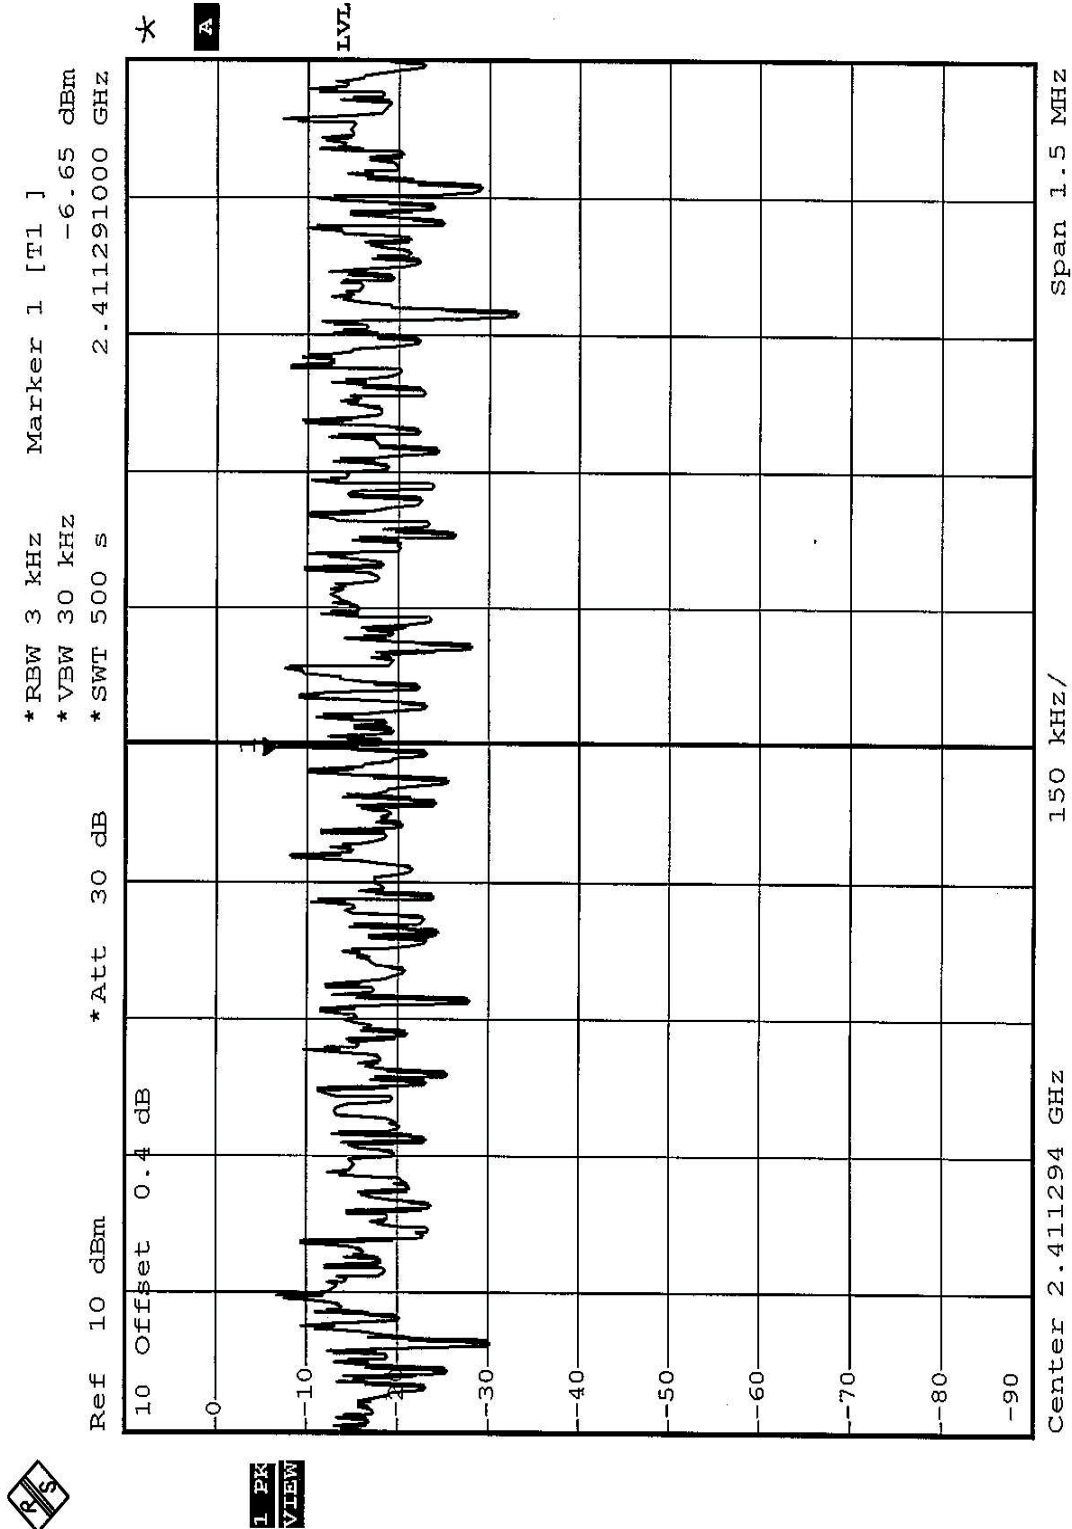




CH6

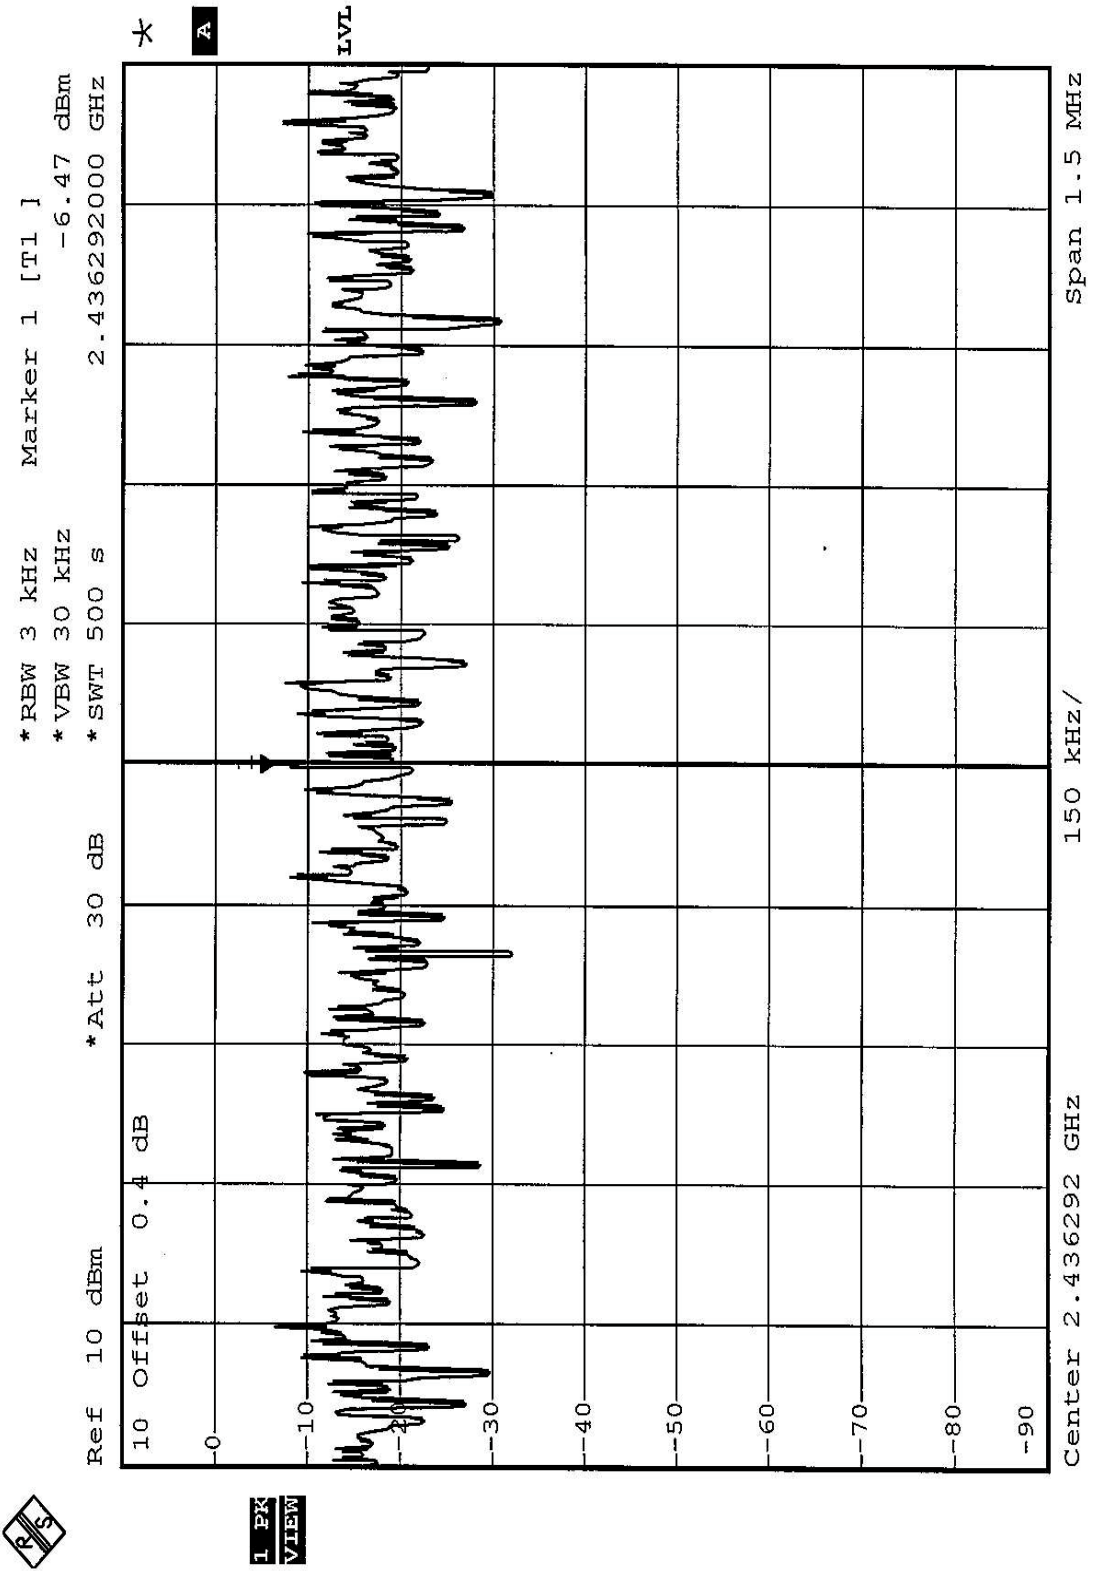



CH11

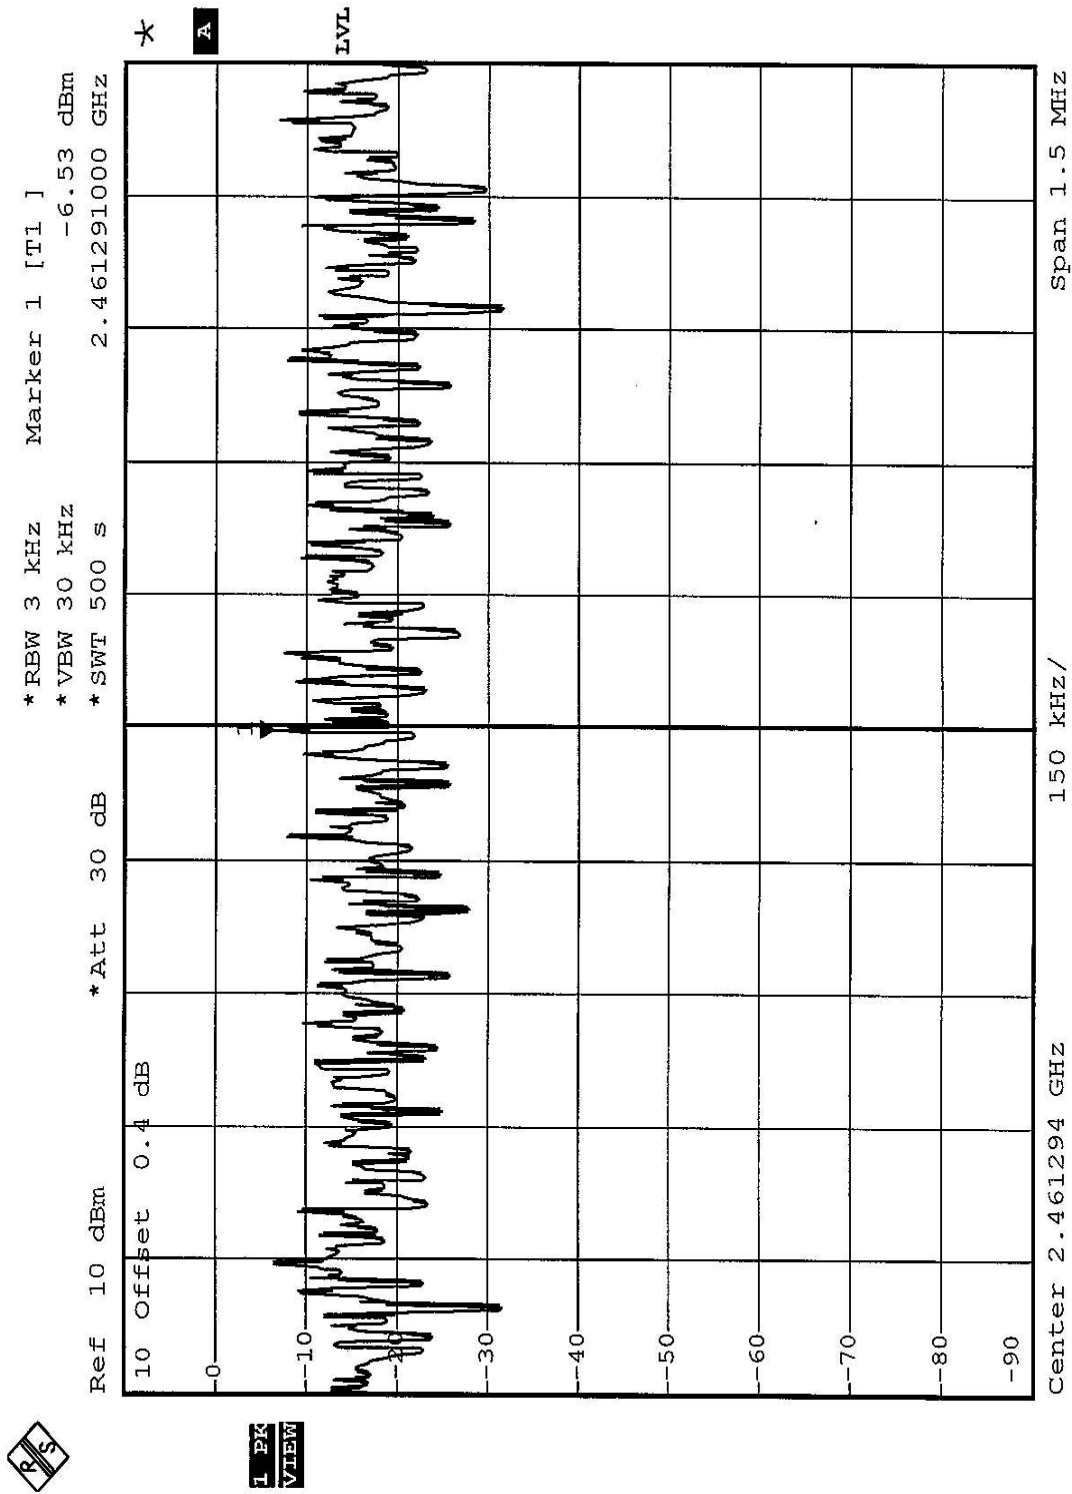




EUT	AT&T Plug&Share 54Mbps Wireless Router	MODEL	WL RT 2454 NM0A40
MODE	OFDM	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH, 991hPa	TESTED BY	Match Tsui

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-15.92	8	PASS
6	2437	-15.64	8	PASS
11	2462	-15.92	8	PASS




CH1

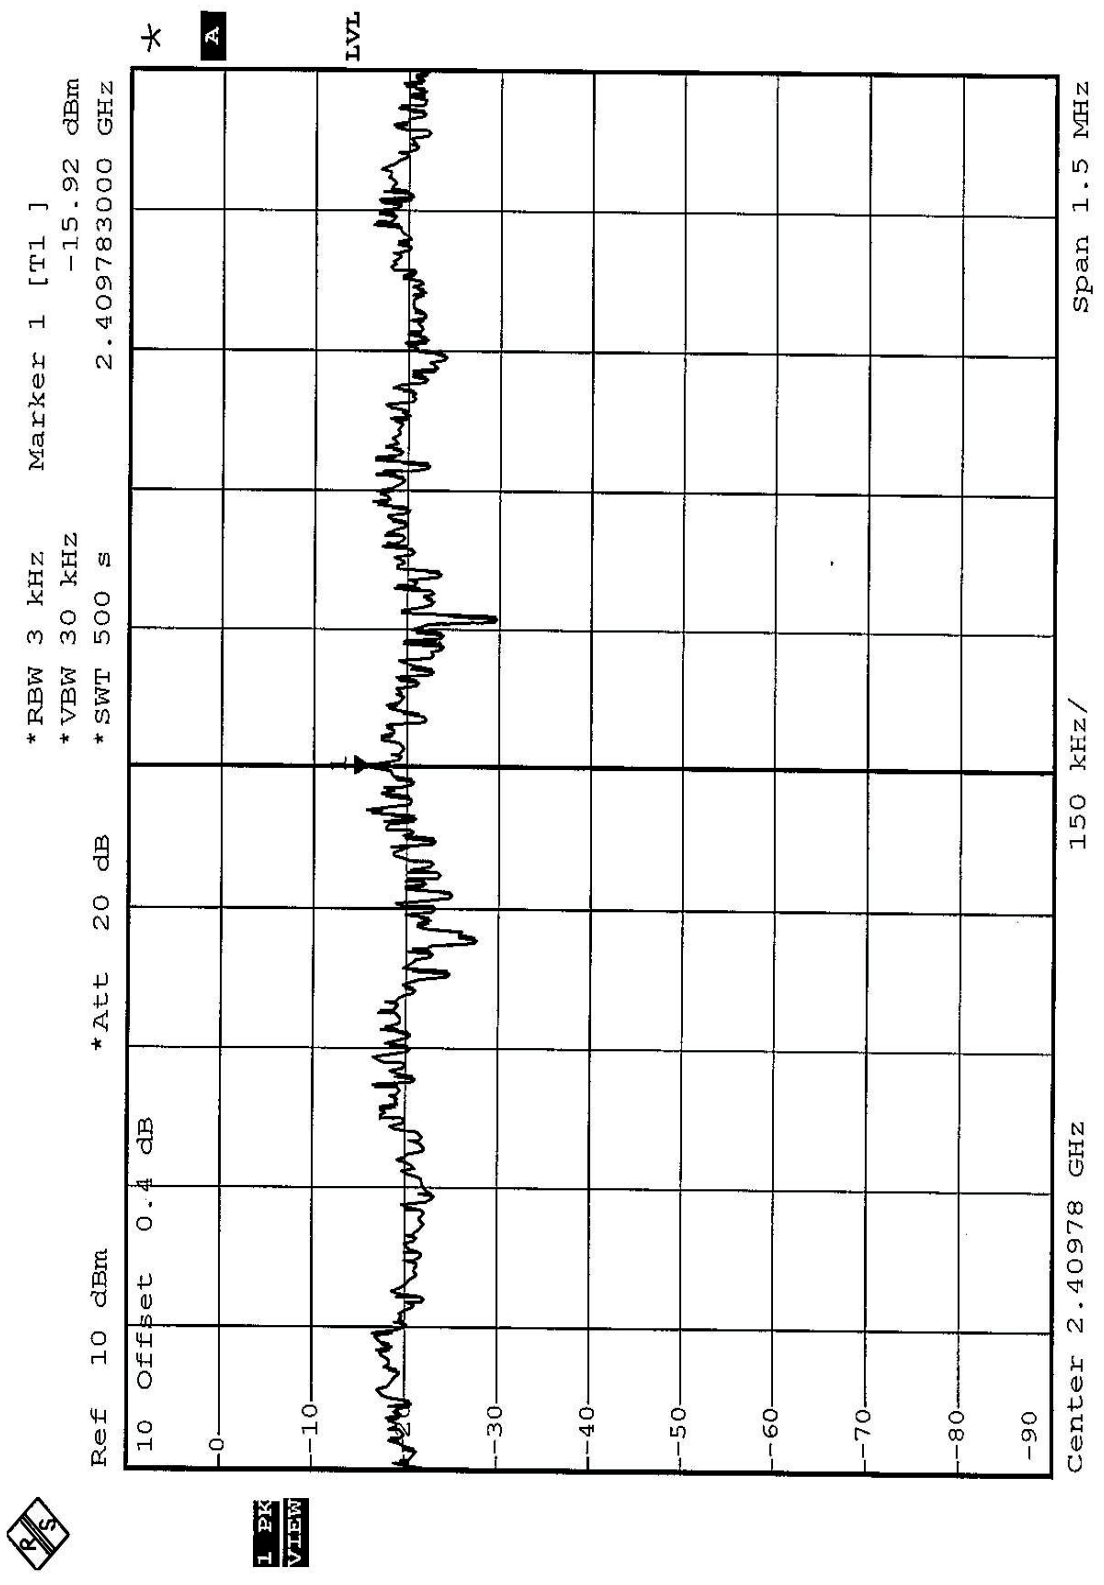




CH6

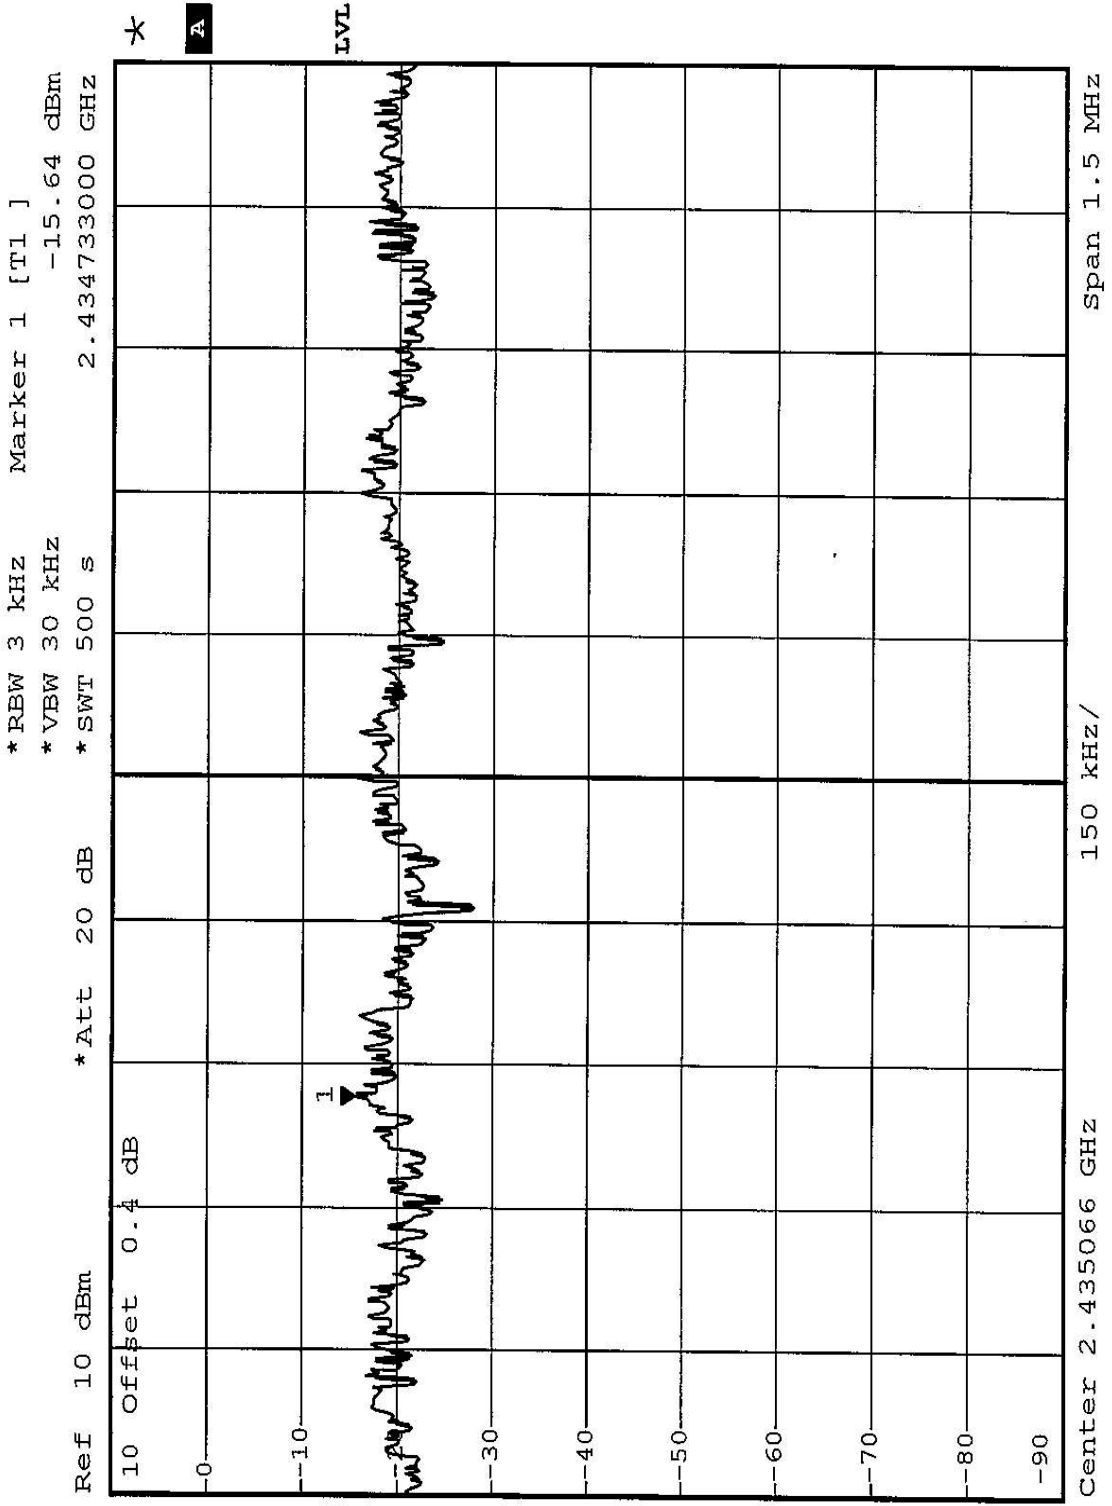

1 PK VIEW



CH11

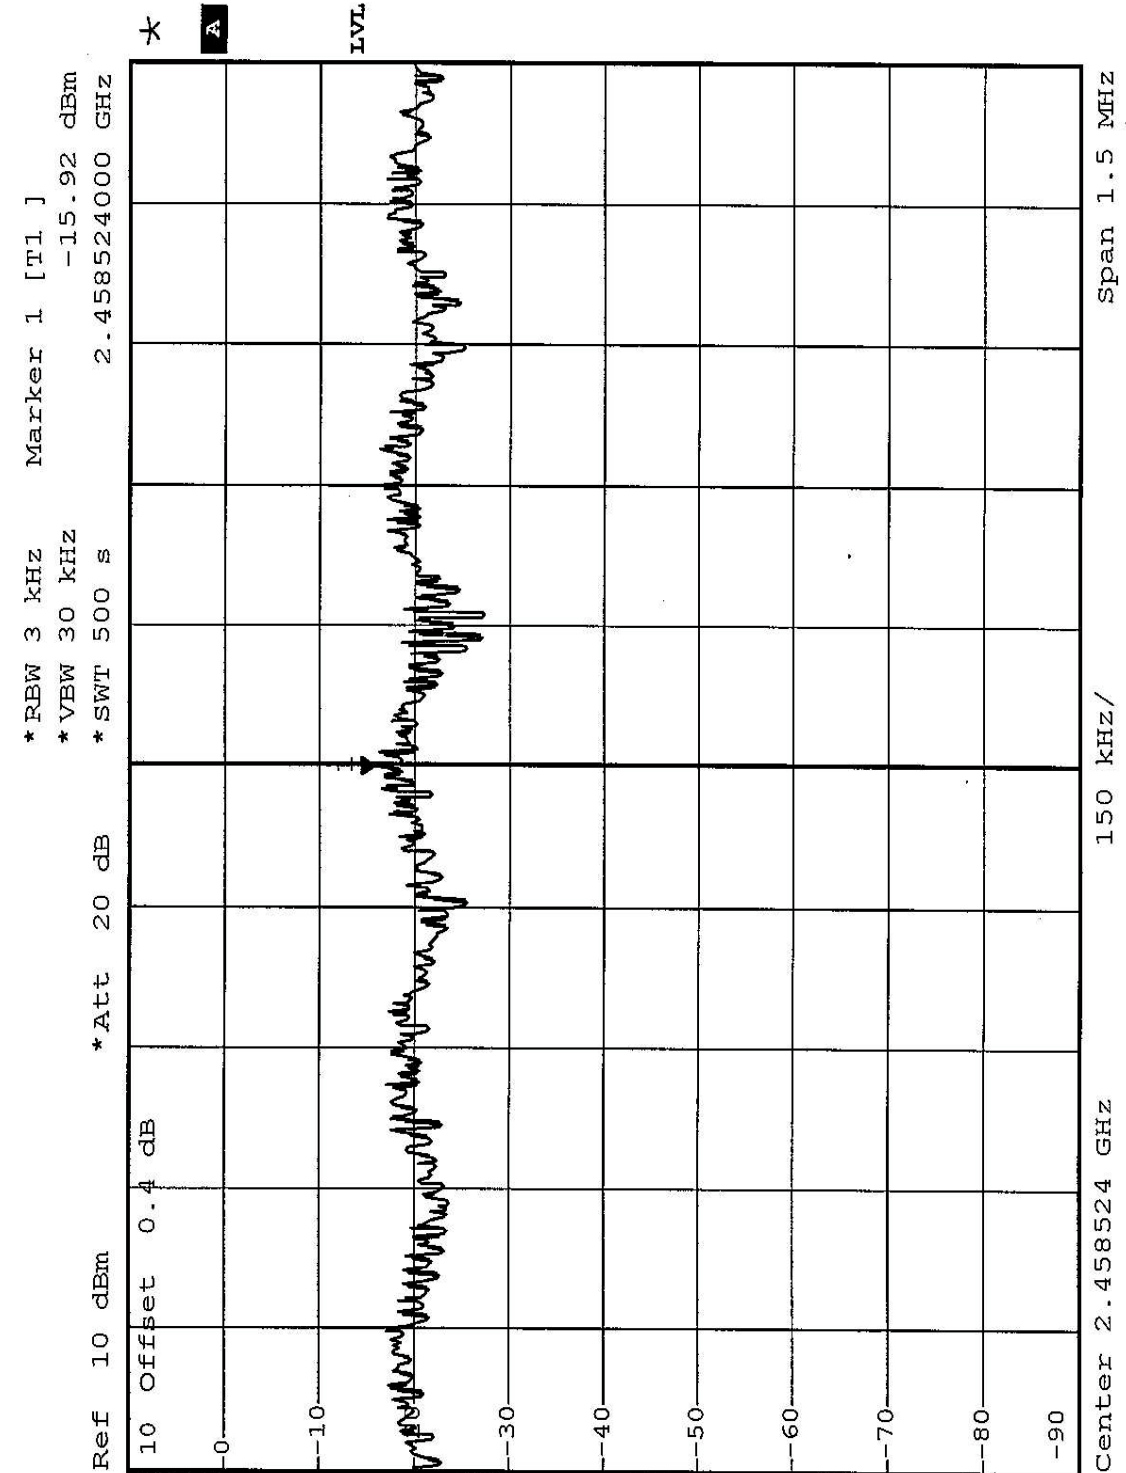



4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 1MHz and 10Hz with suitable frequency span including 100MHz bandwidth from band edge. The band edges was measured and recorded.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation



4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6

4.6.6 TEST RESULTS


The spectrum plots are attached on the following 8 pages. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).


NOTE 1:The band edge emission plot of the CCK technique on the following 1 ~ 2 pages show 54.76dB delta between carrier maximum power and local maximum emission in restrict band (2.354GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 104.97dBuV/m, so the maximum field strength in restrict band is $104.97-54.76=50.21$ dBuV/m which is under 54dBuV/m limit.


NOTE 2:The band edge emission plot of the CCK technique on the following 3 ~ 4 pages show 58.32dB delta between carrier maximum power and local maximum emission in restrict band (2.4860GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 105.60dBuV/m, so the maximum field strength in restrict band is $105.60-58.32=47.28$ dBuV/m which is under 54dBuV/m limit.


NOTE 3:The band edge emission plot of the OFDM technique on the following 5 ~ 6 pages show 52.86dB delta between carrier maximum power and local maximum emission in restrict band (2.3580GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 97.96dBuV/m, so the maximum field strength in restrict band is $97.96-52.86=45.10$ dBuV/m which is under 54dBuV/m limit.

NOTE 4:The band edge emission plot of the OFDM technique on the following 7 ~ 8 pages show 53.01dB delta between carrier maximum power and local maximum emission in restrict band (2.4880GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 100.40dBuV/m, so the maximum field strength in restrict band is $100.40-53.01=47.39$ dBuV/m which is under 54dBuV/m limit.

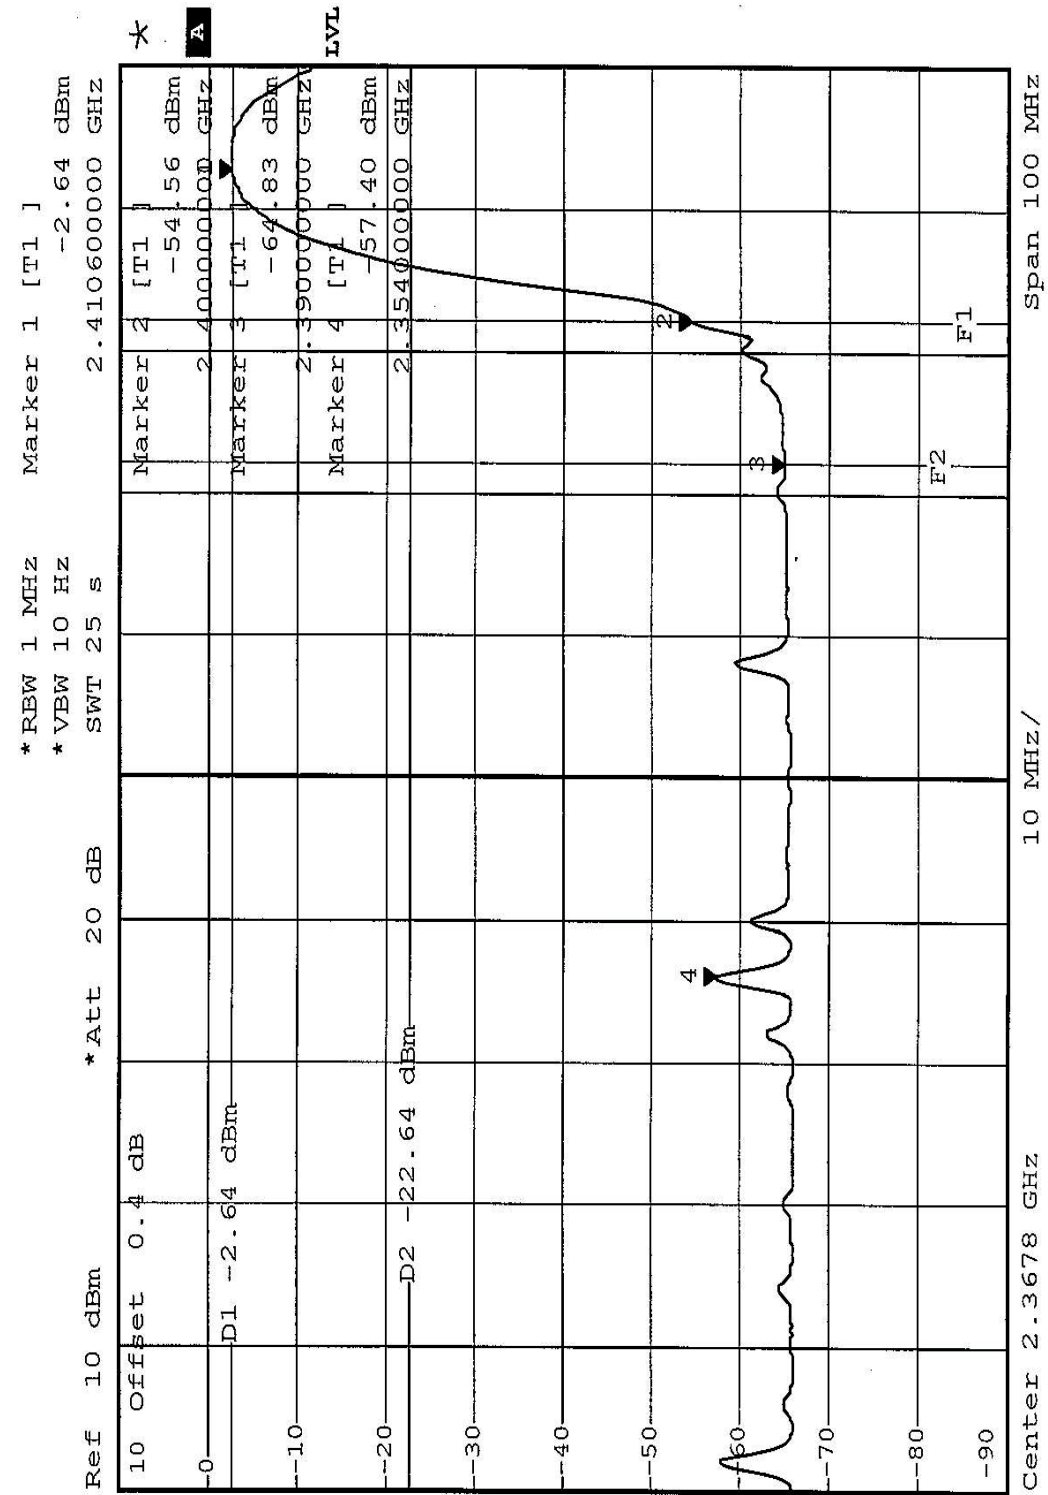


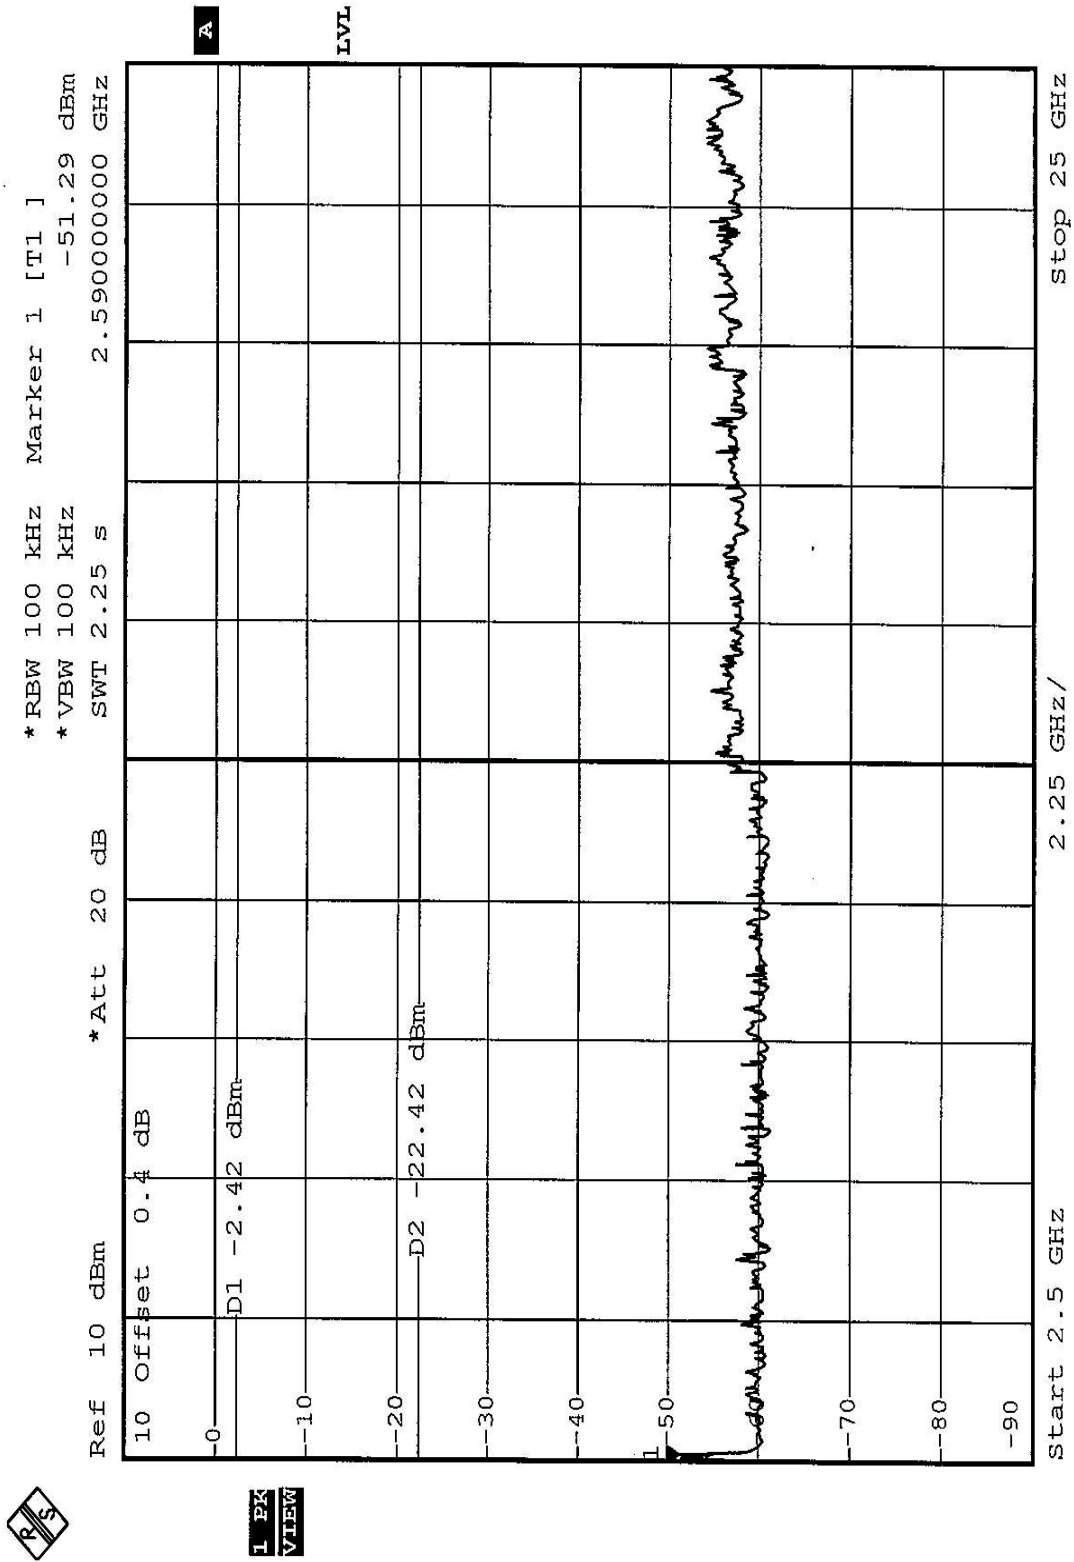


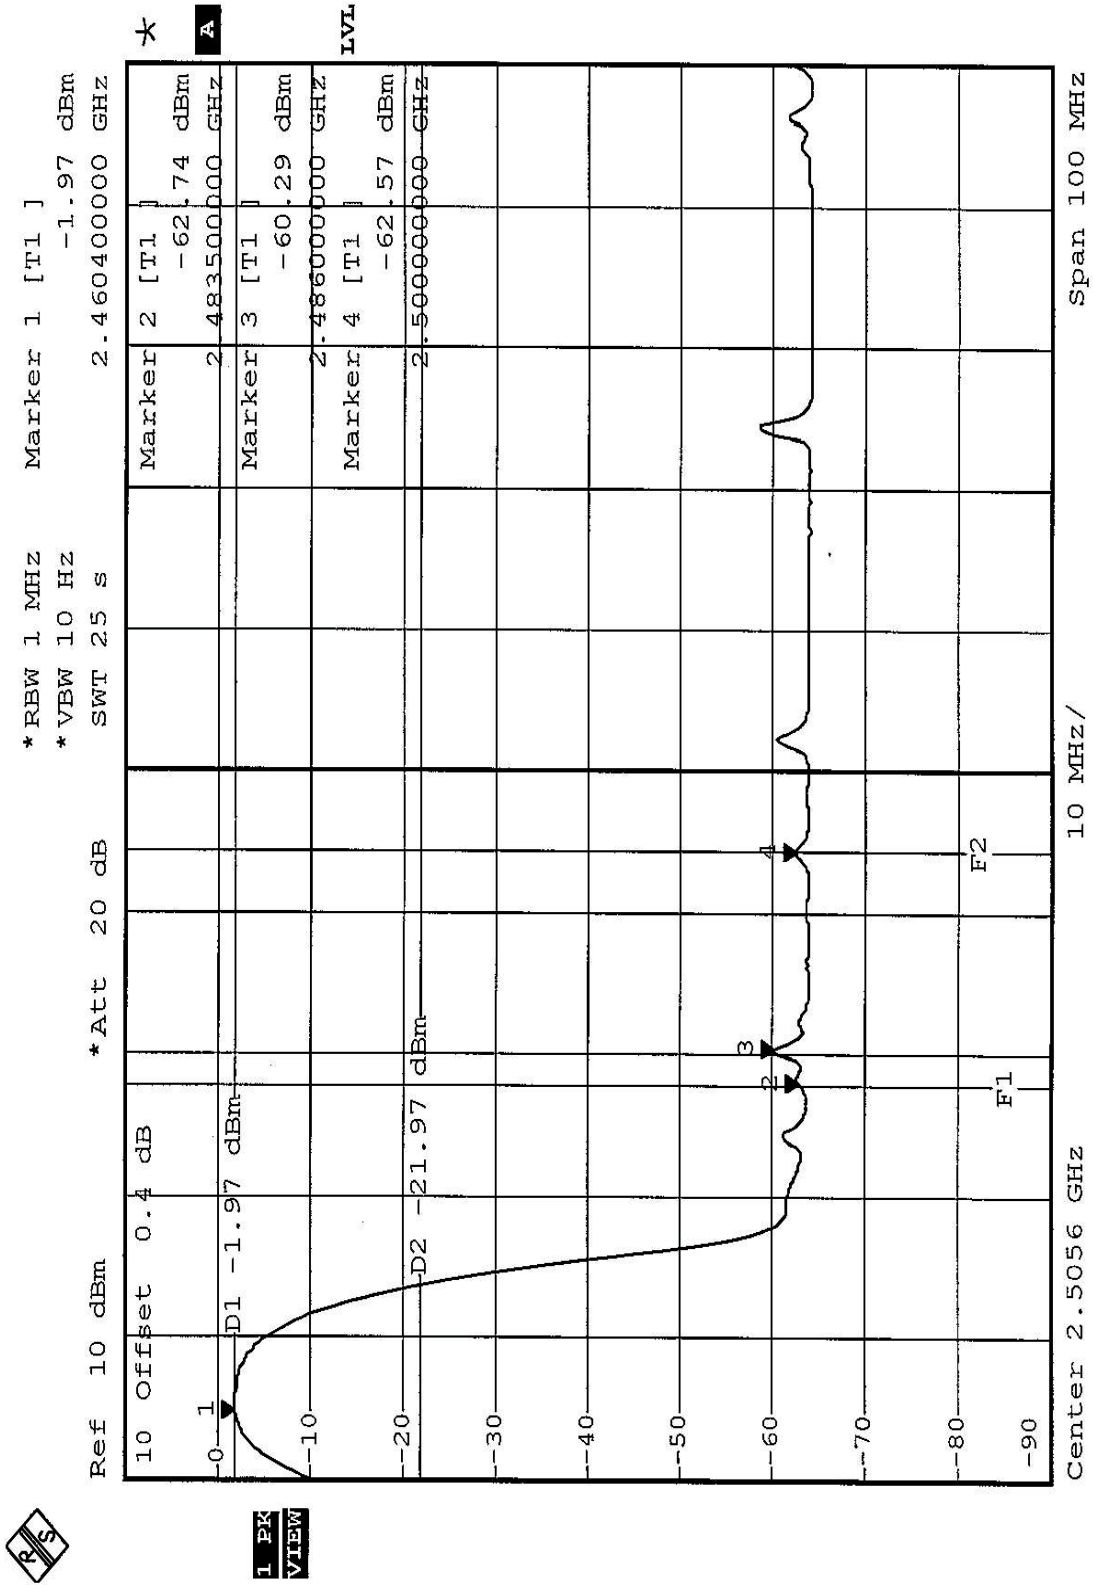


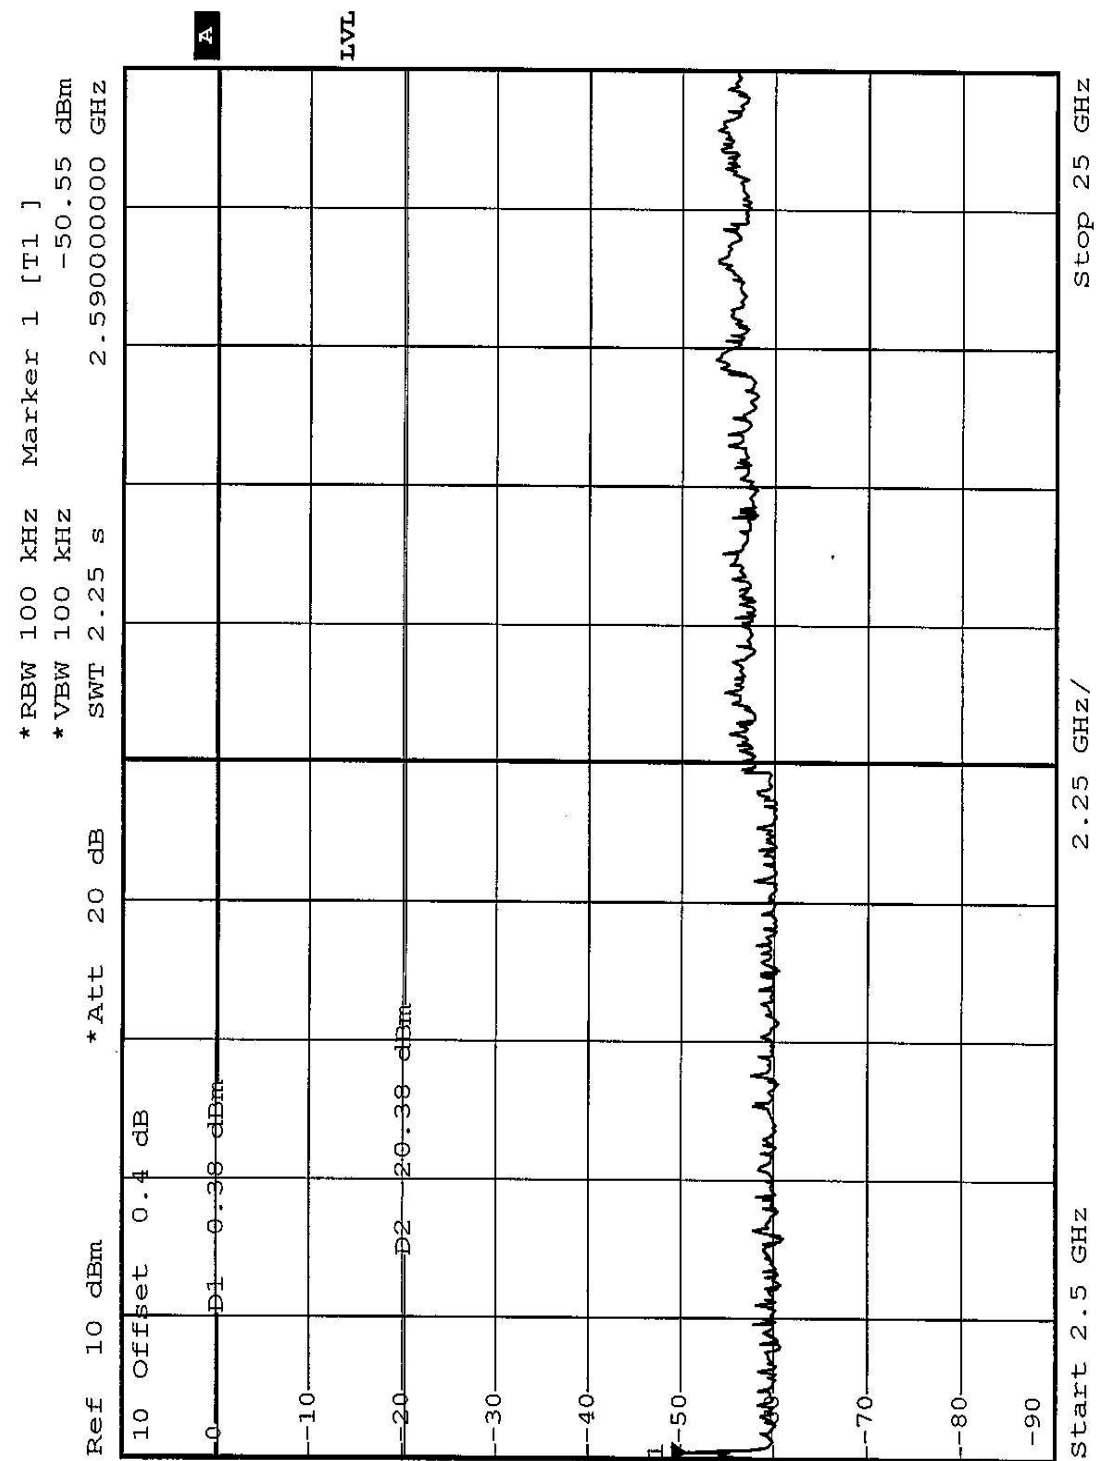


1 PK VIEW

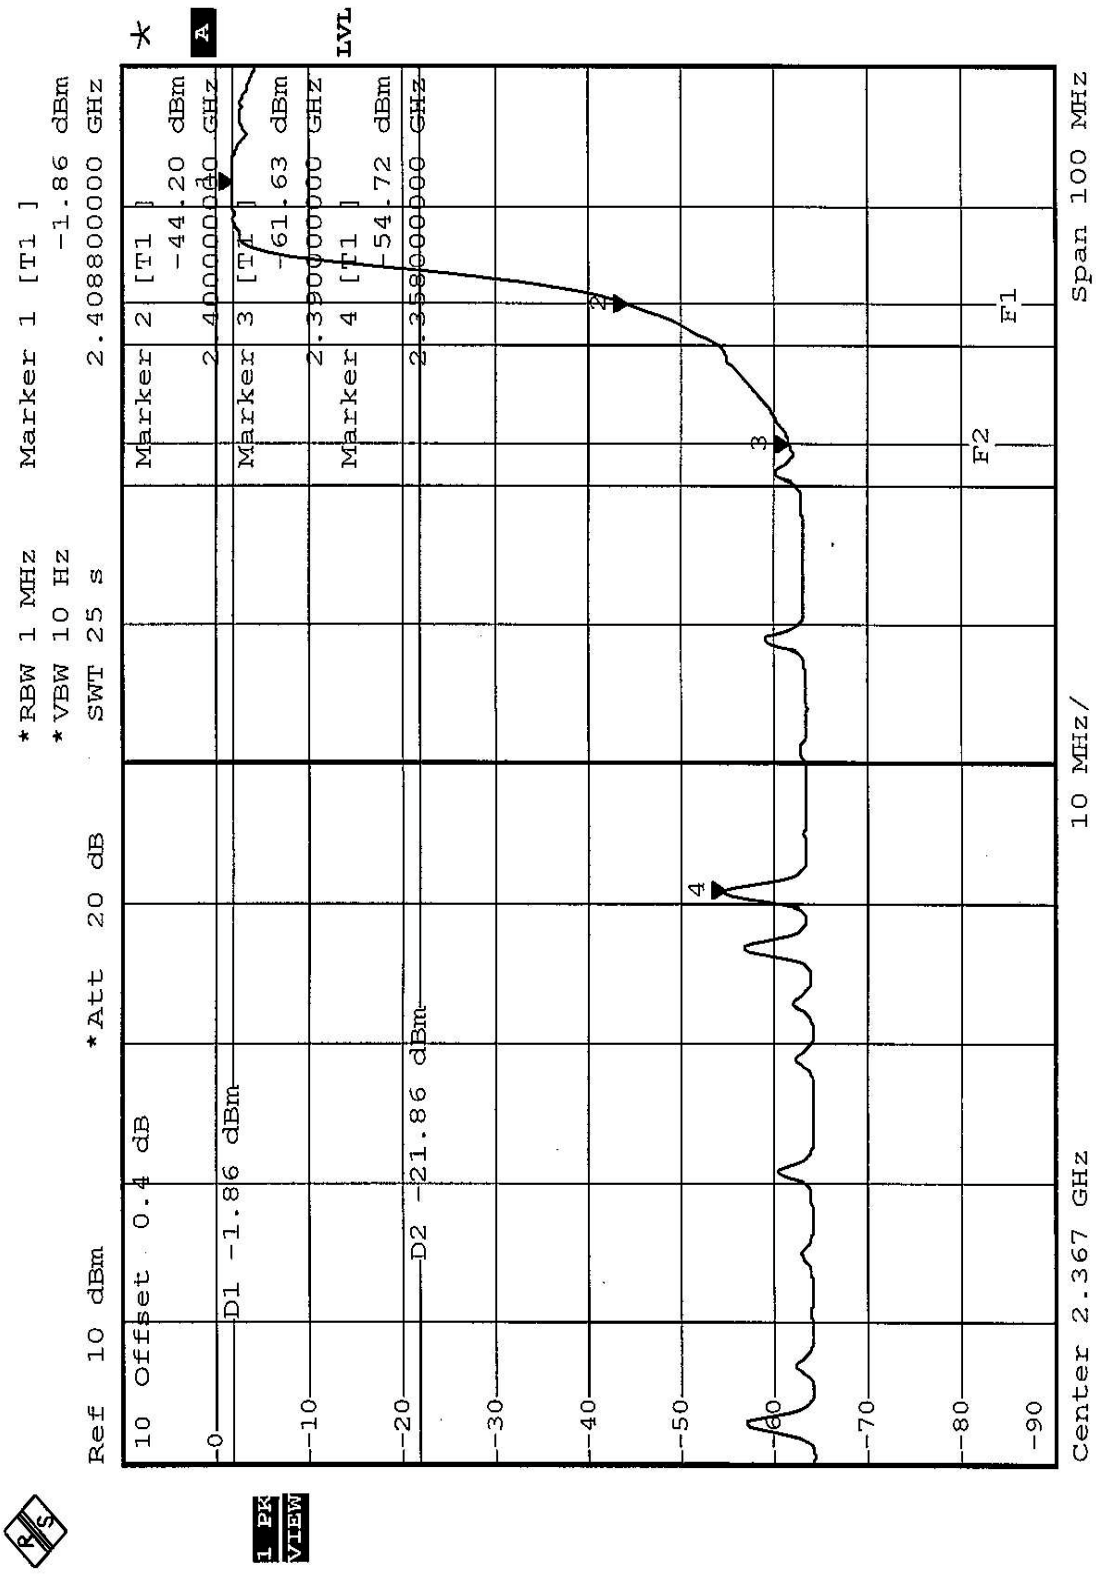

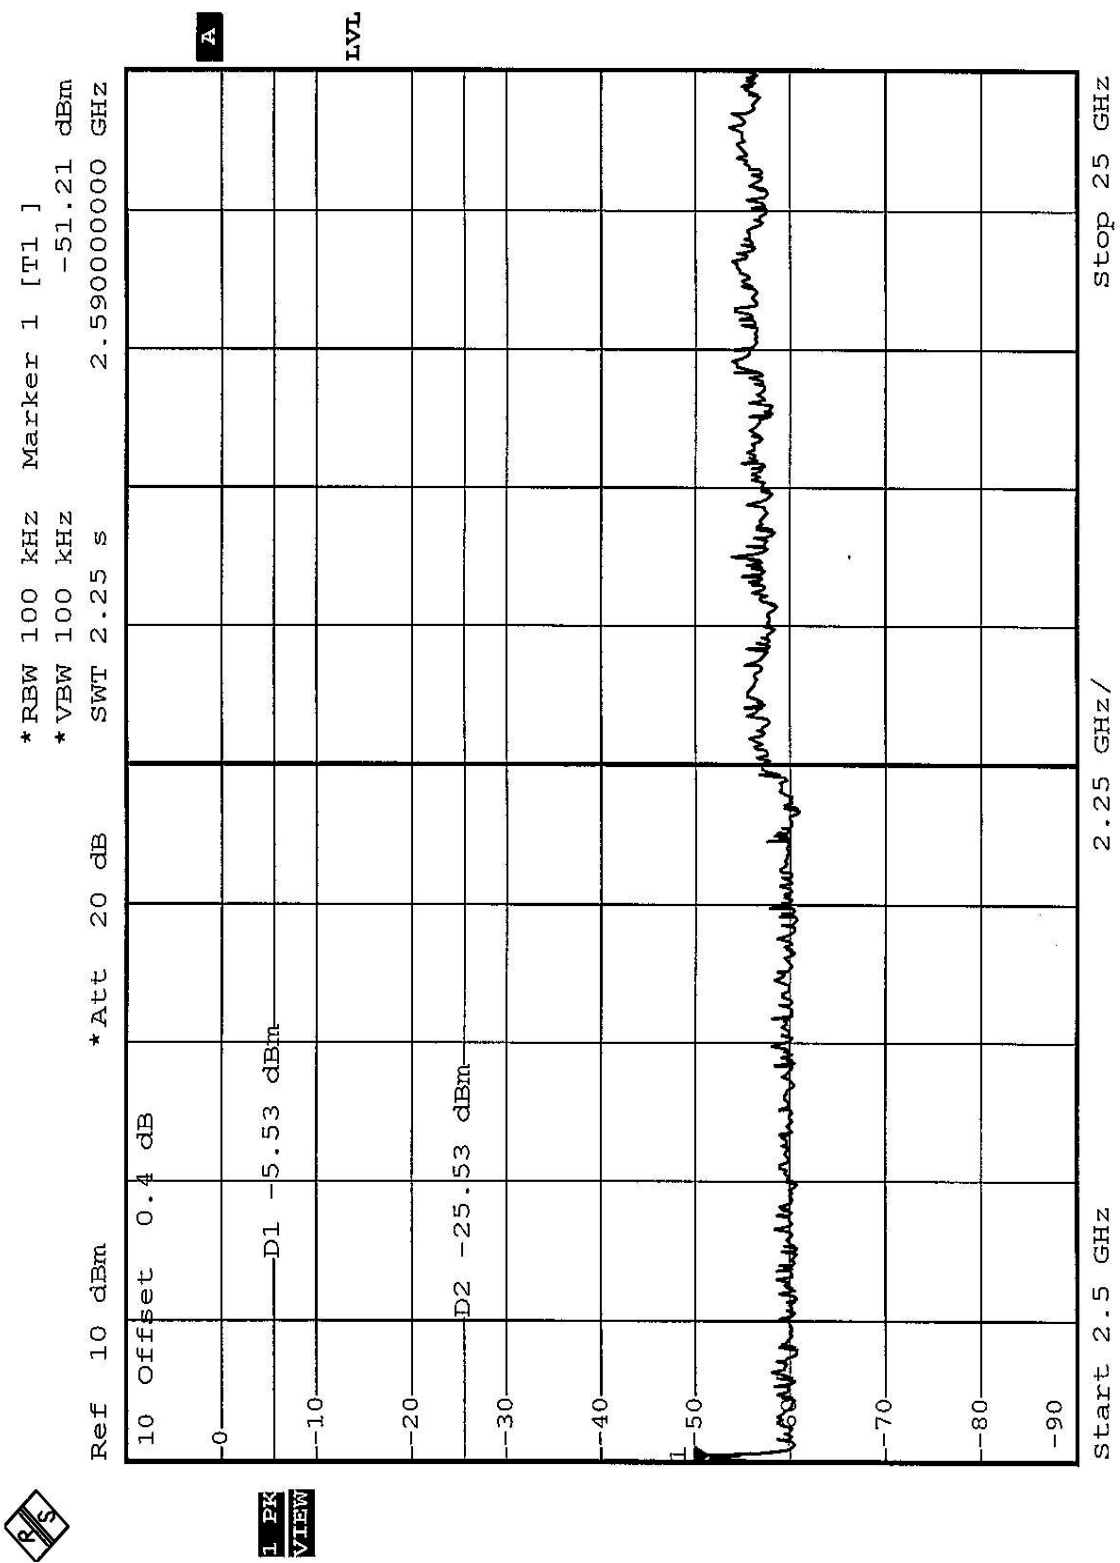

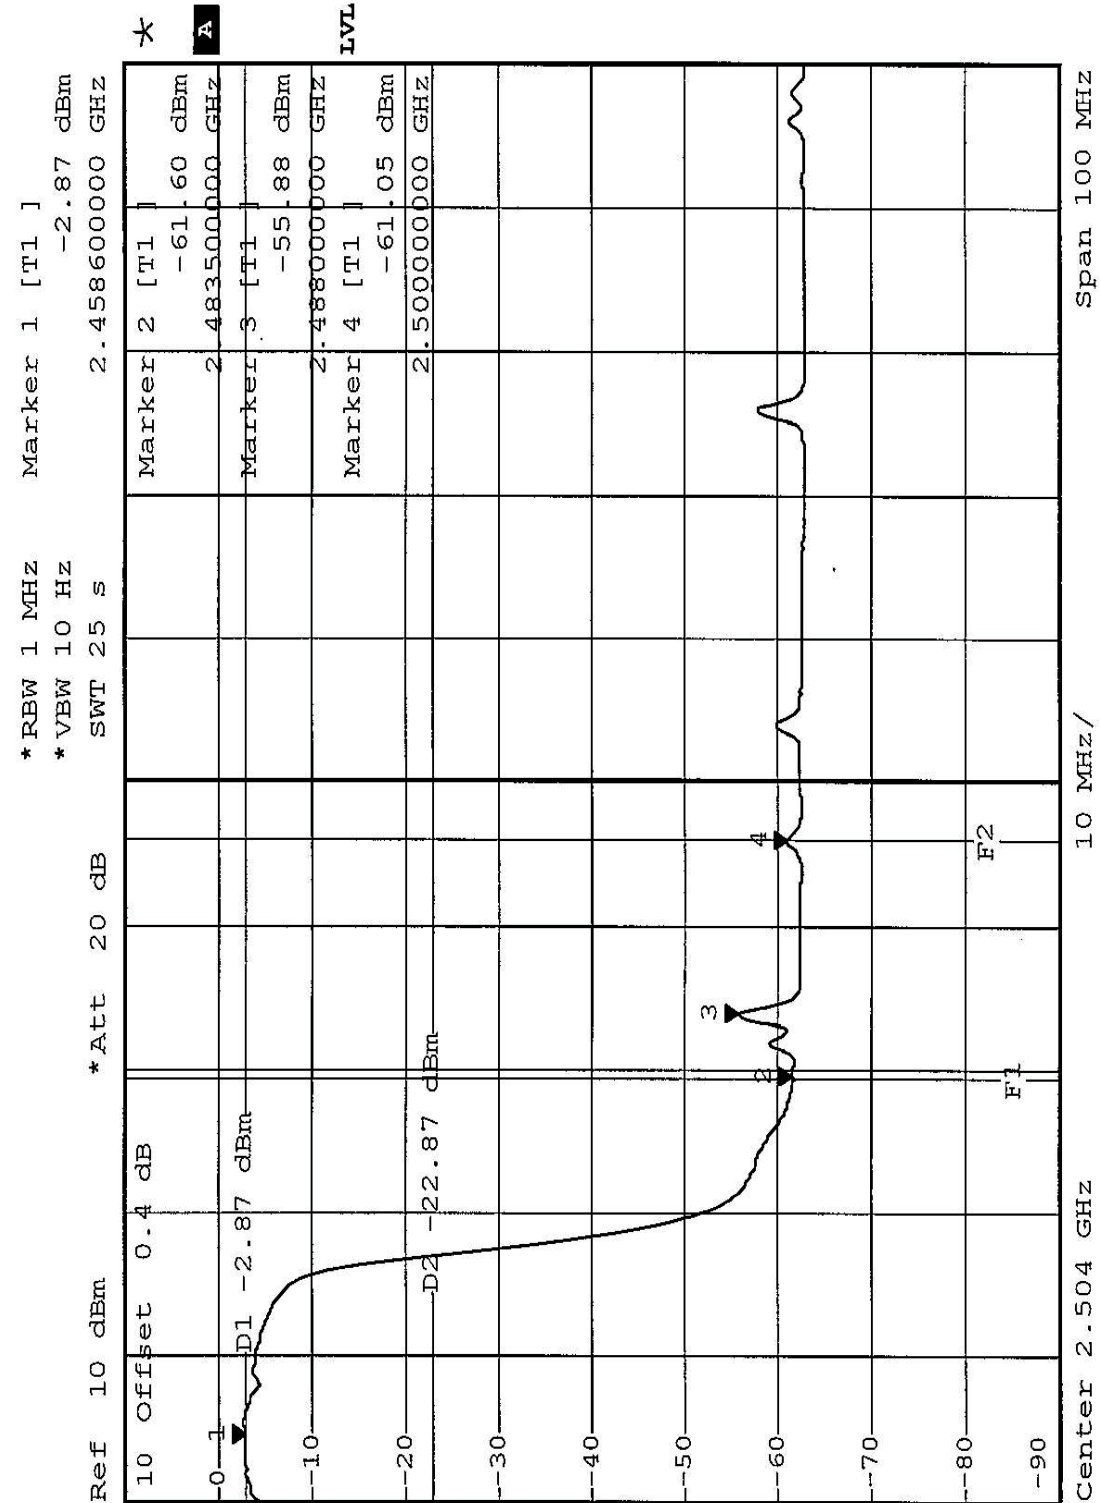

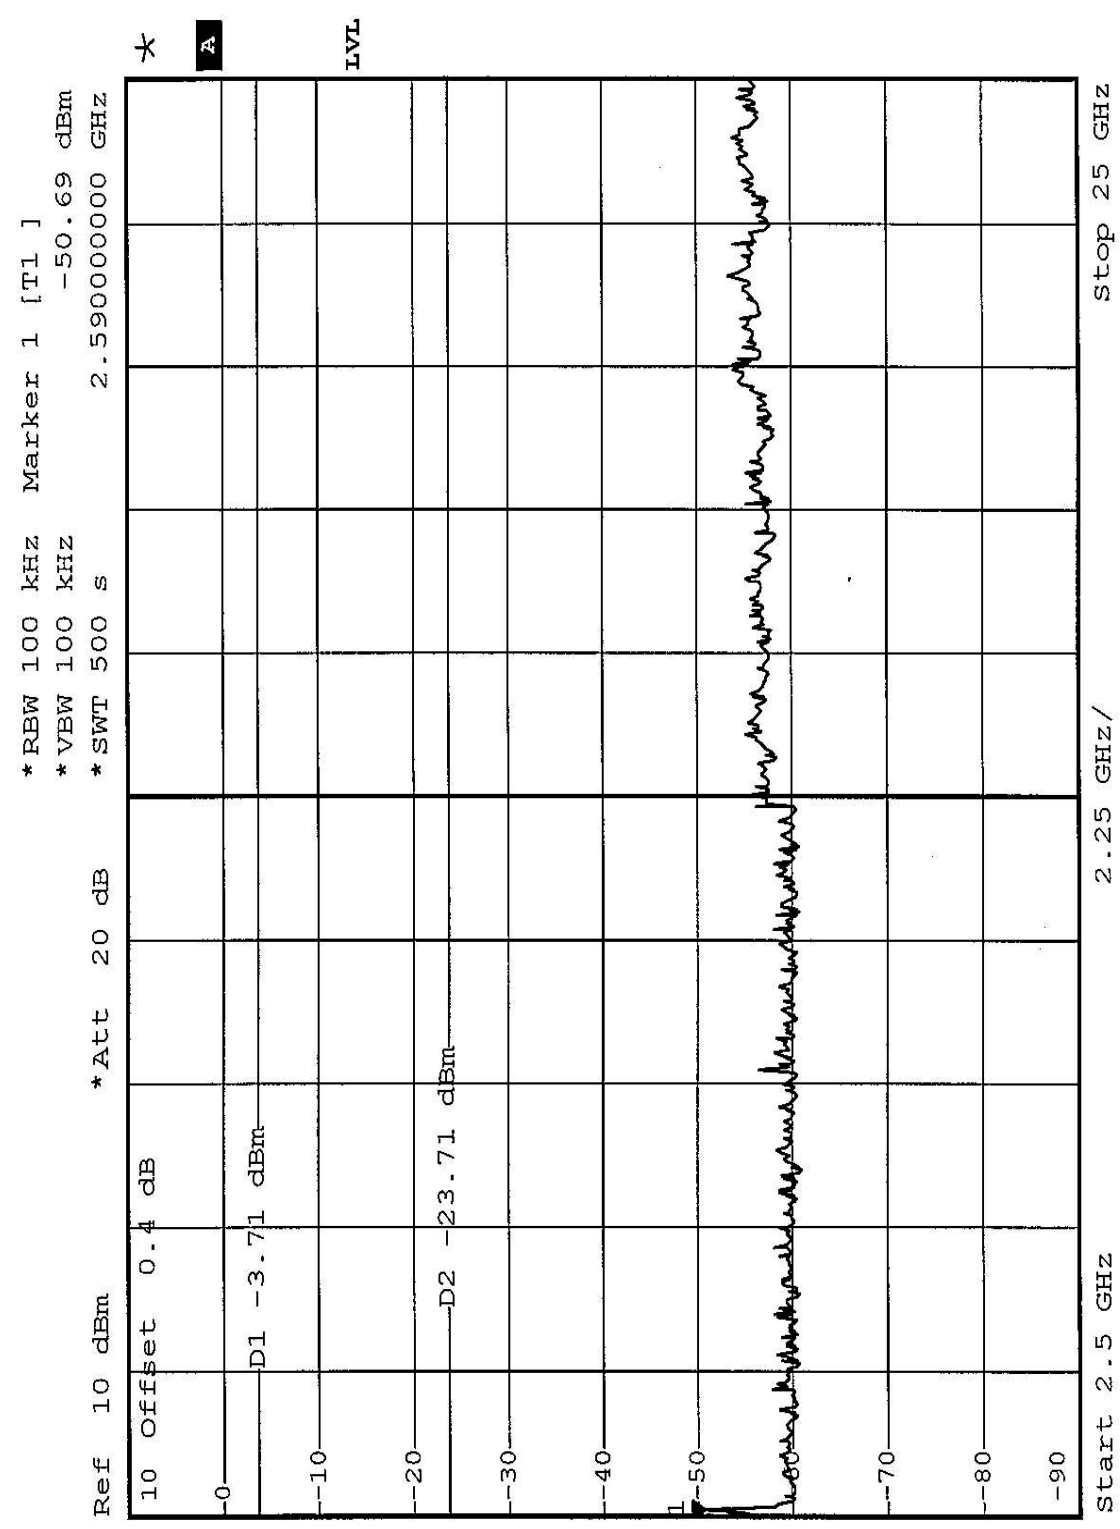



4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION


The antenna type used in this product is Dipole Antenna without antenna connector. The maximum Gain of this antenna is only 2dBi.

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

CONDUCTED EMISSION TEST



RADIATED EMISSION TEST

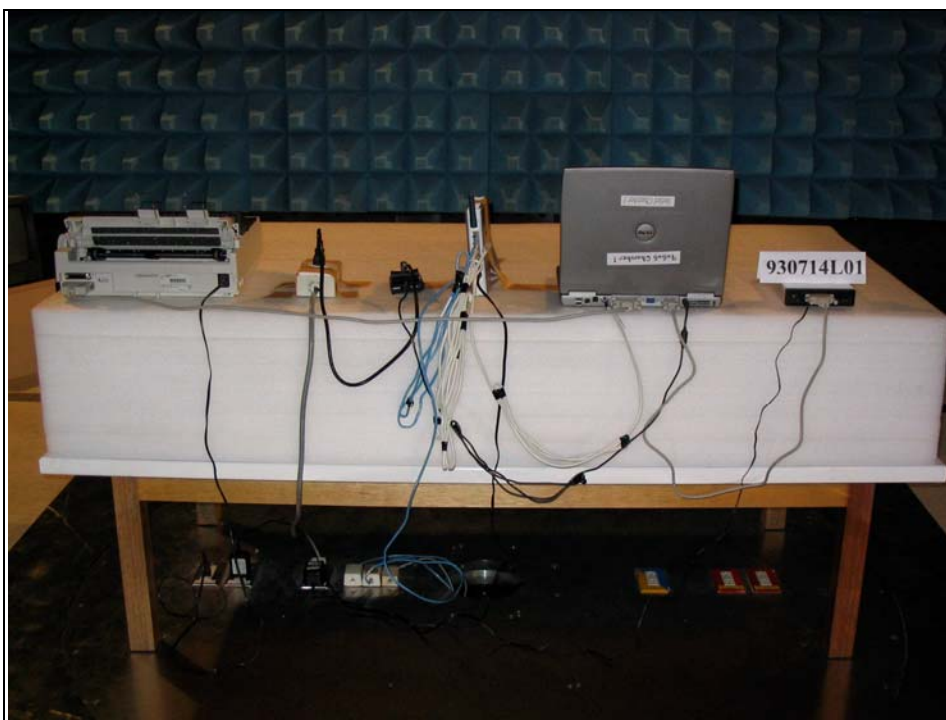



6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

USA	FCC, NVLAP, UL
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	CNLA, BSMI, DGT
Netherlands	Telefication
Singapore	PSB , GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Linko RF Lab.

Tel: 886-3-3270910

Fax: 886-3-3270892

Email: service@mail.adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

Report Format Version 1.0