

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

~ -

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT

	OF		
Product Name:	SiME Smart Glasses		
Brand Name:	ChipSiP		
Model No.:	SiME G3		
Model Difference:	N/A		
FCC ID:	O7N-SIME-G3		
Report No.:	E2/2015/30085		
Issue Date:	Sep.10, 2015		
FCC Rule Part:	§15.247, Cat: DSS ChipSiP		
Prepared for:	8F-1, No. 186, Jian 1st Rd., Zhonghe Dis- trict., New Taipei City 235, Taiwan (R.O.C)		
	SGS Taiwan Ltd.		
Droporod by	Electronics & Communication Laboratory		
Prepared by:	No.2, Keji 1st Rd., Guishan District, Taoyuan City, Taiwan 333		
TAF Dec-MRA Desting Laboratory 0513	Note: This report shall not be reproduced except in full, without the written approval of SGS Taiwan Ltd. This document may be altered or revised by SGS Taiwan Ltd. personnel only, and shall be noted in the revision section of the document.		



VERIFICATION OF COMPLIANCE

Applicant:	ChipSiP 8F-1, No. 186, Jian 1st Rd., Zhonghe District., New Taipei City 235, Taiwan (R.O.C)
Product Name:	SiME Smart Glasses
Brand Name:	ChipSiP
Model No.:	SIME G3
Model Difference:	N/A
FCC ID:	O7N-SIME-G3
Report Number:	E2/2015/30085
Date of test:	Apr. 02, 2015 ~ Sep. 10, 2015
Date of EUT Received:	Apr. 02, 2015
We hereby certify the	nat:

The above equipment was tested by SGS Taiwan Ltd. Electronics & Communication Laboratory The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10:2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits.

The test results of this report relate only to the tested sample identified in this report.

Test By:	Aken Huang	Date:	Sep.10, 2015
Prepared By:	Aken Huang / Engineer Tiffany Kao	Date:	Sep.10, 2015
Approved By:	Tiffany Kao / Clerk Jim Ch ang	Date:	Sep.10, 2015
-	Jim Chang / Asst. Manager		



Revision History

Report Number	Revision	Description	Issue Date
E2/2015/30085	E2/2015/30085 Rev.00 Initial creation of document		Sep.10, 2015

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised any the protective at the transaction from exercising all their rights and obligations under the transaction documents is unaver a period to the company. Any unauthorized alteration, forgery or falsification of the content or ap-tervent is unaverlated and definders may be protected to the fully extent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Table of Contents

1.	GEN	ERAL INFORMATION	. 7
	1.1.	Product description	. 7
	1.2.	Product Feature of Equipment Under Test	. 8
	1.3.	Test Methodology of Applied Standards	. 9
	1.4.	Test Facility	. 9
	1.5.	Special Accessories	. 9
	1.6.	Equipment Modifications	. 9
2.	SYST	EM TEST CONFIGURATION	10
	2.1.	EUT Configuration	10
	2.2.	EUT Exercise	10
	2.3.	Test Procedure	10
	2.4.	Measurement Results Explanation Example	10
	2.5.	Configuration of Tested System	.11
3.	SUMI	MARY OF TEST RESULTS	12
4.	DESC	CRIPTION OF TEST MODES	13
	4.1.	Operated in 2400 ~ 2483.5MHz Band	13
	4.2.	The Worst Test Modes and Channel Details	14
5.	MEAS	SUREMENT UNCERTAINTY	15
6.	CON	DUCTED EMISSION TEST	16
	6.1.	Standard Applicable	16
	6.2.	Measurement Equipment Used	16
	6.3.	EUT Setup	16
	6.4.	Test SET-UP (Block Diagram of Configuration)	17
	6.5.	Measurement Procedure	17
	6.6.	Measurement Result	17
7.	PEA	COUTPUT POWER MEASUREMENT	20
	7.1.	Standard Applicable	20
	7.2.	Measurement Equipment Used	20
	7.3.	Test Set-up:	20
	7.4.	Measurement Procedure:	20
	7.5.	Measurement Result	21



FCC ID: 07N-SIME-G3

8.	20dB	BANDWIDTH MEASUREMENT	. 22
	8.1.	Standard Applicable	. 22
	8.2.	Measurement Equipment Used	. 22
	8.3.	Test Set-up	. 22
	8.4.	Measurement Procedure	. 22
	8.5.	Measurement Result	. 23
9.	CON	DUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT	. 29
	9.1.	Standard Applicable	. 29
	9.2.	Measurement Equipment Used	. 29
	9.3.	Test SET-UP	. 29
	9.4.	Measurement Procedure	. 30
	9.5.	Measurement Result	. 30
10.	RADI	ATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT	. 36
	10.1.	Standard Applicable	. 36
	10.2.	Measurement Equipment Used	. 37
	10.3.	Test SET-UP	. 38
	10.4.	Measurement Procedure	. 39
	10.5.	Field Strength Calculation	. 40
	10.6.	Test Results of Radiated Spurious Emissions form 9 KHz to 30 MHz	. 40
	10.7.	Measurement Result	. 40
11.	FREG	UENCY SEPARATION	. 57
	11.1.	Standard Applicable	. 57
	11.2.	Measurement Equipment Used	. 57
	11.3.	Test Set-up	. 57
	11.4.	Measurement Procedure	. 57
	11.5.	Measurement Result	. 58
12.	NUME	BER OF HOPPING FREQUENCY	. 59
	12.1.	Standard Applicable	. 59
	12.2.	Measurement Equipment Used	. 59
	12.3.	Test Set-up	. 59
	12.4.	Measurement Procedure	. 59
	12.5.	Measurement Result	. 59



FCC ID: 07N-SIME-G3

13.	TIME	OF OCCUPANCY (DWELL TIME)	61
	13.1.	Standard Applicable	61
	13.2.	Measurement Equipment Used	61
	13.3.	Test Set-up	61
	13.4.	Measurement Procedure	62
	13.5.	Tabular Result of the Measurement	63
	13.6.	Measurement Result	65
14.		NNA REQUIREMENT	
	14.1.	Standard Applicable	75
	14.2.	Antenna Connected Construction	75
15.	RF EX	XPOSURE	
	15.1.	Standard Applicable:	76
	15.2.	Measurement Result:	



GENERAL INFORMATION 1.

1.1. Product description

General:

	<u></u>		
Product Name:	SiME Smart Glasses		
Brand Name:	ChipSiP		
Model No.:	SiME G3		
Model Difference:	N/A		
USB Cable:		.: KL-JJ1412-16-01, SHENZHEN JIN LAI ELECTRONIC CO.,LTD.	
Simple Hands-Free:	Model No	.: CBX-05AB-08, Supplier: NGT	
Product SW/HW version:	N/A / C		
Radio SW/HW version:	N/A / N/A		
Test SW Version:	N/A		
RF power setting in TEST SW:	N/A		
	3.7Vdc Re	echarging Battery and 5Vdc AC/DC Adapter.	
Power Supply:	Battery:	Model No.: H701553, Supplier: Power Source Energy Co., Ltd.	
	Adapter:	Model No.: HSWF0501000C, Supplier: DVE	

Bluetooth_BR+EDR:

Bluetooth Version:	V4.0 dual mode+EDR
Channel number:	79 channels
Modulation type:	Frequency Hopping Spread Spectrum
Transmit Power:	-3.79dBm
Frequency Range:	2.402GHz – 2.480GHz
Dwell Time:	<= 0.4s
Antenna Designation:	Coaxial antenna, Gain: 2.27dBi



1.2. Product Feature of Equipment Under Test

The equipment under Test (Hereafter Called: EUT) is Smart Glasses supporting, Wi-Fi 802.11bgn, Bluetooth and GPS features, and below is details of information.

Product Feature		
Product Name:	SiME Smart Glasses	
Brand Name:	ChipSiP	
Model No.:	SiME G3	
Model Difference:	N/A	
FCC ID:	O7N-SIME-G3	
Wi-Fi Specification	802.11b/g/n	
Bluetooth Version	V4.0 dual mode	

Note: The above EUT information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.3. Test Methodology of Applied Standards

FCC Part 15, Subpart C §15.247 FCC Public Notice DA 00-705 Measurement Guidelines ANSI C63.10:2013

Note:

- 1. All test items have been performed and record as per the above standards.
- The composite system is compliance with FCC Subpart B is authorized under 2. a DoC procedure.

1.4. Test Facility

SGS Taiwan Ltd. Electronics & Communication Laboratory No.2, Keji 1st Rd., Guishan District, Taoyuan City, Taiwan. (TAF code 0513)

FCC Registration Numbers are: 628985

1.5. Special Accessories

There is no special accessory used while test was conducted.

1.6. Equipment Modifications

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms</u>. At the time of itability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



2. SYSTEM TEST CONFIGURATION

2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2. EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

2.3. Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plan. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz,. The CISPR Quasi-Peak and Average detector mode is employed according to §15.207. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plan. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

2.4. Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuation factor between EUT conducted port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly EUT RF output level.

Note:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor. Following shows an offset computation example with cable loss 1.2dB and splitter 0dB splitter. Offset = RF cable loss (dB)+ splitter(dB) = 1.2 + 0 = 1.2(dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

Chiles Soliter Was Stated the locate a network in the locat report for only to the anapped, back and solity in the locate and solity in the loca tronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is frawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



2.5. Configuration of Tested System

Fig. 2-1 Radiated, Conducted (Antenna Port) Emission



Fig. 2-2 AC Power Line Conducted Emission

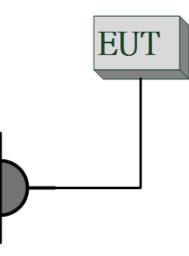


Table 2-1 Equipment Used in Tested System

ltem	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1.	BT Test Software	N/A	N/A	N/A	N/A	N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised any the protective at the transaction from exercising all their rights and obligations under the transaction documents is unaver a period to the company. Any unauthorized alteration, forgery or falsification of the content or ap-tervent is unaverlated and definders may be protected to the fully extent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



3. SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§15.207(a)	AC Power Line Conducted Emission	Compliant
§15.247(b)(1)	Peak Output Power	Compliant
§15.247(a)(1)	20dB & 99% Bandwidth	Compliant
§15.247(d)	Conducted Band Edge and Spurious Emission	Compliant
§15.247(d)	Radiated Band Edge and Spurious Emission	Compliant
§15.247(a)(1)	Frequency Separation	Compliant
§15.247(a)(1)(iii)	Number of hopping frequency	Compliant
§15.247(a)(1)(iii)	Time of Occupancy	Compliant
§15.203 §15.247(b)	Antenna Requirement	Compliant

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised any the protective at the transaction from exercising all their rights and obligations under the transaction documents is unaver a period to the company. Any unauthorized alteration, forgery or falsification of the content or ap-tervent is unaverlated and definders may be protected to the fully extent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



4. DESCRIPTION OF TEST MODES

4.1. Operated in 2400 ~ 2483.5MHz Band

79 channels are provided for Bluetooth

СН	FREQUENCY	СН	FREQUENCY	СН	FREQUENCY	СН	FREQUENCY
0	2402 MHz	20	2422 MHz	40	2442 MHz	70	2462 MHz
1	2403 MHz	21	2423 MHz	41	2443 MHz	71	2463 MHz
2	2404 MHz	22	2424 MHz	42	2444 MHz	72	2464 MHz
3	2405 MHz	23	2425 MHz	43	2445 MHz	73	2465 MHz
4	2406 MHz	24	2426 MHz	44	2446 MHz	74	2466 MHz
5	2407 MHz	25	2427 MHz	45	2447 MHz	75	2467 MHz
6	2408 MHz	26	2428 MHz	46	2448 MHz	76	2468 MHz
7	2409 MHz	27	2429 MHz	47	2449 MHz	77	2469 MHz
8	2410 MHz	28	2430 MHz	48	2450 MHz	78	2470 MHz
9	2411 MHz	29	2431 MHz	49	2451 MHz	79	2471 MHz
10	2412 MHz	30	2432 MHz	50	2452 MHz	70	2472 MHz
11	2413 MHz	31	2433 MHz	51	2453 MHz	71	2473 MHz
12	2414 MHz	32	2434 MHz	52	2454 MHz	72	2474 MHz
13	2415 MHz	33	2435 MHz	53	2455 MHz	73	2475 MHz
14	2416 MHz	34	2436 MHz	54	2456 MHz	74	2476 MHz
15	2417 MHz	35	2437 MHz	55	2457 MHz	75	2477 MHz
16	2418 MHz	36	2438 MHz	56	2458 MHz	76	2478 MHz
17	2419 MHz	37	2439 MHz	57	2459 MHz	77	2479 MHz
18	2420 MHz	38	2440 MHz	58	2460 MHz	78	2480 MHz
19	2421 MHz	39	2441 MHz	59	2461 MHz		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised any the protective at the transaction from exercising all their rights and obligations under the transaction documents is unaver a period to the company. Any unauthorized alteration, forgery or falsification of the content or ap-tervent is unaverlated and definders may be protected to the fully extent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



4.2. The Worst Test Modes and Channel Details

- The EUT has been tested under operating condition.
- Test program used to control the EUT for staying in continuous transmitting and receiving 2 mode is programmed.
- Investigation has been done on all the possible configurations for searching the worst 3 case.

RADIATED EMISSION TEST:

RADIATED EMISSION TEST (BELOW 1 GHz)									
MODE	AVAILABLE	TESTED	MODULATION	PACKET	ANTENNA				
	CHANNEL	CHANNEL	MODULATION	TYPE	PORT				
Bluetooth	0 to 78	0,39,78	GFSK	DH5	MAIN				
	RADIAT	ED EMISSION	TEST (ABOVE 1	GHz)					
MODE	AVAILABLE TESTED		MODULATION	PACKET	ANTENNA				
IVIODE	CHANNEL	CHANNEL	WODULATION	TYPE	PORT				
Bluetooth	0 to 78	0,39,78	GFSK	DH5	MAIN				

Note:

The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for Bluetooth BR+EDR Transmitter for channel Low, Mid and High, the worst case E2 position was reported.

ANTENNA PORT CONDUCTED MEASUREMENT:

CONDUCTED TEST										
Peak Output Power, 20dB Band Width										
MODE	AVAILABLE	TESTED	MODULATION	PACKET	ANTENNA					
MODE	CHANNEL	CHANNEL	NODULATION	TYPE	PORT					
	0 to 78	0,39,78	GFSK	DH5	MAIN					
Bluetooth	0 to 78	0,39,78	π/4-DQPSK	DH5	MAIN					
	0 to 78	0,39,78	8-DQPK	DH5	MAIN					
	Band Edge									
Bluetooth 0 to 78		0,78	0,78 GFSK		MAIN					
		Frequency	Separation							
Bluetooth	0 to 78	0,1,2	GFSK	DH5	MAIN					
	N	lumber of hopp	bing frequency							
Bluetooth	0 to 78	0 to 78	GFSK	DH5	MAIN					
	Ti	me of Occupar	ncy (Dwell time)							
Bluetooth	0 to 78	0,39,78	GFSK	DH1/DH3/DH5	MAIN					
Bluetooth	0 to 78	39	π/4-DQPSK	DH1/DH3/DH5	MAIN					
Bluetooth	0 to 78	39	8-DPSK	DH1/DH3/DH5	MAIN					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留卯天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



5. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty			
AC Power Line Conducted Emis- sion	+/- 2.586 dB			
Peak Output Power	+/- 0.84 dB			
20dB Bandwidth	+/- 51.33 Hz			
100 KHz Bandwidth Of Frequency Band Edges	+/- 0.84 dB			
Frequency Separation	+/- 51.33 Hz			
Number of hopping frequency	+/- 51.33 Hz			
Time of Occupancy	+/- 51.33 Hz			
Temperature	+/- 0.65 °C			
Humidity	+/- 4.6 %			
DC / AC Power Source	DC= +/- 0.13%, AC= +/- 0.2%			

Radiated Spurious Emission:

Measurement uncertainty (Polarization : Vertical)	30MHz - 180MHz: +/- 3.37dB
	180MHz -417MHz: +/- 3.19dB
	0.417GHz-1GHz: +/- 3.19dB
	1GHz - 18GHz: +/- 4.04dB
	18GHz - 40GHz: +/- 4.04dB

Measurement uncertainty (Polarization : Horizontal)	30MHz - 167MHz: +/- 4.22dB
	167MHz -500MHz: +/- 3.44dB
	0.5GHz-1GHz: +/- 3.39dB
	1GHz - 18GHz: +/- 4.08dB
	18GHz - 40GHz: +/- 4.08dB

This uncertainty represents an expanded uncertainty expressed at approximately the

95% confidence level using a coverage factor of k=2.



CONDUCTED EMISSION TEST 6.

6.1. Standard Applicable

Frequency within 150 kHz to 30MHz shall not exceed the limit table as below.

Frequency range	Limits dB(uV)				
MHz	Quasi-peak	Average			
0.15 to 0.50	66 to 56	56 to 46			
0.50 to 5	56	46			
5 to 30	60	50			
Noto					

Note

1. The lower limit shall apply at the transition frequencies

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

6.2. Measurement Equipment Used

Conducted Emission Test Site										
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.					
ТҮРЕ		NUMBER	NUMBER	CAL.						
EMI Test Receiver	R&S	ESCI 7	100950	12/12/2014	12/11/2015					
Coaxial Cables	N/A	N30N30-1042-150c m	N/A	01/06/2015	01/07/2016					
LISN	Schwarzbeck	NSLK 8127	8127-648	06/09/2015	06/08/2016					
LISN	Rolf-Heine	NNB-2/16Z	99012	03/04/2015	03/03/2016					
Test Software	Farad	EZ-EMC	Ver. SGS-03A2	N.C.R.	N.C.R.					

6.3. EUT Setup


- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI 63.10:2013.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

WeifS of all weights and the results and state the four result of the state of th Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



6.4. Test SET-UP (Block Diagram of Configuration)

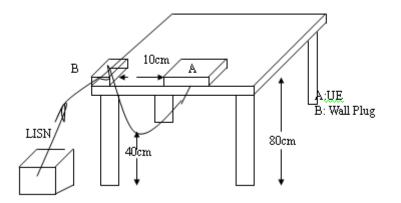

6.5. Measurement Procedure

- 1. The EUT was placed on a table which is 0.8m above ground plan.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured were complete.

6.6. Measurement Result

Note: Refer to next page for measurement data and plots. Note2: The * reveals the worst-case results that closet to the limit

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


たかうかすが、いれてきる本体的の意味がある。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode:	Operation mode		Test Date:	Aug. 26, 2015	
Temperature:	26	Humidity:	54 %	Test By:	Aken
				Phase:	L1 / N

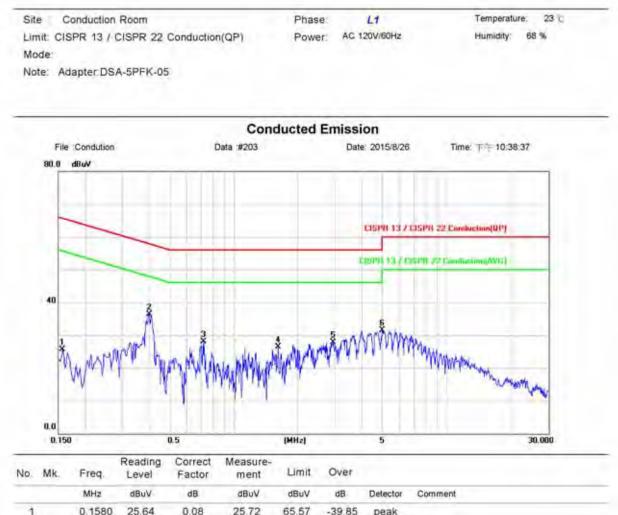

1	0.1580	25.64	0.08	25.72	65.57	-39.85	peak
2 *	0.4020	36.21	0.17	36.38	57.81	-21.43	peak
3	0.7260	27.75	0.32	28.07	56 00	-27.93	peak
4	1.6180	25.95	0.51	26.46	56.00	-29.54	peak
5	2.9380	27.39	0.59	27.98	56.00	-28.02	peak
6	4.9980	30.86	0.62	31.48	56.00	-24.52	peak

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

WeikBS otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are relative for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



23 0

Site Conduction Room Phase: N Temperature: AC 120V/BOHz Humidity: 68 % Limit: CISPR 13 / CISPR 22 Conduction(QP) Power: Mode: Note: Adapter DSA-5PFK-05 **Conducted Emission** Data #204 Date: 2015/8/26 File :Condution Time: 17 + 10:39:35 80.0 dBuV CISPR 13 / CISPR 22 Conduction[0P] 101012-0111-0111-0110 40 WAR WAR Willy. 0.0 0.150 0.5 (MHz) 5 30.000

No. MR.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
	MHz	dBuV	dB.	dBuV	dBuV	dB	Detector	Comment
1	0.2220	28.75	0.14	28.89	62.74	-33.85	peak	
2 *	0.4100	34.59	0.22	34.81	57.65	-22.84	peak	
3	0.6260	25.63	0.31	25.94	56.00	-30.06	peak	
4	1.5420	23.74	0.56	24.30	56.00	-31.70	peak	
5	2.6340	26.45	0.64	27.09	56.00	-28.91	peak	
6	5.0700	28.54	0.67	29.21	60.00	-30.79	peak	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised any the protective at the transaction from exercising all their rights and obligations under the transaction documents is unaver a period to the company. Any unauthorized alteration, forgery or falsification of the content or ap-tervent is unaverlated and definders may be protected to the fully extent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



7. PEAK OUTPUT POWER MEASUREMENT


7.1. Standard Applicable

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, The Limit: 1Watt. For all other frequency hopping systems in the 2400 – 2483.5MHz band: The Limit: 0.125 Watts. The power limit for 1Mbps is 1watt, and 2Mbps, 3Mbps and AFH mode are 0.125 watts.

Conducted Emission Test Site										
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.					
TYPE		NUMBER	NUMBER	CAL.						
Spectrum Analyzer	Agilent	N9010A	MY53400256	10/15/2014	10/14/2015					
Power Meter	Anritsu	ML2496A	1326001	06/23/2015	06/22/2016					
Power Sensor	Anritsu	MA2411B	1315048	06/23/2015	06/22/2016					
Power Sensor	Anritsu	MA2411B	1315049	06/23/2015	06/22/2016					
Coaxial Cable 30cm	WOKEN	00100A1F1A195 C	RF01	12/19/2014	12/18/2015					
DC Block	PASTERNACK	PE8210	RF29	12/19/2014	12/18/2015					
Splitter	RF-LAMBAD	RFLT2W1G18G	RF35	12/19/2014	12/18/2015					
Attenuator	WOKEN	218FS-10	RF23	12/19/2014	12/18/2015					
DC Power Supply	Agilent	E3640A	MY53140006	05/04/2015	05/03/2016					

7.2. Measurement Equipment Used

7.3. Test Set-up:



7.4. Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter or spectrum. (Max Hold, Detector = Peak, RBW >=20dB bandwidth)
- 4. Record the max. reading.
- 5. Repeat above procedures until all default test channel is completed.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document is unlawful and offenders may be prosecuted to the fullest extent of the law.



7.5. Measurement Result

1M BR mode:

Channel	Frequency (MHz)	Output Power (dBm)	Output Power	Limit (mW)
0	2402.00	-3.79	0.41783	1000
39	2441.00	-3.98	0.39994	1000
78	2480.00	-4.32	0.36983	1000

2M EDR mode:

Channel	Frequency	Output Power	Output	Limit
Channel	(MHz)	(dBm)	Power	(mW)
0	2402.00	-3.85	0.41210	125
39	2441.00	-3.98	0.39994	125
78	2480.00	-4.38	0.36475	125

3M EDR mode:

Channel	Frequency	Output Power	Output	Limit
Charmer	(MHz)	(dBm)	Power	(mW)
0	2402.00	-3.88	0.40926	125
39	2441.00	-3.99	0.39902	125
78	2480.00	-4.41	0.36224	125

NOTE: cable loss as 1.2dB that offsets in the spectrum

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised that information contaited extend of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-tervent is unaviated and defined mergins and the proposed of the formation contaited the fulle at tervent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



8. 20dB BANDWIDTH MEASUREMENT


8.1. Standard Applicable

For frequency hopping systems operating in the 2400MHz-2483.5 MHz no limit for 20dB bandwidth.

8.2. Measurement Equipment Used

Conducted Emission Test Site						
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.	
TYPE		NUMBER	NUMBER	CAL.		
Spectrum Analyzer	Agilent	N9010A	MY53400256	10/15/2014	10/14/2015	
DC Block	PASTERNACK	PE8210	RF29	12/19/2014	12/18/2015	
Splitter	RF-LAMBAD	RFLT2W1G18 G	RF35	12/19/2014	12/18/2015	
Attenuator	WOKEN	218FS-10	RF23	12/19/2014	12/18/2015	

8.3. Test Set-up



8.4. Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- Set the spectrum analyzer as RBW=10 kHz (1 % of 20 dB Bandwidth.), VBW = 30 kHz, Span= 3MHz, Sweep=auto, Detector = Peak, and Max hold for 20dB Bandwidth test.
- 5. Mark the peak frequency and –20dB (upper and lower) frequency
- 6. Repeat above procedures until all test default channel is completed

NOTE:

- 1. cable loss as 1.2dB that offsets in the spectrum
- 2. For the plot of bandwidth measurement, the marker of the 20dB BW is arrow-mark

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



8.5. Measurement Result

	GFSK					
Channel	Frequency (MHz)	20 dB Bandwidth (MHz)				
0	2402	0.87				
39	2441	0.92				
78	2480	0.83				

π/4-DQPSK


Channel	Channel	20 dB Bandwidth (MHz)	2/3 Bandwidth
0	2402	1.26	0.84
39	2441	1.18	0.79
78	2480	1.33	0.89

8-DPSK


Channel	Channel	20 dB Bandwidth (MHz)	2/3 Bandwidth
0	2402	1.27	0.85
39	2441	1.26	0.84
78	2480	1.33	0.89



20dB Band Width Test Data CH-Low (GFSK mode)

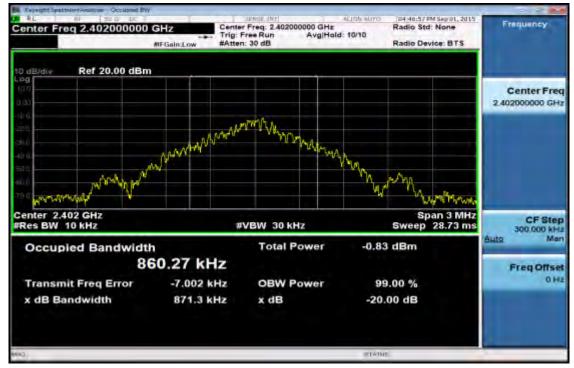

20dB Band Width Test Data CH-Mid (GFSK mode)

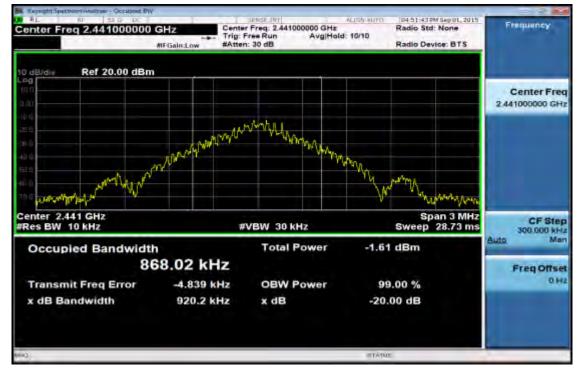


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Weif So that we stated the results and the state of the Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



20dB Band Width Test Data CH-High (GFSK mode)

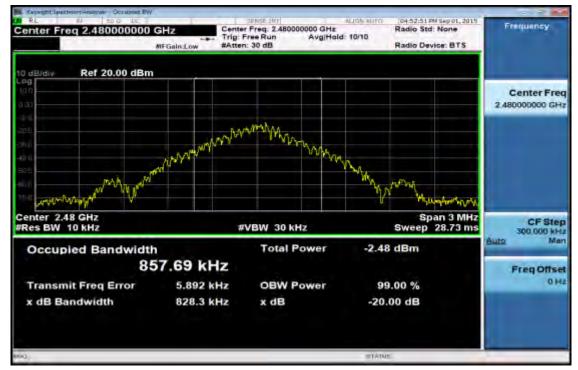

20dB Band Width Test Data CH-Low (π/4-DQPSK mode)

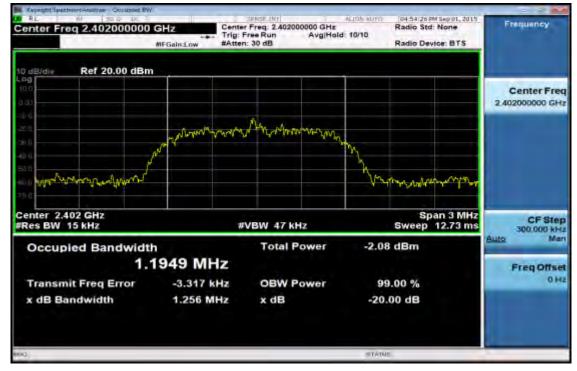

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are relatined to so days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



20dB Band Width Test Data CH-Mid (π/4-DQPSK mode)

RI Center Freq: 2.441000000 GHz Trig: Free Run AvgiHol #Atten: 30 dB Radio Std: None Center Freq 2.441000000 GHz Frequency Avg/Hold: 10/10 MFGain:Low Radio Device: BTS Ref 20.00 dBm 0 dB/div Center Fred 2 441000000 GHz for the market of alman all a section of the section of a Center 2.441 GHz #Res BW 15 kHz Span 3 MHz Sweep 12.73 ms **CF** Step #VBW 47 kHz 300.000 kH Occupied Bandwidth **Total Power** -3.45 dBm 1.2139 MHz Freq Offset OH Transmit Freq Error 3.496 kHz **OBW Power** 99.00 % x dB Bandwidth 1.182 MHz x dB -20.00 dB

20dB Band Width Test Data CH-High (π/4-DQPSK mode)

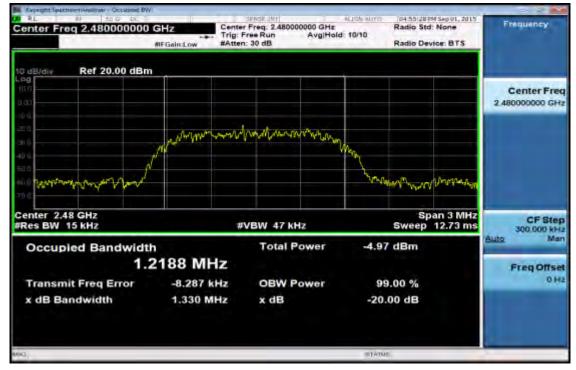


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are relatined to so days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



20dB Band Width Test Data CH-Low (8-DPSK mode)

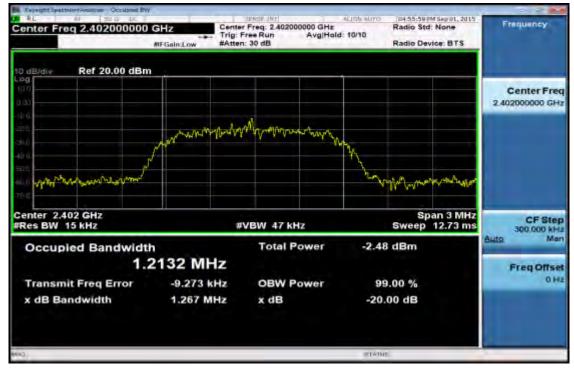

20dB Band Width Test Data CH-Mid (8-DPSK mode)

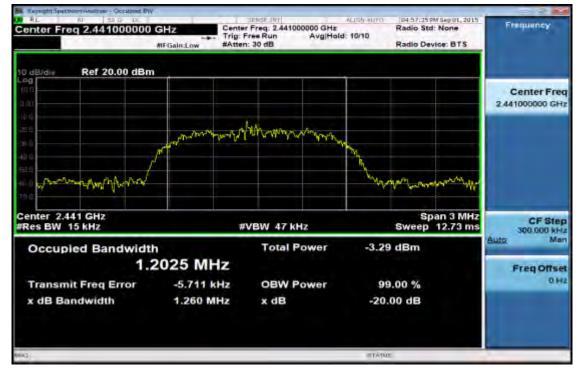


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are relatined to so days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



20dB Width Test Data CH-High (8-DPSK mode)

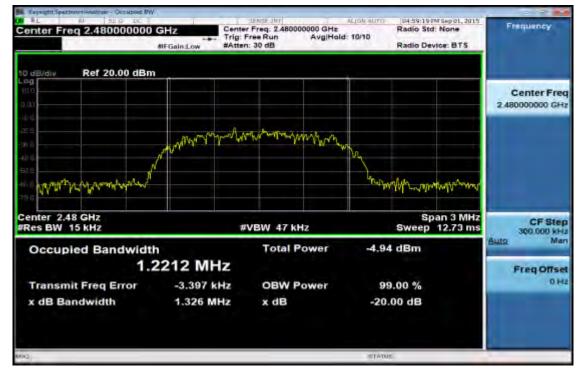

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-

pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



9. CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT


9.1. Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

9.2. Measurement Equipment Used

Conducted Emission Test Site						
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.	
TYPE		NUMBER	NUMBER	CAL.		
Spectrum Analyzer	Agilent	N9010A	MY53400256	10/15/2014	10/14/2015	
DC Block	PASTERNACK	PE8210	RF29	12/19/2014	12/18/2015	
Splitter	RF-LAMBAD	RFLT2W1G18 G	RF35	12/19/2014	12/18/2015	
Attenuator	WOKEN	218FS-10	RF23	12/19/2014	12/18/2015	

9.3. Test SET-UP



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



9.4. Measurement Procedure

Conducted Band Edge:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set center frequency of spectrum analyzer = operating frequency.
- 5. Set the spectrum analyzer as RBW=100 kHz, VBW=300 kHz, Sweep = auto
- 6. Mark Peak, 2.3999GHz and 2.4836GHz and record the max. level.
- 7. Repeat above procedures until all frequency measured were complete.

Conducted Spurious Emission:

- 1. To connect Antenna Port of EUT to Spectrum.
- 2. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
- 3. Set RBW = 100 kHz & VBW = 300 kHz, Detector =Peak, Sweep = Auto
- 4. Allow trace to fully stabilize.
- 5. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
- 6. Repeat above procedures until all default test channel measured were complete.

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

9.5. Measurement Result

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

- 1. Cable loss as 1.2dB that offsets in the spectrum
- 2. The occurrence of the spike on the conducted emission is the signal of the fundamental emission.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Band Edges Test Data CH-Low (Hopping mode)

Keyenghit Spectrommenunger - Skept SA					10.00
Center Freq 2.365000000	PMD: East ()	Trig: Free Run #Atten: 30 dB	Avg Type: Log-Pwr	C5:03:55 FM Septel, 2015 TRACE 1 2 4 4 TYPE PLANAGE	Frequency
Ref Offset 1.2 dB 10 dB/div Ref 20.00 dBm	Posin,Low	Artiter: ov up	Mk	-4.83 dBm	Auto Tun
1001 non 				1 640030A0040A0A0A0	Center Free 2.365000000 GH
20 0 50 0 40 0				Abraka@200	Start Fre 2.310000000 GH
ED 0 ED 0 of monotonic transferred armani- 70 0		an a		-1 ²	Stop Fre 2.42000000 GH
Start 2.31000 GHz Res BW 100 kHz	#VBW 3	00 kHz	Sweep	Stop 2.42000 GHz 10.53 ms (1001 pts)	CF Ste 11.000000 MH
WR MODE TRC SOL X	11 09 GHz	9 FL -4,83 dBm	NCTION FUNCTION WIBTH	FUNCTION VALUE	Charles Inte
2 N 1 f 2,39 3 N 1 f 2,39 4 5 6 6	99 90 GHz	-61.25 dBm -61.40 dBm			Freq Offse 0 H
7 8 9 10 11					
(<i>La</i>			STATU	is in the second s	

Band Edges Test Data CH-High




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are relatined to so days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Band Edges Test Data CH-Low (Non-Hopping mode)

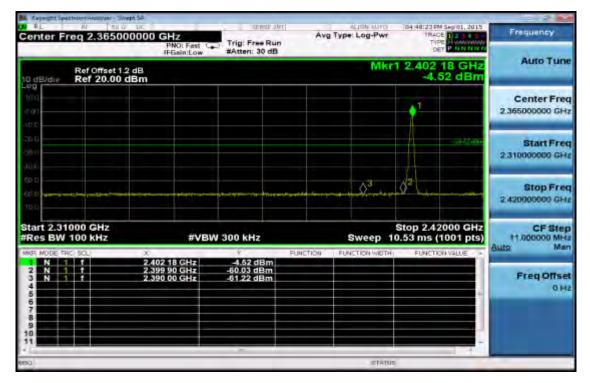

Band Edges Test Data CH-High

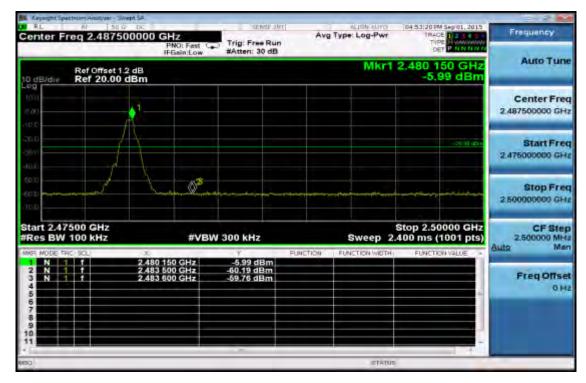


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are relatined to so days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Conducted Spurious Emission Measurement Result Ch Low 30MHz – 3GHz

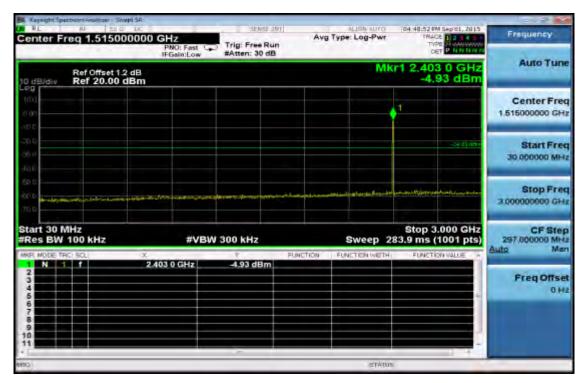


Ch Low 3GHz – 26.5GHz

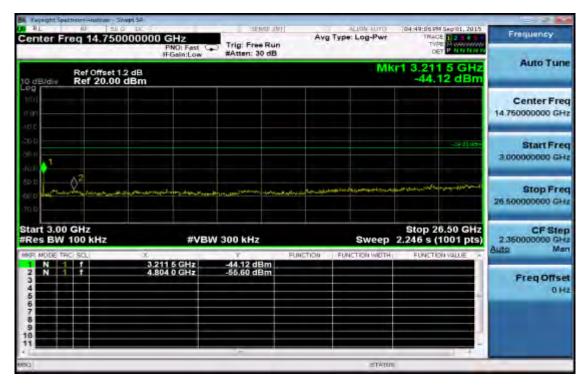


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Ch Mid 30MHz – 3GHz

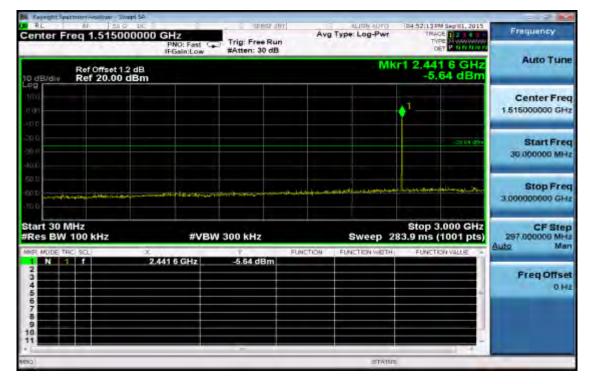

Ch Mid 3GHz – 26.5GHz

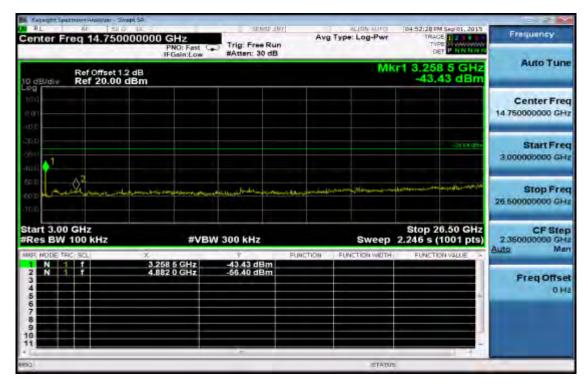


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are relatined to so days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Ch High 30MHz – 3GHz

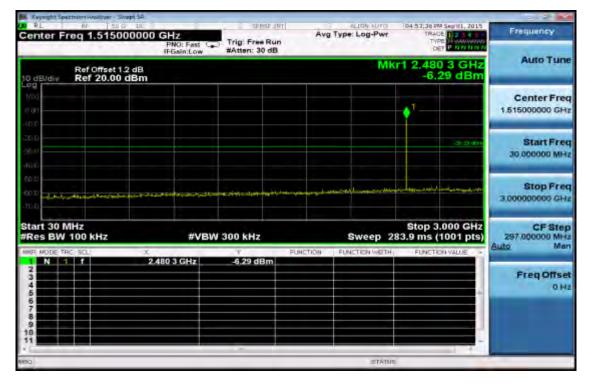

Ch High 3GHz – 26.5GHz

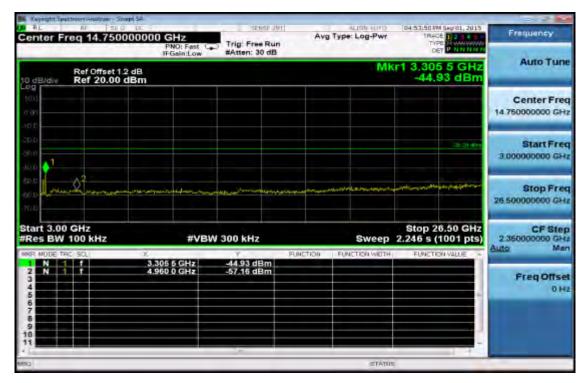

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are relatined to so days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



10. RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT

10.1. Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands must also comply with the §15.209 limit as below.

And according to §15.33(a) (1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

Frequency (MHz)	Field strength (microvolts/meter)	Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

- 1. The lower limit shall apply at the transition frequencies.
- 2. Emission level ($dB\mu V/m$) = 20 log Emission level ($dB\mu V/m$)

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



10.2. Measurement Equipment Used


966 Chamber						
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.	
TYPE		NUMBER	NUMBER	CAL.		
EMI Test Receiver	R&S	ESU 40	100363	04/09/2015	04/08/2016	
Loop Antenna	ETS-Lindgren	6502	00143303	12/09/2014	12/08/2015	
Broadband Antenna	TESEQ	CBL 6112D	35240	12/05/2014	12/04/2015	
Horn Antenna	ETS-Lindgren	3117	00143272	12/08/2014	12/07/2015	
Horn Antenna	ETS-Lindgren	3160-09	00117911	11/13/2014	11/12/2015	
Horn Antenna	ETS-Lindgren	3160-10	00117783	11/13/2014	11/12/2015	
Pre Amplifier	EMC Instruments	EMC330	980096	12/19/2014	12/18/2015	
Pre Amplifier	EMC Instruments	EMC0011830	980199	12/19/2014	12/18/2015	
Pre Amplifier	R&S	SCU-18	10204	12/19/2014	12/18/2015	
Pre Amplifier	R&S	SCU-26	100780	12/19/2014	12/18/2015	
Coaxial Cable	Huber+Suhner	RG 214/U	966Rx 9K-30M	12/19/2014	12/18/2015	
Coaxial Cable	Huber+Suhner	RG 214/U SUCOFLEX 104	966Rx 30M-3G	12/19/2014	12/18/2015	
Coaxial Cable	Huber+Suhner	SUCOFLEX 104	966Rx 1G-18G	12/19/2014	12/18/2015	
Coaxial Cable	Huber+Suhner	mini 141-12 SUCOFLEX 104	966Rx 18G-40G	12/19/2014	12/18/2015	
Coaxial Cable	Huber+Suhner	SUCOFLEX 104	966Tx 30M-18G	12/19/2014	12/18/2015	
Coaxial Cable	Huber+Suhner	SUCOFLEX 102	966Tx 18G-40G	12/19/2014	12/18/2015	
Attenuator	WOKEN	218FS-10	RF27	12/19/2014	12/18/2015	
Site NSA	SGS	966 Chamber C	SAC-C	03/04/2015	03/03/2016	
Site VSWR	SGS	966 Chamber C	SAC-C	03/04/2015	03/03/2016	
DC Power Supply	HOLA	DP-3003	D7070035	05/04/2015	05/03/2016	
Controller	MF	MF-7802	N/A	N.C.R.	N.C.R.	
Antenna Master	MF	N/A	N/A	N.C.R.	N.C.R.	
Turn Table	MF	N/A	N/A	N.C.R.	N.C.R.	
Test Software	World-Pallas	Dr. E	V 3.0 Lite	N.C.R.	N.C.R.	

NOTE: N.C.R refers to Not Calibrated Required.




10.3. Test SET-UP


(A) Radiated Emission Test Set-UP Frequency Below 30MHz.

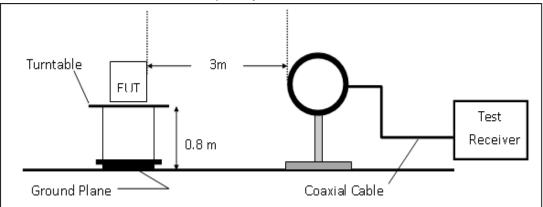

(B) Radiated Emission Test Set-Up, Frequency form 30MHz to 1000MHz

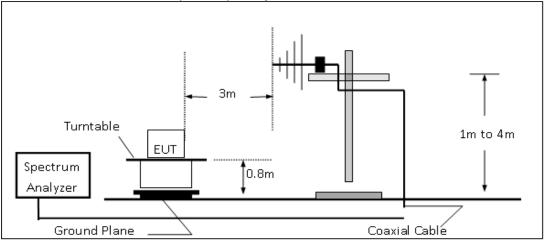

(C) Radiated Emission Test Set-UP Frequency Over 1 GHz

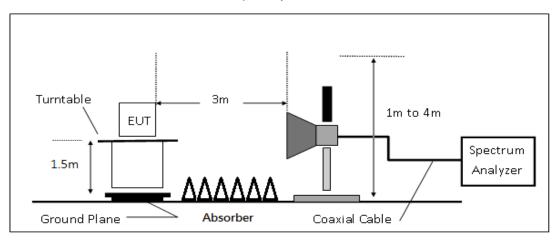

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

S Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



10.4. Measurement Procedure

Radiated Emission

- 1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
- 2. The EUT was placed on a turn table with 0.8m for frequency< 1GHz and 0.8m for frequency> 1GHz above ground plan.
- 3. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 4. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 5. Use the follow spectrum analyzer setting:
 - (1) Span = wide enough to fully capture the emission being measured
 - (2) RBW = 1 MHz for $f \ge 1$ GHz, 100 kHz for f < 1 GHz, VBW \ge RBW, Sweep = auto, Detector function = peak, Trace = max hold
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c) Duty Cycle = On time/100 milliseconds On time = N1*L1=N2*L2+...+N(n-1)*LN(n-1)+N(n)*L(n)Where N1 is number of type 1 pulses, L1 is length of type 1 pulses, etc. Average Emission Level = Peak Emission Level + 20*log (duty Cycle)
- 6. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 7. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 8. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 9. Repeat above procedures until all frequency of the interest measured were complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Chiles Soliter Was Stated und locate a notation in the locat report for only for a manality is been under the locate and locate is the locate and tronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is frawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



10.5. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

The limit of the emission level is expressed in dBuV/m, which converts 20*log(uV/m)

Actual FS(dB μ V/m) = SPA. Reading level(dB μ V) + Factor(dB)

Factor(dB) = Antenna Factor(dBµV/m) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

Note :

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

10.6. Test Results of Radiated Spurious Emissions form 9 KHz to 30 MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit per 15.31(o) was not reported.

10.7. Measurement Result

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

たかうかすが、いれてきる本体的の意味がある。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Radiated Band Edge Measurement Result: (Hopping Mode)

Operation Mod Fundamental Operation Bar	Frequency :	2402 MHz BE CH LOW		Test Date : Temp. / Humi. : Test Engineer : Measurement Antenna Pol. :			2402 MHz Temp. / Humi. : BE CH LOW Test Engineer :		Ashton	6 _C/67RH
EUT Pol. :		E2	_				Vertical			
Freq.	Note	Detector Mode	Spect Reading		Factor	Actual FS	Limit @3m	Margin		
MHz	F/H/E/S	PK/QP/AV	dBµ	V	dB	dBµV/m	dBµV/m	dB		
2390.00	Е	Peak	45.3	6	6.62	51.98	74	-22.02		
2390.00	Е	Average	33.3	32	6.62	39.94	54	-14.06		

Operation Mode :	BT BR Hopping	Test Date :	2015/8/26
Fundamental Frequency:	2402 MHz	Temp. / Humi. :	21.3deg_C/67RH
Operation Band :	BE CH LOW	Test Engineer :	Ashton
EUT Pol. :	E2	Measurement Antenna Pol. :	Horizontal

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	E	Peak	43.88	6.62	50.49	74	-23.51
2390.00	Е	Average	33.35	6.62	39.97	54	-14.03



Report No.: E2/2015/30085 Issue Date: Sep.10, 2015 Page 42 of 77

Operation Mode :	BT BR Hopping	Test Date :	2015/8/26
Fundamental Frequency:	2480 MHz	Temp. / Humi. :	21.3deg_C/67RH
Operation Band :	BE CH HIGH	Test Engineer :	Ashton
EUT Pol. :	E2	Measurement Antenna Pol. :	Vertical

Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	E	Peak	51.69	6.96	58.66	74	-15.34
2483.50	Е	Average	34.11	6.96	41.07	54	-12.93

Operation Mode :	BT BR Hopping	Test Date :	2015/8/26
Fundamental Frequency:	2480 MHz	Temp. / Humi. :	21.3deg_C/67RH
Operation Band :	BE CH HIGH	Test Engineer :	Ashton
EUT Pol. :	E2	Measurement Antenna Pol. :	Horizontal

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Е	Peak	50.80	6.96	57.77	74	-16.23
2483.50	Е	Average	35.49	6.96	42.45	54	-11.55



10.6.2 Radiated Emission – Band Edge (Non-Hopping Mode):

Operation Mode :	BT BR	Test Date :	2015/8/26
Fundamental Frequency:	2402 MHz	Temp. / Humi. :	21.3deg_C/67RH
Operation Band :	BE CH LOW	Test Engineer :	Ashton
EUT Pol. :	E2	Measurement Antenna Pol.:	Vertical

Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	E	Peak	45.13	6.62	51.74	74	-22.26
2390.00	Е	Average	33.33	6.62	39.95	54	-14.05

Operation Mode :	BT BR	Test Date :	2015/8/26
Fundamental Frequency:	2402 MHz	Temp. / Humi. :	21.3deg_C/67RH
Operation Band :	BE CH LOW	Test Engineer :	Ashton
EUT Pol. :	E2	Measurement Antenna Pol.:	Horizontal

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	E	Peak	46.68	6.62	53.30	74	-20.70
2390.00	Е	Average	33.38	6.62	40.00	54	-14.00



2483.50

2483.50

Е

Е

FCC ID: 07N-SIME-G3

Report No.: E2/2015/30085 Issue Date: Sep.10, 2015 Page 44 of 77

Operation M Fundamenta Operation Ba EUT Pol. :	l Frequency	BT BR : 2480 MI BE CH I E2		Test Date : Temp. / Humi. : H Test Engineer : Measurement Antenna Pol. :			2015/8/26 21.3deg_C/67RH Ashton Vertical	
Freq.	Note	Detector Mode	•	ectum ng Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV		BμV	dB	dBµV/m	dBµV/m	dB
2483.50	E	Peak		2.22	6.96	59.19	74	-14.81
2483.50	Е	Average		1.39	6.96	51.35	54	-2.65
							00 / F /0 /00	
Operation M		BT BR		Test Date			2015/8/26	
Fundamenta Operation Ba		: 2480 MI BE CH I		Temp. / H Test Eng			21.3deg_0 Ashton	J/0/ KH
EUT Pol. :		E2	IIIGII	•	ment Anter	na Pol·	Horizontal	
Freq.	Note	Detector Mode	Readir	ectum ng Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dE	BμV	dB	dBµV/m	dBµV/m	dB

52.02

44.08

Peak

Average

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised any the protective at the transaction from exercising all their rights and obligations under the transaction documents is unavity and offenders may be protected to the fulle at vertent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

6.96

6.96

58.99

51.04

74


54

-15.01

-2.96



Radiated Spurious Emission Measurement Result: For Frequency form 30MHz to 1000MHz

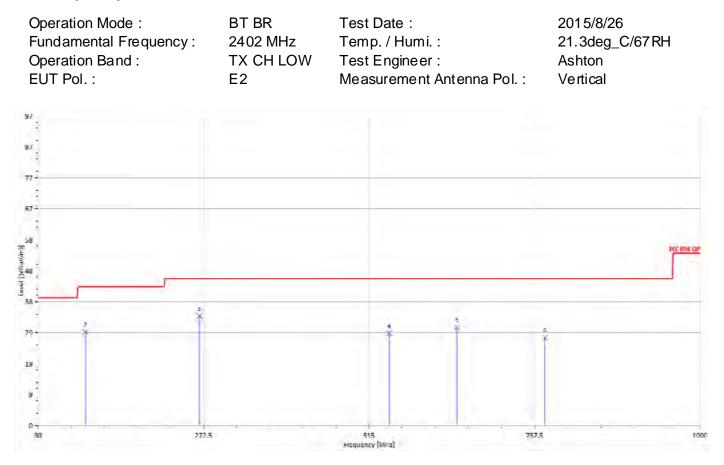



Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
30.00	S	Peak	43.01	-13.11	29.90	40	-10.10
99.84	S	Peak	53.10	-23.84	29.26	43.5	-14.24
266.68	S	Peak	53.91	-19.56	34.36	46	-11.64
545.07	S	Peak	42.38	-13.44	28.95	46	-17.06
644.01	S	Peak	41.87	-11.28	30.59	46	-15.41
773.02	S	Peak	37.77	-10.26	27.51	46	-18.49

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: E2/2015/30085 Issue Date: Sep.10, 2015 Page 46 of 77



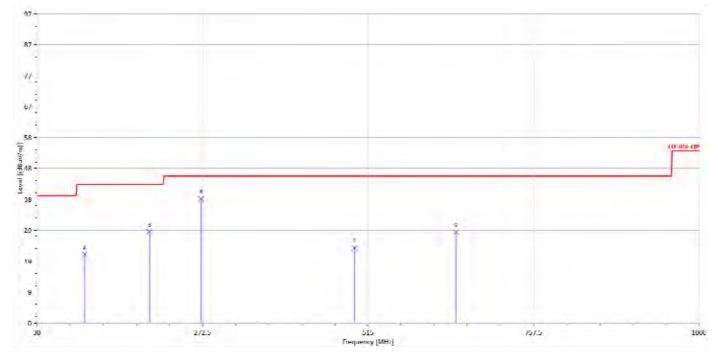


Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
30.00	S	Peak	34.51	-13.11	21.40	40	-18.60
99.84	S	Peak	45.42	-23.84	21.58	43.5	-21.92
194.90	S	Peak	52.37	-23.73	28.64	43.5	-14.86
270.56	S	Peak	58.66	-19.70	38.96	46	-7.04
495.60	S	Peak	37.68	-14.17	23.52	46	-22.48
644.01	S	Peak	39.72	-11.28	28.44	46	-17.56



Report No.: E2/2015/30085 Issue Date: Sep.10, 2015 Page 47 of 77

Operation Mode :	BT BR	Test Date :	2015/8/26
Fundamental Frequency :	2441 MHz	Temp. / Humi. :	21.3deg_C/67RH
Operation Band :	TX CH MID	Test Engineer :	Ashton
EUT Pol. :	E2	Measurement Antenna Pol. :	Vertical

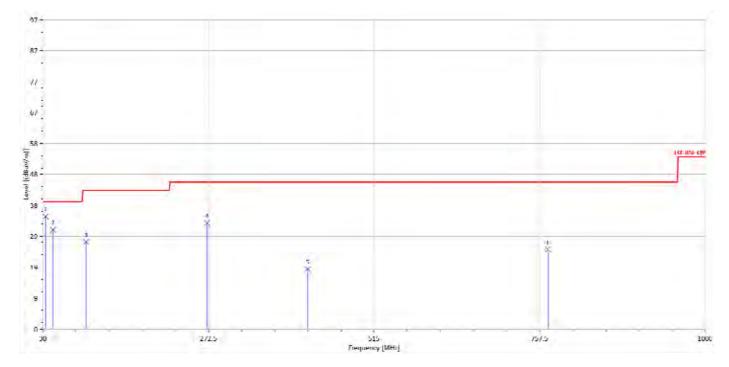

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
33.88	S	Peak	50.47	-15.22	35.24	40	-4.76
44.55	S	Peak	53.24	-22.12	31.12	40	-8.88
93.05	S	Peak	52.34	-25.06	27.28	43.5	-16.22
270.56	S	Peak	52.94	-19.70	33.24	46	-12.76
418.00	S	Peak	34.07	-15.30	18.77	46	-27.23
770.11	S	Peak	35.17	-10.24	24.93	46	-21.07


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised any the protective at the transaction from exercising all their rights and obligations under the transaction documents is unavity and offenders may be protected to the fulle at vertent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 GS Taiwan Ltd.



Report No.: E2/2015/30085 Issue Date: Sep.10, 2015 Page 48 of 77


Operation Mode :	BT BR	Test Date :	2015/8/26
Fundamental Frequency :	2441 MHz	Temp. / Humi. :	21.3deg_C/67RH
Operation Band :	TX CH MID	Test Engineer :	Ashton
EUT Pol. :	E2	Measurement Antenna Pol. :	Horizontal

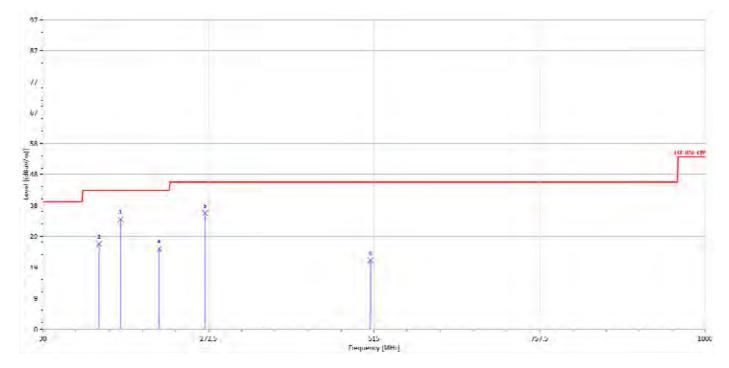


Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @ 3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
30.00	S	Peak	33.75	-13.11	20.64	40	-19.36
112.45	S	Peak	48.75	-22.11	26.63	43.5	-16.87
143.49	S	Peak	56.43	-22.04	34.39	43.5	-9.11
200.72	S	Peak	48.36	-23.22	25.14	43.5	-18.36
267.65	S	Peak	55.87	-19.58	36.29	46	-9.71
510.15	S	Peak	35.33	-13.81	21.52	46	-24.48



Report No.: E2/2015/30085 Issue Date: Sep.10, 2015 Page 49 of 77



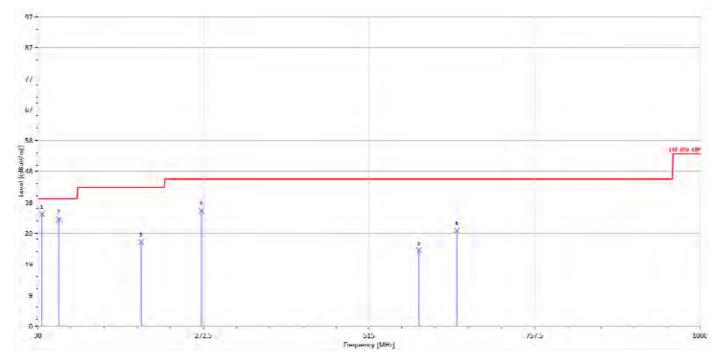


Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
35.82	S	Peak	51.44	-16.34	35.09	40	-4.91
61.04	S	Peak	61.86	-28.42	33.44	40	-6.56
181.32	S	Peak	50.67	-24.37	26.30	43.5	-17.20
269.59	S	Peak	55.83	-19.68	36.15	46	-9.85
588.72	S	Peak	35.89	-12.13	23.76	46	-22.24
644.01	S	Peak	41.31	-11.28	30.03	46	-15.97



Report No.: E2/2015/30085 Issue Date: Sep.10, 2015 Page 50 of 77

Operation Mode :	BT BR	Test Date :	2015/8/26
Fundamental Frequency :	2480 MHz	Temp. / Humi. :	21.3deg_C/67RH
Operation Band :	TX CH HIGH	Test Engineer :	Ashton
EUT Pol. :	E2	Measurement Antenna Pol. :	Horizontal

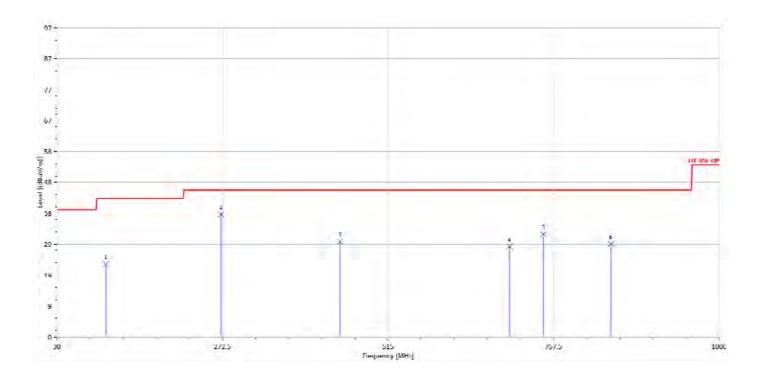

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
101.78	S	Peak	46.32	-23.54	22.77	43.5	-20.73
270.56	S	Peak	58.15	-19.70	38.45	46	-7.55
445.16	S	Peak	45.15	-15.18	29.97	46	-16.03
693.48	S	Peak	39.35	-11.00	28.35	46	-17.65
742.95	S	Peak	42.44	-10.23	32.21	46	-13.79
841.89	S	Peak	38.29	-9.11	29.18	46	-16.82



Radiated Spurious Emission Measurement Result:

For Frequency above 1 GHz


Operation Mode : Fundamental Frequency : Operation Band : EUT Pol. :	BT BR 2402 MHz TX CH LOW E2	Test Date : Temp. / Humi. : Test Engineer : Measurement Antenna Pol. :	2015/8/26 21.3deg_C/67RH Ashton Vertical
9/			
3/			
77-			
			HTE ALSO WK
- 18			FCC RSE AV
Event [[petauotime]]			
188			
29-			
19			
9			
0	· · · · ·	1.3750 2012 Proquency [Miliz]	26500

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4804.00	Н	Peak	31.92	10.98	42.90	74	-31.10
4804.00	Н	Average	22.60	10.98	33.58	54	-20.42



Report No.: E2/2015/30085 Issue Date: Sep.10, 2015 Page 52 of 77

Operation Mode : Fundamental Frequency :	BT BR 2402 MHz	Test Date: Temp. / Humi. :	2015/8/26 21.3deg_C/67RH
Operation Band :	TX CH LOW	Test Engineer :	Ashton
EUT Pol.:	E2	Measurement Antenna Pol. :	Horizontal

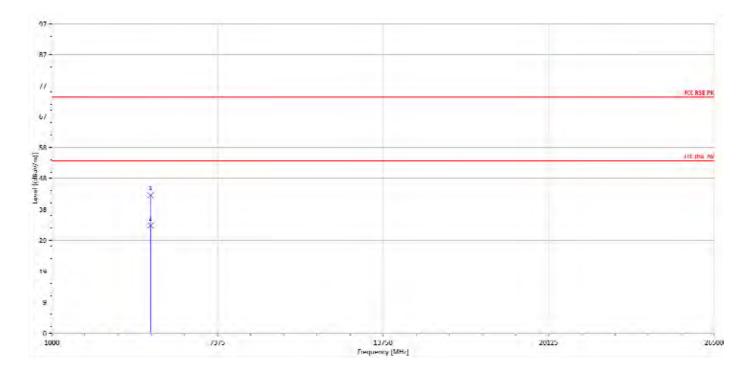


Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4804.00	Н	Peak	32.23	10.98	43.21	74	-30.79
4804.00	Н	Average	22.70	10.98	33.68	54	-20.32



Report No.: E2/2015/30085 Issue Date: Sep.10, 2015 Page 53 of 77

Operation Mode :	BT BR	Test Date :	2015/8/26
Fundamental Frequency :	2441 MHz	Temp. / Humi. :	21.3de <u>g</u> _C/67RH
Operation Band :		Test Engineer :	Ashton
EUT Pol. :		Measurement Antenna Pol. :	Vertical

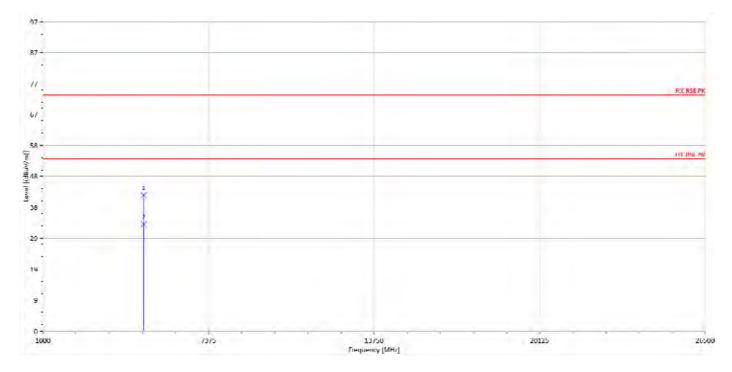


Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4882.00	Н	Peak	31.76	10.91	42.68	74	-31.32
4882.00	Н	Average	22.49	10.91	33.40	54	-20.60



Report No.: E2/2015/30085 Issue Date: Sep.10, 2015 Page 54 of 77

Operation Mode :	BT BR	Test Date :	2015/8/26
Fundamental Frequency :	2441 MHz	Temp. / Humi. :	21.3deg_C/67RH
Operation Band :	TX CH MID	Test Engineer :	Ashton
EUT Pol. :	E2	Measurement Antenna Pol. :	Horizontal

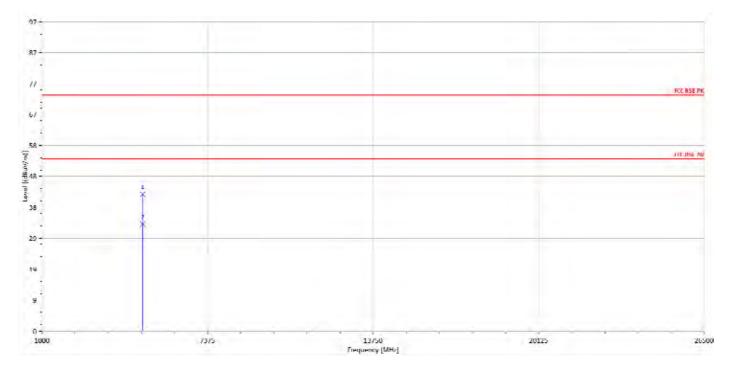


Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4882.00	Н	Peak	31.98	10.91	42.90	74	-31.10
4882.00	Н	Average	22.53	10.91	33.44	54	-20.56



Report No.: E2/2015/30085 Issue Date: Sep.10, 2015 Page 55 of 77


Operation Mode : Fundamental Frequency :	BT BR 2480 MHz	Test Date : Temp. / Humi. :	2015/8/26 21.3deg_C/67RH
Operation Band :	TX CH HIGH	Test Engineer :	Ashton
EUT Pol. :	E2	Measurement Antenna Pol. :	Vertical

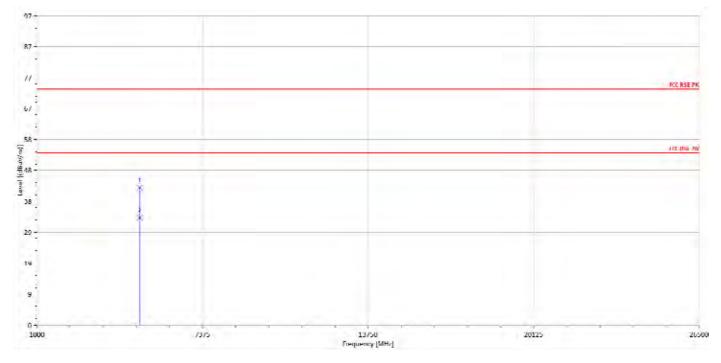

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4960.00	Н	Peak	32.11	10.99	43.11	74	-30.89
4960.00	Н	Average	22.72	10.99	33.71	54	-20.29



Report No.: E2/2015/30085 Issue Date: Sep.10, 2015 Page 56 of 77

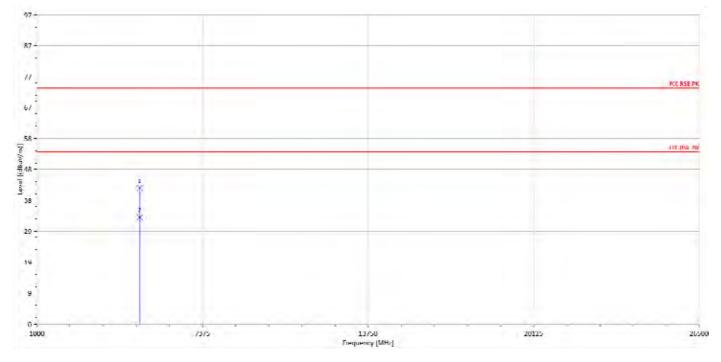

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4960.00	Н	Peak	31.73	10.99	42.72	74	-31.28
4960.00	Н	Average	22.45	10.99	33.44	54	-20.56



11. FREQUENCY SEPARATION


11.1. Standard Applicable

Frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25 kHz or the 2/3*20dB bandwidth of the hopping channel, whichever is greater.

11.2. Measurement Equipment Used

Conducted Emission Test Site									
EQUIPMENT	MFR MODEI		SERIAL	LAST	CAL DUE.				
TYPE		NUMBER	NUMBER	CAL.					
Spectrum Analyzer	Agilent	N9010A	MY53400256	10/15/2014	10/14/2015				
DC Block	PASTERNACK	PE8210	RF29	12/19/2014	12/18/2015				
Splitter	RF-LAMBAD	RFLT2W1G18 G	RF35	12/19/2014	12/18/2015				
Attenuator	WOKEN	218FS-10	RF23	12/19/2014	12/18/2015				

11.3. Test Set-up



11.4. Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set center frequency of spectrum analyzer = middle of hopping channel.
- 5. Set the spectrum analyzer as RBW, VBW=100 kHz, Adjust Span to 5MHz, Sweep = auto.
- 6. Max hold. Mark 3 Peaks of hopping channel and record the 3 peaks frequency.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

たかうかすが、いれてきる本体的の意味がある。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



11.5. Measurement Result

Channel separation (MHz)	Limit	Result
1	>=25 kHz or 2/3 times 20dB bandwidth	PASS

Frequency Separation Test Data



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



12. NUMBER OF HOPPING FREQUENCY


12.1. Standard Applicable

Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 15 hopping frequencies.

12.2. Measurement Equipment Used

Conducted Emission Test Site								
EQUIPMENT	EQUIPMENT MFR MODEL SERIAL LAST							
TYPE		NUMBER	NUMBER	CAL.				
Spectrum Analyzer	Agilent	N9010A	MY53400256	10/15/2014	10/14/2015			
DC Block	PASTERNACK	PE8210	RF29	12/19/2014	12/18/2015			
Splitter	RF-LAMBAD	RFLT2W1G18 G	RF35	12/19/2014	12/18/2015			
Attenuator	WOKEN	218FS-10	RF23	12/19/2014	12/18/2015			

12.3. Test Set-up



12.4. Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
- Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set spectrum analyzer Start=2400MHz, Stop = 2483.5MHz, Sweep = auto.
- 5. Set the spectrum analyzer as RBW=430 kHz, VBW=1.5MHz., Detector = Peak
- 6. Max hold, view and count how many channel in the band.

12.5. Measurement Result

Tabular Data of Total Channel Number

	Channel Number	Limit
2.4 GHz – 2.441GHz	40	
2.441 GHz – 2.4835GHz	39	>15
2.4GHz ~2.4835GHz	(40+39) = 79	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

Chiles Solite was stated are located and the and a state of the form of the state tronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is frawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law




Channel Number

Sep/01.2015 Frequency Center Freq 2.420500000 GHz Avg Type: Log-Pwr Trig: Free Run #Atten: 30 dB PNO: Fast C Auto Tune Mkr1 2.402 000 GHz Ref Offset 1.2 dB Ref 20.00 dBm -5.10 dBn Center Freq 2.420500000 GH Start Freq 2.400000000 GH Stop Freq 2.441000000 GH CF Step 4.100000 MHJ Auto Freq Offset OH Start 2.40000 GHz #Res BW 430 kHz Stop 2.44100 GHz Sweep 1.000 ms (1001 pts) #VBW 1.5 MHz

2.4 GHz – 2.441GHz

2.441 GHz – 2.4835GHz

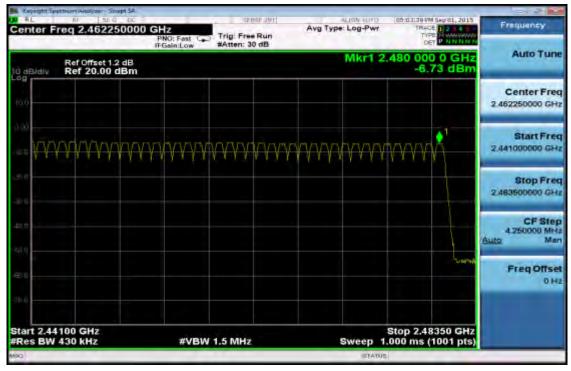

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are relatined to so days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

GS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



13. TIME OF OCCUPANCY (DWELL TIME)


13.1. Standard Applicable

Frequency hopping systems operating in the 2400MHz-2483.5MHz. The average time of occupancy on any frequency shall not greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channel employed.

13.2. Measurement Equipment Used

Conducted Emission Test Site								
EQUIPMENT	LAST	CAL DUE.						
TYPE		NUMBER	NUMBER	CAL.				
Spectrum Analyzer	Agilent	N9010A	MY53400256	10/15/2014	10/14/2015			
DC Block	PASTERNACK	PE8210	RF29	12/19/2014	12/18/2015			
Splitter	RF-LAMBAD	RFLT2W1G18 G	RF35	12/19/2014	12/18/2015			
Attenuator	WOKEN	218FS-10	RF23	12/19/2014	12/18/2015			

13.3. Test Set-up



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms</u>. At the time of itability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



13.4. Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set center frequency of spectrum analyzer = operating frequency.
- 5. Set the spectrum analyzer as RBW, VBW=1MHz, 3MHz, Span = 0Hz , Detector = Peak, Adjust Sweep = 2~8ms.
- 6. Repeat above procedures until all frequency of the interest measured were complete.

Formula Deduced: time occupancy of one time slot X Hopping rate / total slot in one channel / total channel that hops X period of working channels.

Where, standard hopping rate is 1600 hops/s, slot in one channel for DH1, DH3, and DH5 is 2, 4, and 6, respectively.

DH1 consists of single time slot of the uplink, and one slot of the downlink Total Slot: 2 DH3 consists of three time slot of the uplink, and one slot of the downlink. Total Slot: 4 DH5 consists of five time slot of the uplink, and one slot of the downlink. Total Slot: 6

In AFH mode, hopping rate is 800 hop/s with 6 slots in 20 hopping channels with channel hopping rate (800 / 6 / 20) in Occupancy Time Limit (0.4 * 20) (S), Hop Over Occupancy Time comes to $(800 / 6 / 20)^{*}(0.4 * 20) = 53.33$

Note: the result of the complete test default channel at 1Mbps is recorded on the test report, 2Mbps, and 3Mbps only records the measurement result at middle channel that reveals no much deviation.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



13.5. Tabular Result of the Measurement

GFSK (1Mbps)						
Channel	PACKET TYPE	Measurement Result (ms)	Limit (ms)			
	DH1	128.00	400ms			
0	DH3	256.00	400ms			
	DH5	309	400ms			
	DH1	128.00	400ms			
39	DH3	256	400ms			
	DH5	309	400ms			
	DH1	128	400ms			
78	DH3	256.00	400ms			
	DH5	309	400ms			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised any the protective at the transaction from exercising all their rights and obligations under the transaction documents is unavity and offenders may be protected to the fulle at vertent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



A period time = 0.4 (s) * 79 = 31.6 (s)

GFSK ((1Mbps):
	(11111111111111111111111111111111111111	J•

CH Low	DH1 time slot = DH3 time slot =	1.6 *	()	31.6 =	128.00 (ms) 256.00 (ms)
	DH5 time slot =	2.9 "	(1600/6/79) *	31.6 =	309.33 (ms)
CH Mid	DH1 time slot =	0.4 *	(1600/2/79) *	31.6 =	128.00 (ms)
	DH3 time slot =	1.6 *	(1600/4/79) *	31.6 =	256.00 (ms)
	DH5 time slot =	2.9 *	(1600/6/79) *	31.6 =	309.33 (ms)
CH High	DH1 time slot =	0.4 *	(1600/2/79) *	31.6 =	128.00 (ms)
_	DH3 time slot =	1.6 *	(1600/4/79) *	31.6 =	256.00 (ms)
	DH5 time slot =	2.9 *	(1600/6/79) *	31.6 =	309.33 (ms)

π/4 -DQPSK (2Mbps):

CH Mid	2DH1 time slot =	0.4 *	(1600/2/79) *	31.6 =	128.00 (ms)
	2DH3 time slot =	1.6 *	(1600/4/79) *	31.6 =	256.00 (ms)
	2DH5 time slot =	2.9 *	(1600/6/79) *	31.6 =	309.33 (ms)

8-DPSK (3Mbps):

CH Mid	3DH1 time slot =	0.4 *	(1600/2/79) *	31.6 =	128.00	(ms)
	3DH3 time slot =	1.6 *	(1600/4/79) *	31.6 =	256.00	(ms)
	3DH5 time slot =	2.9 *	(1600/6/79) *	31.6 =	309.33	(ms)



AFH Mode:

GFSK (1Mbps) for AFH Mode							
Hopping Channel NumberPACKET TYPEMeasurement Result (ms)Li (n							
20	DH5	154.67	400ms				
	π/4 DQPSK (2I	Nbps) for Mode					
Hopping Channel Number	PACKET TYPE	Measurement Result (ms)	Limit (ms)				
20	DH5	154.67	400ms				
	8-DPSK (3Mbps) for AFH Mode						
Hopping Channel PACKET TYPE Measurement Result Limit Number (ms) (ms)							
20	DH5	154.67	400ms				

GFSK (1Mbps):

DH5 time slot = π/4 -DQPSK (2Mbps):	2.9	(ms)	*	(800/6/20)* 8 =	154.67 (ms)
2DH5 time slo =	2.9	(ms)	*	(800/6/20)*8 =	154.67 (ms)
8-DPSK (3Mbps): 3DH5 time slo =	2.9	(ms)	*	(800/6/20)* 8 =	154.67 (ms)

13.6. Measurement Result


Note: Refer to next page for plots.



CH-Low DH1

Keynight Spectreen Analyzer - Skrept SA				
Center Freq 2.402000000	PNO: Fast Trig: Free Run	Avg Type: Log-Pwr	D4-3300 W Septil, 2015 TRACE 1 2 4 4 5 1 TVPE Woodcontrol OFT P N IN NO.	Frequency
Ref Offset 1.2 dB 10 dB/dly Ref 20.00 dBm	IFGain:Low #Atten: 30 dB	۵	Mkr3 1.250 ms 0.03 dB	Auto Tuni
X	<u>λ</u> 1Δ2		304	Center Fre 2.402000000 GH
	V V			Start Fre 2.402000000 GH
to a monthersed	Meneralitationsper	mannahuna		Stop Fre 2.402000000 GH
Center 2.402000000 GHz Res BW 1.0 MHz	#VBW 3.0 MHz	Sweep 2	Span 0 Hz 2.000 ms (401 pts)	CF Ste 1.000000 MH
MKR MODE TRC SCL X		NETION FUNCTION WETH	FUNCTION VALUE	Auto Ma
$\begin{array}{cccccccccccccccccccccccccccccccccccc$	3850 μs (Δ) -9.57 dB 3700 μs -4.51 dBm 1.260 ms (Δ) 0.03 dB 370.0 μs -4.61 dBm		-	Freq Offse 0 H
8 9 10 11				
(CO		STATUS		

DH3

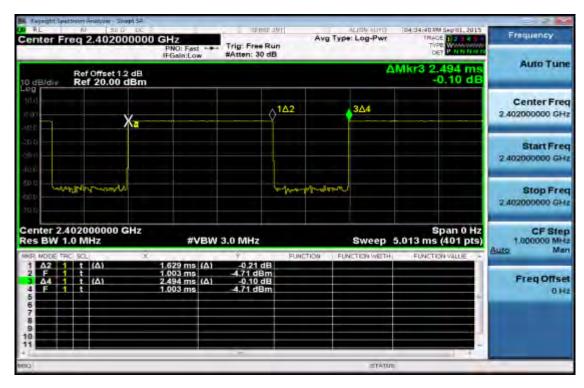




DH5



CH-Mid

DH1

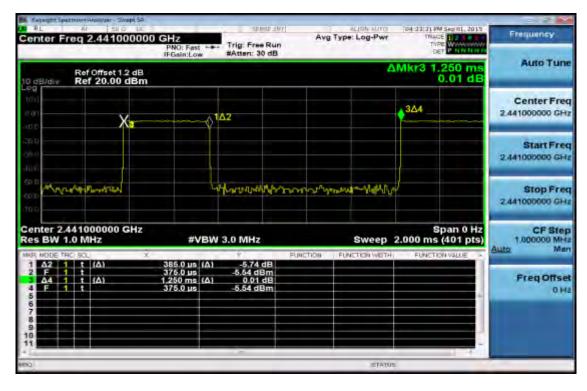



DH3



DH5



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



CH-High DH1

Reproduction	ic bestern	Hourston - Strapt SA				2 .197		ALIGN AUTO	Indictatio	4 PM Sep (01, 2015	
11.84		2.48000000	0 GHz PNO: Fast IFGain:Los		Trig: Free #Atten: 30	Run		Log-Pwr		NAGE 1 2 3 4 5 1 TIPE WOMENNESS	Frequency
10 dB/div		f Offset 1.2 dB f 20.00 dBm							AMkr3	1.251 ms 0.05 dB	Auto Tun
				X.		1Δ2			364		Center Fre 2.480000000 GH
30.0 30.0 40.0											Start Fre 2.48000000 GH
60.0 60.0	ļ	- Charlen	-Productor and and	1		re-lhph	tanovanjum	verne		nimin	Stop Fre 2.480000000 GH
Center 2. Res BW 1		000000 GHz 1Hz	#V	BW	3.0 MHz			Sweep	3.013 n	Span 0 Hz ns (401 pts)	CF Ste 1.000000 Mit Auto Mit
I A2	<. so		384.2 µs	(A)	0.05 d	The second	TION FUN	ICTION WEITH	FLIN	CTION VALUE	Charge 100
2 F Δ4 4 F 5 6	1	(A)	1.122 ms 1.251 ms 1.122 ms		-5.59 dB 0.05 d -6.59 dB	8					Freq Offs 01
7 8 9 10 11											
50	-			_		_		=TAD	ns		

DH3

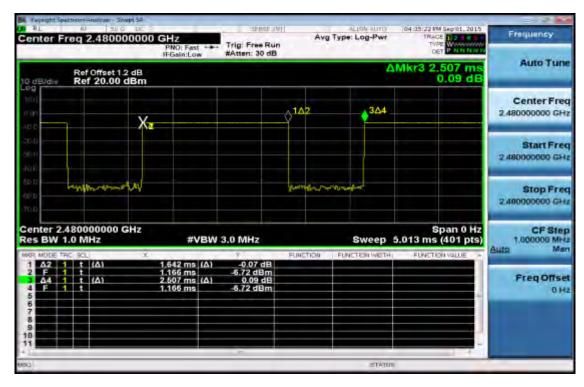



DH5


Reventit Spi		Houriyaar - Silvapt SA						3.2.2
0.44	req 2	2.4800000		Trig: Free Run #Atten: 30 dB	Avg Type:		RAGE 1 2 3 4 5 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	Frequency
10 dB/div		Offset 1.2 dB 20.00 dBn		APCIENT. OV OD		AMkr3	3.754 ms 0.07 dB	Auto Tune
		-		Xa		0102	3∆4	Center Free 2.480000000 GH
-20 0 -20 0 -20 0								Start Free 2.480000000 GH
50 0 60 0			home			نور میر مرکز اور کار مرکز اور مرکز اور کار مرکز اور مرکز اور مرام م	n d	Stop Fre 2,480000000 GH
Res BW 1	1.0 M		#VBV	V 3.0 MHz		Sweep 7.547 n		CF Ste 1.000000 MH
MKR MODE T 1 A2 1 2 F 3 A4 7 4 F 5 6 7 8 9 10		(Δ)	× 2.887 ms (Δ) 3.151 ms 3.754 ms (Δ) 3.151 ms	0.01 dB -6.89 dBm	UNCTION FUND	TICH WETH, FUN	CTION VALUE	Freq Offse 01
11				-		STATUS	141	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised any the protective at the transaction from exercising all their rights and obligations under the transaction documents is unavity and offenders may be protected to the fulle at vertent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



CH-Mid 2DH1

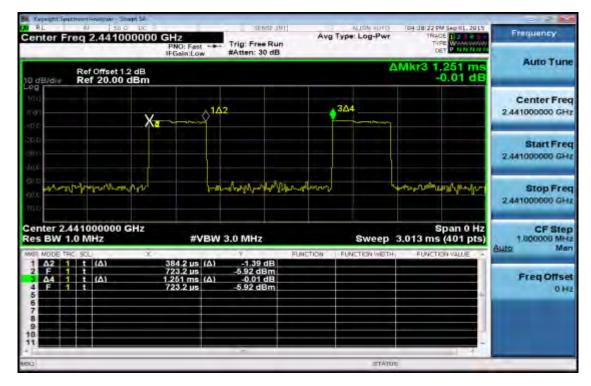


2DH3





2DH5

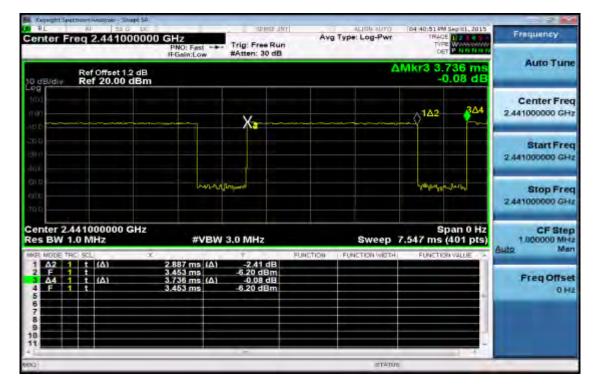


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



CH-Mid **3DH1**

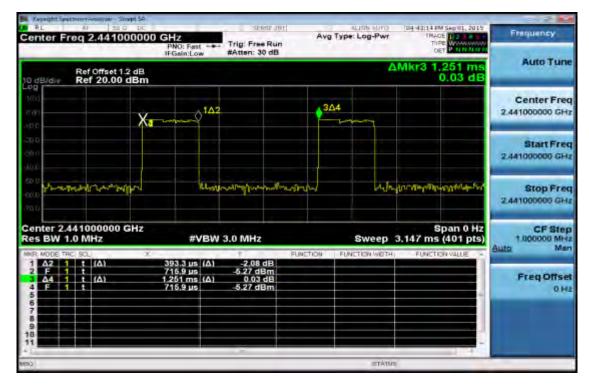

3DH3





3DH5



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



14. ANTENNA REQUIREMENT

14.1. Standard Applicable

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

If the transmitting antenna is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi.

14.2. Antenna Connected Construction

An embedded-in antenna design is used.

The antenna connector is designed with unique type RF connector and no consideration of replacement. Please see EUT photo and antenna spec. for details.

The antenna gain is less than 6dBi. Therefore, it is not necessary to reduce maximum output power limit.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

WeifS of all weights and the results and state the four result of the state of th Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



15. RF EXPOSURE

15.1. Standard Applicable:

According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

This is a Portable device with its physical nature to be used nearby, the distance between radiating structure and human is less than 20cm.

As per KDB 447498 D01 \$4.3.1, The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances \leq 50 mm are determined by:

[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)] \cdot [$\sqrt{f}(GHz)$] ≤ 3.0 for 1-g Head & Body SAR and ≤ 7.5 for 10-g extremity Hand SAR, where

f (GHz) is the RF channel transmit frequency in GHz Power and distance are rounded to the nearest mW and mm before calculation

15.2. Measurement Result:

Step 1:

This is a portable device and the Max peak output power is (0.32mW) lower than the threshold given and derived as formula given above, where

=0.32 (mW)/5 (mm)*√2.402 (GHz) =**0.10**< 3.0

Max. Rated Avg. Power + Max Tolerance: -5dBm

Frequency Power (peak in dBm) Power (peak mw) Distance (mm)Result2402-50.31622776650.098020406

Frequency	Reading Power	Output Power	Limit	
(MHz)	(dBm)	(W)	(W)	
2402	-5	000032	1 Watt = 30 dBm	

As the result of calculation result indicates, the RF exposure generating from given transmitter (transmitter employed digital modulation) can be excluded from SAR measurement, and is deemed compliant with RF exposure as per FCC.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document to expect the to the fullest extent of the law.



The table of quick reference in terms of power threshold

SAR Test Exclusion Thresholds for 100 MHz - 6 GHz and ≤ 50 mm

Approximate SAR Test Exclusion Power Thresholds at Selected Frequencies and Test Separation Distances are illustrated in the following Table.

MHz	5	10	15-	20	25	mm
150	39	77	116	155	194	
300	27	55	82	110	137	
450	22	45	67	89	112	
835	16	33	49	66	82	
900	16	32	47	63	79	and a set
1500	12	24	37	49	61	SAR Test Exclusion
1900	11	22	33	44	54	Threshold (mW)
2450	10	19	29	38	48	The cherry (all it)
3600	8	16	24	32	40	
5200	7	13	20	26	33	
5400	6	13	19	26	32	
5800	6	12	19	25	31	

Note that the table present above is the table of quick reference, indexing the level of power threshold with respect to the corresponding frequency. The value of the index may be deviated, and therefore, the derivation of exemption based on KDB447498 D01 is used in this test report, relevantly.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

WeifS of all weights and the results and state the four result of the state of th Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law