



**Application
For**

**Part 2, Subpart J, Paragraph 2.907 Equipment Authorization of Certification for an
Intentional Radiator per Part 15, Subpart C, paragraphs 15.207, 15.209 and 15.247**

And

**Innovation, Science, and Economic Development Canada
Certification Per
IC RSS-Gen General Requirements for Radio Apparatus
And
RSS-247 Digital Transmission Systems (DTSS), Frequency Hopping Systems
(FHSS) and License-Exempt Local Area Network (LE-LAN) Devices**

For the

Inventek Systems

**Model Number: ISM4343-X
(2.4 GHz eS-WiFi Module)**

**FCC ID: O7P-4343
IC: 10147A-4343**

**UST Project: 18-0268
Issue Date: October 19, 2018**

Total Pages: 128

**3505 Francis Circle Alpharetta, GA 30004
PH: 770-740-0717 Fax: 770-740-1508
www.ustech-lab.com**



Testing Tomorrow's Technology

I certify that I am authorized to sign for the Test Agency and that all of the statements in this report and in the Exhibits attached hereto are true and correct to the best of my knowledge and belief:

US TECH (Agent Responsible For Test):

By: Alan Ghasiani

Name: Alan Ghasiani

Title: Compliance Engineer – President

Date: October 19, 2018



TESTING

NVLAP LAB CODE 200162-0

This report shall not be reproduced except in full. This report may be copied in part only with the prior written approval of US Tech. The results contained in this report are subject to the adequacy and representative character of the sample provided. This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the Federal Government.

3505 Francis Circle Alpharetta, GA 30004
PH: 770-740-0717 Fax: 770-740-1508
www.ustech-lab.com

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

MEASUREMENT TECHNICAL REPORT

COMPANY NAME: Inventek Systems
MODEL: ISM4343-X
FCC ID: O7P-4343
IC: 10147A-4343
DATE: October 19, 2018

This report concerns (check one): Original grant ☒
Class II change

Equipment type: 2.4 GHz Transmitter Module

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? yes_____ No X

If yes, defer until: N/A
date

agrees to notify the Commission by N/A
date

of the intended date of announcement of the product so that the grant can be issued on that date.

Report prepared by:

US Tech
3505 Francis Circle
Alpharetta, GA30004

Phone Number: (770) 740-0717
Fax Number: (770) 740-1508

Table of Contents

<u>Paragraph Title</u>	<u>Page</u>
1 General Information.....	10
1.1 Purpose of this Report	10
1.2 Characterization of Test Sample.....	10
1.3 Product Description	10
1.4 Configuration of Tested System.....	11
1.5 Test Facility.....	11
1.6 Related Submittal(s)/Grant(s)	11
2 Tests and Measurements	13
2.1 Test Equipment.....	13
2.2 Modifications to EUT Hardware	14
2.3 Number of Measurements for Intentional Radiators (15.31(m), RSS-Gen 6.8)	14
2.4 Frequency Range of Radiated Measurements (Part 15.33, RSS-Gen 6.13)	15
2.4.1 Intentional Radiator.....	15
2.4.2 Unintentional Radiator	15
2.5 Measurement Detector Function and Bandwidth (CFR 15.35, RSS-Gen 6.9, 6.13)	15
2.5.1 Detector Function and Associated Bandwidth	15
2.5.2 Corresponding Peak and Average Requirements.....	15
2.6 EUT Antenna Requirements (CFR 15.203, RSS-Gen 6.7)	16
2.7 Restricted Bands of Operation (Part 15.205, RSS-Gen 8.10).....	18
2.8 Transmitter Duty Cycle (Part 15.35 (c), RSS-Gen 6.10)	18
2.9 Antenna Conducted Intentional and Spurious Emissions (CFR 15.209, 15.247(d)) (IC RSS 247, 5.5))	18
2.10 Intentional Radiator, Radiated Emissions (CFR 15.209, 15.247(d), RSS-247, 5.5)	37
2.11 Band Edge Measurements (CFR 15.247(d), RSS-247, 5.5).....	50
2.12 Six (6) dB Bandwidth (CFR 15.247(a)(2), RSS-247, 5.2(a))	99
2.13 Occupied Bandwidth, (99% bandwidth)(RSS-GEN (6.6)).....	109
2.14 Maximum Peak Conducted Output Power (CFR 15.247 (b) (3))	110
2.15 Power Spectral Density (CFR 15.247(e), RSS-247, 5.2(b))	121
2.16 Intentional Radiator Power Lines Conducted Emissions (CFR 15.207, RSS-Gen 8.8).....	122
2.17 Intentional Radiator, Radiated Emissions (CFR 15.209, RSS-Gen, 8.9).....	124
2.18 Measurement Uncertainty	128

2.18.1 Conducted Emissions Measurement Uncertainty	128
2.18.2 Radiated Emissions Measurement Uncertainty	128
3 Conclusions	128

List of Figures

<u>Figures</u>	<u>Title</u>	<u>Page</u>
Figure 1.	Block Diagram of Test Configuration	17
Figure 2.	802.11b, Channel 1, 30-1000 MHz	19
Figure 3.	802.11b, Channel 1, 1 – 25 GHz	20
Figure 4.	802.11b, Channel 6, 30-1000 MHz	21
Figure 5.	802.11b, Channel 6, 1 – 25 GHz	22
Figure 6.	802.11b, Channel 11, 30-1000 MHz	23
Figure 7.	802.11b, Channel 11, 1 - 25 GHz	24
Figure 8.	802.11g, Channel 1, 30-1000 MHz	25
Figure 9.	802.11g, Channel 1, 1 – 25 GHz	26
Figure 10.	802.11g, Channel 6, 30-1000 MHz	27
Figure 11.	802.11g, Channel 6, 1 - 25 GHz	28
Figure 12.	802.11g, Channel 11, 30-1000 MHz	29
Figure 13.	802.11g, Channel 11, 1 – 25 GHz	30
Figure 14.	802.11n, Channel 1, 30-1000 MHz	31
Figure 15.	802.11n, Channel 1, 1- 25 GHz	32
Figure 16.	802.11n, Channel 6, 30-1000 MHz	33
Figure 17.	802.11n, Channel 6, 1 – 25 GHz	34
Figure 18.	802.11n, Channel 11, 30-1000 MHz	35
Figure 19.	802.11n, Channel 11, 1 – 25 GHz	36
Figure 20.	Band Edge Compliance – b mode (Chip Antenna) Low Channel Delta - Peak.....	51
Figure 21.	Band Edge Compliance – b mode (Chip Antenna) Low Channel Delta – Average	52
Figure 22.	b mode (Chip Antenna) Low Channel Restricted Band - Peak	53
Figure 23.	b mode (Chip Antenna) Low Channel Restricted Band–	54
Figure 24.	Band Edge Compliance – b mode (Chip Antenna) High Channel Delta - Peak.....	55
Figure 25.	Band Edge Compliance – b mode (Chip Antenna) High Channel Delta - Average	56
Figure 26.	b mode (Chip Antenna) High Channel Restricted Band –Peak.....	57
Figure 27.	b mode (Chip Antenna) High Channel Restricted Band –Average	58

Figure 28. Band Edge Compliance – g mode (Chip Antenna) Low Channel Delta – Peak.....	59
Figure 29. Band Edge Compliance – g mode (Chip Antenna) Low Channel Delta – Average	60
Figure 30. g mode (Chip Antenna) Low Channel Restricted Band – Peak	61
Figure 31. g mode (Chip Antenna) Low Channel Restricted Band – Average	62
Figure 32. Band Edge Compliance – g mode (Chip Antenna) High Channel Delta – Peak.....	63
Figure 33. Band Edge Compliance – g mode (Chip Antenna) High Channel Delta – Average	64
Figure 34. g mode (Chip Antenna) High Channel Restricted Band – Peak.....	65
Figure 35. g mode (Chip Antenna) High Channel Restricted Band – Average	66
Figure 36. Band Edge Compliance – n mode (Chip Antenna) Low Channel Delta – Peak.....	67
Figure 37. Band Edge Compliance – n mode (Chip Antenna) Low Channel Delta – Average	68
Figure 38. n mode (Chip Antenna) Low Channel Restricted Band – Peak	69
Figure 39. n mode (Chip Antenna) Low Channel Restricted Band – Average	70
Figure 40. Band Edge Compliance – n mode (Chip Antenna) High Channel Delta – Peak.....	71
Figure 41. Band Edge Compliance – n mode (Chip Antenna) High Channel Delta - Average	72
Figure 42. n mode (Chip Antenna) High Channel Restricted Band – Peak.....	73
Figure 43. n mode (Chip Antenna) High Channel Restricted Band – Average	74
Figure 44. Band Edge Compliance – b mode (External Antenna) Low Channel Delta – Peak.....	75
Figure 45. Band Edge Compliance – b mode (External Antenna) Low Channel Delta –Average	76
Figure 46. b mode (External Antenna) Low Channel Restricted Band – Peak.....	77
Figure 47. b mode (External Antenna) Low Channel Restricted Band – Average ...	78
Figure 48. Band Edge Compliance – b mode (External Antenna) High Channel Delta – Peak.....	79
Figure 49. Band Edge Compliance – b mode (External Antenna) High Channel Delta - Average	80
Figure 50. b mode (External Antenna) High Channel Restricted Band –	81
Figure 51. b mode (External Antenna) High Channel Restricted Band – Average...	82
Figure 52. Band Edge Compliance – g mode (External Antenna) Low Channel Delta – Peak.....	83
Figure 53. Band Edge Compliance – g mode (External Antenna) Low Channel Delta –Average	84
Figure 54. g mode (External Antenna) Low Channel Restricted Band – Peak.....	85
Figure 55. g mode (External Antenna) Low Channel Restricted Band – Average ...	86

Figure 56. Band Edge Compliance – g mode (External Antenna) High Channel Delta – Peak.....	87
Figure 57. Band Edge Compliance – g mode (External Antenna) High Channel Delta - Average	88
Figure 58. g mode (External Antenna) High Channel Restricted Band – Peak.....	89
Figure 59. g mode (External Antenna) High Channel Restricted Band – Average...	90
Figure 60. Band Edge Compliance – n mode (External Antenna) Low Channel Delta – Peak.....	91
Figure 61. Band Edge Compliance – n mode (External Antenna) Low Channel Delta –Average	92
Figure 62. n mode (External Antenna) Low Channel Restricted Band – Peak.....	93
Figure 63. n mode (External Antenna) Low Channel Restricted Band – Average ...	94
Figure 64. Band Edge Compliance – n mode (External Antenna) High Channel Delta – Peak.....	95
Figure 65. Band Edge Compliance – n mode (External Antenna) High Channel Delta – Average	96
Figure 66. n mode (External Antenna) High Channel Restricted Band – Peak.....	97
Figure 67. n mode (External Antenna) High Channel Restricted Band – Average...	98
Figure 68. 6 dB Bandwidth b mode Low Channel	100
Figure 69. 6 dB Bandwidth b mode Mid Channel.....	101
Figure 70. 6 dB Bandwidth b mode High Channel	102
Figure 71. 6 dB Bandwidth g mode Low Channel	103
Figure 72. 6 dB Bandwidth g mode Mid Channel.....	104
Figure 73. 6 dB Bandwidth g mode High Channel	105
Figure 74. 6 dB Bandwidth n mode Low Channel	106
Figure 75. 6 dB Bandwidth n mode Mid Channel.....	107
Figure 76. 6 dB Bandwidth n mode High Channel	108
Figure 77. Peak Antenna Conducted Output Power, b mode Low Channel	112
Figure 78. Peak Antenna Conducted Output Power, b mode Mid Channel	113
Figure 79. Peak Antenna Conducted Output Power, b mode High Channel.....	114
Figure 80. Peak Antenna Conducted Output Power, g mode Low Channel	115
Figure 81. Peak Antenna Conducted Output Power, g mode Mid Channel	116
Figure 82. Peak Antenna Conducted Output Power, g mode High Channel.....	117
Figure 83. Peak Antenna Conducted Output Power, n mode Low Channel	118
Figure 84. Peak Antenna Conducted Output Power, n mode Mid Channel	119
Figure 85. Peak Antenna Conducted Output Power, n mode High Channel.....	120

List of Tables

<u>Table</u>	<u>Title</u>	<u>Page</u>
Table 1.	Supporting Equipment	12
Table 2.	Test Instruments	13
Table 3.	Number of Test Frequencies for Intentional Radiators.....	14
Table 4.	Allowed Antenna(s).....	16
Table 5.	b mode - Peak Radiated Fundamental & Harmonic Emissions (Chip Antenna)	38
Table 6.	b mode - Average Radiated Fundamental & Harmonic Emissions (Chip Antenna)	39
Table 7.	g mode - Peak Radiated Fundamental & Harmonic Emissions (Chip Antenna)	40
Table 8.	g mode - Average Radiated Fundamental & Harmonic Emissions (Chip Antenna)	41
Table 9.	n mode – Peak Radiated Fundamental & Harmonic Emissions (Chip Antenna)	42
Table 10.	n mode – Average Radiated Fundamental & Harmonic Emissions (Chip Antenna)	43
Table 11.	b mode – Peak Radiated Fundamental & Harmonic Emissions (External Antenna)	44
Table 12.	b mode – Average Radiated Fundamental & Harmonic Emissions (External Antenna)	45
Table 13.	g mode – Peak Radiated Fundamental & Harmonic Emissions (External Antenna)	46
Table 14.	g mode – Average Radiated Fundamental & Harmonic Emissions (External Antenna)	47
Table 15.	n mode – Peak Radiated Fundamental & Harmonic Emissions (External Antenna)	48
Table 16.	n mode – Average Radiated Fundamental & Harmonic Emissions (External Antenna)	49
Table 17.	Six (6) dB Bandwidth.....	99
Table 18.	99% Occupied Bandwidth	109
Table 19.	Peak Antenna Conducted Output Power per Part 15.247 (b)(3)	111
Table 20.	Power Spectral Density for Low, Mid and High Bands	121
Table 21.	Power Line Conducted Emissions	123
Table 22.	Spurious Radiated Emissions (150 KHz-30MHz).....	125
Table 23.	Spurious Radiated Emissions (30 MHz – 1 GHz)	126
Table 24.	Spurious Radiated Emissions (1 GHz – 25 GHz).....	127

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

List of Attachments

FCC Agency Agreement
IC Agency Agreement
FCC Application Forms
IC Application Forms
Letter of Confidentiality
Equipment Label(s)
Block Diagram(s)
Schematic(s)
Test Configuration Photographs

External Photographs
Internal Photographs
Theory of Operation
RF Exposure
User's Manual
IC Cross Reference
FCC Modular Approval Letter
IC Modular Approval Letter

1 General Information

1.1 Purpose of this Report

This report is prepared as a means of conveying test results and information concerning the suitability of this exact product for public distribution according to IC RSS-247 and FCC Rules and Regulations Part 15, Section 247.

1.2 Characterization of Test Sample

The sample used for testing was received by US Tech on September 15, 2018 in good operating condition.

1.3 Product Description

The Equipment Under Test (EUT) is the Inventek eS-WiFi Module, Model ISM4343-WBM-L54. The ISM4343-WBM-L54 is part of the Inventek Systems eS-WiFi module family targeting embedded Wi-Fi 802.11 b/g/n applications. Inventek eS-WiFi modules offer a plug-and-play Wi-Fi solution that enables the embedded sector to integrate Wi-Fi and Bluetooth. The eS-WiFi module hardware system consists of an integrated antenna, a Cypress CYW4343W Wi-Fi radio, and a ST Micro host MCU. The module provides SPI and UART interfaces, enabling easy connection to an embedded design. eS-WiFi modules are offered in two configurations:

1. 15mmx34mm module with chip antenna (Designated as “-C” in p/n)
2. 15mmx34mm module with external antenna attached with a U.fl connector (Designated as “-U” p/n)

In addition, Inventek offers an evaluation board (ISMART4343) for customer evaluation and integration of the eS-WiFi module into their system.

1.4 Configuration of Tested System

The Test Sample was tested per *ANSI C63.10:2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices* for the intentional radiator aspect of the device and *ANSI C63.4:2014, Methods of Measurement of Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (2014)* for the unintentional radiator aspect of the device as well as FCC subpart B and C of Part 15 and per FCC KDB Publication number 558074 v03r05 for Digital Transmission Systems Operating Under section 15.247.

Digital RF conducted and radiated emissions data below 1 GHz were taken with the measuring receiver (or spectrum analyzer's) resolution bandwidth adjusted to 9 kHz and 120 kHz, respectively. All measurements performed above 1.0 GHz were made with a RBW of 1 MHz. All measurements are peak unless stated otherwise. The video filter associated with the spectrum analyzer was set to 3 times the RBW or as required per the standard throughout the evaluation process.

A list of EUT and Peripherals is found in Table 1 below. A block diagram of the tested system is shown in Figure 1. Test configuration photographs for spurious and fundamental emissions are provided in separate Appendices.

1.5 Test Facility

Testing was performed at US Tech's measurement facility at 3505 Francis Circle, Alpharetta, GA 30004. This site has been fully described and registered with the FCC. Its designation number is US5301. Additionally this site has also been fully described and submitted to Industry Canada (IC), and has been approved under file number 9900A-1.

1.6 Related Submittal(s)/Grant(s)

The EUT is subject to the following FCC Equipment Authorizations:

- a) Certification of the transmitter incorporated within the EUT, see test data presented herein.

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

Table 1.Supporting Equipment

PERIPHERAL MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	FCC/IC ID	CABLES P/D
Hewlett-Packard (Laptop)	Elite Book 8530p	2CE010000TG	Various	-
Hewlett-Packard (Power Supply Adapter)	384020-001	PA-1900-08H2	None	3.0 m UP
Antenna See antenna details	--	--	--	--

S= Shielded, U= Unshielded, P= Power, D= Data

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

2 Tests and Measurements

2.1 Test Equipment

The table below lists test equipment used to evaluate this product. Model numbers, serial numbers and their calibration status are included herein.

Table 2. Test Instruments

TEST INSTRUMENT	MODEL NUMBER	MANUFACTURER	SERIAL NUMBER	CALIBRATION DUE DATE
SPECTRUM ANALYZER	E4407B	AGILENT	US41442935	8/17/2020
SPECTRUM ANALYZER	*DSA815	RIGOL	DSA8A18030 0138	10/11/2018
RF PREAMP 100 kHz to 1.3 GHz	8447D	HEWLETT- PACKARD	1937A02980	3/7/2019
PREAMP 1.0 GHz to 26.0 GHz	8449B	HEWLETT- PACKARD	3008A00480	2/28/2019
LOOP ANTENNA	SAS- 200/562	A. H. Systems	142	1/22/2020 2 yr.
BICONICAL ANTENNA	3110B	EMCO	9307-1431	5/2/2019 2 yr
LOG PERIODIC ANTENNA	3146	EMCO	9305-3600	5/1/2019 2 yr
HORN ANTENNA	3115	EMCO	9107-3723	9/22/2018 2 yr
HIGH PASS FILTER	H3R020G2	MICROWAVE CHIRCUITS	001DC9528	3/08/2019
8 dB ATTENUATOR	VAT-8 15542	MINI-CIRCUITS	30519	3/8/2019

Note: The calibration interval of the above test instruments are 12 months unless stated otherwise and all calibrations are traceable to NIST/USA.

(*)= used for power line conducted emissions testing

2.2 Modifications to EUT Hardware

No modifications were made by US Tech to bring the EUT into compliance with FCC Part 15.247 or IC RSS-210 requirements.

2.3 Number of Measurements for Intentional Radiators (15.31(m), RSS-Gen 6.8)

Measurements of intentional radiators or receivers shall be performed and reported for each band in which the device can be operated, with the device operating at the number of frequencies in each band specified in Table 3 as follows:

Table 3. Number of Test Frequencies for Intentional Radiators

Frequency Range over which the device operates	Number of Frequencies	Location in the Range of operation
1 MHz or less	1	Middle
1 to 10 MHz	2	1 near the top 1 near the bottom
Greater than 10 MHz	3	1 near top 1 near middle 1 near bottom

Because the EUT operates over 2.4 GHz to 2.4835 GHz, 3 test frequencies will be used.

2.4 Frequency Range of Radiated Measurements (Part 15.33, RSS-Gen 6.13)

2.4.1 Intentional Radiator

The spectrum shall be investigated for the intentional radiator from the lowest RF signal generated in the EUT, without going below 9 kHz to the 10th harmonic of the highest fundamental frequency generated or 40 GHz, whichever is the lowest.

2.4.2 Unintentional Radiator

For the digital device, an unintentional radiator, the frequency range shall be 30 MHz to 1000 MHz, or to the range specified in 2.4.1 above, whichever is the higher range of investigation.

2.5 Measurement Detector Function and Bandwidth (CFR 15.35, RSS-Gen 6.9, 6.13)

The radiated and conducted emissions limits shown herein are based on the following:

2.5.1 Detector Function and Associated Bandwidth

On frequencies below 1000 MHz, the limits herein are based upon measurement equipment employing a CISPR Quasi-peak detector function and related measurement bandwidths (i.e. 9 kHz from 150 kHz to 30 MHz and 120 kHz from 30 MHz to 1000 MHz). Alternatively, measurements may be made with equipment employing a peak detector function as long as the same bandwidths specified for the Quasi-peak device are used.

2.5.2 Corresponding Peak and Average Requirements

Above 1000 MHz, radiated limits are based on measuring instrumentation employing an average detector function. When average radiated emissions are specified there is also a corresponding Peak requirement, as measured using a peak detector, of 20 dB greater than the average limit. For all measurements above 1000 MHz the Resolution Bandwidth shall be at least 1 MHz.

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

2.6 EUT Antenna Requirements (CFR 15.203, RSS-Gen 6.7)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. Only the antenna(s) listed in Table 4 will be used with this module.

Table 4. Allowed Antenna(s)

REPORT REFERENCE	MANUFACTURER	TYPE OF ANTENNA	MODEL	GAIN dB _i	TYPE OF CONNECTOR
Chip Antenna	Inventek Systems	Chip	W245-SC	+1.4	Chip
External Antenna	Inventek Systems	Trace	W24P-U	+3.2	U.FL

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

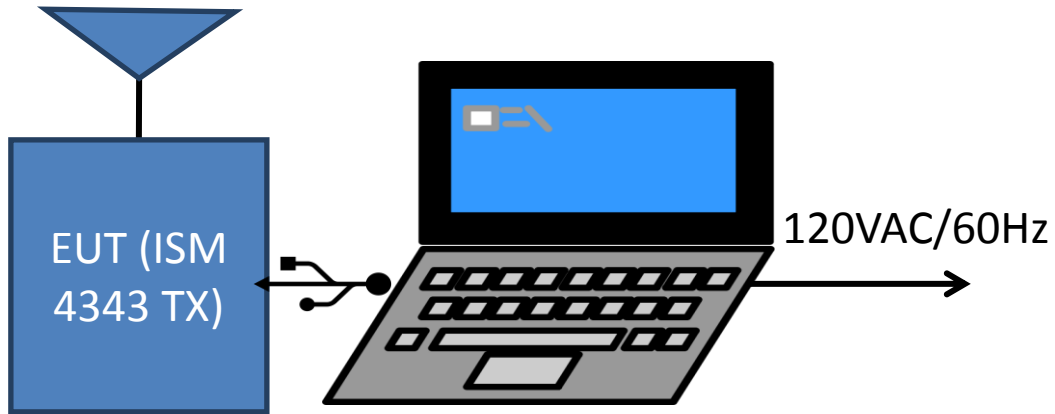


Figure 1. Block Diagram of Test Configuration

Note: The laptop is used for programming the radio module only.

2.7 Restricted Bands of Operation (Part 15.205, RSS-Gen 8.10)

Only spurious emissions can fall in the frequency bands of CFR 15.205. The field strength of these spurious cannot exceed the limits of 15.209. Radiated harmonics and other Spurious are examined for this requirement see paragraph 2.10.

2.8 Transmitter Duty Cycle (Part 15.35 (c), RSS-Gen 6.10)

The EUT employs pulse transmission however for testing purpose the EUT was programmed to transmit at a rate >98%. The pulse transmission requirements of this subpart were acknowledge and considered during testing.

When the radiated emissions limit is expressed as an average value, and the transmitter is pulsed, the measured field strength shall be determined by applying a Duty Cycle Correction Factor based upon dividing the total ON time during the first 100 ms period by 100 ms (or by the period if less than 100 ms). The duty cycle may also be expressed logarithmically in dB.

2.9 Antenna Conducted Intentional and Spurious Emissions (CFR 15.209, 15.247(d)) (IC RSS 247, 5.5))

The EUT was put into a continuous-transmit mode of operation and tested per ANSI C63.10-2013 for conducted out of band emissions emanating from the antenna port over the frequency range of 30 MHz to ten times the highest clock frequency generate or used in this case, 25 GHz. A conducted scan was performed on the EUT to identify and record spurious signals that were related to the transmitter. Antenna Conducted Emissions of a significant magnitude that fell within restricted bands were then measured as radiated emissions on the OATS. The conducted emissions graphs are found in Figures 3 through 8 below. The limit for antenna conducted power is 1 Watt (30 dBm) per 15.247 (b)(3).

For Conducted RF antenna tests, the RBW was set to 100 kHz, video bandwidth (VBW) > RBW, scan up through the 10th harmonic of the fundamental frequency. All harmonics/spurs must be at least 20 dB down from the highest emission level within the authorized band.

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

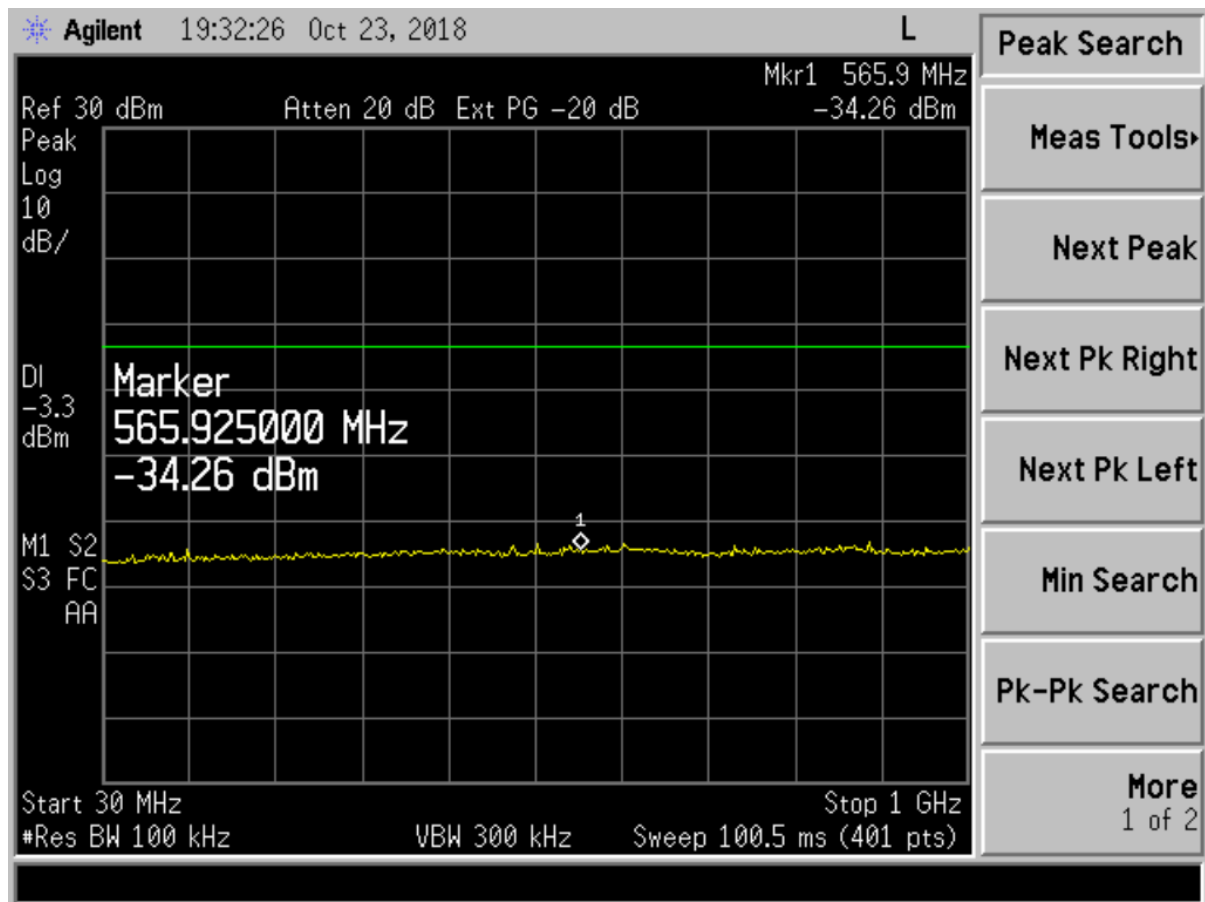


Figure 2. 802.11b, Channel 1, 30-1000 MHz

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

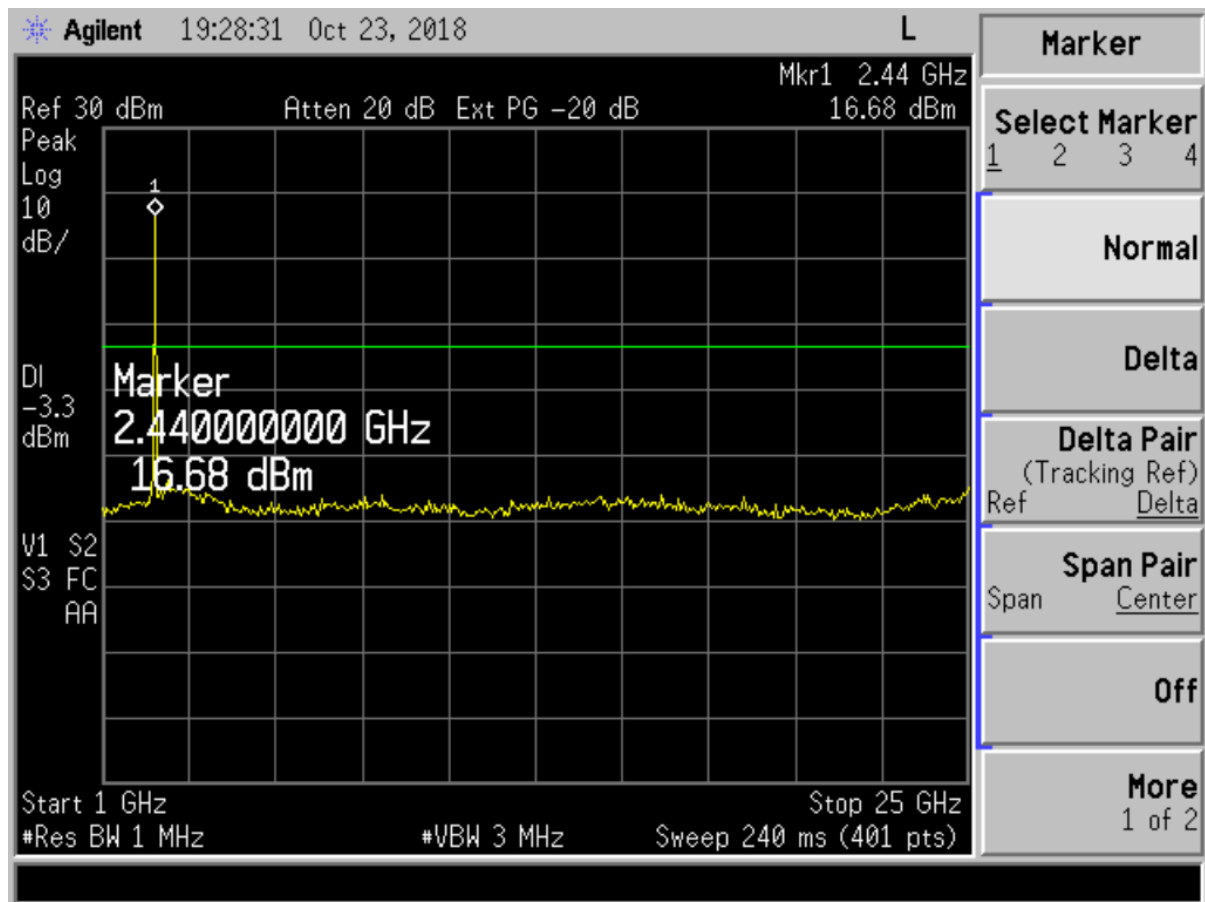


Figure 3. 802.11b, Channel 1, 1 – 25 GHz

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

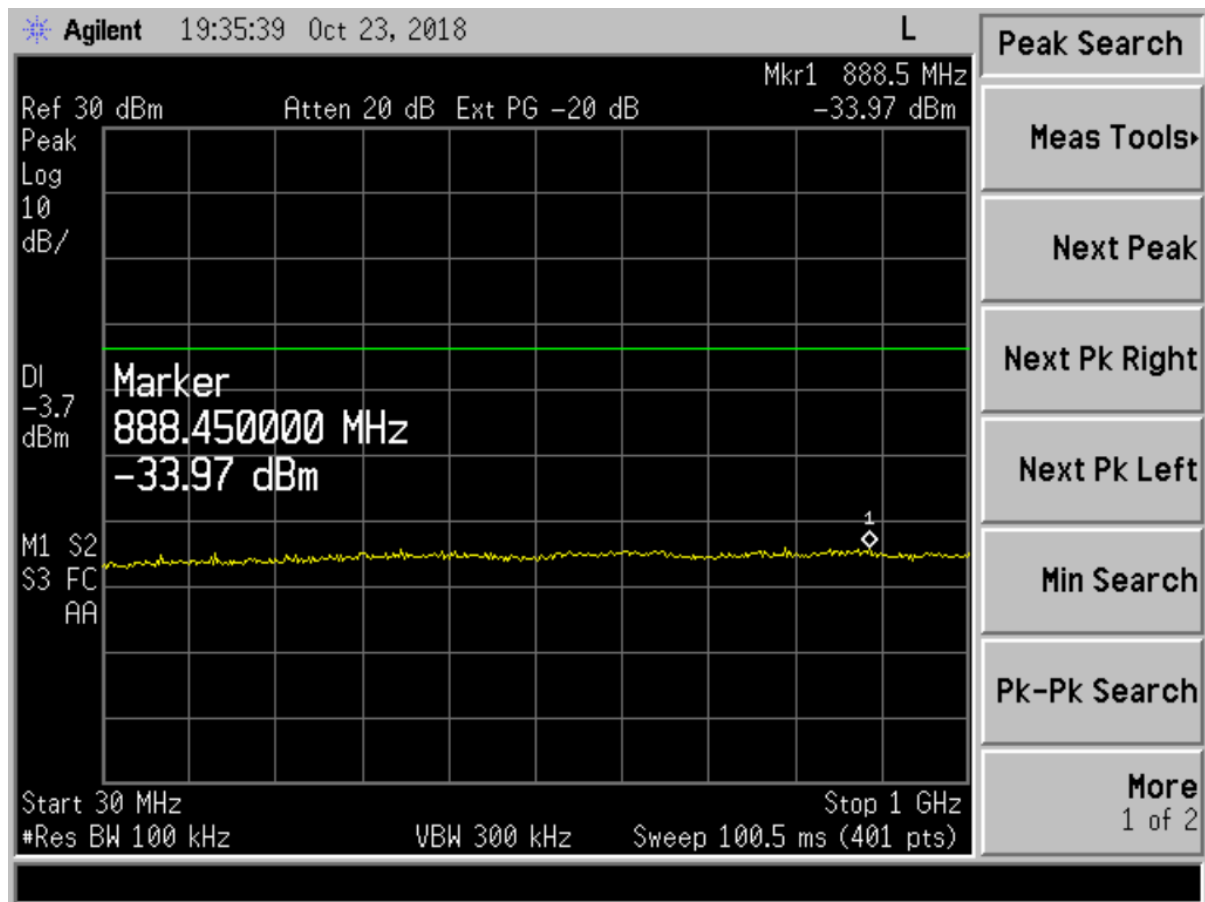


Figure 4. 802.11b, Channel 6, 30-1000 MHz

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

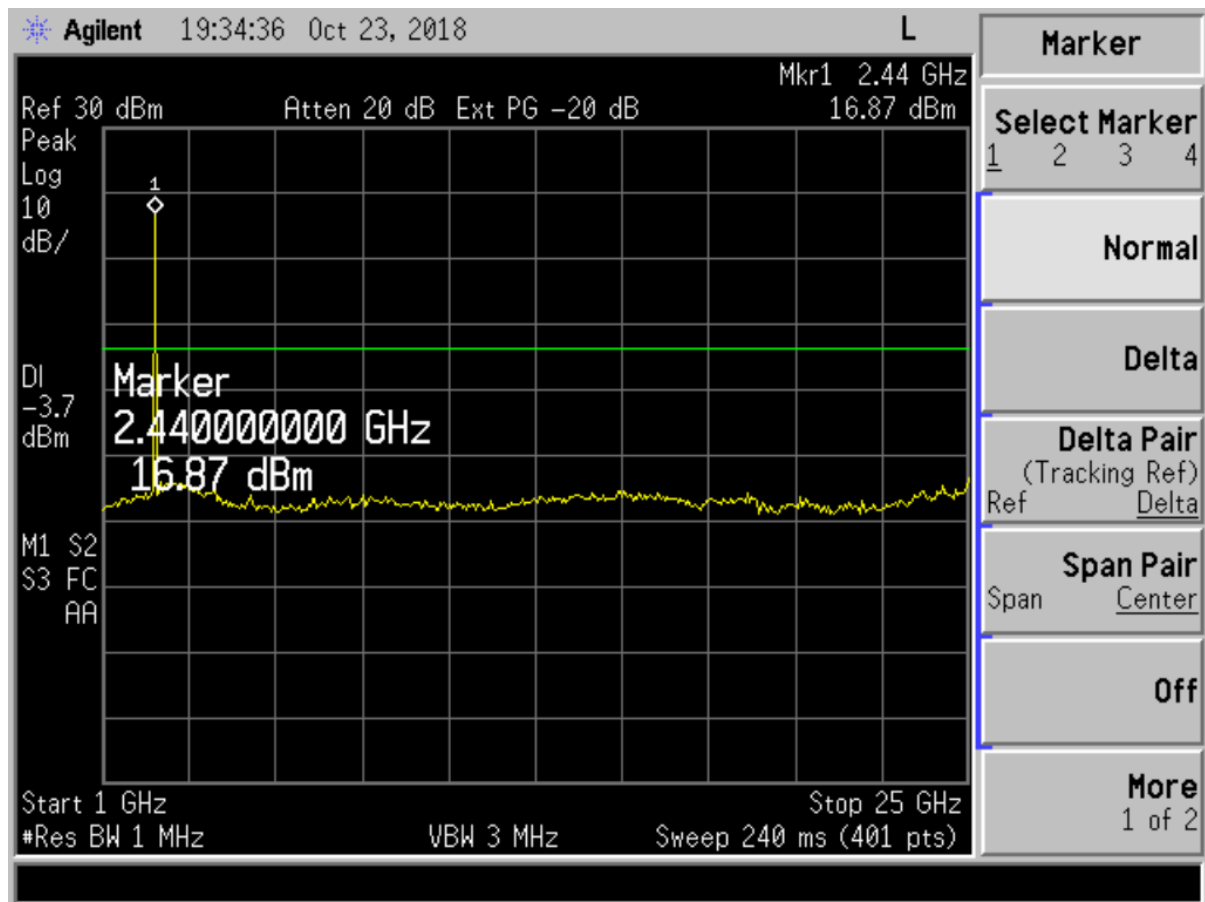


Figure 5. 802.11b, Channel 6, 1 – 25 GHz

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

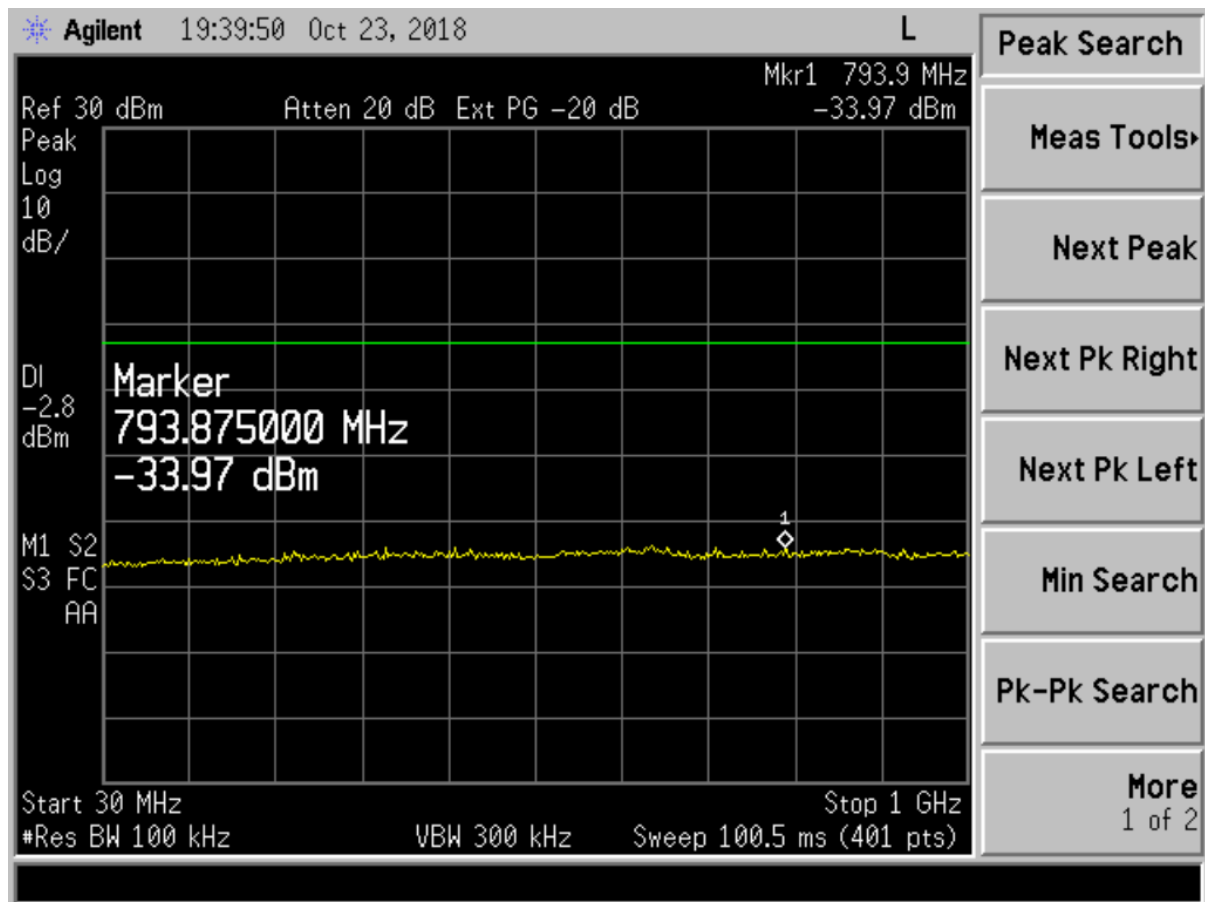


Figure 6. 802.11b, Channel 11, 30-1000 MHz

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

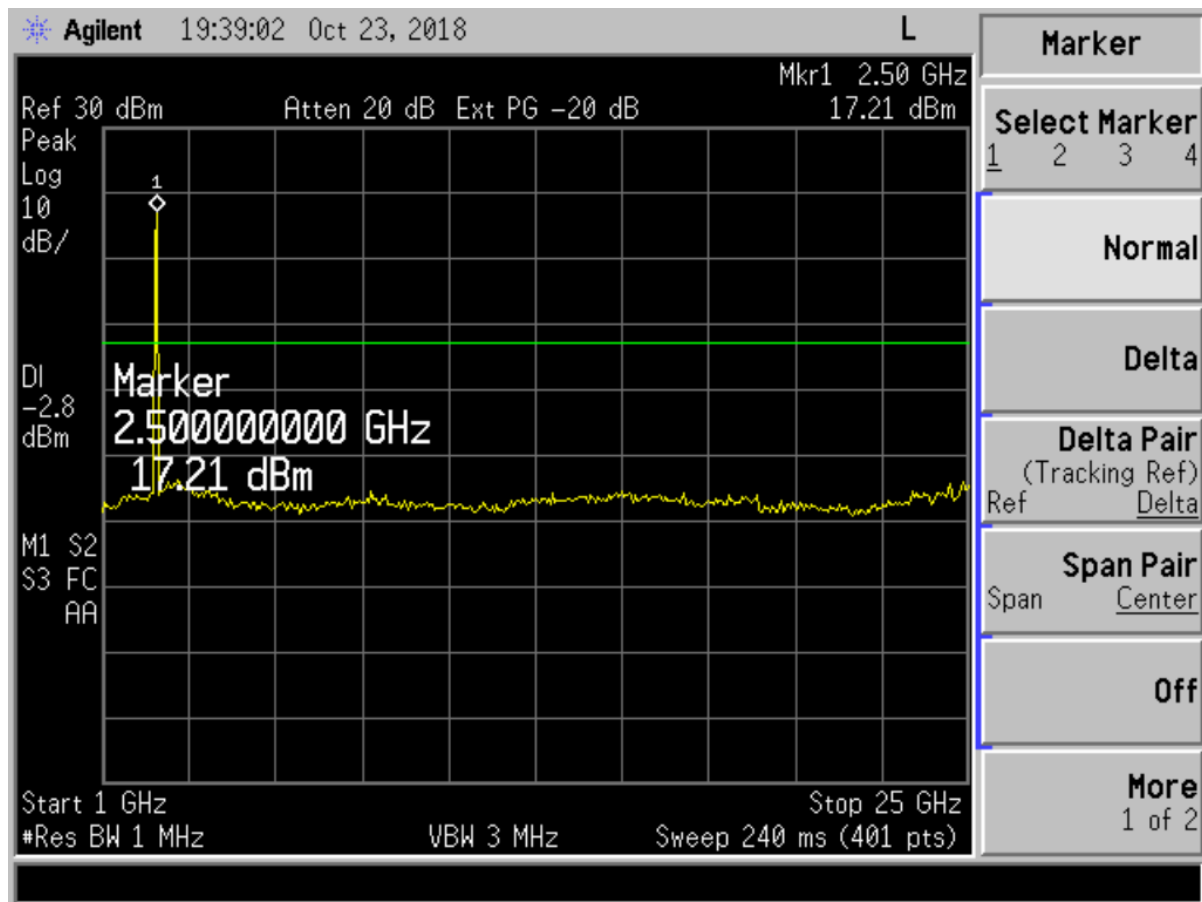


Figure 7. 802.11b, Channel 11, 1 - 25 GHz

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

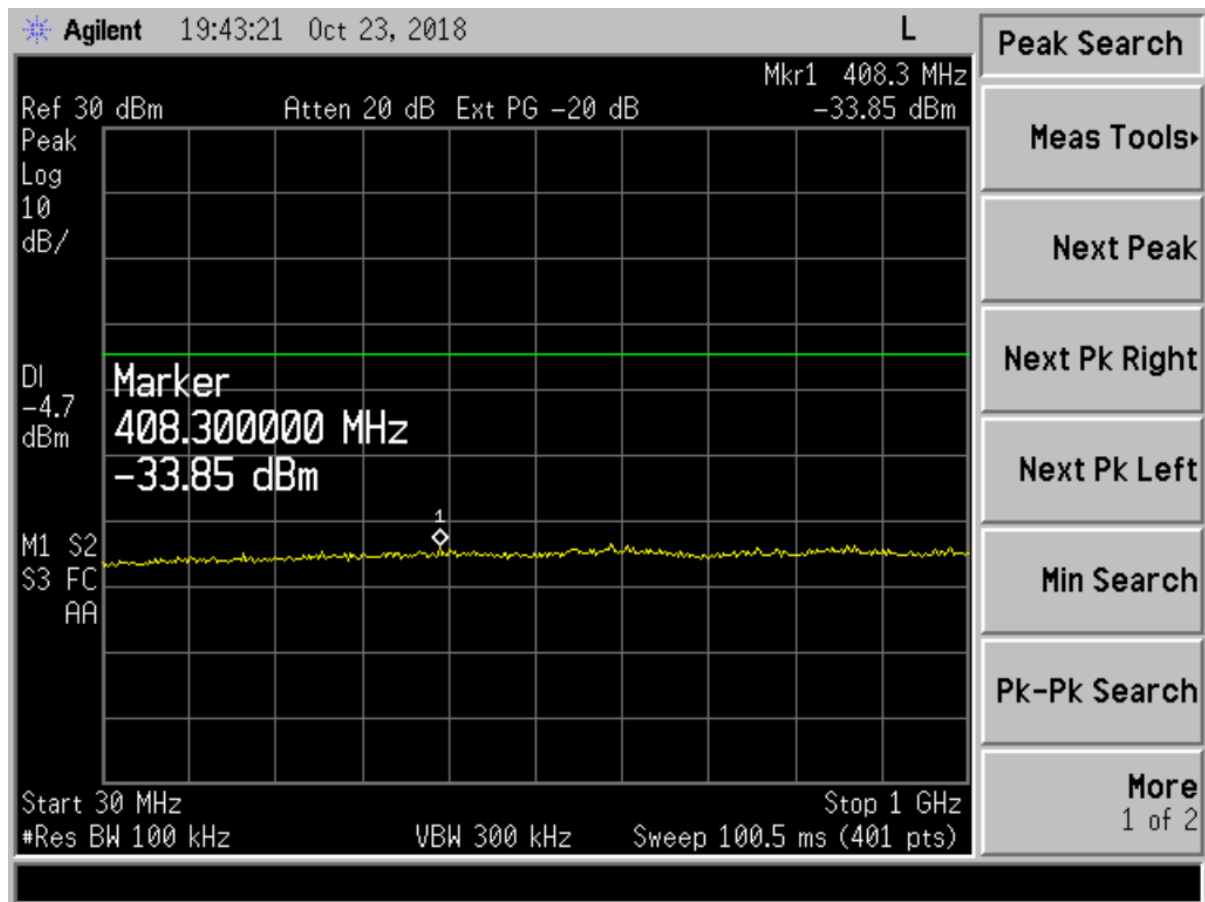


Figure 8. 802.11g, Channel 1, 30-1000 MHz

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

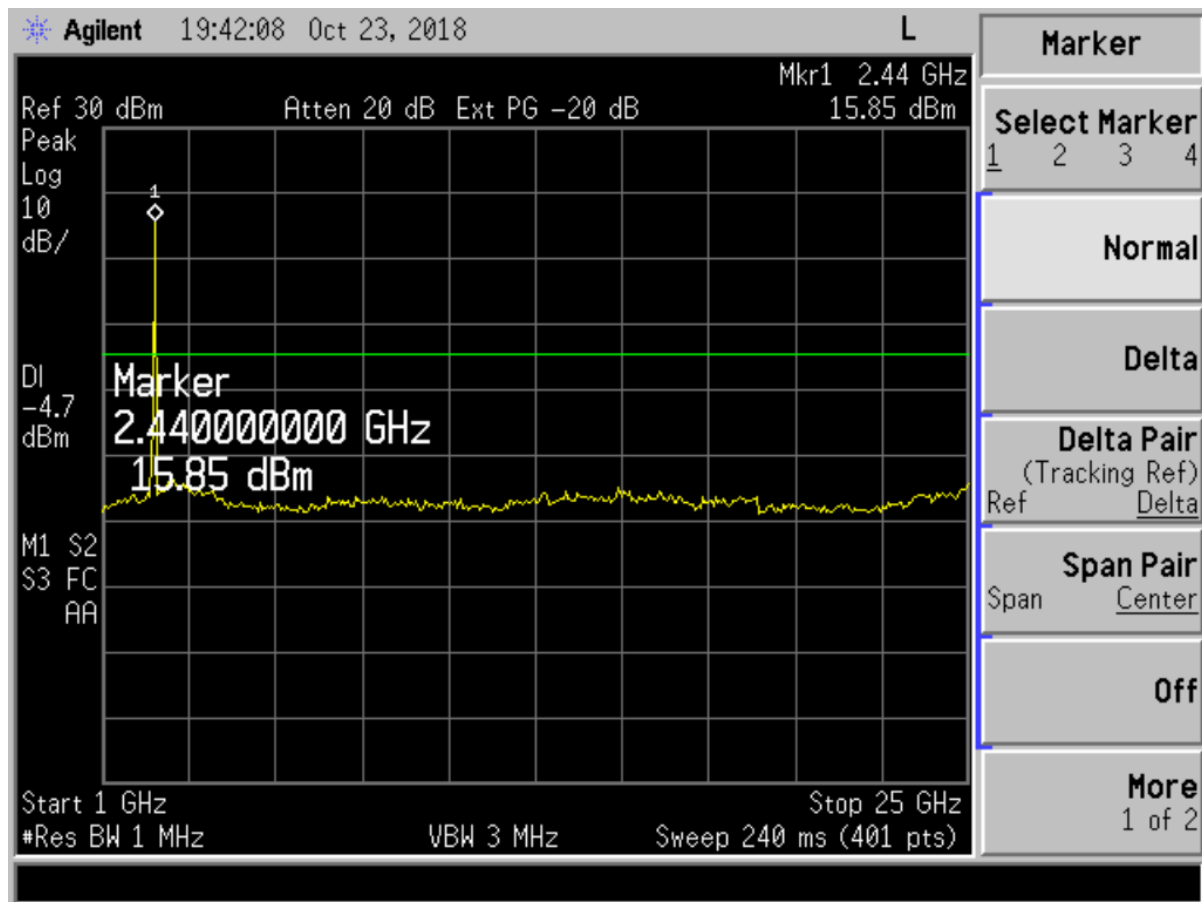


Figure 9. 802.11g, Channel 1, 1 – 25 GHz

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

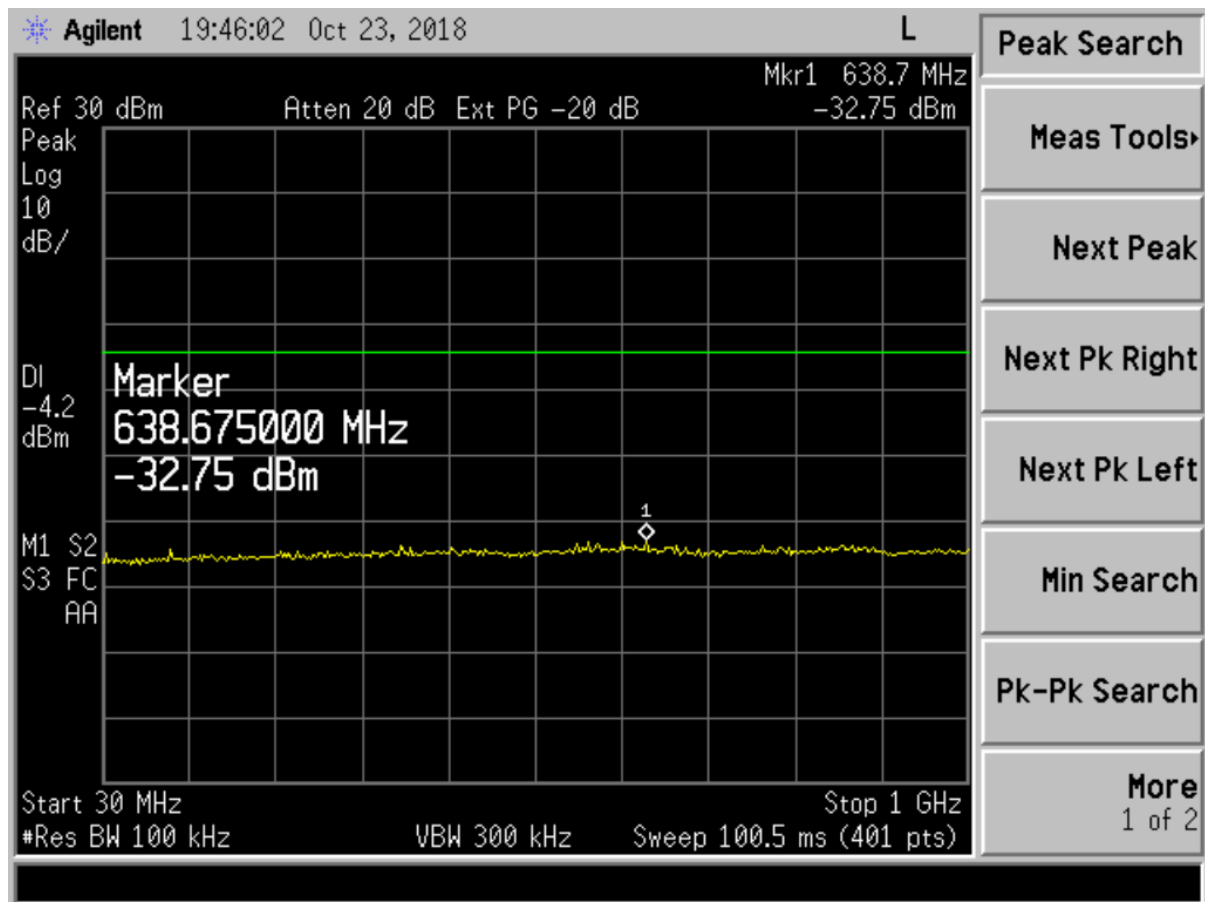


Figure 10. 802.11g, Channel 6, 30-1000 MHz

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

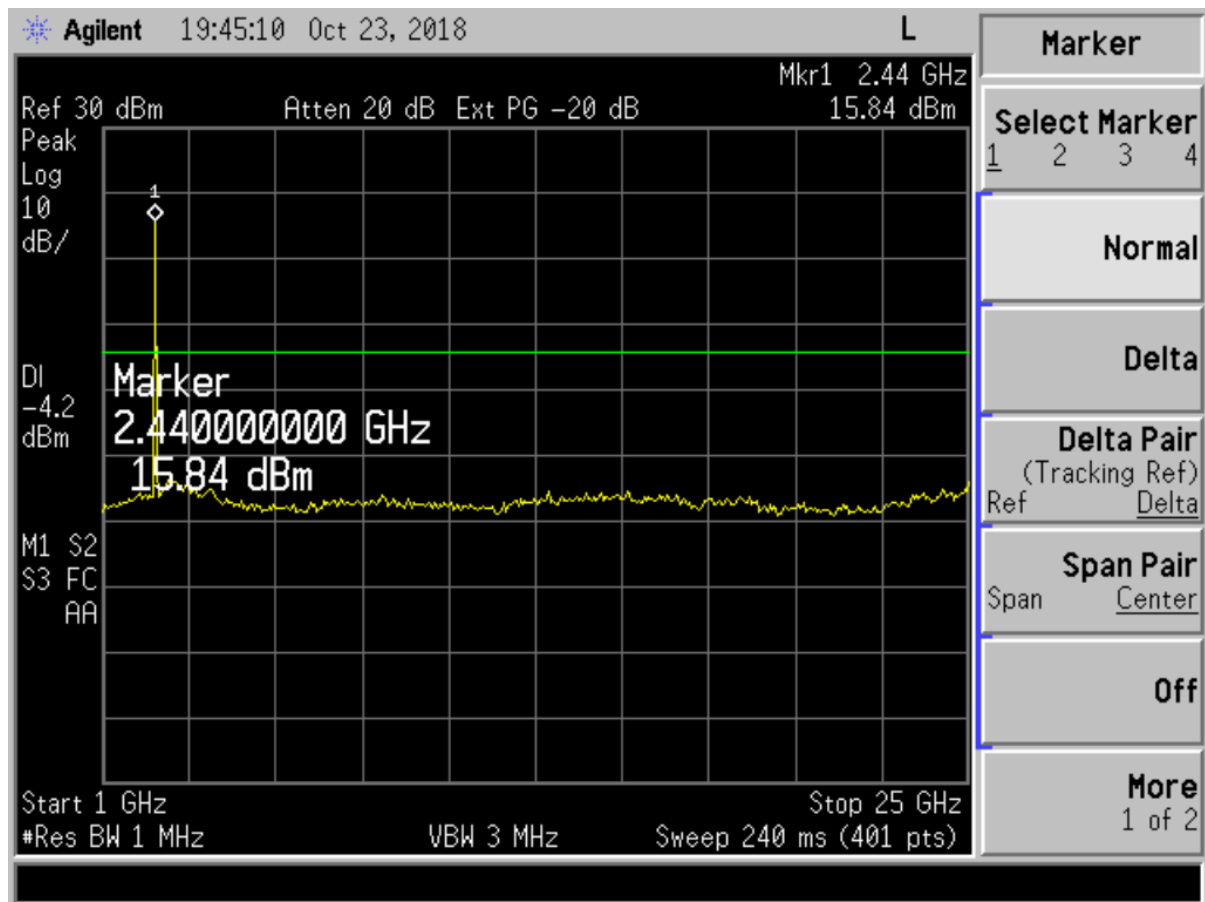


Figure 11. 802.11g, Channel 6, 1 - 25 GHz

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

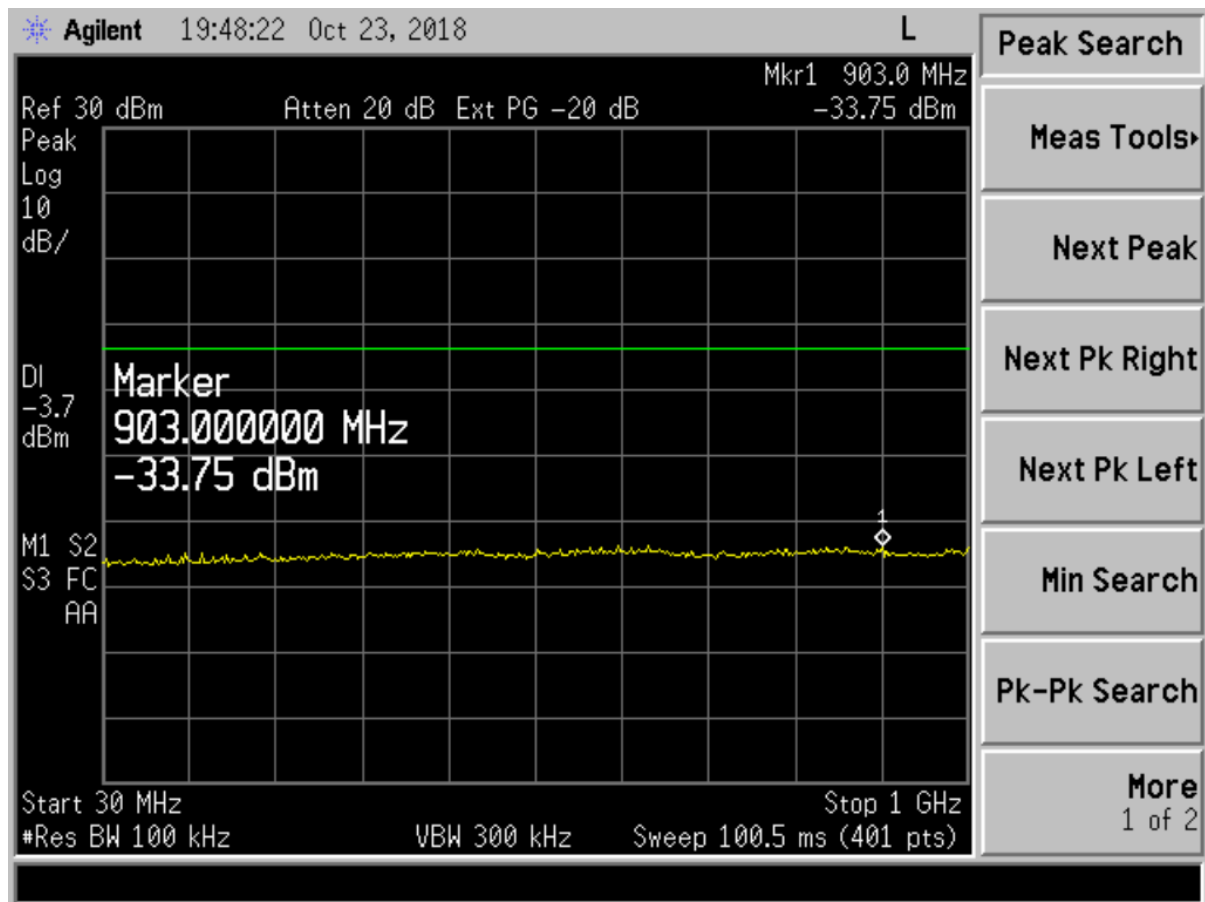


Figure 12. 802.11g, Channel 11, 30-1000 MHz

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

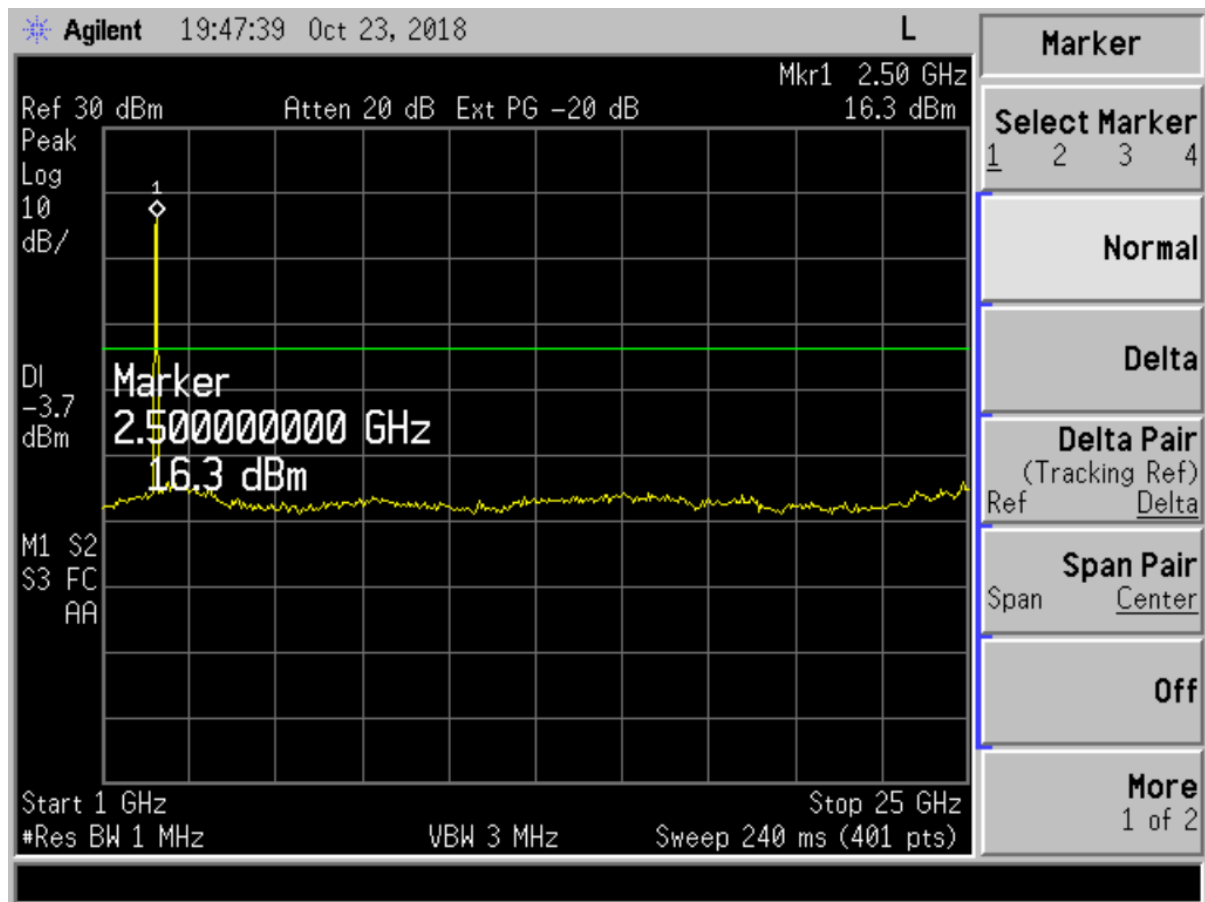


Figure 13. 802.11g, Channel 11, 1 – 25 GHz

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

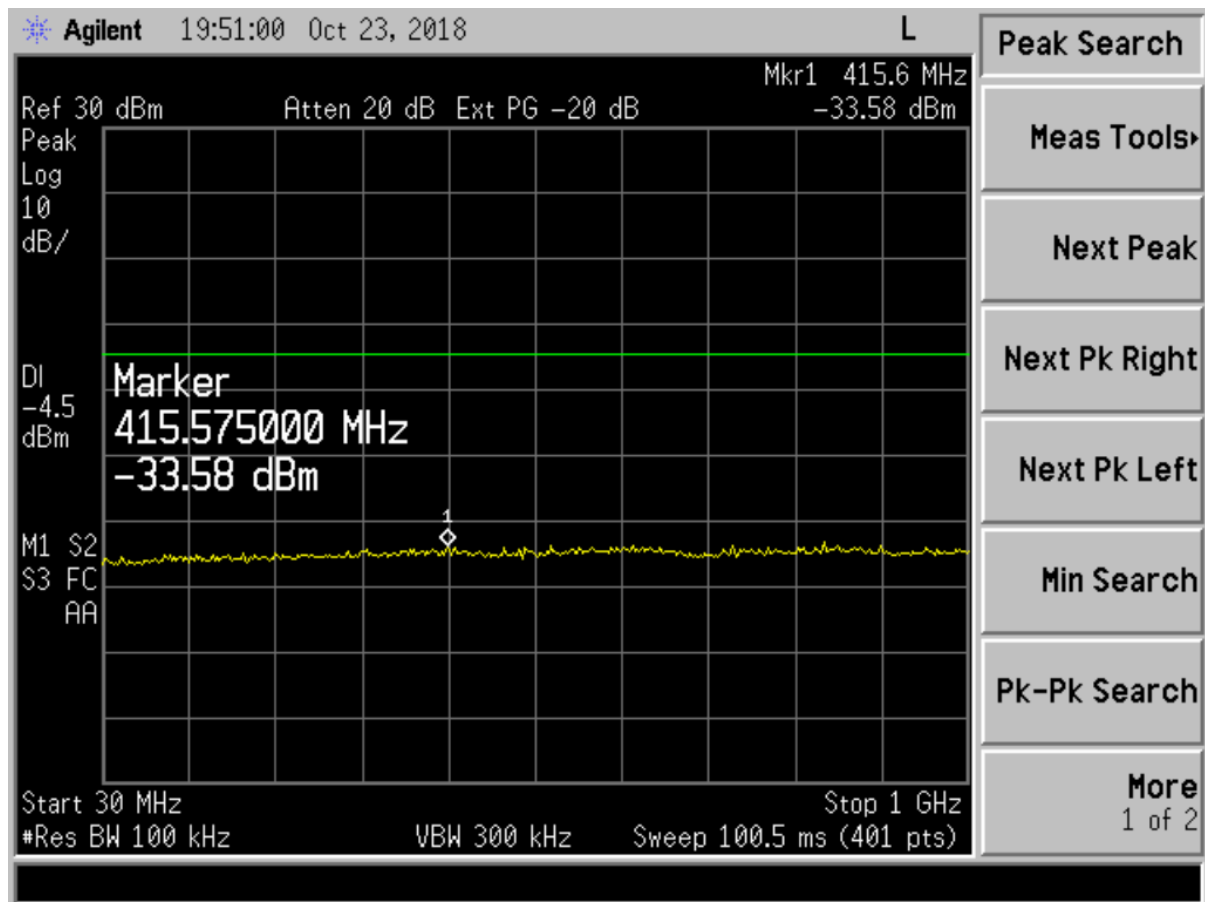


Figure 14. 802.11n, Channel 1, 30-1000 MHz

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

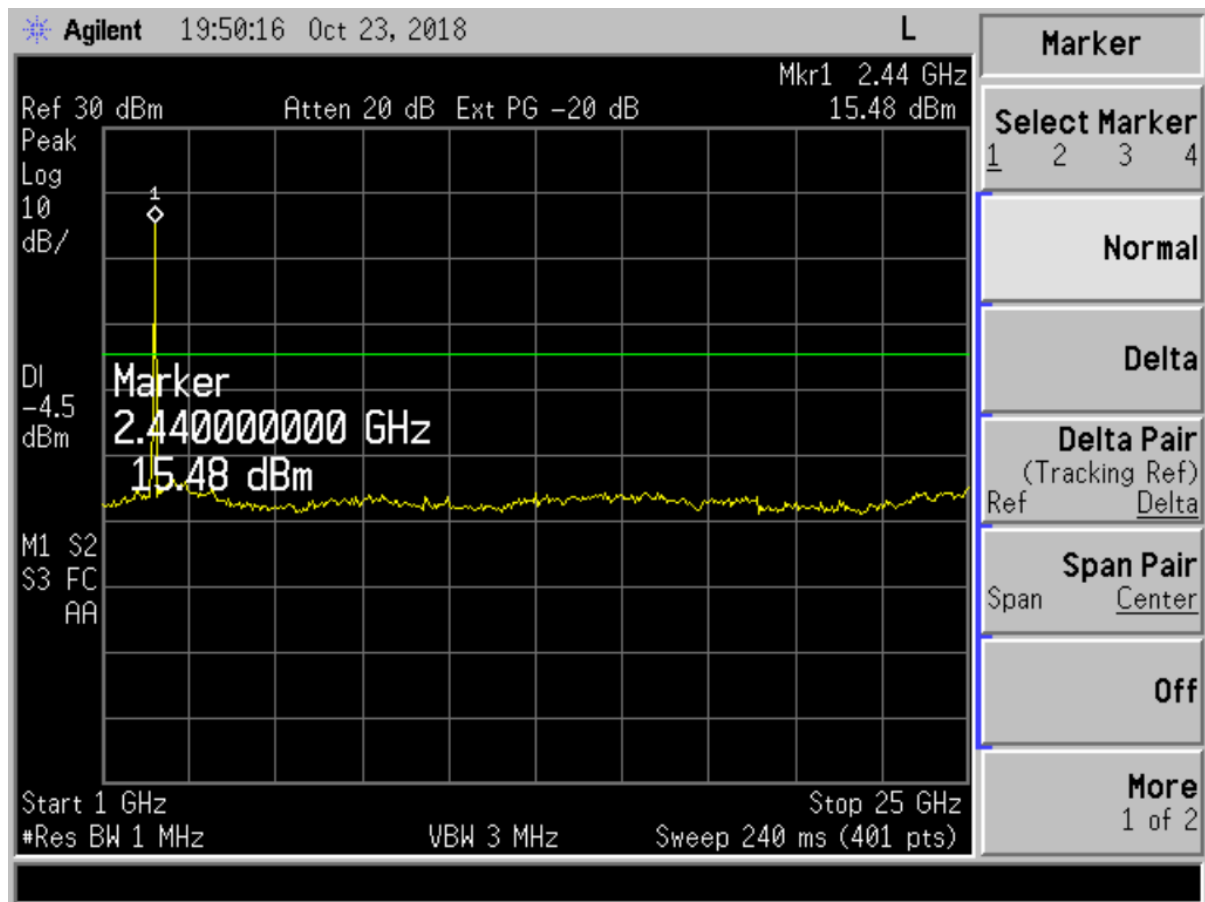


Figure 15. 802.11n, Channel 1, 1- 25 GHz

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

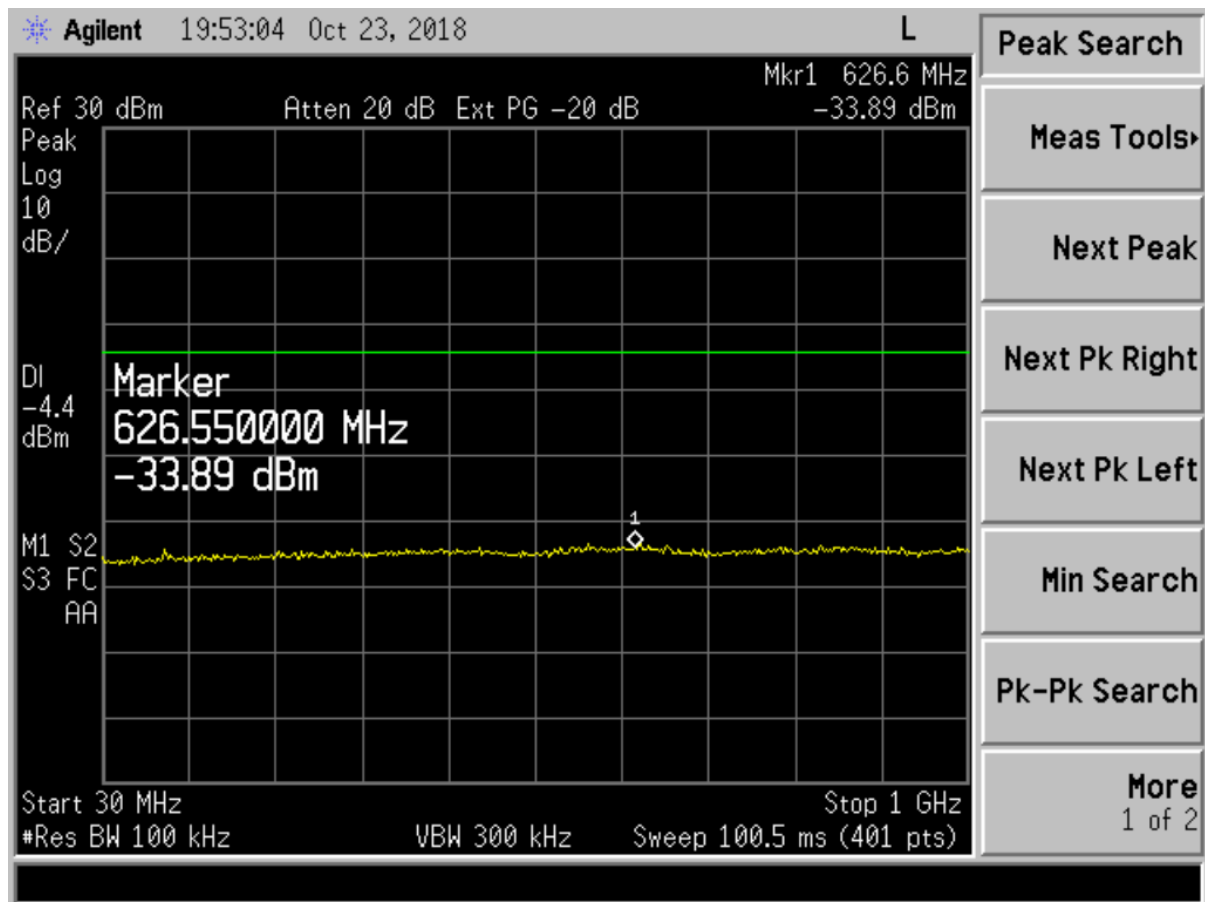


Figure 16. 802.11n, Channel 6, 30-1000 MHz

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

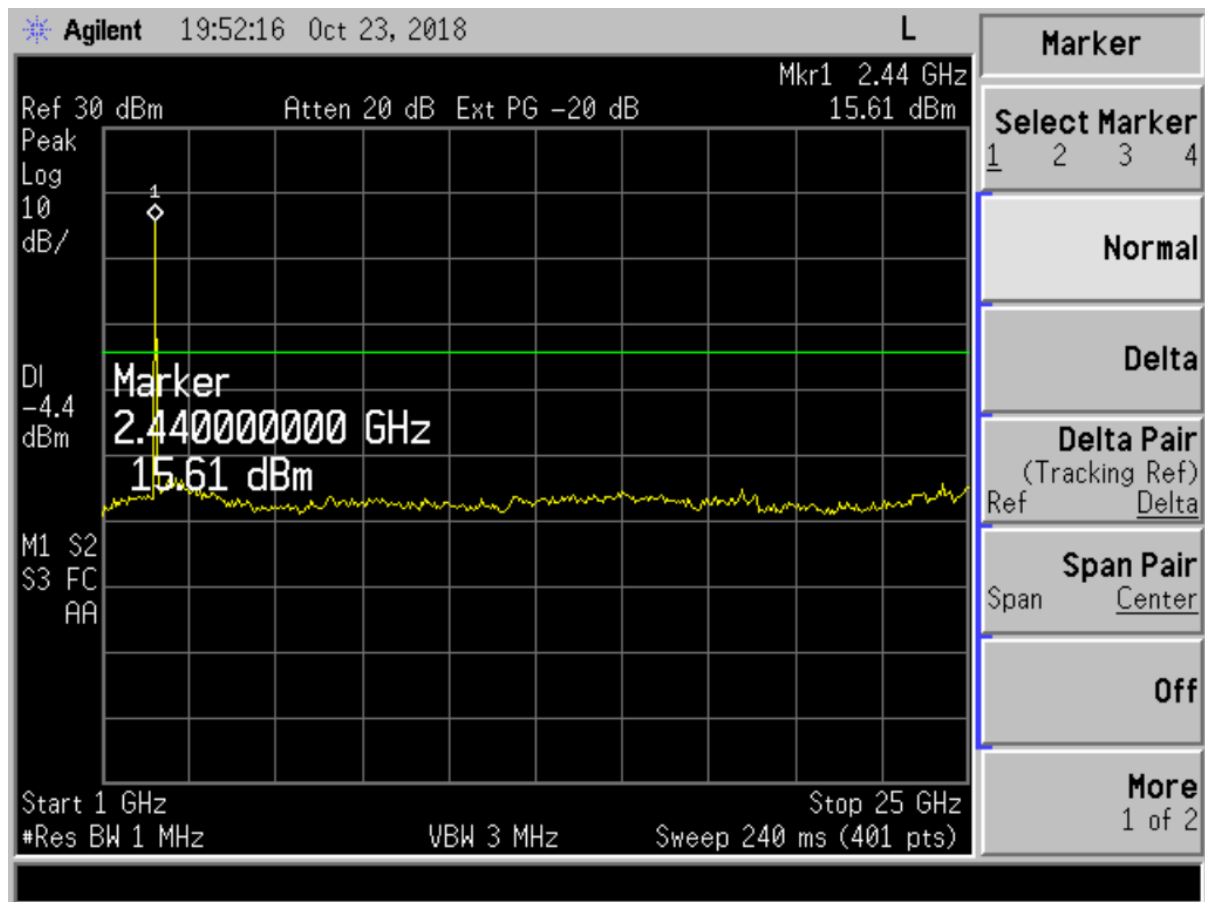


Figure 17. 802.11n, Channel 6, 1 – 25 GHz

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

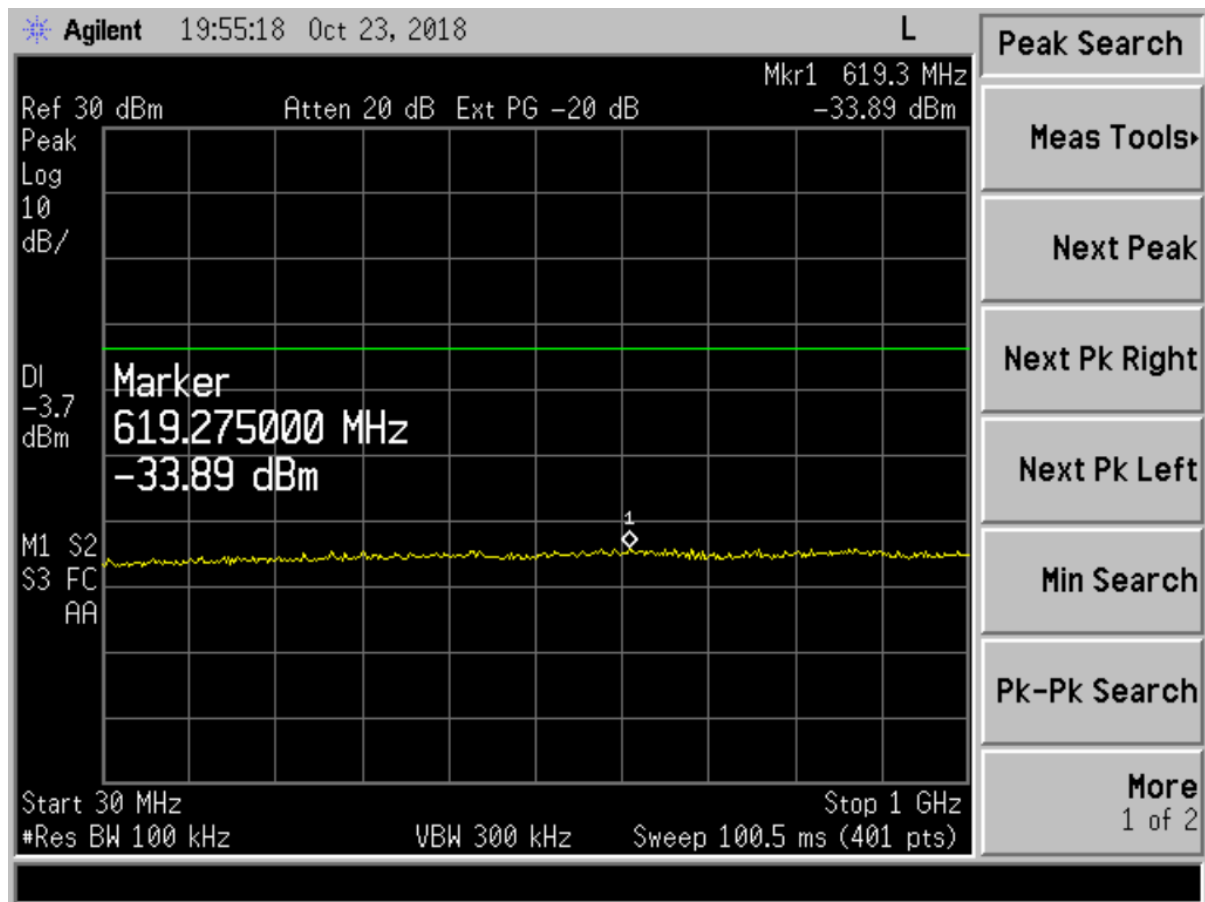


Figure 18. 802.11n, Channel 11, 30-1000 MHz

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

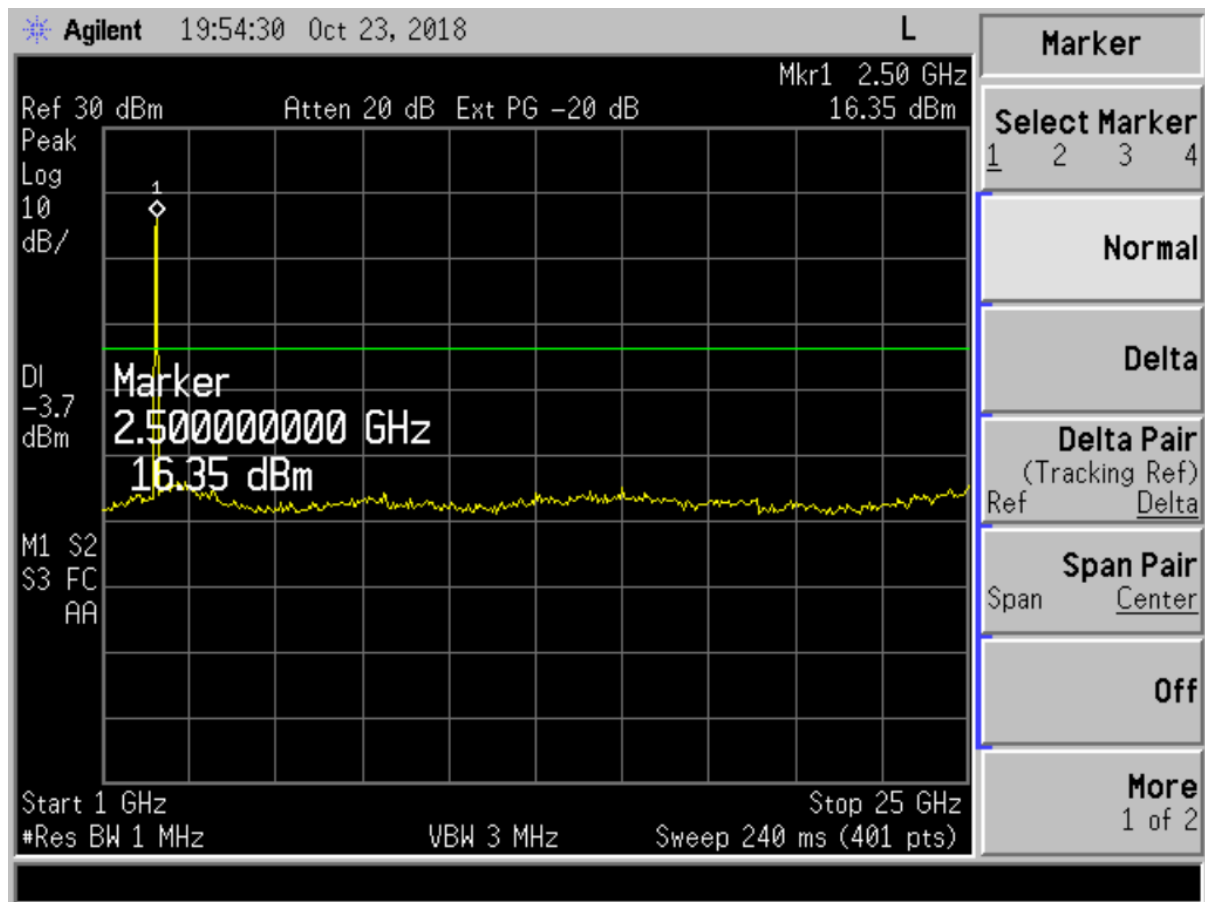


Figure 19. 802.11n, Channel 11, 1 – 25 GHz

2.10 Intentional Radiator, Radiated Emissions (CFR 15.209, 15.247(d), RSS-247, 5.5)

On the test site, the EUT was placed on top of a non-conductive table, 80 cm above the floor for measurements below 1 GHz and 150 cm above the floor for measurements > 1 GHz. The EUT was also evaluated in three orthogonal positions to determine the worst case position. The front of the EUT faced the measurement antenna located 3 meters away. Each signal measured was maximized by raising and lowering the receive antenna between 1 and 4 meters in height while monitoring the ever changing spectrum analyzer display (with channel A in the Clear-Write mode and channel B in the Max-Hold mode) for the largest signal visible. That exact antenna height where the signal was maximized was recorded for reproducibility purposes. Also, the EUT was rotated about its Y-axis while monitoring the Spectrum Analyzer display for maximum. The EUT azimuth was recorded for reproducibility purposes. The EUT was measured when both maxima were simultaneously satisfied.

For radiated measurements, the EUT was set into a continuous transmission mode. Below 1 GHz, the RBW of the measuring instrument was set equal to 120 kHz. Peak measurements above 1 GHz were measured using a RBW = 1 MHz, with a VBW \geq RBW. The results of peak radiated spurious emissions falling within restricted bands are given in Table 6 below.

For Average measurements above 1 GHz, the emissions were measured using RBW = 1 MHz and VBW = 10 Hz or the duty cycle correction factor was applied to the Peak recorded value.

US Tech Test Report:
 FCC ID:
 IC:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15/IC RSS Certification
 O7P-4343
 10147A-4343
 18-0268
 October 19, 2018
 Inventek Systems
 ISM4343-X

Table 5.b mode - Peak Radiated Fundamental & Harmonic Emissions (Chip Antenna)

Tested By: AF	Test: FCC Part 15,247(d)			Client: Inventek Systems				
	Project: 18-0268			Model: ISM4343-X				
Frequency (MHz)	Test Data (dBuV)	Additional Factor	AF+CL-PA (dB/m)	Corrected Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	Margin (dB)	Detector
Low Channel - PEAK								
2412.00	71.13	0.00	33.95	105.08	--	3.0m./HORZ	--	PK
*4824.00	49.47	0.00	6.52	55.99	74.0	3.0m./HORZ	18.0	PK
7236.00	40.65	0.00	15.10	55.75	74.0	3.0m./HORZ	18.3	PK
Mid Channel - PEAK								
2437.00	76.69	0.00	34.05	110.74	--	3.0m./HORZ	--	PK
*4874.00	49.57	0.00	6.46	56.03	74.0	3.0m./HORZ	18.0	PK
*7311.00	40.96	0.00	15.66	56.62	74.0	3.0m./HORZ	17.4	PK
High Channel- PEAK								
2462.00	78.85	0.00	34.06	112.91	--	3.0m./HORZ	--	PK
*4924.00	49.83	0.00	7.64	57.47	74.0	3.0m./HORZ	16.5	PK
*7386.00	40.83	0.00	15.51	56.34	74.0	3.0m./HORZ	17.7	PK

1. (*) Falls within the restricted bands of CFR 15.205. Limits based on CFR15.209& 15.247.
2. No other signals detected within 20 dB of specification limit. Harmonics investigated up to the 10th harmonic

Sample Calculation at 2412.00 MHz:

Magnitude of Measured Frequency	71.13	dBuV
+Additional Factor	0.00	dB
+Antenna Factor + Cable Loss+ Amplifier Gain	33.95	dB/m
Corrected Result	105.08	dBuV/m

Test Date: September 18, 2018

Tested By: *Afzal Fazal*
 Signature:

Name: Afzal Fazal

US Tech Test Report:
 FCC ID:
 IC:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15/IC RSS Certification
 O7P-4343
 10147A-4343
 18-0268
 October 19, 2018
 Inventek Systems
 ISM4343-X

Table 6.bmode - Average Radiated Fundamental & Harmonic Emissions (Chip Antenna)

Tested By: AF	Test: FCC Part 15,247(d)				Client: Inventek Systems			
	Project: 18-0268				Model: ISM4343-X			
Frequency (MHz)	Test Data (dBuV)	Additional Factor	AF+CL- PA (dB/m)	Corrected Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	Margin (dB)	Detector
	Low Channel - Average							
2412.00	63.21	0.00	33.95	97.16	--	3.0m./HORZ	--	AVG
*4824.00	39.17	0.00	6.52	45.69	54.0	3.0m./HORZ	8.3	AVG
7236.00	30.49	0.00	15.10	45.59	54.0	3.0m./HORZ	8.4	AVG
	Mid Channel-Average							
2437.00	68.32	0.00	34.05	102.37	--	3.0m./HORZ	--	AVG
*4874.00	38.81	0.00	6.46	45.27	54.0	3.0m./HORZ	8.7	AVG
*7311.00	30.22	0.00	15.66	45.88	54.0	3.0m./HORZ	8.1	AVG
	High Channel-Average							
2462.00	69.52	0.00	34.06	103.58	--	3.0m./HORZ	--	AVG
*4924.00	39.34	0.00	7.64	46.98	54.0	3.0m./HORZ	7.0	AVG
*7386.00	30.34	0.00	15.51	45.85	54.0	3.0m./HORZ	8.1	AVG

1. (*) Falls within the restricted bands of CFR 15.205. Limits based on CFR15.209 CFR 15.35.
2. No other signals detected within 20 dB of specification limit. Harmonics investigated up to the 10th harmonic
3. Duty cycle applied where applicable.

Sample Calculation at 2412.00MHz:

Magnitude of Measured Frequency	63.21	dBuV
+Additional Factor (filter + duty cycle)	0.00	dB
+Antenna Factor + Cable Loss+ Amplifier Gain – Duty Cycle	33.95	dB/m
Corrected Result	97.16	dBuV/m

Test Date: September 18, 2018

Tested By

Signature: *Afzal Fazal*

Name: Afzal Fazal

Note: The transmitter was programmed to transmit at >98% during all testing.

US Tech Test Report:
 FCC ID:
 IC:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15/IC RSS Certification
 O7P-4343
 10147A-4343
 18-0268
 October 19, 2018
 Inventek Systems
 ISM4343-X

Table 7. g mode - Peak Radiated Fundamental & Harmonic Emissions (Chip Antenna)

Tested By: AF	Test: FCC Part 15,247(d)			Client: Inventek Systems				
	Project: 18-0268			Model: ISM4343-X				
Frequency (MHz)	Test Data (dBuV)	Additional Factor	AF+CL-PA (dB/m)	Corrected Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	Margin (dB)	Detector
Low Channel - PEAK								
2412.00	70.80	0.00	33.95	104.75	--	3.0m./HORZ	--	PK
*4824.00	49.41	0.00	6.52	55.93	74.0	3.0m./HORZ	18.1	PK
7236.00	41.35	0.00	15.10	56.45	74.0	3.0m./HORZ	17.6	PK
Mid Channel - PEAK								
2437.00	75.85	0.00	34.05	109.90	--	3.0m./HORZ	--	PK
*4874.00	49.78	0.00	6.46	56.24	74.0	3.0m./HORZ	17.8	PK
*7311.00	41.17	0.00	15.66	56.83	74.0	3.0m./HORZ	17.2	PK
High Channel- PEAK								
2462.00	78.94	0.00	34.06	113.00	--	3.0m./HORZ	--	PK
*4924.00	49.20	0.00	7.64	56.84	74.0	3.0m./HORZ	17.8	PK
*7386.00	40.46	0.00	15.51	55.97	74.0	3.0m./HORZ	18.0	PK

1. (*) Falls within the restricted bands of CFR 15.205. Limits based on CFR15.209& 15.247.
 2. No other signals detected within 20 dB of specification limit. Harmonics investigated up to the 10th harmonic

Sample Calculation at 2412.00 MHz:

Magnitude of Measured Frequency	70.80	dBuV
+Additional Factor	0.00	dB
+Antenna Factor + Cable Loss+ Amplifier Gain	33.95	dB/m
Corrected Result	104.75	dBuV/m

Test Date: September 18, 2018

Tested By

Signature: *Afzal Fazal*

Name: Afzal Fazal

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

Table 8. g mode - Average Radiated Fundamental & Harmonic Emissions (Chip Antenna)

Tested By: AF	Test: FCC Part 15,247(d)			Client: Inventek Systems				
	Project: 18-0268			Model: ISM4343-X				
Frequency (MHz)	Test Data (dBuV)	Additional Factor	AF+CL-PA (dB/m)	Corrected Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	Margin (dB)	Detector
Low Channel–Average								
2412.00	57.16	0.00	33.95	91.11	--	3.0m./HORZ	--	AVG
*4824.00	39.90	0.00	6.52	46.42	54.0	3.0m./HORZ	7.6	AVG
7236.00	30.41	0.00	15.10	45.51	54.0	3.0m./HORZ	8.5	AVG
Mid Channel –Average								
2437.00	61.96	0.00	34.05	96.01	--	3.0m./HORZ	--	AVG
*4874.00	38.88	0.00	6.46	45.34	54.0	3.0m./HORZ	8.7	AVG
*7311.00	30.42	0.00	15.66	46.08	54.0	3.0m./HORZ	7.9	AVG
High Channel–Average								
2462.00	64.92	0.00	34.06	98.98	--	3.0m./HORZ	--	AVG
*4924.00	39.54	0.00	7.64	47.18	54.0	3.0m./HORZ	6.8	AVG
*7386.00	30.18	0.00	15.51	45.69	54.0	3.0m./HORZ	8.3	AVG

1. (*) Falls within the restricted bands of CFR 15.205. Limits based on CFR15.209 CFR 15.35.
2. No other signals detected within 20 dB of specification limit. Harmonics investigated up to the 10th harmonic
3. Duty cycle applied where applicable.

Sample Calculation at 2412.00 MHz:

Magnitude of Measured Frequency	57.16	dBuV
+Additional Factor	0.00	dB
+Antenna Factor + Cable Loss+ Amplifier Gain	33.95	dB/m
Corrected Result	91.11	dBuV/m

Test Date: September 18, 2018

Tested By

Signature: 

Name: Afzal Fazal

Note: The transmitter was programmed to transmit at >98% during all testing.

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

Table 9. n mode – Peak Radiated Fundamental & Harmonic Emissions (Chip Antenna)

Tested By: AF	Test: FCC Part 15,247(d)			Client: Inventek Systems				
	Project: 18-0268			Model: ISM4343-X				
Frequency (MHz)	Test Data (dBuV)	Additional Factor	AF+CL-PA (dB/m)	Corrected Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	Margin (dB)	Detector
Low Channel - PEAK								
2412.00	70.12	0.00	33.95	104.07	--	3.0m./HORZ	--	PK
*4824.00	49.58	0.00	6.52	56.10	74.0	3.0m./HORZ	17.9	PK
7236.00	41.13	0.00	15.10	56.23	74.0	3.0m./HORZ	17.8	PK
Mid Channel – PEAK								
2437.00	75.38	0.00	34.05	109.43	--	3.0m./HORZ	--	PK
*4874.00	49.73	0.00	6.46	56.19	74.0	3.0m./HORZ	17.8	PK
*7311.00	40.97	0.00	15.66	56.63	74.0	3.0m./HORZ	17.4	PK
High Channel– PEAK								
2462.00	78.81	0.00	34.06	112.87	--	3.0m./HORZ	--	PK
*4924.00	49.53	0.00	7.64	57.17	74.0	3.0m./HORZ	16.8	PK
*7386.00	41.16	0.00	15.51	56.67	74.0	3.0m./HORZ	17.3	PK

1. (*) Falls within the restricted bands of CFR 15.205. Limits based on CFR15.209& 15.247.
2. No other signals detected within 20 dB of specification limit. Harmonics investigated up to the 10th harmonic

Sample Calculation at 2412.00 MHz:

Magnitude of Measured Frequency	70.12	dBuV
+Additional Factor	0.00	dB
+Antenna Factor + Cable Loss+ Amplifier Gain	33.95	dB/m
Corrected Result	104.07	dBuV/m

Test Date: September 18, 2018

Tested By

Signature:

Afzal Fazal

Name: Afzal Fazal

US Tech Test Report:
 FCC ID:
 IC:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15/IC RSS Certification
 O7P-4343
 10147A-4343
 18-0268
 October 19, 2018
 Inventek Systems
 ISM4343-X

Table 10. n mode – Average Radiated Fundamental & Harmonic Emissions (Chip Antenna)

Tested By: AF	Test: FCC Part 15,247(d)			Client: Inventek Systems				
	Project: 18-0268			Model: ISM4343-X				
Frequency (MHz)	Test Data (dBuV)	Additional Factor	AF+CL-PA (dB/m)	Corrected Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	Margin (dB)	Detector
Low Channel - Average								
2412.00	56.37	0.00	33.95	90.32	--	3.0m./HORZ	--	AVG
*4824.00	39.72	0.00	6.52	46.24	54.0	3.0m./HORZ	7.8	AVG
7236.00	31.34	0.00	15.10	46.44	54.0	3.0m./HORZ	7.6	AVG
Mid Channel –Average								
2437.00	61.25	0.00	34.05	95.30	--	3.0m./HORZ	--	AVG
*4874.00	39.64	0.00	6.46	46.10	54.0	3.0m./HORZ	7.9	AVG
*7311.00	31.14	0.00	15.66	46.80	54.0	3.0m./HORZ	7.2	AVG
High Channel–Average								
2462.00	64.73	0.00	34.06	98.79	--	3.0m./HORZ	--	AVG
*4924.00	39.83	0.00	7.64	47.47	54.0	3.0m./HORZ	6.5	AVG
*7386.00	31.18	0.00	15.51	46.69	54.0	3.0m./HORZ	7.3	AVG

1. (*) Falls within the restricted bands of CFR 15.205. Limits based on CFR15.209 CFR 15.35.
2. No other signals detected within 20 dB of specification limit. Harmonics investigated up to the 10th harmonic
3. Duty cycle applied where applicable.

Sample Calculation at 2412.00 MHz:

Magnitude of Measured Frequency	56.37	dBuV
+Additional Factor	0.00	dB
+Antenna Factor + Cable Loss+ Amplifier Gain	33.95	dB/m
Corrected Result	90.32	dBuV/m

Test Date: September 18, 2018

Tested By

Signature: *Afzal Fazal*

Name: Afzal Fazal

Note: The transmitter was programmed to transmit at >98% during all testing.

US Tech Test Report:
 FCC ID:
 IC:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15/IC RSS Certification
 O7P-4343
 10147A-4343
 18-0268
 October 19, 2018
 Inventek Systems
 ISM4343-X

**Table 11. b mode – Peak Radiated Fundamental & Harmonic Emissions
 (External Antenna)**

Tested By: AF	Test: FCC Part 15,247(d)			Client: Inventek Systems				
	Project: 18-0268			Model: ISM4343-X				
Frequency (MHz)	Test Data (dBuV)	Additional Factor	AF+CL-PA (dB/m)	Corrected Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	Margin (dB)	Detector
Low Channel - PEAK								
2412.00	78.30	0.00	34.14	112.44	--	3.0m./VERT	--	PK
*4824.00	49.89	0.00	6.55	56.44	74.0	3.0m./VERT	17.6	PK
7236.00	41.93	0.00	15.14	57.07	74.0	3.0m./VERT	16.9	PK
Mid Channel – PEAK								
2437.00	79.61	0.00	34.24	113.85	--	3.0m./VERT	--	PK
*4874.00	49.59	0.00	6.49	56.08	74.0	3.0m./VERT	17.9	PK
*7311.00	41.93	0.00	15.63	57.56	74.0	3.0m./VERT	16.4	PK
High Channel– PEAK								
2462.00	81.69	0.00	34.24	115.93	--	3.0m./VERT	--	PK
*4924.00	49.99	0.00	7.58	57.57	74.0	3.0m./VERT	16.4	PK
*7386.00	41.64	0.00	15.49	57.13	74.0	3.0m./VERT	16.9	PK

1. (*) Falls within the restricted bands of CFR 15.205. Limits based on CFR15.209& 15.247.

2. No other signals detected within 20 dB of specification limit. Harmonics investigated up to the 10th harmonic

Sample Calculation at 2412.00 MHz:

Magnitude of Measured Frequency	78.30	dBuV
+Additional Factor	0.00	dB
+Antenna Factor + Cable Loss+ Amplifier Gain	34.14	dB/m
Corrected Result	112.44	dBuV/m

Test Date: September 19, 2018

Tested By

Signature: *Afzal Fazal*

Name: Afzal Fazal

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

**Table 12. b mode – Average Radiated Fundamental & Harmonic Emissions
(External Antenna)**

Tested By: AF	Test: FCC Part 15,247(d)			Client: Inventek Systems				
	Project: 18-0268			Model: ISM4343-X				
Frequency (MHz)	Test Data (dBuV)	Additional Factor	AF+CL-PA (dB/m)	Corrected Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	Margin (dB)	Detector
Low Channel - Average								
2412.00	69.95	0.00	34.14	104.09	--	3.0m./VERT	--	AVG
*4824.00	39.75	0.00	6.55	46.30	54.0	3.0m./VERT	7.7	AVG
7236.00	31.31	0.00	15.14	46.45	54.0	3.0m./VERT	7.5	AVG
Mid Channel –Average								
2437.00	70.73	0.00	34.24	104.97	--	3.0m./VERT	--	AVG
*4874.00	39.95	0.00	6.49	46.44	54.0	3.0m./VERT	7.6	AVG
*7311.00	31.31	0.00	15.63	46.94	54.0	3.0m./VERT	7.1	AVG
High Channel–Average								
2462.00	73.18	0.00	34.24	107.42	--	3.0m./VERT	--	AVG
*4924.00	39.99	0.00	7.58	47.57	54.0	3.0m./VERT	6.4	AVG
*7386.00	31.32	0.00	15.49	46.81	54.0	3.0m./VERT	7.2	AVG

1. (*) Falls within the restricted bands of CFR 15.205. Limits based on CFR15.209 CFR 15.35.
2. No other signals detected within 20 dB of specification limit. Harmonics investigated up to the 10th harmonic
3. Duty cycle applied where applicable.

Sample Calculation at 2412.00 MHz:

Magnitude of Measured Frequency	69.95	dBuV
+Additional Factor	0.00	dB
+Antenna Factor + Cable Loss+ Amplifier Gain	34.14	dB/m
Corrected Result	104.09	dBuV/m

Test Date: September 19, 2018

Tested By

Signature: *Afzal Fazal*

Name: Afzal Fazal

Note: The transmitter was programmed to transmit at >98% during all testing.

US Tech Test Report:
 FCC ID:
 IC:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15/IC RSS Certification
 O7P-4343
 10147A-4343
 18-0268
 October 19, 2018
 Inventek Systems
 ISM4343-X

**Table 13. g mode – Peak Radiated Fundamental & Harmonic Emissions
 (External Antenna)**

Tested By: AF	Test: FCC Part 15,247(d)			Client: Inventek Systems				
	Project: 18-0268			Model: ISM4343-X				
Frequency (MHz)	Test Data (dBuV)	Additional Factor	AF+CL-PA (dB/m)	Corrected Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	Margin (dB)	Detector
Low Channel - PEAK								
2412.00	77.89	0.00	34.14	112.03	--	3.0m./VERT	--	PK
*4824.00	50.22	0.00	6.55	56.77	74.0	3.0m./VERT	17.2	PK
7236.00	41.32	0.00	15.14	56.46	74.0	3.0m./VERT	17.5	PK
Mid Channel – PEAK								
2437.00	79.80	0.00	34.24	114.04	--	3.0m./VERT	--	PK
*4874.00	50.71	0.00	6.49	57.20	74.0	3.0m./VERT	16.8	PK
*7311.00	41.33	0.00	15.63	56.96	74.0	3.0m./VERT	17.0	PK
High Channel– PEAK								
2462.00	81.72	0.00	34.24	115.96	--	3.0m./VERT	--	PK
*4924.00	49.76	0.00	7.58	57.34	74.0	3.0m./VERT	16.7	PK
*7386.00	40.98	0.00	15.49	56.47	74.0	3.0m./VERT	17.5	PK

1. (*) Falls within the restricted bands of CFR 15.205. Limits based on CFR15.209& 15.247.

2. No other signals detected within 20 dB of specification limit. Harmonics investigated up to the 10th harmonic

Sample Calculation at 2412.00 MHz:

Magnitude of Measured Frequency	77.89	dBuV
+Additional Factor	0.00	dB
+Antenna Factor + Cable Loss+ Amplifier Gain	33.95	dB/m
Corrected Result	112.03	dBuV/m

Test Date: September 19, 2018

Tested By

Signature: *Afzal Fazal*

Name: Afzal Fazal

US Tech Test Report:
 FCC ID:
 IC:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15/IC RSS Certification
 O7P-4343
 10147A-4343
 18-0268
 October 19, 2018
 Inventek Systems
 ISM4343-X

**Table 14. g mode – Average Radiated Fundamental & Harmonic Emissions
 (External Antenna)**

Tested By: AF	Test: FCC Part 15,247(d)			Client: Inventek Systems				
	Project: 18-0268			Model: ISM4343-X				
Frequency (MHz)	Test Data (dBuV)	Additional Factor	AF+CL-PA (dB/m)	Corrected Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	Margin (dB)	Detector
Low Channel - Average								
2412.00	63.96	0.00	34.14	98.10	--	3.0m./VERT	--	AVG
*4824.00	40.07	0.00	6.55	46.62	54.0	3.0m./VERT	7.4	AVG
7236.00	31.17	0.00	15.14	46.31	54.0	3.0m./VERT	7.7	AVG
Mid Channel –Average								
2437.00	62.51	0.00	34.24	96.75	--	3.0m./VERT	--	AVG
*4874.00	40.11	0.00	6.49	46.60	54.0	3.0m./VERT	7.4	AVG
*7311.00	31.26	0.00	15.63	46.89	54.0	3.0m./VERT	7.1	AVG
High Channel–Average								
2462.00	67.46	0.00	34.24	101.70	--	3.0m./VERT	--	AVG
*4924.00	39.99	0.00	7.58	47.57	54.0	3.0m./VERT	6.4	AVG
*7386.00	30.88	0.00	15.49	46.37	54.0	3.0m./VERT	7.6	AVG

1. (*) Falls within the restricted bands of CFR 15.205. Limits based on CFR15.209 CFR 15.35.
2. No other signals detected within 20 dB of specification limit. Harmonics investigated up to the 10th harmonic
3. Duty cycle applied where applicable.

Sample Calculation at 2412.00 MHz:

Magnitude of Measured Frequency	63.96	dBuV
+Additional Factor	0.00	dB
+Antenna Factor + Cable Loss+ Amplifier Gain	34.14	dB/m
Corrected Result	98.10	dBuV/m

Test Date: September 19, 2018

Tested By

Signature: 

Name: Afzal Fazal

Note: The transmitter was programmed to transmit at >98% during all testing.

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

**Table 15. n mode – Peak Radiated Fundamental & Harmonic Emissions
(External Antenna)**

Tested By: AF	Test: FCC Part 15,247(d)		Client: Inventek Systems					
	Project: 18-0268		Model: ISM4343-X					
Frequency (MHz)	Test Data (dBuV)	Additional Factor	AF+CL-PA (dB/m)	Corrected Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	Margin (dB)	Detector
Low Channel - PEAK								
2412.00	76.77	0.00	34.14	110.91	--	3.0m./VERT	--	PK
*4824.00	50.55	0.00	6.55	57.10	74.0	3.0m./VERT	16.9	PK
7236.00	40.94	0.00	15.14	56.08	74.0	3.0m./VERT	17.9	PK
Mid Channel – PEAK								
2437.00	78.01	0.00	34.24	112.25	--	3.0m./VERT	--	PK
*4874.00	49.84	0.00	6.49	56.33	74.0	3.0m./VERT	17.7	PK
*7311.00	41.62	0.00	15.63	57.25	74.0	3.0m./VERT	16.7	PK
High Channel– PEAK								
2462.00	79.46	0.00	34.24	113.70	--	3.0m./VERT	--	PK
*4924.00	49.73	0.00	7.58	57.31	74.0	3.0m./VERT	16.7	PK
*7386.00	40.95	0.00	15.49	56.44	74.0	3.0m./VERT	17.6	PK

1. (*) Falls within the restricted bands of CFR 15.205. Limits based on CFR15.209& 15.247.

2. No other signals detected within 20 dB of specification limit. Harmonics investigated up to the 10th harmonic

Sample Calculation at 2412.00 MHz:

Magnitude of Measured Frequency	76.77	dBuV
+Additional Factor	0.00	dB
+Antenna Factor + Cable Loss+ Amplifier Gain	33.95	dB/m
Corrected Result	110.91	dBuV/m

Test Date: September 19, 2018

Tested By

Signature: *Afzal Fazal*

Name: Afzal Fazal

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

Table 16. n mode – Average Radiated Fundamental & Harmonic Emissions (External Antenna)

Tested By: AF	Test: FCC Part 15,247(d)			Client: Inventek Systems				
	Project: 18-0268			Model: ISM4343-X				
Frequency (MHz)	Test Data (dBuV)	Additional Factor	AF+CL-PA (dB/m)	Corrected Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	Margin (dB)	Detector
Low Channel–Average								
2412.00	62.86	0.00	34.14	97.00	--	3.0m./VERT	--	AVG
*4824.00	40.02	0.00	6.55	46.57	54.0	3.0m./VERT	7.4	AVG
7236.00	30.88	0.00	15.14	46.02	54.0	3.0m./VERT	8.0	AVG
Mid Channel –Average								
2437.00	63.66	0.00	34.24	97.90	--	3.0m./VERT	--	AVG
*4874.00	39.97	0.00	6.49	46.46	54.0	3.0m./VERT	7.5	AVG
*7311.00	31.79	0.00	15.63	47.42	54.0	3.0m./VERT	6.6	AVG
High Channel–Average								
2462.00	64.93	0.00	34.24	99.17	--	3.0m./VERT	--	AVG
*4924.00	39.93	0.00	7.58	47.51	54.0	3.0m./VERT	6.5	AVG
*7386.00	30.89	0.00	15.49	46.38	54.0	3.0m./VERT	7.6	AVG

1. (*) Falls within the restricted bands of CFR 15.205. Limits based on CFR15.209 CFR 15.35.
2. No other signals detected within 20 dB of specification limit. Harmonics investigated up to the 10th harmonic
3. Duty cycle applied where applicable.

Sample Calculation at 2412.00 MHz:

Magnitude of Measured Frequency	62.86	dBuV
+Additional Factor	0.00	dB
+Antenna Factor + Cable Loss+ Amplifier Gain	33.95	dB/m
Corrected Result	97.00	dBuV/m

Test Date: September 19, 2018

Tested By

Signature: 

Name: Afzal Fazal

Note: The transmitter was programmed to transmit at >98% during all testing.

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

2.11 Band Edge Measurements (CFR 15.247(d), RSS-247, 5.5)

Band Edge measurements are made following the guidelines in ANSI C63.10-2013 with the EUT initially operating on the Lowest Channel and then operating on the Highest Channel within its band of operation. Antenna port radiated measurements are performed to demonstrate compliance with the requirement of 15.247(d) that all emissions outside of the band edges be attenuated by at least 20 dB when compared to its highest in-band value (contained in a 100 kHz band). Because these frequencies occur above 1000 MHz they have both a peak and average requirement.

To capture the band edge set the Spectrum Analyzer frequency span large enough (usually around 10 MHz) to capture the peak level of the emission operating on the channel closest to the band edge as well as any modulation products falling outside of the authorized band of operation. Conducted measurements are performed with RBW $\geq 1\%$ of the frequency span. In all cases, the VBW is set \geq RBW. See figures and calculations below for more detail.

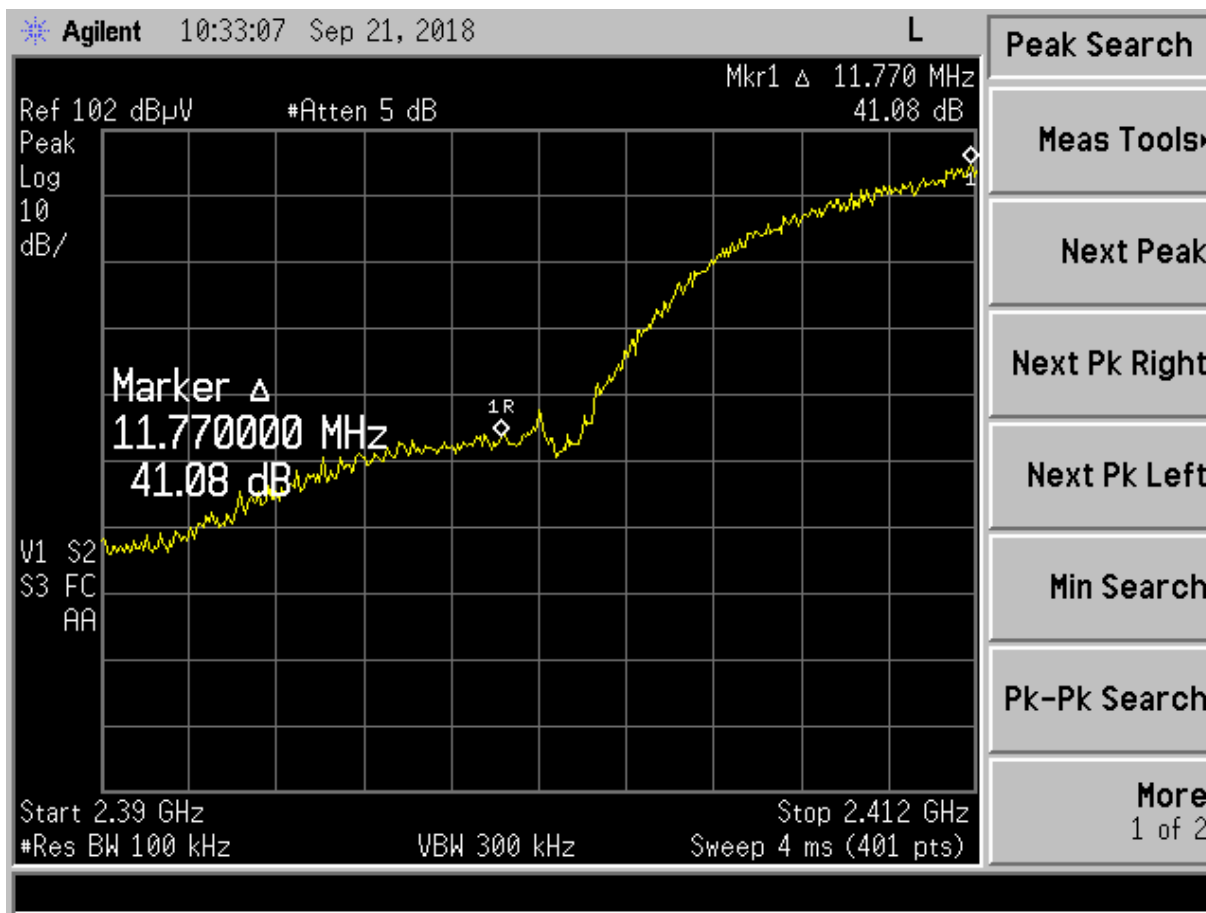


Figure 20. Band Edge Compliance – b mode (Chip Antenna) Low Channel Delta - Peak

Lower band edge must be 20 dB below the fundamental. This requirement is met.

Measured Result	41.08	dB
Band Edge Limit	20.00	dB
Band Edge Margin	21.08	dB

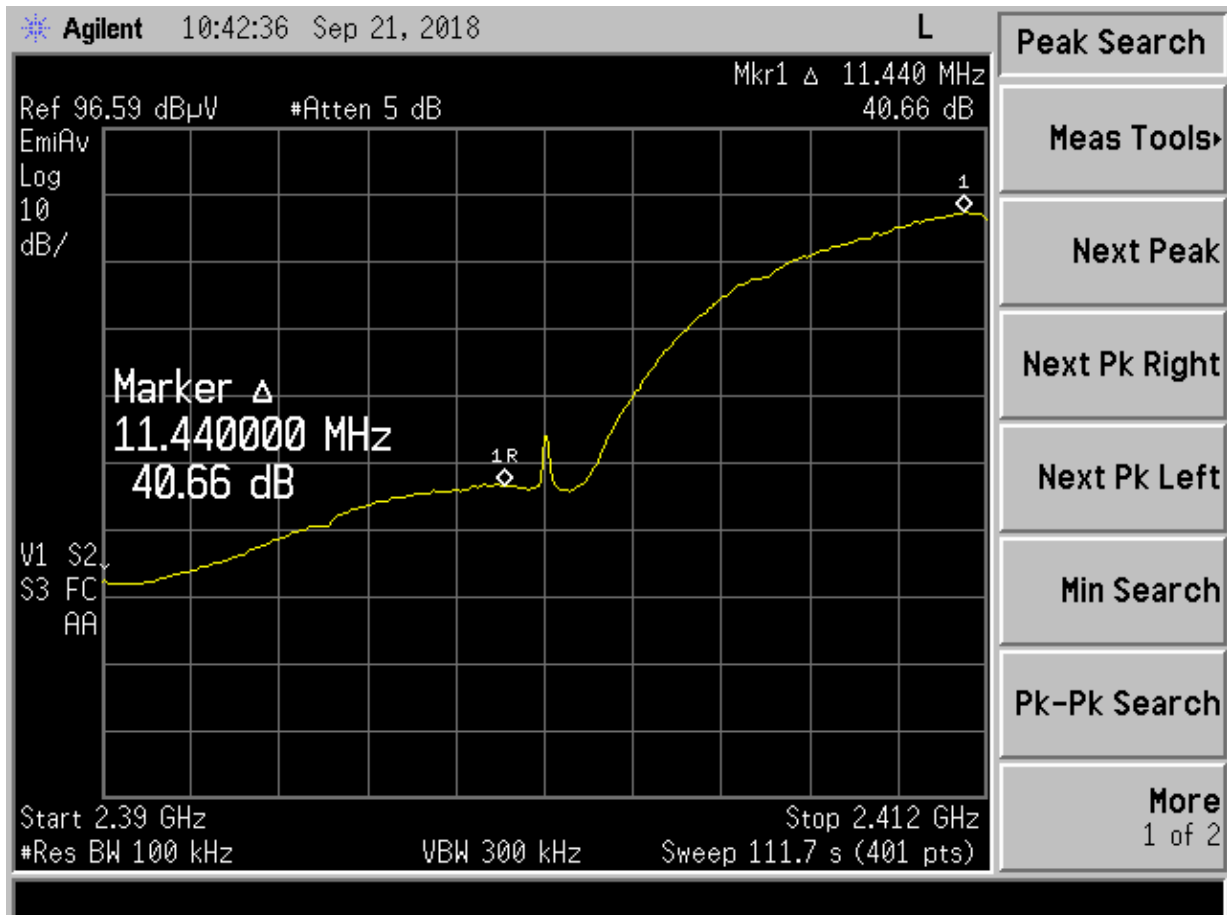


Figure 21. Band Edge Compliance – b mode (Chip Antenna) Low Channel Delta – Average

Lower band edge must be 20 dB below the fundamental. This requirement is met.

Measured Result	40.66	dB
Band Edge Limit	20.00	dB
Band Edge Margin	20.66	dB

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

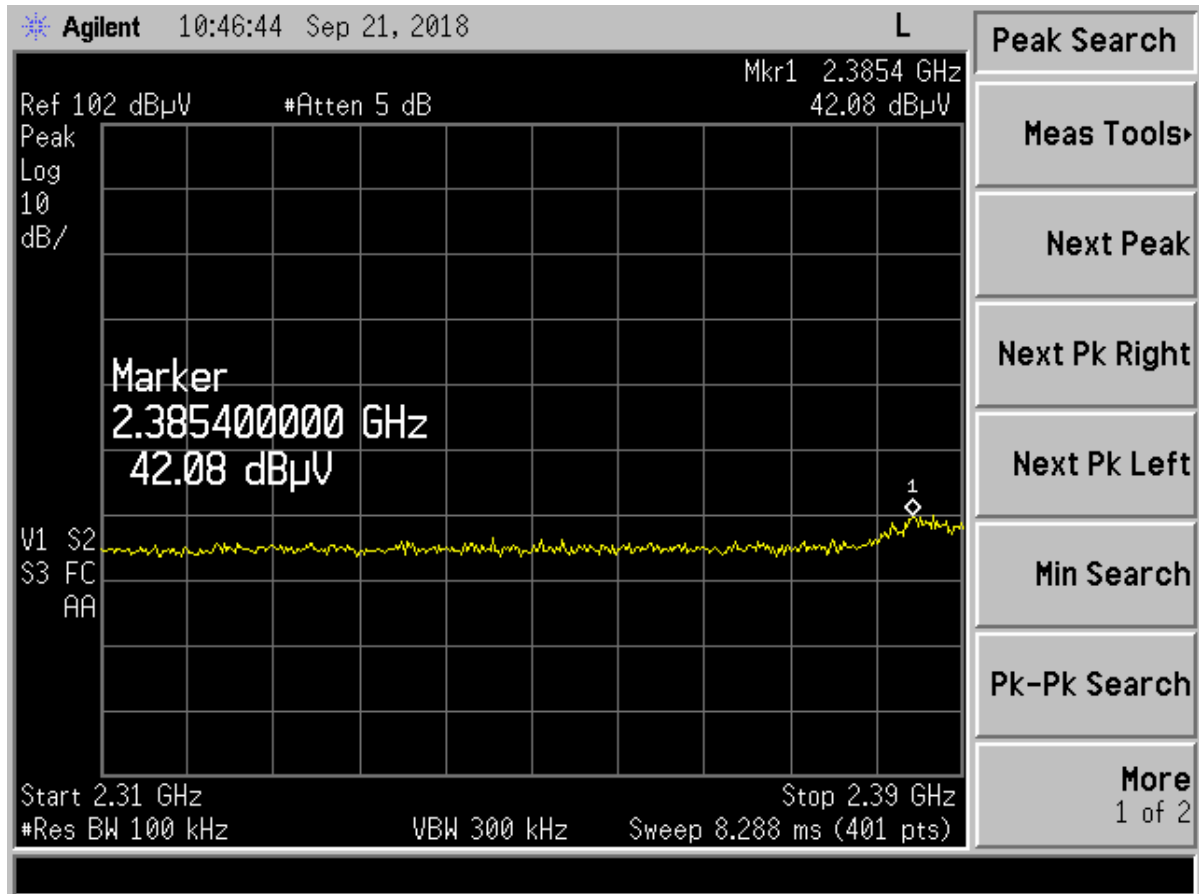


Figure 22. b mode (Chip Antenna) Low Channel Restricted Band - Peak

Frequency (MHz)	Test Data (dBuV)	AF+CA-AMP+DC (dB/m)	Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	Margin (dB)	Detector PK/QP/AVG
2385.40	42.08	-1.66	40.42	74.0	3.0m./HORZ	33.6	PK

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

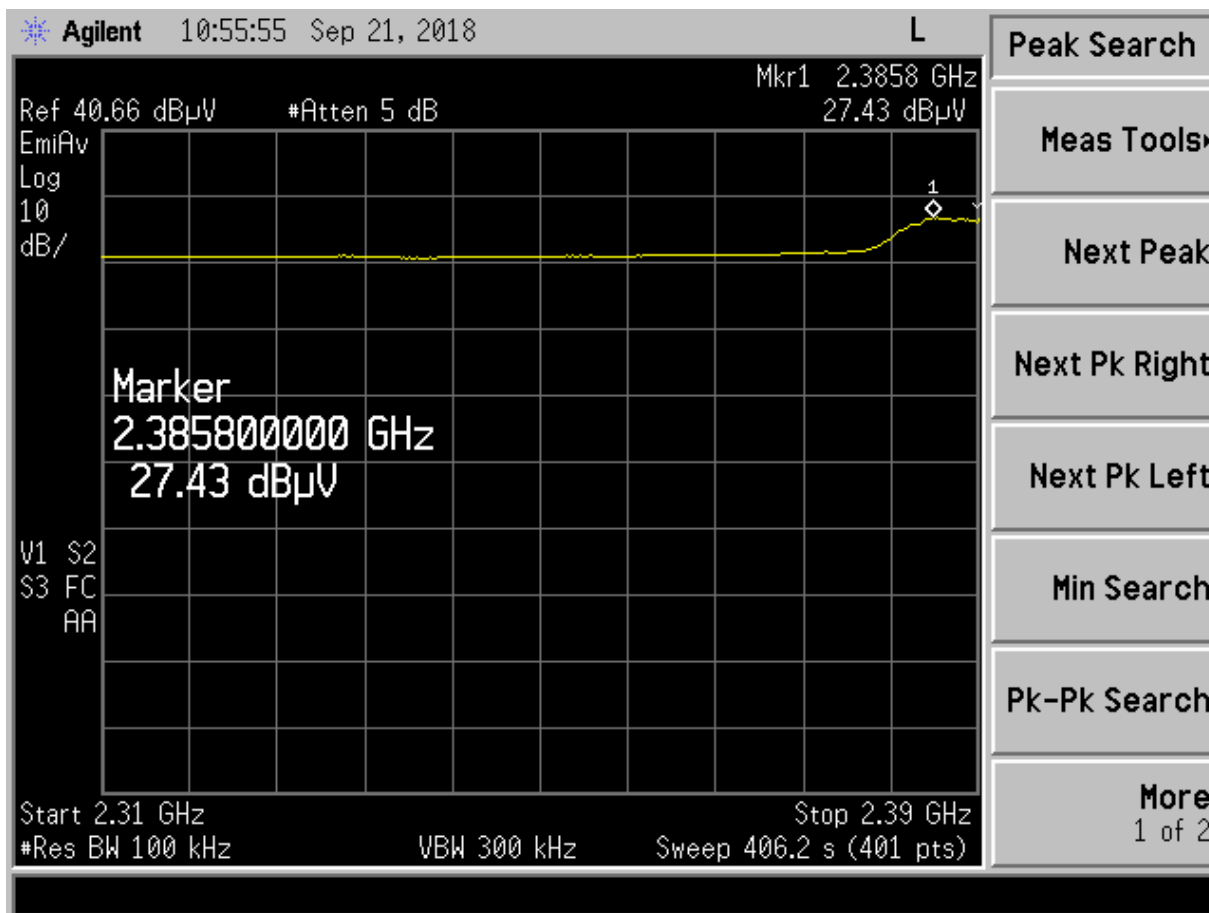


Figure 23. b mode (Chip Antenna) Low Channel Restricted Band–Average

Frequency (MHz)	Test Data (dBuV)	AF+CA-AMP+DC (dB/m)	Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	Margin (dB)	Detector PK/QP/AVG
2385.80	27.43	-1.66	25.77	54.0	3.0m./HORZ	28.2	AVG

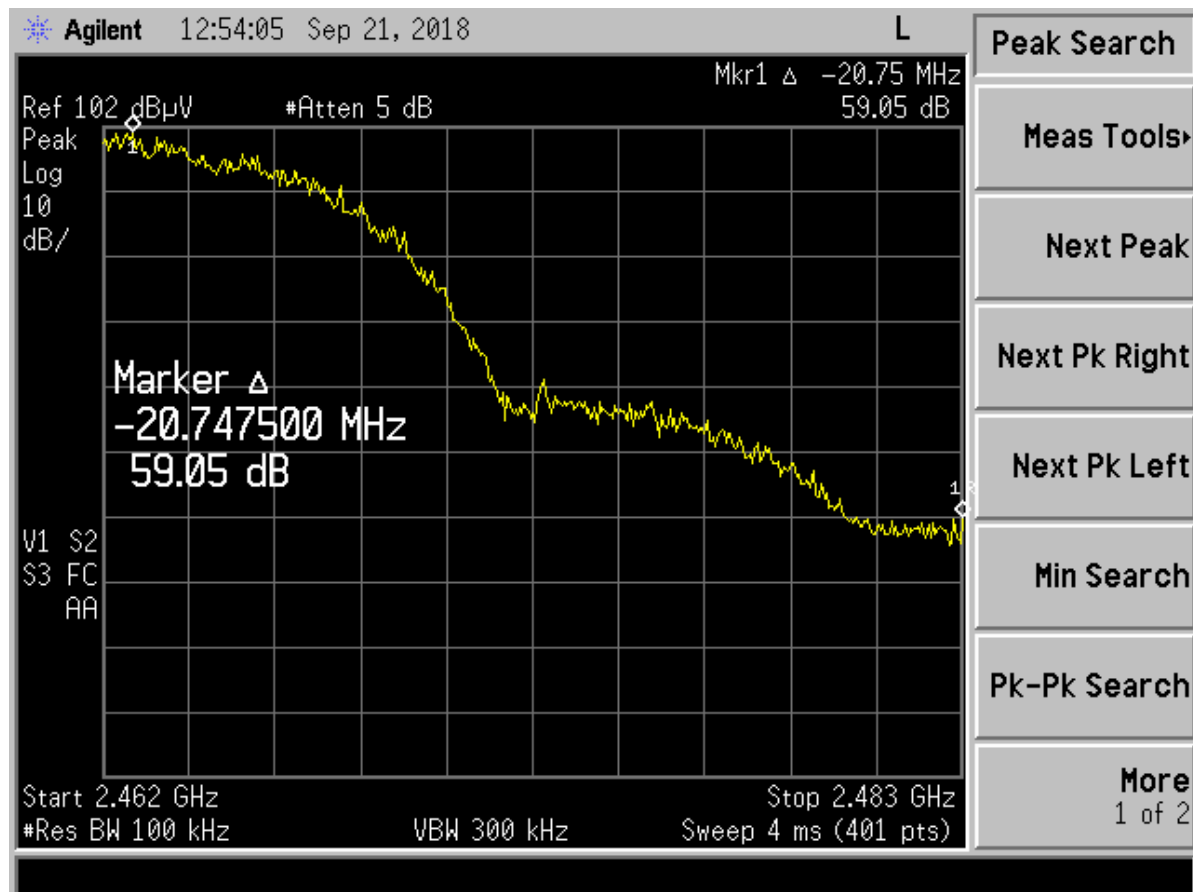


Figure 24. Band Edge Compliance – b mode (Chip Antenna) High Channel Delta - Peak

Higher band edge must be 20 dB below the fundamental. This requirement is met.

Measured Result	59.05	dB
Band Edge Limit	20.00	dB
Band Edge Margin	39.05	dB

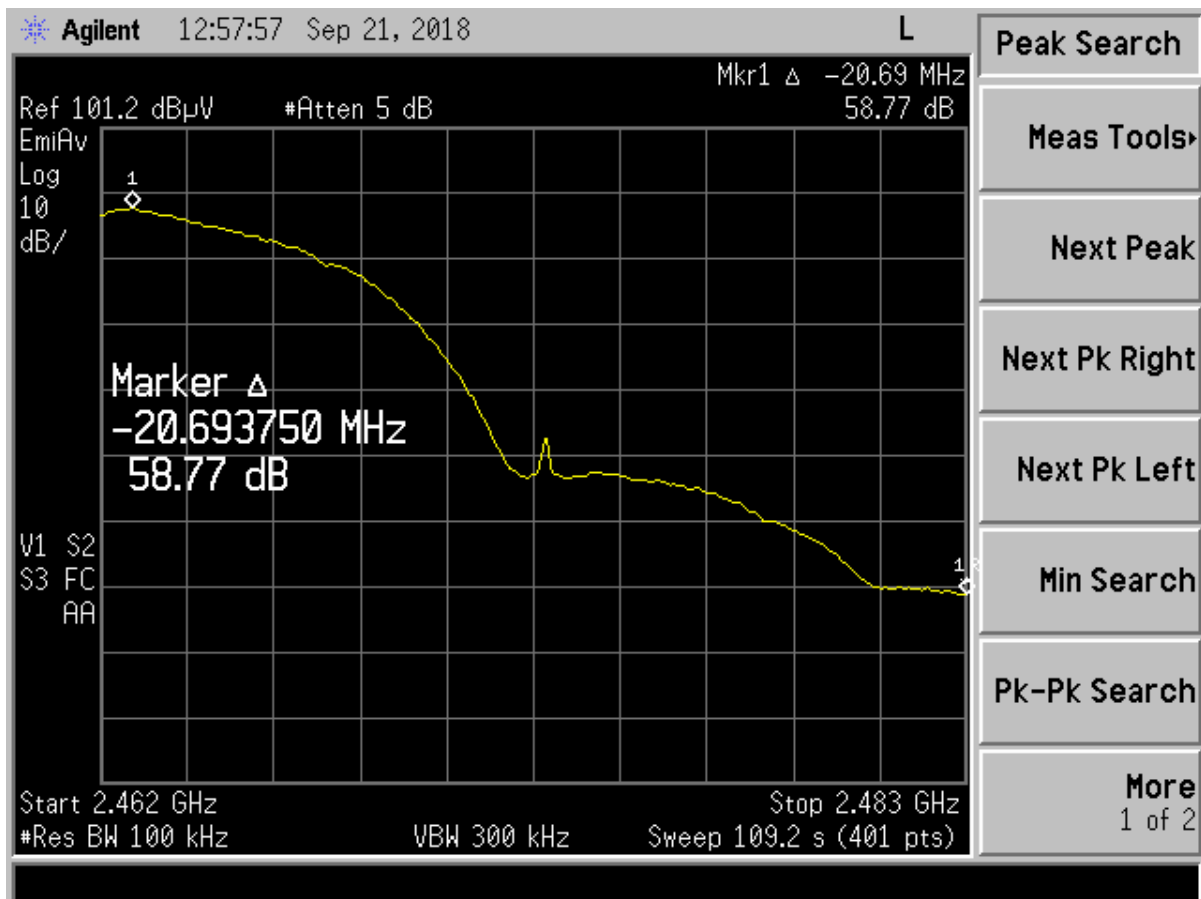


Figure 25. Band Edge Compliance – b mode (Chip Antenna) High Channel Delta - Average

Higher band edge must be 20 dB below the fundamental. This requirement is met.

Measured Result	58.77	dB
Band Edge Limit	20.00	dB
Band Edge Margin	38.77	dB

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

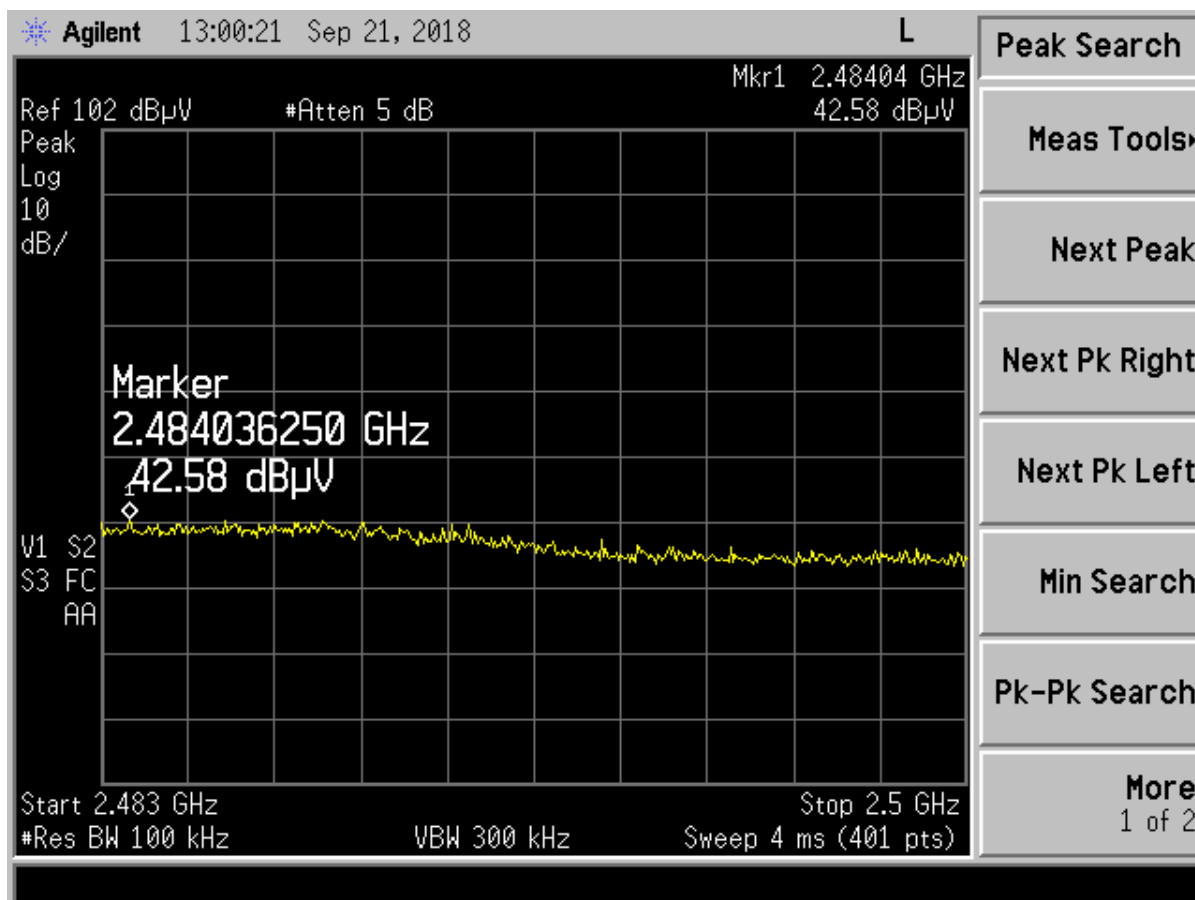


Figure 26.b mode (Chip Antenna) High Channel Restricted Band –Peak

Frequency (MHz)	Test Data (dBuV)	AF+CA-AMP+DC (dB/m)	Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	Margin (dB)	Detector PK/QP/AVG
2484.04	42.58	-0.51	42.07	74.0	3.0m./HORZ	31.9	PK

US Tech Test Report:
 FCC ID:
 IC:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15/IC RSS Certification
 O7P-4343
 10147A-4343
 18-0268
 October 19, 2018
 Inventek Systems
 ISM4343-X

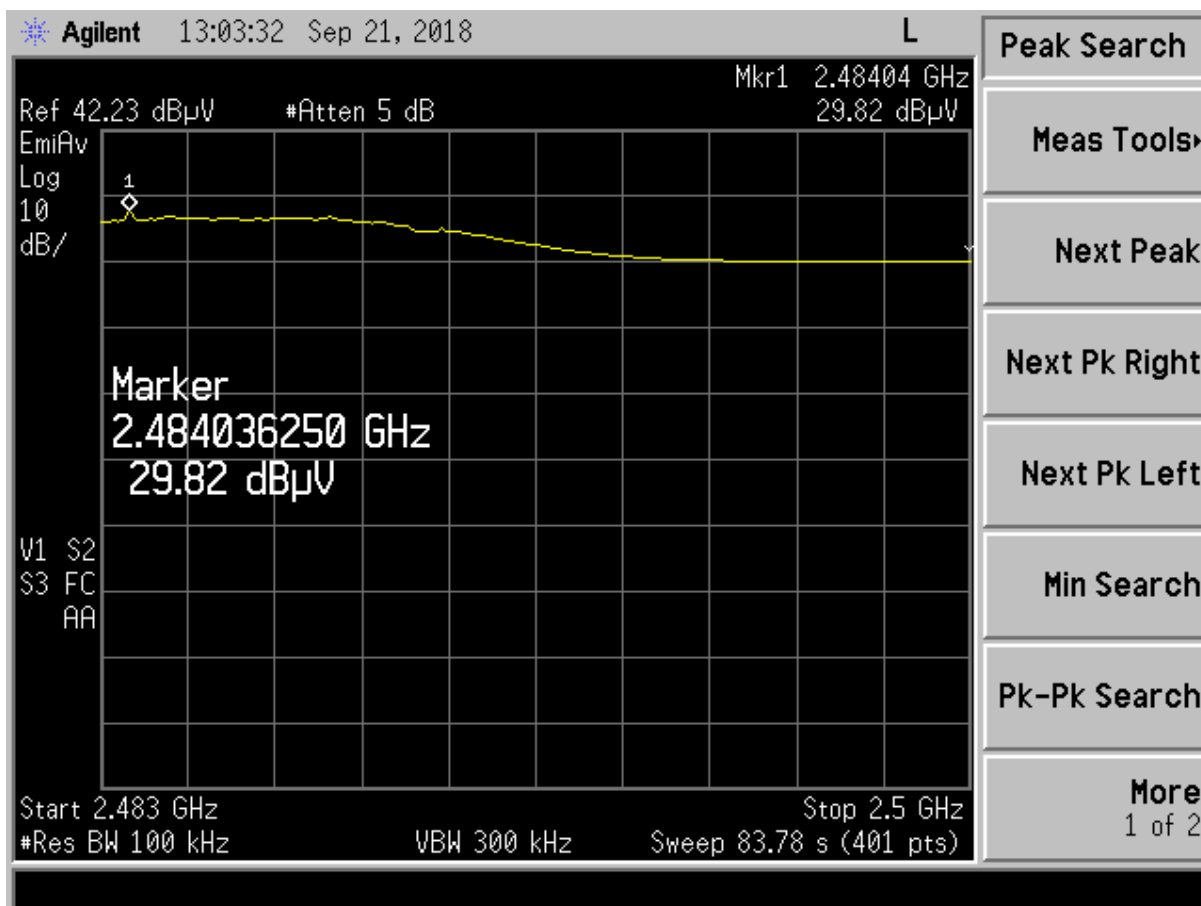


Figure 27.b mode (Chip Antenna) High Channel Restricted Band –Average

Frequency (MHz)	Test Data (dBuV)	AF+CA-AMP+DC (dB/m)	Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	Margin (dB)	Detector PK/QP/AVG
2484.03	29.82	-0.51	29.31	54.0	3.0m./HORZ	24.7	AVG

US Tech Test Report:
 FCC ID:
 IC:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15/IC RSS Certification
 O7P-4343
 10147A-4343
 18-0268
 October 19, 2018
 Inventek Systems
 ISM4343-X

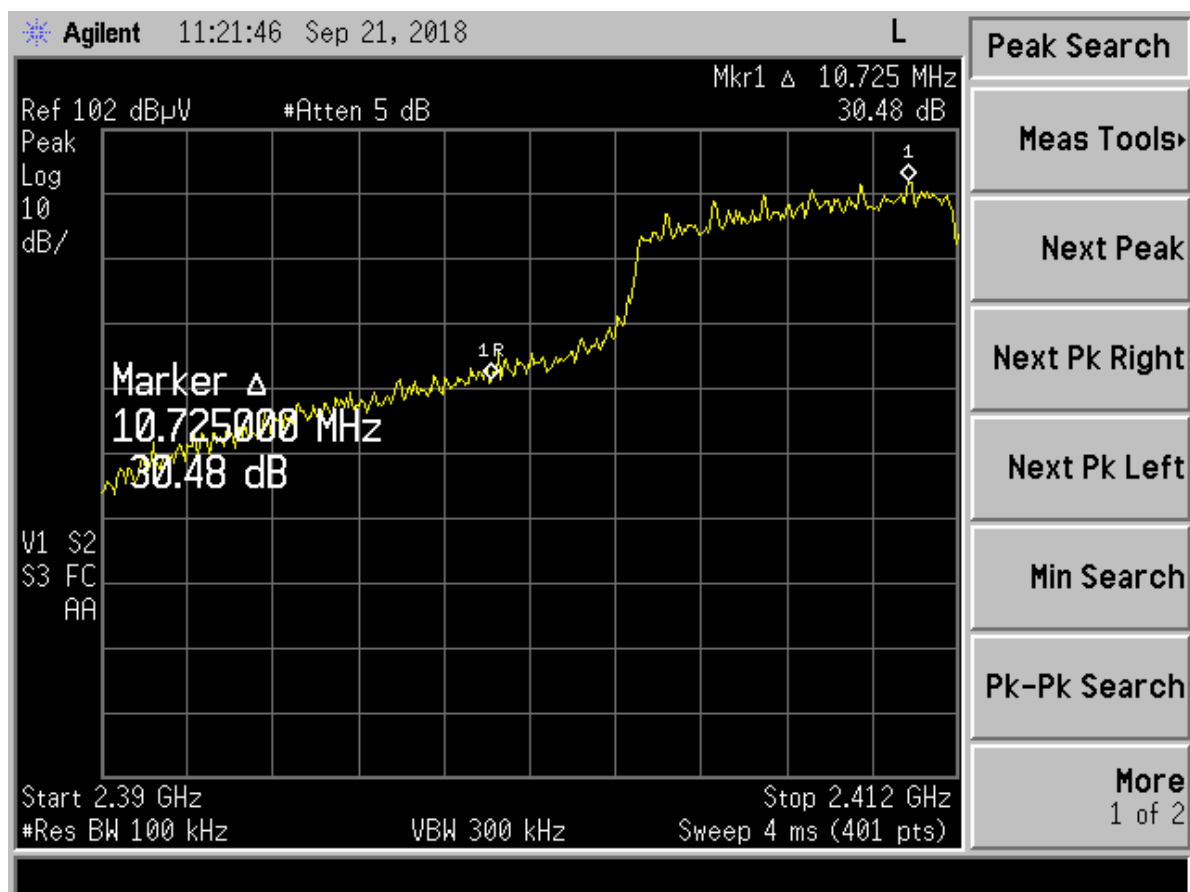


Figure 28. Band Edge Compliance – g mode (Chip Antenna) Low Channel Delta – Peak

Lower band edge must be 20 dB below the fundamental. This requirement is met.

Measured Result	30.48	dB
Band Edge Limit	20.00	dB
Band Edge Margin	10.48	dB

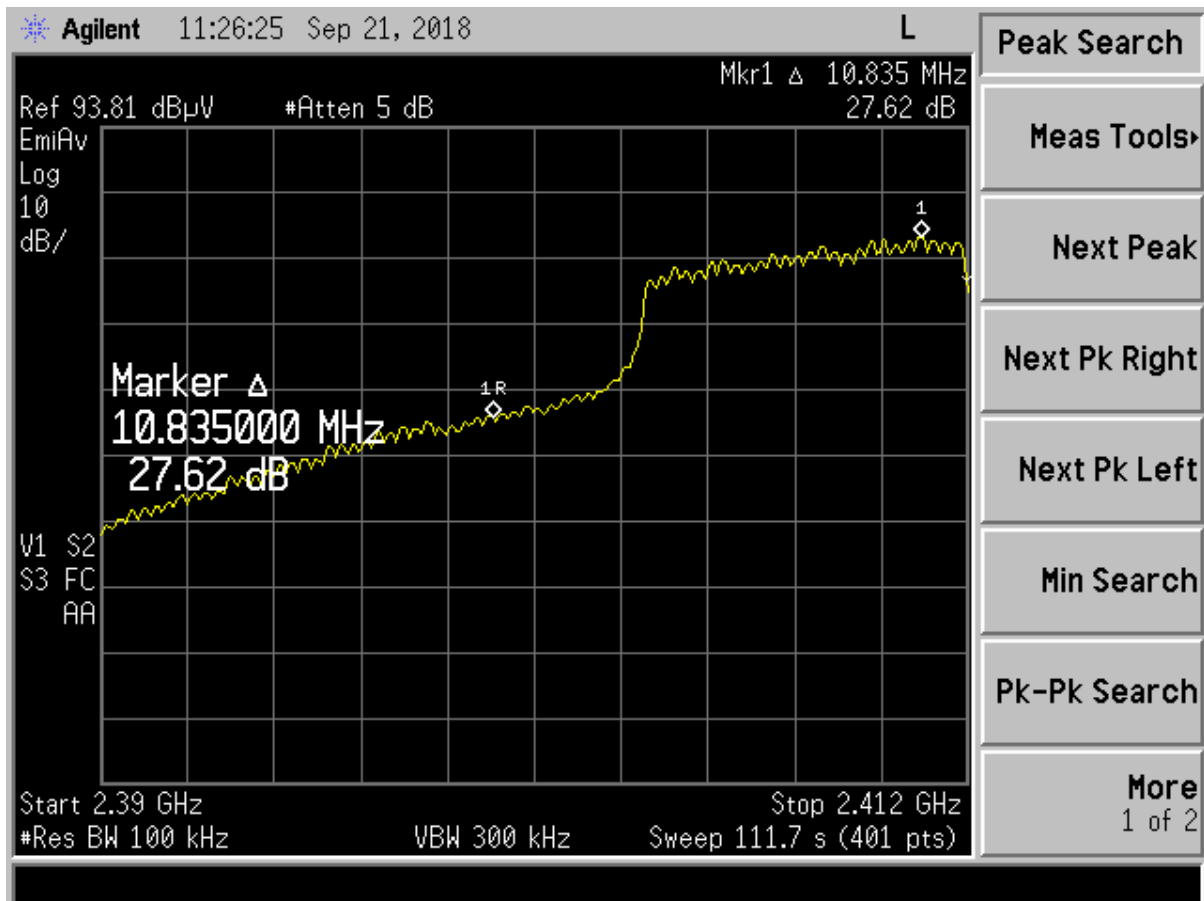


Figure 29. Band Edge Compliance – g mode (Chip Antenna) Low Channel Delta –Average

Lower band edge must be 20 dB below the fundamental. This requirement is met.

Measured Result	27.62	dB
Band Edge Limit	20.00	dB
Band Edge Margin	7.62	dB

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

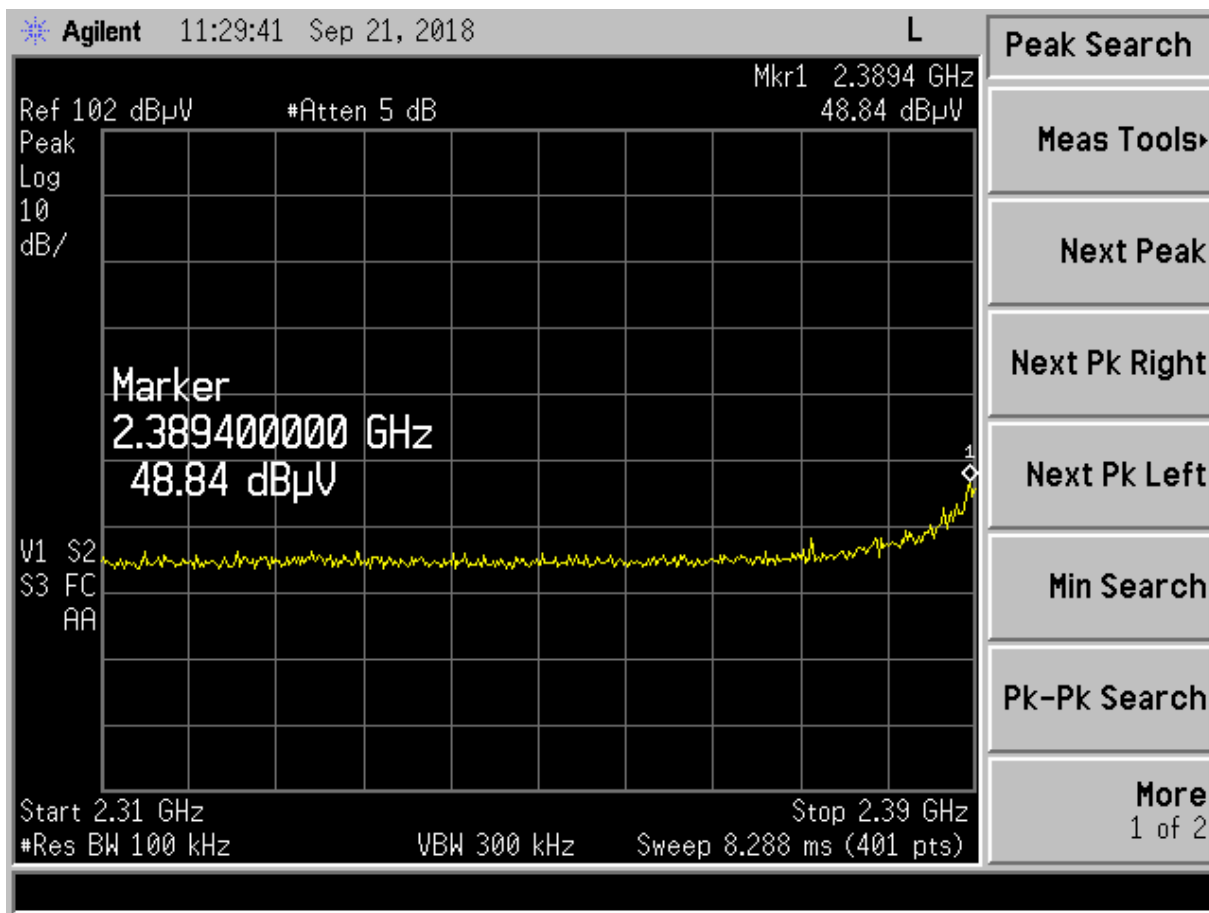


Figure 30. g mode (Chip Antenna) Low Channel Restricted Band – Peak

Frequency (MHz)	Test Data (dBuV)	AF+CA-AMP+DC (dB/m)	Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	Margin (dB)	Detector PK/QP/AVG
2389.40	48.84	-1.66	47.18	74.0	3.0m./HORZ	26.8	PK

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

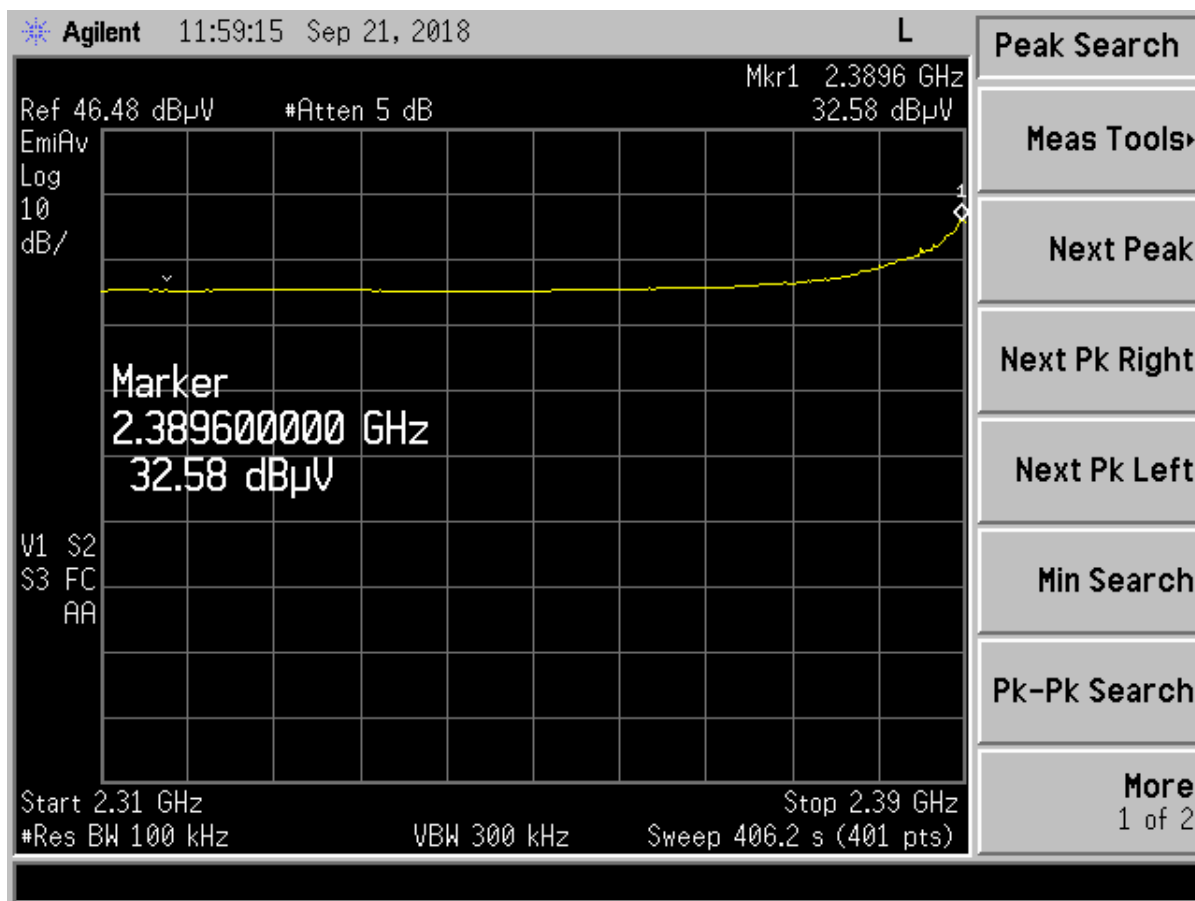


Figure 31. g mode (Chip Antenna) Low Channel Restricted Band – Average

Frequency (MHz)	Test Data (dBuV)	AF+CA-AMP+DC (dB/m)	Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	Margin (dB)	Detector PK/QP/AVG
2390.60	32.58	-1.66	30.92	54.0	3.0m./HORZ	23.1	AVG

US Tech Test Report:
 FCC ID:
 IC:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15/IC RSS Certification
 O7P-4343
 10147A-4343
 18-0268
 October 19, 2018
 Inventek Systems
 ISM4343-X

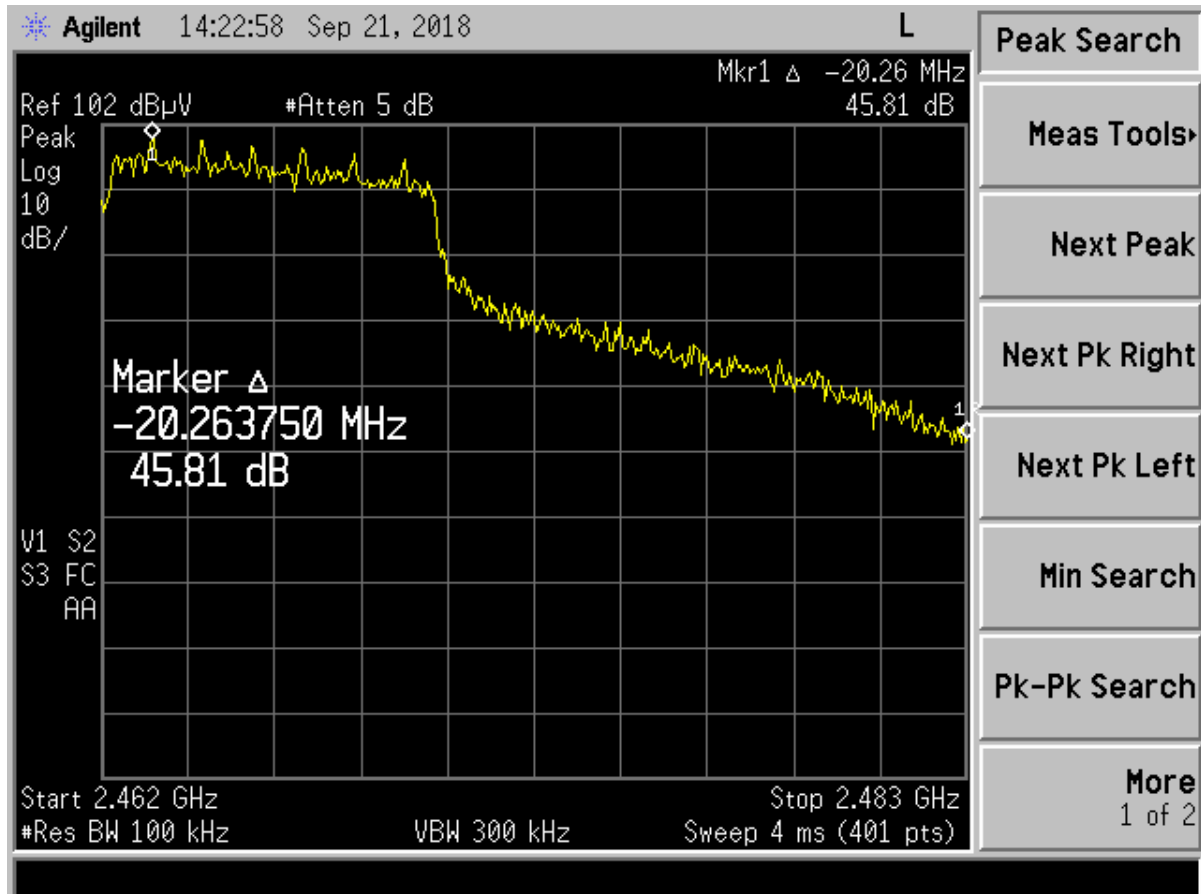


Figure 32. Band Edge Compliance – g mode (Chip Antenna) High Channel Delta – Peak

Higher band edge must be 20 dB below the fundamental. This requirement is met.

Measured Result	45.81	dB
Band Edge Limit	20.00	dB
Band Edge Margin	25.81	dB

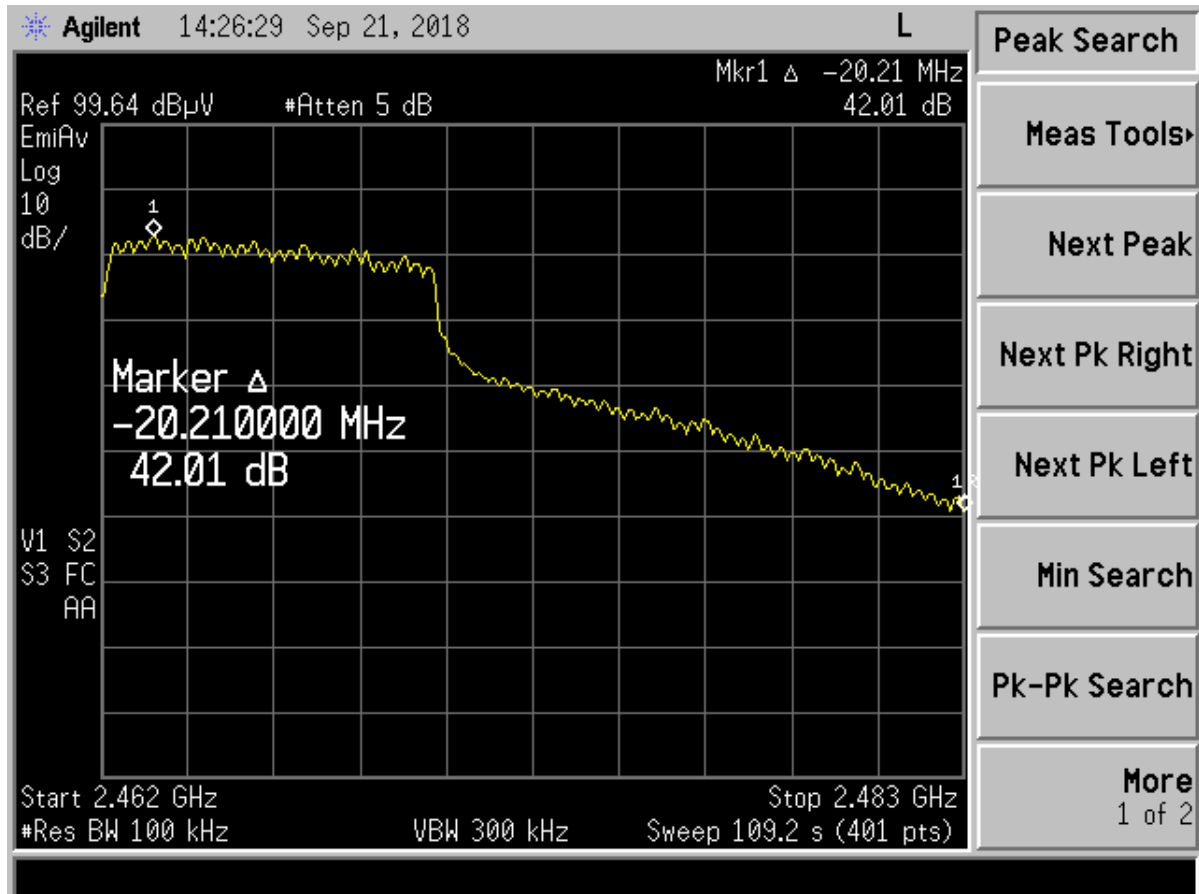


Figure 33. Band Edge Compliance – g mode (Chip Antenna) High Channel Delta – Average

Higher band edge must be 20 dB below the fundamental. This requirement is met.

Measured Result	42.01	dB
Band Edge Limit	20.00	dB
Band Edge Margin	22.01	dB

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

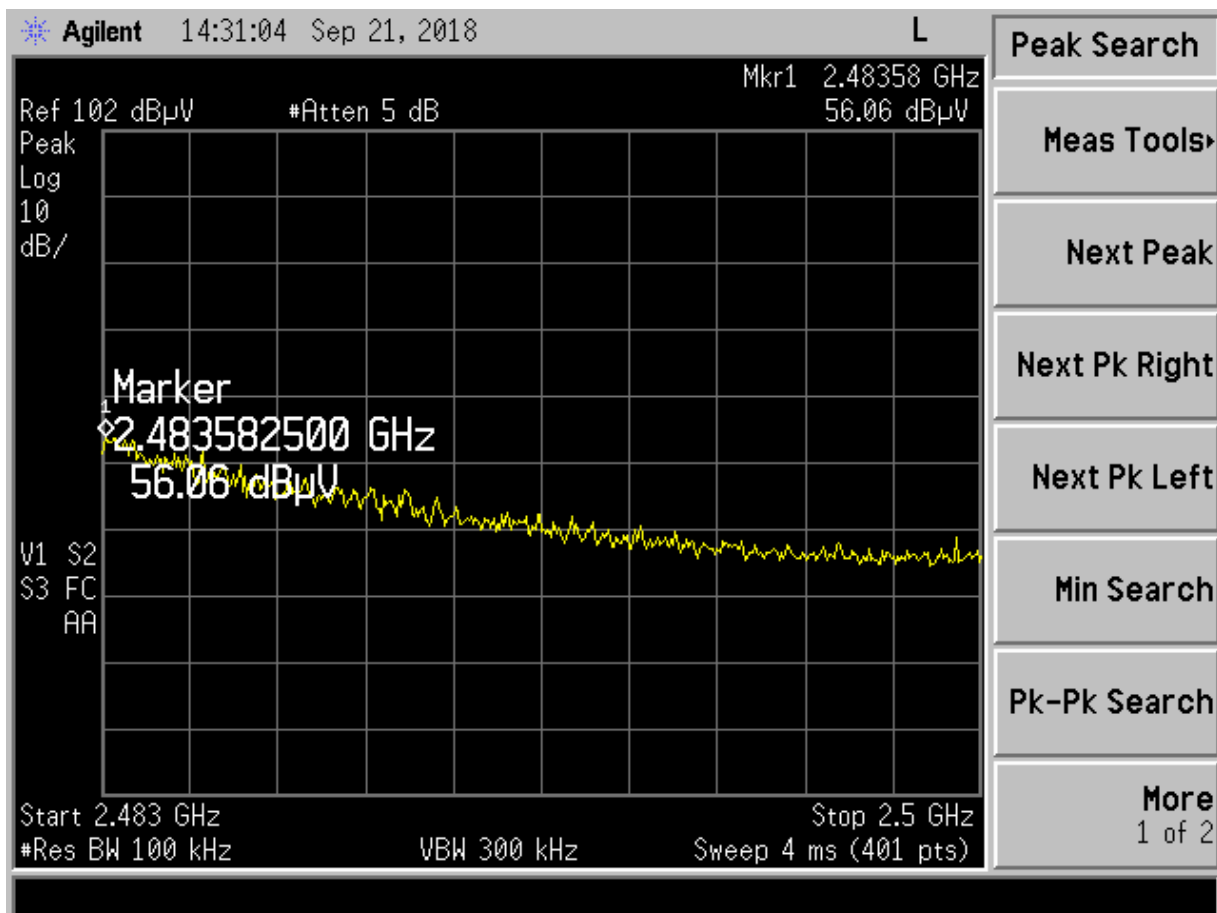


Figure 34. g mode (Chip Antenna) High Channel Restricted Band – Peak

Frequency (MHz)	Test Data (dBuV)	AF+CA-AMP+DC (dB/m)	Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	Margin (dB)	Detector PK/QP/AVG
2483.58	56.06	-0.51	55.55	74.0	3.0m./HORZ	18.5	PK

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

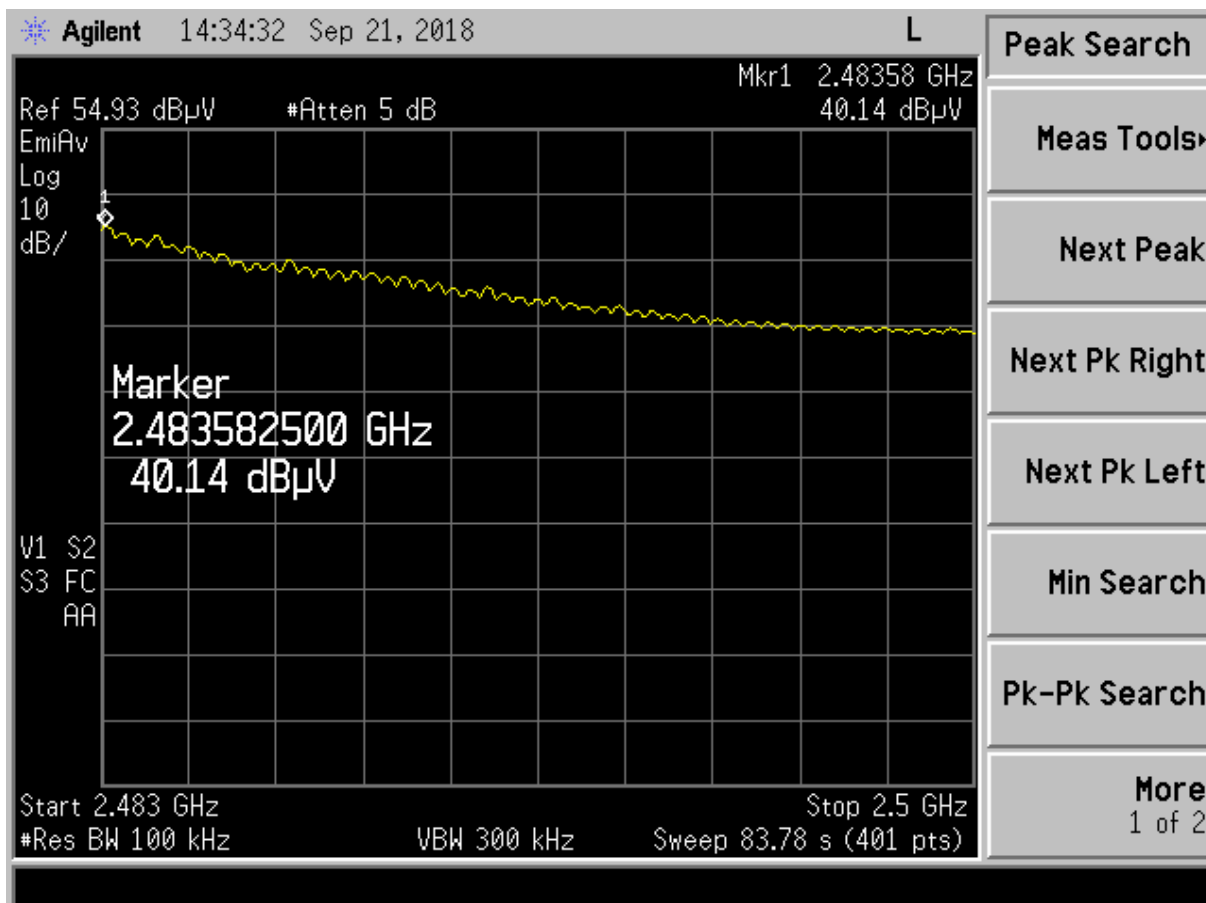


Figure 35. g mode (Chip Antenna) High Channel Restricted Band – Average

Frequency (MHz)	Test Data (dBuV)	AF+CA-AMP+DC (dB/m)	Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	Margin (dB)	Detector PK/QP/AVG
2483.58	40.14	-0.51	39.63	54.0	3.0m./HORZ	14.4	AVG

US Tech Test Report:
 FCC ID:
 IC:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15/IC RSS Certification
 O7P-4343
 10147A-4343
 18-0268
 October 19, 2018
 Inventek Systems
 ISM4343-X

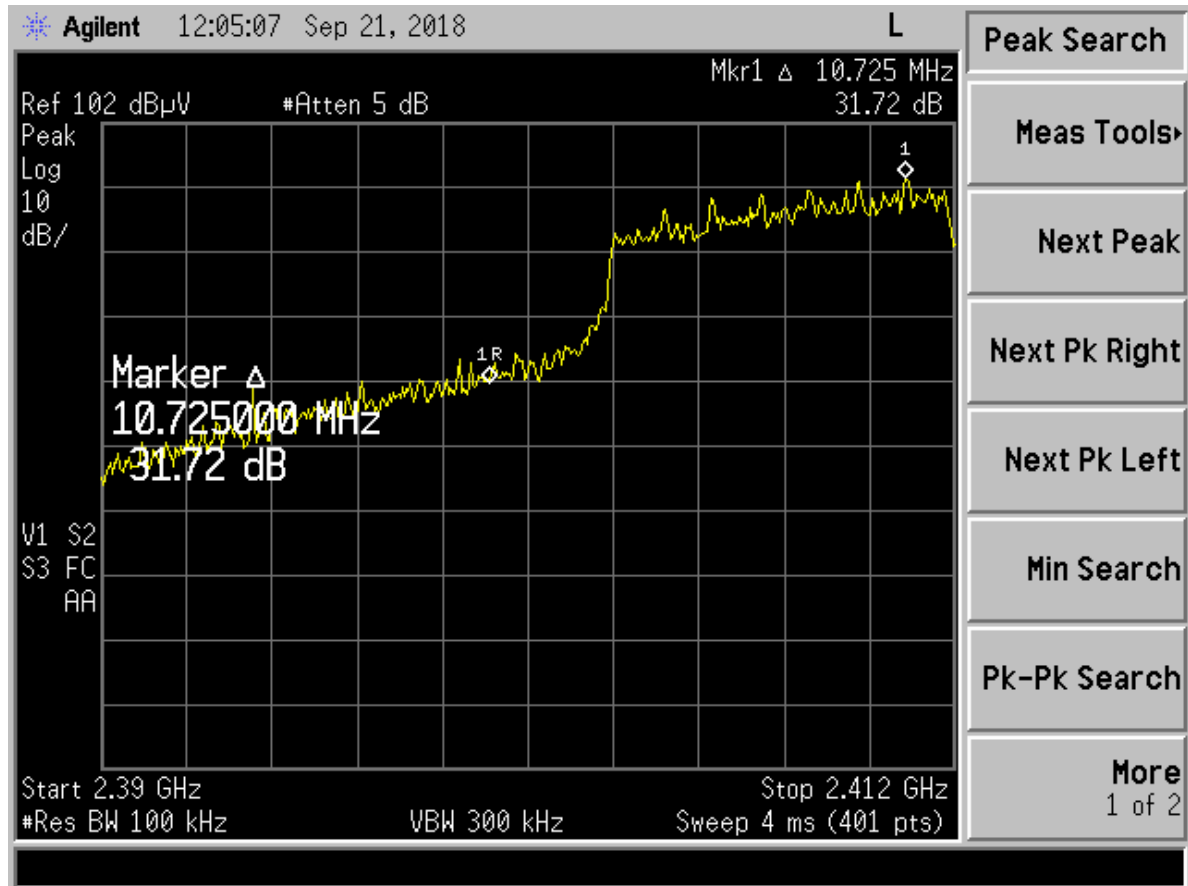


Figure 36. Band Edge Compliance – n mode (Chip Antenna) Low Channel Delta – Peak

Lower band edge must be 20 dB below the fundamental. This requirement is met.

Measured Result	31.72	dB
Band Edge Limit	20.00	dB
Band Edge Margin	11.72	dB

US Tech Test Report:
 FCC ID:
 IC:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15/IC RSS Certification
 O7P-4343
 10147A-4343
 18-0268
 October 19, 2018
 Inventek Systems
 ISM4343-X

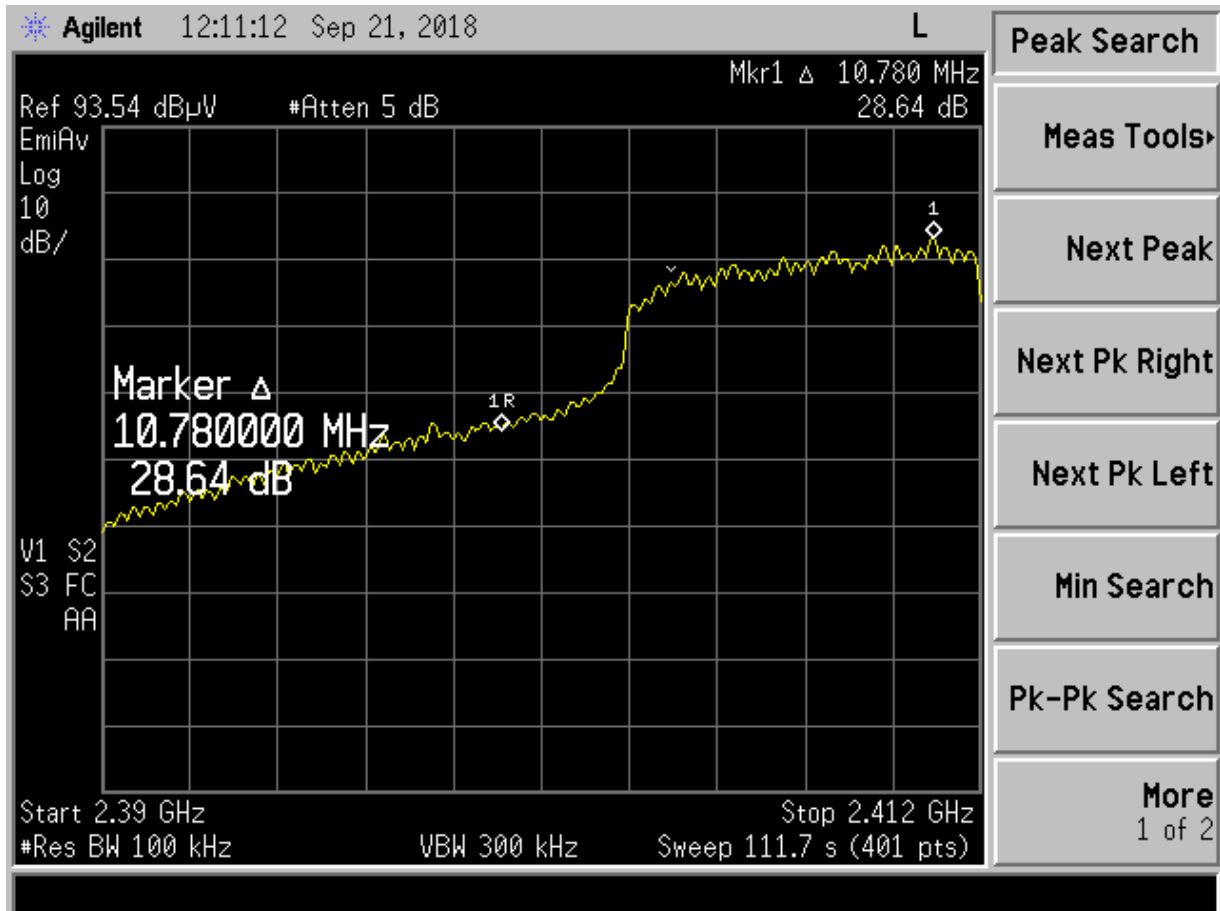


Figure 37. Band Edge Compliance – n mode (Chip Antenna) Low Channel Delta –Average

Lower band edge must be 20 dB below the fundamental. This requirement is met.

Measured Result	28.64	dB
Band Edge Limit	20.00	dB
Band Edge Margin	8.64	dB

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

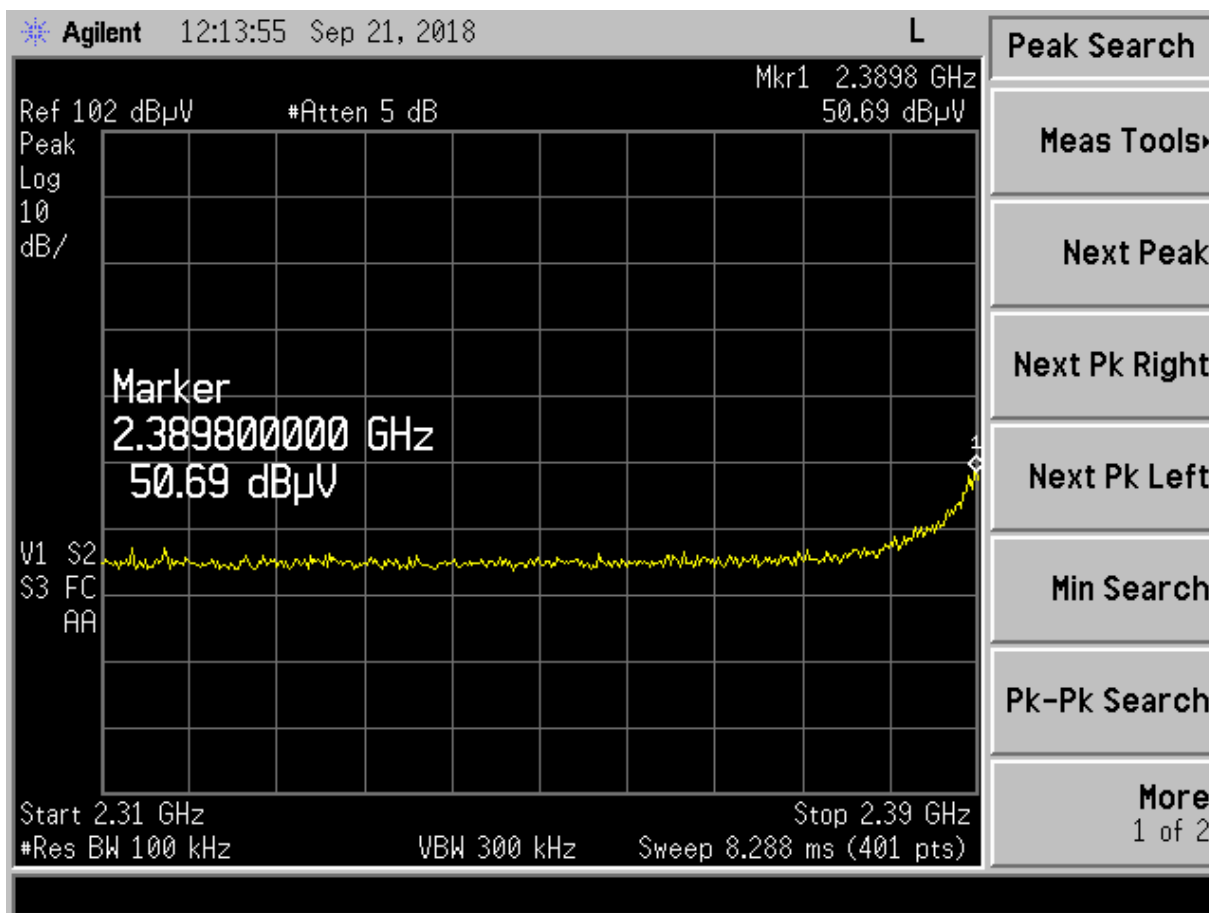


Figure 38. n mode (Chip Antenna) Low Channel Restricted Band – Peak

Frequency (MHz)	Test Data (dBuV)	AF+CA-AMP+DC (dB/m)	Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	Margin (dB)	Detector PK/QP/AVG
2389.80	50.69	-1.66	49.03	74.0	3.0m./HORZ	25.0	PK

US Tech Test Report:
 FCC ID:
 IC:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15/IC RSS Certification
 O7P-4343
 10147A-4343
 18-0268
 October 19, 2018
 Inventek Systems
 ISM4343-X

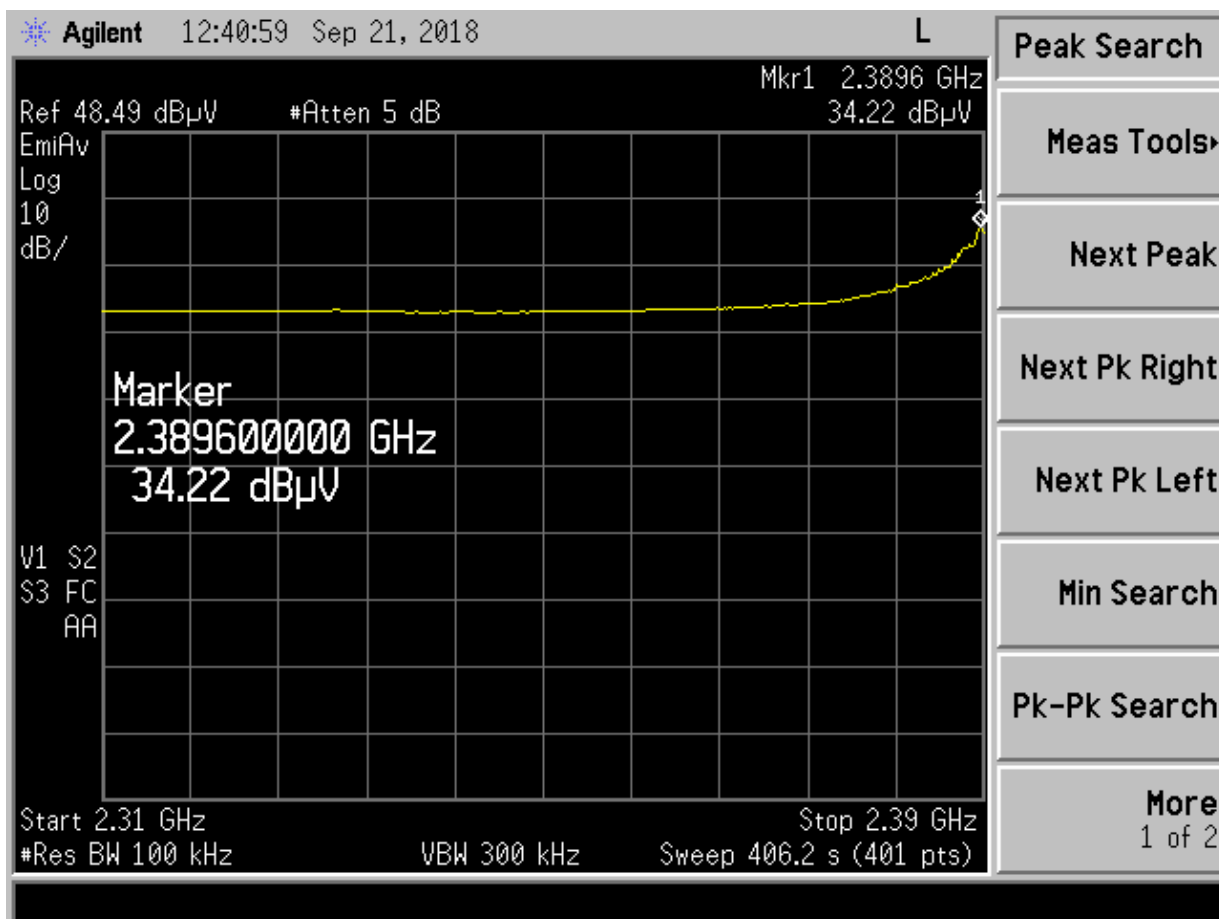


Figure 39. n mode (Chip Antenna) Low Channel Restricted Band – Average

Frequency (MHz)	Test Data (dBuV)	AF+CA-AMP+DC (dB/m)	Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	Margin (dB)	Detector PK/QP/AVG
2389.60	34.22	-1.66	32.56	54.0	3.0m./HORZ	21.4	AVG

US Tech Test Report:
 FCC ID:
 IC:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15/IC RSS Certification
 O7P-4343
 10147A-4343
 18-0268
 October 19, 2018
 Inventek Systems
 ISM4343-X

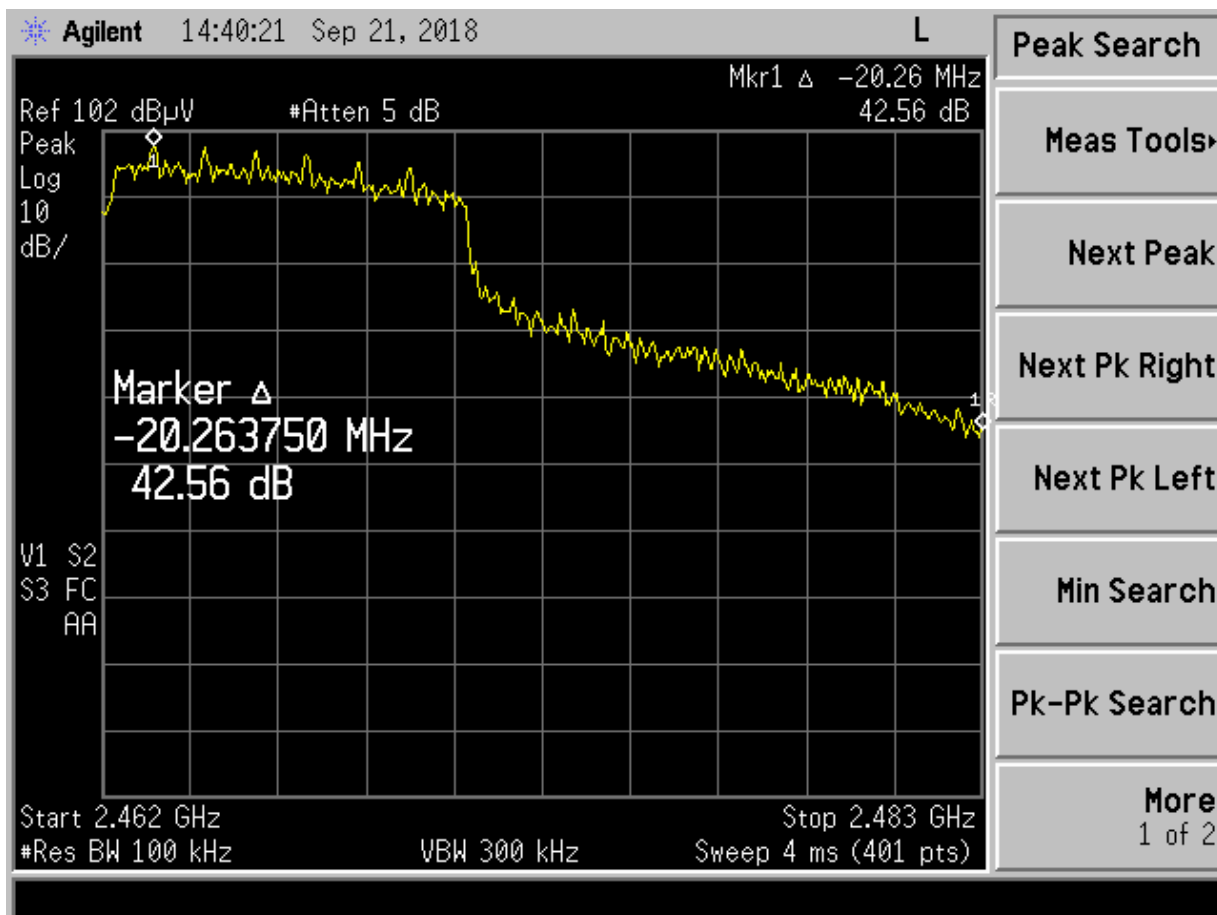


Figure 40. Band Edge Compliance – n mode (Chip Antenna) High Channel Delta – Peak

Higher band edge must be 20 dB below the fundamental. This requirement is met.

Measured Result	42.56	dB
Band Edge Limit	20.00	dB
Band Edge Margin	22.56	dB

US Tech Test Report:
 FCC ID:
 IC:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15/IC RSS Certification
 O7P-4343
 10147A-4343
 18-0268
 October 19, 2018
 Inventek Systems
 ISM4343-X

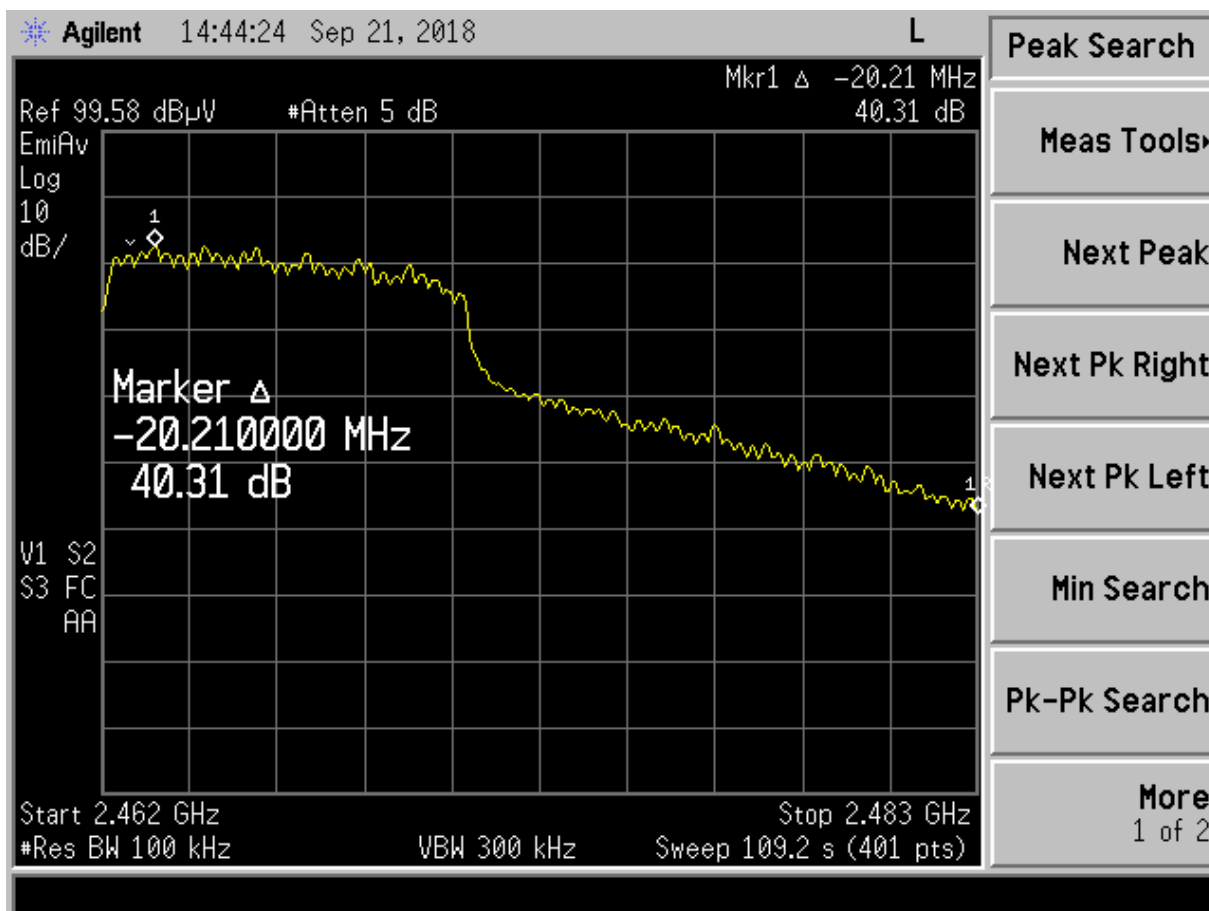


Figure 41. Band Edge Compliance – n mode (Chip Antenna) High Channel Delta - Average

Higher band edge must be 20 dB below the fundamental. This requirement is met.

Measured Result	40.31	dB
Band Edge Limit	20.00	dB
Band Edge Margin	20.31	dB

US Tech Test Report:
 FCC ID:
 IC:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15/IC RSS Certification
 O7P-4343
 10147A-4343
 18-0268
 October 19, 2018
 Inventek Systems
 ISM4343-X

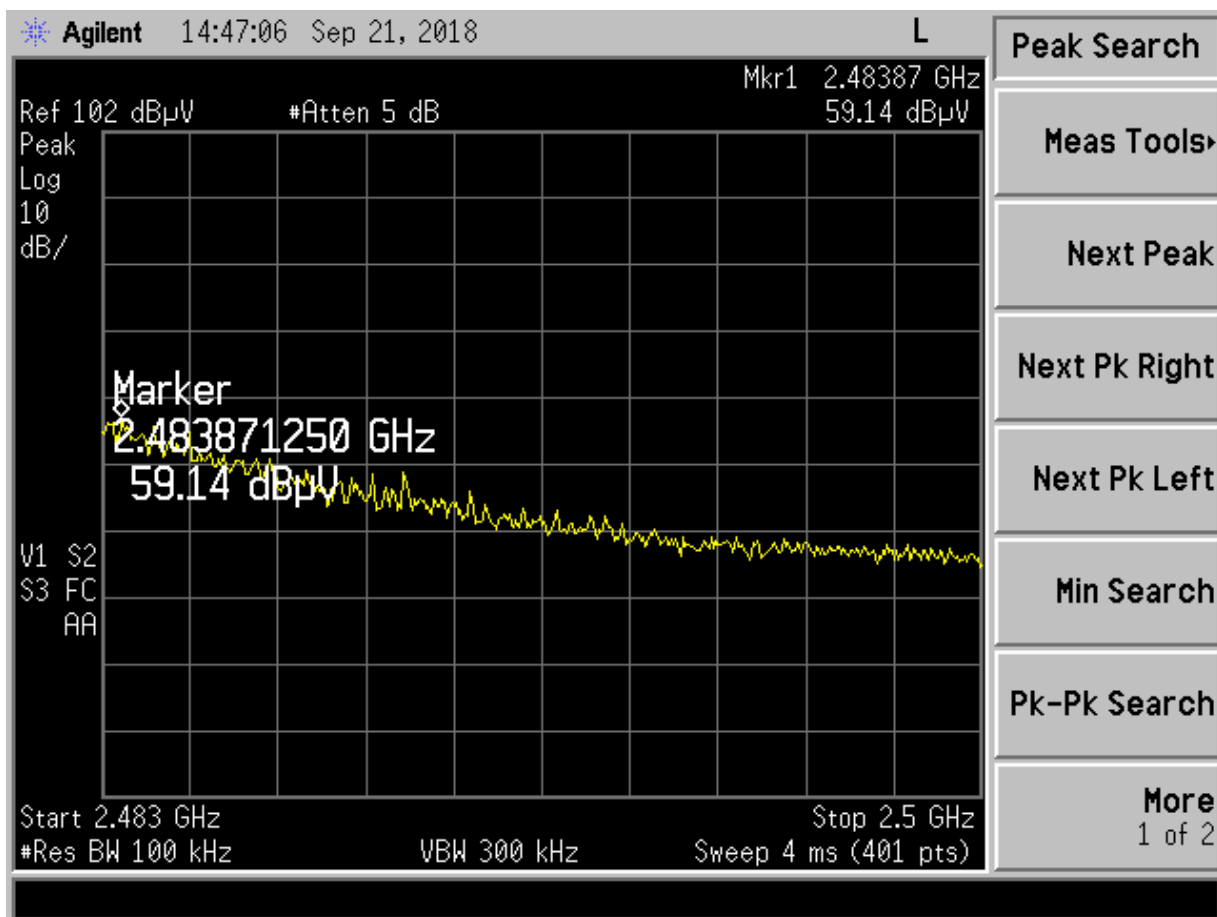


Figure 42. n mode (Chip Antenna) High Channel Restricted Band – Peak

Frequency (MHz)	Test Data (dBuV)	AF+CA-AMP+DC (dB/m)	Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	Margin (dB)	Detector PK/QP/AVG
2483.87	59.14	-0.51	58.63	74.0	3.0m./HORZ	15.4	PK

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

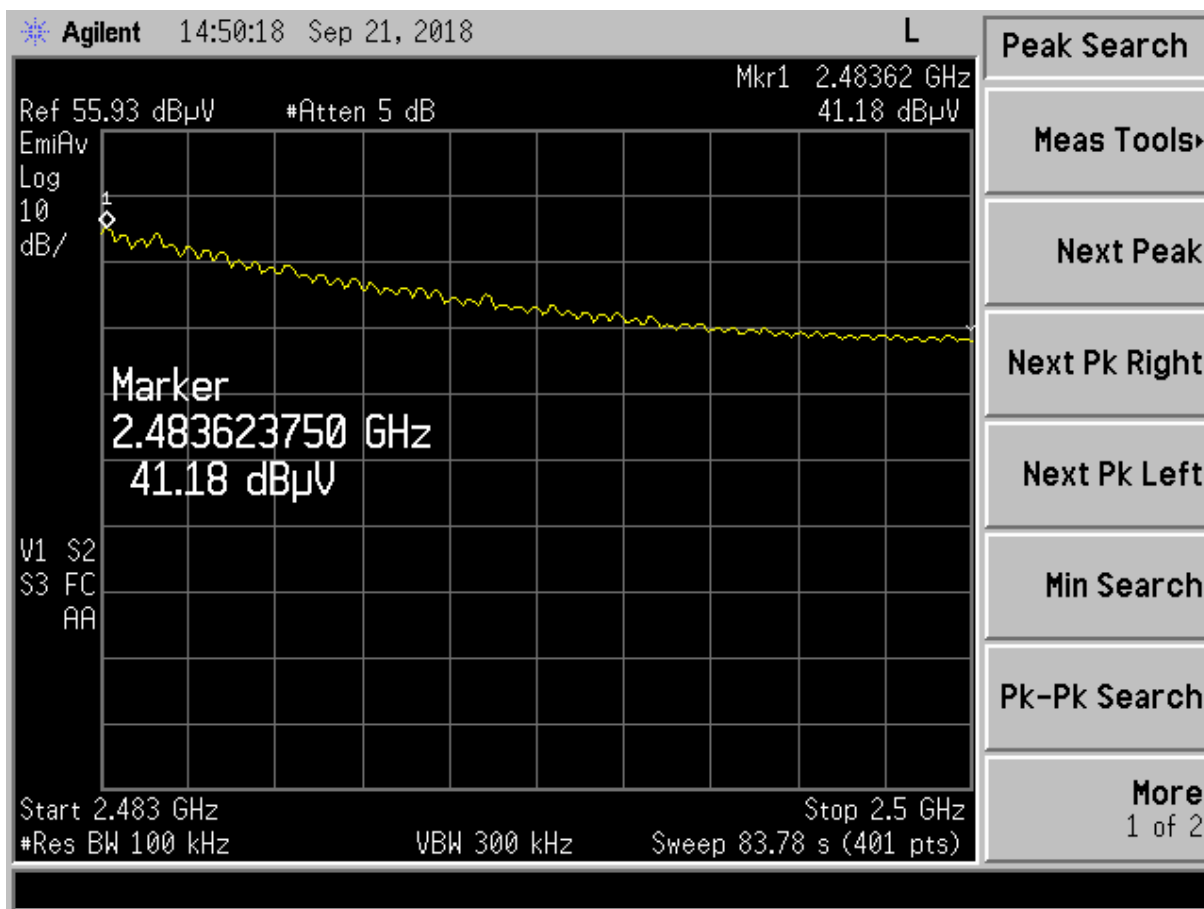


Figure 43. n mode (Chip Antenna) High Channel Restricted Band – Average

Frequency (MHz)	Test Data (dBuV)	AF+CA-AMP+DC (dB/m)	Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	Margin (dB)	Detector PK/QP/AVG
2483.62	41.18	-0.51	40.67	54.0	3.0m./HORZ	13.3	AVG

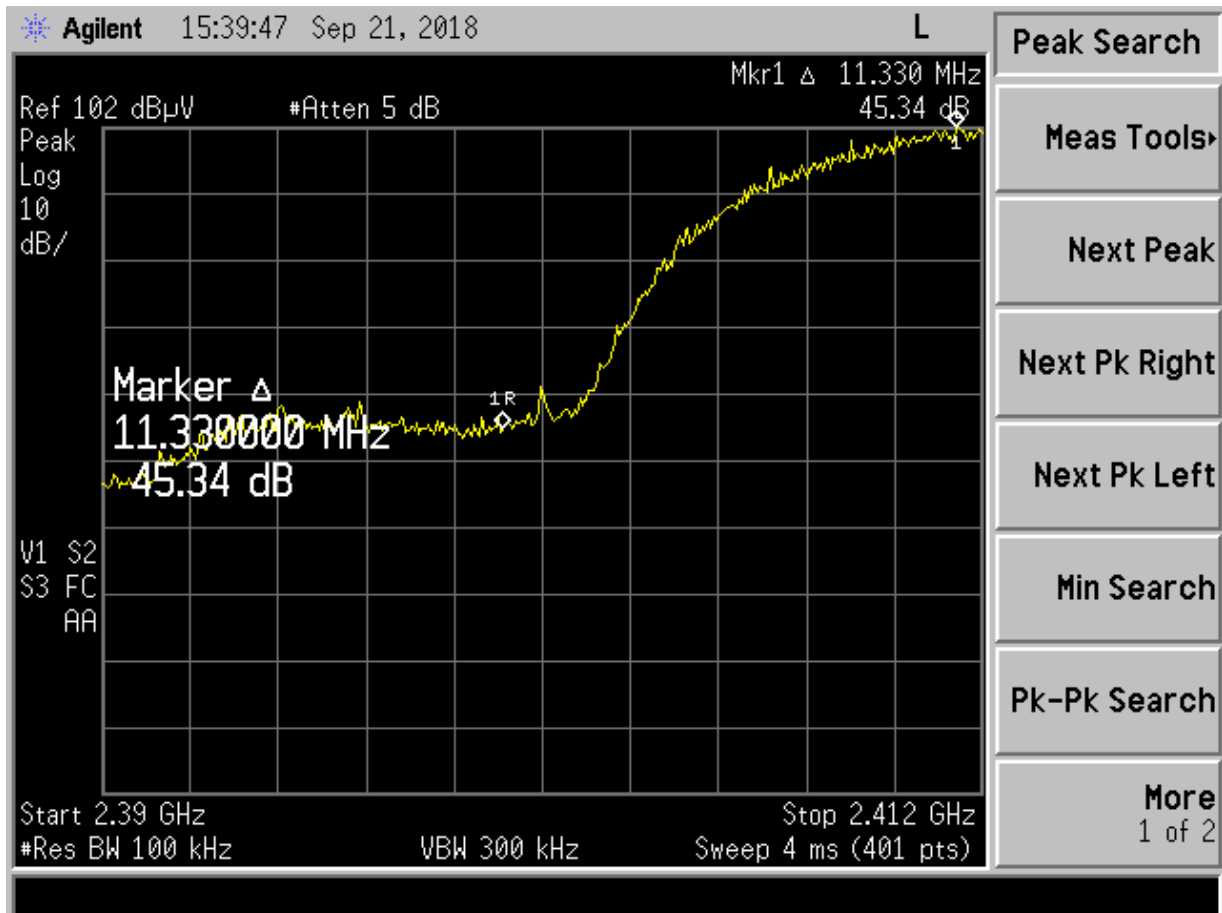


Figure 44. Band Edge Compliance – b mode (External Antenna) Low Channel Delta – Peak

Lower band edge must be 20 dB below the fundamental. This requirement is met.

Measured Result	45.34	dB
Band Edge Limit	20.00	dB
Band Edge Margin	25.34	dB

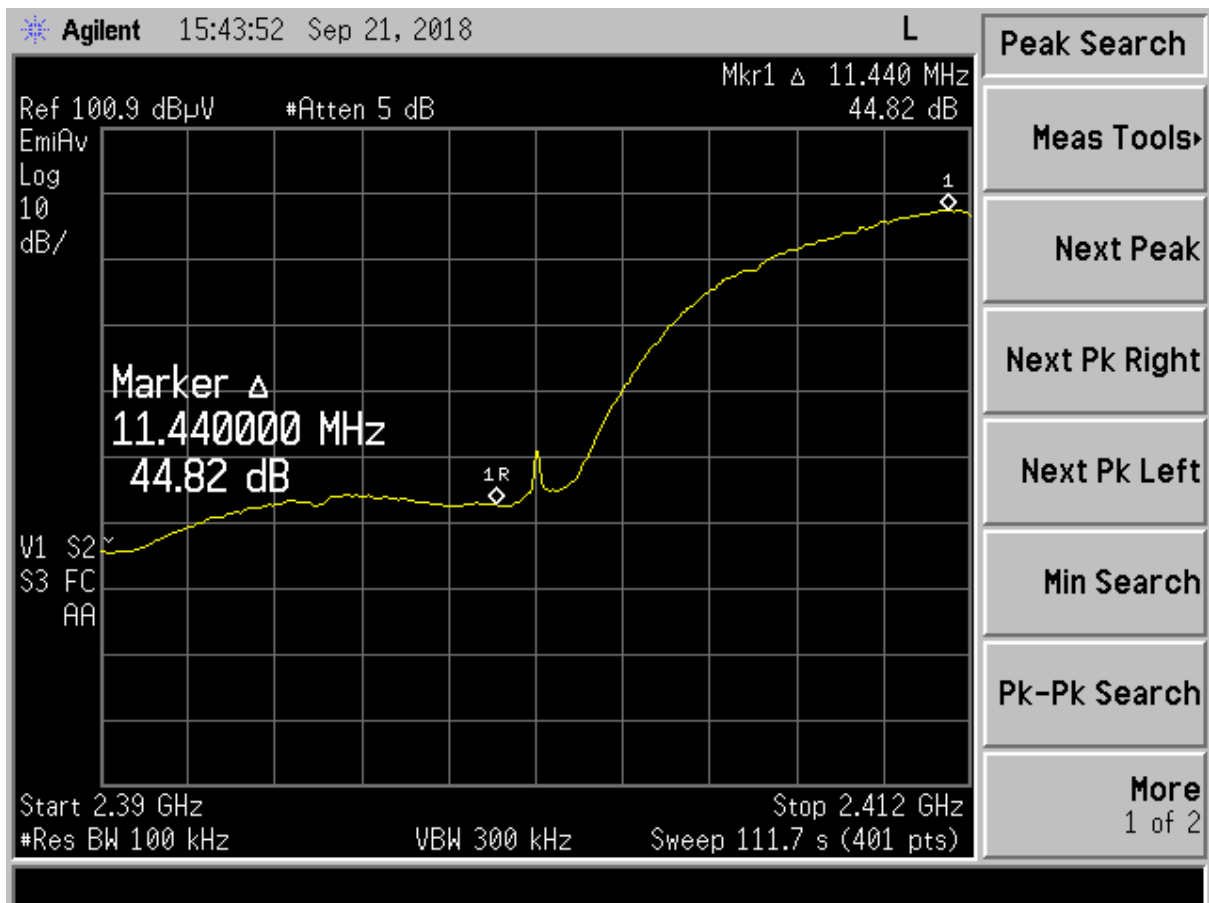


Figure 45. Band Edge Compliance – b mode (External Antenna) Low Channel Delta –Average

Lower band edge must be 20 dB below the fundamental. This requirement is met.

Measured Result	44.82	dB
Band Edge Limit	20.00	dB
Band Edge Margin	24.82	dB

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

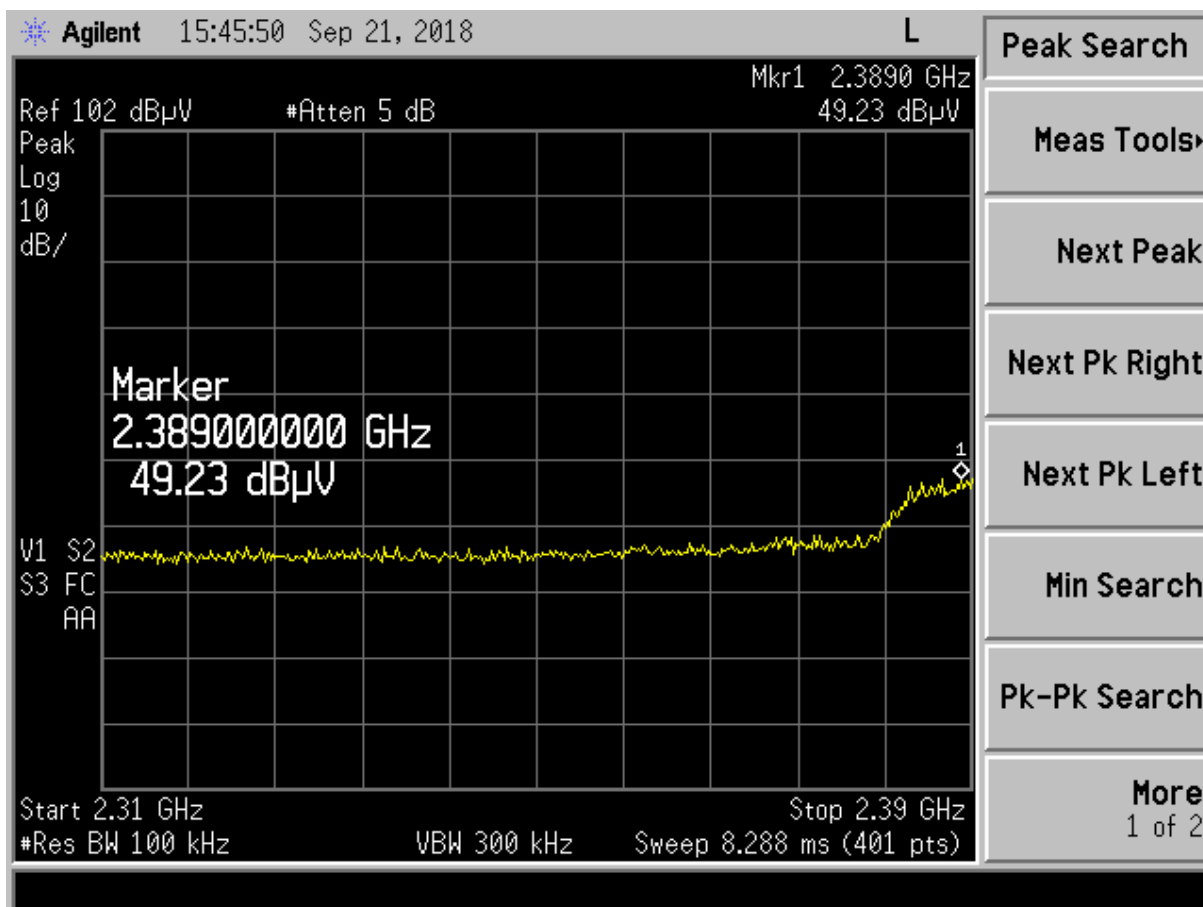


Figure 46. b mode (External Antenna) Low Channel Restricted Band – Peak

Frequency (MHz)	Test Data (dBuV)	AF+CA-AMP+DC (dB/m)	Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	Margin (dB)	Detector PK/QP/AVG
2389.00	49.23	-1.78	47.45	74.0	3.0m./VERT	26.5	PK

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

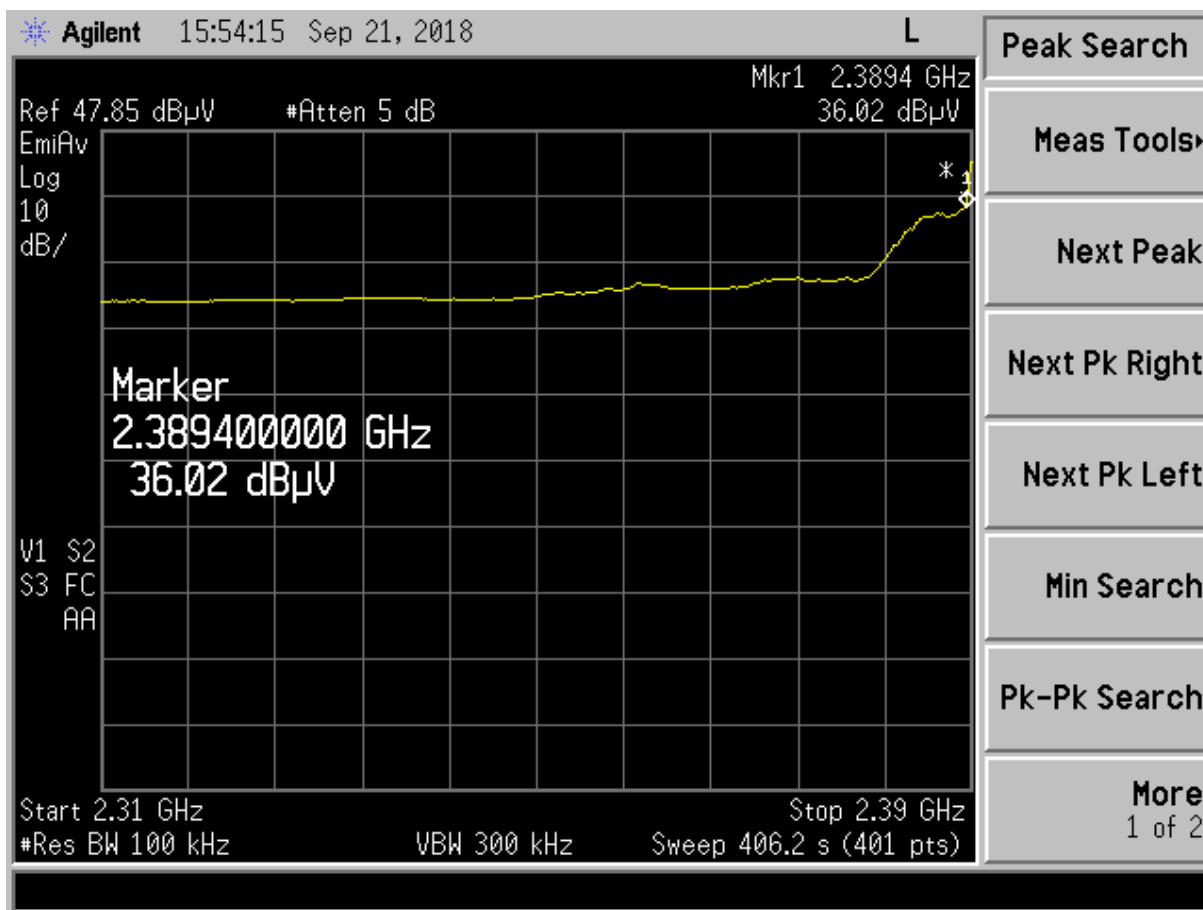


Figure 47. b mode (External Antenna) Low Channel Restricted Band – Average

Frequency (MHz)	Test Data (dBuV)	AF+CA-AMP+DC (dB/m)	Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	Margin (dB)	Detector PK/QP/AVG
2389.40	36.02	-1.78	34.24	54.0	3.0m./VERT	19.8	AVG

US Tech Test Report:
 FCC ID:
 IC:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15/IC RSS Certification
 O7P-4343
 10147A-4343
 18-0268
 October 19, 2018
 Inventek Systems
 ISM4343-X

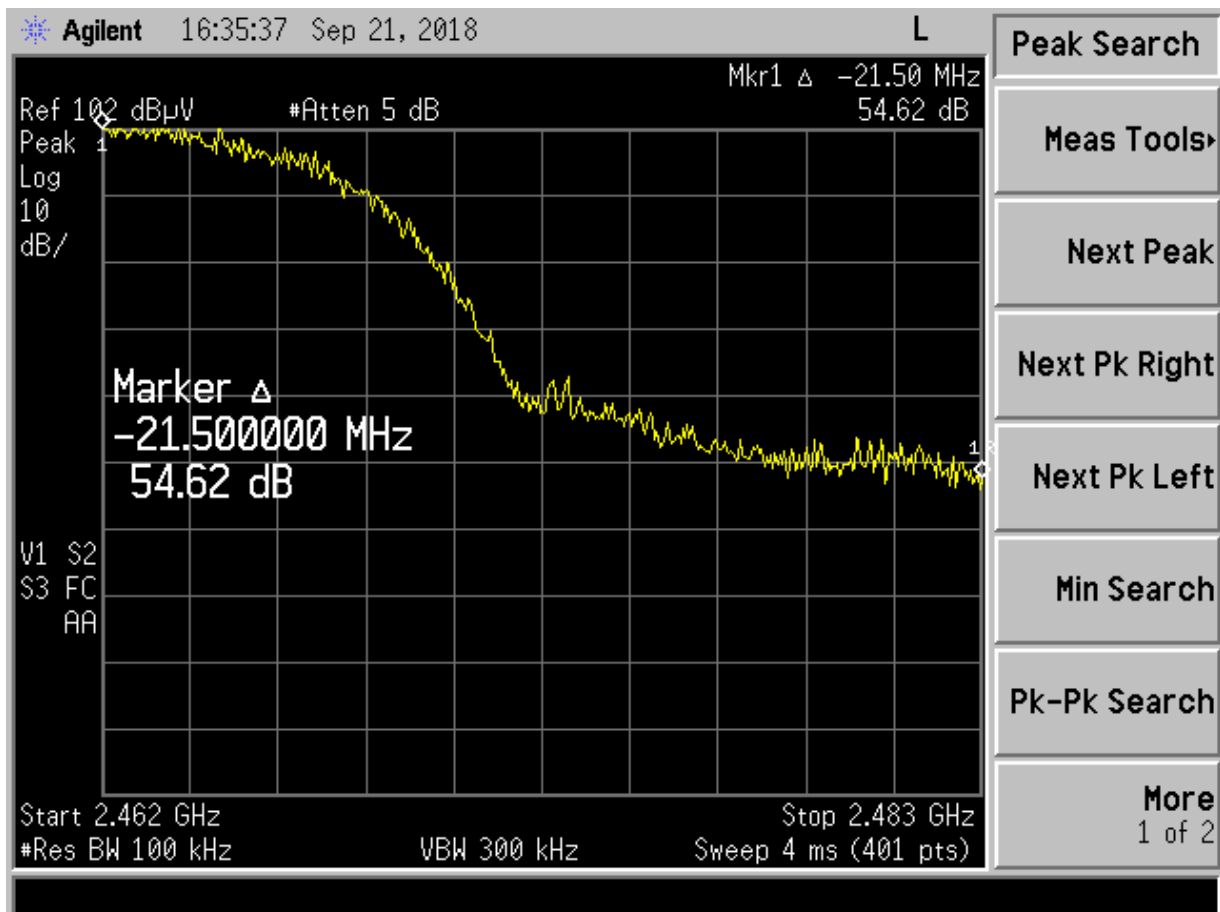


Figure 48. Band Edge Compliance – b mode (External Antenna) High Channel Delta – Peak

Higher band edge must be 20 dB below the fundamental. This requirement is met.

Measured Result	54.62	dB
Band Edge Limit	20.00	dB
Band Edge Margin	34.62	dB

US Tech Test Report:
 FCC ID:
 IC:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15/IC RSS Certification
 O7P-4343
 10147A-4343
 18-0268
 October 19, 2018
 Inventek Systems
 ISM4343-X

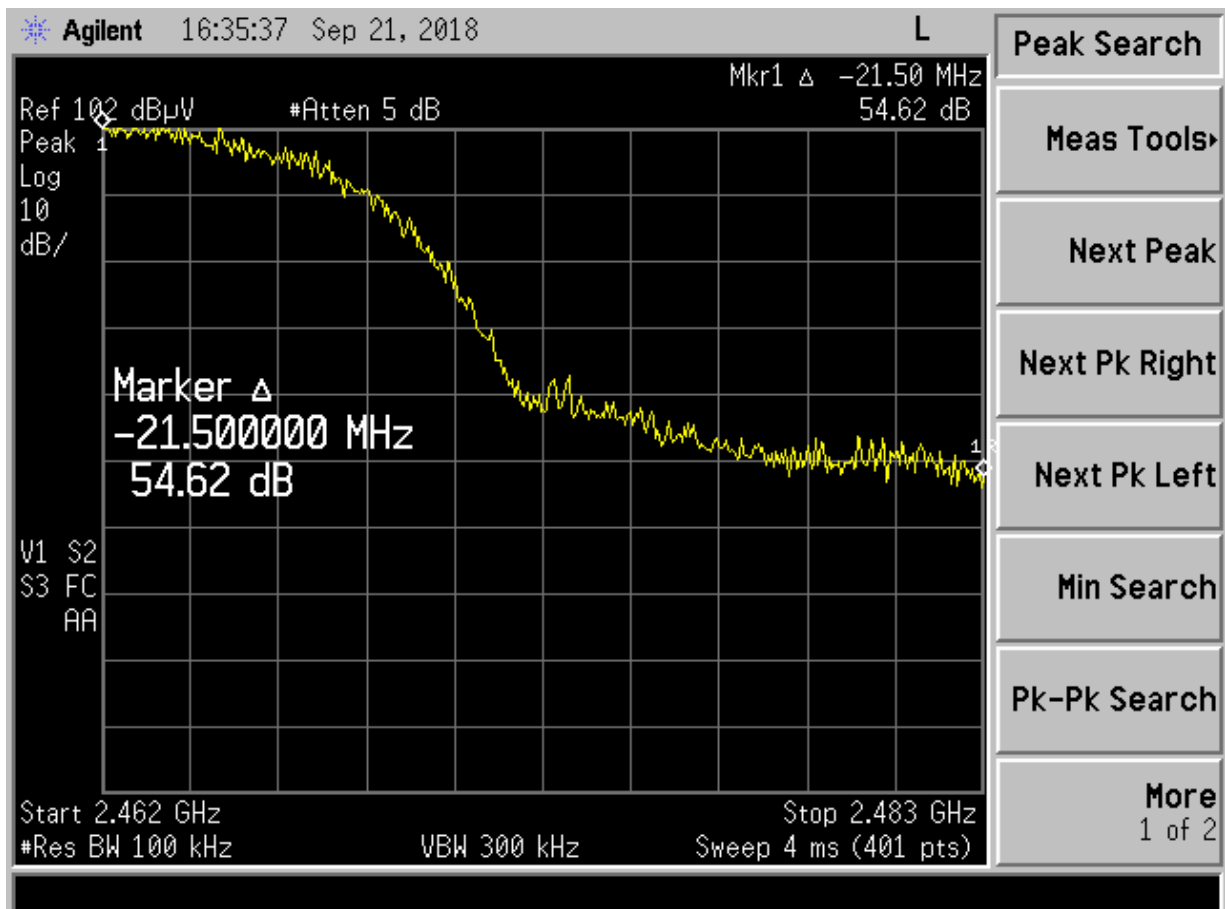


Figure 49. Band Edge Compliance – b mode (External Antenna) High Channel Delta - Average

Higher band edge must be 20 dB below the fundamental. This requirement is met.

Measured Result	54.62	dB
Band Edge Limit	20.00	dB
Band Edge Margin	34.62	dB

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

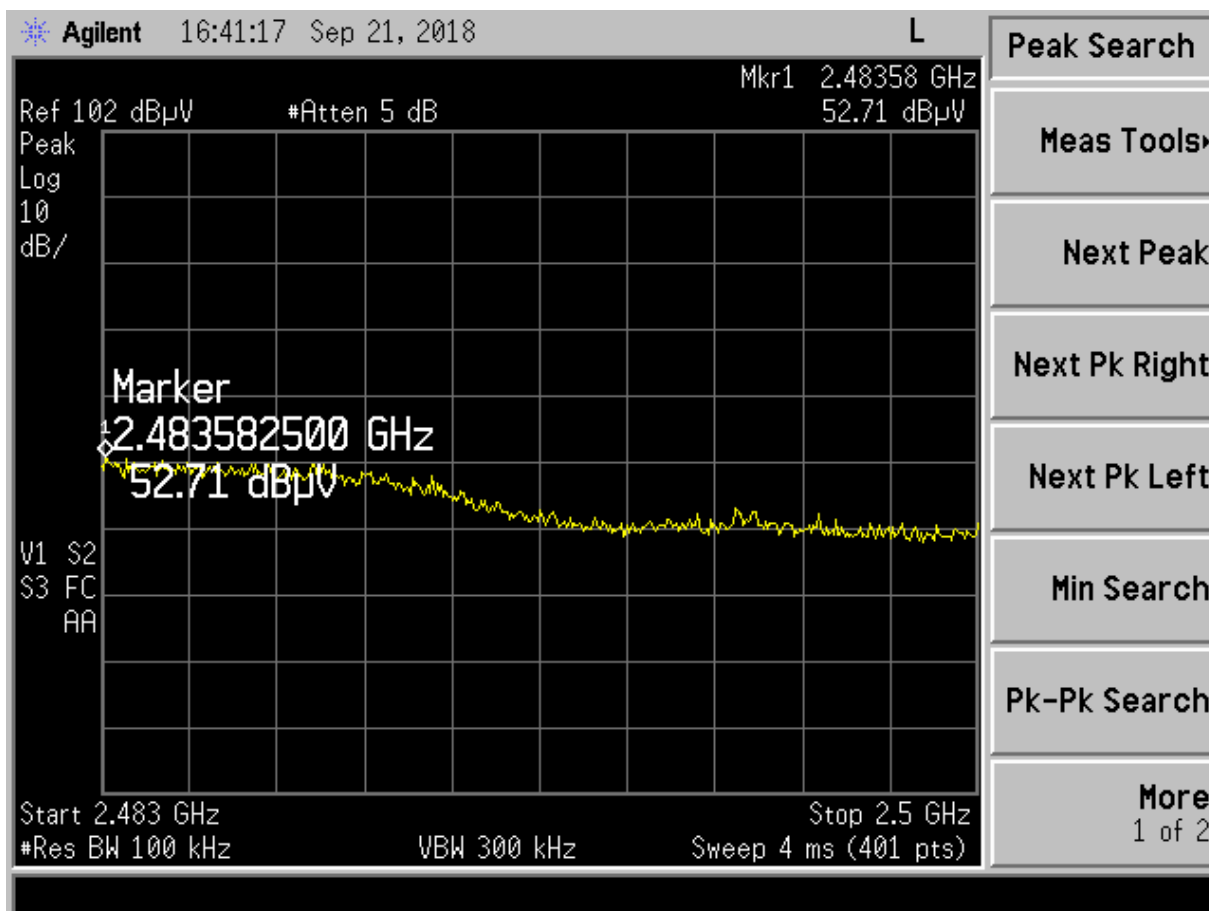


Figure 50. b mode (External Antenna) High Channel Restricted Band – Peak

Frequency (MHz)	Test Data (dBuV)	AF+CA-AMP+DC (dB/m)	Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	Margin (dB)	Detector PK/QP/AVG
2483.58	52.71	-0.33	52.38	74.0	3.0m./VERT	21.6	PK

US Tech Test Report:
 FCC ID:
 IC:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15/IC RSS Certification
 O7P-4343
 10147A-4343
 18-0268
 October 19, 2018
 Inventek Systems
 ISM4343-X

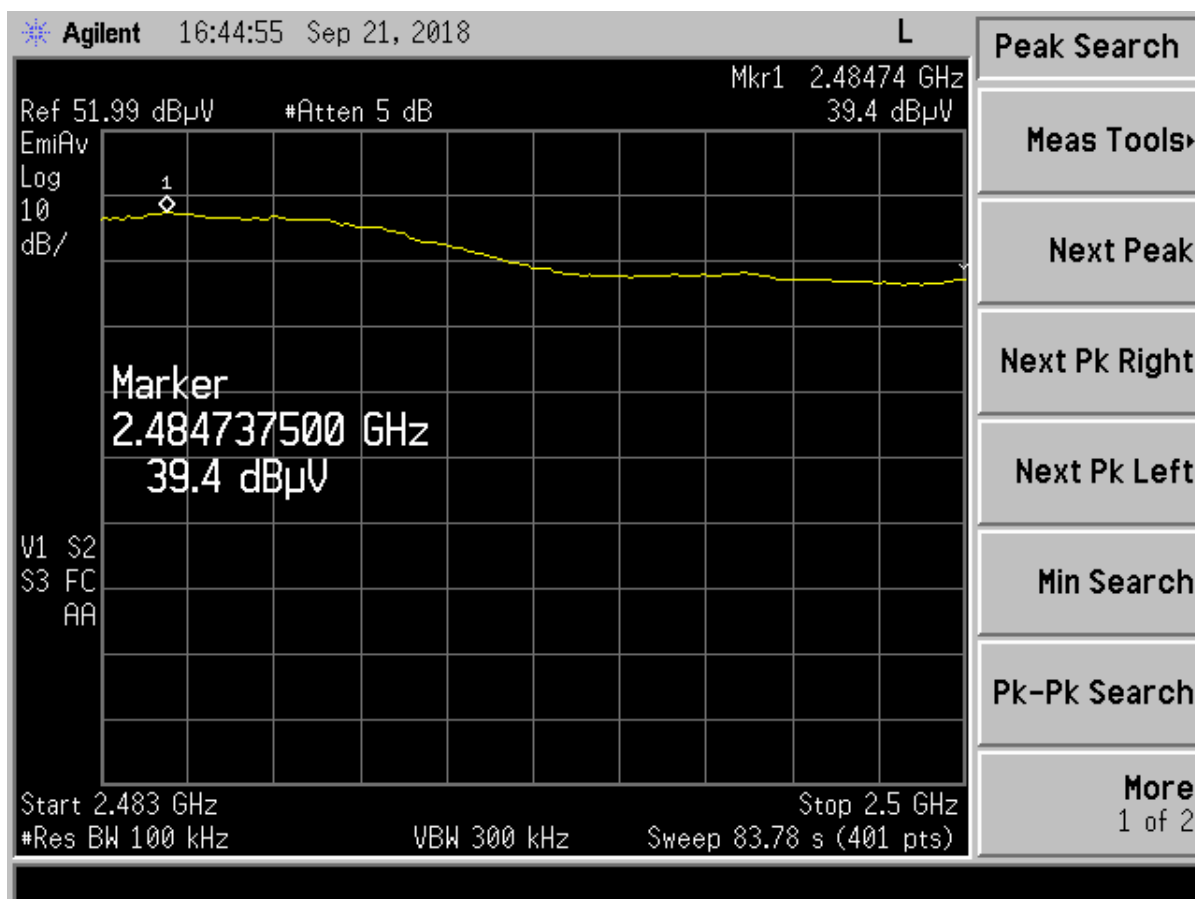


Figure 51. b mode (External Antenna) High Channel Restricted Band – Average

Frequency (MHz)	Test Data (dBuV)	AF+CA-AMP+DC (dB/m)	Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	Margin (dB)	Detector PK/QP/AVG
2484.73	39.40	-0.33	39.07	54.0	3.0m./VERT	14.9	AVG

US Tech Test Report:
 FCC ID:
 IC:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15/IC RSS Certification
 O7P-4343
 10147A-4343
 18-0268
 October 19, 2018
 Inventek Systems
 ISM4343-X

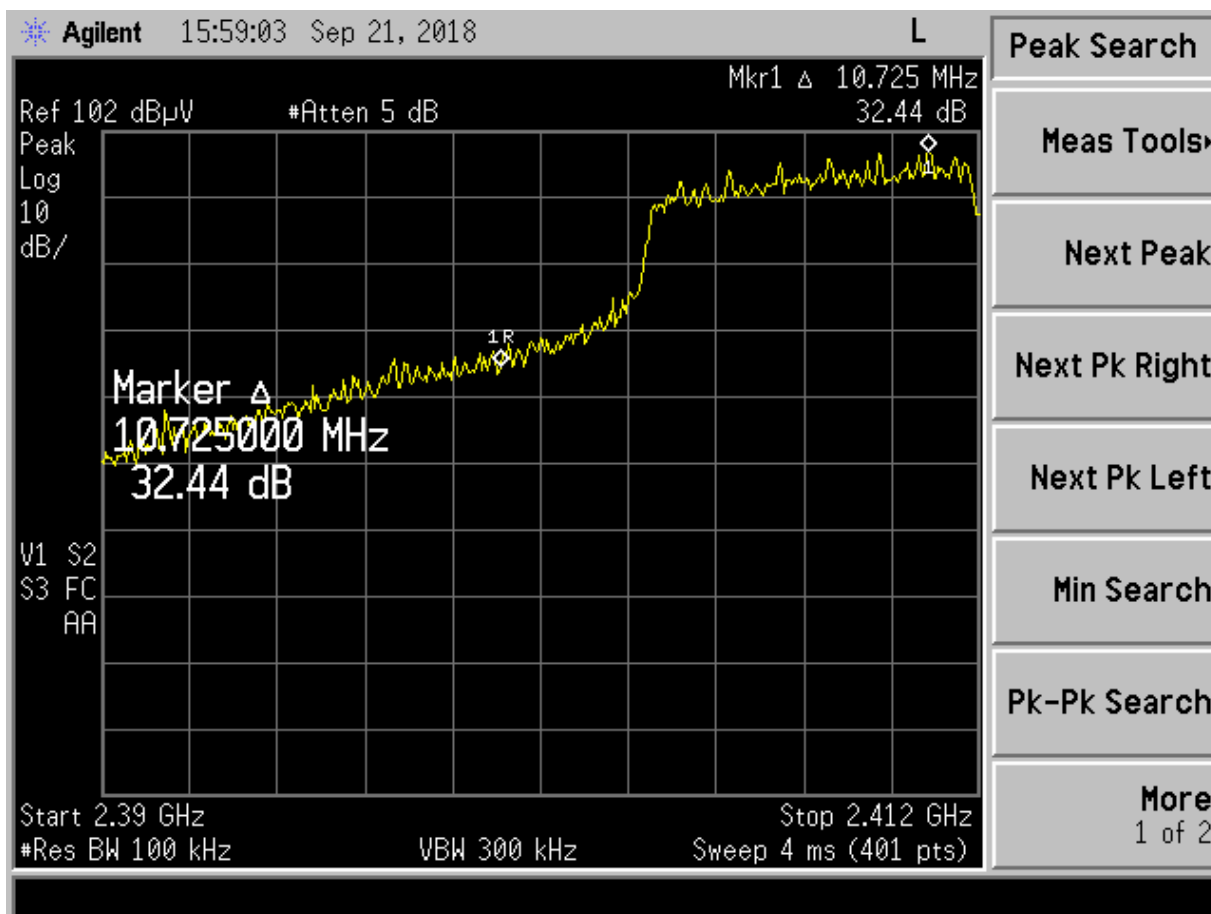


Figure 52. Band Edge Compliance – g mode (External Antenna) Low Channel Delta – Peak

Lower band edge must be 20 dB below the fundamental. This requirement is met.

Measured Result	32.44	dB
Band Edge Limit	20.00	dB
Band Edge Margin	22.64	dB

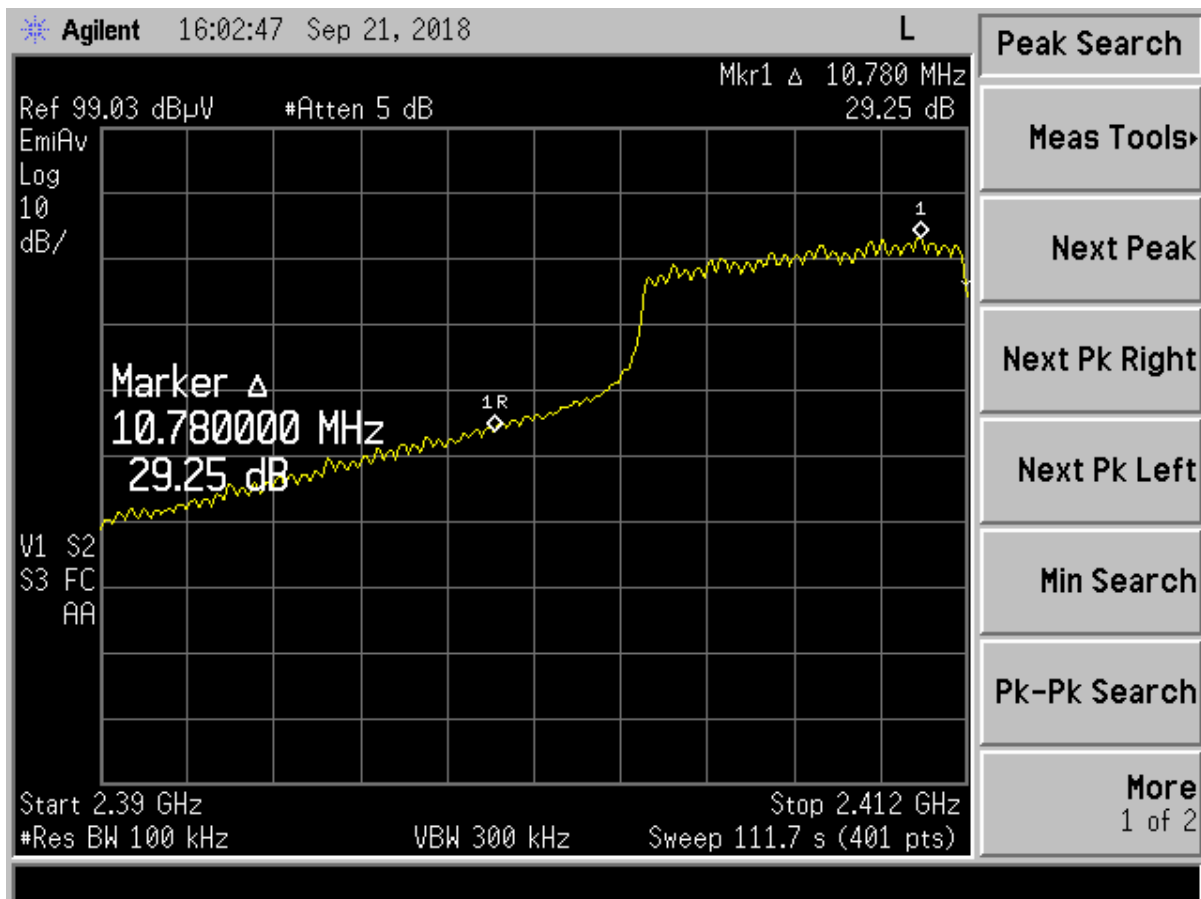


Figure 53. Band Edge Compliance – g mode (External Antenna) Low Channel Delta –Average

Lower band edge must be 20 dB below the fundamental. This requirement is met.

Measured Result	29.25	dB
Band Edge Limit	20.00	dB
Band Edge Margin	9.25	dB

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

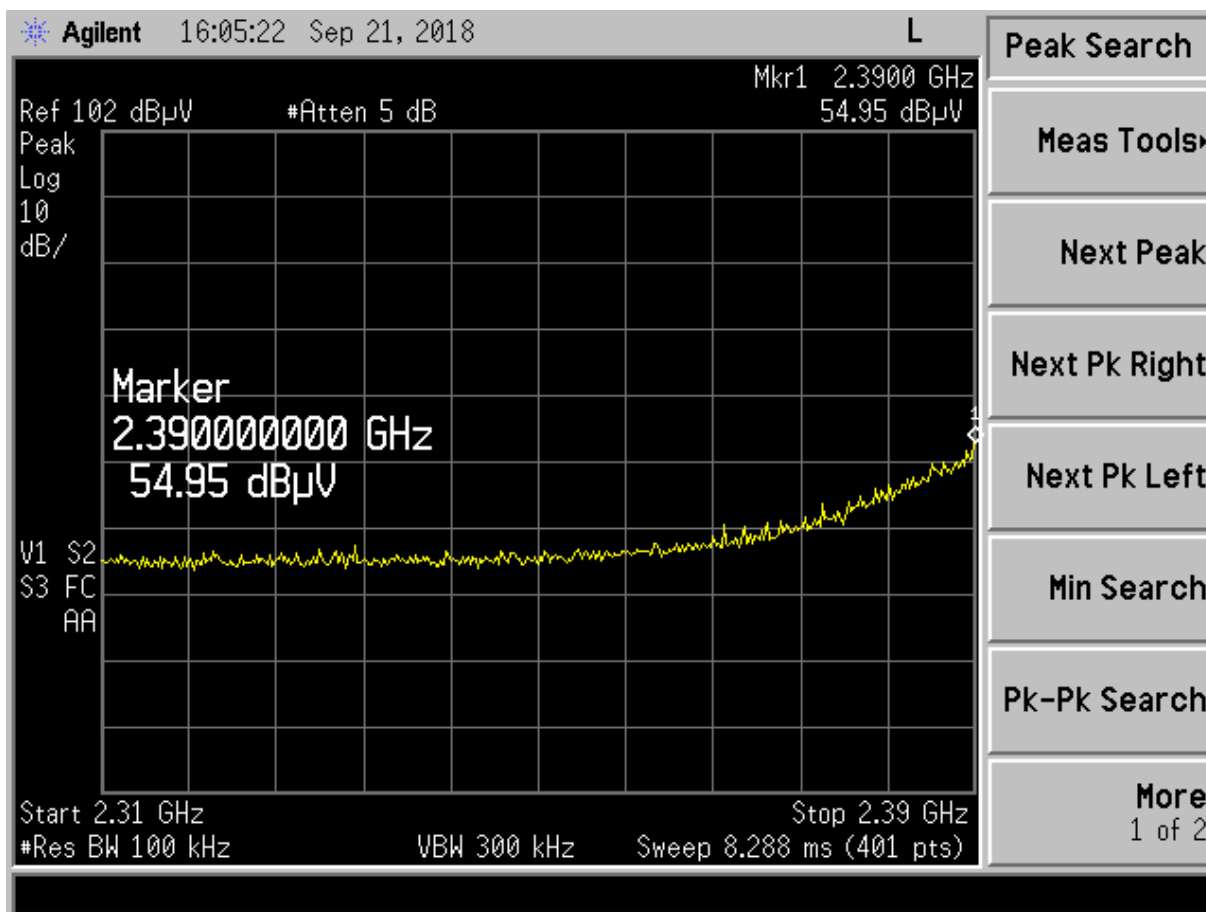


Figure 54. g mode (External Antenna) Low Channel Restricted Band – Peak

Frequency (MHz)	Test Data (dBuV)	AF+CA-AMP+DC (dB/m)	Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	Margin (dB)	Detector PK/QP/AVG
2390.00	54.95	-1.80	53.15	74.0	3.0m./VERT	20.8	PK

US Tech Test Report:
 FCC ID:
 IC:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15/IC RSS Certification
 O7P-4343
 10147A-4343
 18-0268
 October 19, 2018
 Inventek Systems
 ISM4343-X

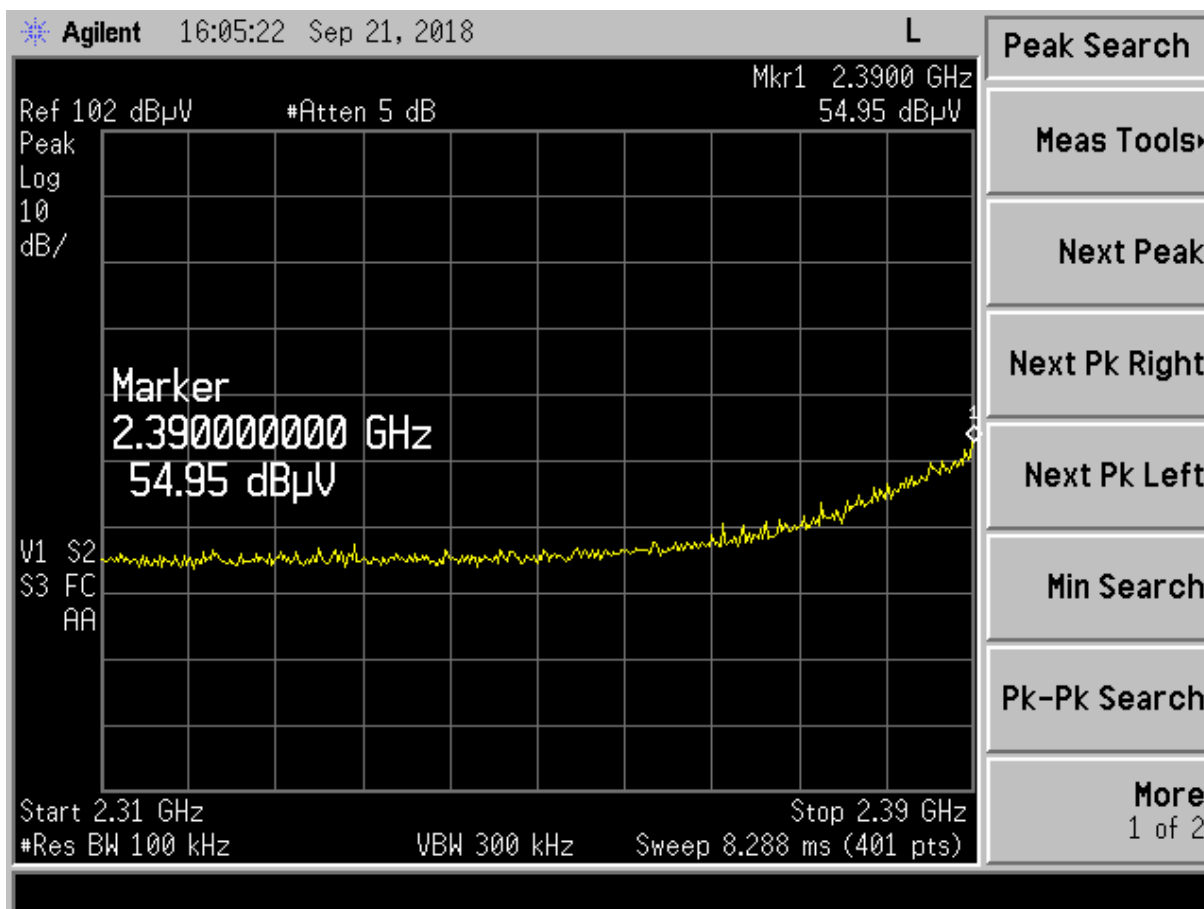


Figure 55. g mode (External Antenna) Low Channel Restricted Band – Average

Frequency (MHz)	Test Data (dBuV)	AF+CA-AMP+DC (dB/m)	Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	Margin (dB)	Detector PK/QP/AVG
2390.00	54.95	-1.78	36.56	54.0	3.0m./VERT	17.4	AVG

US Tech Test Report:
 FCC ID:
 IC:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15/IC RSS Certification
 O7P-4343
 10147A-4343
 18-0268
 October 19, 2018
 Inventek Systems
 ISM4343-X

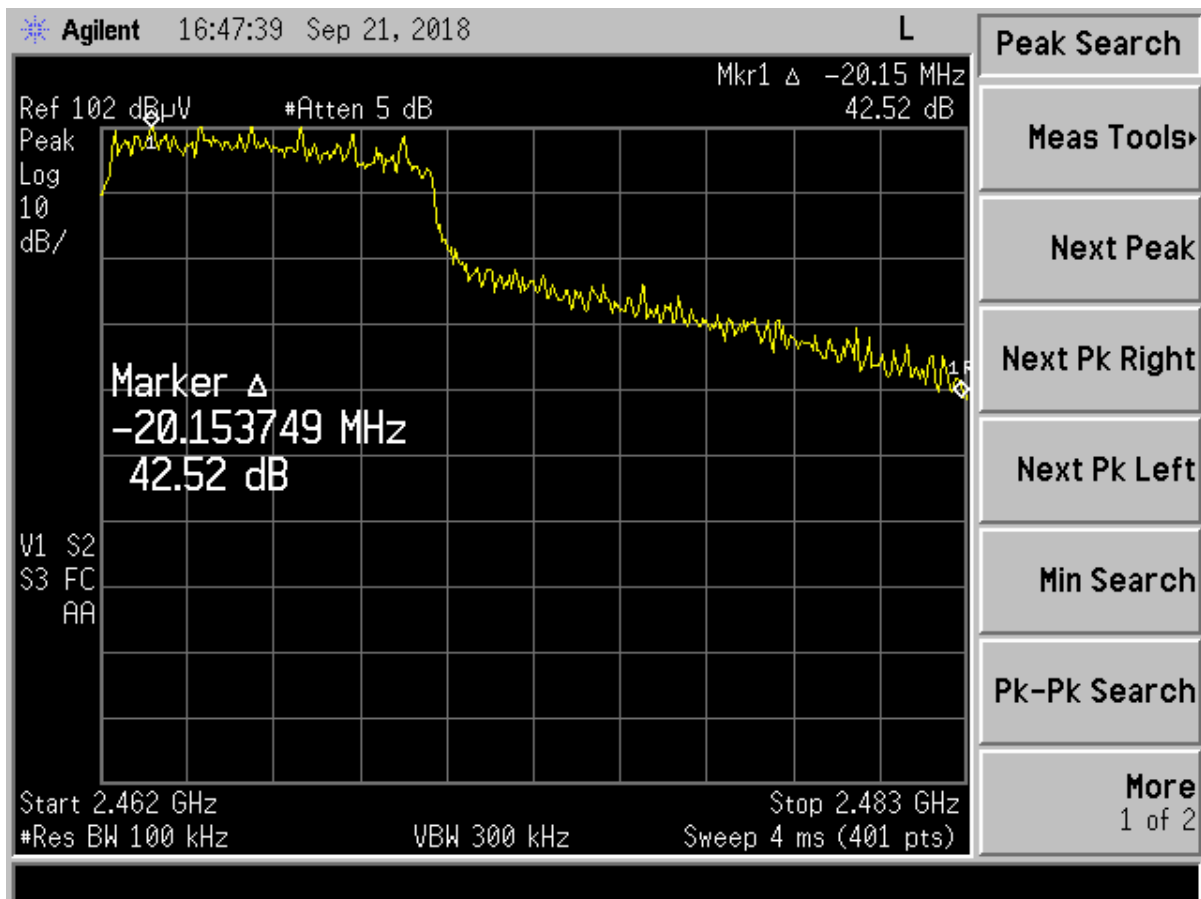


Figure 56. Band Edge Compliance – g mode (External Antenna) High Channel Delta – Peak

Higher band edge must be 20 dB below the fundamental. This requirement is met.

Measured Result	42.52	dB
Band Edge Limit	20.00	dB
Band Edge Margin	22.52	dB

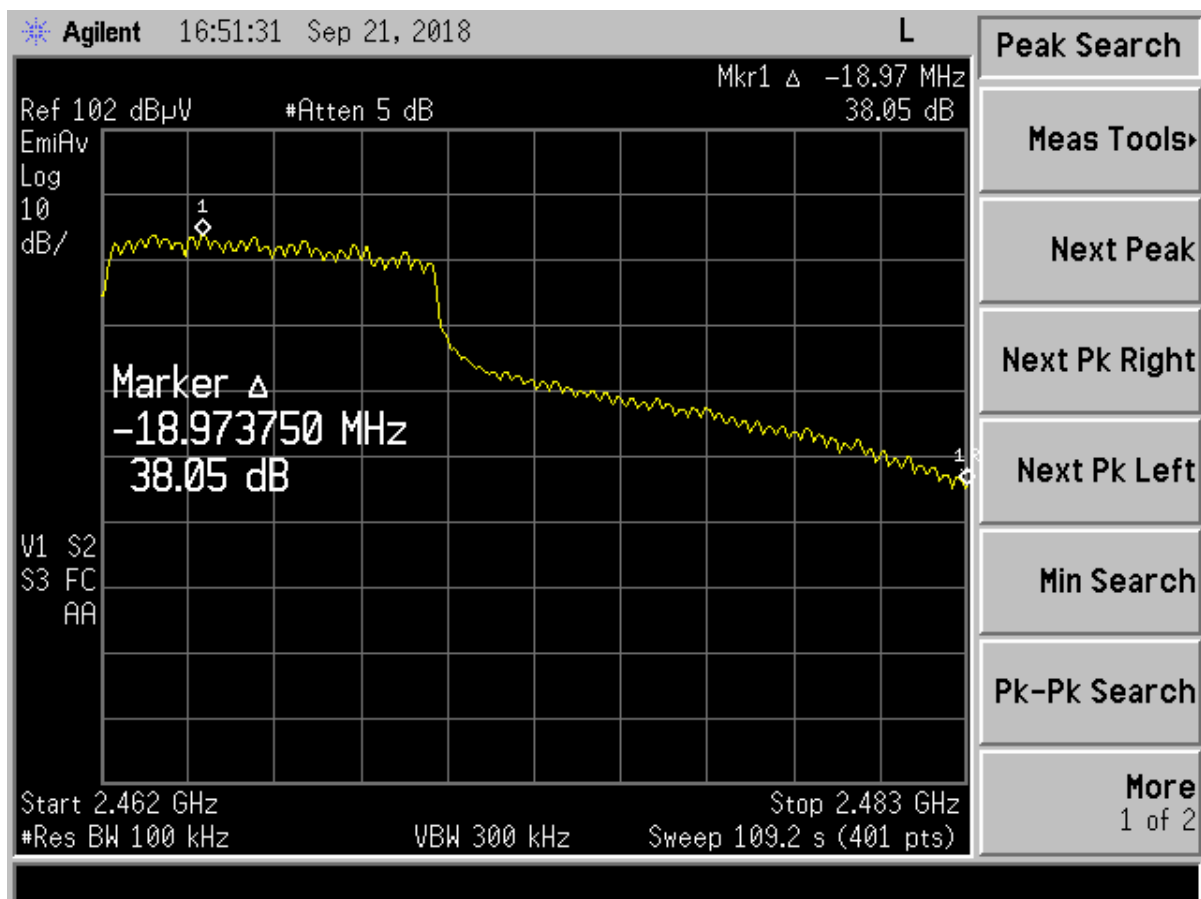


Figure 57. Band Edge Compliance – g mode (External Antenna) High Channel Delta - Average

Higher band edge must be 20 dB below the fundamental. This requirement is met.

Measured Result	38.05	dB
Band Edge Limit	20.00	dB
Band Edge Margin	18.05	dB

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

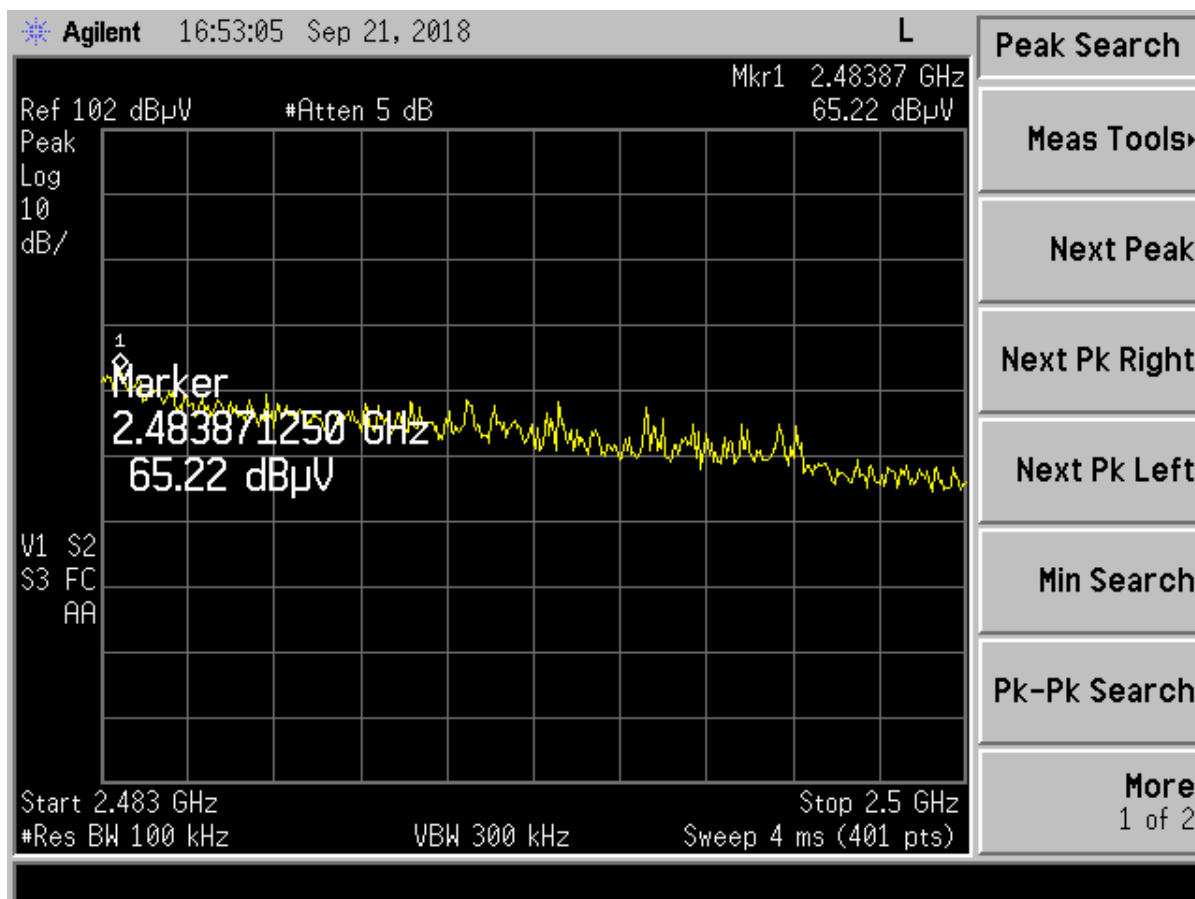


Figure 58. g mode (External Antenna) High Channel Restricted Band – Peak

Frequency (MHz)	Test Data (dBuV)	AF+CA-AMP+DC (dB/m)	Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	Margin (dB)	Detector PK/QP/AVG
2483.87	65.22	-0.33	64.89	74.0	3.0m./VERT	9.1	PK

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

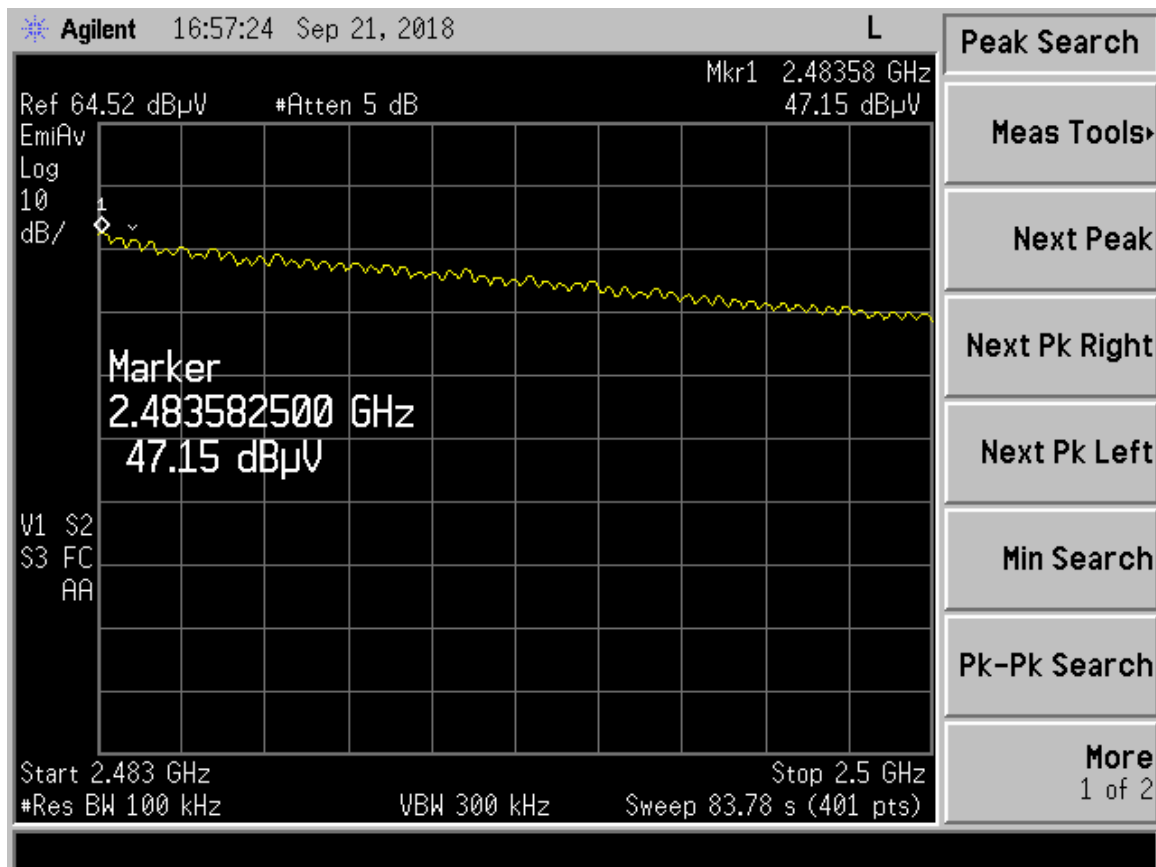


Figure 59. g mode (External Antenna) High Channel Restricted Band – Average

Frequency (MHz)	Test Data (dBuV)	AF+CA-AMP+DC (dB/m)	Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	Margin (dB)	Detector PK/QP/AVG
2483.58	47.15	-0.33	46.82	54.0	3.0m./VERT	7.2	AVG

US Tech Test Report:
 FCC ID:
 IC:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15/IC RSS Certification
 O7P-4343
 10147A-4343
 18-0268
 October 19, 2018
 Inventek Systems
 ISM4343-X

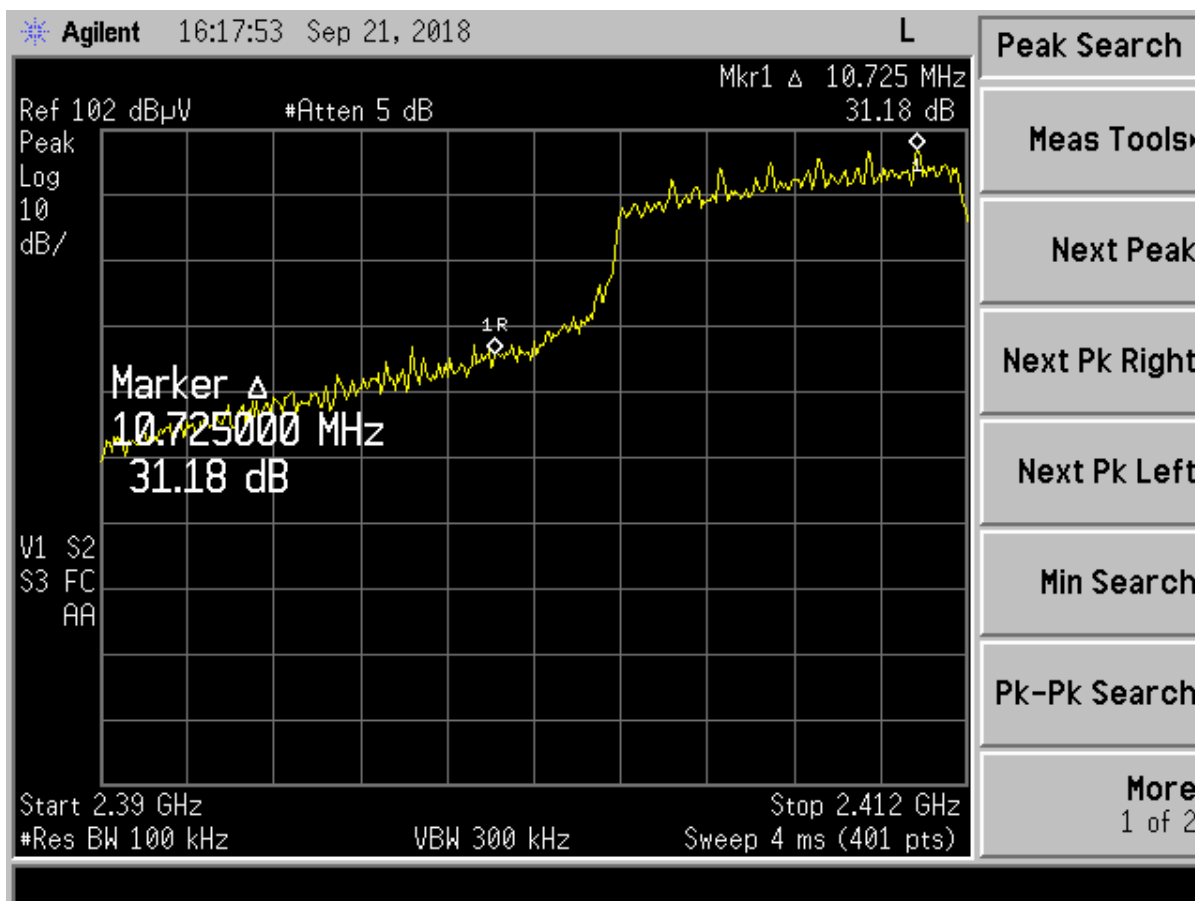


Figure 60. Band Edge Compliance – n mode (External Antenna) Low Channel Delta – Peak

Lower band edge must be 20 dB below the fundamental. This requirement is met.

Measured Result	31.18	dB
Band Edge Limit	20.00	dB
Band Edge Margin	11.18	dB

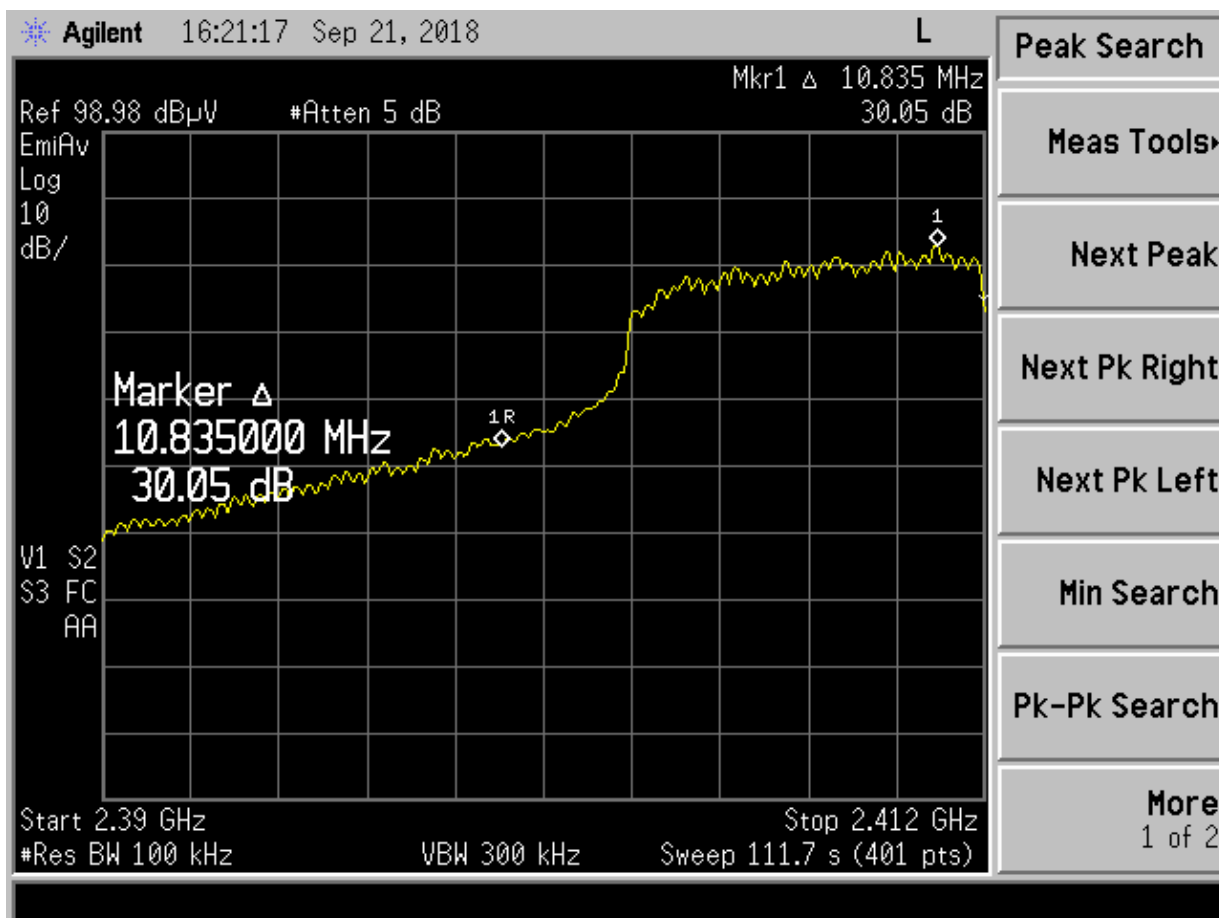


Figure 61. Band Edge Compliance – n mode (External Antenna) Low Channel Delta –Average

Lower band edge must be 20 dB below the fundamental. This requirement is met.

Measured Result	30.05	dB
Band Edge Limit	20.00	dB
Band Edge Margin	10.05	dB

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

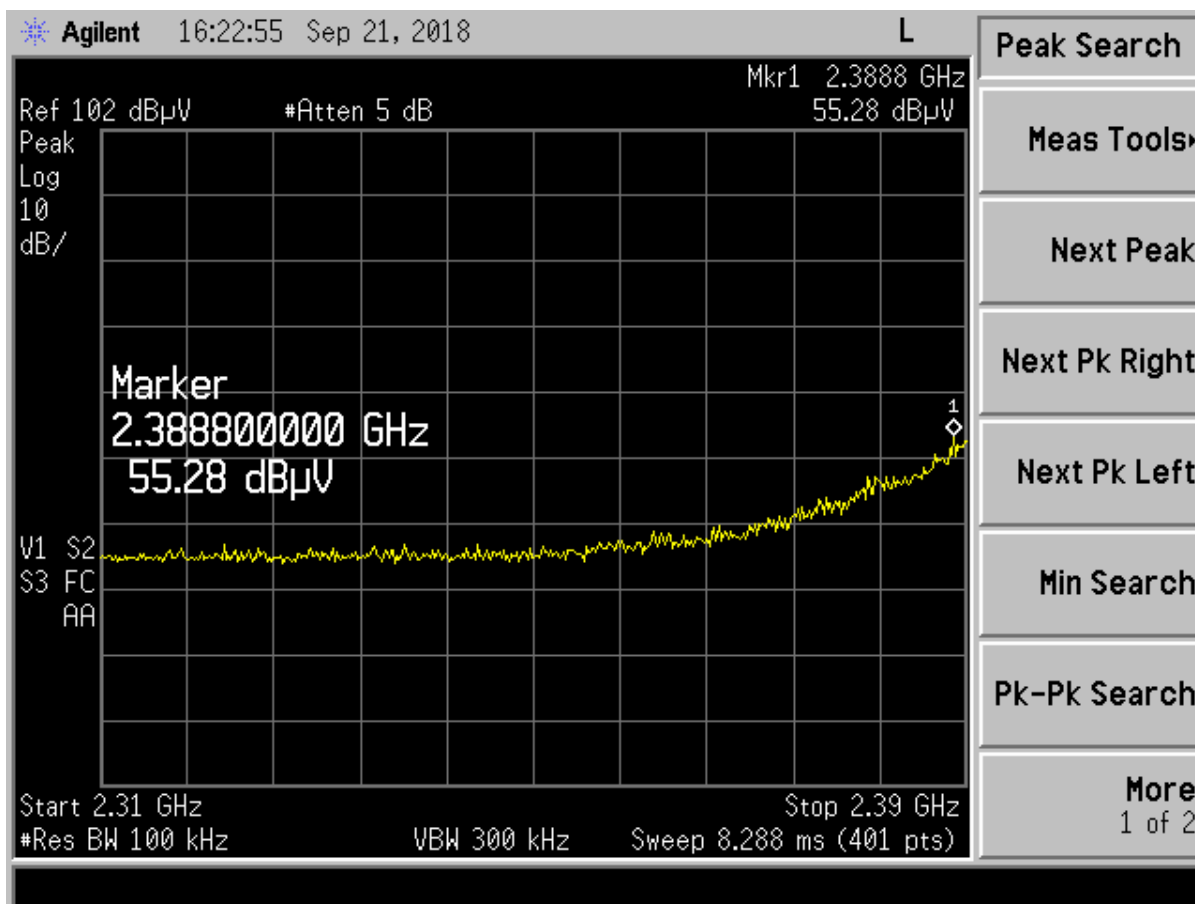


Figure 62. n mode (External Antenna) Low Channel Restricted Band – Peak

Frequency (MHz)	Test Data (dBuV)	AF+CA-AMP+DC (dB/m)	Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	Margin (dB)	Detector PK/QP/AVG
2388.80	55.28	-1.78	53.50	74.0	3.0m./VERT	20.5	PK

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

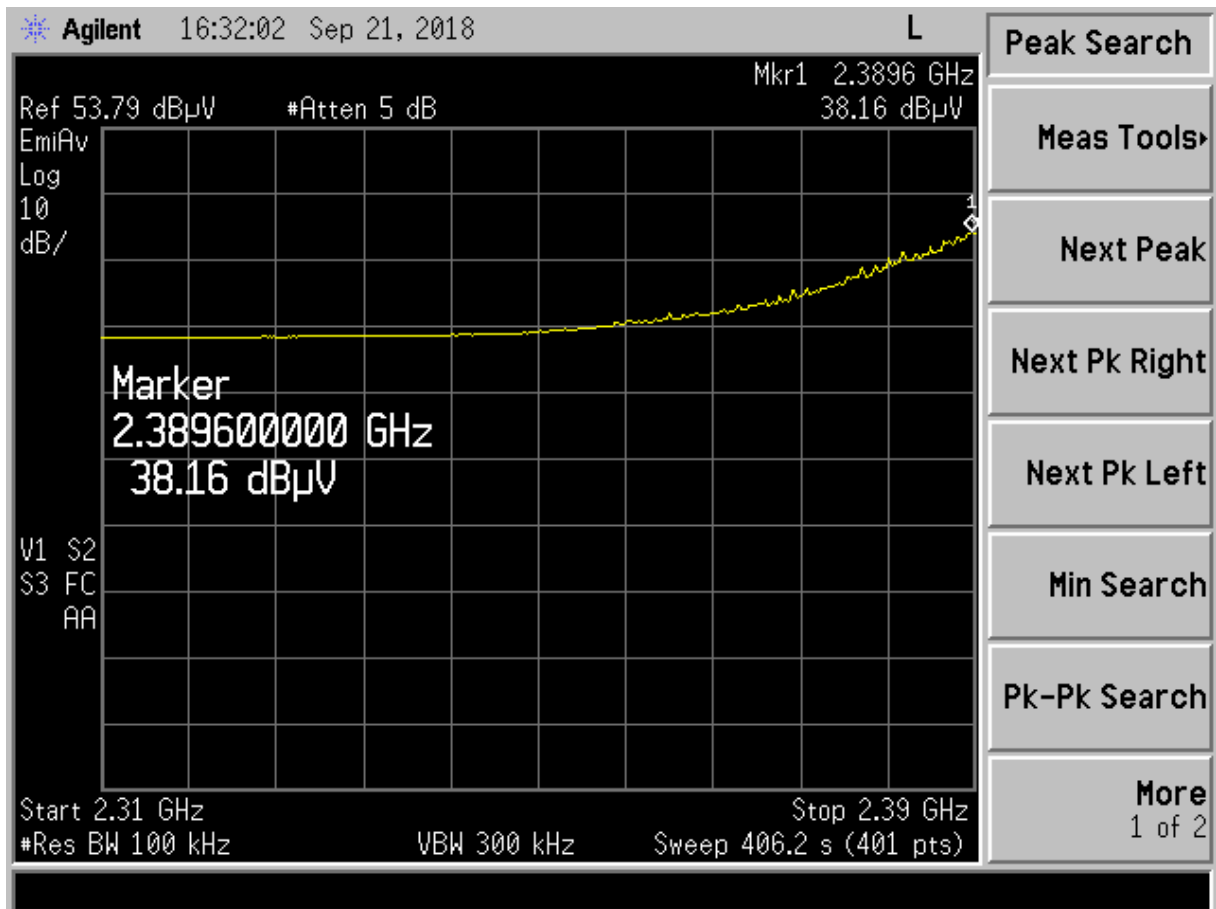


Figure 63. n mode (External Antenna) Low Channel Restricted Band – Average

Frequency (MHz)	Test Data (dBuV)	AF+CA-AMP+DC (dB/m)	Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	Margin (dB)	Detector PK/QP/AVG
2389.60	38.16	-1.78	36.38	54.0	3.0m./VERT	17.6	AVG

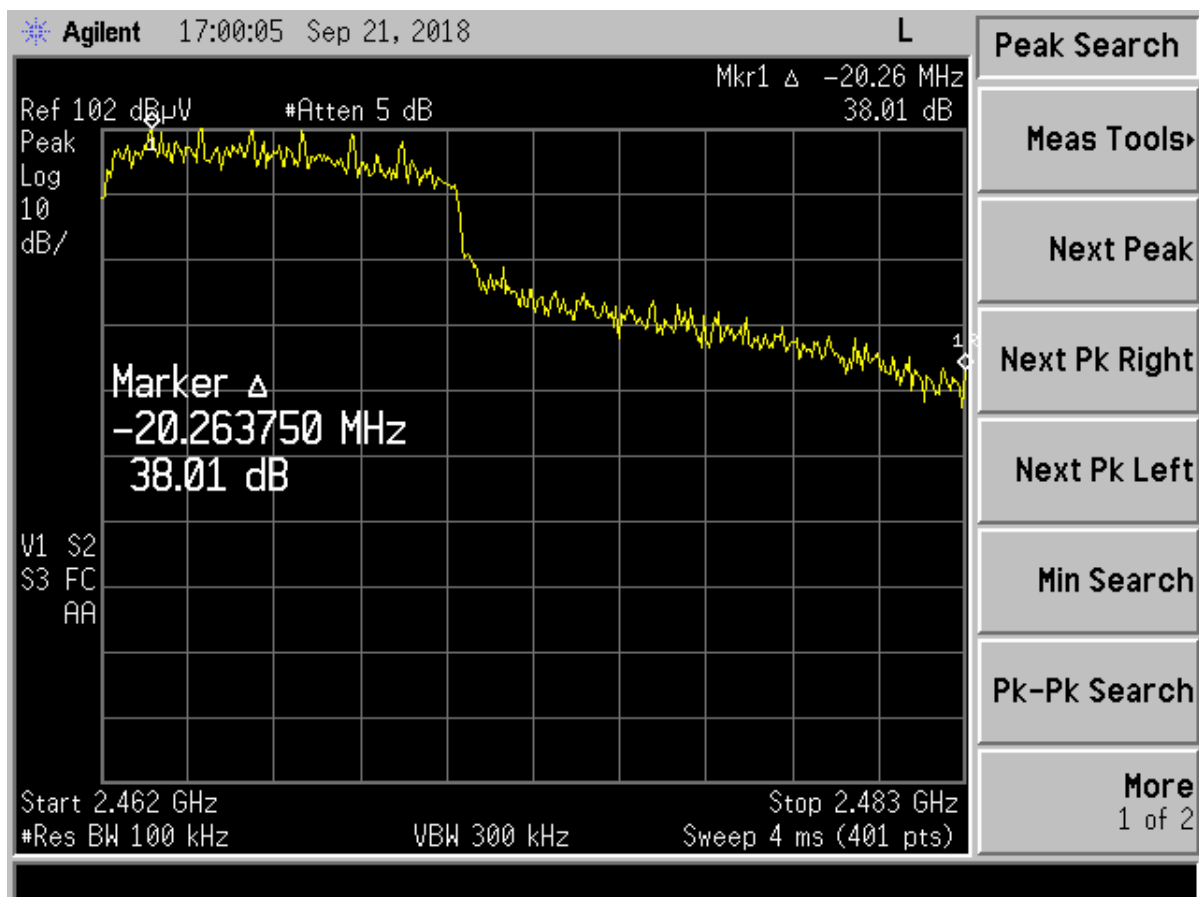


Figure 64. Band Edge Compliance – n mode (External Antenna) High Channel Delta – Peak

Higher band edge must be 20 dB below the fundamental. This requirement is met.

Measured Result	38.01	dB
Band Edge Limit	20.00	dB
Band Edge Margin	18.01	dB

US Tech Test Report:
 FCC ID:
 IC:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15/IC RSS Certification
 O7P-4343
 10147A-4343
 18-0268
 October 19, 2018
 Inventek Systems
 ISM4343-X

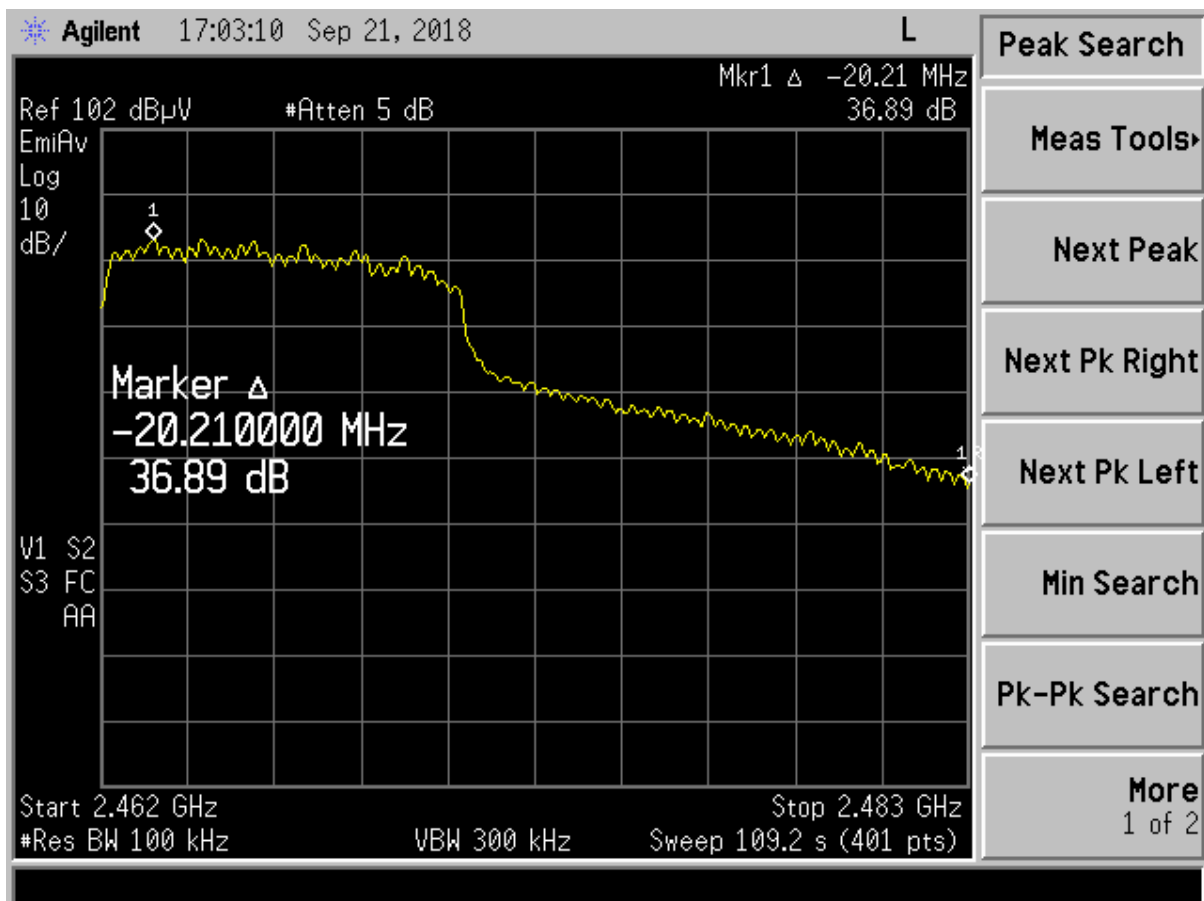


Figure 65. Band Edge Compliance – n mode (External Antenna) High Channel Delta – Average

Higher band edge must be 20 dB below the fundamental. This requirement is met.

Measured Result	36.99	dB
Band Edge Limit	20.00	dB
Band Edge Margin	16.99	dB

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

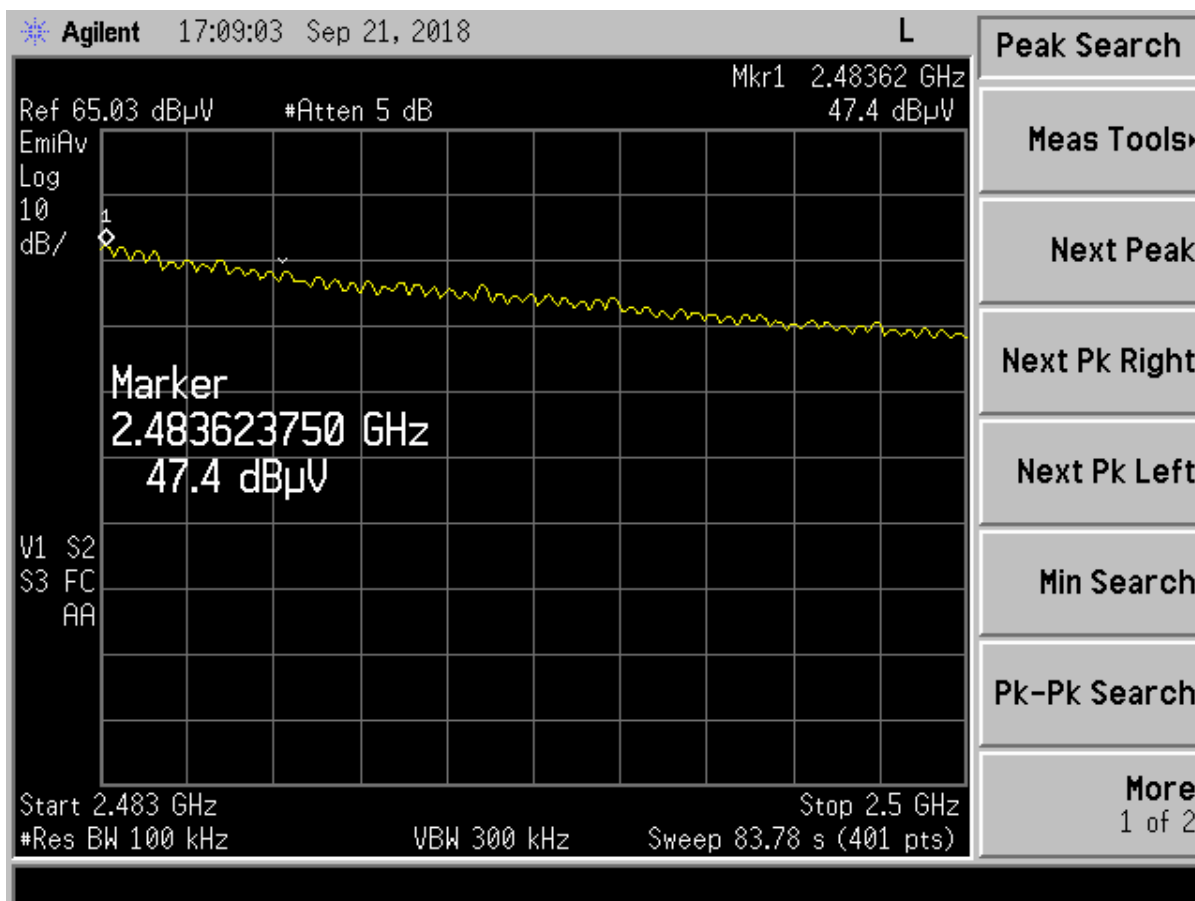


Figure 66. n mode (External Antenna) High Channel Restricted Band – Peak

Frequency (MHz)	Test Data (dBuV)	AF+CA-AMP+DC (dB/m)	Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	Margin (dB)	Detector PK/QP/AVG
2483.62	47.40	-0.33	66.05	74.0	3.0m./VERT	7.9	PK

US Tech Test Report:
 FCC ID:
 IC:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15/IC RSS Certification
 O7P-4343
 10147A-4343
 18-0268
 October 19, 2018
 Inventek Systems
 ISM4343-X

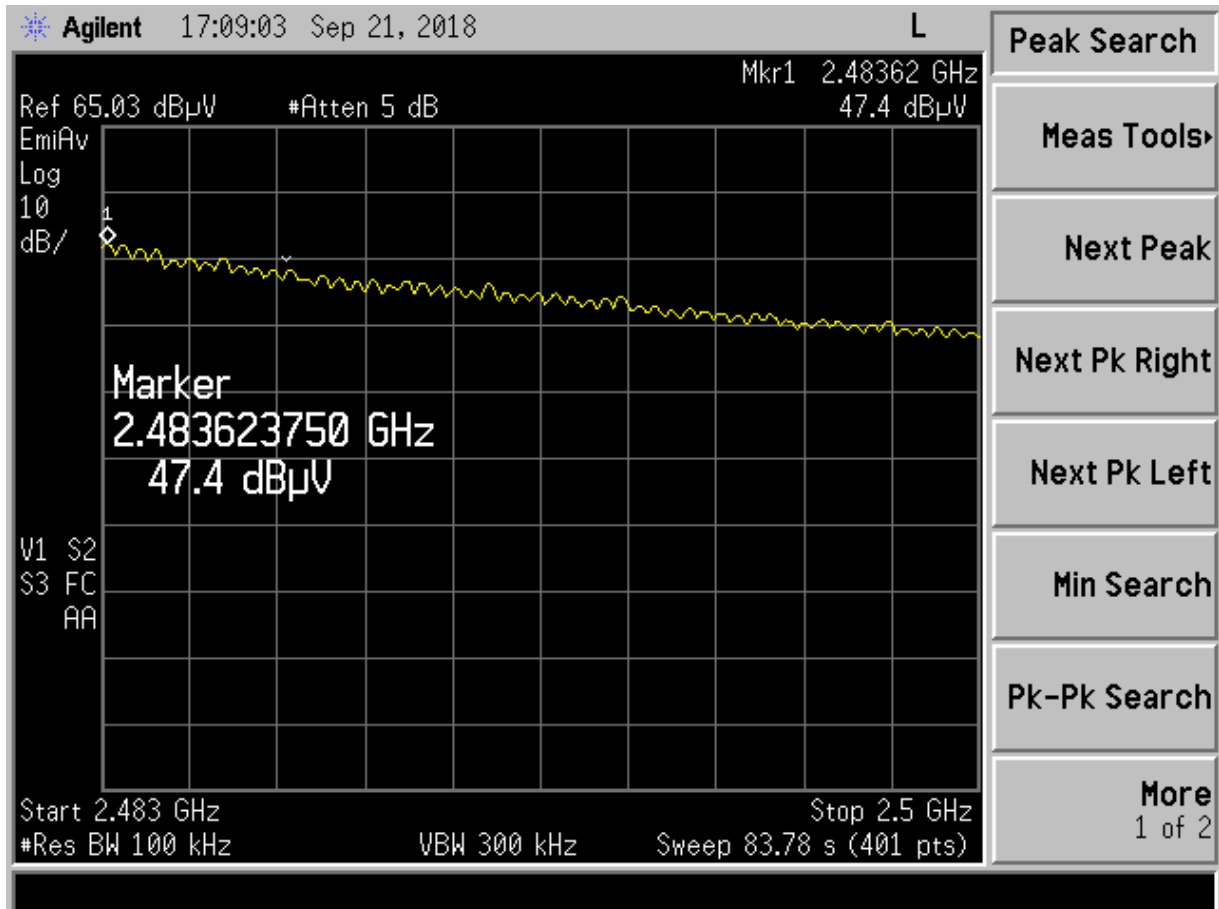


Figure 67. n mode (External Antenna) High Channel Restricted Band – Average

Frequency (MHz)	Test Data (dBuV)	AF+CA-AMP+DC (dB/m)	Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	Margin (dB)	Detector PK/QP/AVG
2483.62	47.40	-0.33	47.07	54.0	3.0m./VERT	6.9	AVG

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

2.12 Six (6) dB Bandwidth (CFR 15.247(a)(2), RSS-247, 5.2(a))

The EUT antenna port was connected to a spectrum analyzer having a 50 Ω input impedance. Measurements were performed per ANSI C63.10-2013, clause 11.8 The RBW was set to 100 kHz and the VBW \geq RBW. The results of this test are given in the table below and figures below.

Table 17. Six (6) dB Bandwidth

Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum FCC Bandwidth (MHz)	Mode
2412	9.05	0.5	b
2437	9.13	0.5	b
2462	9.80	0.5	b
2412	15.41	0.5	g
2437	15.18	0.5	g
2462	15.62	0.5	g
2412	15.17	0.5	n
2437	15.39	0.5	n
2462	15.16	0.5	n

Test Date: September 25-27, 2018

Tested By

Signature:



Name: David Henderson

US Tech Test Report:
 FCC ID:
 IC:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15/IC RSS Certification
 O7P-4343
 10147A-4343
 18-0268
 October 19, 2018
 Inventek Systems
 ISM4343-X

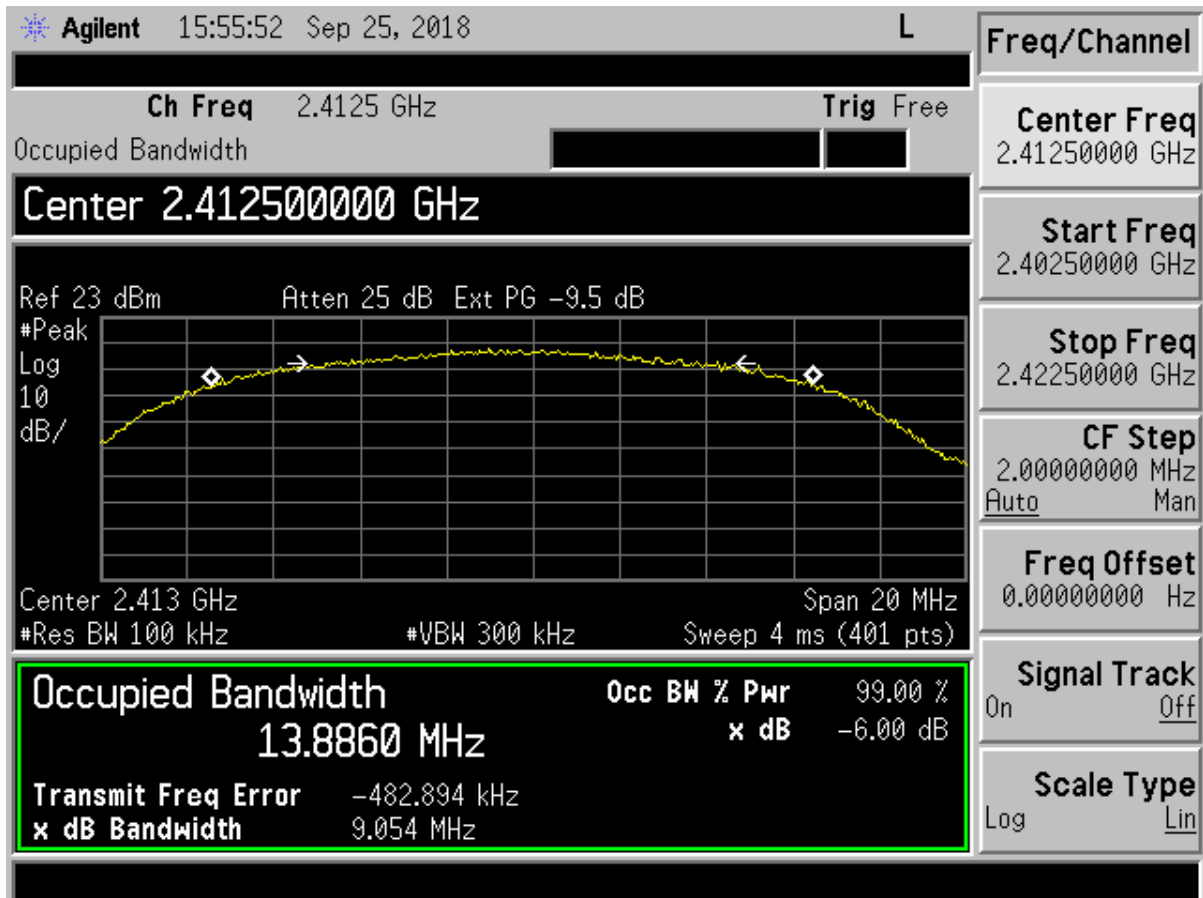


Figure 68. 6 dB Bandwidth b mode Low Channel

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

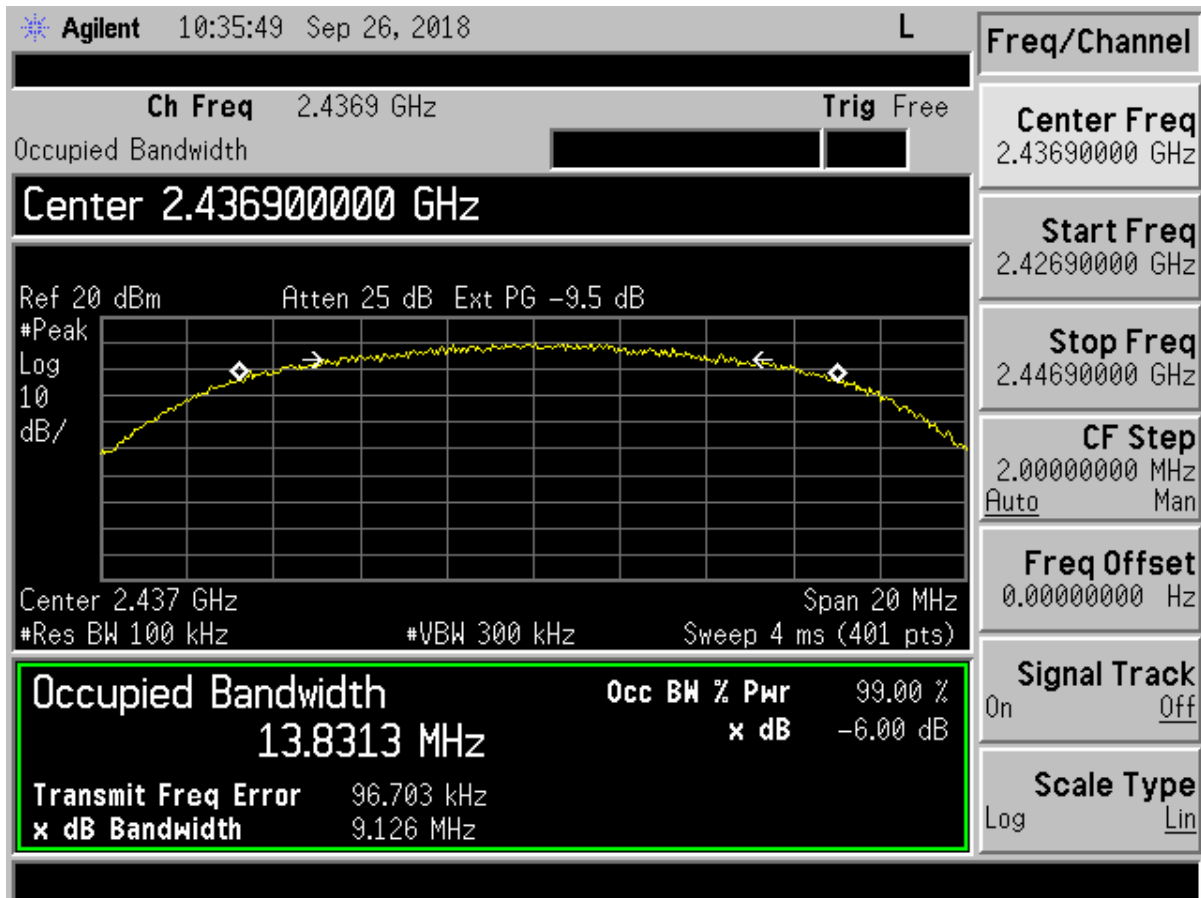


Figure 69. 6 dB Bandwidth b mode Mid Channel

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

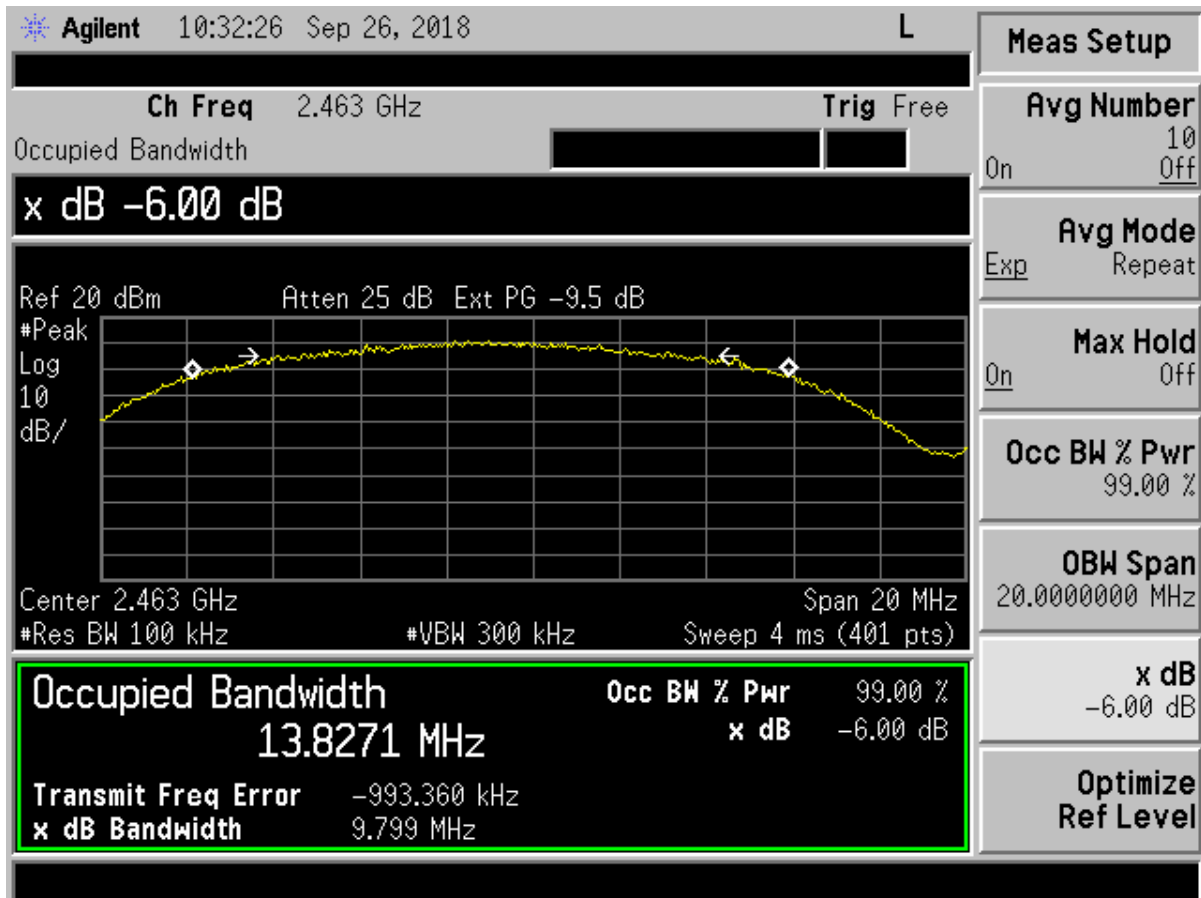


Figure 70. 6 dB Bandwidth b mode High Channel

US Tech Test Report:
 FCC ID:
 IC:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15/IC RSS Certification
 O7P-4343
 10147A-4343
 18-0268
 October 19, 2018
 Inventek Systems
 ISM4343-X

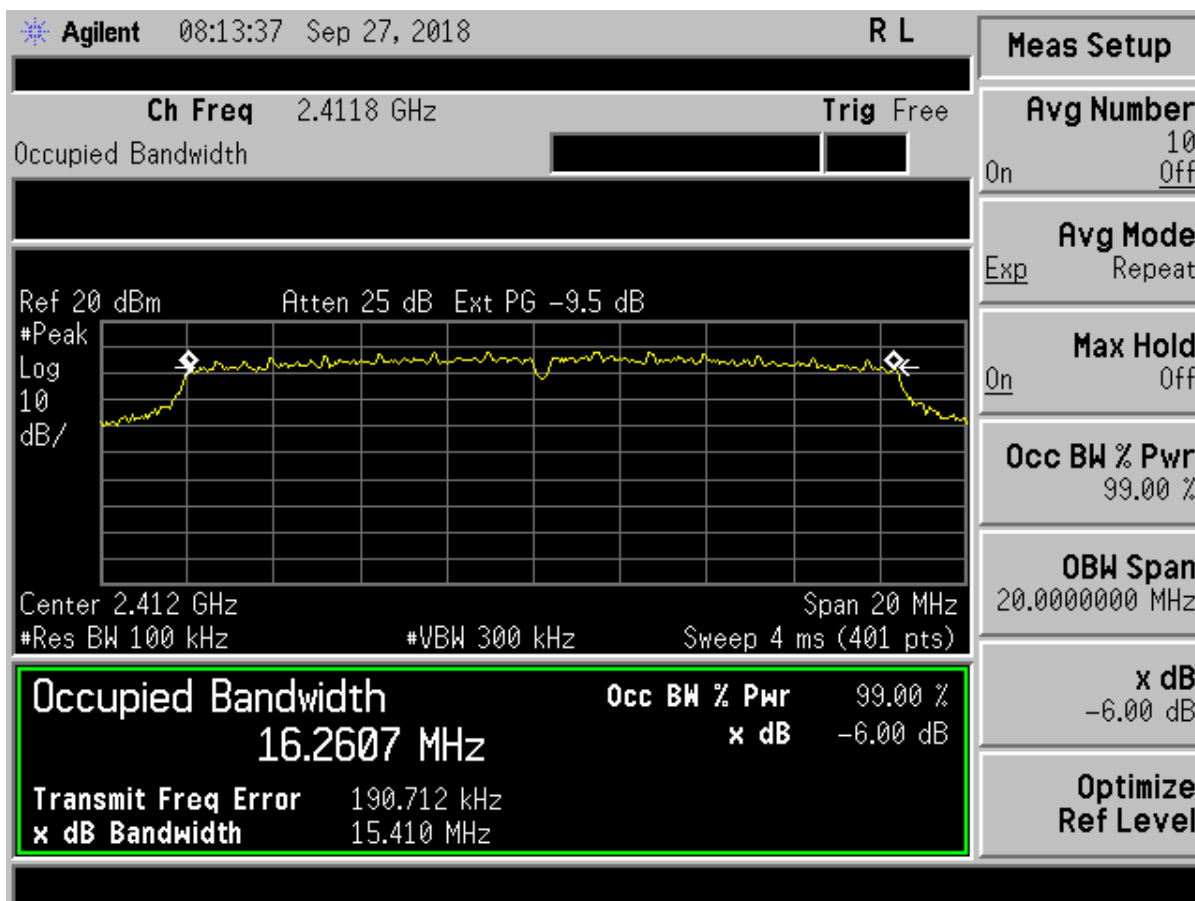


Figure 71. 6 dB Bandwidth g mode Low Channel

US Tech Test Report:
 FCC ID:
 IC:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15/IC RSS Certification
 O7P-4343
 10147A-4343
 18-0268
 October 19, 2018
 Inventek Systems
 ISM4343-X

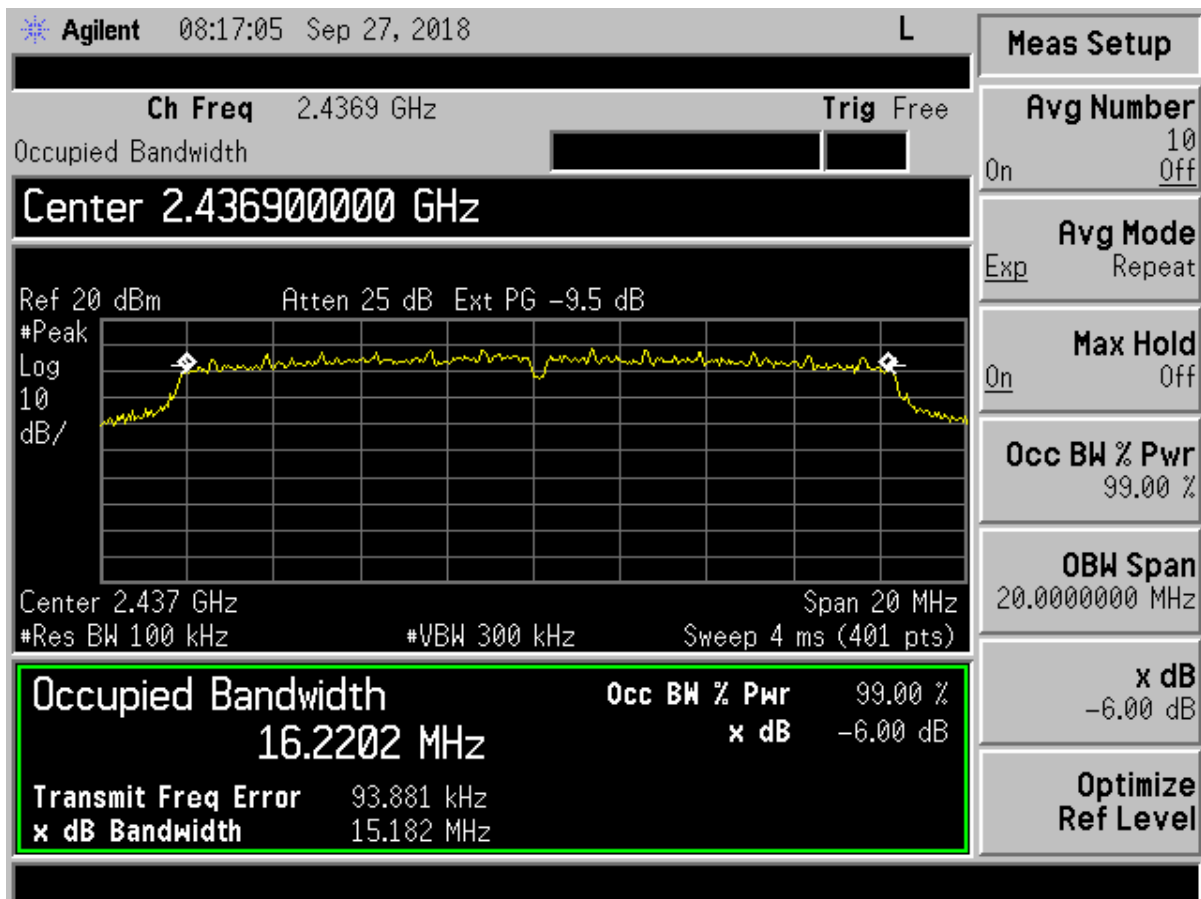


Figure 72.6 dB Bandwidth g mode Mid Channel

US Tech Test Report:
 FCC ID:
 IC:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15/IC RSS Certification
 O7P-4343
 10147A-4343
 18-0268
 October 19, 2018
 Inventek Systems
 ISM4343-X

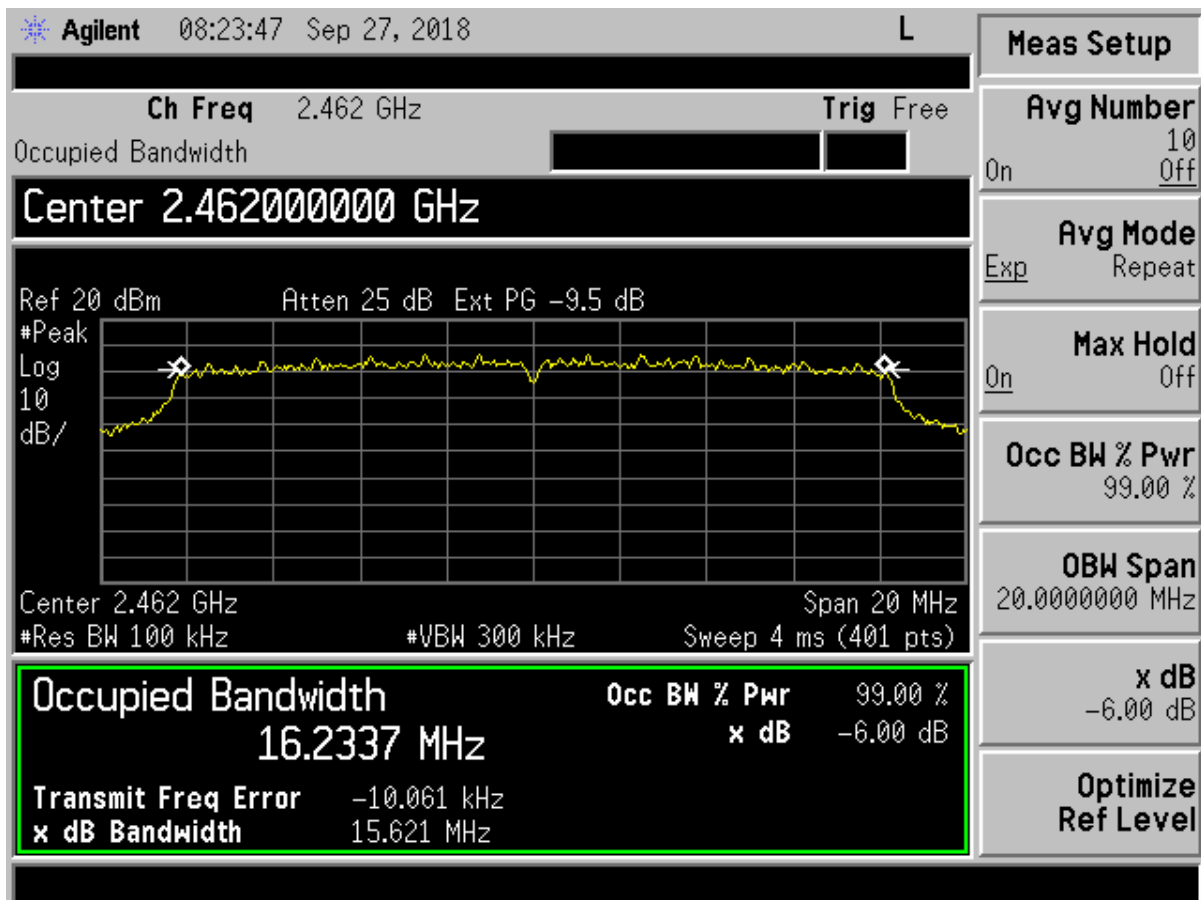


Figure 73. 6 dB Bandwidth g mode High Channel

US Tech Test Report:
 FCC ID:
 IC:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15/IC RSS Certification
 O7P-4343
 10147A-4343
 18-0268
 October 19, 2018
 Inventek Systems
 ISM4343-X

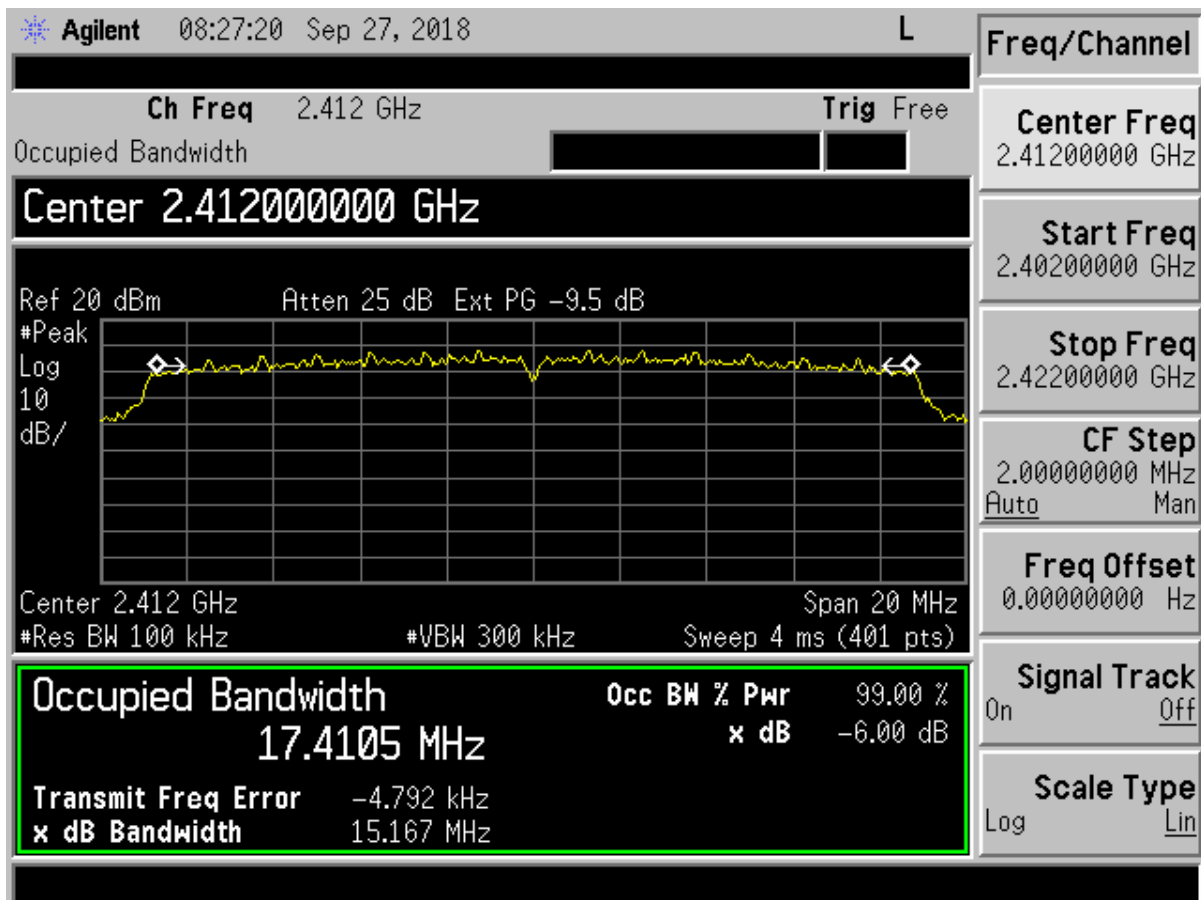


Figure 74. 6 dB Bandwidth n mode Low Channel

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

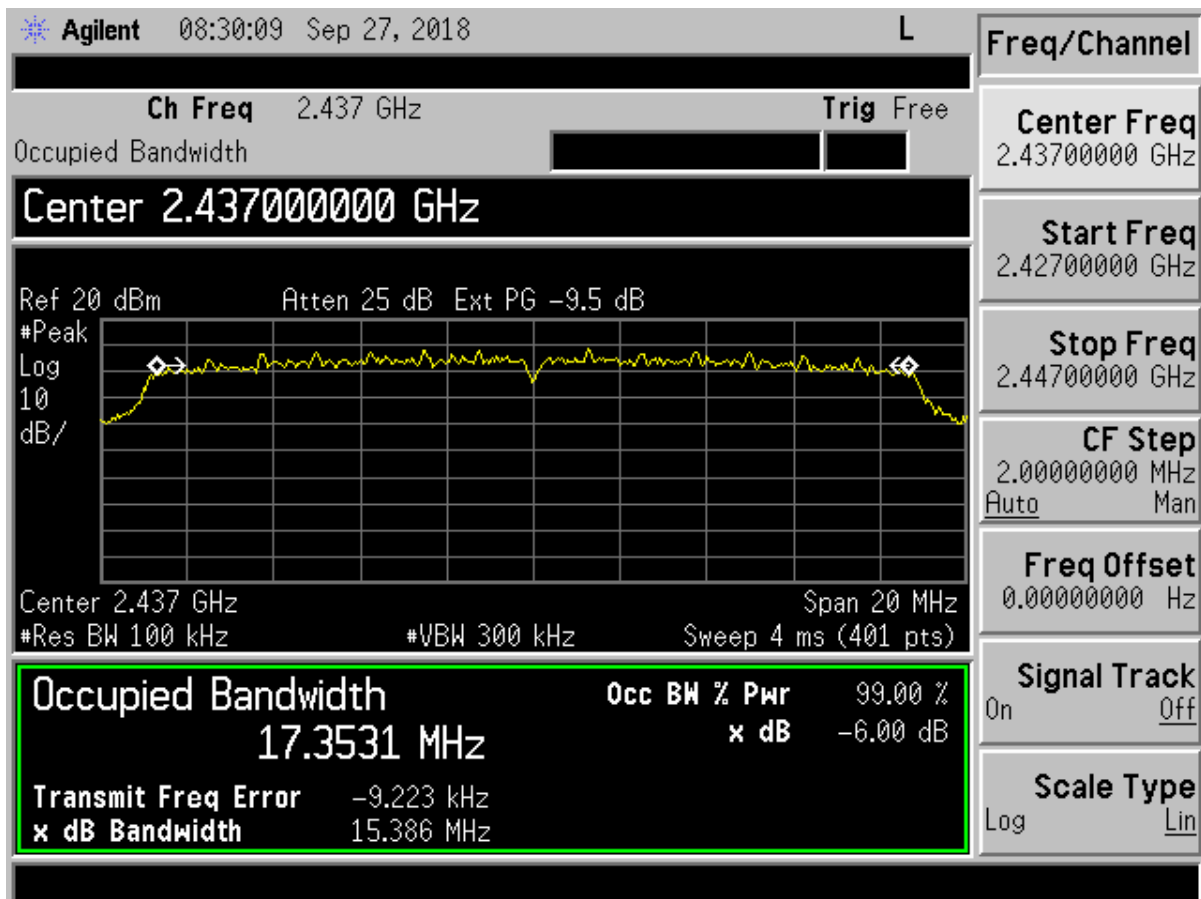


Figure 75. 6 dB Bandwidth n mode Mid Channel

US Tech Test Report:
 FCC ID:
 IC:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15/IC RSS Certification
 O7P-4343
 10147A-4343
 18-0268
 October 19, 2018
 Inventek Systems
 ISM4343-X

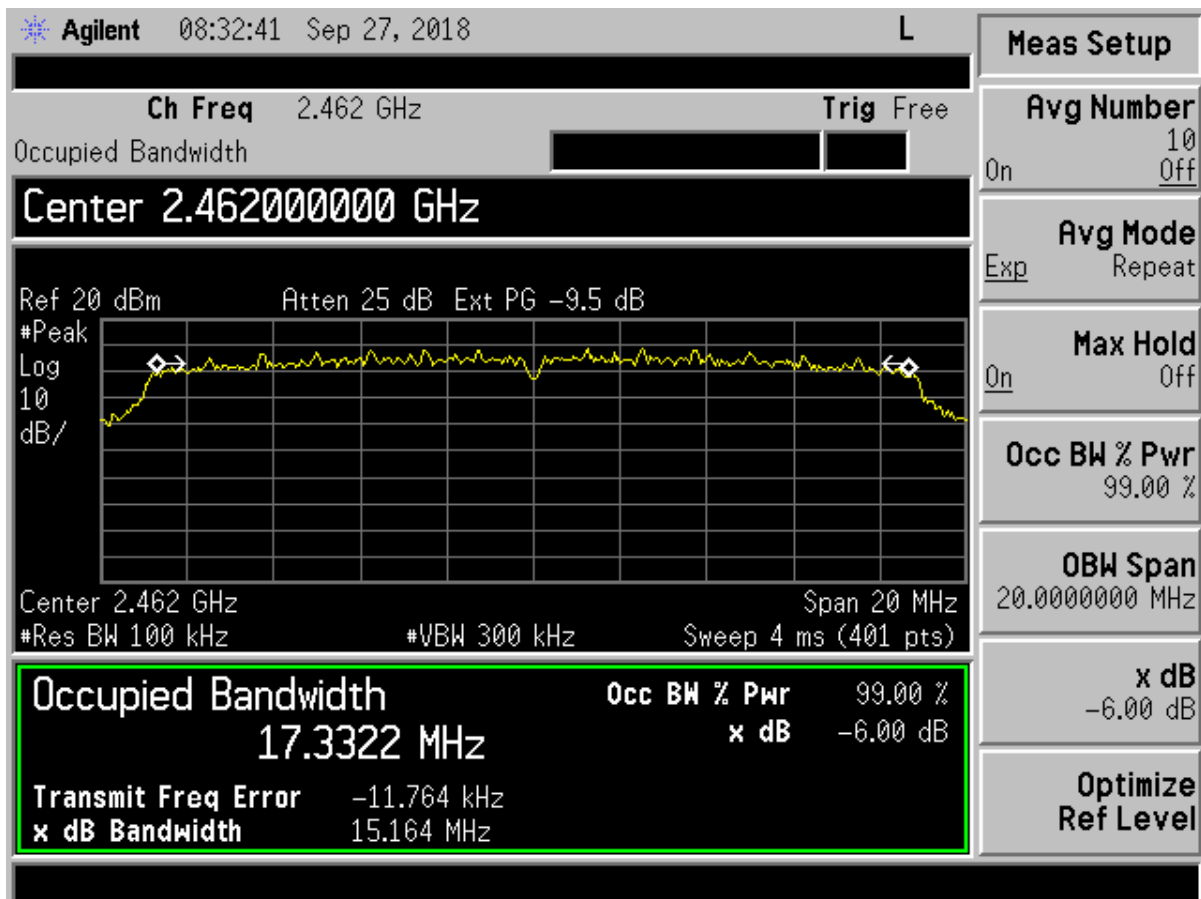


Figure 76. 6 dB Bandwidth n mode High Channel

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

2.13 Occupied Bandwidth, (99% bandwidth)(RSS-GEN (6.6))

The EUT antenna port was connected to a spectrum analyzer having a 50 Ω input impedance. Measurements were performed similar to the method of FCC, KDB Publication No. 558074 v03r05 for a bandwidth of 20 dB. The RBW was set to approximately 1/100 of the manufacturers claimed RBW and with the VBW \geq RBW. The results of this test are given in Table 17 and presented in the figures in section 2.12 above.

Table 18. 99% Occupied Bandwidth

Frequency (MHz)	99% Occupied Bandwidth (MHz)	Mode
2412	13.886	b
2437	13.831	b
2462	13.827	b
2412	16.261	g
2437	16.220	g
2462	16.234	g
2412	17.411	n
2437	17.353	n
2462	17.332	n

Test Date: September 25-27, 2018

Tested By

Signature:  Name: David Henderson

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

2.14 Maximum Peak Conducted Output Power (CFR 15.247 (b) (3))

The transmitter was programmed to operate at a maximum output power across the bandwidth. For this test the output power of the radio was set to **20** see example script used: tx_80211b/g/n_start.bat 4343WA1 12(com#) 1(ch#) **20**(pwr#). This is the level which the EUT was set to in order to meet all test requirements.

Peak power within the band 2400 MHz to 2483.5 MHz was measured per ANSI C63.10-2013 as an Antenna Conducted test with a spectrum analyzer by connecting the spectrum analyzer directly, via a short RF cable, and attenuators to the antenna output terminals on the EUT. The spectrum analyzer was set to a RBW of 1 MHz, and the VBW \geq RBW. The integration method was used. Peak antenna conducted output power is tabulated in the table below.

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:


FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

Table 19. Peak Antenna Conducted Output Power per Part 15.247 (b)(3)

Frequency of Fundamental (MHz)	Raw Test Data dBm	Converted Data (mW)	FCC Limit (mW Maximum)	Mode
2412	22.28	169.04	1000	b
2437	22.66	184.50	1000	b
2462	23.30	213.80	1000	b
2412	22.76	188.80	1000	g
2437	23.04	201.37	1000	g
2462	23.45	221.31	1000	g
2412	22.42	174.58	1000	n
2437	22.74	187.93	1000	n
2462	23.11	204.64	1000	n

Test Date: September 25-27, 2018

Tested By

Signature: 

Name: David Henderson

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

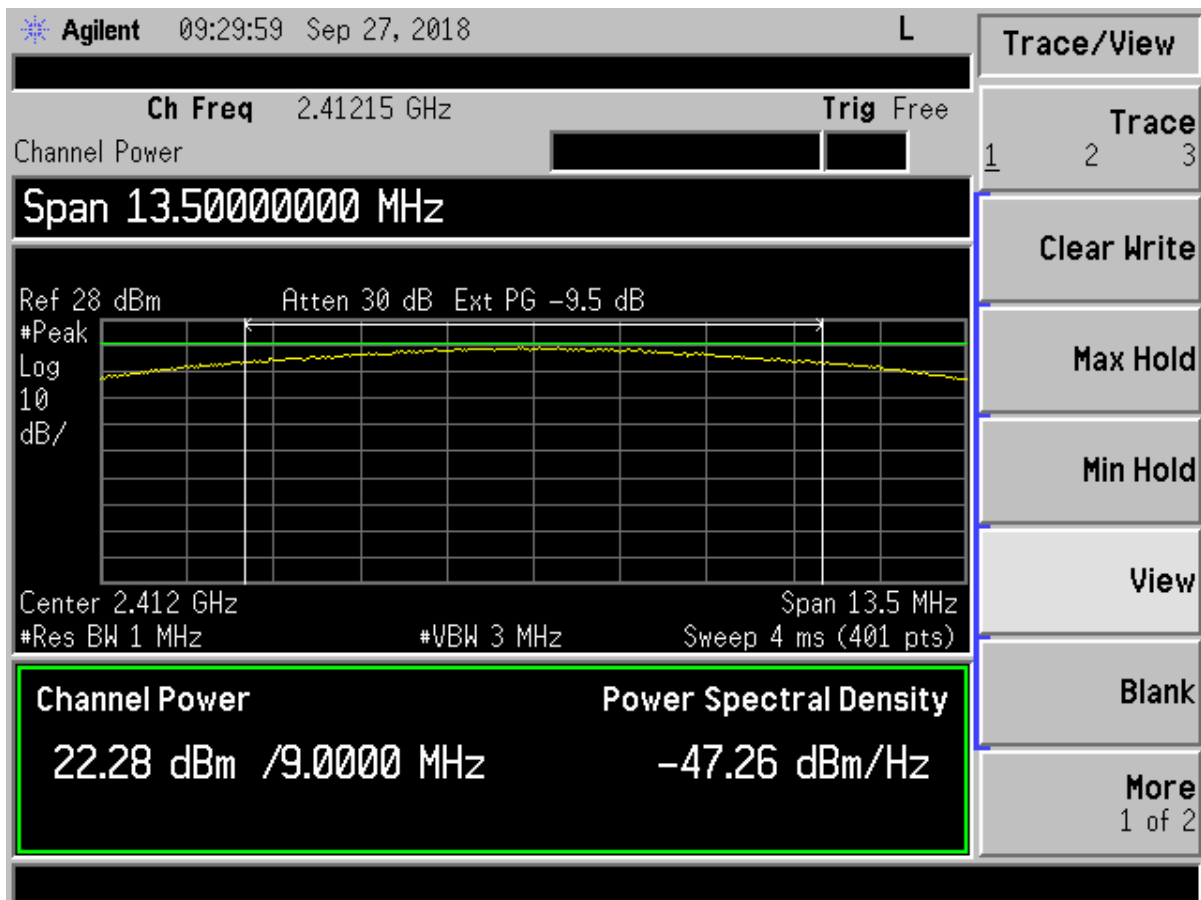


Figure 77. Peak Antenna Conducted Output Power, b mode Low Channel

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

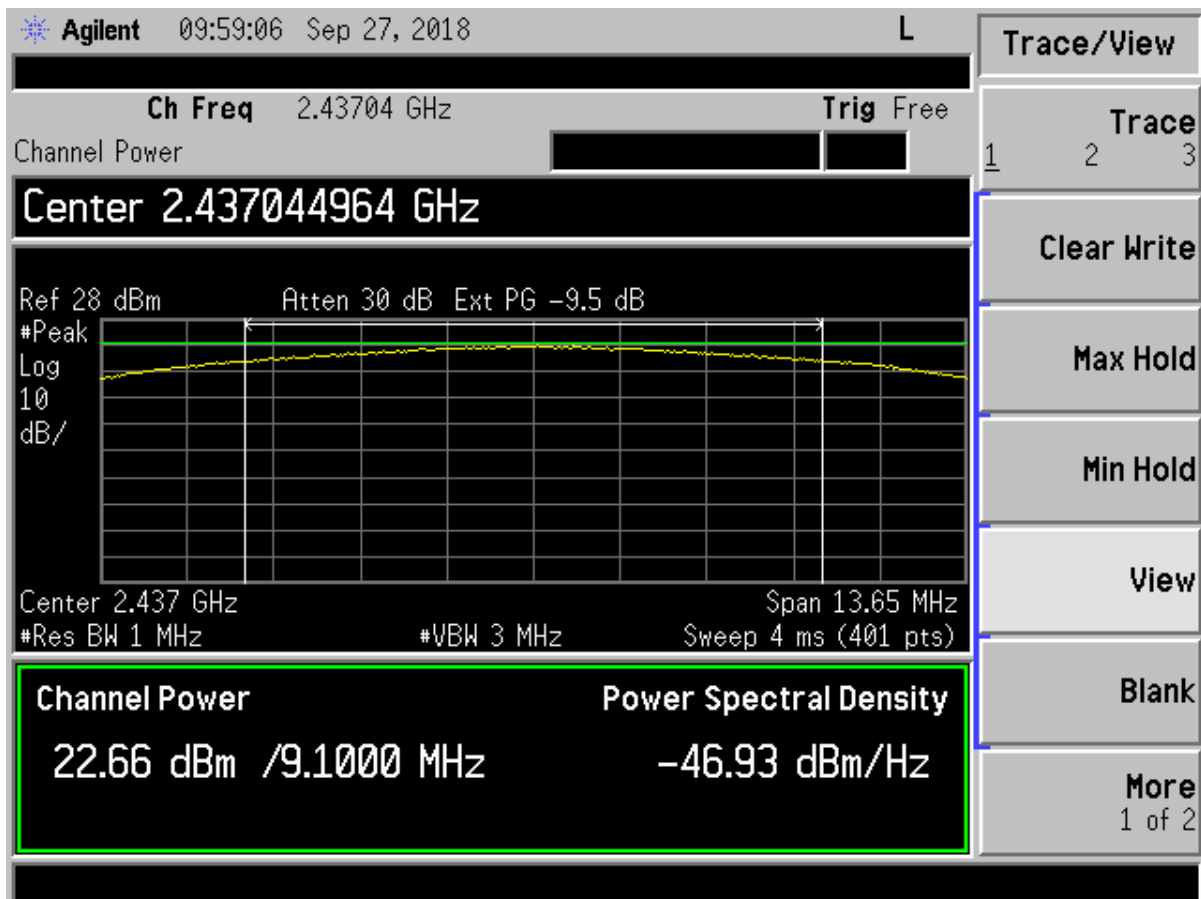


Figure 78. Peak Antenna Conducted Output Power, b mode Mid Channel

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

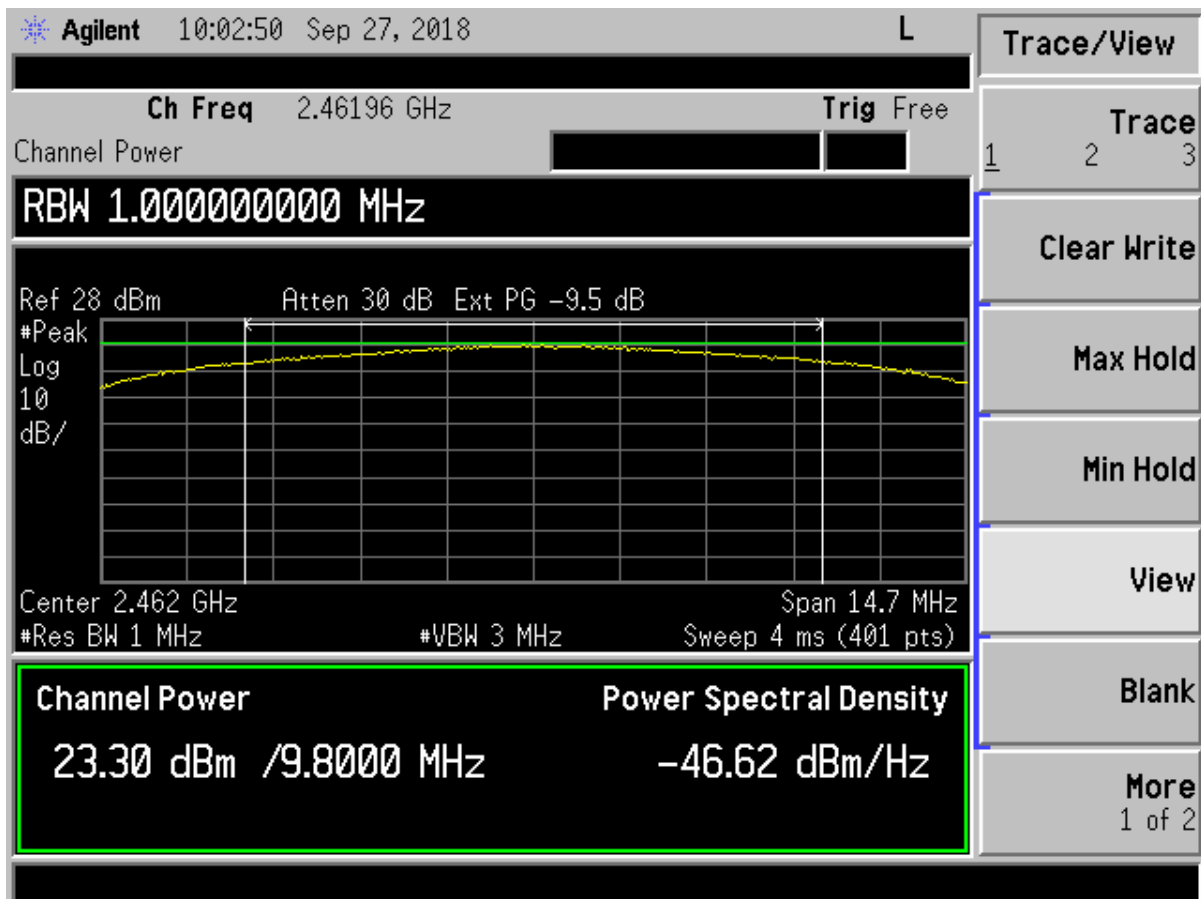


Figure 79. Peak Antenna Conducted Output Power, b mode High Channel

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

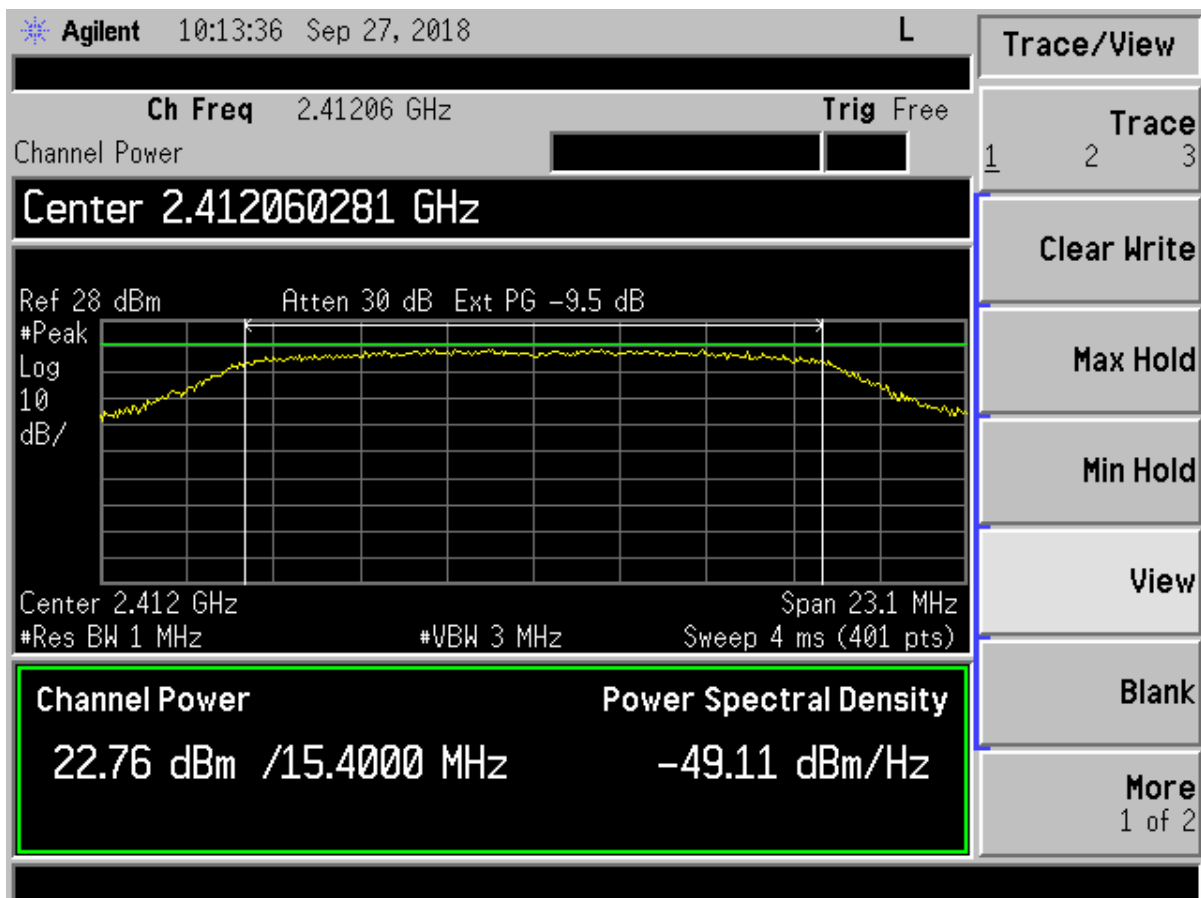


Figure 80. Peak Antenna Conducted Output Power, g mode Low Channel

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

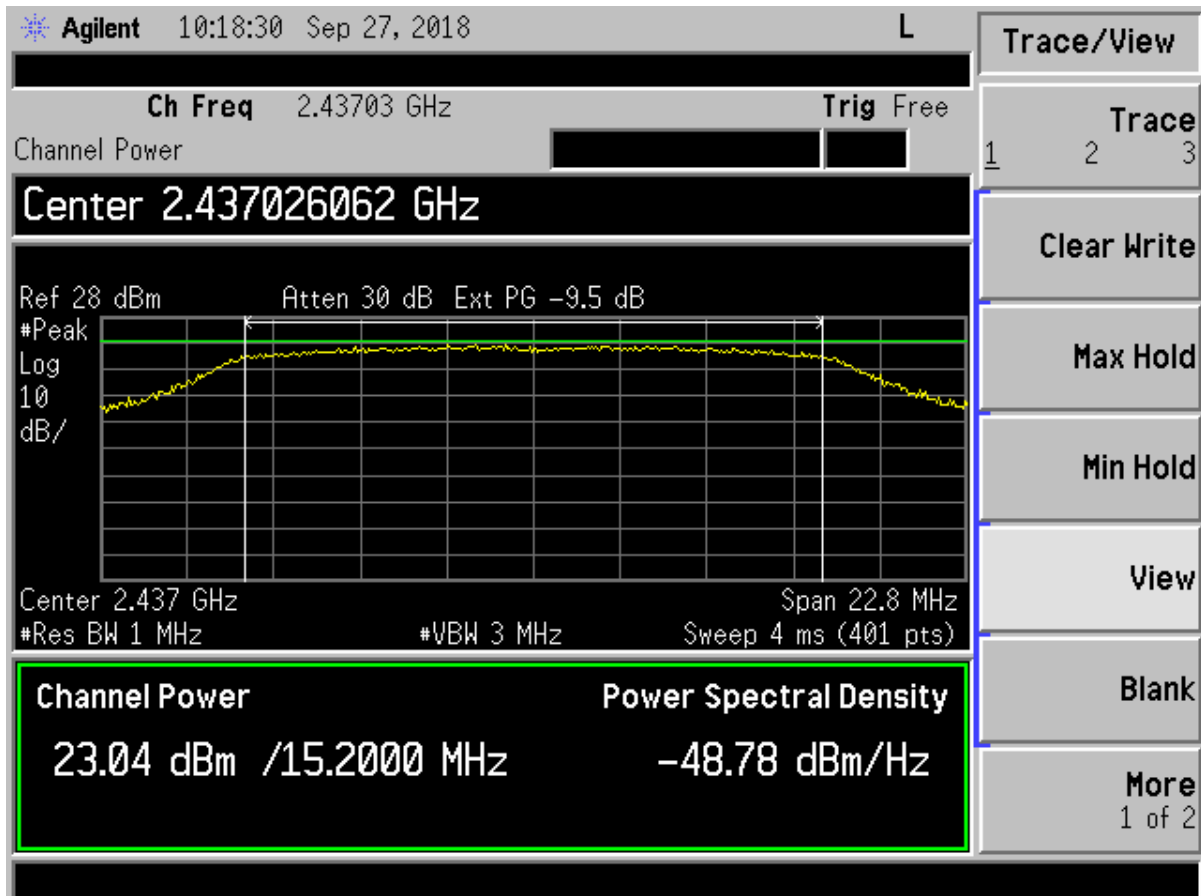


Figure 81. Peak Antenna Conducted Output Power, g mode Mid Channel

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

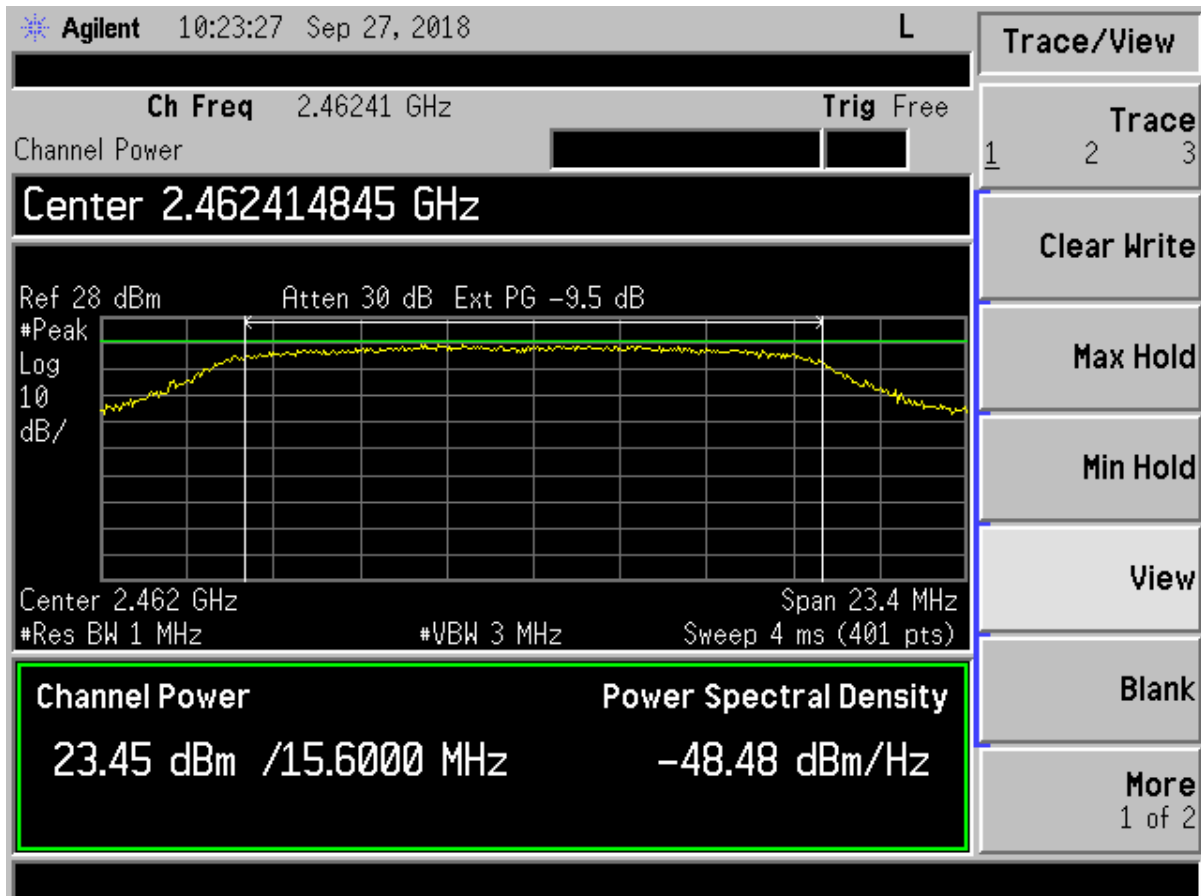


Figure 82. Peak Antenna Conducted Output Power, g mode High Channel

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

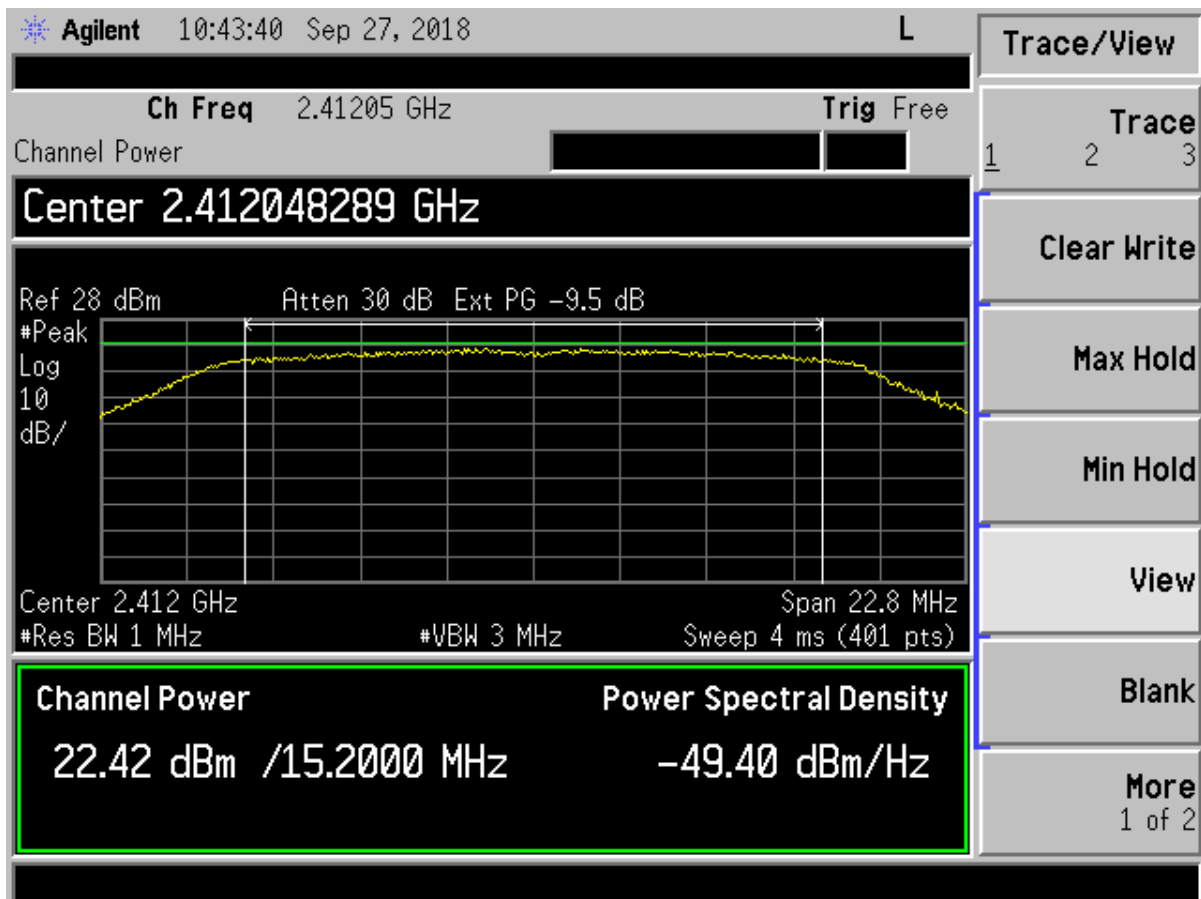


Figure 83. Peak Antenna Conducted Output Power, n mode Low Channel

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

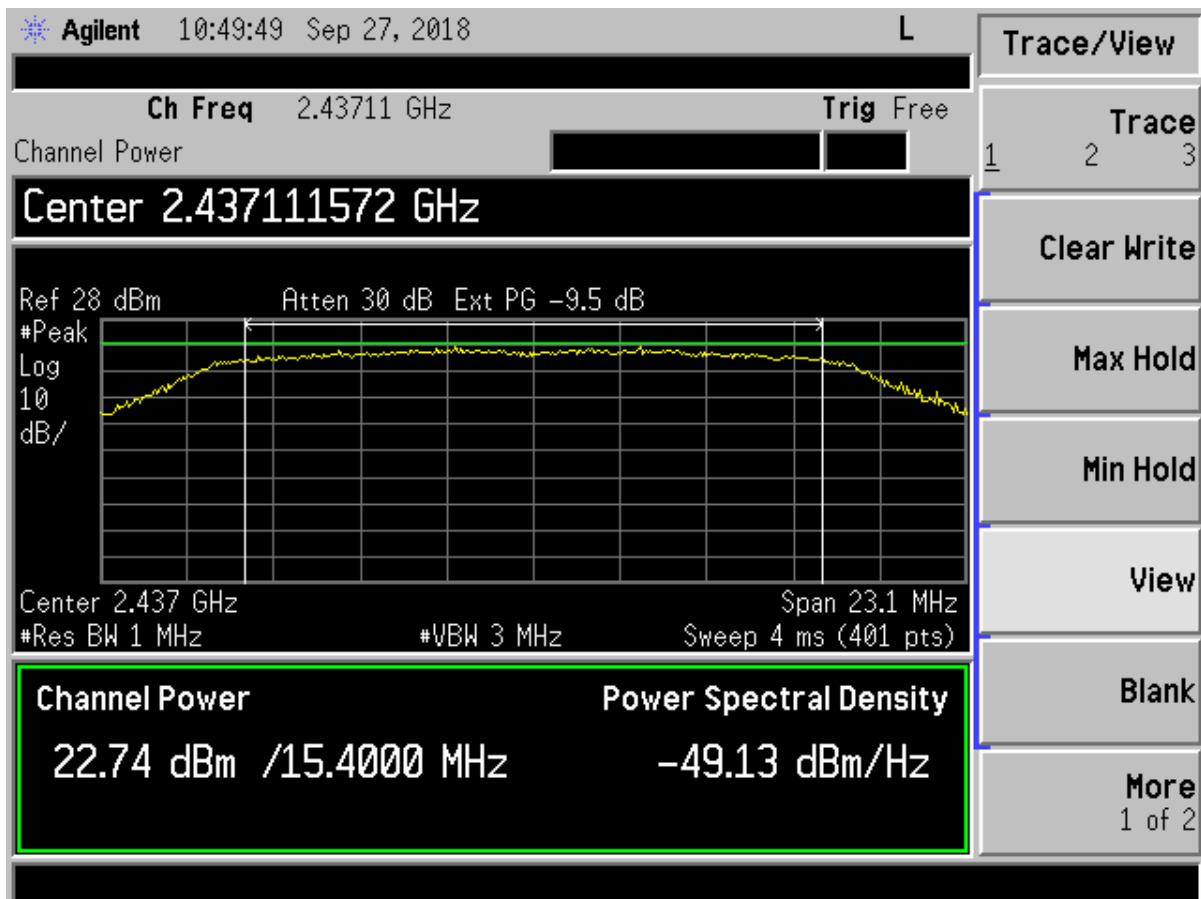


Figure 84. Peak Antenna Conducted Output Power, n mode Mid Channel

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

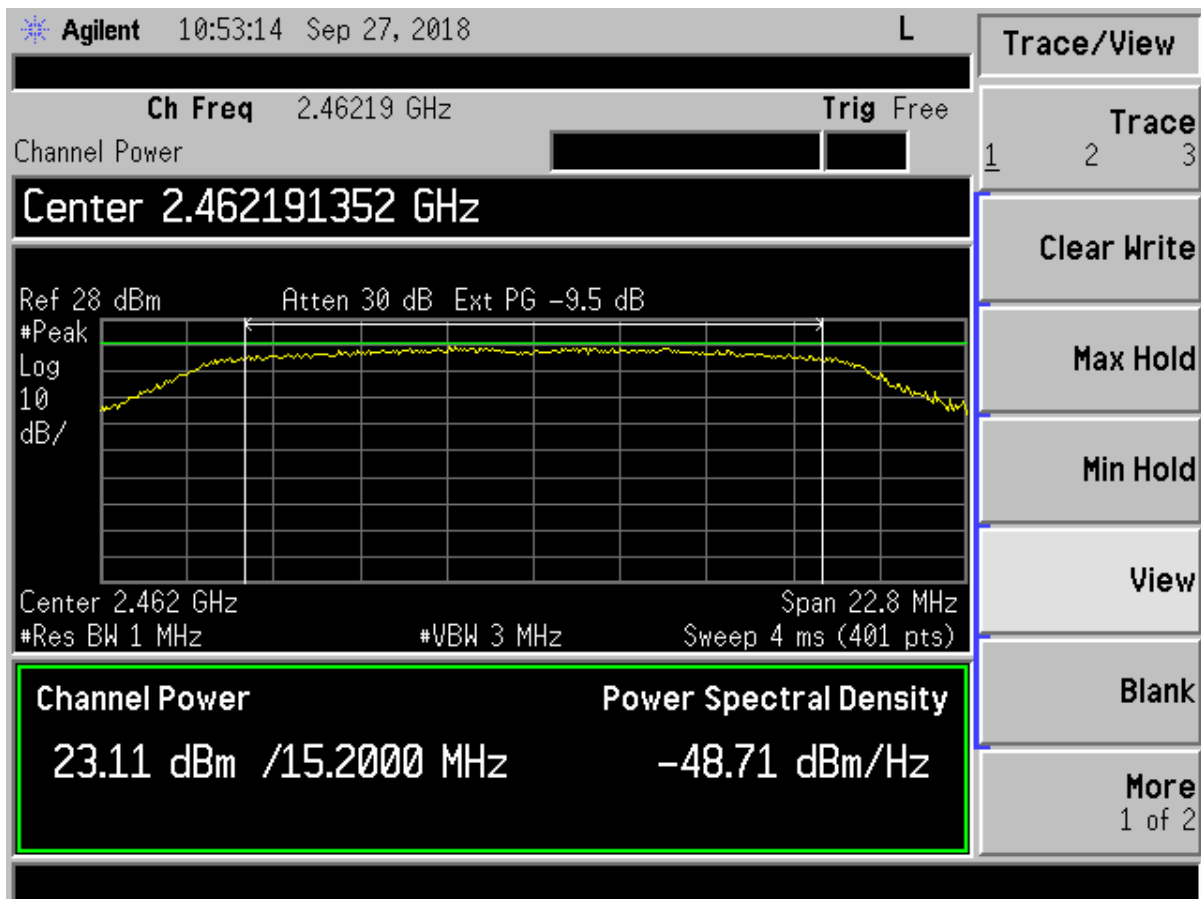


Figure 85. Peak Antenna Conducted Output Power, n mode High Channel

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

2.15 Power Spectral Density (CFR 15.247(e), RSS-247, 5.2(b))

The transmitter was placed into a continuous mode of operation at all applicable frequencies. The measurements were performed per the procedures of ANSI C63.10-2013. The RBW was set to 3 kHz and the Video Bandwidth was set to \geq RBW. The trace capture time was set to (Span/3 kHz).

In accordance with 15.247 (e), the power spectral density shall be no greater than +8 dBm per any 3 kHz band.

Results are shown in the table below and figures below. All are less than +8 dBm per 3 kHz band. SEE figures above.


Note: dBm/Hz correct to dBm/kHz using the following formula, $10 \log \text{RBW}_{\text{ref}}/\text{RBW}_{\text{measured}}$.

Table 20. Power Spectral Density for Low, Mid and High Bands

Frequency (MHz)	Results (dBm/kHz)	FCC Limit (dBm/3 kHz)	Mode
2412	-17.26	+8.0	b
2437	-16.93	+8.0	b
2462	-16.62	+8.0	b
2412	-19.11	+8.0	g
2437	-18.78	+8.0	g
2462	-18.48	+8.0	g
2412	-19.40	+8.0	n
2437	-19.13	+8.0	n
2462	-18.71	+8.0	n

Test Date: September 25-27, 2018

Tested By

Signature: 

Name: David Henderson

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

2.16 Intentional Radiator Power Lines Conducted Emissions (CFR 15.207, RSS-Gen 8.8)

The power line conducted voltage emission measurements have been carried out in accordance with CFR 15.207, per ANSI C63.10:2013, Clause 6.2, with a spectrum analyzer connected to an LISN and the EUT placed into a continuous mode of transmission.

The worst-case results for conducted emissions were determined to be produced when the EUT was operating under continuous transmission. The worst case measurement was 6.1 dB from the applicable limit. All other emissions were at least 6.3 dB from the limit. Those results are given in the table below.

US Tech Test Report:
 FCC ID:
 IC:
 Test Report Number:
 Issue Date:
 Customer:
 Model:


FCC Part 15/IC RSS Certification
 O7P-4343
 10147A-4343
 18-0268
 October 19, 2018
 Inventek Systems
 ISM4343-X

Table 21. Power Line Conducted Emissions

CONDUCTED EMISSIONS 150 kHz to 30 MHz						
Tested By: AF	Specification Requirement: FCC Part 15.207		Project No.: 18-0268	Manufacturer: Inventek Systems Model: ISM4343-X		
Frequency (MHz)	Test Data (dBuV)	LISN+CL (dB)	Corrected Results (dBuV)	AVG Limits (dBuV)	Margin (dB)	Detector
Phase @ 120VAC/60Hz						
0.4924	38.93	0.15	39.08	46.1	7.1	QP
0.4924	35.15	0.15	35.30	46.1	10.8	AVG
0.5058	39.54	0.15	39.69	46.0	6.3	QP
0.5058	33.14	0.15	33.29	46.0	12.7	AVG
2.7000	39.74	0.18	39.92	46.0	6.1	PK
5.9000	36.19	0.26	36.45	50.0	13.5	PK
10.1330	36.86	0.40	37.26	50.0	12.7	PK
22.3330	34.24	0.70	34.94	50.0	15.1	PK
Neutral @ 120VAC/60Hz						
0.2381	43.61	0.40	44.01	52.2	8.2	PK
0.6525	39.58	0.28	39.86	46.0	6.1	PK
1.3000	39.39	0.29	39.68	46.0	6.3	PK
8.3920	37.59	0.47	38.06	50.0	11.9	PK
17.1670	39.19	0.66	39.85	50.0	10.1	PK
22.1500	32.32	0.77	33.09	50.0	16.9	PK

Test Date: September 26, 2018

Tested By

Signature: 

Name: Afzal Fazal

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

2.17 Intentional Radiator, Radiated Emissions (CFR 15.209, RSS-Gen, 8.9)

The test data provided herein is to support the verification requirement for radiated emissions coming for the EUT in a transmitting state per 15.209 and were investigated from 9kHz or the lowest operating clock frequency to 25 GHz and tested as detailed in ANSI C63.10:2013, Clause 6.4-6.6. Data is presented in Table 12.

Radiated emissions within the band of 9 kHz to 30 MHz were investigated using a calibrated Loop Antenna and per the requirements of ANSI C63.10:2013.

Measurements were made with the analyzer's resolution bandwidth set to 120 kHz for measurements made below 1 GHz and 1 MHz for measurements made above 1 GHz. The video bandwidth was set to three times the resolution bandwidth; 1 MHz RBW and 3 MHz VBW. The test data were maximized for magnitude by rotating the turn-table through 360 degrees and raising and lowering the receiving antenna between 1 to 4 meters in height as a part of the measurement procedure.

The worst case configuration was determined to be the radio module set up with the Dual band antenna. The test data is presented below.

The worst-case radiated emission was 9.0 dB below the specification limit at 31.31 MHz. All other measured signals were at least 10.0 dB below the specification limit. The results are shown in the table below. These results are meant to show that this EUT has met the intentional transmitter requirements of CFR Part 15.209.

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

Table 22. Spurious Radiated Emissions (150 KHz-30MHz)

Test By: AF	Test: FCC Part 15.209			Client: Inventek Systems			
	Project: 18-0268 Class B			Model: ISM4343-X			
Frequency (MHz)	Test Data (dBuV)	AF+CL-PA (dB)	Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	Margin (dB)	DETECTOR PK / QP/AVG
All emissions were at least 20 dB below the applicable limit.							


No other emissions detected other than those presented in this table and the tables in section 2.10 above.

AF is antenna factor. CL is cable loss. PA is preamplifier gain.

SAMPLE CALCULATION: N/A

Test Date: September 24, 2018

Tested By

Signature: 

Name: Afzal Fazal

US Tech Test Report:
 FCC ID:
 IC:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15/IC RSS Certification
 O7P-4343
 10147A-4343
 18-0268
 October 19, 2018
 Inventek Systems
 ISM4343-X

Table 23. Spurious Radiated Emissions (30 MHz – 1 GHz)

Test By: AF	Test: FCC Part 15.109/15.209				Client: Inventek Systems			
	Project: 17-0268 Class B				Model: ISM4343-X			
Frequency (MHz)	Test Data (dBuV)	Additional Factors	AF+CL-PA (dB)	Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	Margin (dB)	DETECTOR PK / QP/AVG
Tested from 30 MHz to 1 GHz, Quasi Peak Limits								
31.31	44.29	-	-13.25	31.04	40.0	3m./VERT	9.0	QP
58.28	40.96	-	-17.65	23.31	40.0	3m./VERT	16.7	QP
118.24	45.60	-	-15.14	30.46	43.5	3m./VERT	13.0	QP
134.76	43.92	-	-14.33	29.59	43.5	3m./VERT	13.9	QP
188.52	37.19	-	-11.35	25.84	43.5	3m./VERT	17.7	QP
58.57	37.96	-	-16.65	21.31	40.0	3m./HORZ	18.7	QP
192.20	45.62	-	-12.15	33.47	43.5	3m./HORZ	10.0	PK
213.33	41.35	-	-14.02	27.33	43.5	3m./HORZ	16.2	QP
216.63	47.31	-	-13.97	33.34	46.0	3m./HORZ	12.7	QP
251.90	44.82	-	-12.79	32.03	46.0	3m./HORZ	14.0	QP
981.00	41.32	-	-1.59	39.73	54.0	3m./HORZ	14.3	PK
219.00	43.49	-	-14.37	29.12	46.0	3m./VERT	16.9	QP
263.00	40.74	-	-12.32	28.42	46.0	3m./VERT	17.6	QP
979.40	41.15	-	-2.19	38.96	54.0	3m./VERT	15.0	PK
All other emissions were greater than 20 dB from the applicable limit.								


AF is antenna factor. CL is cable loss. PA is preamplifier gain.

SAMPLE CALCULATION AT: 31.31 MHz

Magnitude of Measured Frequency	44.29	dBuV
Additional Factor	0.00	dB
+Antenna Factor + Cable Loss+ Amplifier Gain	-13.25	dB
Corrected Result	31.04	dBuV/m

Test Date: September 24, 2018

Tested By

Signature: 

Name: Afzal Fazal

US Tech Test Report:
 FCC ID:
 IC:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15/IC RSS Certification
 O7P-4343
 10147A-4343
 18-0268
 October 19, 2018
 Inventek Systems
 ISM4343-X

Table 24. Spurious Radiated Emissions (1 GHz – 25 GHz)

Test By: AF	Test: FCC Part 15.109/15.209				Client: Inventek Systems			
	Project: 17-0268 Class B				Model: ISM4343-X			
Frequency (MHz)	Test Data (dBuV)	Additional Factors	AF+CL-PA (dB)	Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	Margin (dB)	DETECTOR PK / QP/AVG
Tested from 30 MHz to 1 GHz, Quasi Peak Limits								
2975.00	39.77	-	3.81	43.58	54.0	3.0m./VERT	10.4	AVG
3030.00	39.57	-	4.14	43.71	54.0	3.0m./VERT	10.3	AVG
2975.00	39.91	-	3.69	43.60	54.0	3.0m./HORZ	10.4	AVG
3053.00	39.75	-	3.93	43.68	54.0	3.0m./HORZ	10.3	AVG
8820.00	31.32	-	16.09	47.41	54.0	3.0m./HORZ	6.6	AVG
10290.00	29.10	-	18.91	48.01	54.0	3.0m./VERT	6.0	AVG
All other emissions were more than 20 dB below the applicable limit.								


AF is antenna factor. CL is cable loss. PA is preamplifier gain.

SAMPLE CALCULATION AT: 2975.00 MHz

Magnitude of Measured Frequency	39.77	dBuV
Additional Factor	0.00	dB
+Antenna Factor + Cable Loss+ Amplifier Gain	3.81	dB
Corrected Result	43.58	dBuV/m

Test Date: September 24, 2018

Tested By

Signature: 

Name: Afzal Fazal

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
18-0268
October 19, 2018
Inventek Systems
ISM4343-X

2.18 Measurement Uncertainty

The measurement uncertainties given were calculated using the method detailed in CISPR 16-4-2:2011. A coverage factor of $k=2$ was used to give a level of confidence of approximately 95%.

2.18.1 Conducted Emissions Measurement Uncertainty

Measurement Uncertainty (within a 95% confidence level) for this test is ± 2.78 dB.

2.18.2 Radiated Emissions Measurement Uncertainty

For a measurement distance of 3 m the measurement uncertainty (with a 95% confidence level) for this test using a Biconical Antenna (30 MHz to 200 MHz) is ± 5.3 dB. This value includes all elements of measurement.

The measurement uncertainty (with a 95% confidence level) for this test using a Log Periodic Antenna (200 MHz to 1000 MHz) is ± 5.1 dB.

The measurement uncertainty (with a 95% confidence level) for this test using a Horn Antenna is ± 5.1 dB.

3 Conclusions

The EUT is deemed to have met the requirements of the standards cited within the test report when tested as detailed in the present test report.