



document property name.

ELECTROMAGNETIC EMISSION COMPLIANCE REPORT

Test report file number : E00OR-015

Applicant : RECSOL I&C CO., LTD.

Address : Fl. 5th, Yeo-Sam B/D 648-23, Yeoksam-Dong, Kangnam-Gu, Seoul, 135-080, Korea

Manufacturer : RECSOL I&C CO., LTD.

Address : Fl. 5th, Yeo-Sam B/D 648-23, Yeoksam-Dong, Kangnam-Gu, Seoul, 135-080, Korea

Type of Equipment : ADSL MODEM CARD

FCC ID : O7URECSPEED2021P

Model / Type No. : RECSPEED-2021P

Serial number : N/A

Total page of Report : 13 pages (including this page)

Date of Incoming : August 23, 2000

Date of issuing : October 12, 2000

SUMMARY

The equipment complies with the regulation; FCC CFR47 PART 15 SUBPART B SECTION 15.101

This test report contains only the result of a single test of the sample supplied for the examination. It is not a general valid assessment of the features of the respective products of the mass-production

Prepared by: 

G. W. Lee/ Ass. Chief Engineer
EMC Dept.
ONETECH Corp.

Reviewed by: 

Y. K. Kwon/ Chief Engineer
EMC Dept.
ONETECH Corp.

This report shall not be reproduced except in full without our written approval.

FCC-004 (Rev.0)

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 Dong, Jungwon-Gu, Seongnam-City, Kyunggi-Do, 462-121, Korea
(TEL: 82-31-746-8500 FAX: 82-31-746-8700)

EMC Testing Dept : 426-1 Daeangryong-Ri Chonwol Myun Kwangju-Kun Kyunggi-Do 464-860 Korea (TEL: 82-31-765-8289 FAX: 82-31-766-2904)



document property name.

CONTENTS

	Page
1. VERIFICATION OF COMPLIANCE	3
2. GENERAL INFORMATION	4
2.1 PRODUCT DESCRIPTION	4
2.2 RELATED SUBMITTAL(S) / GRANT(S)	4
2.3 TEST SYSTEM DETAILS	5
2.4 TEST METHODOLOGY	5
2.5 TEST FACILITY	5
3. SYSTEM TEST CONFIGURATION.....	6
3.1 JUSTIFICATION	6
3.2 EUT EXERCISE SOFTWARE	6
3.3 CABLE DESCRIPTION	6
3.4 NOISE SUPPRESSION PARTS ON CABLE	7
3.5 EQUIPMENT MODIFICATIONS	7
3.6 CONFIGURATION OF TEST SYSTEM	7
4. PRELIMINARY TEST.....	8
4.1 AC POWER LINE CONDUCTED EMISSION TEST	8
4.2 RADIATED EMISSION TEST	8
5. FINAL RESULT OF MEASUREMENT	9
5.1 CONDUCTED EMISSION TEST.....	9
5.2 RADIATED EMISSION TEST	12
6. FIELD STRENGTH CALCULATION.....	14
7. LIST OF TEST EQUIPMENT	15



document property name.

1. CERTIFICATION OF COMPLIANCE

APPLICANT : RECSOL I&C CO., LTD.
 ADDRESS : Fl. 5th, Yeo-Sam B/D 648-23, Yeoksam-Dong, Kangnam-Gu, Seoul, 135-080, Korea
 CONTACT PERSON : H. J. PARK
 TELEPHONE NO : 82-2-6215-2700
 FCC ID : O7URECSPEED2021P
 MODEL NO/NAME : RECSPEED-2021P
 SERIAL NUMBER : N/A
 DATE : October 12, 2000

DEVICE TYPE	Peripheral Device for Class B Computing Device-Unintentional Radiator
E.U.T. DESCRIPTION	ADSL MODEM CARD
THIS REPORT CONCERNS	ORIGINAL GRANT
MEASUREMENT PROCEDURES	ANSI C63.4/1992
TYPE OF EQUIPMENT TESTED	PRE-PRODUCTION
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	CERTIFICATION
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC CFR47 PART 15 Section 15.101
MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE	No
FINAL TEST WAS CONDUCTED ON	3 METER OPEN AREA TEST SITE

The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.



document property name.

2. GENERAL INFORMATION

2.1 Product Description

The RECSOL I&C CO., LTD., Model RECSPEED-2021P (referred to as the EUT in this report) is an ADSL MODEM CARD. Which is inserted into the PCI slot on the main board in a personal computer. Product specification described herein was obtained from product data sheet or user's manual.

LIST OF EACH OSC. OR CRY. FREQ.(FREQ.>=1MHz)	25MHz, 35.328MHz
Chipset BRAND Name and Part No	ITex, i90188F
POWER REQUIREMENT	DC $\pm$ 5V and $\pm$ 12V from a PC
NUMBER OF LAYERS	4 Layers
NO. OF EXTERNAL CONNECTOR	Line port for ADSL line and Phone port for telephone line

Model Differences:

-. The following list consists of added model name and their difference. The basic and added models are identical except for model name.

	Model Name	Model Difference
Basic Model Name	RECSPEED-2021P	N/A
Added Model Name	DW-2021P	Only type designation

2.2 Related Submittal(s) / Grant(s)

Original submittal only



document property name.

2.3 Test System Details

The model numbers for all the equipments which were used in the tested system is:

Model	Manufacturer	FCC ID	Description	Connected to
RECSPEED-2021P	RECSOL I&C CO., LTD.	O7URECSPEED2021P	ADSL MODEM CARD (EUT)	PC
TC-PA1000	TAEIL	LIZ-TCPA1000	PC	N/A
AV-5T	KDS	EVOKD-1510T	MONITOR	PC
SKR-1032	SEJIN Elec	GJJSKR-1032B	KEYBOARD	PC
OK-520	A4-TECH	DOC	MOUSE	PC
2225C	HP	DSI6XU2225	PRINTER	PC
OK86670	Fujitsu Micro ELec-	DOC	Centrol Office (CO)	EUT
CK-2702S	JUNGPOONG	N/A	TELEPHONE	EUT
020-0470	CARDINAL	GDE0196	MODEM	PC

2.4 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4/1992. Radiated testing was performed at a distance of 3 meters from EUT to the antenna.

2.5 Test Facility

The open area test site and conducted measurement facilities are located on at 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-Kun, Kyunggi-Do 464-080 Korea. Description details of test facilities were submitted to the Commission on January 12, 1999. (Registration Number: 92819)



document property name.

3. SYSTEM TEST CONFIGURATION

3.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT. : This product consist of PCB with components.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	-	-	-

3.2 EUT exercise Software

The line port of the EUT was connected to the centrol office device(CO), CO was installed in the test room, and then the data were transmitted and received from each other using “ping-t” program during the testing.

3.3 Cable Description

	Power Cord Shielded (Y/N)	I/O cable Shielded (Y/N)	Length (M)
ADSL MODEM CARD (EUT)	N/A	N	-
PC	N	-	1.5(P)
MONITOR	N	Y	1.5(P), 1.8(D)
KEYBOARD	N/A	Y	1.2 (D)
MOUSE	N/A	Y	1.2(D)
MODEM	N	Y	1.5(D)
TELEPHONE	N/A	N	1.2(D)
Centrol Office (CO)	N	N	30.0(D)
PRINTER	N	Y	1.5(P), 1.2 (D)

* The marked “(P)” means the Power Cable, “(D)” means the Data cable.



document property name.

3.4 Noise Suppression Parts on Cable

	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
ADSL MODEM CARD (EUT)	N	N/A	N	N/A
PC	N	N/A	-	-
MONITOR	Y	PC END	Y	PC END
KEYBOARD	N	N/A	Y	PC END
MOUSE	N	N/A	Y	PC END
MODEM	N	N/A	Y	BOTH END
TELEPHONE	N	N/A	N	N/A
Control Office (CO)	N	N/A	N	N/A
PRINTER	N	N/A	Y	BOTH END

3.5 Equipment Modifications

To achieve compliance to CLASS B levels, the following change(s) was made by ONETECH Corp. during compliance testing:

“Not Applicable”

3.6 Configuration of Test System

Line Conducted Test: The EUT was install in PC and the power line of PC was connected to LISN. All supporting equipments were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.4/1992 7.2.3 to determine the worse operating conditions.

Radiated Emission Test: Preliminary radiated emission test was conducted using the procedure in ANSI C63.4/1992 8.3.1.1 to determine the worse operating conditions. Final radiated emission test was conducted at 3 meters open area test site.



document property name.

4. PRELIMINARY TEST

4.1 AC Power line Conducted Emission Test

During Preliminary Test, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
Continuously transferring data between CO and EUT	X

4.2 Radiated Emission Test

During Preliminary Test, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
Continuously transferring data between CO and EUT	X



document property name.

5. FINAL RESULT OF MEASUREMENT

Preliminary test was done in normal operation mode. And the final measurement was selected for the maximized emission level

5.1 Conducted Emission Test

Humidity Level : 57 % Temperature : 26•
 Limits apply to : FCC CFR 47, PART 15, SUBPART B, SECTION 15.107
 Type of Test : CLASS B
 Result : PASSED BY -11.25 dB at 7.03 MHz

EUT : ADSL MODEM CARD Date: September 08, 2000
 Operating Condition : Continuously transferring data between Control Office and EUT
 Detector : CISPR Quasi-Peak (6 dB Bandwidth: 9 kHz)

Power Line Conducted Emission			FCC CLASS B	
Frequency (MHz)	Amplitude (dBuV)	Conductor	Limit (dBuV)	Margin (dB)
0.47	26.33	HOT	48.00	-21.67
0.60	23.09	HOT	48.00	-24.91
1.70	25.70	HOT	48.00	-22.30
4.67	17.90	HOT	48.00	-30.10
7.03	36.75	HOT	48.00	-11.25
9.82	34.17	HOT	48.00	-13.83
16.55	25.79	HOT	48.00	-22.21
25.06	29.81	NEUTRAL	48.00	-18.19
28.35	24.31	HOT	48.00	-23.69

Line Conducted Emission Tabulated Data




document property name.


Measuring by: Young Min, Choi / Test Engineer



document property name.

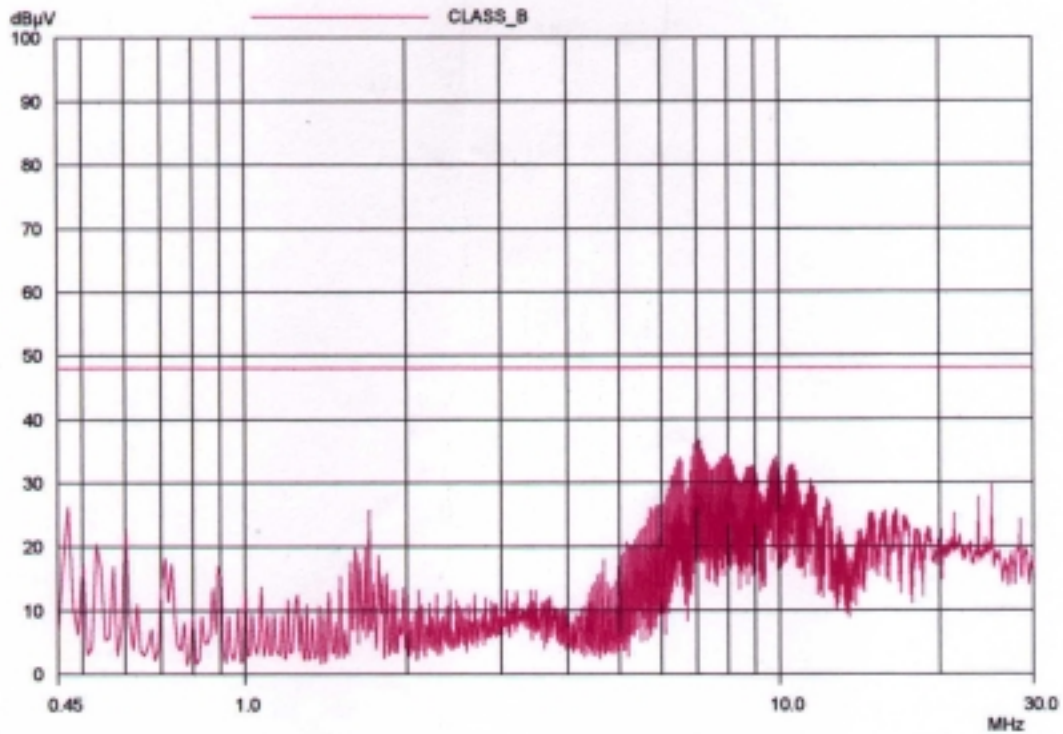

HOT LINE

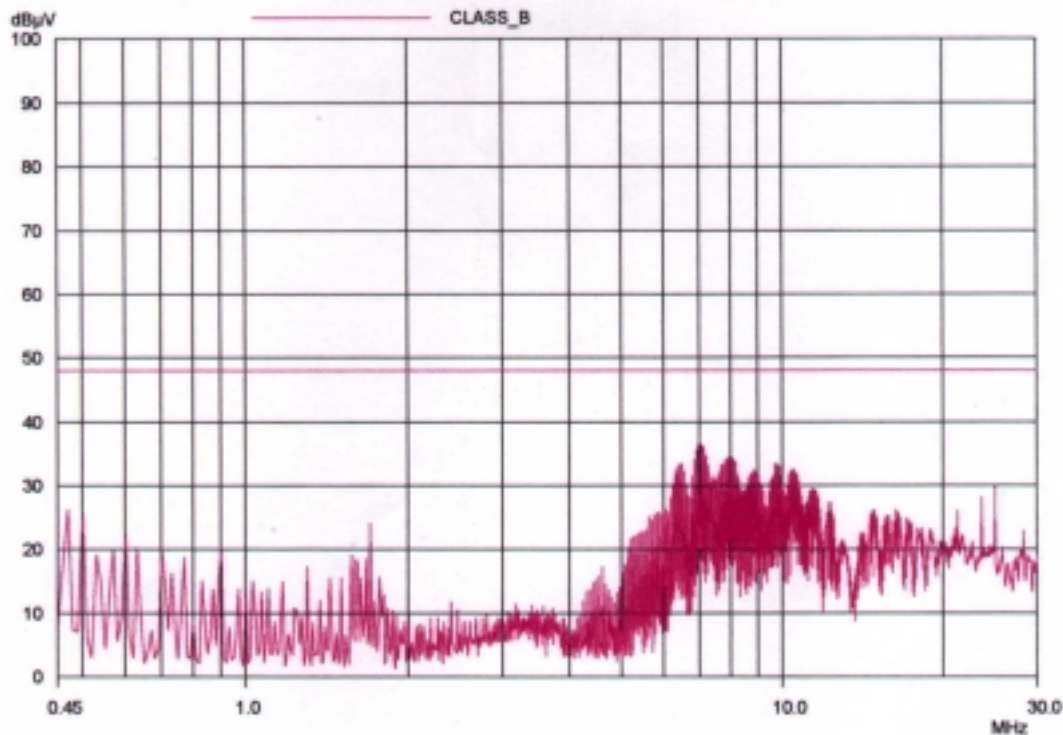

NEUTRAL LINE

This report shall not be reproduced except in full without our written approval.

FCC-004 (Rev.0)

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 Dong, Jungwon-Gu, Seongnam-City, Kyunggi-Do, 462-121, Korea
(TEL: 82-31-746-8500 FAX: 82-31-746-8700)

EMC Testing Dept : 426-1 Daeangyong-Ri Chong-Myun, Kwangju-Kin, Kyunggi-Do 464-860 Korea (TEL: 82-31-765-8289 FAX: 82-31-766-2904)



document property name.

5.2 Radiated Emission Test

The following table shows the highest levels of radiated emission on both polarizations of horizontal and vertical.

Humidity Level : 56 % Temperature : 27 °C
 Limits apply to : FCC CFR 47, PART 15, SUBPART B, SECTION 15.109
 Type of Test : CLASS B
 Result : PASSED BY -6.27 dB at 233.60 MHz

EUT : ADSL MODEM CARD Date: September 14, 2000
 Operating Condition : Continuously transferring data between Centrol Office and EUT
 Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)
 Distance : 3 Meter

Radiated Emission		Ant	Correction Factors		Total	FCC CLASS B	
Freq. (MHz)	Amp. (dBuV)	Pol.	Ant. (dBuV/m)	Cable (dB)	Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
59.10	14.10	H	9.84	0.98	24.92	40.00	-15.08
67.35	19.50	H	7.98	1.00	28.48	40.00	-11.52
75.65	16.60	H	6.30	1.00	23.90	40.00	-16.10
80.45	14.90	H	6.42	1.01	22.33	40.00	-17.67
84.38	25.20	H	7.17	1.09	33.46	40.00	-6.54
84.44	24.30	H	7.18	1.09	32.57	40.00	-7.43
233.60	25.90	V	12.09	1.74	39.73	46.00	-6.27
247.20	24.30	V	12.32	1.82	38.44	46.00	-7.56
250.00	23.10	V	12.37	1.83	37.30	46.00	-8.70
279.30	22.20	V	14.32	1.91	38.43	46.00	-7.57
285.20	22.50	V	14.57	1.93	39.00	46.00	-7.00
336.10	13.20	V	15.20	2.21	30.61	46.00	-15.39

Radiated Emission Tabulated Data



document property name.

Measuring by: Young Min, Choi / Test Engineer



document property name.

6. FIELD STRENGTH CALCULATION

Meter readings are compared to the specification limit correcting for antenna and cable losses

+ Meter reading (dBuV)

+ Cable Loss (dB)

+ Antenna Factor (Loss) (dB/meter)

= Corrected Reading (dBuV/meter)

- Specification Limit (dBuV/meter)

= dB Relative to Spec (+/- dB)



document property name.

7. LIST OF TEST EQUIPMENT

No.	EQUIPMENTS	MFR.	MODEL	SER. NO.	LAST CAL	DUE CAL	USE
1.	Test receiver	R/S	ESVS 10	827864/005	SEP/00	12MONTH	■
2.	Test receiver	R/S	ESHS10	834467/007	APRIL/00	12MONTH	■
3.	Spectrum analyzer	HP	8568B	3026A0226	SEP/00	12MONTH	■
4.	RF preselector	HP	85685A	3107A01264	SEP/00	12MONTH	■
5.	Quasi-Peak Adapter	HP	85650A	3107A01542	SEP/00	12MONTH	■
6.	Dipole Antenna	EMCO	3121C	9107-745	JUN/00	12MONTH	
7.	Biconical antenna	EMCO	3104C	9109-4441 9109-4443 9109-4444	MAR/00	12MONTH	■
8.	Log Periodic antenna	EMCO	3146	9109-3213 9109-3214 9109-3217	MAR/00	12MONTH	■
9.	LISN	EMCO	3825/2	9109-1867 9109-1869	FEB/00	12MONTH	■
10.	RF Amplifier	HP	8447F	3113A04554	JUN/00	N/A	
11.	Spectrum Analyzer	HP	8591A	3131A02312	APR/00	12MONTH	
12.	Computer System	HP	98581C	98543A	N/A	N/A	■
	Hard disk drive		9153C	CMC762Z9153	N/A	N/A	■
13.	Plotter	HP	7475A	30052 22986	N/A	N/A	■
14.	Position Controller	EMCO	1090	9107-1038	N/A	N/A	■
15.	Turn Table	EMCO	1080-1.21	9109-1576	N/A	N/A	■
16.	Antenna Master	EMCO	1070-1	9109-1624	N/A	N/A	■