



**FCC Certification Test Report**  
**for**  
**Pelican Accessories**  
**O7X-ECLP-S-02**

**February 28, 2003**

Prepared for:

**Pelican Accessories**  
**1840 East 27th Street**  
**Vernon, CA 90058**

Prepared By:

**Washington Laboratories, Ltd.**  
**7560 Lindbergh Drive**  
**Gaithersburg, Maryland 20879**



# **FCC Certification Test Program**

## **FCC Certification Test Report for the Pelican Accessories D2027H (PL-2006) Microsoft X-Box Wireless Controller Host O7X-ECLP-S-02**

**February 30, 2003**

WLL JOB# 7357

Prepared by:

  
Brian J. Dettling  
Documentation Specialist

Reviewed by:

  
Gregory M. Snyder  
Wireless/Telco Services Manager & Chief EMC Engineer

## **Abstract**

This report has been prepared on behalf of Pelican Accessories to support the attached Application for Equipment Authorization. The test report and application are submitted for a Intentional Radiator under Part 15.249 of the FCC Rules and Regulations. This Federal Communication Commission (FCC) Certification Test Report documents the test configuration and test results for a Pelican Accessories D2027H (PL-2006) Microsoft X-Box Wireless Controller Host.

Testing was performed on an Open Area Test Site (OATS) of Washington Laboratories, Ltd, 7560 Lindbergh Drive, Gaithersburg, MD 20879. Site description and site attenuation data have been placed on file with the FCC's Sampling and Measurements Branch at the FCC laboratory in Columbia, MD. Washington Laboratories, Ltd. has been accepted by the FCC and approved by NIST NVLAP (NVLAP Lab Code: 200066-0) as an independent FCC test laboratory.

The Pelican Accessories D2027H (PL-2006) Microsoft X-Box Wireless Controller Host complies with the limits for a Intentional Radiator device under Part 15.249 of the FCC Rules and Regulations.

## Table of Contents

Abstract.....	ii
1 Introduction.....	1
1.1 Compliance Statement.....	1
1.2 Test Scope .....	1
1.3 Contract Information.....	1
1.4 Test Dates .....	1
1.5 Test and Support Personnel.....	1
1.6 Abbreviations.....	2
2 Equipment Under Test.....	3
2.1 EUT Identification & Description.....	3
2.2 Test Configuration.....	3
2.3 Testing Algorithm.....	3
2.4 Test Location.....	4
2.5 References.....	4
2.6 Measurement Uncertainty.....	4
3 Test Equipment .....	5
4 Test Results .....	6
4.1 Duty Cycle Correction.....	6
4.2 Occupied Bandwidth: (FCC Part §2.1049) .....	9
4.3 Radiated Spurious Emissions: (FCC Part §2.1053).....	13
<b>4.3.1 Test Procedure</b> .....	13
4.4 Conducted Emissions (AC Power Line).....	20

## List of Tables

Table 1. Device Summary .....	3
Table 2: Test Equipment List .....	5
Table 3. Occupied Bandwidth Results .....	13
Table 4. Radiated Emissions Limits.....	13
Table 5: Radiated Emissions Test Data .....	15
Table 6. Radiated Emission Data, Average Data Above 1GHz.....	16
Table 7. Radiated Emission Data, Peak Data Above 1GHz.....	18
Table 8: AC Power Line Conducted Emissions Test Data Sheet .....	21

## List of Figures

Figure 1. Duty Cycle Plot – Pulse Width.....	7
Figure 2. Duty Cycle Plots Worst-case.....	8
Figure 3. Occupied Bandwidth, Low .....	10
Figure 4. Occupied Bandwidth, Mid .....	11
Figure 5. Occupied Bandwidth, High .....	12

## **1 Introduction**

### **1.1 Compliance Statement**

The Pelican Accessories D2027H (PL-2006) Microsoft X-Box Wireless Controller Host complies with the limits for a Intentional Radiator device under Part 15.249 of the FCC Rules and Regulations.

This test report reflects the testing performed for the certification of the D2027H. Separate testing was performed for the digital and receiver portion under the DoC process.

### **1.2 Test Scope**

Tests for radiated and conducted emissions were performed. All measurements were performed according to the 1992 version of ANSI C63.4. The measurement equipment conforms to ANSI C63.2 Specifications for Electromagnetic Noise and Field Strength Instrumentation.

### **1.3 Contract Information**

Customer: Pelican Accessories  
1840 East 27th Street  
Vernon, CA 90058

Quotation Number: 60544

### **1.4 Test Dates**

Testing was performed from December 23, 2002 to February 11, 2003.

### **1.5 Test and Support Personnel**

Washington Laboratories, LTD

Ken Gemmell

## 1.6 Abbreviations

A	Ampere
Ac	alternating current
AM	Amplitude Modulation
amb	Ambient
Amps	Amperes
b/s	bits per second
BW	Bandwidth
CE	Conducted Emission
cm	centimeter
CW	Continuous Wave
dB	decibel
dc	direct current
EMI	Electromagnetic Interference
EUT	Equipment Under Test
FM	Frequency Modulation
G	giga - prefix for $10^9$ multiplier
Hz	Hertz
IF	Intermediate Frequency
k	kilo - prefix for $10^3$ multiplier
M	Mega - prefix for $10^6$ multiplier
m	Meter
$\mu$	micro - prefix for $10^{-6}$ multiplier
NB	Narrowband
LISN	Line Impedance Stabilization Network
RE	Radiated Emissions
RF	Radio Frequency
rms	root-mean-square
SN	Serial Number
S/A	Spectrum Analyzer
V	Volt

## 2 Equipment Under Test

### 2.1 EUT Identification & Description

#### Pelican Accessories D2027H X-Box Wireless Controller Host

The Pelican Accessories D2027H X-Box Wireless Controller Host is part of the wireless controller system for the X-Box video game system. The D2027H is installed at the game controller port, and transmits and receives controller commands to the Pelican system D2027P controller.

**Table 1. Device Summary**

ITEM	DESCRIPTION
Manufacturer:	Pelican Accessories
FCC ID Number	O7X-ECLP-S-02
EUT Name:	Wireless Controller Host
Model:	D2027H (PL-2006) Microsoft X-Box Host
FCC Rule Parts:	§15.249
Frequency Range:	906 MHz to 926.5 MHz: CH1 ~903M, CH2 ~923.5M, CH3 ~916.5M, CH4 ~909.5MHz, CH5 ~906M, CH6 ~926.5M, CH7 ~920M and CH8 ~913MHz
Maximum Output Power:	< 1mW
Modulation:	FSK
Occupied Bandwidth:	175.5 kHz
Keying:	Automatic
Type of Information:	Control
Number of Channels:	8
Power Output Level	Fixed
Antenna Type	Integral
Interface Cables:	None
Power Source & Voltage:	120VAC via the game console

### 2.2 Test Configuration

The D2027H was configured with a X-Box game console, a television set, and a Pelican D2027P wireless controller (separate certification). The EUT was operated from 120Vac/60Hz power via the game console.

### 2.3 Testing Algorithm

The D2027H was operated continuously by receiving play commands to the wireless game controller. The Host receiver was tested both with and without the wireless controller (i.e. cohered and un-cohered). Worst case emission levels are provided in the test results data.



## 2.4 Test Location

All measurements herein were performed at Washington Laboratories, Ltd. test center in Gaithersburg, MD. Site description and site attenuation data have been placed on file with the FCC's Sampling and Measurements Branch at the FCC laboratory in Columbia, MD. Washington Laboratories, Ltd. has been accepted by the FCC and approved by NIST NVLAP (NVLAP Lab Code: 200066-0) as an independent FCC test laboratory.

## 2.5 References

ANSI C63.2 Specifications for Electromagnetic Noise and Field Strength Instrumentation

ANSI C63.4 American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

Land Mobile FM or PM Communications Equipment Measurement and Performance Standards (ANSI/TIA/EIA-603-93)

## 2.6 Measurement Uncertainty

All results reported herein relate only to the equipment tested. For the purposes of the measurements performed by Washington Laboratories, the measurement uncertainty is  $\pm 2.3$  dB. This has been calculated for a *worst-case situation* (radiated emissions measurements performed on an open area test site).

The following measurement uncertainty calculation is provided:

$$\text{Total Uncertainty} = (A^2 + B^2 + C^2)^{1/2}/(n-1)$$

where:

A = Antenna calibration uncertainty, in dB = 2 dB

B = Spectrum Analyzer uncertainty, in dB = 1 dB

C = Site uncertainty, in dB = 4 dB

n = number of factors in uncertainty calculation = 3

Thus, Total Uncertainty =  $0.5 (2^2 + 1^2 + 4^2)^{1/2} = \pm 2.3$  dB.

### 3 Test Equipment

Table 2 shows a list of the test equipment used for measurements along with the calibration information.

**Table 2: Test Equipment List**

Manufacturer & Model	Description	Serial Number	Property Number	Calibration Due Date
A.H. Systems SAS-200/518	Log Periodic Antenna	117	00001	3/1/03
Antenna Research Associates DRG-118/A	Horn Antenna	1010	00004	8/29/03
Antenna Research Associates LPB-2520	Biconilog Antenna Site 2	1044	00007	6/19/03
Hewlett Packard 8449B	Pre-Amplifier	3008A00729	00066	2/11/04
Hewlett Packard 8593A	Spectrum Analyzer	3009A00739	00074	6/6/03
Hewlett Packard 85650A	Q.P. Adapter (Site 2)	2811A01283	00068	7/5/03
Hewlett Packard 85685A	RF Preselector (Site 2)	3221A01395	00071	5/17/03
Hewlett Packard 8568B	Spectrum Analyzer (Site 2)	2928A04750	00072	7/3/03
Solar Electronics 8012-50-R-24-BNC	LISN	8379493	00124	7/5/03

## 4 Test Results

### 4.1 Duty Cycle Correction

Measurements may be adjusted where pulsed RF is utilized to find the average level associated with a quantity. This calculation is applied to limits for pulsed licensed and unlicensed devices.

On time =  $N_1L_1 + N_2L_2 + \dots + N_{N-1}L_{N-1} + N_NL_N$ , where  $N_1$  is number of type 1 pulses,  $L_1$  is length of type 1 pulses, etc.

- For Licensed Transmitters basic formula can be stated as  $20\log[\text{Duty Cycle}]$
- For Unlicensed Intentional Radiators under 47CFR Part 15, all duty cycle measurements compared to a 100 millisecond period
- i.e. duty cycle = on time/100 milliseconds or period, whichever is less
- Restating the basic formula:
  - Duty cycle =  $(N_1L_1 + N_2L_2 + \dots + N_{N-1}L_{N-1} + N_NL_N)/100$  or T, whichever is less

Where T is the period of the pulse train.

The following Figures show the plots of the modulated carrier. The spectrum analyzer was set to Zero Span and the video triggered to collect the pulse train of the modulation. Calculations of the duty cycle correction factor were obtained from time data provided by the plots.

Figure 1 depicts the pulse width of the Host emission. Figure 2 shows the maximum repetition of the Host pulse.

To obtain the maximum possible repetition rate of transmit for the Host, it was necessary to have the Controller Pad nearby communicating to the Host. This situation caused the emissions from the controller pad to appear in the plots for the duty cycle. These emissions are the lower amplitude emissions appearing on the plot.

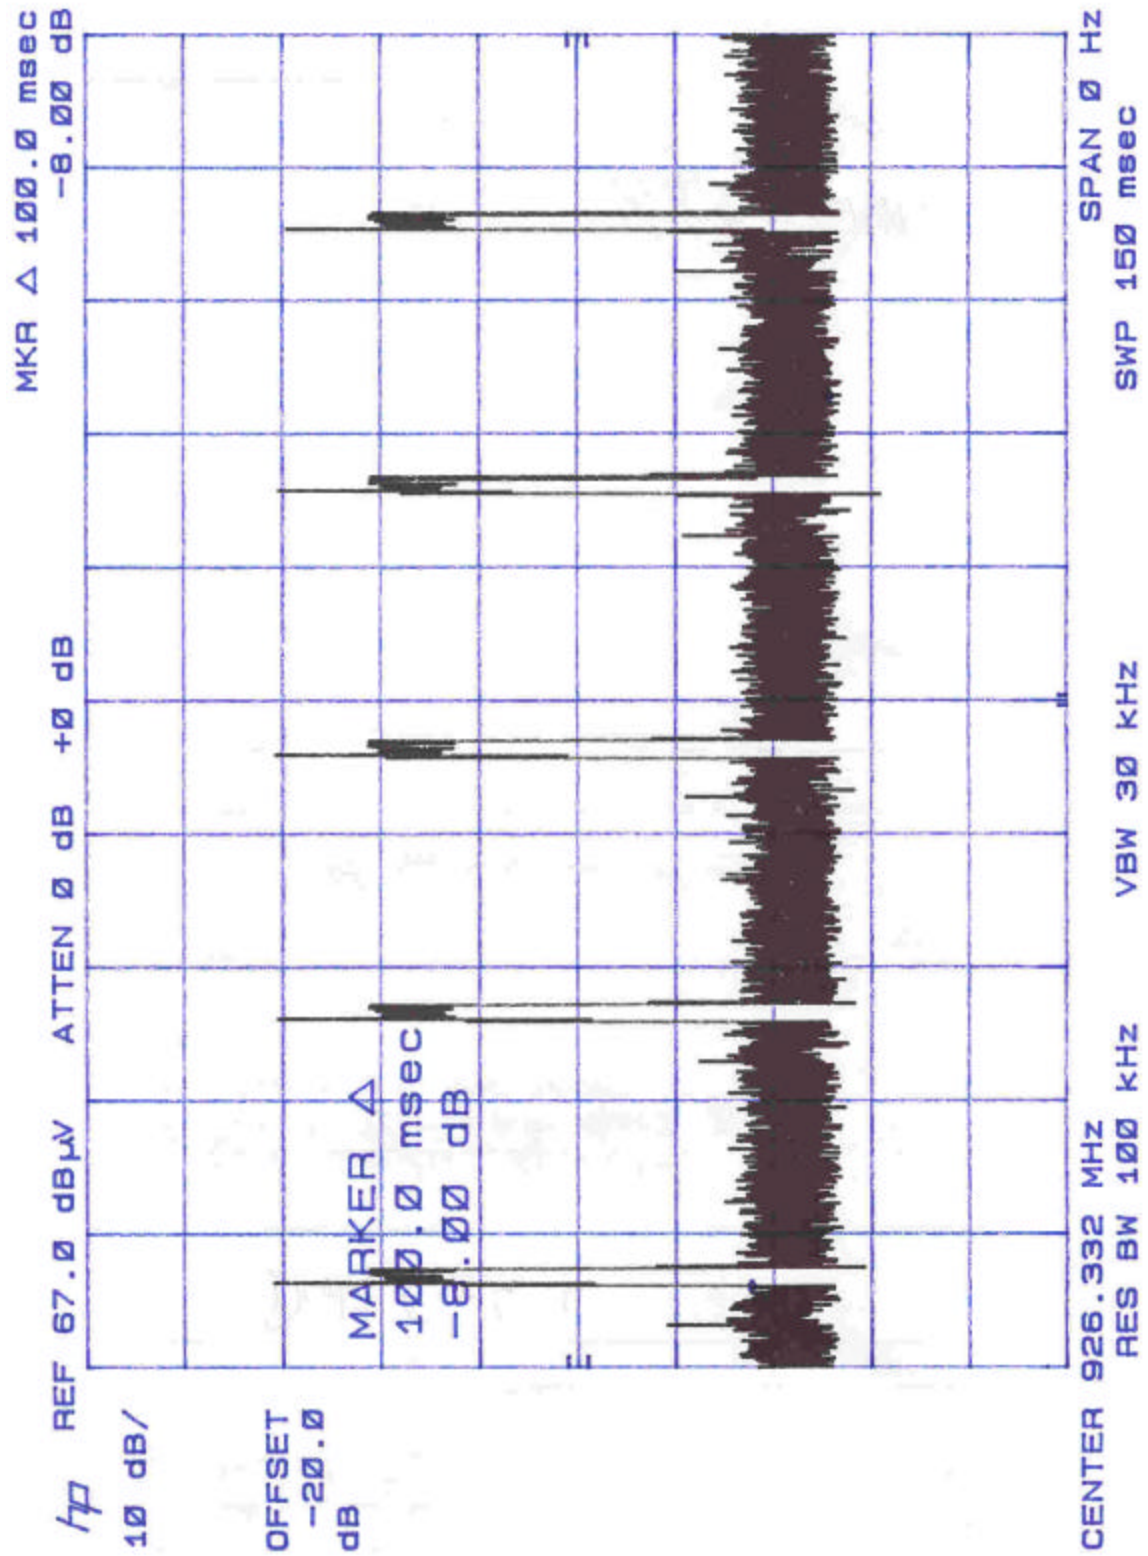


Figure 1. Duty Cycle Plot – Pulse Width



From the data in Figure 1 through Figure 2, the following calculations are made.

On Time Per 100ms:

$$4 \times 2.16\text{ms} = 8.64\text{ms}$$

Duty cycle calculation:

$$8.64\text{ms}/100\text{ms} = 8.64\% \text{ on time} = -21.3\text{dB duty cycle correction (Maximum 20dB allowed)}$$

#### **4.2 Occupied Bandwidth: (FCC Part §2.1049)**

Occupied bandwidth was performed by coupling the output of the EUT to the input of a spectrum analyzer.

At full modulation, the occupied bandwidth was measured for a low, middle and high channel as shown in Figure 3 through Figure 5:

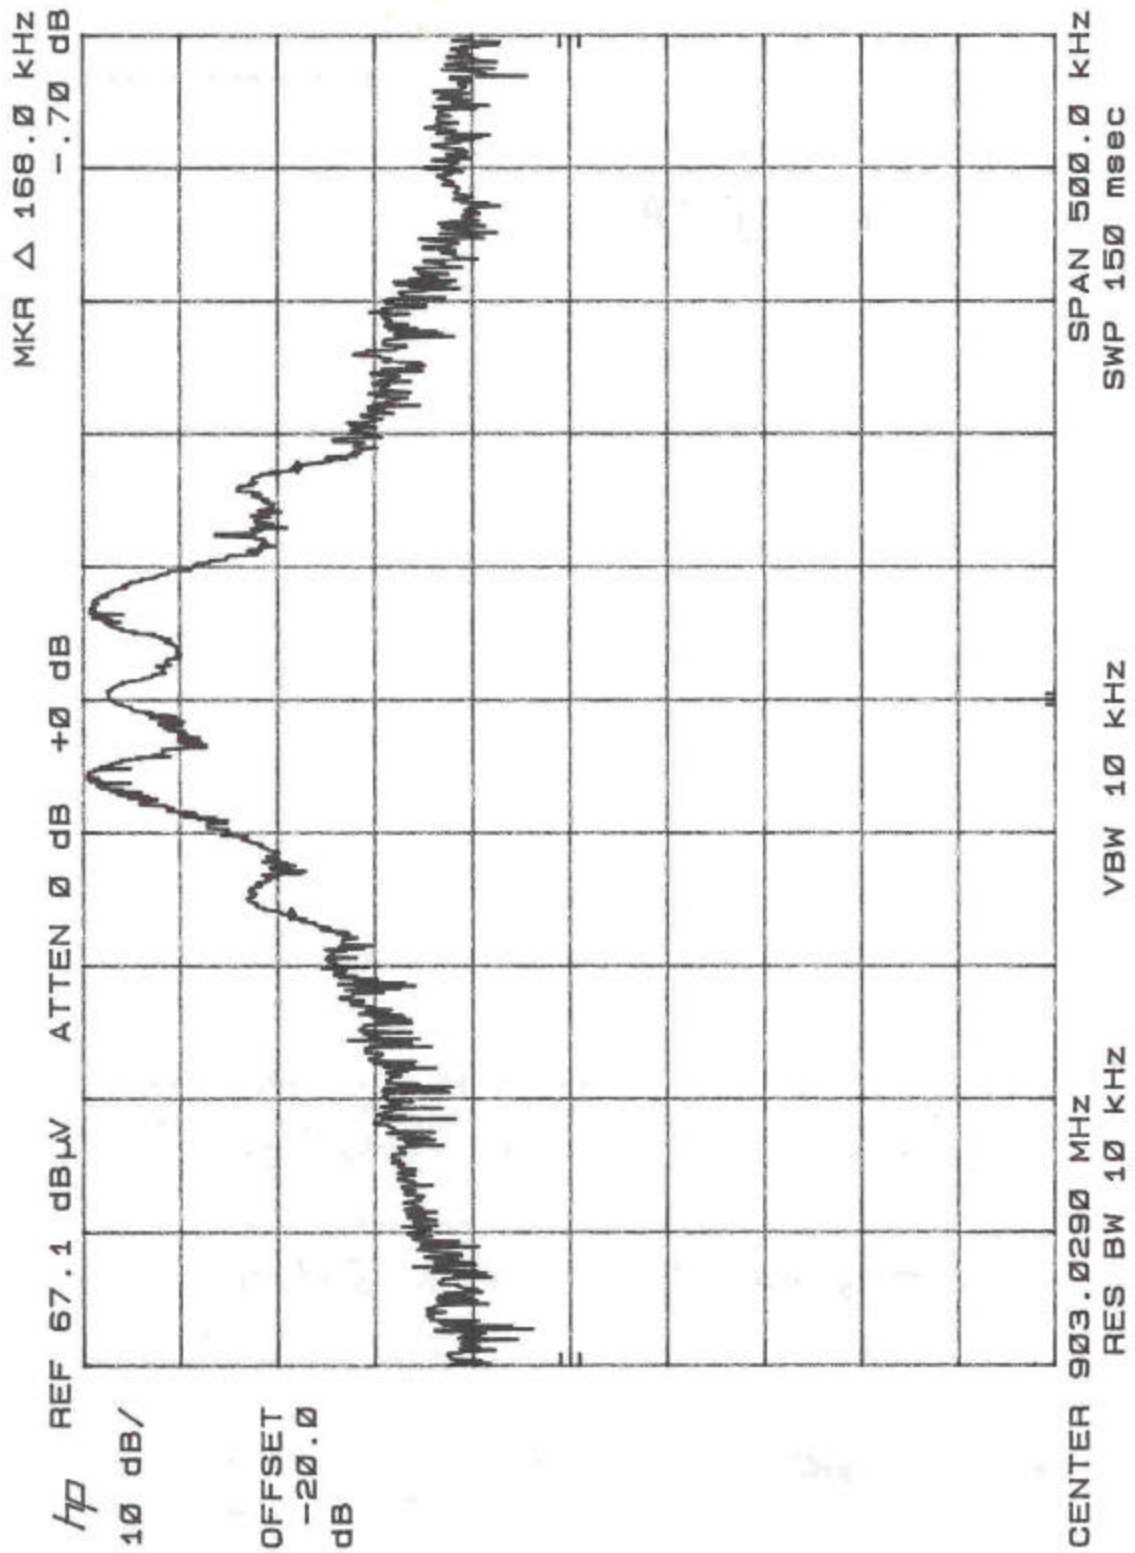


Figure 3. Occupied Bandwidth, Low Channel



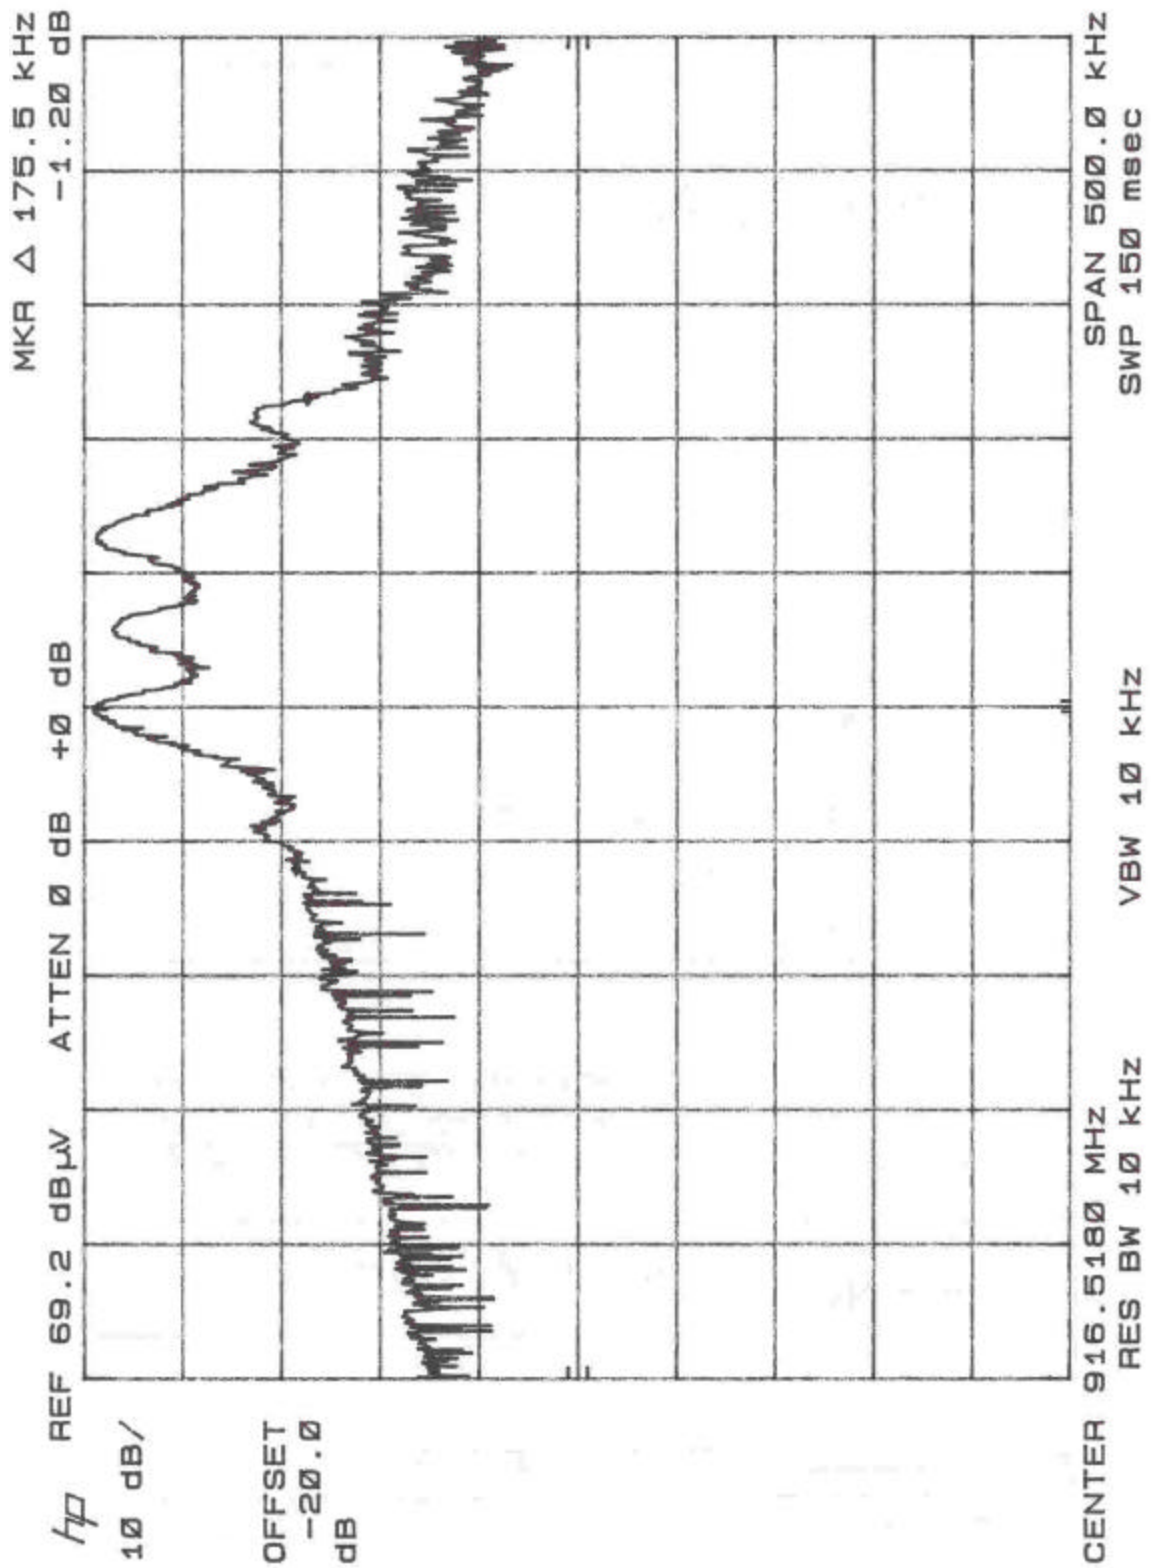


Figure 4. Occupied Bandwidth, Mid Channel



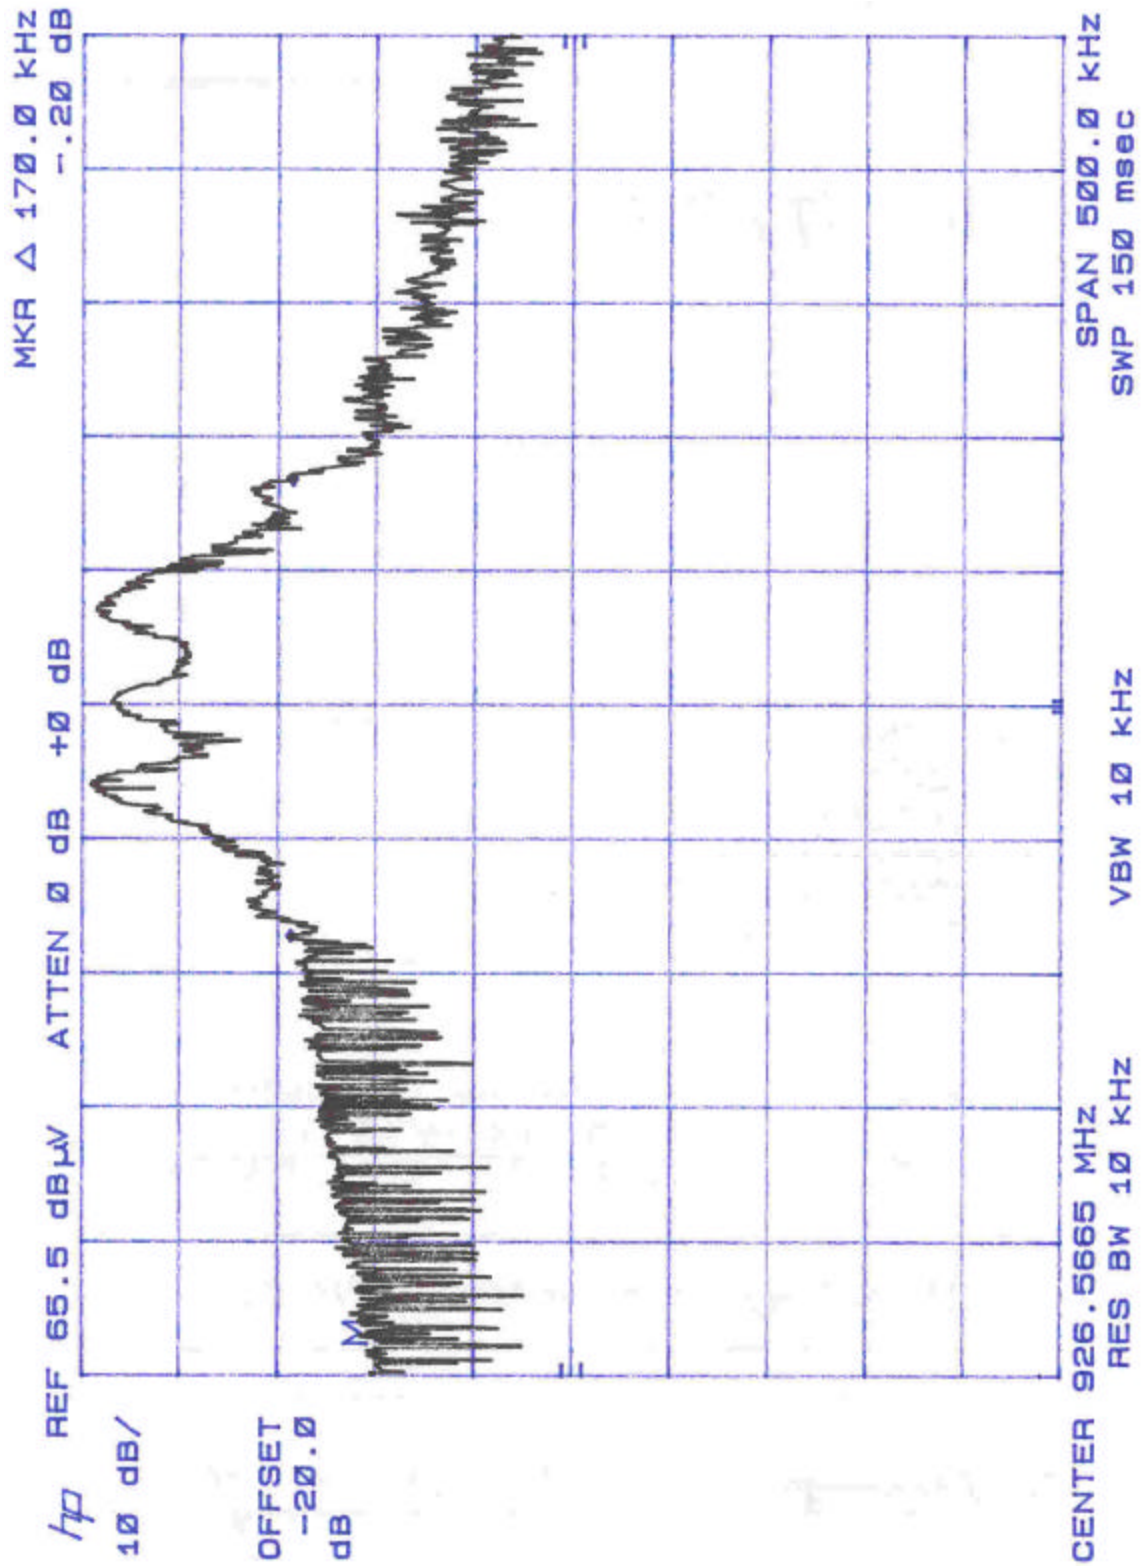


Figure 5. Occupied Bandwidth, High Channel

Table 3 provides a summary of the Occupied Bandwidth Results.

**Table 3. Occupied Bandwidth Results**

Channel	Frequency	Bandwidth
Low Channel	903.029 MHz	168 kHz
Mid Channel	916.518 MHz	175.5 kHz
High Channel	926.566 MHz	170 kHz

#### **4.3 Radiated Spurious Emissions: (FCC Part §2.1053)**

The EUT must comply with the radiated emission limits of 15.249(a). The limits are as shown in the following table.

**Table 4. Radiated Emissions Limits**

<b>Fundamental Frequency</b>	<b>Field Strength of Fundamental (<math>\mu</math>V/m)</b>	<b>Field Strength of Harmonics (<math>\mu</math>V/m)</b>
902 – 928 MHz	50,000	500
2400 – 2483.5 MHz	50,000	500
5725 – 5875 MHz	50,000	500
24.00 – 24.25 MHz	250,000	2500

##### **4.3.1 Test Procedure**

The EUT was placed on motorized turntable for radiated testing on a 3-meter open field test site. The emissions from the EUT were measured continuously at every azimuth by rotating the turntable. Receiving antennas were mounted on an antenna mast to determine the height of maximum emissions. The height of the antenna was varied between 1 and 4 meters. The peripherals were placed on the table in accordance with ANSI C63.4-1992. Cables were varied in position to produce maximum emissions. Both the horizontal and vertical field components were measured.

The emissions were measured using the following resolution bandwidths:

Frequency Range	Resolution Bandwidth	Video Bandwidth
30MHz- 1000 MHz	100kHz	>100kHz
>1000 MHz	1 MHz	1MHz (peak)

Emissions were measured to the 10<sup>th</sup> harmonic of the transmit frequency. The Host was tested in two orthogonal planes. Worst case emission levels are reported.

The following is a sample calculation used in the data tables for calculating the final field strength of spurious emissions and comparing these levels to the specified limits.

Sample Calculation:

Spectrum Analyzer Voltage (SA Level): V dBμV

Antenna Factor (Ant Corr): AFdB/m

Cable Loss Correction (Cable Corr): CCdB

Duty Cycle Correction (Average) DCCdB

Amplifier Gain: GdB

Electric Field (Corr Level):  $Ed_{\mu V/m} = V_{dB\mu V} + AF_{dB/m} + CC_{dB} + DCC_{dB} - G_{dB}$

\*Note: The amplifier gain is listed at the top of the data sheet and is included in the final field strength calculation.

**Table 5: Radiated Emissions Test Data**

CLIENT:	Electrosource, Pelican LLC	DATE:	2/11/03
TESTER:	Ken Gemmell	JOB #:	7357
<b><u>EUT Information:</u></b>		<b><u>Test Requirements:</u></b>	
EUT:	Xbox RF Host	TEST STD:	FCC Part 15
CONFIGURATION:	Dongle in CW mode	DISTANCE:	3m
CLOCKS:		CLASS:	B
<b><u>Test Equipment/Limit:</u></b>			
ANTENNA:	A_00007	LIMIT:	LFCC_3m_Class_B
CABLE:	CSITE2_3m	AMPLIFIER (dB)	None

Frequency (MHz)	Polarity H/V	Azimuth Degree	Ant. Hght (m)	SA Level (QP) (dBμV)	Ant. Corr. (dB/m)	Cable Corr. (dB)	Amp Gain (dB)	Corr. Level (dBμV/m)	Corr. Level (μV/m)	Limit (μV/m)	Margin dB
Channel 1 (903 MHz)											
903.00	H	0.0	1.0	60.8	21.5	7.6	0.0	89.9	31413.5	50000.0	-4.0
903.00	V	0.0	1.0	56.1	21.5	7.6	0.0	85.2	18285.9	50000.0	-8.7
Channel 8 (913 MHz)											
913.00	H	0.0	1.0	56.4	22.0	7.5	0.0	85.9	19821.6	50000.0	-8.0
913.00	V	0.0	1.0	56.5	22.0	7.5	0.0	86.0	20051.1	50000.0	-7.9
Channel 6 (926.5 MHz)											
926.55	H	0.0	1.0	59.7	22.3	7.6	0.0	89.7	30404.1	50000.0	-4.3
926.55	V	0.0	1.0	56.5	22.3	7.6	0.0	86.5	21034.5	50000.0	-7.5

**Table 6. Radiated Emission Data, Average Data Above 1GHz**

CLIENT:	Electrosorce, Pelican LLC	DATE:	1/2/03
TESTER:	Ken Gemmell	JOB #:	7357
<b><u>EUT Information:</u></b>		<b><u>Test Requirements:</u></b>	
EUT:	X-Box RF Host	TEST STD:	FCC Part 15
CONFIG:	Host in CW mode	DISTANCE:	3m
		CLASS:	B

**Test Equipment/Limit:**

ANTENNA:	A_00004	LIMIT:	LFCC_3m_Class_B
CABLE:	CSITE2_HF	AMPLIFIER (dB)	A_00312

Frequency	Polarity	Azimuth	Ant. Hght	SA Level (QP)	Ant. Corr.	Cable Corr.	Amp Gain	Duty Cycle Corr	Corr. Level	Corr. Level	Limit	Margin
(MHz)	H/V	Degree	(m)	(dBμV)	(dB/m)	(dB)	(dB)	(db)	(dBμV/m)	(μV/m)	(μV/m)	dB
Channel 1 (903 MHz)												
1806.00	H	0.0	1.0	59.7	28.3	3.1	34.1	-20.0	37.0	70.6	500.0	-17.0
2709.00	H	315.0	1.0	55.5	30.2	2.9	34.4	-20.0	34.2	51.6	500.0	-19.7
3612.00	H	0.0	1.0	51.8	31.3	2.8	34.6	-20.0	31.4	37.0	500.0	-22.6
4515.00	H	0.0	1.0	45.0	32.4	3.7	34.5	-20.0	26.6	21.3	500.0	-27.4
5418.00	H	0.0	1.0	43.2	33.9	4.3	34.5	-20.0	26.9	22.1	500.0	-27.1 a
6321.00	H	0.0	1.0	42.8	35.9	4.2	34.6	-20.0	28.3	25.9	500.0	-25.7 a
7224.00	H	0.0	1.0	43.2	37.8	4.5	34.8	-20.0	30.7	34.1	500.0	-23.3 a
8127.00	H	0.0	1.0	42.7	38.5	4.9	34.3	-20.0	31.7	38.4	500.0	-22.3 a
9030.00	H	0.0	1.0	41.3	39.0	4.9	33.0	-20.0	32.2	40.9	500.0	-21.7 a
1806.00	V	0.0	1.0	61.8	28.3	3.1	34.1	-20.0	39.1	90.6	500.0	-14.8
2709.00	V	0.0	1.0	51.8	30.2	2.9	34.4	-20.0	30.6	33.8	500.0	-23.4
3612.00	V	0.0	1.0	54.7	31.3	2.8	34.6	-20.0	34.2	51.3	500.0	-19.8
4515.00	V	0.0	1.0	42.8	32.4	3.7	34.5	-20.0	24.4	16.6	500.0	-29.6
5418.00	V	0.0	1.0	42.0	33.9	4.3	34.5	-20.0	25.7	19.3	500.0	-28.3
6321.00	V	0.0	1.0	43.3	35.9	4.2	34.6	-20.0	28.8	27.5	500.0	-25.2
7224.00	V	0.0	1.0	42.7	37.8	4.5	34.8	-20.0	30.2	32.2	500.0	-23.8 a
8127.00	V	0.0	1.0	42.8	38.5	4.9	34.3	-20.0	31.8	39.1	500.0	-22.1 a
9030.00	V	0.0	1.0	42.7	39.0	4.9	33.0	-20.0	33.6	47.7	500.0	-20.4 a
9030.00	V	0.0	1.0	47.7	39.0	4.9	36.2	-20.0	35.5	59.3	500.0	-18.5 a
Channel 8 (913 MHz)												
1826.00	H	0.0	1.0	58.0	28.3	3.1	34.1	-20.0	35.4	59.0	500.0	-18.6
2739.00	H	0.0	1.0	50.2	30.3	2.9	34.4	-20.0	28.9	28.0	500.0	-25.0
3652.00	H	0.0	1.0	51.7	31.4	2.8	34.6	-20.0	31.2	36.5	500.0	-22.7
4565.00	H	0.0	1.0	41.2	32.5	3.8	34.5	-20.0	22.9	13.9	500.0	-31.1 a
5478.00	H	0.0	1.0	40.8	34.0	4.2	34.4	-20.0	24.6	17.0	500.0	-29.3 a
6391.00	H	0.0	1.0	41.7	36.1	4.2	34.6	-20.0	27.3	23.3	500.0	-26.6 a
7304.00	H	0.0	1.0	42.7	37.9	4.6	34.8	-20.0	30.3	32.7	500.0	-23.7 a
8217.00	H	0.0	1.0	42.0	38.5	4.9	34.2	-20.0	31.2	36.3	500.0	-22.8 a

Frequency	Polarity	Azimuth	Ant. Hght	SA Level (QP)	Ant. Corr.	Cable Corr.	Amp Gain	Duty Cycle Corr	Corr. Level	Corr. Level	Limit	Margin
(MHz)	H/V	Degree	(m)	(dBµV)	(dB/m)	(dB)	(dB)	(db)	(dBµV/m)	(µV/m)	(µV/m)	dB
9130.00	H	0.0	1.0	43.0	39.1	4.9	33.0	-20.0	34.0	50.3	500.0	-19.9 a
1826.00	V	0.0	1.0	57.5	28.3	3.1	34.1	-20.0	34.9	55.7	500.0	-19.1
2739.00	V	0.0	1.0	52.7	30.3	2.9	34.4	-20.0	31.4	37.3	500.0	-22.5
3652.00	V	0.0	1.0	50.0	31.4	2.8	34.6	-20.0	29.6	30.1	500.0	-24.4
4565.00	V	0.0	1.0	42.7	32.5	3.8	34.5	-20.0	24.4	16.6	500.0	-29.6
5478.00	V	0.0	1.0	41.8	34.0	4.2	34.4	-20.0	25.6	19.1	500.0	-28.3 a
6391.00	V	0.0	1.0	41.2	36.1	4.2	34.6	-20.0	26.8	21.9	500.0	-27.2 a
7304.00	V	0.0	1.0	41.5	37.9	4.6	34.8	-20.0	29.1	28.6	500.0	-24.9 a
8217.00	V	0.0	1.0	41.3	38.5	4.9	34.2	-20.0	30.5	33.6	500.0	-23.4 a
9130.00	V	0.0	1.0	43.8	39.1	4.9	33.0	-20.0	34.9	55.4	500.0	-19.1 a
Channel 6 (926.5 MHz)												
1853.00	H	0.0	1.0	52.0	30.4	2.9	34.5	-20.0	30.8	34.6	500.0	-23.2
2779.50	H	0.0	1.0	51.7	31.4	2.8	34.6	-20.0	31.3	36.7	500.0	-22.7
3706.00	H	0.0	1.0	43.2	32.6	3.9	34.5	-20.0	25.1	18.0	500.0	-28.9 a
4632.50	H	0.0	1.0	41.5	34.2	4.2	34.4	-20.0	25.4	18.7	500.0	-28.5 a
5559.00	H	0.0	1.0	41.8	36.3	4.2	34.6	-20.0	27.7	24.2	500.0	-26.3 a
6485.50	H	0.0	1.0	42.2	37.9	4.6	34.7	-20.0	30.0	31.6	500.0	-24.0 a
7412.00	H	0.0	1.0	42.7	38.6	4.9	34.0	-20.0	32.2	40.6	500.0	-21.8 a
8338.50	H	0.0	1.0	41.8	39.2	5.0	33.0	-20.0	33.0	44.7	500.0	-21.0 a
9265.00	H	0.0	1.0	41.8	39.2	5.0	33.0	-20.0	33.0	44.7	500.0	-21.0 a
1853.00	V	0.0	1.0	58.7	28.4	3.2	34.0	-20.0	36.3	65.1	500.0	-17.7
2779.50	V	0.0	1.0	54.3	30.4	2.9	34.5	-20.0	33.1	45.1	500.0	-20.9
3706.00	V	0.0	1.0	47.5	31.4	2.8	34.6	-20.0	27.1	22.7	500.0	-26.9
4632.50	V	0.0	1.0	41.2	32.6	3.9	34.5	-20.0	23.1	14.3	500.0	-30.9
5559.00	V	0.0	1.0	40.8	34.2	4.2	34.4	-20.0	24.7	17.2	500.0	-29.2 a
6485.50	V	0.0	1.0	42.7	36.3	4.2	34.6	-20.0	28.6	26.9	500.0	-25.4 a
7412.00	V	0.0	1.0	42.0	37.9	4.6	34.7	-20.0	29.8	30.9	500.0	-24.2 a
8338.50	V	0.0	1.0	42.7	38.6	4.9	34.0	-20.0	32.2	40.6	500.0	-21.8 a
9265.00	V	0.0	1.0	41.6	39.2	5.0	33.0	-20.0	32.8	43.7	500.0	-21.2 a

a = ambient

**Table 7. Radiated Emission Data, Peak Data Above 1GHz**

CLIENT:	Electrosources, Pelican LLC	DATE:	1/2/03
TESTER:	Ken Gemmell	JOB #:	7357
<b><u>EUT Information:</u></b>		<b><u>Test Requirements:</u></b>	
EUT:	X-Box RF Host	TEST STD:	FCC Part 15
CONFIGURATION:	Host in CW mode	DISTANCE:	3m
		CLASS:	B
<b><u>Test Equipment/Limit:</u></b>			
ANTENNA:	A_00004	LIMIT:	LFCC_3m_Class_B
CABLE:	CSITE2_HF	AMPLIFIER (dB)	A_00312

Frequency (MHz)	Polarity H/V	Azimuth Degree	Ant. Hght (m)	SA Level (QP) (dBµV)	Ant. Corr. (dB/m)	Cable Corr. (dB)	Amp Gain (dB)	Corr. Level (dBµV/m)	Corr. Level (µV/m)	Limit (µV/m)	Margin dB
Channel 1 (903 MHz)											
1806.00	H	0.0	1.0	59.7	28.3	3.1	34.1	57.0	706.3	5000.0	-17.0
2709.00	H	315.0	1.0	55.5	30.2	2.9	34.4	54.2	515.8	5000.0	-19.7
3612.00	H	0.0	1.0	51.8	31.3	2.8	34.6	51.4	370.1	5000.0	-22.6
4515.00	H	0.0	1.0	45.0	32.4	3.7	34.5	46.6	212.9	5000.0	-27.4 a
5418.00	H	0.0	1.0	43.2	33.9	4.3	34.5	46.9	220.6	5000.0	-27.1 a
6321.00	H	0.0	1.0	42.8	35.9	4.2	34.6	48.3	259.2	5000.0	-25.7 a
7224.00	H	0.0	1.0	43.2	37.8	4.5	34.8	50.7	341.5	5000.0	-23.3 a
8127.00	H	0.0	1.0	42.7	38.5	4.9	34.3	51.7	383.6	5000.0	-22.3 a
9030.00	H	0.0	1.0	41.3	39.0	4.9	33.0	52.2	409.2	5000.0	-21.7
1806.00	V	0.0	1.0	61.8	28.3	3.1	34.1	59.1	905.7	5000.0	-14.8
2709.00	V	0.0	1.0	51.8	30.2	2.9	34.4	50.6	338.0	5000.0	-23.4
3612.00	V	0.0	1.0	54.7	31.3	2.8	34.6	54.2	513.2	5000.0	-19.8
4515.00	V	0.0	1.0	42.8	32.4	3.7	34.5	44.4	165.8	5000.0	-29.6
5418.00	V	0.0	1.0	42.0	33.9	4.3	34.5	45.7	192.8	5000.0	-28.3 a
6321.00	V	0.0	1.0	43.3	35.9	4.2	34.6	48.8	275.5	5000.0	-25.2 a
7224.00	V	0.0	1.0	42.7	37.8	4.5	34.8	50.2	322.4	5000.0	-23.8 a
8127.00	V	0.0	1.0	42.8	38.5	4.9	34.3	51.8	390.7	5000.0	-22.1 a
9030.00	V	0.0	1.0	42.7	39.0	4.9	33.0	53.6	477.5	5000.0	-20.4
9030.00	V	0.0	1.0	47.7	39.0	4.9	33.0	58.6	856.0	5000.0	-15.3
Channel 8 (913 MHz)											
1826.00	H	0.0	1.0	58.0	28.3	3.1	34.1	55.4	590.2	5000.0	-18.6
2739.00	H	0.0	1.0	50.2	30.3	2.9	34.4	48.9	279.7	5000.0	-25.0
3652.00	H	0.0	1.0	51.7	31.4	2.8	34.6	51.2	364.9	5000.0	-22.7
4565.00	H	0.0	1.0	41.2	32.5	3.8	34.5	42.9	139.4	5000.0	-31.1 a
5478.00	H	0.0	1.0	40.8	34.0	4.2	34.4	44.6	170.4	5000.0	-29.3 a
6391.00	H	0.0	1.0	41.7	36.1	4.2	34.6	47.3	233.1	5000.0	-26.6 a
7304.00	H	0.0	1.0	42.7	37.9	4.6	34.8	50.3	327.3	5000.0	-23.7 a
8217.00	H	0.0	1.0	42.0	38.5	4.9	34.2	51.2	363.4	5000.0	-22.8 a
9130.00	H	0.0	1.0	43.0	39.1	4.9	33.0	54.0	503.4	5000.0	-19.9
1826.00	V	0.0	1.0	57.5	28.3	3.1	34.1	54.9	557.2	5000.0	-19.1
2739.00	V	0.0	1.0	52.7	30.3	2.9	34.4	51.4	373.0	5000.0	-22.5

Frequency (MHz)	Polarity H/V	Azimuth Degree	Ant. Hght (m)	SA Level (QP) (dBμV)	Ant. Corr. (dB/m)	Cable Corr. (dB)	Amp Gain (dB)	Corr. Level (dBμV/m)	Corr. Level (μV/m)	Limit (μV/m)	Margin dB
3652.00	V	0.0	1.0	50.0	31.4	2.8	34.6	49.6	301.1	5000.0	-24.4
4565.00	V	0.0	1.0	42.7	32.5	3.8	34.5	44.4	165.6	5000.0	-29.6
5478.00	V	0.0	1.0	41.8	34.0	4.2	34.4	45.6	191.2	5000.0	-28.3
6391.00	V	0.0	1.0	41.2	36.1	4.2	34.6	46.8	219.3	5000.0	-27.2 a
7304.00	V	0.0	1.0	41.5	37.9	4.6	34.8	49.1	286.1	5000.0	-24.9 a
8217.00	V	0.0	1.0	41.3	38.5	4.9	34.2	50.5	336.5	5000.0	-23.4 a
9130.00	V	0.0	1.0	43.8	39.1	4.9	33.0	54.9	553.9	5000.0	-19.1
Channel 6 (926.5 MHz)											
1853.00	H	0.0	1.0	52.0	28.4	3.2	34.0	49.6	300.8	5000.0	-24.4
2779.50	H	0.0	1.0	51.7	30.4	2.9	34.5	50.5	333.2	5000.0	-23.5
3706.00	H	0.0	1.0	43.2	31.4	2.8	34.6	42.8	138.4	5000.0	-31.2
4632.50	H	0.0	1.0	41.5	32.6	3.9	34.5	43.4	148.2	5000.0	-30.6 a
5559.00	H	0.0	1.0	41.8	34.2	4.2	34.4	45.7	193.5	5000.0	-28.2 a
6485.50	H	0.0	1.0	42.2	36.3	4.2	34.6	48.1	253.7	5000.0	-25.9 a
7412.00	H	0.0	1.0	42.7	37.9	4.6	34.7	50.5	335.2	5000.0	-23.5 a
8338.50	H	0.0	1.0	41.8	38.6	4.9	34.0	51.3	366.3	5000.0	-22.7 a
9265.00	H	0.0	1.0	41.8	39.2	5.0	33.0	53.0	447.3	5000.0	-21.0
1853.00	V	0.0	1.0	58.7	28.4	3.2	34.0	56.3	650.6	5000.0	-17.7
2779.50	V	0.0	1.0	54.3	30.4	2.9	34.5	53.1	451.1	5000.0	-20.9
3706.00	V	0.0	1.0	47.5	31.4	2.8	34.6	47.1	227.1	5000.0	-26.9
4632.50	V	0.0	1.0	41.2	32.6	3.9	34.5	43.1	143.2	5000.0	-30.9
5559.00	V	0.0	1.0	40.8	34.2	4.2	34.4	44.7	172.5	5000.0	-29.2
6485.50	V	0.0	1.0	42.7	36.3	4.2	34.6	48.6	268.7	5000.0	-25.4 a
7412.00	V	0.0	1.0	42.0	37.9	4.6	34.7	49.8	309.2	5000.0	-24.2 a
8338.50	V	0.0	1.0	42.7	38.6	4.9	34.0	52.2	406.3	5000.0	-21.8 a
9265.00	V	0.0	1.0	41.6	39.2	5.0	33.0	52.8	437.1	5000.0	-21.2

a = ambient



#### **4.4 Conducted Emissions (AC Power Line)**

The EUT was placed on an 80 cm high 1 x 1.5 m non-conductive table above a ground plane. Power to the EUT was provided through a Solar Corporation 50 /50 mH Line Impedance Stabilization Network bonded to a 3 x 2 meter ground plane. The LISN has its AC input supplied from a filtered AC power source. Power and data cables were moved about to obtain maximum emissions.

The 50 output of the LISN was connected to the input of the spectrum analyzer and the emissions in the frequency range of 450 kHz to 30 MHz was measured. The detector function was set to quasi-peak or peak, as appropriate, and the resolution bandwidth during testing was at least 9 kHz, with all post-detector filtering no less than 10 times the resolution bandwidth.

AC Power Line conducted emissions test data are included in Table 8.

Note: The conducted emissions reported herein are done to the specifications that were in effect prior to September 9, 2002 as allowed by the transition provisions of 15.37.

**Table 8: AC Power Line Conducted Emissions Test Data Sheet**

CLIENT:	Electrosorce, Pelican LLC	DATE:	1/2/03
TEST STANDARD:	FCC Part 15	JOB #:	7357
MODEL:	Xbox RF Host	CLASS:	FCC_B
TESTER:	Ken Gemmell	TEST VOLTAGE:	120 VAC

LINE 1 - NEUTRAL

Frequency	Level	Limit	Margin	Level	Limit	Margin
	QP	QP	QP	AVG	AVG	AVG
MHz	dBuV	dBuV	dB	dBuV	dBuV	dB
0.16	54.7	65.6	-10.9	47.9	55.6	-7.7
0.22	52.2	62.8	-10.5	48.4	52.8	-4.4
1.66	42.9	56.0	-13.1	34.3	46.0	-11.7
9.93	28.1	60.0	-31.9	28.1	50.0	-21.9
24.00	27.6	60.0	-32.4	27.6	50.0	-22.4
28.02	24.5	60.0	-35.5	24.5	50.0	-25.5

LINE 2 - PHASE

Frequency	Level	Limit	Margin	Level	Limit	Margin
	QP	QP	QP	AVG	AVG	AVG
MHz	dBuV	dBuV	dB	dBuV	dBuV	dB
0.16	54.6	65.6	-11.0	47.6	55.6	-8.0
0.22	52.7	62.8	-10.1	48.3	52.8	-4.5
1.66	42.8	56.0	-13.2	34.5	46.0	-11.5
9.93	27.9	60.0	-32.1	28.5	50.0	-21.5
24.00	27.6	60.0	-32.4	27.9	50.0	-22.1
28.02	24.0	60.0	-36.0	24.2	50.0	-25.8