


Appendix 1

Test Results


20dB Bandwidth

Tx frequency: 2405MHz

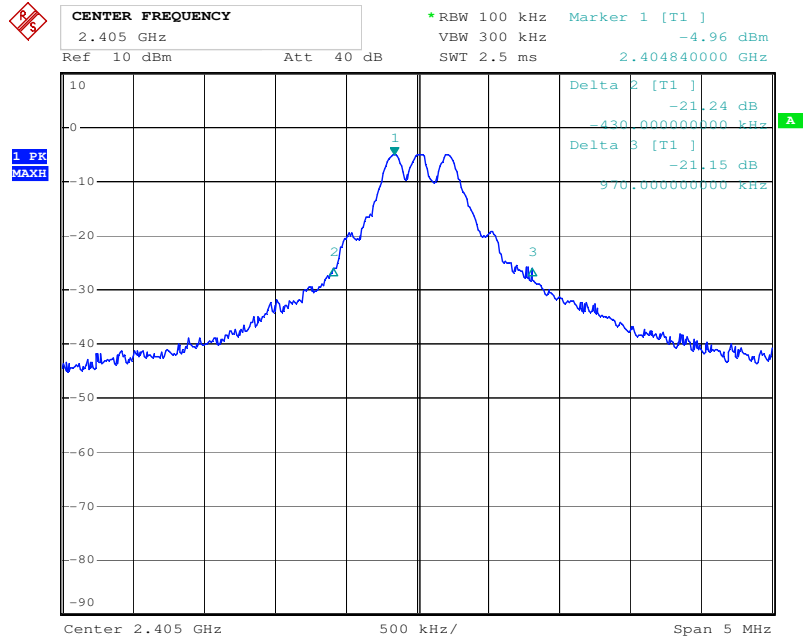


Comment: test print
Date: 29.APR.2015 16:24:36

Tx frequency: 2440MHz

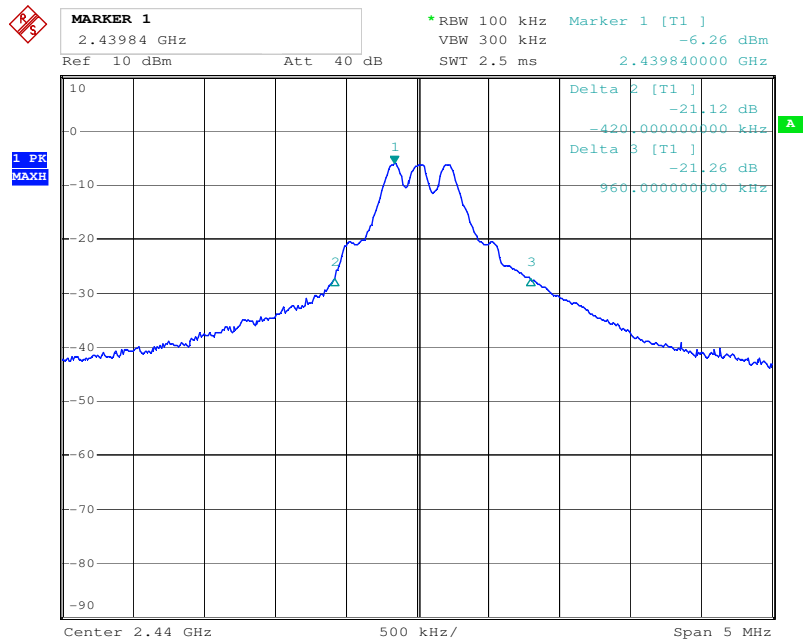

Comment: test print
Date: 29.APR.2015 17:06:38


Tx frequency: 2475MHz

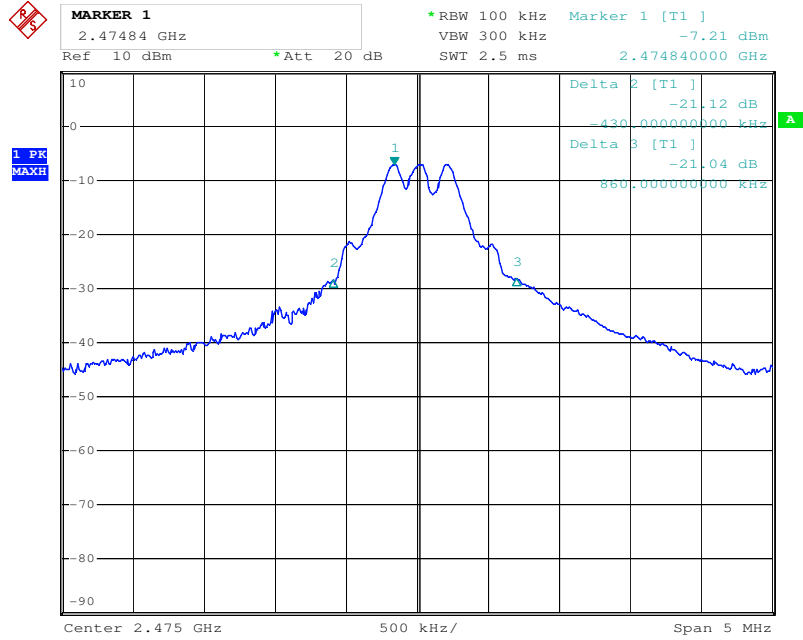

Comment: test print
Date: 29.APR.2015 16:19:25

Band Edge Compliance

Tx frequency: 2405MHz (radiated measurement)

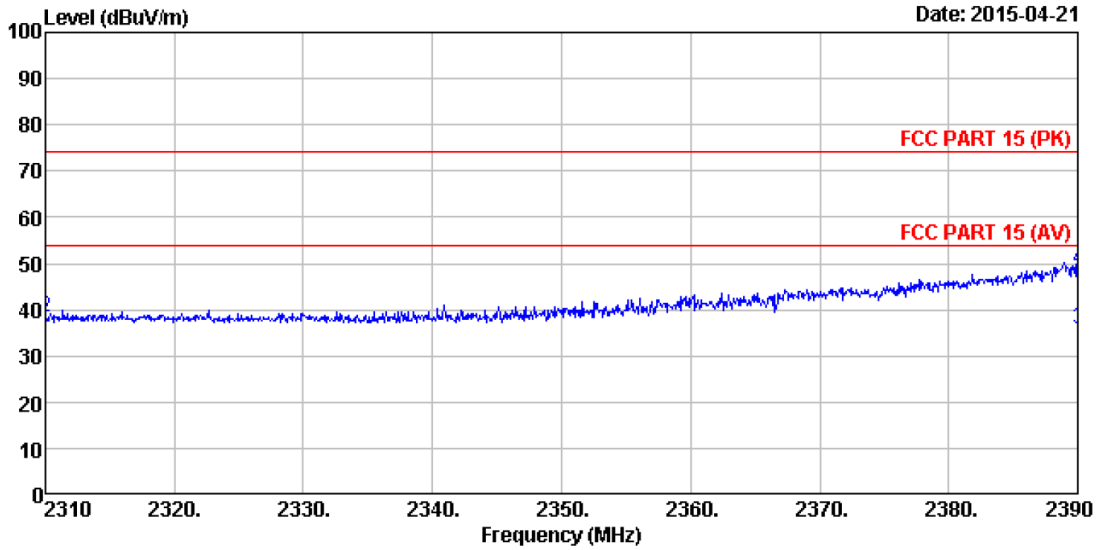


```

Site       : 3m chamber
Condition  : FCC PART 15 (PK) 3m BBHA9120D ANT(>1GHz) VERTICAL
            : ANSI C63.4:2009
EUT        : RC Toy (2.4GHz)
Model No.  : K100
Sample No. : TBA
TUV Order No: TBA
Test Mode  : TX on
            : 2405MHz
    
```

	Read	Antenna	Cable	Preamp	Limit	Over		
Freq	Level	Factor	Loss	Factor	Line	Limit	Remark	
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2310.000	28.39	27.91	5.30	34.11	27.49	54.00	-26.51 Average
2	2310.000	39.37	27.91	5.30	34.11	38.47	74.00	-35.53 Peak
3	2390.000	36.82	27.59	5.38	34.01	35.78	54.00	-18.22 Average
4	2390.000	49.74	27.59	5.38	34.01	48.70	74.00	-25.30 Peak

Vertical polarization

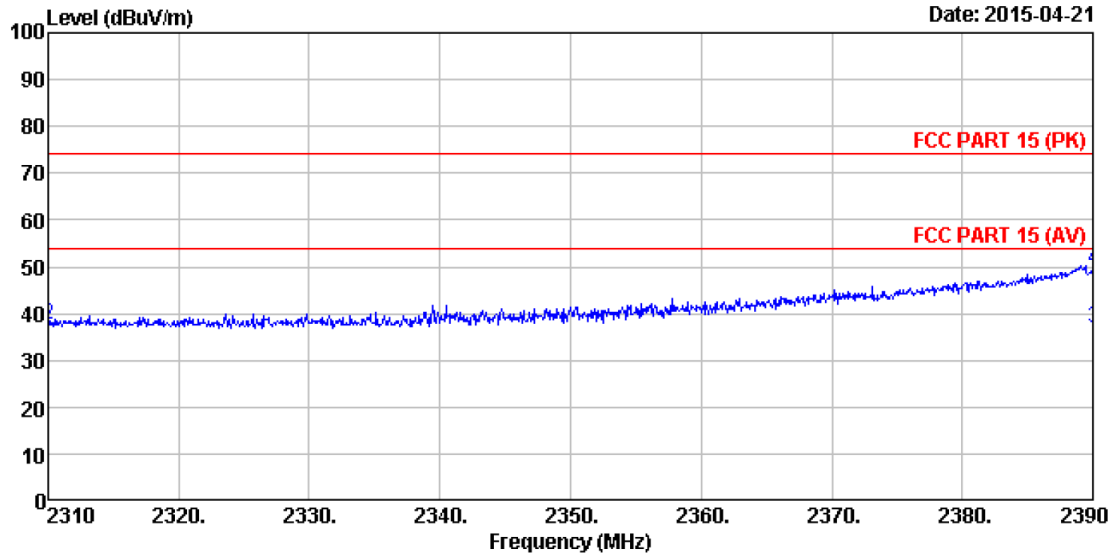


Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120D ANT(>1GHZ) HORIZONTAL
 : ANSI C63.4:2009
 EUT : RC Toy (2.4GHz)
 Model No. : K100
 Sample No. : TBA
 TUV Order No: TBA
 Test Mode : TX on
 : 2405MHz

	Read	Antenna	Cable	Preamp	Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2310.000	27.58	27.91	5.30	34.11	26.68	54.00	-27.32 Average
2	2310.000	38.61	27.91	5.30	34.11	37.71	74.00	-36.29 Peak
3	2390.000	37.99	27.59	5.38	34.01	36.95	54.00	-17.05 Average
4	2390.000	50.51	27.59	5.38	34.01	49.47	74.00	-24.53 Peak

Horizontal polarization


Tx frequency: 2475MHz (radiated measurement)

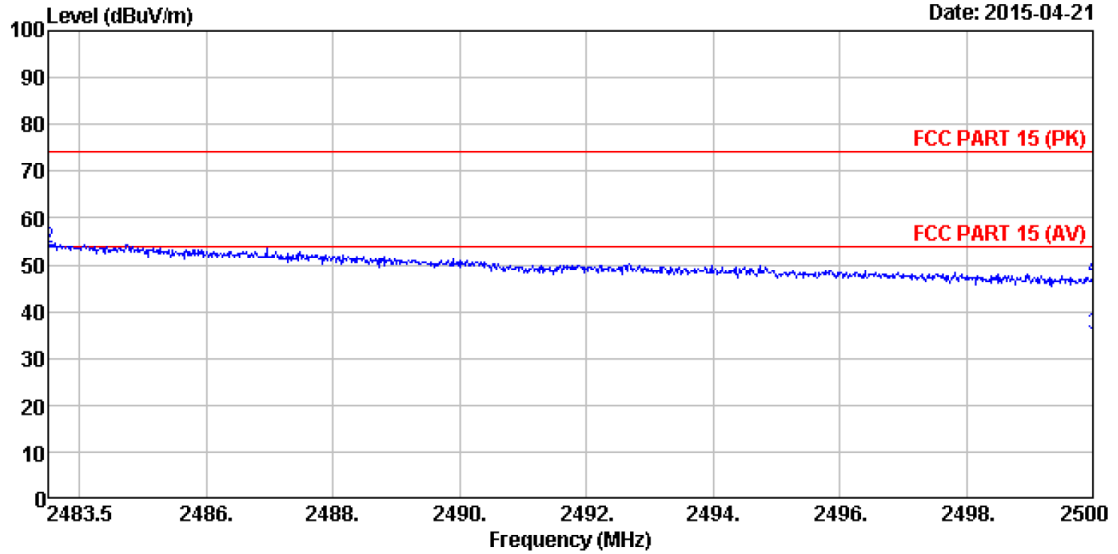

Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120D ANT(>1GHZ) VERTICAL
 : ANSI C63.4:2009
 EUT : RC Toy (2.4GHz)
 Model No. : K100
 Sample No. : TBA
 TUV Order No: TBA
 Test Mode : TX on
 : 2475MHz

	ReadAntenna	Cable Preamp	Limit	Over					
Freq	Level	Factor	Loss	Factor	Level				
MHz	dBuV	dB/m	dB	dB	dBuV/m				
1	2483.500	40.55	27.53	5.47	33.92	39.63	54.00	-14.37	Average
2	2483.500	54.35	27.53	5.47	33.92	53.43	74.00	-20.57	Peak
3	2500.000	35.84	27.55	5.49	33.90	34.98	54.00	-19.02	Average
4	2500.000	47.56	27.55	5.49	33.90	46.70	74.00	-27.30	Peak

Vertical polarization

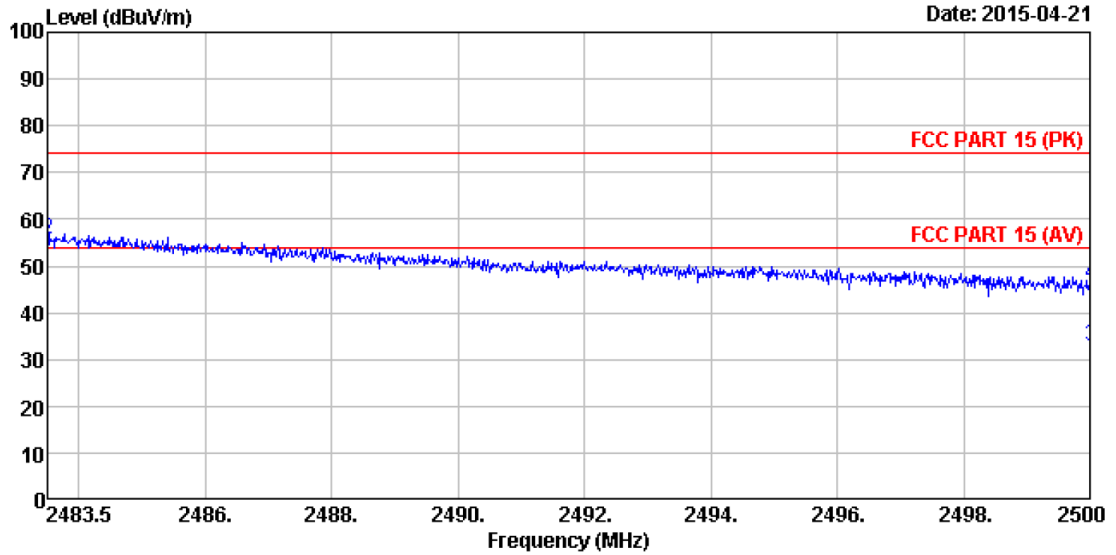

Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120D ANT(>1GHZ) HORIZONTAL
 : ANSI C63.4:2009
 EUT : RC Toy (2.4GHz)
 Model No. : K100
 Sample No. : TBA
 TUV Order No: TBA
 Test Mode : TX on
 : 2475MHz

	Read	Antenna	Cable	Preamp	Limit	Over	
Freq	Level	Factor	Loss	Factor	Level	Line	Limit Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2483.500	42.06	27.53	5.47	33.92	41.14	54.00 -12.86 Average
2	2483.500	56.68	27.53	5.47	33.92	55.76	74.00 -18.24 Peak
3	2500.000	33.82	27.55	5.49	33.90	32.96	54.00 -21.04 Average
4	2500.000	46.85	27.55	5.49	33.90	45.99	74.00 -28.01 Peak

Horizontal polarization