

P01 WCDMA II_RMC12.2K_Rear Face_0cm_Ch9538_P-Sensor_on

DUT: ES170417027

Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: B1900_0829 Medium parameters used: $f = 1908$ MHz; $\sigma = 1.536$ S/m; $\epsilon_r = 53.651$; $\rho =$

1000 kg/m^3

Ambient Temperature : 23.4°C ; Liquid Temperature : 22.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3970; ConvF(8.17, 8.17, 8.17); Calibrated: 2016/09/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1418; Calibrated: 2016/09/05
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

- **Area Scan (151x211x1):** Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.20 W/kg


- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 1.641 V/m ; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.73 W/kg

SAR(1 g) = 0.908 W/kg ; SAR(10 g) = 0.429 W/kg

Maximum value of SAR (measured) = 1.35 W/kg

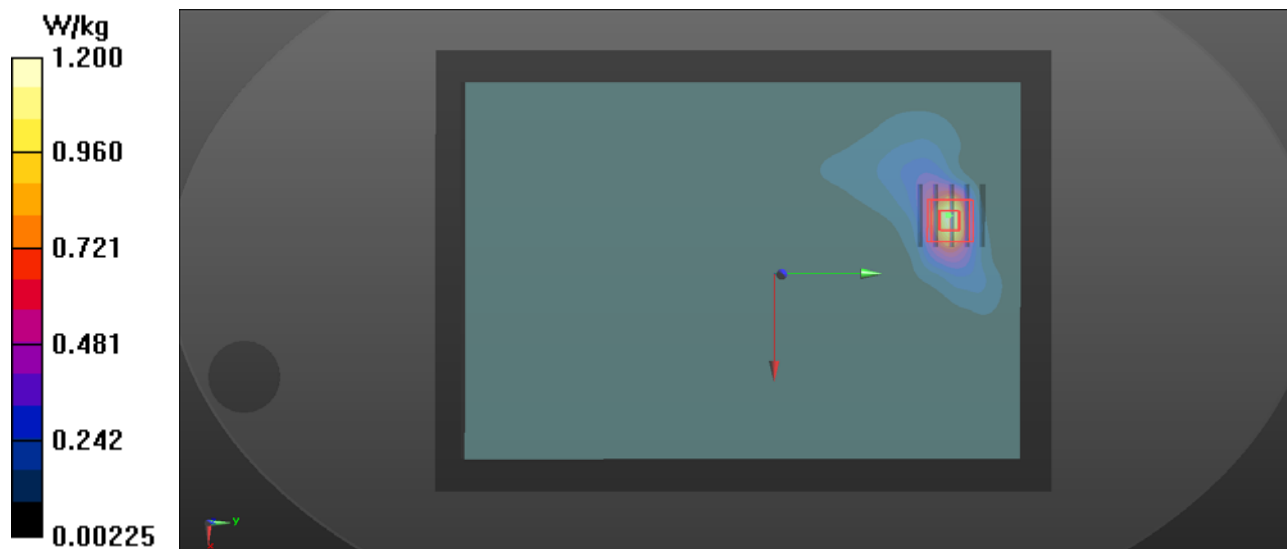

P02 WCDMA IV_RMC12.2K_Rear Face_0cm_Ch1413_P-Sensor_on

DUT: ES170417027

Communication System: WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium: B1750_0828 Medium parameters used: $f = 1733$ MHz; $\sigma = 1.502$ S/m; $\epsilon_r = 54.605$; $\rho =$

1000 kg/m^3

Ambient Temperature : 23.4°C ; Liquid Temperature : 22.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3970; ConvF(8.17, 8.17, 8.17); Calibrated: 2016/09/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1418; Calibrated: 2016/09/05
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

- **Area Scan (151x211x1):** Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.01 W/kg


- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.413 V/m ; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.16 W/kg

SAR(1 g) = 0.699 W/kg ; SAR(10 g) = 0.386 W/kg

Maximum value of SAR (measured) = 1.01 W/kg

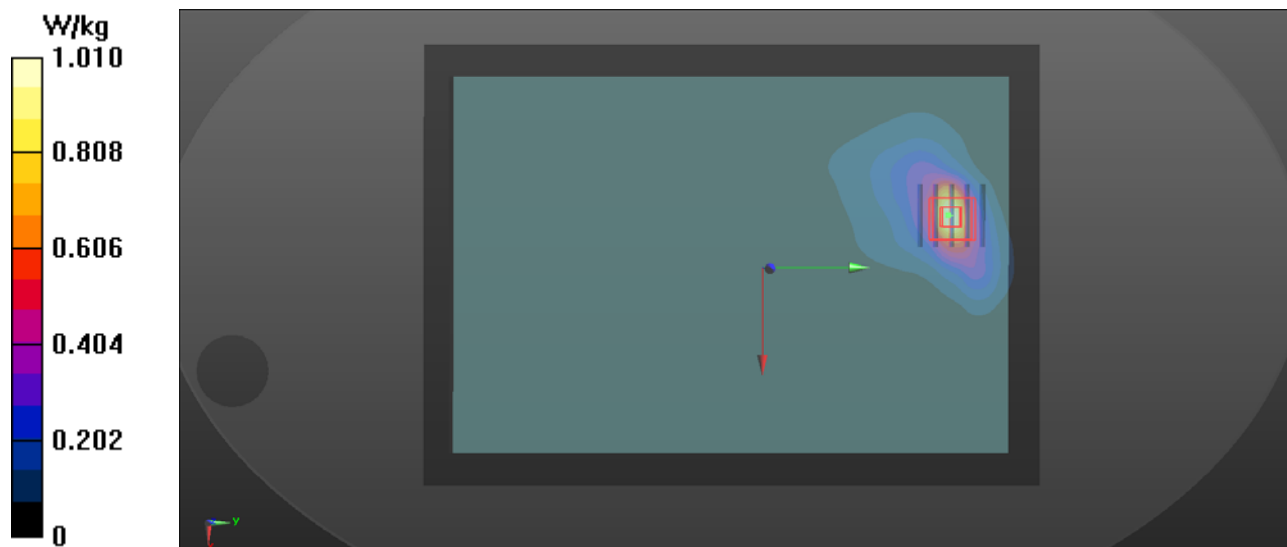

P03 WCDMA V_RMC12.2K_Left Side_1cm_Ch4233_P-Sensor_off

DUT: ES170417027

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: B835_0830 Medium parameters used: $f = 847$ MHz; $\sigma = 1.011$ S/m; $\epsilon_r = 55.118$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3970; ConvF(9.94, 9.94, 9.94); Calibrated: 2016/09/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1418; Calibrated: 2016/09/05
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

- Area Scan (61x151x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.314 W/kg


- Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.589 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.357 W/kg

SAR(1 g) = 0.235 W/kg; SAR(10 g) = 0.157 W/kg

Maximum value of SAR (measured) = 0.315 W/kg

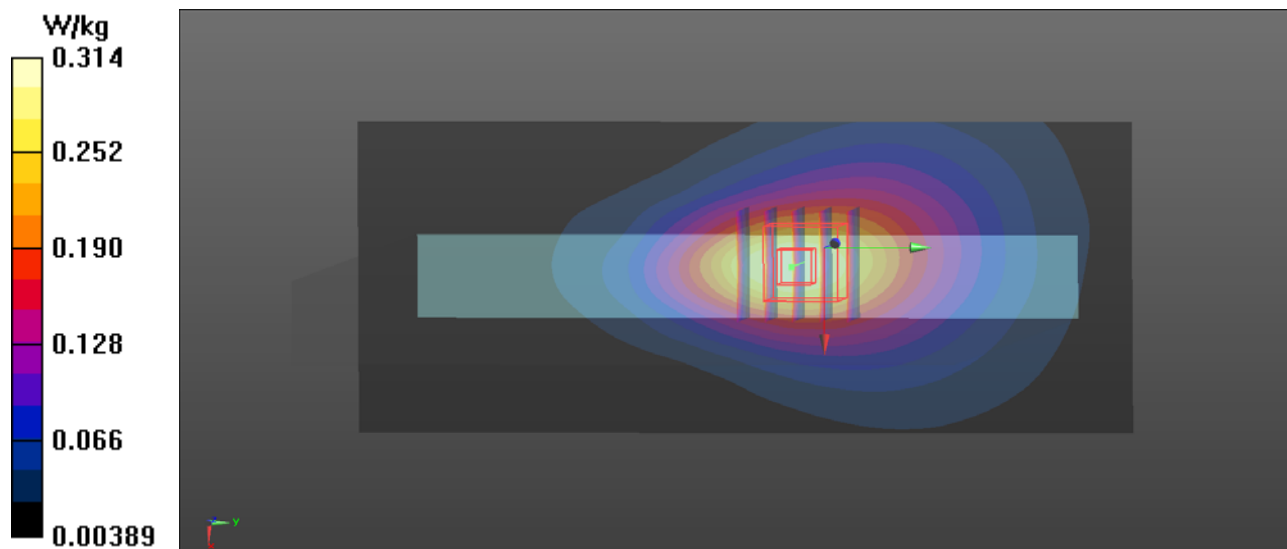

P04 LTE 4_QPSK20M_Rear Face_0cm_Ch20175_1RB_OS0_P-Sensor_on

DUT: ES170417027

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: B1750_0828 Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.501$ S/m; $\epsilon_r = 54.608$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3970; ConvF(8.17, 8.17, 8.17); Calibrated: 2016/09/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1418; Calibrated: 2016/09/05
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

- Area Scan (151x211x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.850 W/kg


- Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.690 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.08 W/kg

SAR(1 g) = 0.666 W/kg; SAR(10 g) = 0.369 W/kg

Maximum value of SAR (measured) = 0.941 W/kg

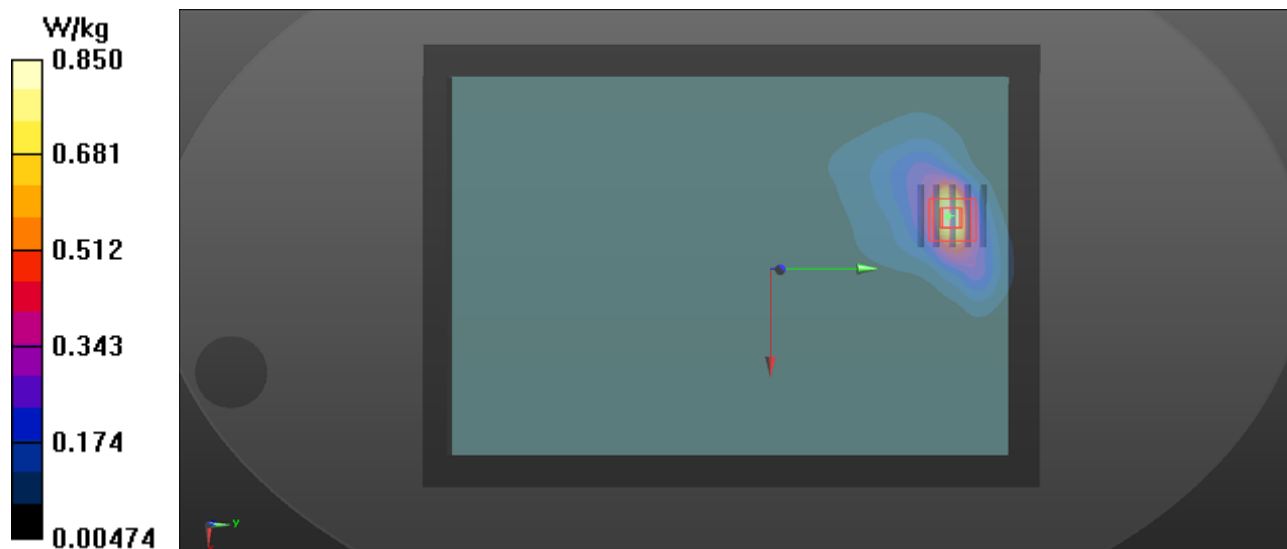

P05 LTE 5_QPSK10M_Left Side_1cm_Ch20525_1RB_OS0_P-Sensor_off

DUT: ES170417027

Communication System: LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: B835_0830 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.998$ S/m; $\epsilon_r = 55.193$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3970; ConvF(9.94, 9.94, 9.94); Calibrated: 2016/09/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1418; Calibrated: 2016/09/05
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

- Area Scan (61x151x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.337 W/kg



- Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.685 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.382 W/kg

SAR(1 g) = 0.257 W/kg; SAR(10 g) = 0.173 W/kg

Maximum value of SAR (measured) = 0.336 W/kg

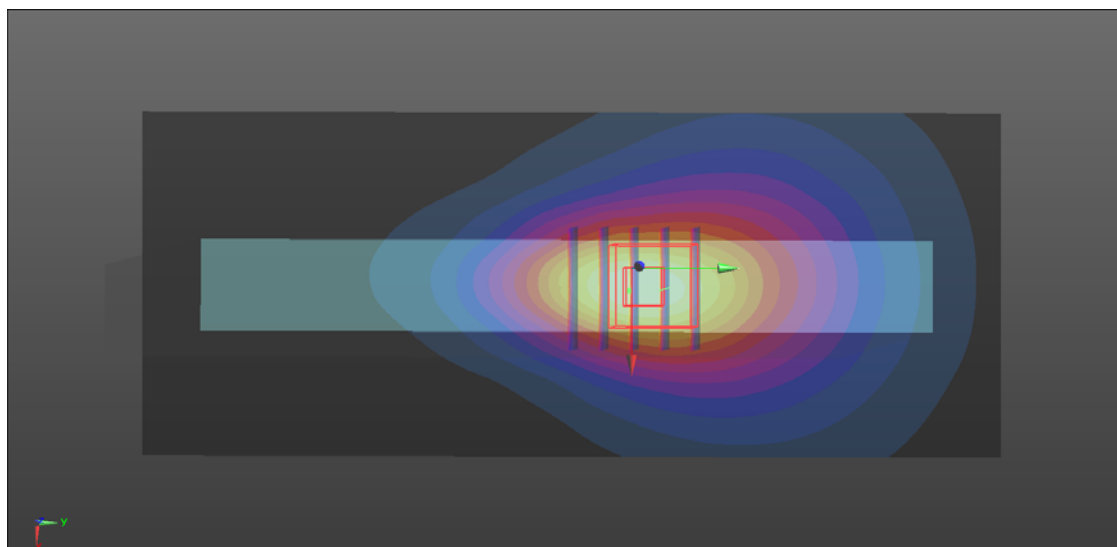

P06 LTE 7_QPSK20M_Left Side_1cm_Ch21100_1RB_OS0_P-Sensor_off

DUT: ES170417027

Communication System: LTE; Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: B2600_0901 Medium parameters used: $f = 2535$ MHz; $\sigma = 2.113$ S/m; $\epsilon_r = 52.64$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3970; ConvF(7.57, 7.57, 7.57); Calibrated: 2016/09/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1418; Calibrated: 2016/09/05
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

- Area Scan (81x191x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.18 W/kg


- Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.892 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.37 W/kg

SAR(1 g) = 0.722 W/kg; SAR(10 g) = 0.382 W/kg

Maximum value of SAR (measured) = 1.10 W/kg

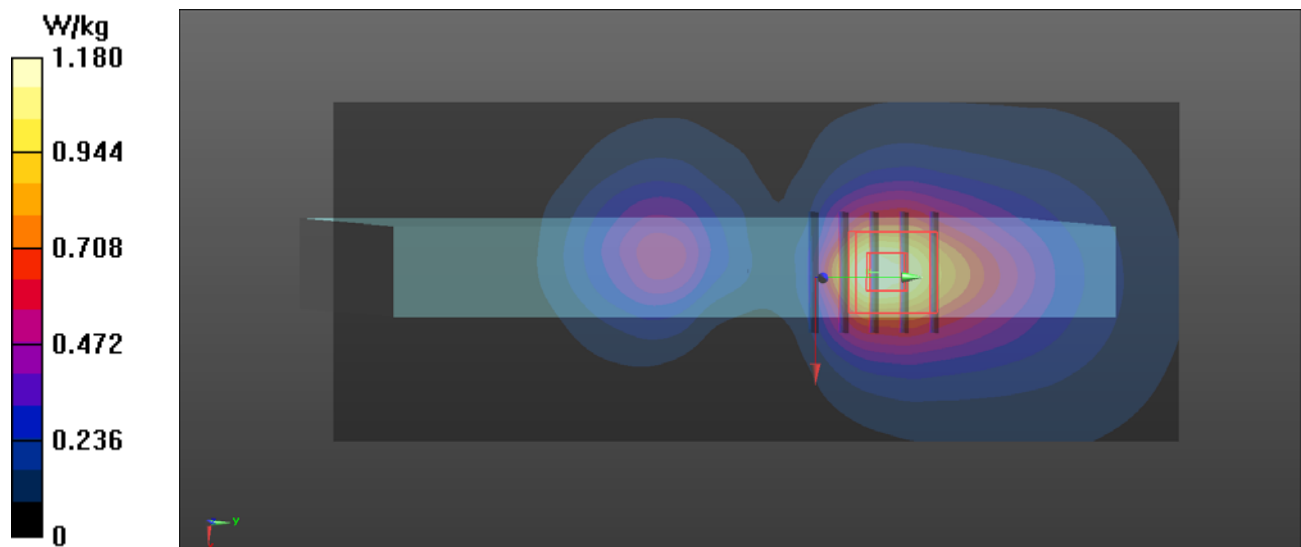

P07 LTE 12_QPSK10M_Rear Face_0cm_Ch23095_1RB_OS0_P-Sensor_on

DUT: ES170417027

Communication System: LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: B750_0831 Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.93$ S/m; $\epsilon_r = 55.608$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3970; ConvF(10.05, 10.05, 10.05); Calibrated: 2016/09/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1418; Calibrated: 2016/09/05
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

- **Area Scan (151x211x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.196 W/kg


- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.506 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.226 W/kg

SAR(1 g) = 0.156 W/kg; SAR(10 g) = 0.106 W/kg

Maximum value of SAR (measured) = 0.200 W/kg

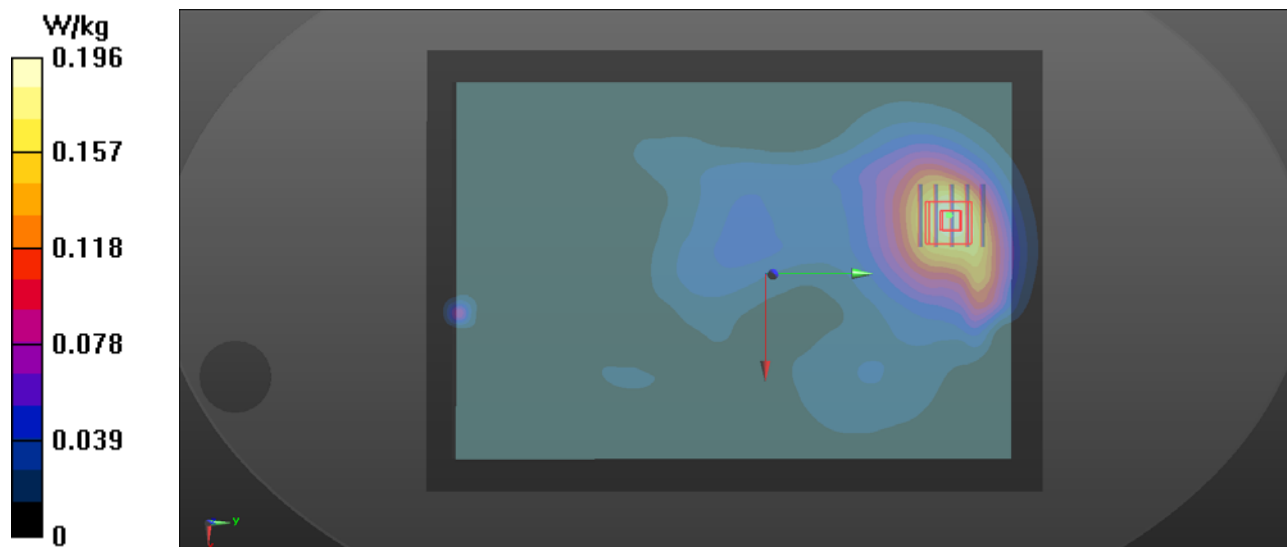

P08 LTE 13_QPSK10M_Left Side_1cm_Ch23230_1RB_OS0_P-Sensor_off

DUT: ES170417027

Communication System: LTE; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: B750_0831 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.993 \text{ S/m}$; $\epsilon_r = 54.945$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3970; ConvF(10.05, 10.05, 10.05); Calibrated: 2016/09/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1418; Calibrated: 2016/09/05
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

- **Area Scan (61x151x1):** Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.294 W/kg


- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 14.403 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.334 W/kg

SAR(1 g) = 0.224 W/kg; SAR(10 g) = 0.152 W/kg

Maximum value of SAR (measured) = 0.295 W/kg

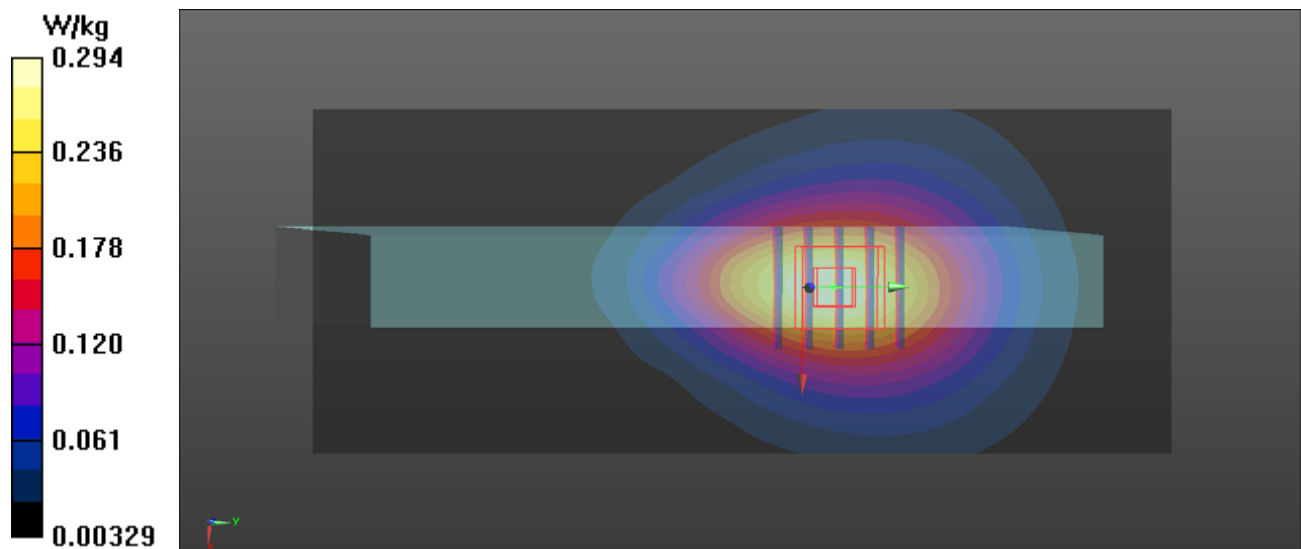

P09 LTE 25_QPSK20M_Rear Face_0cm_Ch26590_1RB_OS0_P-Sensor_on

DUT: ES170417027

Communication System: LTE; Frequency: 1905 MHz; Duty Cycle: 1:1

Medium: B1900_0829 Medium parameters used: $f = 1905$ MHz; $\sigma = 1.532$ S/m; $\epsilon_r = 53.662$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3970; ConvF(8.17, 8.17, 8.17); Calibrated: 2016/09/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1418; Calibrated: 2016/09/05
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

- **Area Scan (151x211x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.37 W/kg


- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.063 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 1.87 W/kg

SAR(1 g) = 0.987 W/kg; SAR(10 g) = 0.467 W/kg

Maximum value of SAR (measured) = 1.50 W/kg

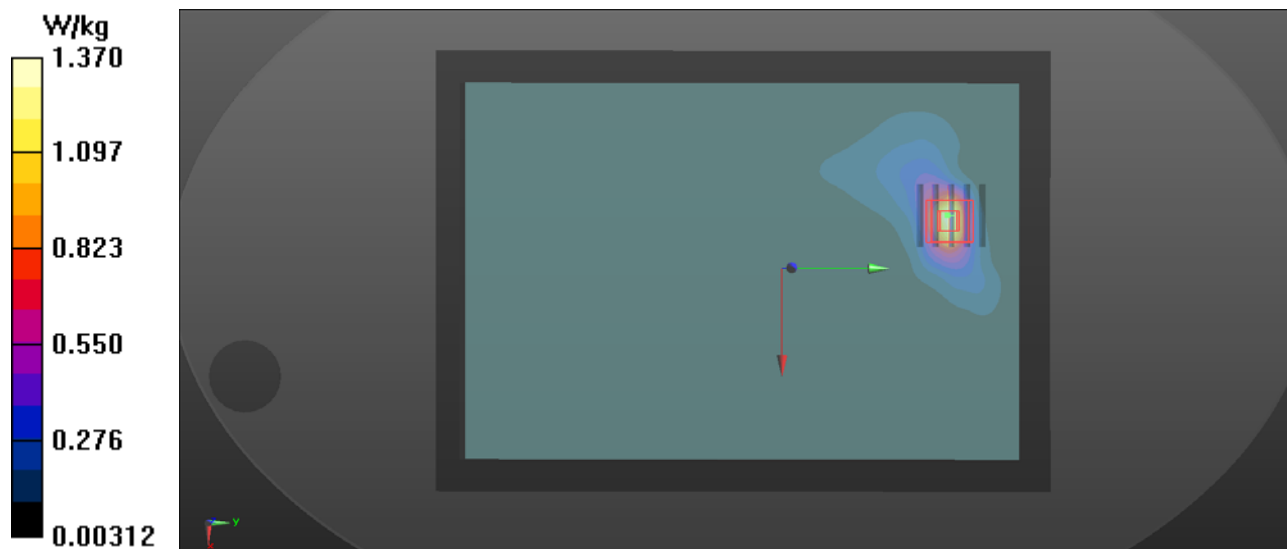

P10 LTE 26_QPSK15M_Left Side_1cm_Ch26915_1RB_OS0_P-Sensor_off

DUT: ES170417027

Communication System: LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: B835_0830 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.998$ S/m; $\epsilon_r = 55.193$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3970; ConvF(9.94, 9.94, 9.94); Calibrated: 2016/09/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1418; Calibrated: 2016/09/05
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

- **Area Scan (61x151x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.368 W/kg


- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.974 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.406 W/kg

SAR(1 g) = 0.275 W/kg; SAR(10 g) = 0.188 W/kg

Maximum value of SAR (measured) = 0.359 W/kg

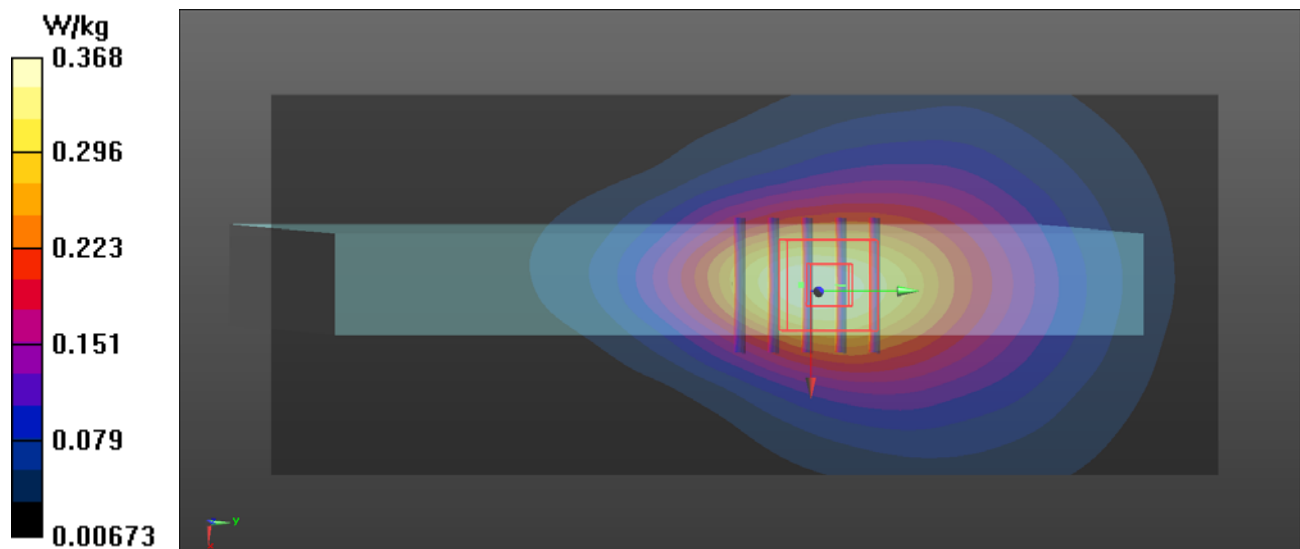

P11 LTE 30_QPSK10M_Left Side_1cm_Ch27710_1RB_OS0_P-Sensor_off

DUT: ES170417027

Communication System: LTE; Frequency: 2310 MHz;Duty Cycle: 1:1

Medium: B2300_0823 Medium parameters used: $f = 2310$ MHz; $\sigma = 1.812$ S/m; $\epsilon_r = 52.616$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3970; ConvF(7.9, 7.9, 7.9); Calibrated: 2016/09/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1418; Calibrated: 2016/09/05
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

- **Area Scan (81x191x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.710 W/kg


- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.049 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.780 W/kg

SAR(1 g) = 0.377 W/kg; SAR(10 g) = 0.193 W/kg

Maximum value of SAR (measured) = 0.527 W/kg

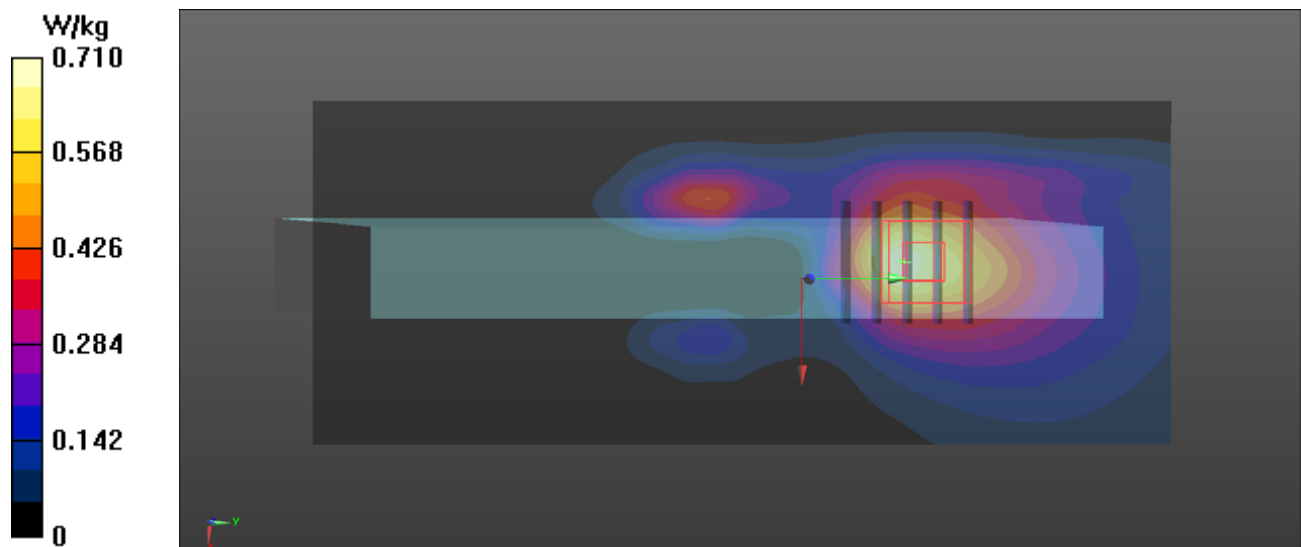

P12 LTE 41_QPSK20M_Left Side_1cm_Ch41490_1RB_OS0_P-Sensor_off

DUT: ES170417027

Communication System: LTE; Frequency: 2680 MHz; Duty Cycle: 1:1.58

Medium: B2600_0901 Medium parameters used: $f = 2680$ MHz; $\sigma = 2.308$ S/m; $\epsilon_r = 52.182$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3970; ConvF(7.41, 7.41, 7.41); Calibrated: 2016/09/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1418; Calibrated: 2016/09/05
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

- **Area Scan (81x191x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.282 W/kg


- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.867 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.337 W/kg

SAR(1 g) = 0.169 W/kg; SAR(10 g) = 0.087 W/kg

Maximum value of SAR (measured) = 0.266 W/kg

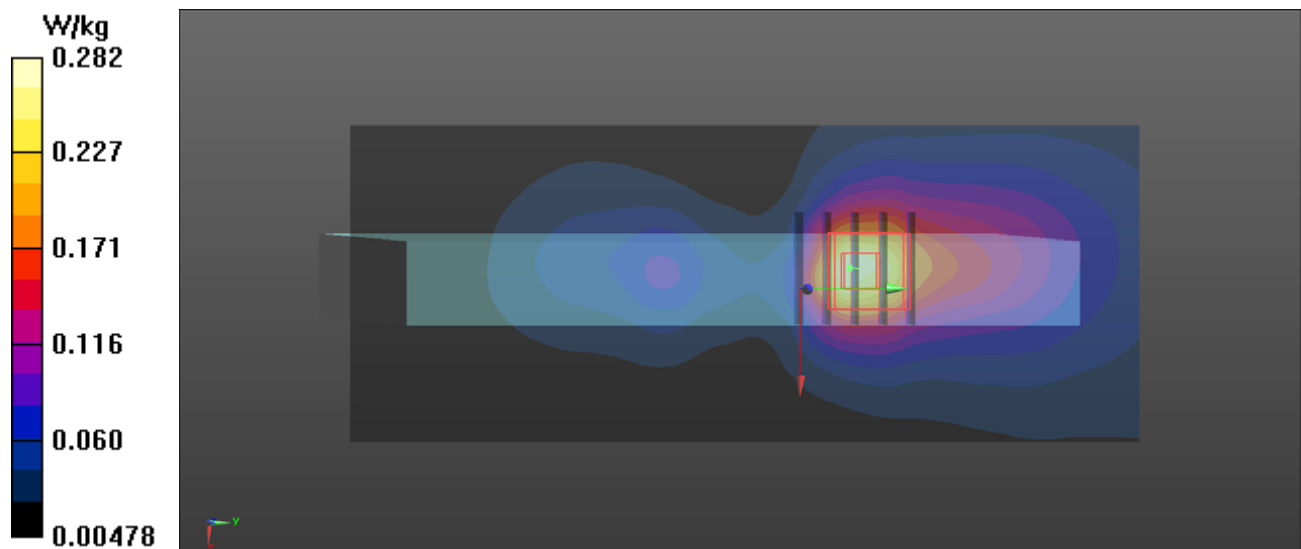

P13 802.11b_Rear Face_0cm_Ch11_Antenna-0

DUT: ES170417027

Communication System: 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: B2450_0823 Medium parameters used: $f = 2462$ MHz; $\sigma = 2.044$ S/m; $\epsilon_r = 52.919$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3970; ConvF(7.57, 7.57, 7.57); Calibrated: 2016/09/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1418; Calibrated: 2016/09/05
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

- **Area Scan (191x261x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.958 W/kg


- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.396 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.50 W/kg

SAR(1 g) = 0.697 W/kg; SAR(10 g) = 0.326 W/kg

Maximum value of SAR (measured) = 1.21 W/kg

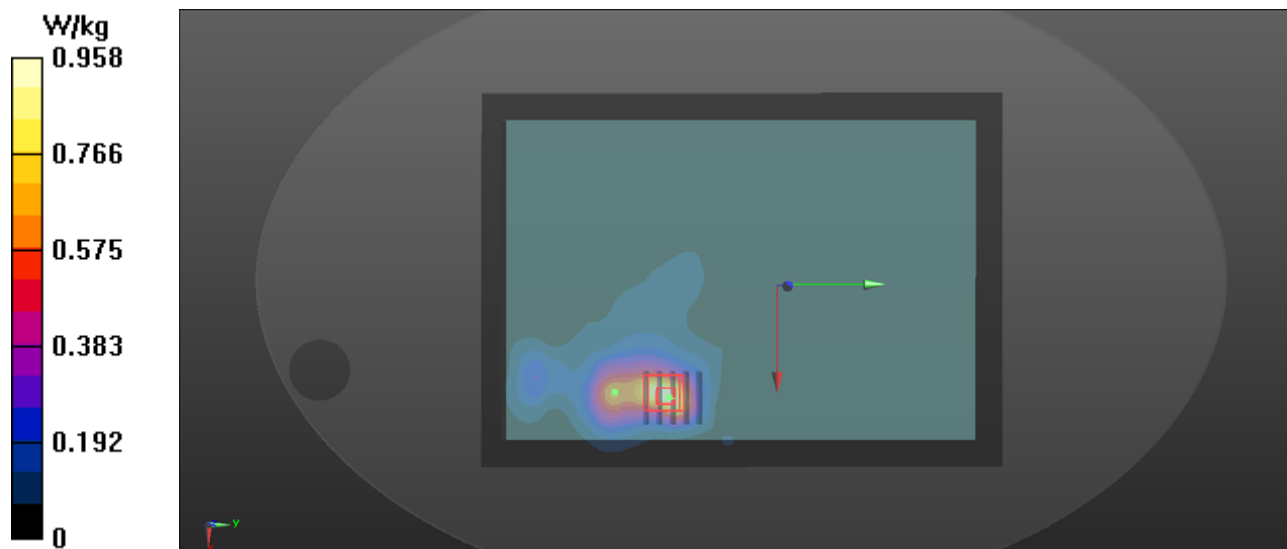

P14 802.11a_Rear Face_0cm_Ch60_Antenna-0

DUT: ES170417027

Communication System: 802.11a; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium: B5G_0822 Medium parameters used: $f = 5300$ MHz; $\sigma = 5.31$ S/m; $\epsilon_r = 50.859$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.9 °C ; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3970; ConvF(4.75, 4.75, 4.75); Calibrated: 2016/09/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1418; Calibrated: 2016/09/05
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

- Area Scan (231x321x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.99 W/kg


- Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.941 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 4.21 W/kg

SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.332 W/kg

Maximum value of SAR (measured) = 2.13 W/kg

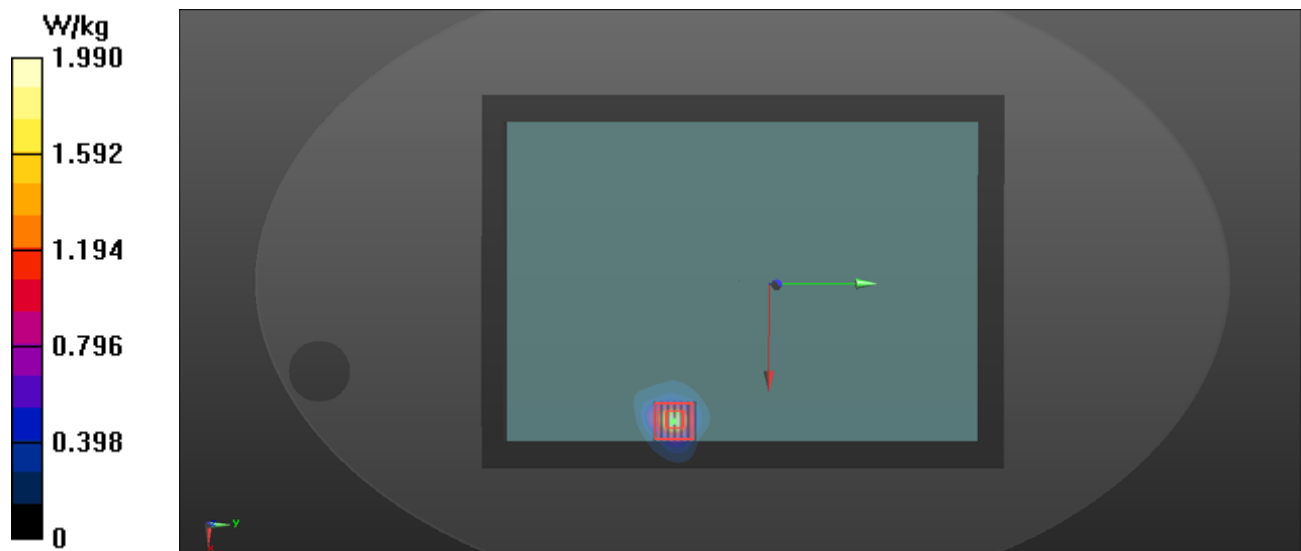

P15 802.11a_Rear Face_0cm_Ch140_Antenna-0

DUT: ES170417027

Communication System: 802.11a; Frequency: 5700 MHz; Duty Cycle: 1:1

Medium: B5G_0822 Medium parameters used: $f = 5700$ MHz; $\sigma = 5.97$ S/m; $\epsilon_r = 50.055$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.9 °C ; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3970; ConvF(4.22, 4.22, 4.22); Calibrated: 2016/09/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1418; Calibrated: 2016/09/05
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

- Area Scan (231x321x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.82 W/kg


- Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.935 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 3.44 W/kg

SAR(1 g) = 0.782 W/kg; SAR(10 g) = 0.254 W/kg

Maximum value of SAR (measured) = 1.92 W/kg

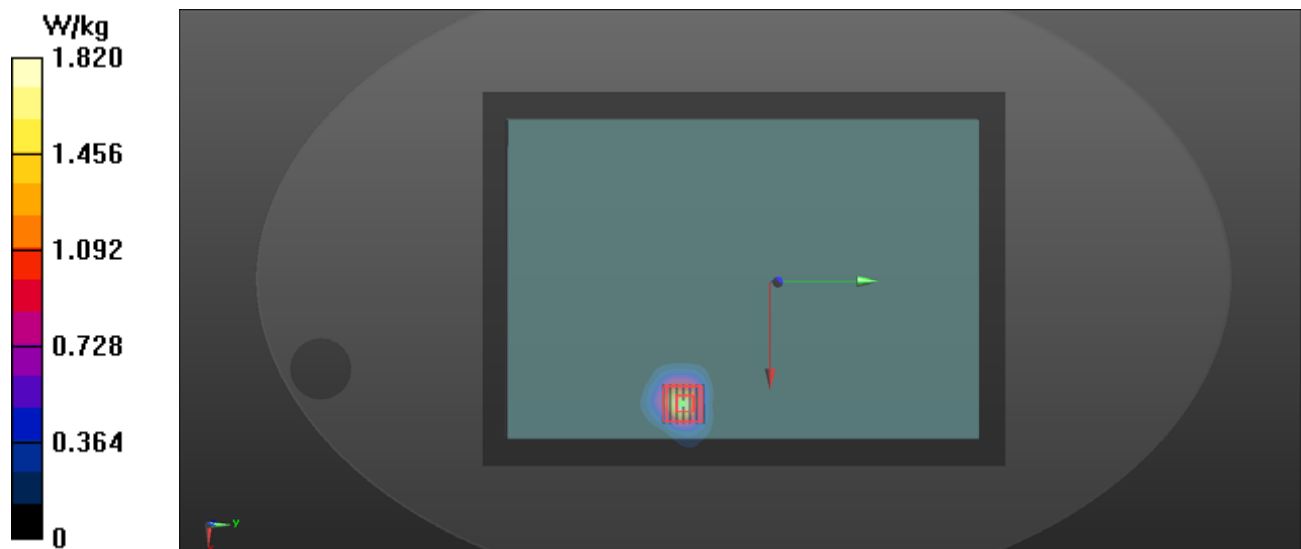

P16 802.11a_Rear Face_0cm_Ch149_Antenna-0

DUT: ES170417027

Communication System: 802.11a; Frequency: 5745 MHz; Duty Cycle: 1:1

Medium: B5G_0822 Medium parameters used: $f = 5745$ MHz; $\sigma = 6.035$ S/m; $\epsilon_r = 49.976$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.9 °C ; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3970; ConvF(4.34, 4.34, 4.34); Calibrated: 2016/09/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1418; Calibrated: 2016/09/05
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

- Area Scan (231x321x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.73 W/kg

- Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.263 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 3.37 W/kg

SAR(1 g) = 0.756 W/kg; SAR(10 g) = 0.251 W/kg

Maximum value of SAR (measured) = 1.71 W/kg

