

System Check_H750


DUT: Dipole 750 MHz;Type:D750V3; SN:1078

Communication System: CW; Frequency: 750 MHz;Duty Cycle: 1:1
Medium: H750 Medium parameters used (extrapolated): $f = 750\text{ MHz}$; $\sigma = 0.891\text{ S/m}$; $\epsilon_r = 41.664$; $\rho = 1000\text{ kg/m}^3$
Ambient Temperature : $22.3\text{ }^{\circ}\text{C}$; Liquid Temperature : $22.1\text{ }^{\circ}\text{C}$

- DASY5 Configuration:
- Probe: EX3DV4 - SN3970; ConvF(10.3, 10.3, 10.3); Calibrated: 2022/4/18;
 - Sensor-Surface: 1.4mm (Mechanical Surface Detection)
 - Electronics: DAE4 Sn1418; Calibrated: 2022/3/24
 - Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
 - Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Pin=250mW/Area Scan (51x91x1): Interpolated grid: $dx=2.000\text{ mm}$, $dy=2.000\text{ mm}$ Maximum value of SAR (interpolated) = 4.01 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 63.550 V/m ; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 4.68 W/kg
SAR(1 g) = 2.05 W/kg ; SAR(10 g) = 1.36 W/kg
Maximum value of SAR (measured) = 4.13 W/kg

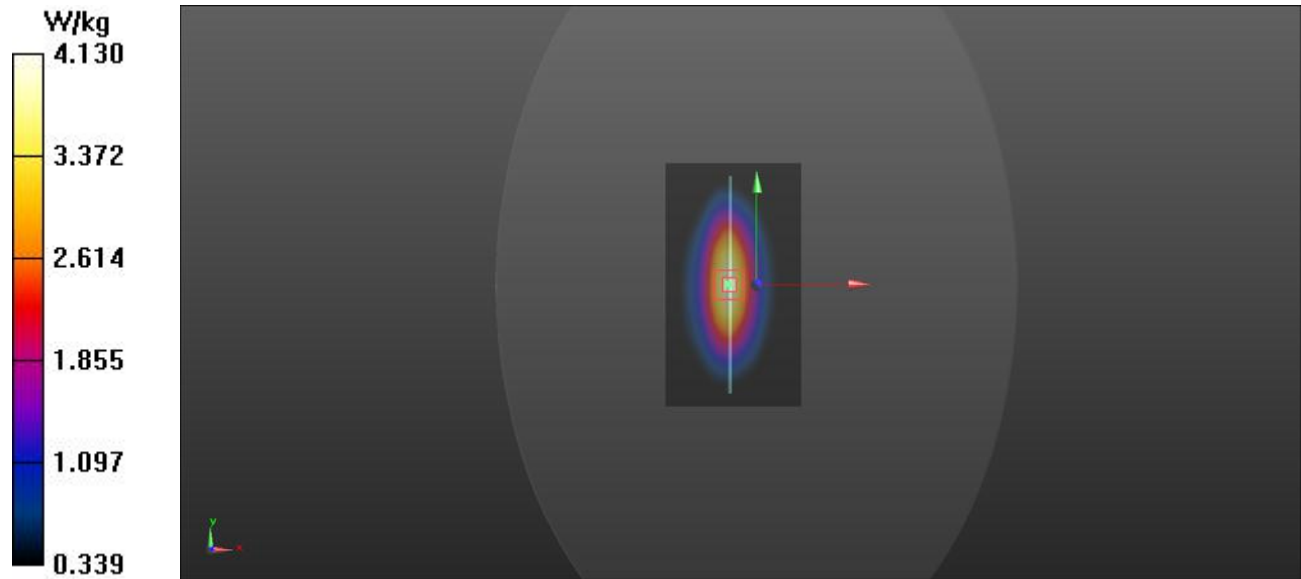

System Check_H835

DUT: Dipole 835 MHz;Type:D835V2; SN:4d029

Communication System: CW; Frequency: 835 MHz;Duty Cycle: 1:1

Medium: H835 Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.885 \text{ S/m}$; $\epsilon_r = 41.988$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 22.1°C ; Liquid Temperature : 21.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3970; ConvF(10.3, 10.3, 10.3); Calibrated: 2022/4/18;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1418; Calibrated: 2022/3/24
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Pin=250mW/Area Scan (51x91x1): Interpolated grid: $dx=2.000 \text{ mm}$, $dy=2.000 \text{ mm}$

Maximum value of SAR (interpolated) = 3.76 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 63.550 V/m ; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 4.38 W/kg

SAR(1 g) = 2.39 W/kg ; SAR(10 g) = 1.55 W/kg

Maximum value of SAR (measured) = 3.87 W/kg

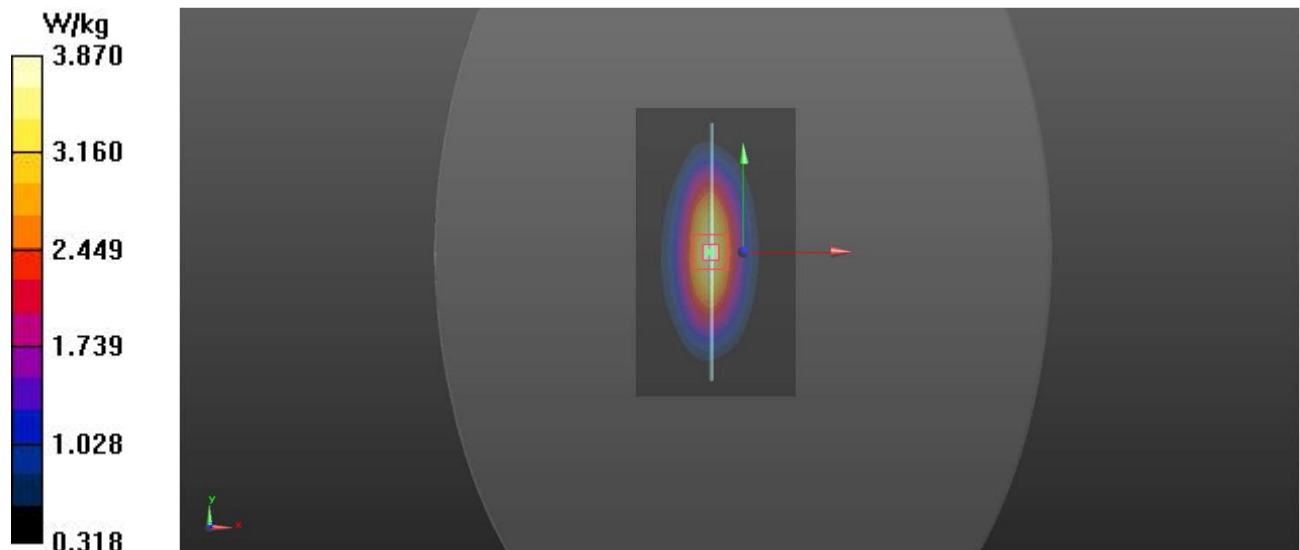

System Check_H1750

DUT: Dipole 1750 MHz;Type:D1750V2; SN:1023

Communication System: CW; Frequency: 1750 MHz;Duty Cycle: 1:1

Medium: H1750 Medium parameters used: $f = 1750 \text{ MHz}$; $\sigma = 1.346 \text{ S/m}$; $\epsilon_r = 39.504$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 21.5°C ; Liquid Temperature : 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3970; ConvF(8.8, 8.8, 8.8); Calibrated: 2022/4/18;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1418; Calibrated: 2022/3/24
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: $dx=2.000 \text{ mm}$, $dy=2.000 \text{ mm}$

Maximum value of SAR (interpolated) = 16.8 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 108.7 V/m ; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 20.5 W/kg

SAR(1 g) = 9.19 W/kg ; SAR(10 g) = 4.85 W/kg

Maximum value of SAR (measured) = 17.6 W/kg

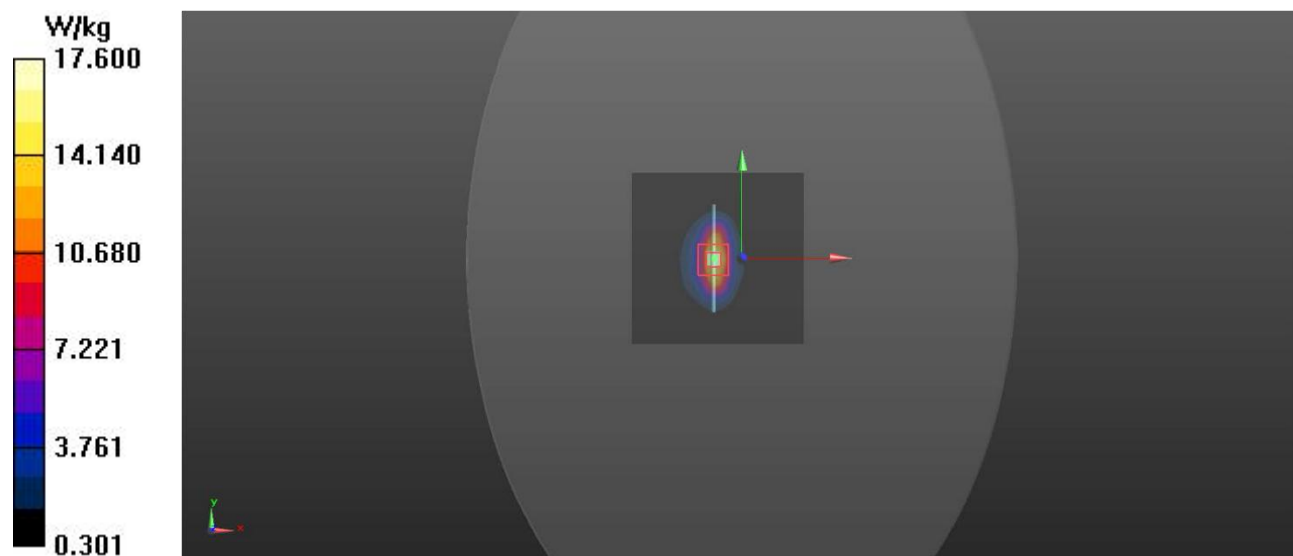

System Check_H1950


DUT: Dipole 1950 MHz;Type:D1950V3;SN:1151

Communication System: CW; Frequency: 1950 MHz;Duty Cycle: 1:1
Medium: H1950 Medium parameters used: $f = 1950\text{ MHz}$; $\sigma = 1.41\text{ S/m}$; $\epsilon_r = 39.7$; $\rho = 1000\text{ kg/m}^3$
Ambient Temperature : $21.4\text{ }^\circ\text{C}$; Liquid Temperature : $21.2\text{ }^\circ\text{C}$

- DASY5 Configuration:
- Probe: EX3DV4 - SN3970; ConvF(8.5, 8.5, 8.5); Calibrated: 2022/4/18;
 - Sensor-Surface: 2mm (Mechanical Surface Detection)
 - Electronics: DAE4 Sn1418; Calibrated: 2022/3/24
 - Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
 - Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Pin=250mW/Area Scan (61x71x1): Interpolated grid: $dx=1.500\text{ mm}$, $dy=1.500\text{ mm}$ Maximum value of SAR (interpolated) = 20.4 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 112.8 V/m ; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 23.9 W/kg
SAR(1 g) = 10.11 W/kg ; SAR(10 g) = 5.17 W/kg
Maximum value of SAR (measured) = 19.1 W/kg

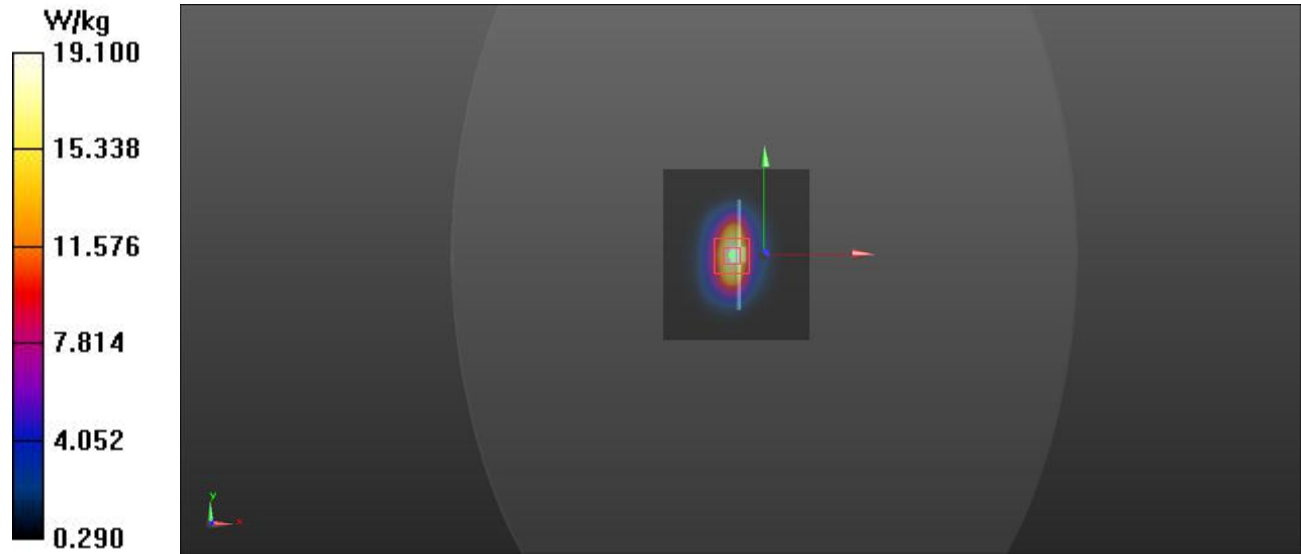

System Check_H2450


DUT: Dipole 2450 MHz; Type:D2450V2; SN:927

Communication System: CW; Frequency: 2450 MHz;Duty Cycle: 1:1
Medium: H2450 Medium parameters used: $f = 2450\text{ MHz}$; $\sigma = 1.79\text{ S/m}$; $\epsilon_r = 40.105$; $\rho = 1000\text{ kg/m}^3$
Ambient Temperature : $21.7\text{ }^\circ\text{C}$; Liquid Temperature : $21.5\text{ }^\circ\text{C}$

- DASY5 Configuration:
- Probe: EX3DV4 - SN3970; ConvF(8.06, 8.06, 8.06); Calibrated: 2022/4/18;
 - Sensor-Surface: 2mm (Mechanical Surface Detection)
 - Electronics: DAE4 Sn1418; Calibrated: 2022/3/24
 - Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
 - Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Pin=250mW/Area Scan (41x51x1): Interpolated grid: $dx=2.000\text{ mm}$, $dy=2.000\text{ mm}$
Maximum value of SAR (interpolated) = 25.4 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 114.7 V/m ; Power Drift = 0.10 dB
Peak SAR (extrapolated) = 30.4 W/kg
SAR(1 g) = 13.01 W/kg ; SAR(10 g) = 6.09 W/kg
Maximum value of SAR (measured) = 23.0 W/kg

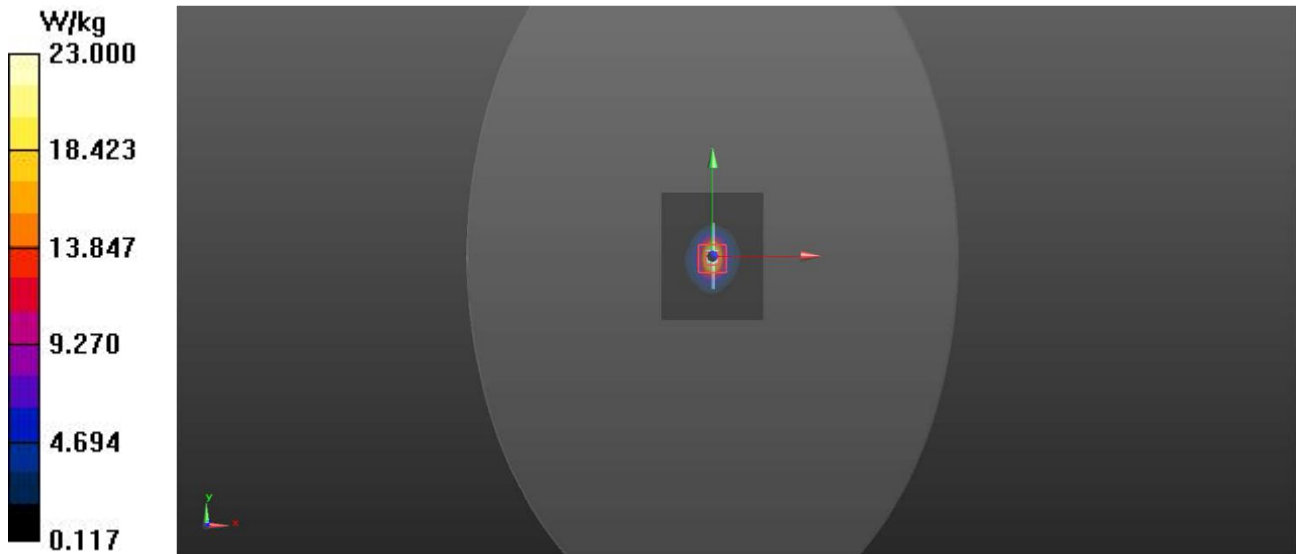

System Check_H2600

DUT: Dipole 2600 MHz; Type:D2600V2; SN:1058

Communication System: CW; Frequency: 2600 MHz;Duty Cycle: 1:1

Medium: H2600 Medium parameters used: $f = 2600$ MHz; $\sigma = 2.053$ S/m; $\epsilon_r = 38.007$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.2 °C; Liquid Temperature : 22.0 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3970; ConvF(8.06, 8.06, 8.06); Calibrated: 2022/4/18;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1418; Calibrated: 2022/3/24
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Pin=250mW/Area Scan (41x51x1): Interpolated grid: dx=2.000 mm, dy=2.000 mm

Maximum value of SAR (interpolated) = 32.7 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 117.4 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 36.4 W/kg

SAR(1 g) = 14.21 W/kg; SAR(10 g) = 6.35 W/kg

Maximum value of SAR (measured) = 29.6 W/kg

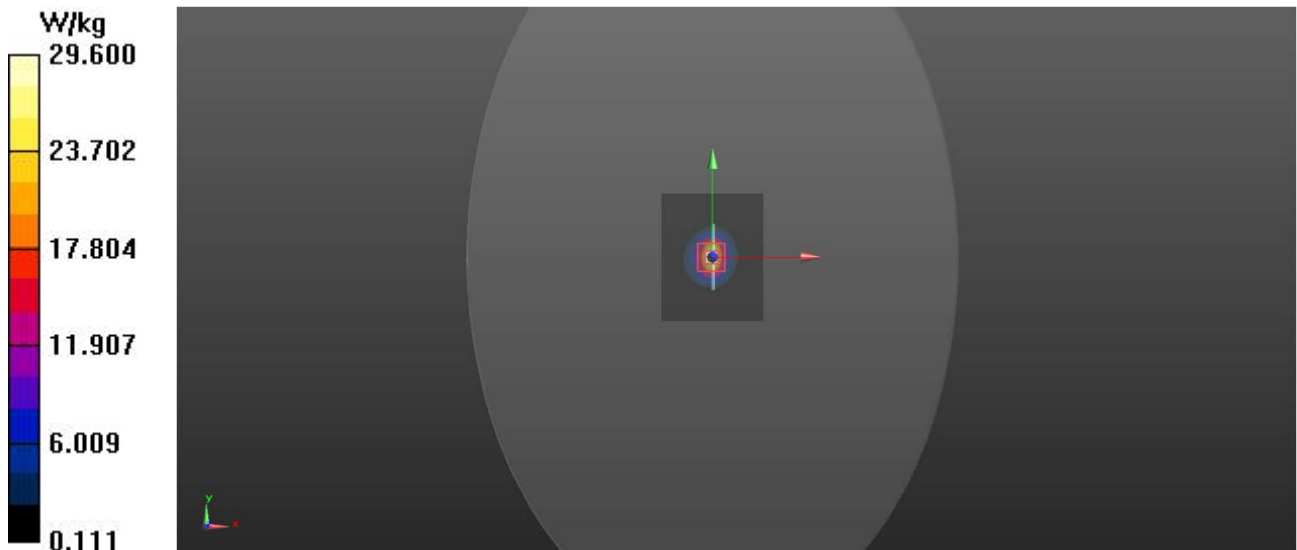

System Check_H5250


DUT: Dipole 5GHzV2;Type:D5GHzV2; SN:1169

Communication System: CW; Frequency: 5250 MHz;Duty Cycle: 1:1
Medium: H5G Medium parameters used: $f = 5250 \text{ MHz}$; $\sigma = 4.748 \text{ S/m}$; $\epsilon_r = 36.88$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : 22.1 °C; Liquid Temperature : 22.0 °C

- DASY5 Configuration:
- Probe: EX3DV4 - SN3970; ConvF(5.85, 5.85, 5.85); Calibrated: 2022/4/18;
 - Sensor-Surface: 1.4mm (Mechanical Surface Detection)
 - Electronics: DAE4 Sn1418; Calibrated: 2022/3/24
 - Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
 - Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Pin=100mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 22.2 W/kg

Pin=100mW/Zoom Scan (4x4x2mm) (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 57.229 V/m; Power Drift = 0.15 dB
Peak SAR (extrapolated) = 37.6 W/kg
SAR(1 g) =7.62 W/kg; SAR(10 g) = 2.13 W/kg
Maximum value of SAR (measured) = 23.4 W/kg

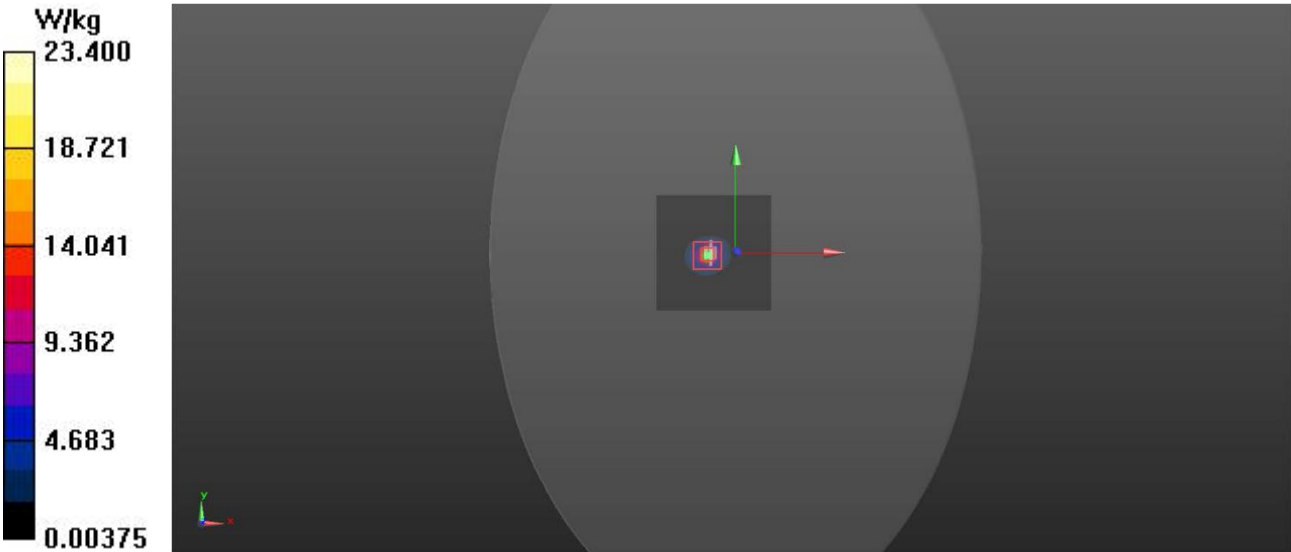

System Check_H5600

DUT: Dipole 5GHzV2;Type:D5GHzV2; SN:1169

Communication System: CW; Frequency: 5600 MHz;Duty Cycle: 1:1

Medium: H5G Medium parameters used: $f = 5600$ MHz; $\sigma = 5.182$ S/m; $\epsilon_r = 36.105$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.9 °C; Liquid Temperature : 21.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3970; ConvF(5.17, 5.17, 5.17); Calibrated: 2022/4/18;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1418; Calibrated: 2022/3/24
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Pin=100mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 22.7 W/kg


Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 59.652 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 39.2 W/kg

SAR(1 g) = 7.88 W/kg; SAR(10 g) = 2.20 W/kg

Maximum value of SAR (measured) = 24.0 W/kg

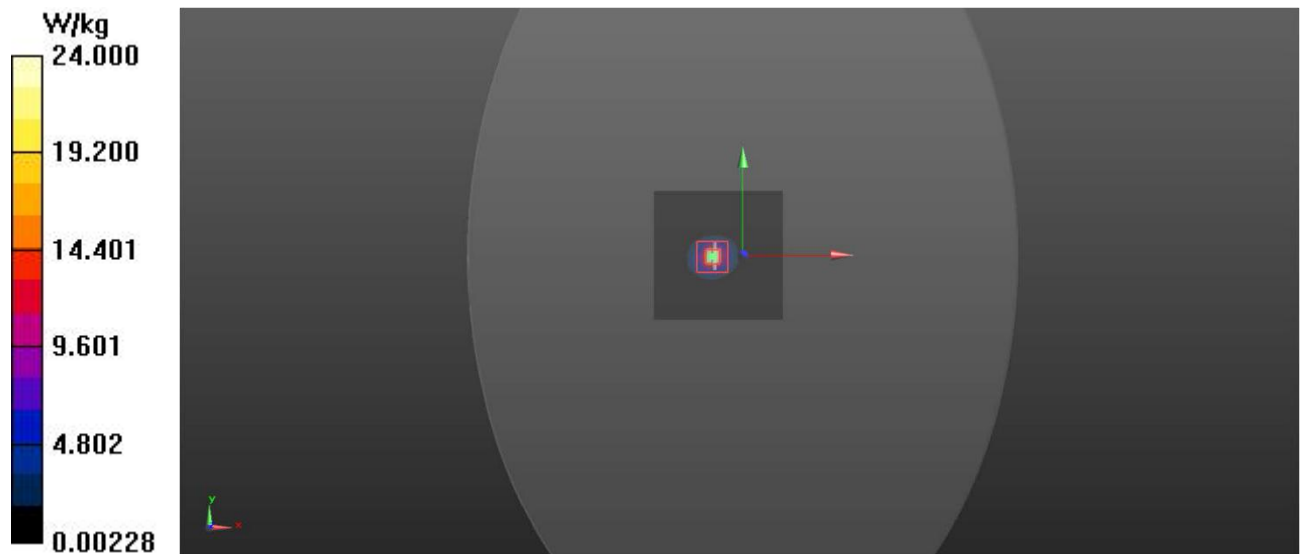

System Check_H5750

DUT: Dipole 5GHzV2;Type:D5GHzV2; SN:1169

Communication System: CW; Frequency: 5750 MHz;Duty Cycle: 1:1

Medium: H5G Medium parameters used: $f = 5750$ MHz; $\sigma = 5.415$ S/m; $\epsilon_r = 35.658$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3970; ConvF(5.2, 5.2, 5.2); Calibrated: 2022/4/18;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1418; Calibrated: 2022/3/24
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Pin=100mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 20.6 W/kg

Pin=100mW/Zoom Scan (7x7x5)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 50.784 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 35.0 W/kg

SAR(1 g) = 7.51 W/kg; SAR(10 g) = 2.10 W/kg

Maximum value of SAR (measured) = 21.5 W/kg

