



FCC RADIO TEST REPORT-BLE

FCC ID:O86T8500

Product : 8 Inch Full Ruggedized Tablet

Trade Name : N/A

Model Name : xTablet T8500

Serial Model : N/A

Report No. : NTEK-2015NT1211611F3

Prepared for

MobileDemand, LC.

1501 Boyson Square Drive Suite 101 Hiawatha, Iowa52233, United States.

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street
Bao'an District, Shenzhen P.R. China

Tel.: +86-0755-61156588 Fax.: +86-0755-61156599

Website:www.ntek.org.cn

TEST RESULT CERTIFICATION

Applicant's name MobileDemand, LC.

Address 1501 Boyson Square Drive Suite 101 Hiawatha, Iowa 52233, United States.

Manufacture's Name... Emdoor Information Co., Ltd.

Address 3A 1/F Jinfulai Tower, No. 49-1, Dabao Road, Baoan 28 District, Shenzhen, China.

Product description

Product name 8 Inch Full Ruggedized Tablet

Model and/or type reference xTablet T8500

Serial Model N/A

Standards FCC Part 15.247: 01 Oct. 2015

Test procedure ANSI C63.10-2013 and KDB 558074 D01 DTS Meas Guidance v03r04

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personnel only, and shall be noted in the revision of the document.

Date of Test

Date (s) of performance of tests 11 Dec. 2015 ~ 14 Jan. 2016

Date of Issue 14 Jan. 2016


Test Result **Pass**

Testing Engineer :




(Susan Su)

Technical Manager :



(Brown Lu)

Authorized Signatory :



(Sam Chen)

Table of Contents

	Page
1 . SUMMARY OF TEST RESULTS	5
1.1 TEST FACILITY	6
1.2 MEASUREMENT UNCERTAINTY	6
2 . GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	9
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	12
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	13
3 . EMC EMISSION TEST	14
3.1 CONDUCTED EMISSION MEASUREMENT	14
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	14
3.1.2 TEST PROCEDURE	15
3.1.3 DEVIATION FROM TEST STANDARD	15
3.1.4 TEST SETUP	15
3.1.5 EUT OPERATING CONDITIONS	15
3.1.6 TEST RESULTS	16
3.2 RADIATED EMISSION MEASUREMENT	24
3.2.1 RADIATED EMISSION LIMITS	24
3.2.2 TEST PROCEDURE	25
3.2.3 DEVIATION FROM TEST STANDARD	25
3.2.4 TEST SETUP	26
3.2.5 EUT OPERATING CONDITIONS	27
3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)	28
3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)	29
3.2.8 TEST RESULTS (ABOVE 1000 MHZ)	31
4 . POWER SPECTRAL DENSITY TEST	33
4.1 APPLIED PROCEDURES / LIMIT	33
4.1.1 TEST PROCEDURE	33
4.1.2 DEVIATION FROM STANDARD	33
4.1.3 TEST SETUP	33
4.1.4 EUT OPERATION CONDITIONS	33
4.1.5 TEST RESULTS	34
5 . BANDWIDTH TEST	36
5.1 APPLIED PROCEDURES / LIMIT	36
5.1.1 TEST PROCEDURE	36

Table of Contents	
	Page
TEST SETUP	36
5.1.2 EUT OPERATION CONDITIONS	36
5.1.3 TEST RESULTS	37
6 . PEAK OUTPUT POWER TEST	39
6.1 APPLIED PROCEDURES / LIMIT	39
6.1.1 TEST PROCEDURE	39
6.1.2 DEVIATION FROM STANDARD	39
6.1.3 TEST SETUP	39
6.1.4 EUT OPERATION CONDITIONS	39
6.1.5 TEST RESULTS	41
7 . 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE	43
7.1 DEVIATION FROM STANDARD	43
7.2 TEST SETUP	43
7.3 EUT OPERATION CONDITIONS	43
7.4 TEST RESULTS	44
8 . ANTENNA REQUIREMENT	46
8.1 STANDARD REQUIREMENT	46
8.2 EUT ANTENNA	46
9 . EUT TEST PHOTO	47
APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.247 (a)(2)	6dB Bandwidth	PASS	
15.247 (b)	Peak Output Power	PASS	
15.247 (c)	Radiated Spurious Emission	PASS	
15.247 (d)	Power Spectral Density	PASS	
15.205	Band Edge Emission	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

1.1 TEST FACILITY

NTEK Testing Technology Co., Ltd

Add.:1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen P.R. China.

FCC Registration No.:238937; IC Registration No.:9270A-1

CNAS Registration No.:L5516

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power,conducted	$\pm 0.16\text{dB}$
3	Spurious emissions,conducted	$\pm 0.21\text{dB}$
4	All emissions,radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	8 Inch Full Ruggedized Tablet	
Trade Name	N/A	
Model Name	xTablet T8500	
Serial Model	N/A	
Model Difference	N/A	
Product Description	The EUT is a 8 Inch Full Ruggedized Tablet	
	Operation Frequency:	2402~2480MHz
	Modulation Type:	GFSK
	Number Of Channel	40CH
	Antenna Designation:	Please see Note 3.
	Antenna Gain (dBi)	1.0dBi
	Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.	
Channel List	Please refer to the Note 2.	
Ratings	DC 3.7V	
Adapter	Model:AW018WR-0500300UH Input: AC100-240V~, 50/60Hz,0.5A Output: 5V $\overline{\text{---}}$, 3A	
Battery	DC 3.7V,8500mAh	
Connecting I/O Port(s)	Please refer to the User's Manual	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

Channel	Frequency (MHz)
00	2402
01	2404
.....	
.....	
...	...
.....	
38	2478
39	2480

3.

Table for Filed Antenna

Ant	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
A	N/A	N/A	PCB Antenna	N/A	1.0	BT Antenna

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	CH00
Mode 2	CH19
Mode 3	CH39
Mode 4	Link Mode

For Conducted Emission	
Final Test Mode	Description
Mode 4	Link Mode


For Radiated Emission	
Final Test Mode	Description
Mode 1	CH00
Mode 2	CH19
Mode 3	CH39
Mode 4	Link Mode

Note:


(1) The measurements are performed at the highest, middle, lowest available channels.

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Conducted Emission Test 1

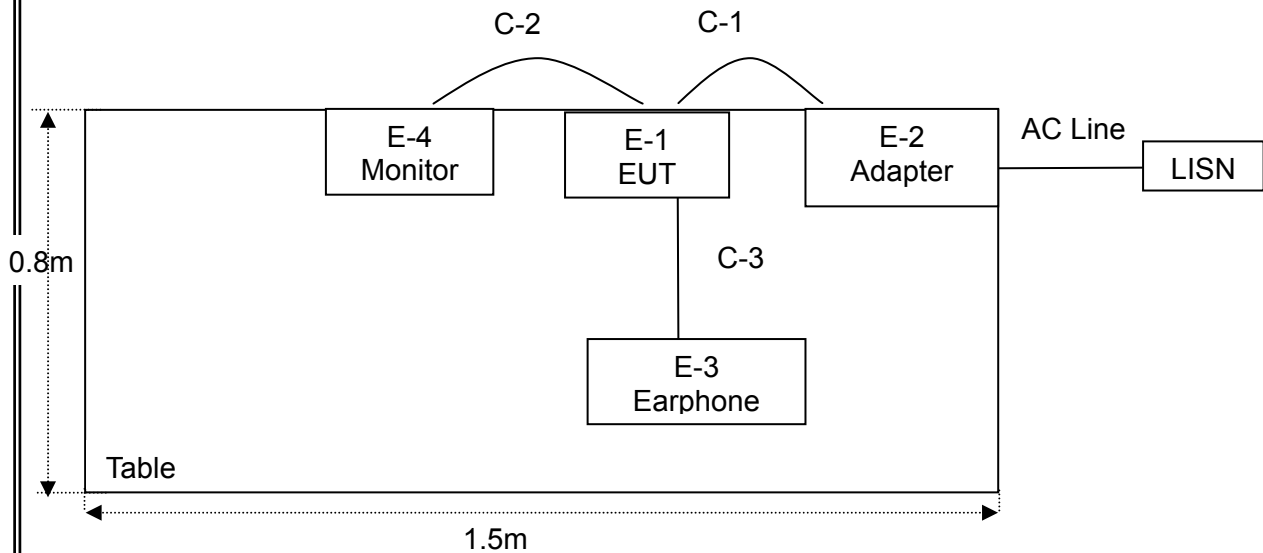

Conducted Emission Test 2

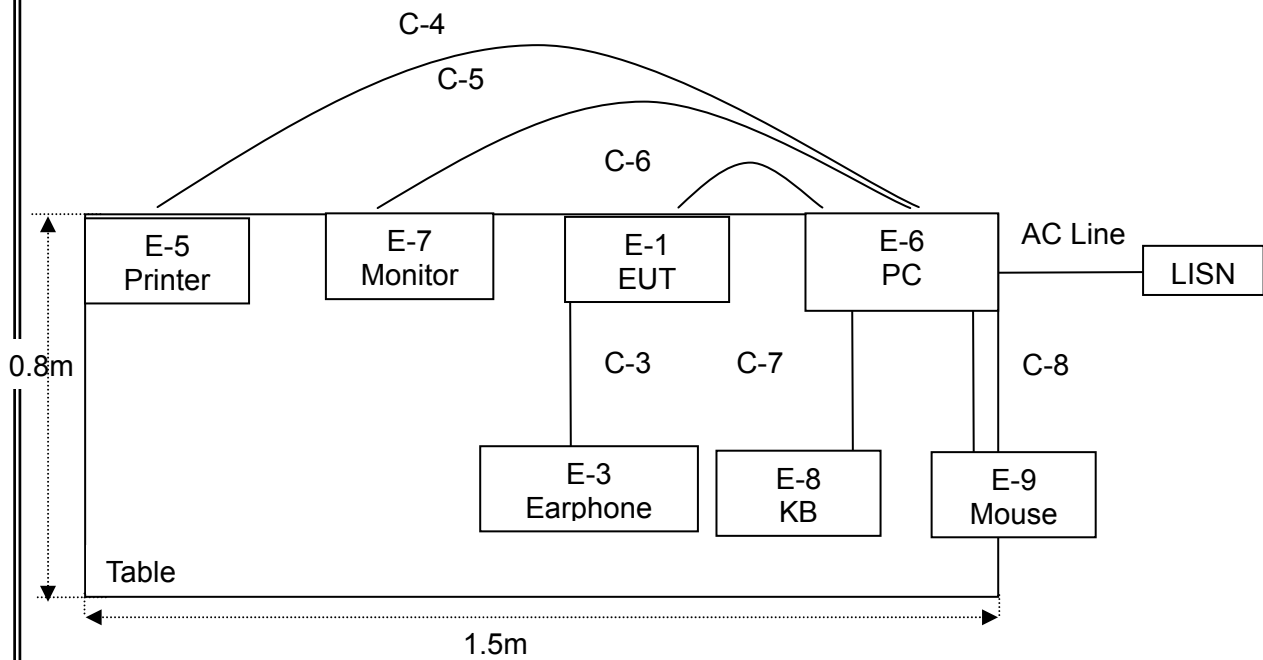

Radiated Spurious Emission Test

E-1 EUT

2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Brand	Model/Type No.	Series No.	Note
E-1	8 Inch Full Ruggedized Tablet	N/A	xTablet T8500	N/A	EUT
E-2	ADAPTER	N/A	AW018WR-0500300UH	N/A	
E-3	Earphone	N/A	2688	N/A	
E-4	Monitor	SONY	KDL-24EX520	N/A	
E-5	Printer	Canon	L11121E	LBP2900	
E-6	Personal computer	DELL	FT4Y23X	34413561645	
E-7	Monitor	DELL	IN2020MB	cn-0y6mhx-74261-11f-67es	
E-8	Keyboard	DELL	SK-8185	OY526KUS	
E-9	Mouse	DELL	MS111-P	cn-011d3v-71581-11e-1th7	

Item	Cable Type	Shielded Type	Ferrite Core	Length	Note
C-1	Power line	NO	YES	1.2m	
C-2	HDMI	NO	NO	1.0m	
C-3	Earphone	NO	NO	1.0m	
C-4	USB Cable	NO	NO	1.0m	
C-5	HDMI	NO	NO	1.0m	
C-6	USB Cable	NO	NO	1.0m	
C-7	USB Cable	NO	NO	1.0m	
C-8	USB Cable	NO	NO	1.0m	

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY45108040	2015.07.06	2016.07.05	1 year
2	Test Receiver	R&S	ESPI	101318	2015.06.07	2016.06.06	1 year
3	Bilog Antenna	TESEQ	CBL6111D	31216	2015.07.06	2016.07.05	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2015.06.07	2016.06.06	1 year
5	Spectrum Analyzer	ADVANTEST	R3132	150900201	2015.06.07	2016.06.06	1 year
6	Horn Antenna	EM	EM-AH-10180	2011071402	2015.07.06	2016.07.05	1 year
7	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2015.07.06	2016.07.05	1 year
8	Amplifier	EM	EM-30180	060538	2015.12.22	2016.12.21	1 year
9	Loop Antenna	ARA	PLA-1030/B	1029	2015.06.08	2016.06.07	1 year
10	Power Meter	R&S	NRVS	100696	2015.07.06	2016.07.05	1 year
11	Power Sensor	R&S	URV5-Z4	0395.1619.05	2015.07.06	2016.07.05	1 year

Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2015.06.06	2016.06.05	1 year
2	LISN	R&S	ENV216	101313	2015.08.24	2016.08.23	1 year
3	LISN	EMCO	3816/2	00042990	2015.08.24	2016.08.23	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2015.06.07	2016.06.06	1 year
5	Passive Voltage Probe	R&S	ESH2-Z3	100196	2015.06.07	2016.06.06	1 year
6	Absorbing clamp	R&S	MOS-21	100423	2015.06.08	2016.06.07	1 year

1	Attenuation	MCE	24-10-34	BN9258	2015.06.08	2016.06.07	1 year
---	-------------	-----	----------	--------	------------	------------	--------

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	73.00	60.00	56.00	46.00	CISPR
5.0 -30.0	73.00	60.00	60.00	50.00	CISPR

0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

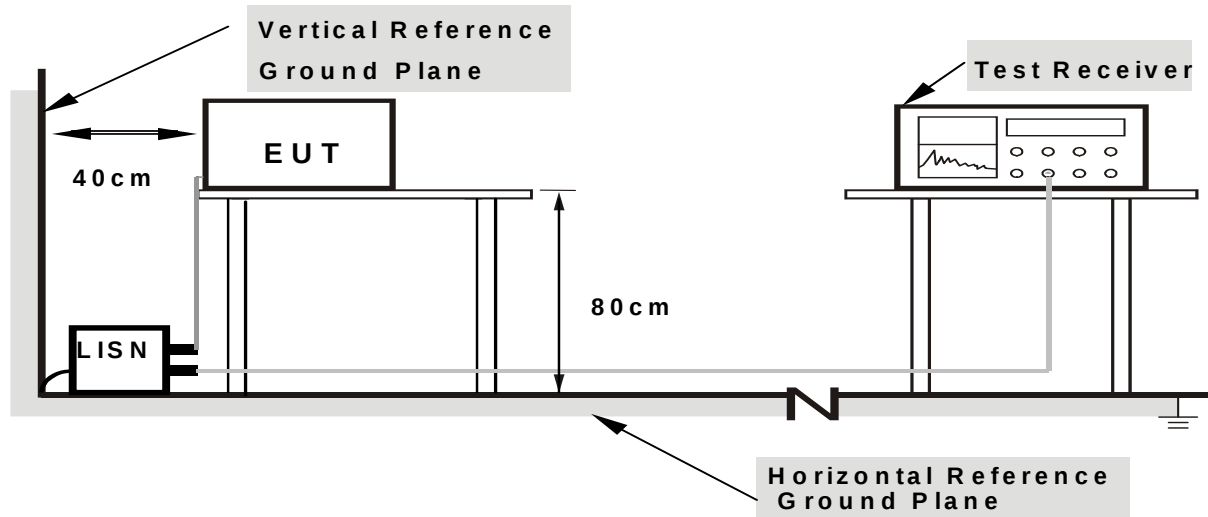

Note: 1.Support units were connected to second LISN .

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.


3.1.6 TEST RESULTS

EUT :	8 Inch Full Ruggedized Tablet	Model Name. :	xTablet T8500
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5.0V form Adapter AC 120V/60Hz	Test Mode :	Mode 4

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.1965	45.47	10.13	55.60	63.75	-8.15	QP
0.1965	22.30	10.13	32.43	53.75	-21.32	AVG
0.2220	44.07	10.13	54.20	62.74	-8.54	QP
0.2220	20.97	10.13	31.10	52.74	-21.64	AVG
0.6097	34.31	9.79	44.10	56.00	-11.90	QP
0.6097	16.91	9.79	26.70	46.00	-19.30	AVG
0.9697	27.36	9.84	37.20	56.00	-18.80	QP
0.9697	3.81	9.84	13.65	46.00	-32.35	AVG
1.2700	25.68	9.82	35.50	56.00	-20.50	QP
1.2700	13.93	9.82	23.75	46.00	-22.25	AVG
3.7980	21.95	9.75	31.70	56.00	-24.30	QP
3.7980	11.09	9.75	20.84	46.00	-25.16	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

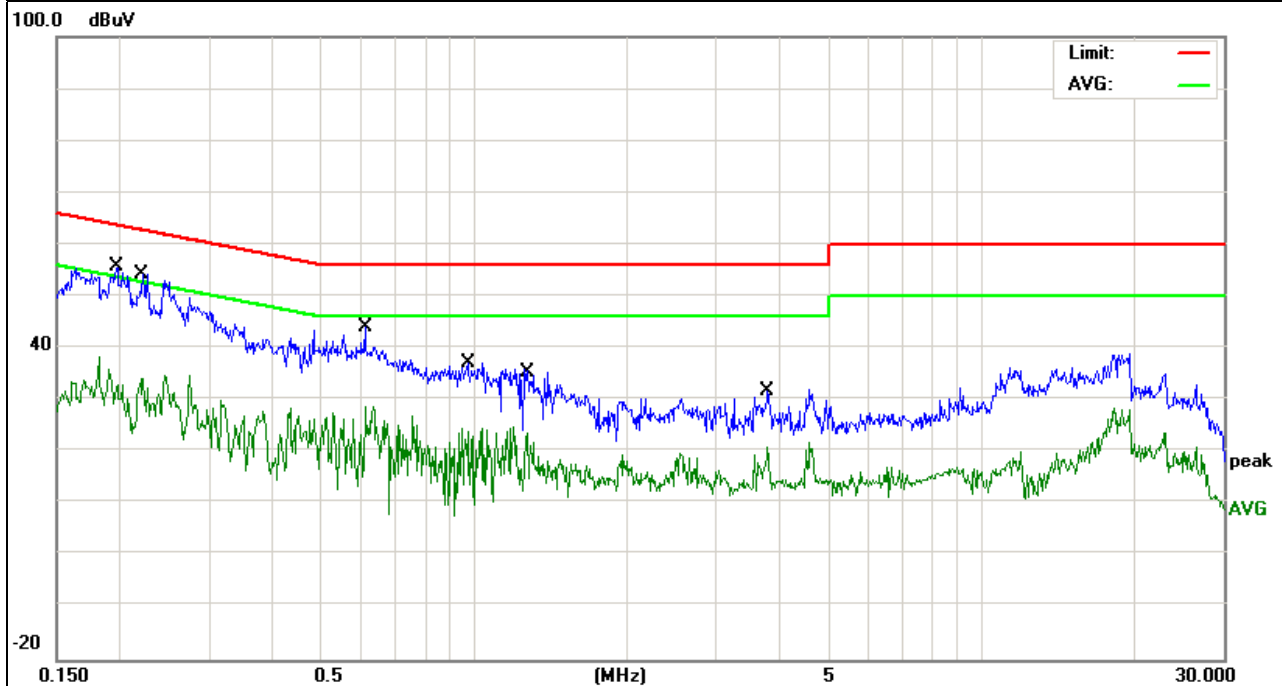


EUT :	8 Inch Full Ruggedized Tablet	Model Name. :	xTablet T8500
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5.0V form Adapter AC 120V/60Hz	Test Mode :	Mode 4

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1737	45.83	10.05	55.88	64.78	-8.90	QP
0.1737	19.28	10.05	29.33	54.78	-25.45	AVG
0.4420	34.89	9.95	44.84	57.02	-12.18	QP
0.4420	16.15	9.95	26.10	47.02	-20.92	AVG
0.7378	29.48	9.82	39.30	56.00	-16.70	QP
0.7378	5.49	9.82	15.31	46.00	-30.69	AVG
0.9858	27.98	9.87	37.85	56.00	-18.15	QP
0.9858	5.34	9.87	15.21	46.00	-30.79	AVG
1.7298	25.32	9.78	35.10	56.00	-20.90	QP
1.7298	13.51	9.78	23.29	46.00	-22.71	AVG
2.5099	23.25	9.74	32.99	56.00	-23.01	QP
2.5099	6.37	9.74	16.11	46.00	-29.89	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

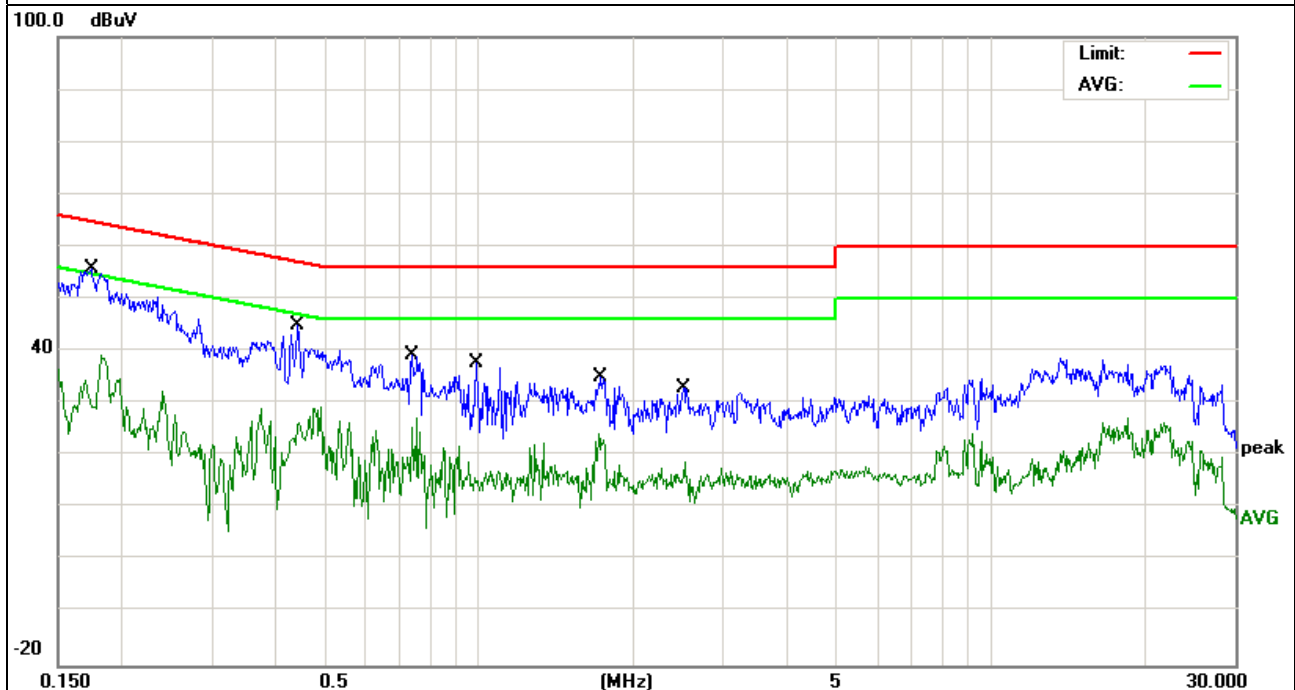


EUT :	8 Inch Full Ruggedized Tablet	Model Name :	xTablet T8500
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5.0V from adapter AC 240V/60Hz	Test Mode :	Mode 4

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1720	43.68	10.12	53.80	64.86	-11.06	QP
0.1720	23.23	10.12	33.35	54.86	-21.51	AVG
0.2953	41.14	10.14	51.28	60.37	-9.09	QP
0.2953	17.54	10.14	27.68	50.37	-22.69	AVG
0.4380	33.96	9.95	43.91	57.10	-13.19	QP
0.4380	13.17	9.95	23.12	47.10	-23.98	AVG
0.6975	34.20	9.78	43.98	56.00	-12.02	QP
0.6975	12.12	9.78	21.90	46.00	-24.10	AVG
0.8659	32.88	9.82	42.70	56.00	-13.30	QP
0.8659	15.48	9.82	25.30	46.00	-20.70	AVG
12.6019	31.58	9.82	41.40	60.00	-18.60	QP
12.6019	11.22	9.82	21.04	50.00	-28.96	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

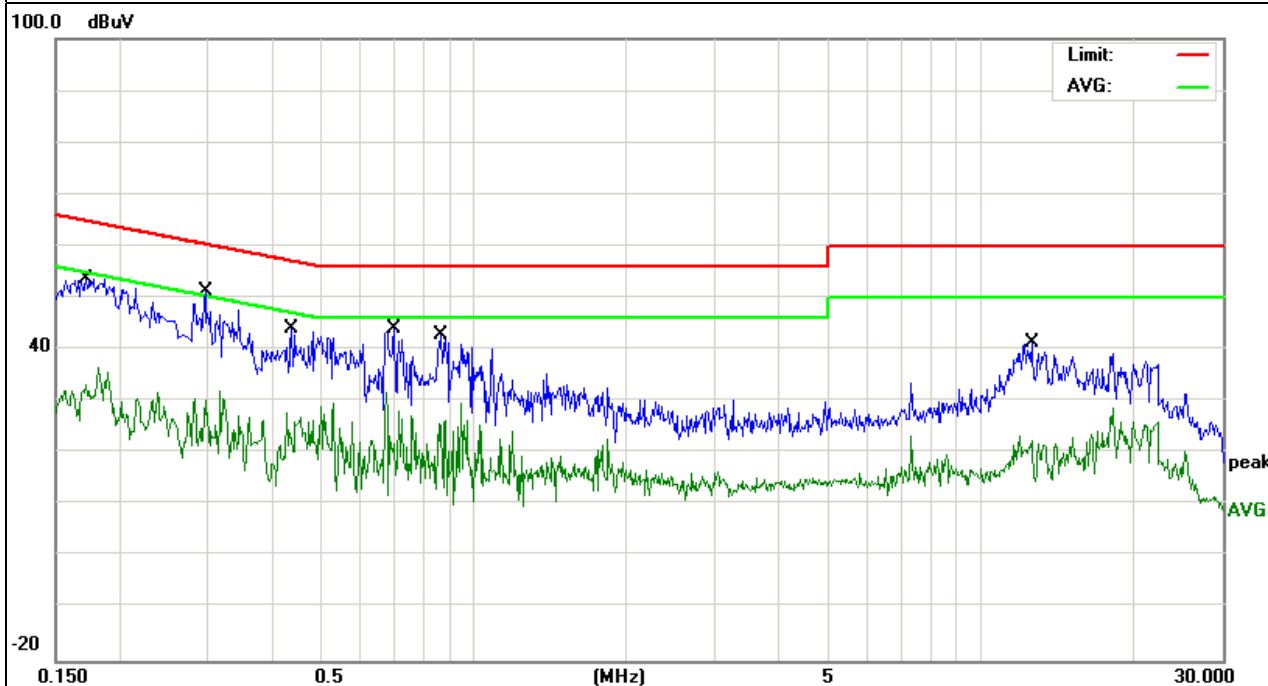


EUT :	8 Inch Full Ruggedized Tablet	Model Name :	xTablet T8500
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5.0V from adapter AC 240V/60Hz	Test Mode :	Mode 4

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.2006	44.68	10.02	54.70	63.58	-8.88	QP
0.2006	20.67	10.02	30.69	53.58	-22.89	AVG
0.3002	40.77	10.13	50.90	60.23	-9.33	QP
0.3002	21.90	10.13	32.03	50.23	-18.20	AVG
0.3996	36.85	10.05	46.90	57.86	-10.96	QP
0.3996	16.04	10.05	26.09	47.86	-21.77	AVG
0.5977	35.48	9.82	45.30	56.00	-10.70	QP
0.5977	9.13	9.82	18.95	46.00	-27.05	AVG
1.6733	27.01	9.79	36.80	56.00	-19.20	QP
1.6733	6.49	9.79	16.28	46.00	-29.72	AVG
2.0579	26.75	9.75	36.50	56.00	-19.50	QP
2.0579	4.35	9.75	14.10	46.00	-31.90	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

100.0 dBμV

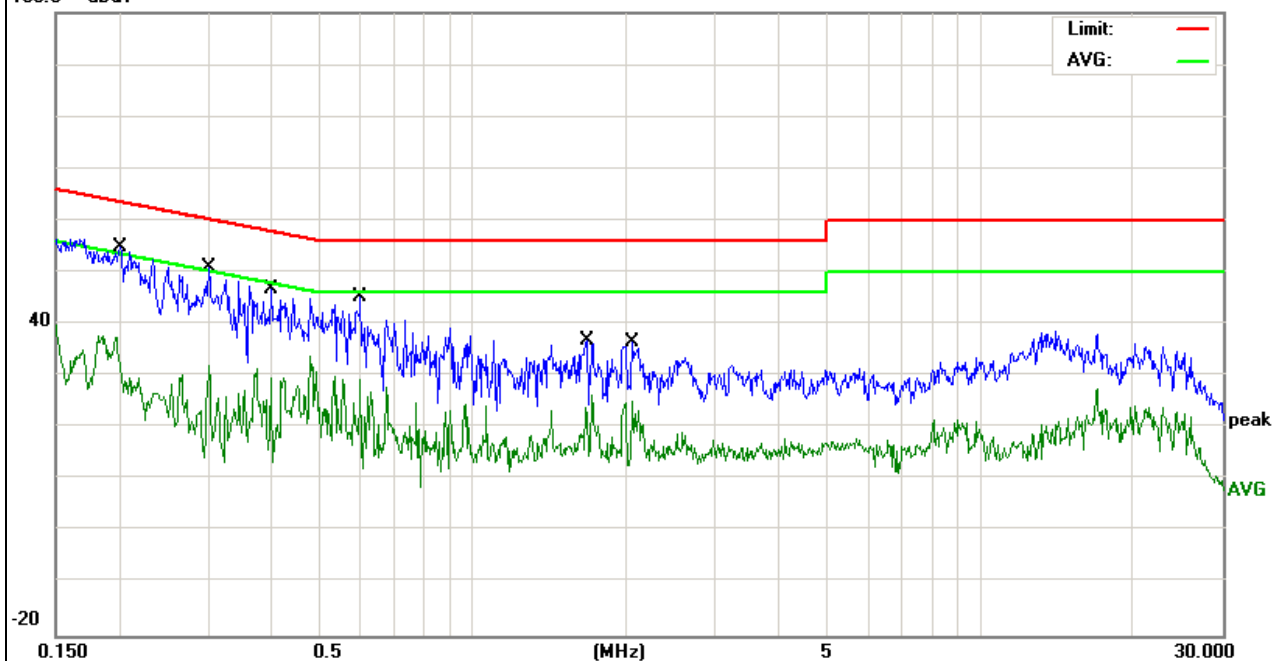


EUT :	8 Inch Full Ruggedized Tablet	Model Name. :	xTablet T8500
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5.0V form PC AC 120V/60Hz	Test Mode :	Mode 4

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1675	43.74	9.46	53.20	65.08	-11.88	QP
0.1675	19.78	9.46	29.24	55.08	-25.84	AVG
0.2660	38.95	9.45	48.40	61.24	-12.84	QP
0.2660	14.98	9.45	24.43	51.24	-26.81	AVG
0.3199	37.76	9.44	47.20	59.71	-12.51	QP
0.3199	9.07	9.44	18.51	49.71	-31.20	AVG
0.6097	31.86	9.44	41.30	56.00	-14.70	QP
0.6097	16.36	9.44	25.80	46.00	-20.20	AVG
1.1254	23.66	9.44	33.10	56.00	-22.90	QP
1.1254	3.87	9.44	13.31	46.00	-32.69	AVG
2.1899	23.13	9.47	32.60	56.00	-23.40	QP
2.1899	8.62	9.47	18.09	46.00	-27.91	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

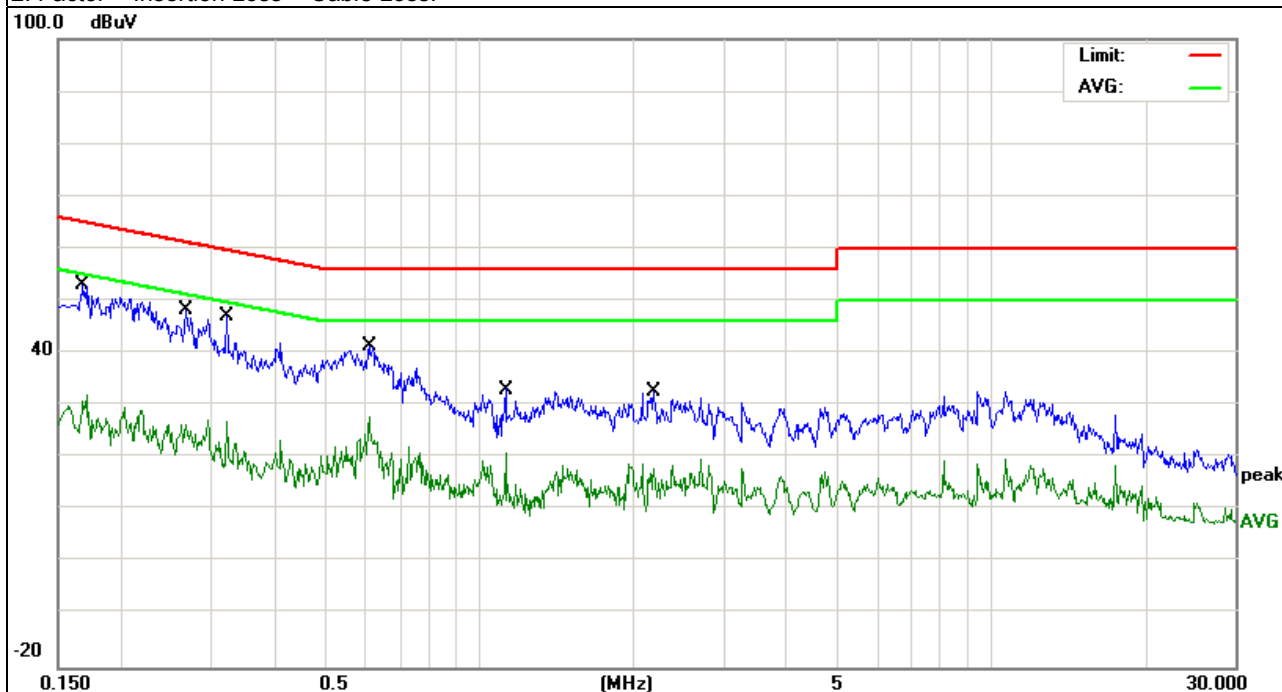


EUT :	8 Inch Full Ruggedized Tablet	Model Name. :	xTablet T8500
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5.0V form PC AC 120V/60Hz	Test Mode :	Mode 4

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1804	40.14	9.46	49.60	64.46	-14.86	QP
0.1804	16.19	9.46	25.65	54.46	-28.81	AVG
0.3301	33.96	9.44	43.40	59.45	-16.05	QP
0.3301	14.18	9.44	23.62	49.45	-25.83	AVG
0.5340	29.84	9.45	39.29	56.00	-16.71	QP
0.5340	7.95	9.45	17.40	46.00	-28.60	AVG
0.6460	29.86	9.44	39.30	56.00	-16.70	QP
0.6460	5.68	9.44	15.12	46.00	-30.88	AVG
1.2940	21.57	9.45	31.02	56.00	-24.98	QP
1.2940	3.13	9.45	12.58	46.00	-33.42	AVG
1.9495	19.06	9.46	28.52	56.00	-27.48	QP
1.9495	-0.13	9.46	9.33	46.00	-36.67	AVG

Remark:

1. All readings are Quasi-Peak and Average values.

2. Factor = Insertion Loss + Cable Loss.

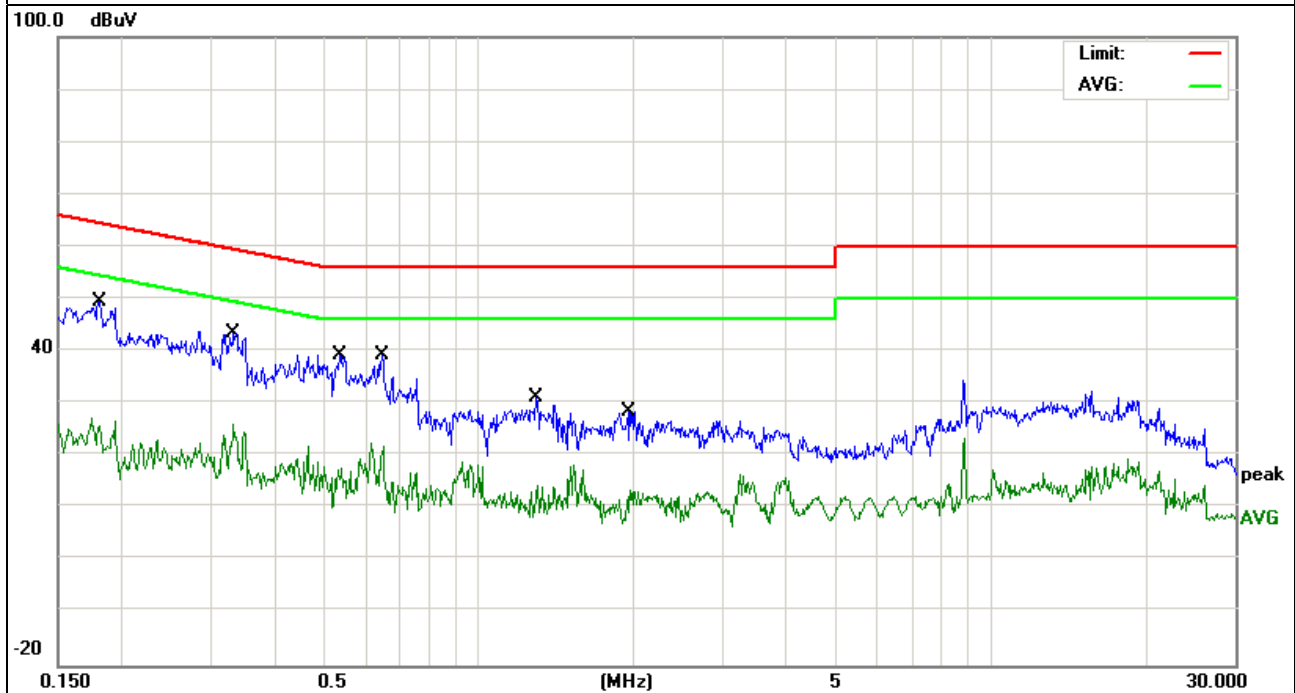


EUT :	8 Inch Full Ruggedized Tablet	Model Name :	xTablet T8500
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5.0V from PC AC 240V/60Hz	Test Mode :	Mode 4

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1844	40.84	9.46	50.30	64.28	-13.98	QP
0.1844	19.09	9.46	28.55	54.28	-25.73	AVG
0.2878	37.26	9.44	46.70	60.59	-13.89	QP
0.2878	8.27	9.44	17.71	50.59	-32.88	AVG
0.4778	30.94	9.46	40.40	56.38	-15.98	QP
0.4778	6.14	9.46	15.60	46.38	-30.78	AVG
0.7378	26.67	9.43	36.10	56.00	-19.90	QP
0.7378	8.55	9.43	17.98	46.00	-28.02	AVG
1.6935	20.56	9.45	30.01	56.00	-25.99	QP
1.6935	4.06	9.45	13.51	46.00	-32.49	AVG
4.3098	20.62	9.48	30.10	56.00	-25.90	QP
4.3098	9.35	9.48	18.83	46.00	-27.17	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

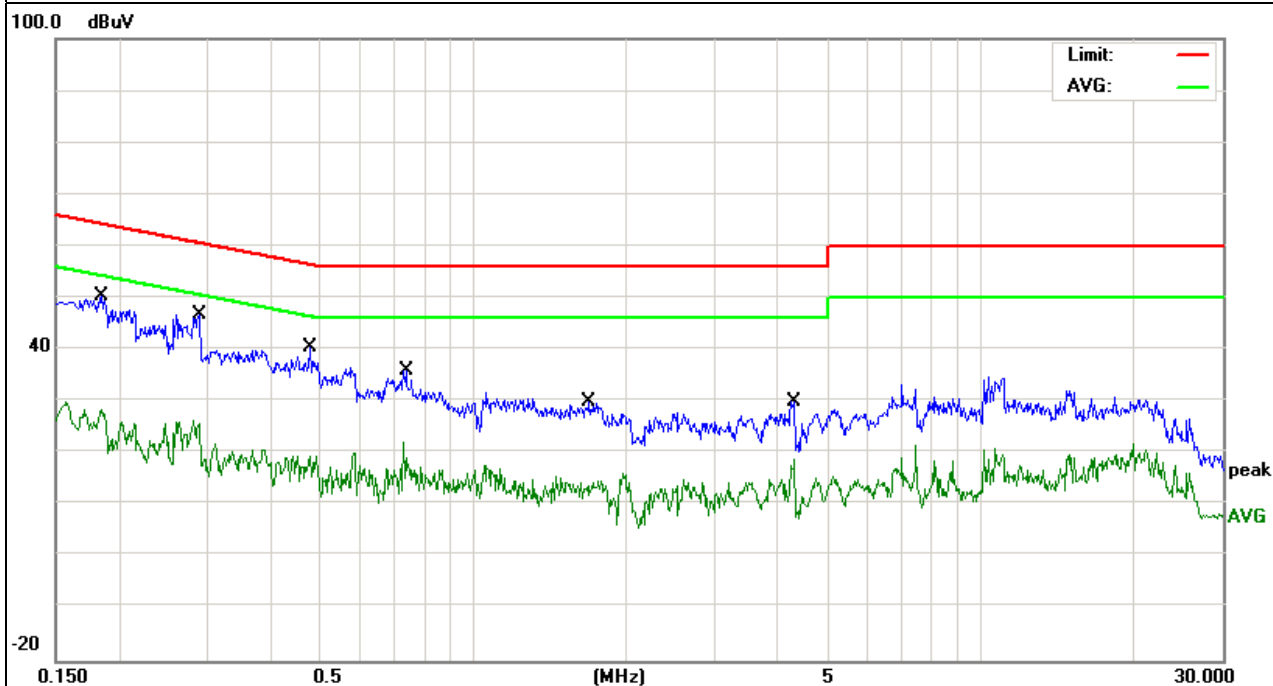


EUT :	8 Inch Full Ruggedized Tablet	Model Name :	xTablet T8500
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5.0V from PC AC 240V/60Hz	Test Mode :	Mode 4

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.2020	39.24	9.46	48.70	63.52	-14.82	QP
0.2020	16.30	9.46	25.76	53.52	-27.76	AVG
0.2878	35.86	9.44	45.30	60.59	-15.29	QP
0.2878	13.90	9.44	23.34	50.59	-27.25	AVG
0.5181	31.44	9.46	40.90	56.00	-15.10	QP
0.5181	8.32	9.46	17.78	46.00	-28.22	AVG
1.1291	20.26	9.44	29.70	56.00	-26.30	QP
1.1291	3.87	9.44	13.31	46.00	-32.69	AVG
1.5980	20.25	9.45	29.70	56.00	-26.30	QP
1.5980	4.46	9.45	13.91	46.00	-32.09	AVG
2.9580	17.15	9.47	26.62	56.00	-29.38	QP
2.9580	1.29	9.47	10.76	46.00	-35.24	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

100.0 dBμV

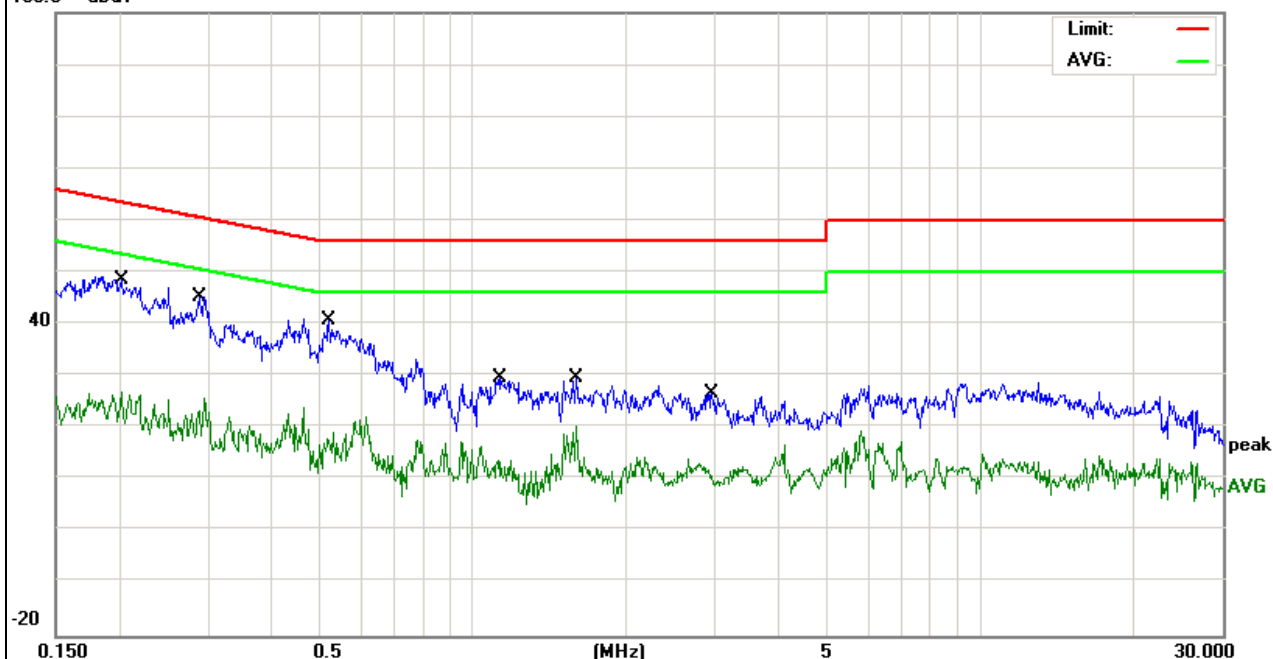

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:


Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Peak	1 MHz	10 Hz

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

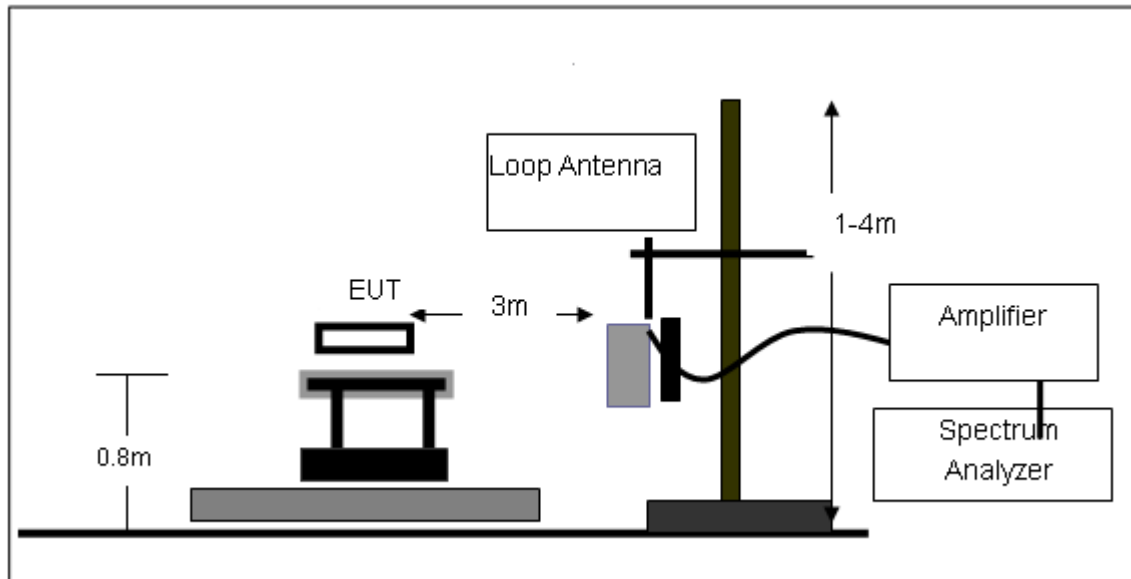

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

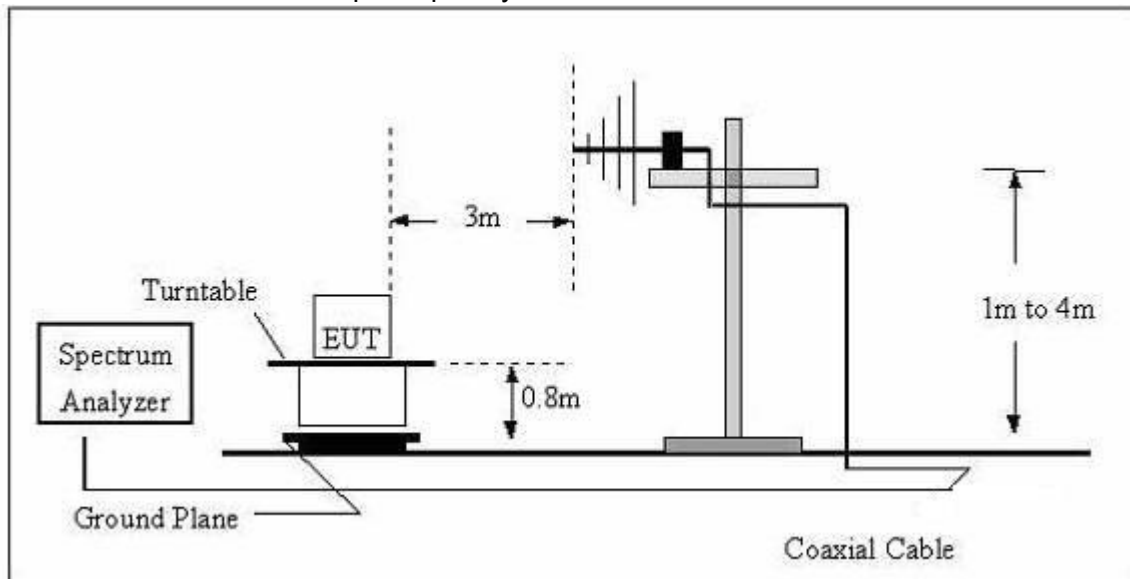

(C) Radiated Emission Test-Up Frequency Above 1GHz

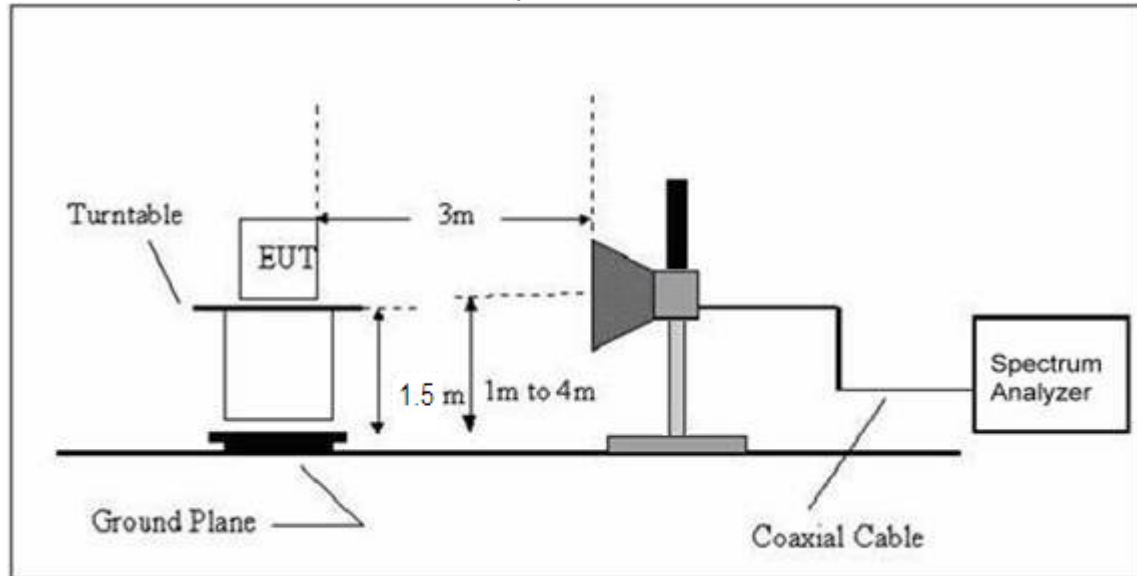**3.2.5 EUT OPERATING CONDITIONS**

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)

EUT:	8 Inch Full Ruggedized Tablet	Model Name. :	xTablet T8500
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	N/A
--	--	--	--	N/A

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.


3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)

EUT :	8 Inch Full Ruggedized Tablet	Model Name :	xTablet T8500
Temperature :	20 °C	Relative Humidity :	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX-High CH		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	32.1794	8.57	18.73	27.30	40.00	-12.70	QP
V	69.6003	17.05	8.75	25.80	40.00	-14.20	QP
V	176.2684	11.28	12.21	23.49	43.50	-20.01	QP
V	278.0668	17.55	11.85	29.40	46.00	-16.60	QP
V	354.1831	13.89	14.21	28.10	46.00	-17.90	QP
V	489.0269	11.36	17.14	28.50	46.00	-17.50	QP

Remark:


Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

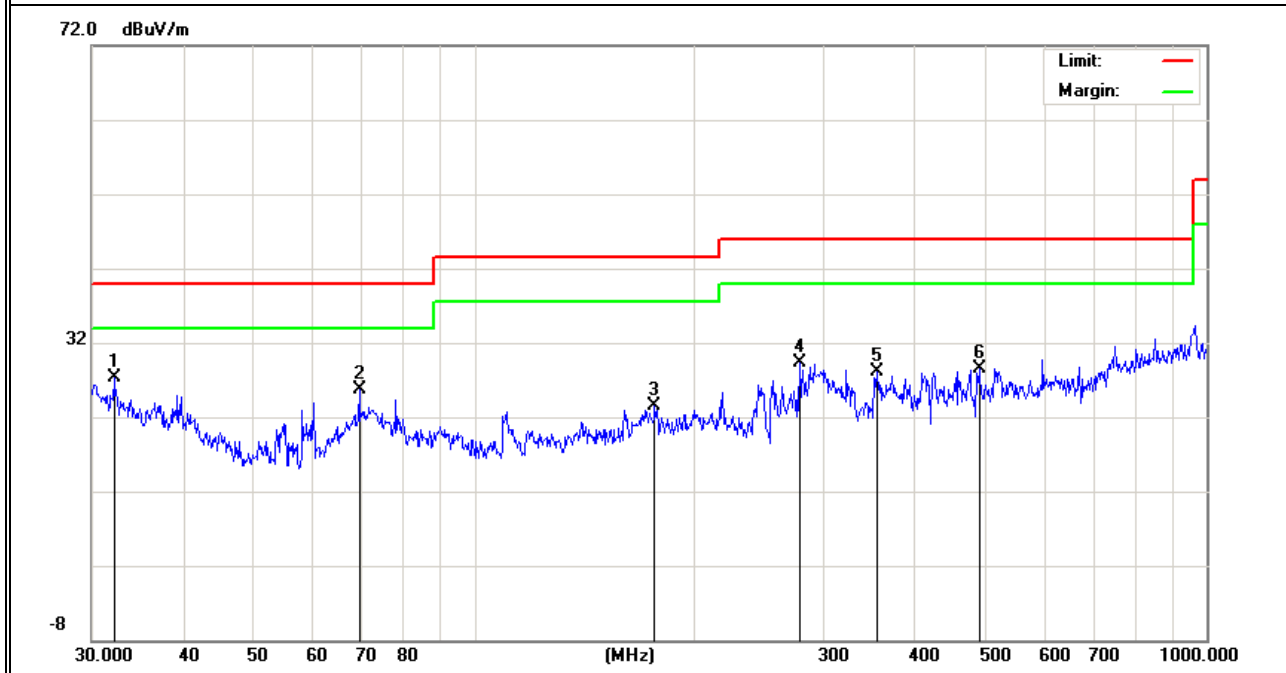

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	30.0000	10.58	19.57	30.15	40.00	-9.85	peak
H	34.0363	10.47	17.53	28.00	40.00	-12.00	peak
H	97.4560	18.63	10.37	29.00	43.50	-14.50	peak
H	166.6511	16.79	12.02	28.81	43.50	-14.69	peak
H	298.2681	16.45	12.55	29.00	46.00	-17.00	peak
H	528.2458	14.54	17.58	32.12	46.00	-13.88	peak

Remark:

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

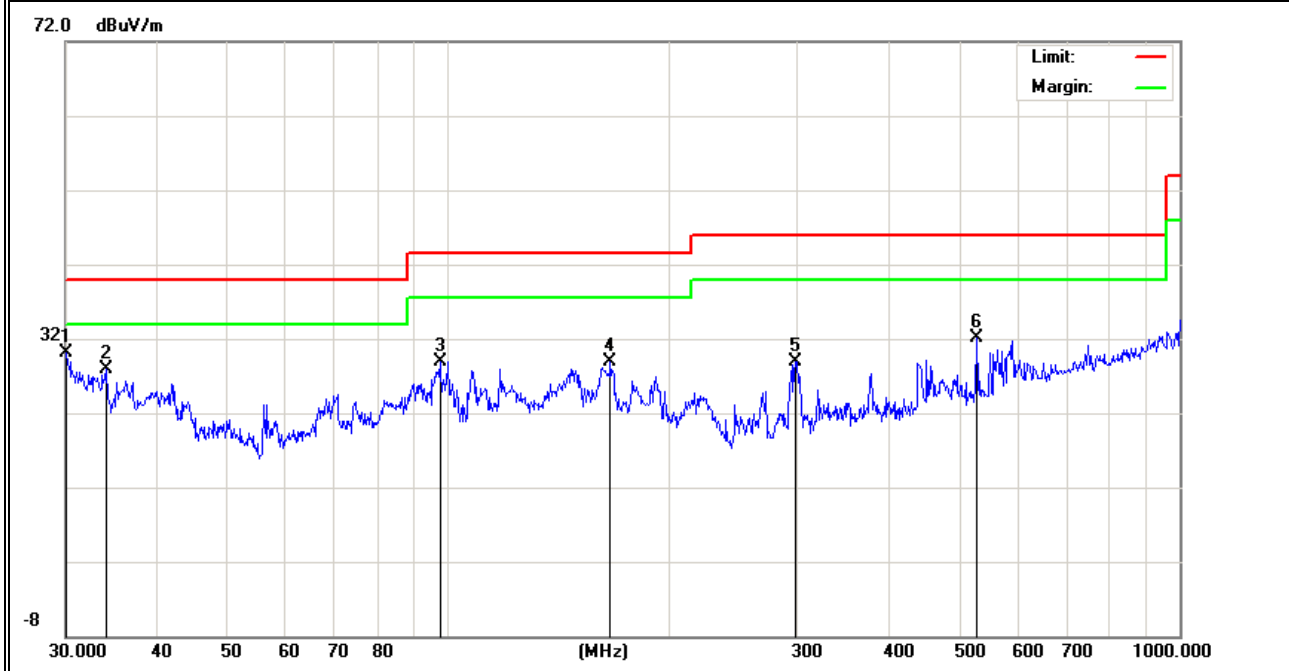

3.2.8 TEST RESULTS (ABOVE 1000 MHZ)

EUT :	8 Inch Full Ruggedized Tablet	Model Name :	xTablet T8500
Temperature :	20 °C	Relative Humidity :	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX		

The Testing have been conformed to 10*2480MHz=24800MHz, and the worst result was report as below:

Frequency (MHz)	Reading (dBμV)	Factor (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark	Polar (H/V)
Low Channel (2402 MHz)-Above 1G							
4804.214	58.19	-3.64	54.55	74.00	-19.45	Pk	Vertical
4804.214	40.53	-3.64	36.89	54.00	-17.11	AV	Vertical
7206.305	58.34	-0.95	57.39	74.00	-16.61	Pk	Vertical
7206.305	36.56	-0.95	35.61	54.00	-18.39	AV	Vertical
4804.148	58.64	-3.64	55.00	74.00	-19.00	Pk	Horizontal
4804.148	41.43	-3.64	37.79	54.00	-16.21	AV	Horizontal
7206.311	56.54	-0.95	55.59	74.00	-18.41	Pk	Horizontal
7206.311	36.36	-0.95	35.41	54.00	-18.59	AV	Horizontal
Mid Channel (2440 MHz)-Above 1G							
4880.306	58.81	-3.68	55.13	74.00	-18.87	Pk	Vertical
4880.306	40.88	-3.68	37.20	54.00	-16.80	AV	Vertical
7320.189	58.24	-0.82	57.42	74.00	-16.58	Pk	Vertical
7320.189	39.05	-0.82	38.23	54.00	-15.77	AV	Vertical
4880.308	55.71	-3.68	52.03	74.00	-21.97	Pk	Horizontal
4880.308	36.89	-3.68	33.21	54.00	-20.79	AV	Horizontal
7320.217	58.15	-0.82	57.33	74.00	-16.67	Pk	Horizontal
7320.217	38.31	-0.82	37.49	54.00	-16.51	AV	Horizontal
High Channel (2480MHz)- Above 1G							
4960.247	58.17	-3.59	54.58	74.00	-19.42	Pk	Vertical
4960.247	37.02	-3.59	33.43	54.00	-20.57	AV	Vertical
7440.149	56.64	-0.68	55.96	74.00	-18.04	Pk	Vertical
7440.149	40.95	-0.68	40.27	54.00	-13.73	AV	Vertical
4960.208	58.21	-3.59	54.62	74.00	-19.38	Pk	Horizontal
4960.208	38.21	-3.59	34.62	54.00	-19.38	AV	Horizontal
7440.304	59.63	-0.68	58.95	74.00	-15.05	Pk	Horizontal
7440.304	38.37	-0.68	37.69	54.00	-16.31	AV	Horizontal

Remark:

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

Radiated band edge:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type	Comment
2390	59.61	-13.06	46.55	74	-27.45	peak	Vertical
2390	58.75	-13.06	45.69	74	-28.31	peak	Horizontal
2483.5	60.32	-12.78	47.54	74	-26.46	peak	Vertical
2483.5	59.84	-12.78	47.06	74	-26.94	peak	Horizontal

Note: Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

4. POWER SPECTRAL DENSITY TEST

4.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS


4.1.1 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. 3 kHz $\leq$ Set the RBW $\leq$ 100 kHz.
4. Set the VBW $\geq$ 3 x RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

4.1.2 DEVIATION FROM STANDARD

No deviation.

4.1.3 TEST SETUP

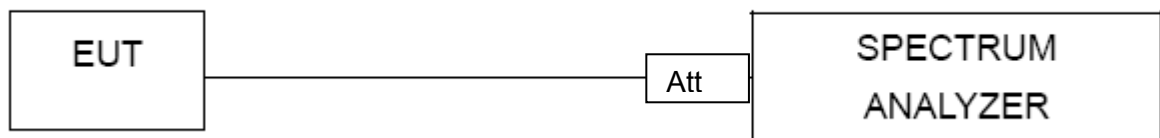


4.1.4 EUT OPERATION CONDITIONS



The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

4.1.5 TEST RESULTS

EUT :	8 Inch Full Ruggedized Tablet	Model Name :	xTablet T8500
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1015 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX Mode /CH00, CH19, CH39		

Frequency	Power Density (dBm/3KHz)	Limit (dBm/3KHz)	Result
2402 MHz	-2.62	8	PASS
2440 MHz	-2.14	8	PASS
2480 MHz	-2.66	8	PASS

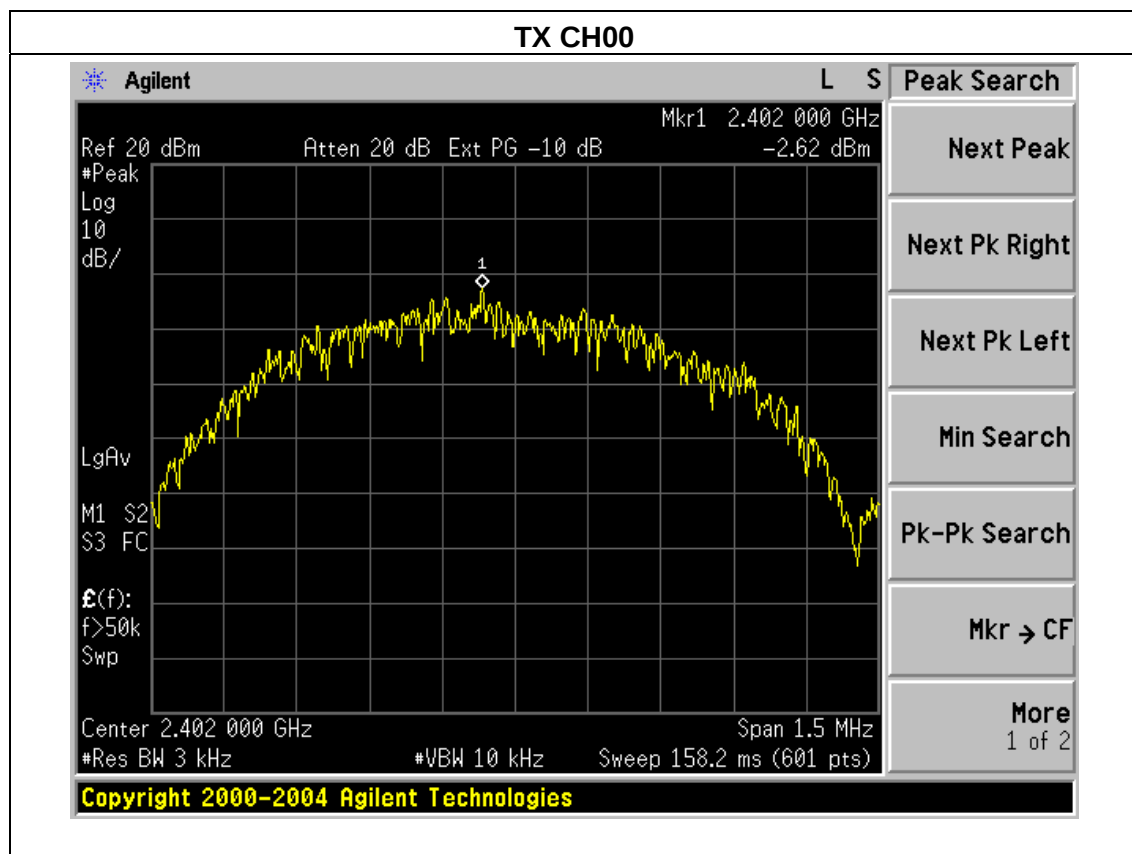

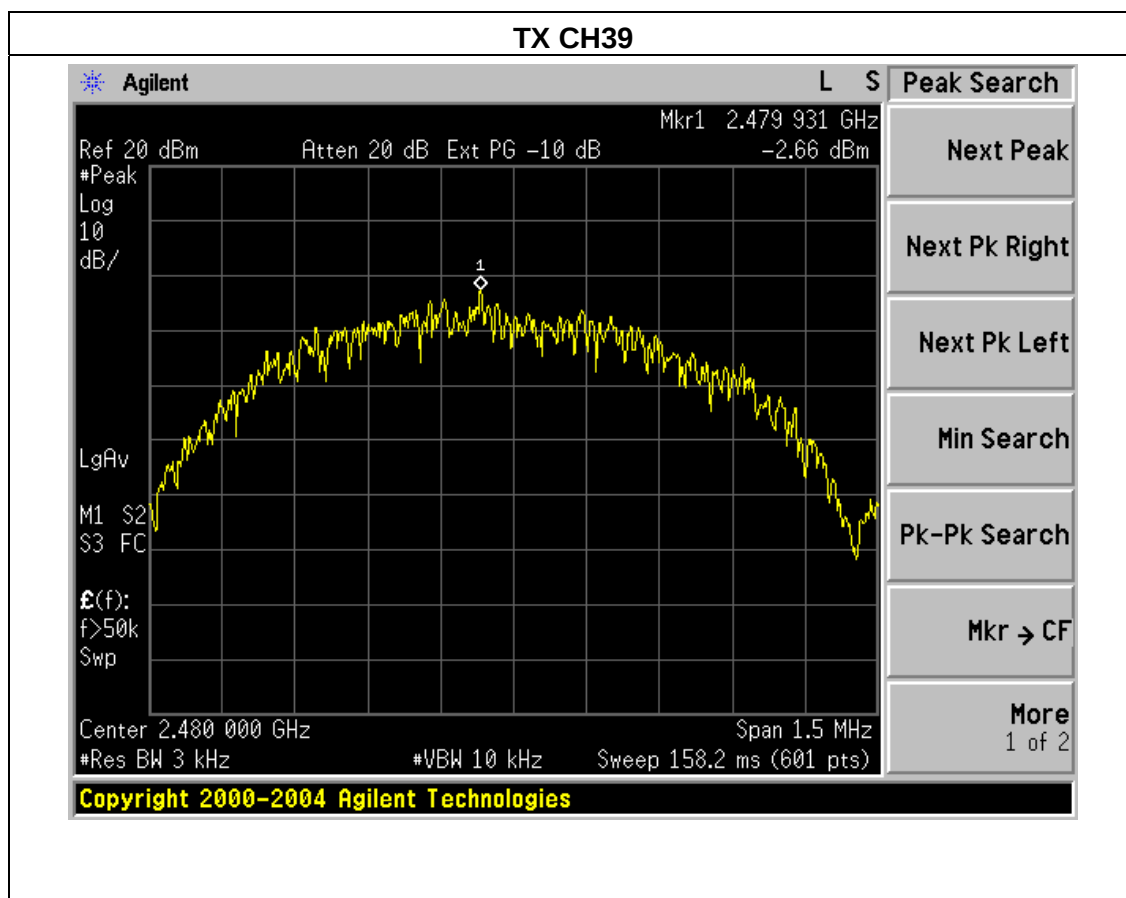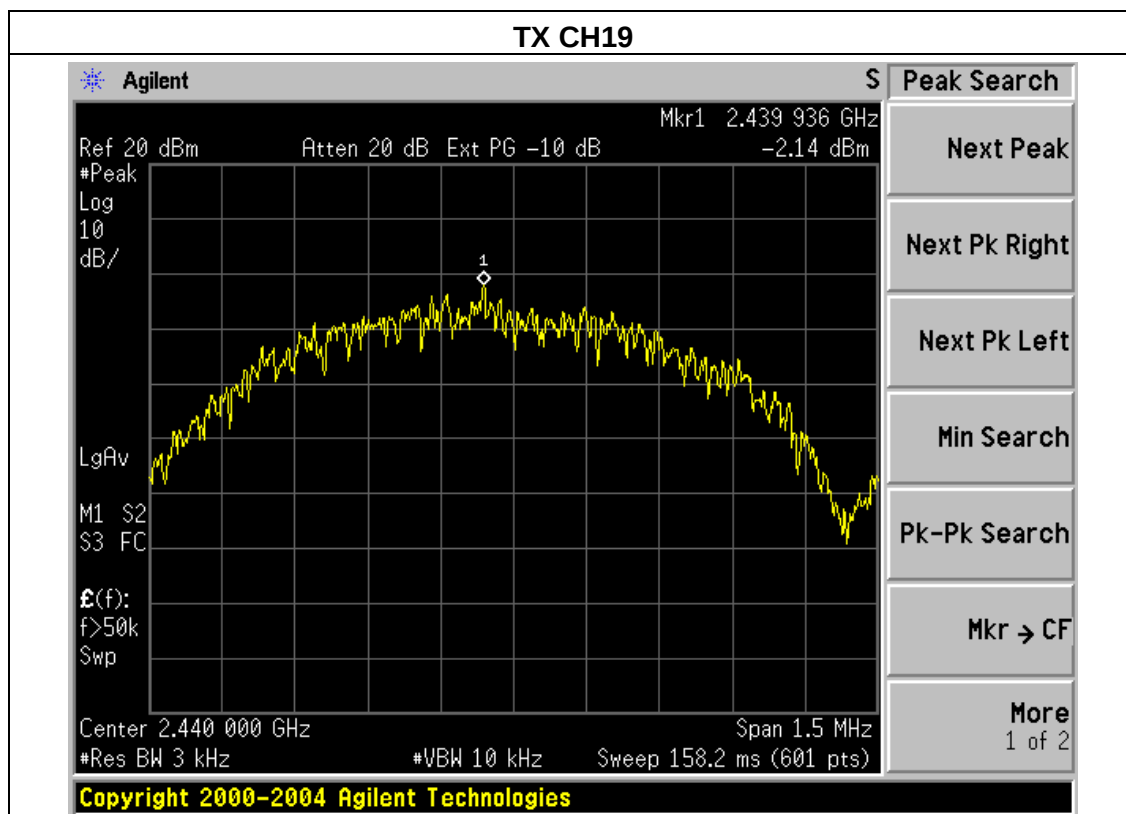

5. BANDWIDTH TEST


5.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

5.1.1 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

TEST SETUP

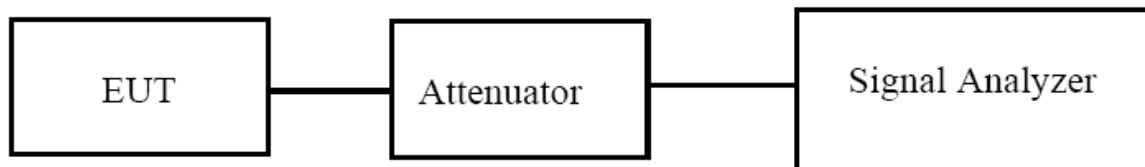


5.1.2 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


5.1.3 TEST RESULTS

EUT :	8 Inch Full Ruggedized Tablet	Model Name :	xTablet T8500
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX Mode /CH00, CH19, CH39		


Channel	Frequency (MHz)	6dB bandwidth (kHz)	Limit (kHz)	Result
Low	2402	634.220	500	Pass
Middle	2440	631.522	500	Pass
High	2480	634.621	500	Pass

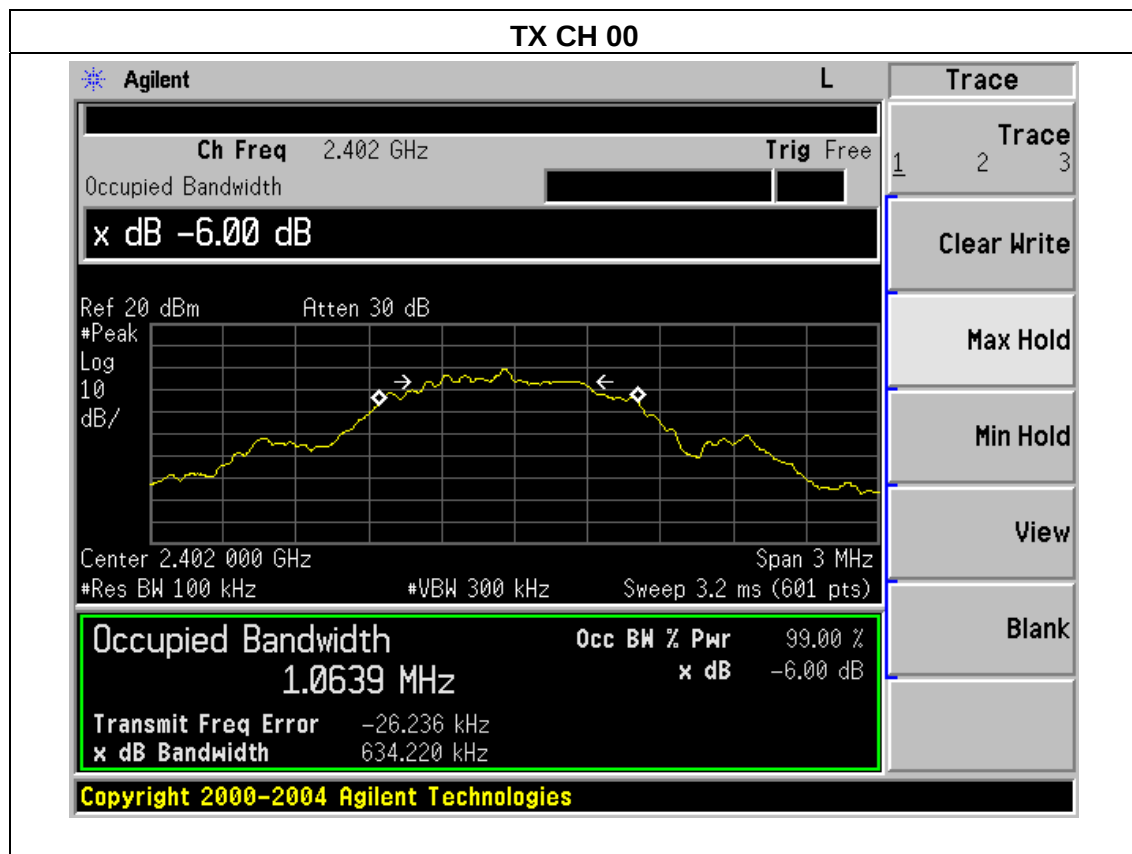

TX CH 19

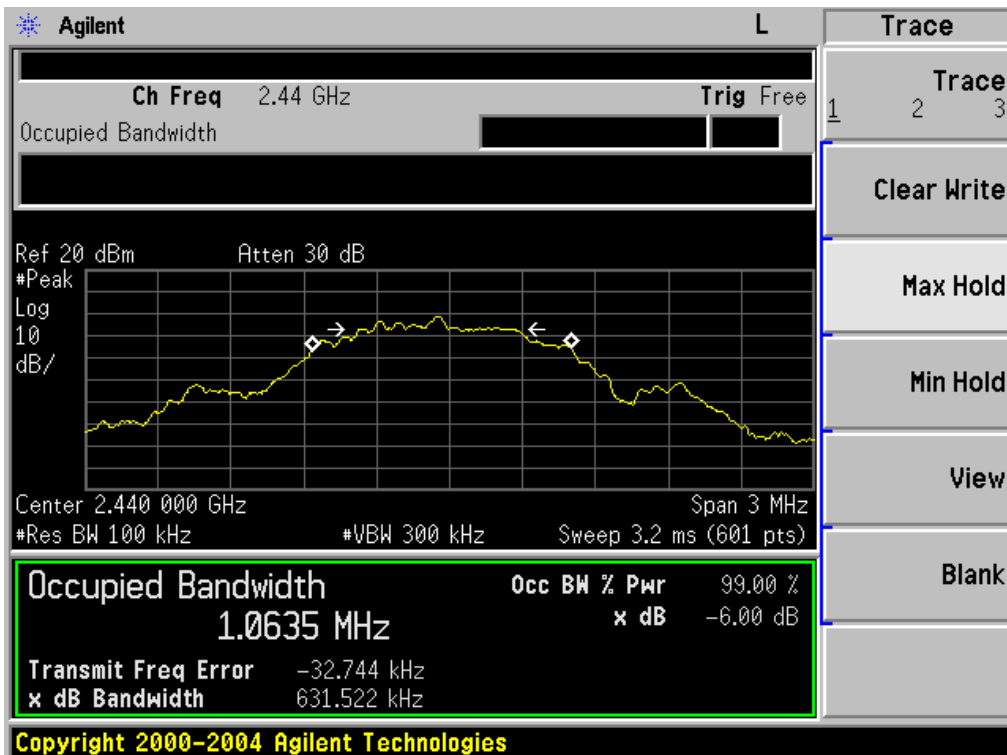

TX CH 39

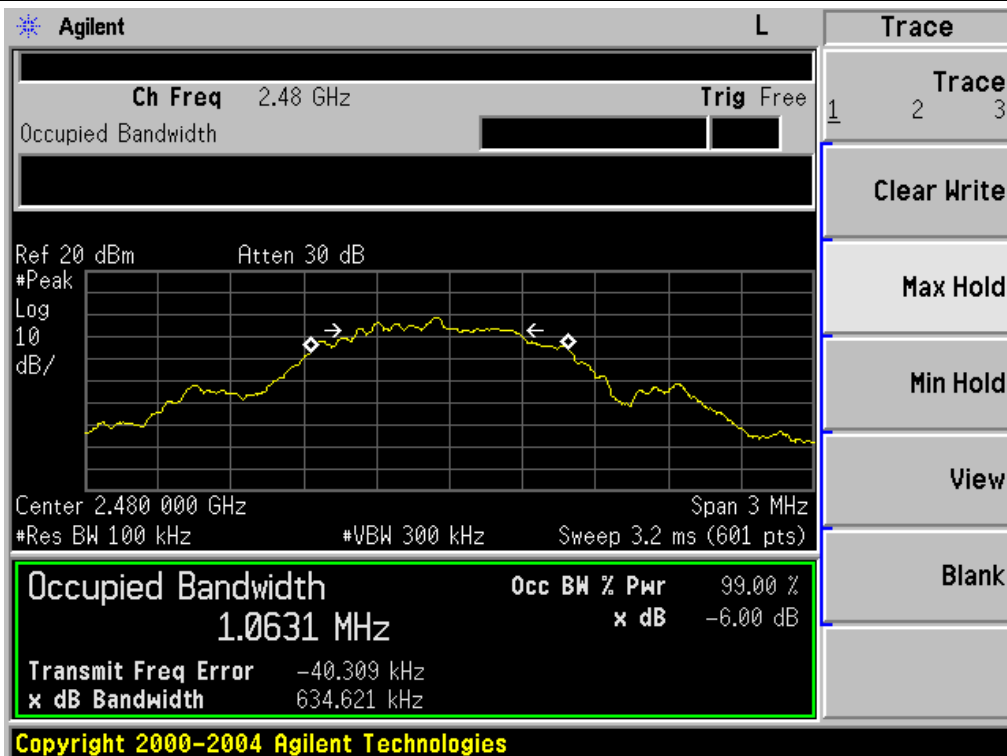

6. PEAK OUTPUT POWER TEST

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS


6.1.1 TEST PROCEDURE

- a. The testing follows KDB 558074 DTS 01 Meas. Guidance v03r03
The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
Set to the maximum power setting and enable the EUT transmit continuously.
The EUT was operating in controlled its channel.
Use the following spectrum analyzer settings:
Set the RBW $\geq$ DTS bandwidth (about 1MHz).
Set VBW = 3*RBW (about 3MHz)
Set the span $\geq$ 3*RBW
Set Sweep time = auto couple.
Set Detector = peak.
Set Trace mode = max hold.
Use the spectrum analyzer's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some analyzers, this may require a manual override to ensure use of peak detector). If the spectrum analyzer does not have a band power function, sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS channel bandwidth.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP

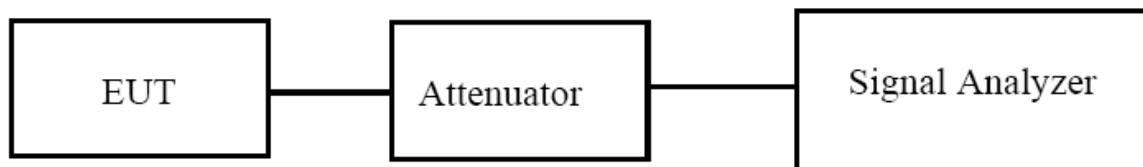

6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

Duty Cycle:


Duty Cycle	100%
------------	------





6.1.5 TEST RESULTS

EUT :	8 Inch Full Ruggedized Tablet	Model Name :	xTablet T8500
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX Mode		

Test Channe	Frequency	Maximum Conducted Output Power(PK)	LIMIT
	(MHz)	(dBm)	dBm
CH00	2402	2.09	30
CH19	2440	1.76	30
CH39	2480	1.73	30

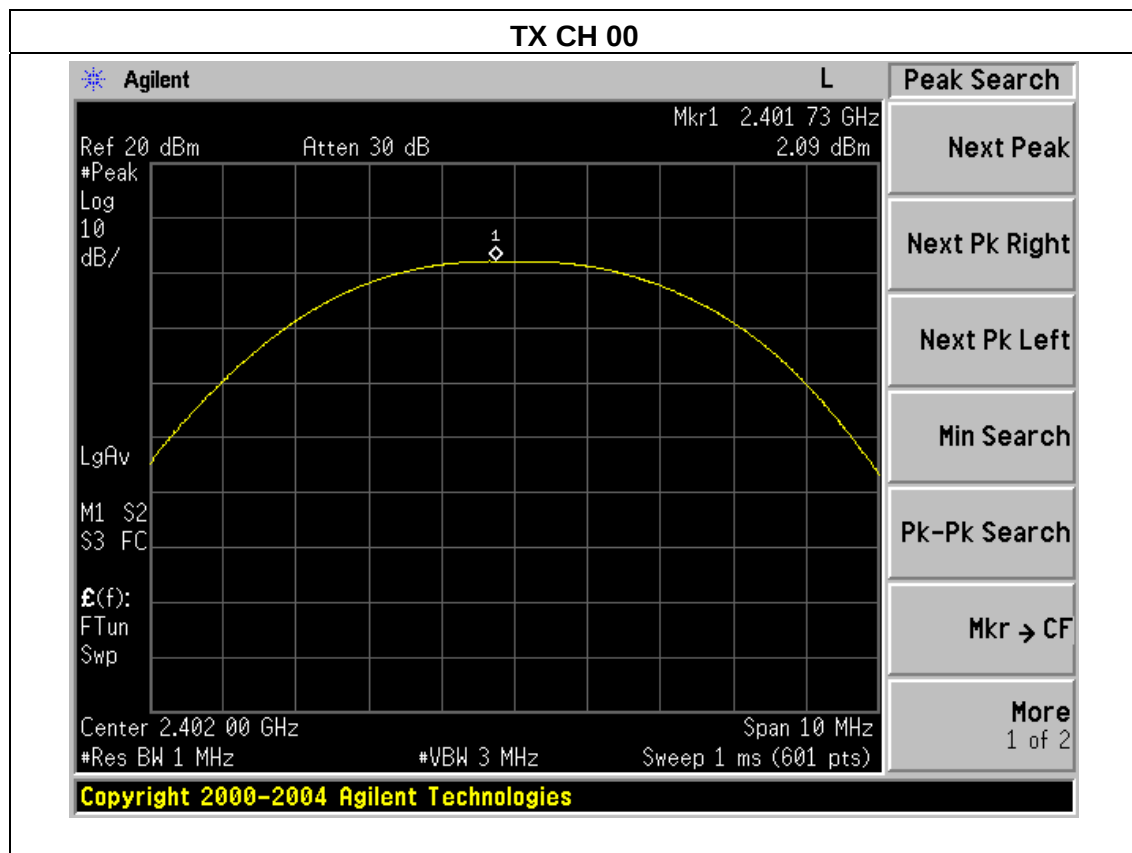

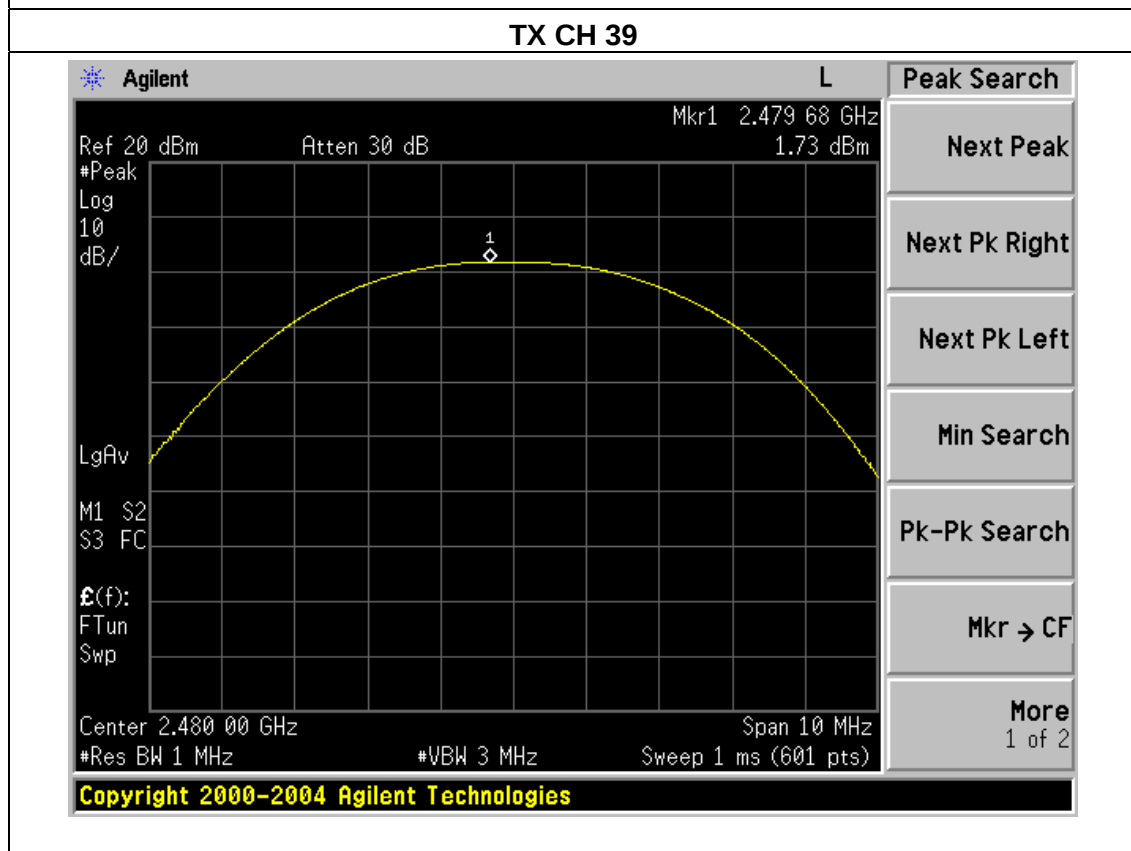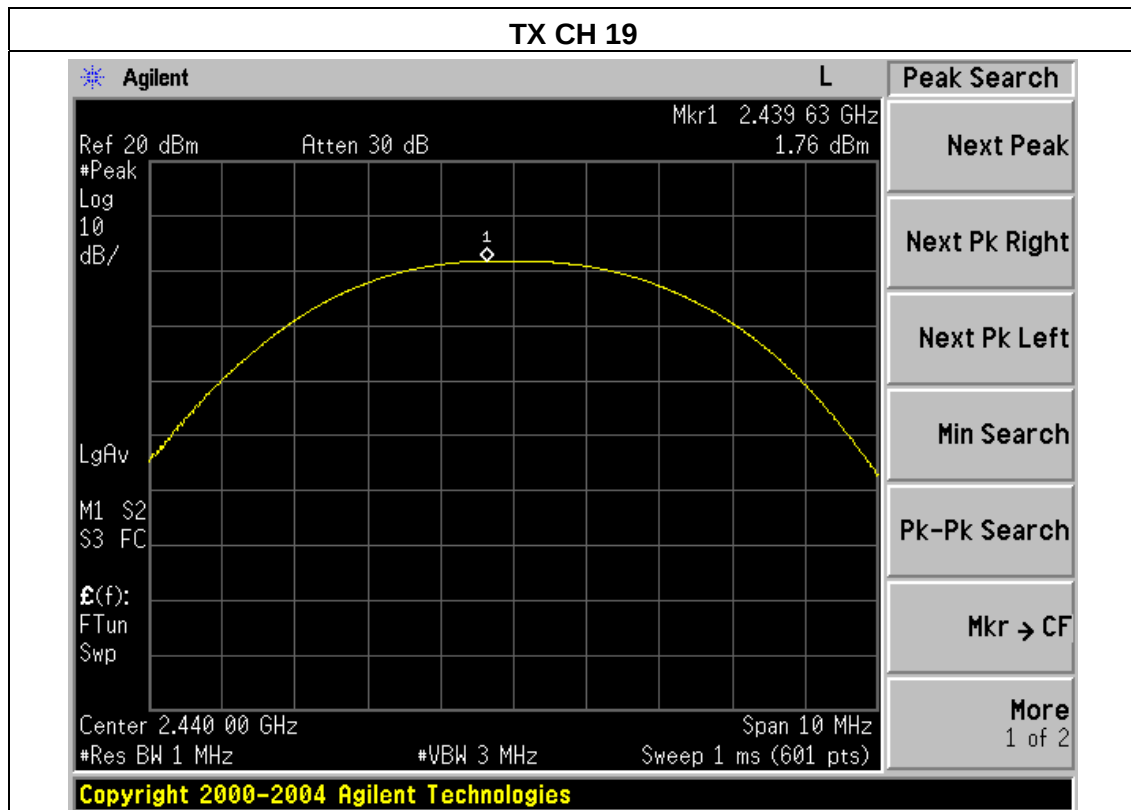

7. 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE

APPLICABLE STANDARD

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


TEST PROCEDURE

- a) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b) Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- c) Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- d) Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- e) Repeat above procedures until all measured frequencies were complete.

7.1 DEVIATION FROM STANDARD

No deviation.

7.2 TEST SETUP

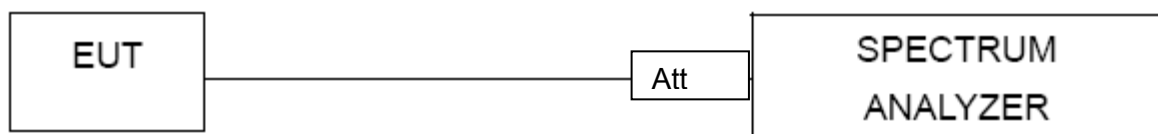

7.3 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

7.4 TEST RESULTS


EUT :	8 Inch Full Ruggedized Tablet	Model Name :	xTablet T8500
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V

Frequency Band	Delta Peak to band emission (dBc)	> Limit (dBc)	Result
Left-band	58.08	20	Pass
Right-band	62.81	20	Pass

Left Side

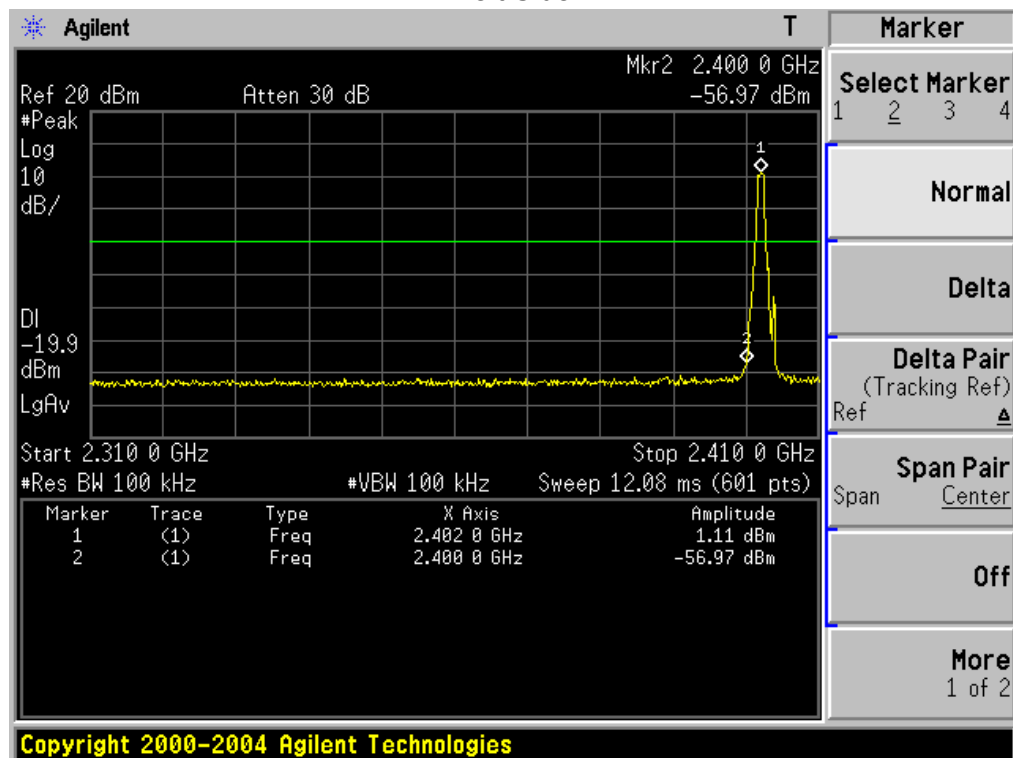

Right Side

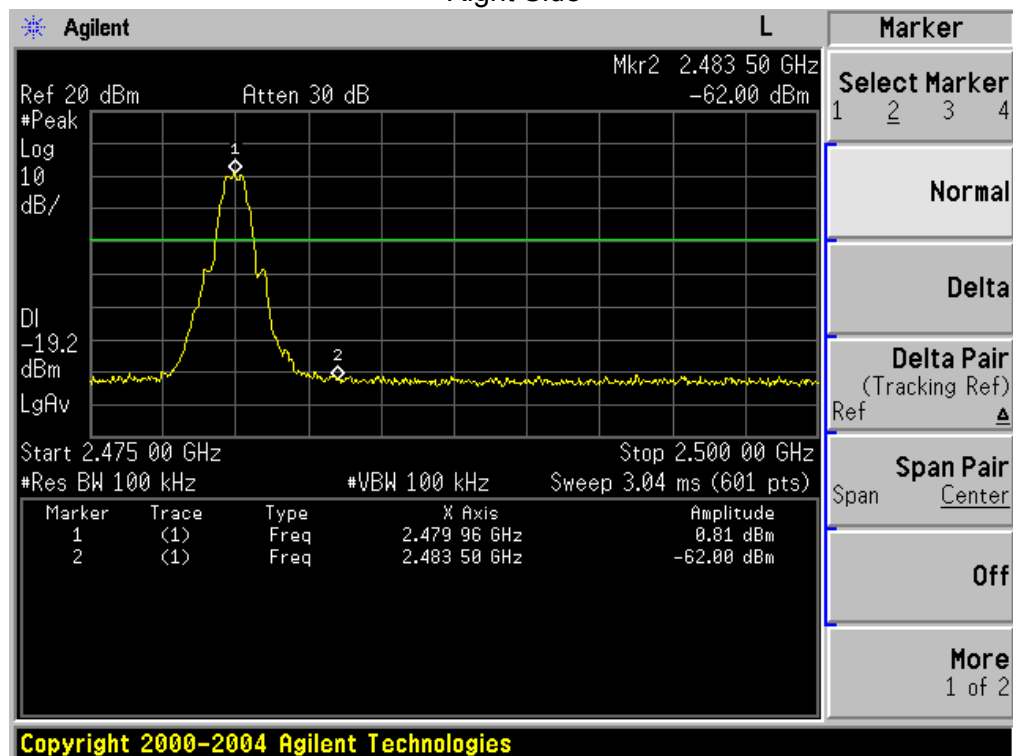

8. ANTENNA REQUIREMENT

8.1 STANDARD REQUIREMENT


15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

8.2 EUT ANTENNA

The EUT antenna is permanent attached antenna. It comply with the standard requirement.

9. EUT TEST PHOTO

Radiated Measurement Photos

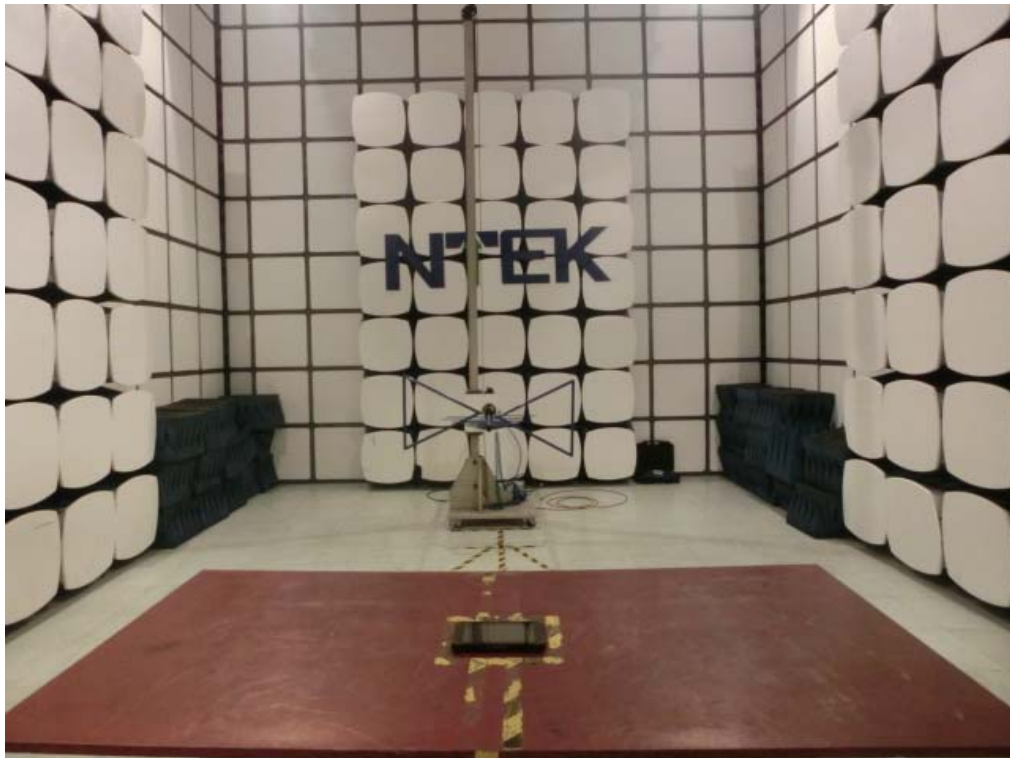

Conducted Measurement Photos