



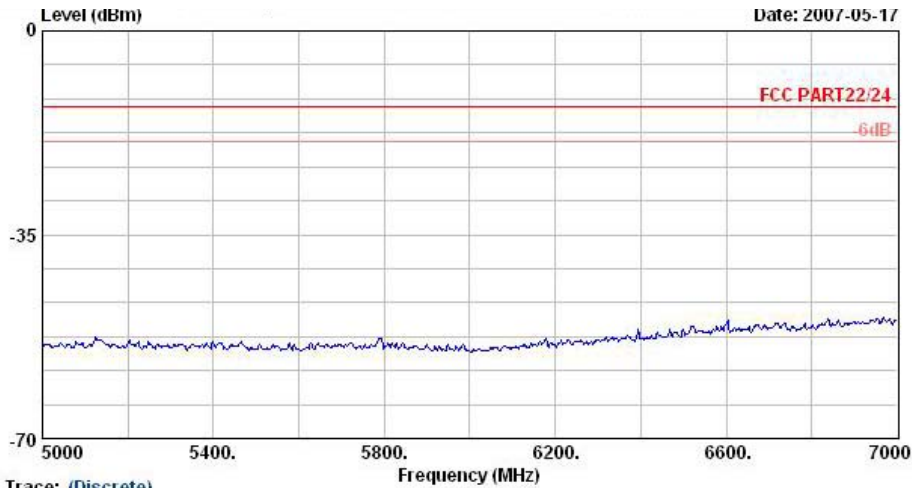

Trace: (Discrete)

Site : 03CH06-HY
Condition : HF-SPURIOUS HORIZONTAL
EUT : PDA Phone
Power : 120Vac/60Hz
Model : FG 750806
Memo : CDMA2000 PCS Link Mode;Ch600
Memo : Adaptor 1+Earphone
Plane : E2
S/N : AE2-1167

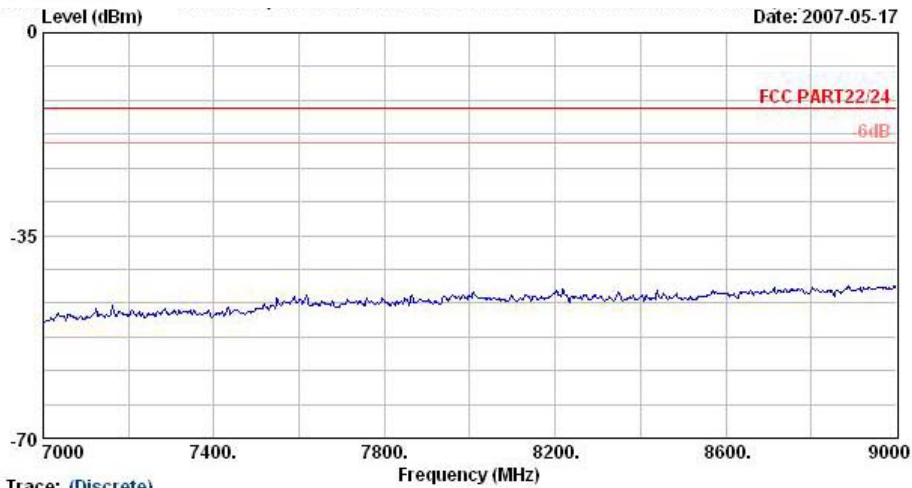


Trace: (Discrete)

Site : 03CH06-HY
Condition : HF-SPURIOUS HORIZONTAL
EUT : PDA Phone
Power : 120Vac/60Hz
Model : FG 750806
Memo : CDMA2000 PCS Link Mode;Ch600
Memo : Adaptor 1+Earphone
Plane : E2
S/N : AE2-1167




FCC/IC TEST REPORT


Report No. : FG750806

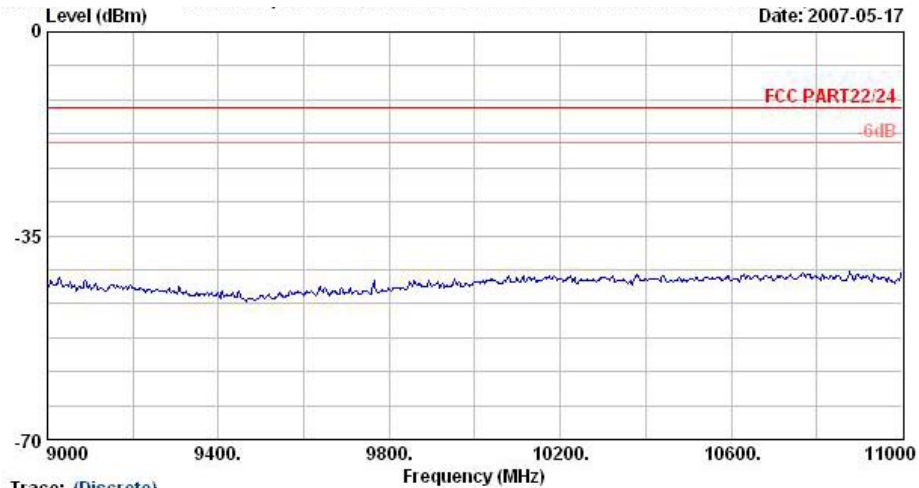

Site : 03CH06-HY
Condition : HF-SPURIOUS HORIZONTAL
EUT : PDA Phone
Power : 120Vac/60Hz
Model : FC 750806
Memo : CDMA2000 PCS Link Mode;Ch600
Memo : Adaptor 1+Earphone
Plane : E2
S/N : AE2-1167

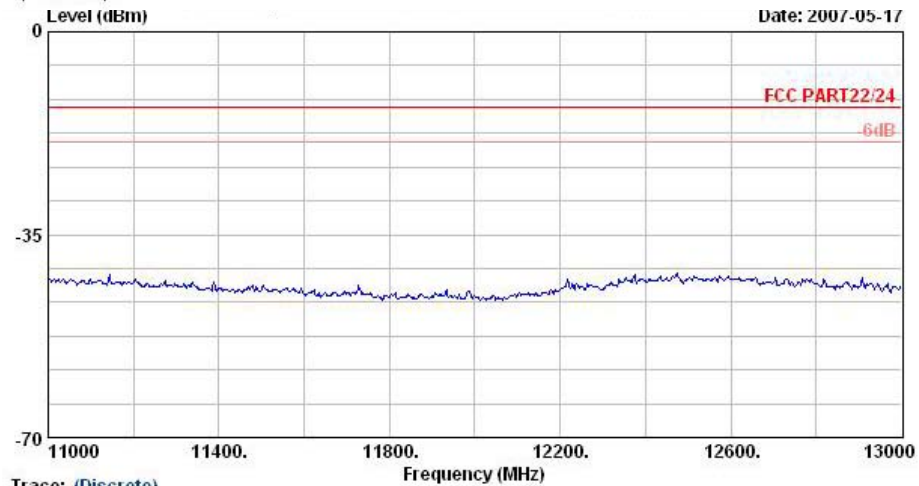


Site : 03CH06-HY
Condition : HF-SPURIOUS HORIZONTAL
EUT : PDA Phone
Power : 120Vac/60Hz
Model : FC 750806
Memo : CDMA2000 PCS Link Mode;Ch600
Memo : Adaptor 1+Earphone
Plane : E2
S/N : AE2-1167

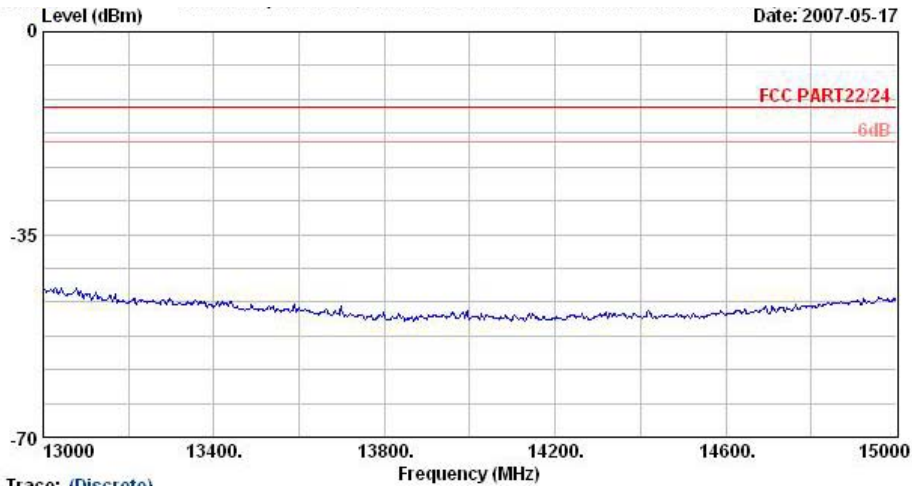

Trace: (Discrete)

Site : 03CH06-HY
Condition : HF-SPURIOUS HORIZONTAL
EUT : PDA Phone
Power : 120Vac/60Hz
Model : FG 750806
Memo : CDMA2000 PCS Link Mode;Ch600
Memo : Adaptor I+Earphone
Plane : E2
S/N : AE2-1167

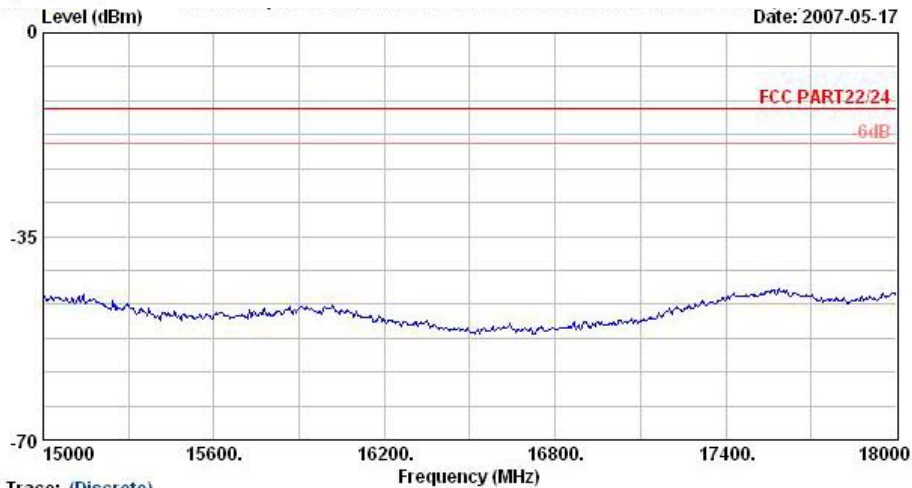


Trace: (Discrete)

Site : 03CH06-HY
Condition : HF-SPURIOUS HORIZONTAL
EUT : PDA Phone
Power : 120Vac/60Hz
Model : FG 750806
Memo : CDMA2000 PCS Link Mode;Ch600
Memo : Adaptor I+Earphone
Plane : E2
S/N : AE2-1167

Remark: There's no more obvious spurious emission except the listings above.




Vertical Polarization

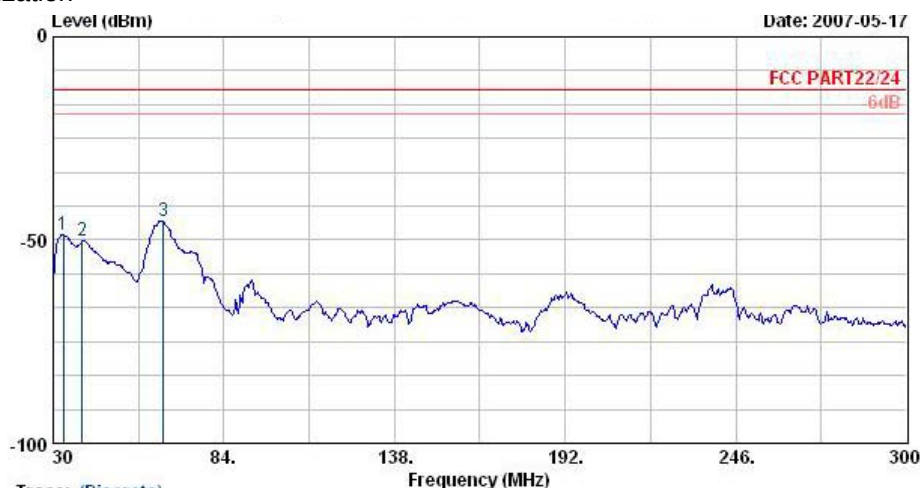

Trace: (Discrete)

Site : D3CH06-HY
Condition : LF-SPURIOUS VERTICAL
EUT : PDA Phone
Power : 120Vac/60Hz
Model : FG 750806
Memo : CDMA2000 PCS Link Mode;Ch600
Memo : Adaptor 1+Earphone
Plane : E2
S/N : AE2-1167


	Freq	Level	Over	Limit	Read	
	MHz	dBm	Limit	Line	Level	Factor Remark
			dB	dBm	dBm	dB
1 @	33.24	-48.53	-35.53	-13.00	-38.64	-9.89 Peak
2 @	39.18	-50.22	-37.22	-13.00	-38.68	-11.53 Peak
3 @	64.83	-45.18	-32.18	-13.00	-32.46	-12.72 Peak

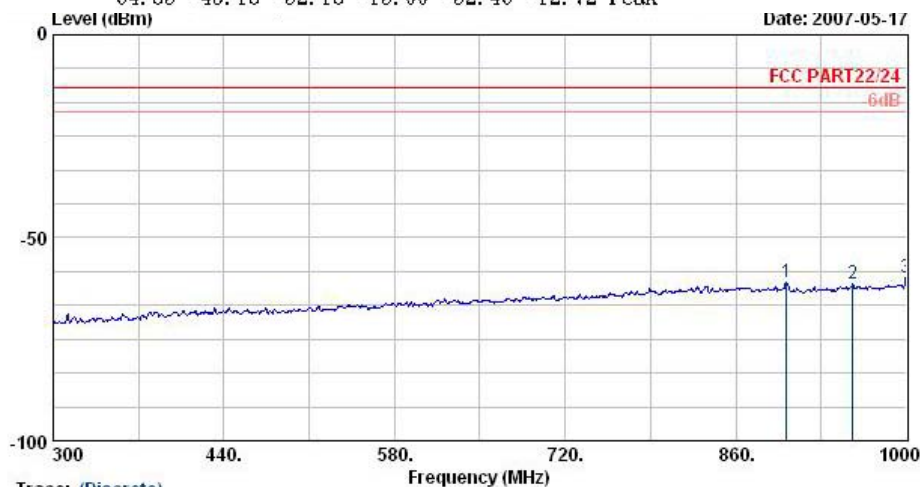

Trace: (Discrete)

Site : D3CH06-HY
Condition : LF-SPURIOUS VERTICAL
EUT : PDA Phone
Power : 120Vac/60Hz
Model : FG 750806
Memo : CDMA2000 PCS Link Mode;Ch600
Memo : Adaptor 1+Earphone
Plane : E2
S/N : AE2-1167

	Freq	Level	Over	Limit	Read	
	MHz	dBm	Limit	Line	Level	Factor Remark
			dB	dBm	dBm	dB
1 @	901.30	-61.07	-48.07	-13.00	-62.94	1.87 Peak
2 @	955.90	-61.33	-48.33	-13.00	-63.64	2.31 Peak
3 @	1000.00	-59.97	-46.97	-13.00	-62.63	2.66 Peak

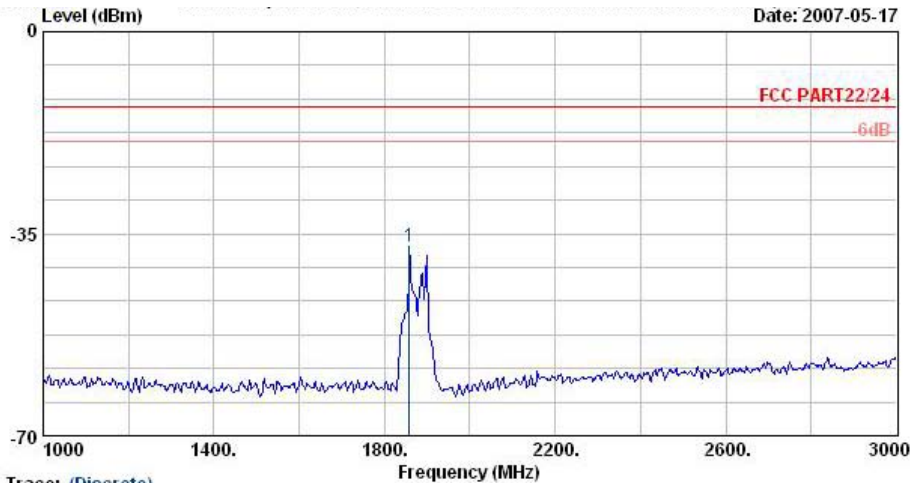


Trace: (Discrete)

Site : 03CH06-HY
Condition : HF-SPURIOUS VERTICAL
EUT : PDA Phone
Power : 120Vac/60Hz
Model : FG 750806
Memo : CDMA2000 PCS Link Mode;Ch600
Adaptor 1+Earphone
Plane : E2
S/N : AE2-1167

	Freq	Level	Over	Limit	Read		
	MHz	dBm	Limit	Line	Level	Factor	Remark
			dB	dBm	dBm	dB	
1 @	1858.00	-37.26			-36.86	-0.40	Peak


Remark: #1: MS Signal

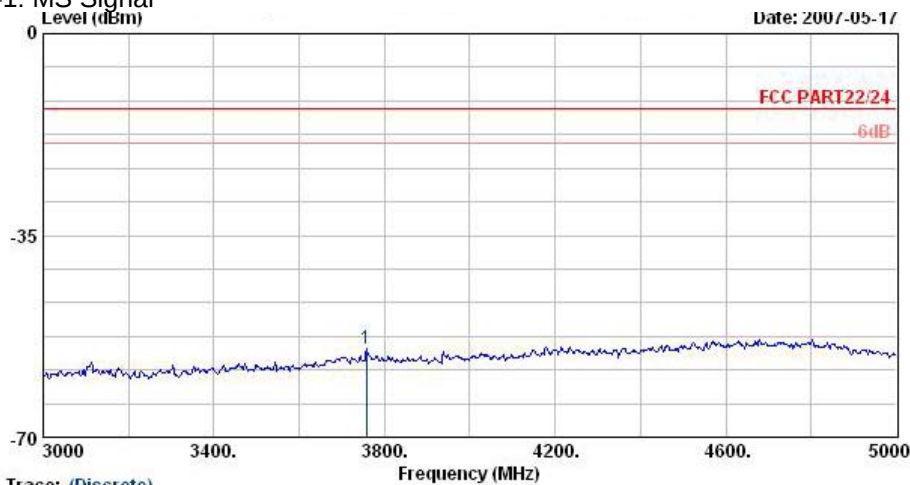

Trace: (Discrete)


Site : 03CH06-HY
Condition : HF-SPURIOUS VERTICAL
EUT : PDA Phone
Power : 120Vac/60Hz
Model : FG 750806
Memo : CDMA2000 PCS Link Mode;Ch600
Adaptor 1+Earphone
Plane : E2
S/N : AE2-1167

	Freq	Level	Over	Limit	Read		
	MHz	dBm	Limit	Line	Level	Factor	Remark
			dB	dBm	dBm	dB	
1 @	3758.00	-54.61	-41.61	-13.00	-61.25	6.64	Peak

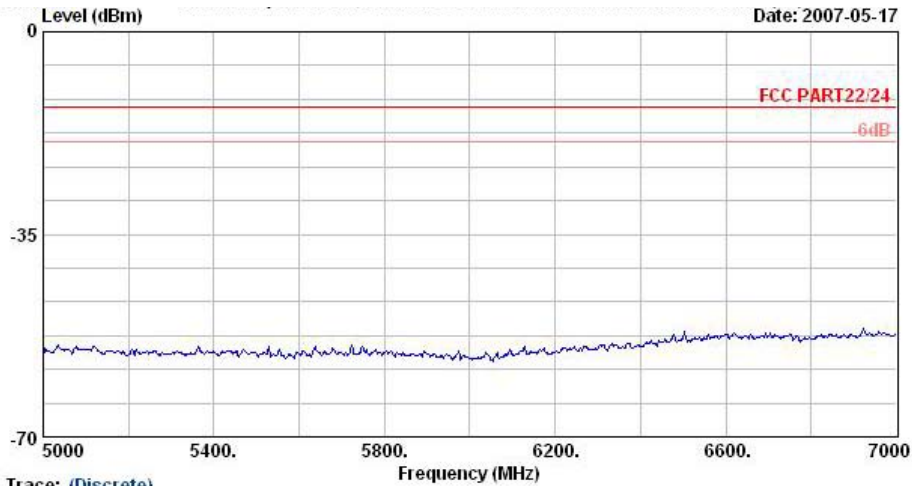

Trace: (Discrete)


Site : 03CH06-HY
Condition : HF-SPURIOUS VERTICAL
EUT : PDA Phone
Power : 120Vac/60Hz
Model : FG 750806
Memo : CDMA2000 PCS Link Mode;Ch600
Memo : Adaptor I+Earphone
Plane : E2
S/N : AE2-1167

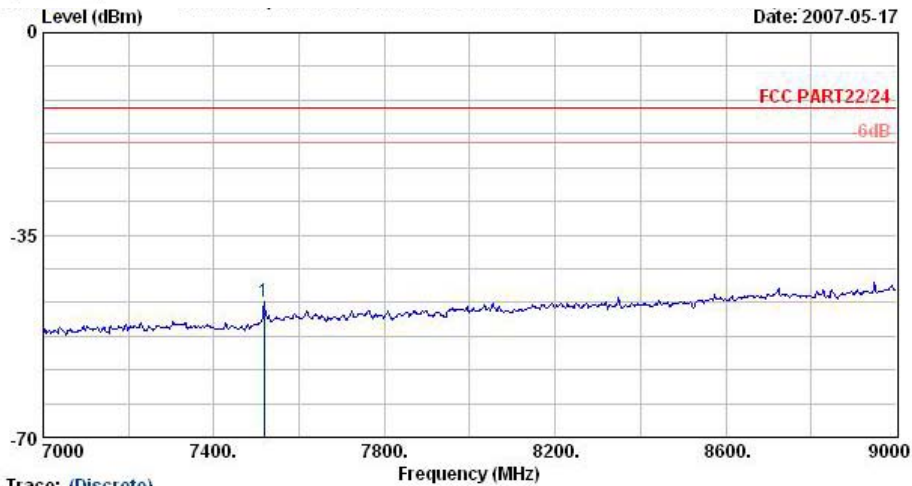

Trace: (Discrete)

Site : 03CH06-HY
Condition : HF-SPURIOUS VERTICAL
EUT : PDA Phone
Power : 120Vac/60Hz
Model : FG 750806
Memo : CDMA2000 PCS Link Mode;Ch600
Memo : Adaptor I+Earphone
Plane : E2
S/N : AE2-1167

	Freq	Level	Over	Limit	Read		
	MHz	dBm	Limit	Line	Level	Factor	Remark
		dBm	dB	dBm	dBm	dB	
1 @	7518.00	-46.61	-33.61	-13.00	-59.98	13.37	Peak

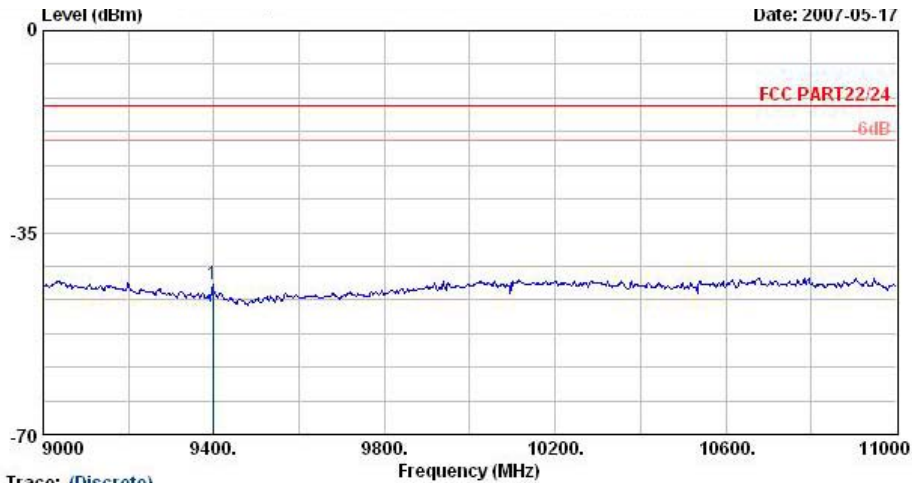


Trace: (Discrete)

Site : 03CH06-HY
Condition : HF-SPURIOUS VERTICAL
EUT : PDA Phone
Power : 120Vac/60Hz
Model : FG 750806
Memo : CDMA2000 PCS Link Mode;Ch600
Adaptor : I+Earphone
Plane : E2
S/N : AE2-1167


Freq	Level	Over	Limit	Read	Factor	Remark
MHz	dBm	dB	dBm	dBm	dB	
9398.00	-44.06	-31.06	-13.00	-61.26	17.20	Peak

1 @	9398.00	-44.06	-31.06	-13.00	-61.26	17.20	Peak
-----	---------	--------	--------	--------	--------	-------	------

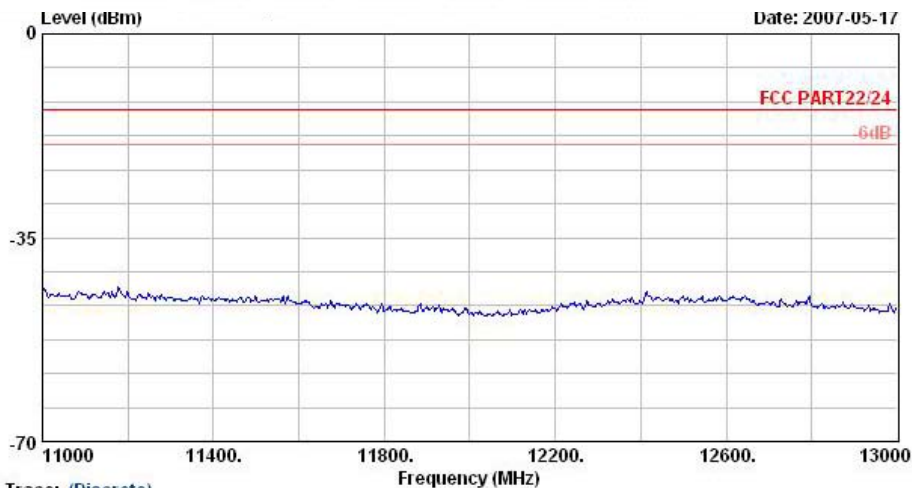


Trace: (Discrete)

Site : 03CH06-HY
Condition : HF-SPURIOUS VERTICAL
EUT : PDA Phone
Power : 120Vac/60Hz
Model : FG 750806
Memo : CDMA2000 PCS Link Mode;Ch600
Adaptor : I+Earphone
Plane : E2
S/N : AE2-1167

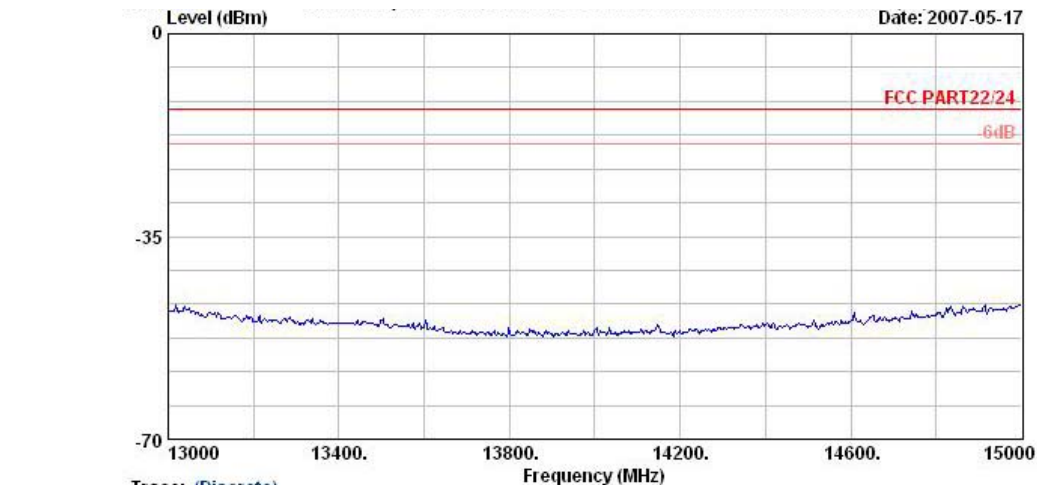

Trace: (Discrete)

Site : 03CH06-HY
Condition : HF-SPURIOUS VERTICAL
EUT : PDA Phone
Power : 120Vac/60Hz
Model : FG 750806
Memo : CDMA2000 PCS Link Mode;Ch600
Memo : Adaptor I+Earphone
Plane : E2
S/N : AE2-1167

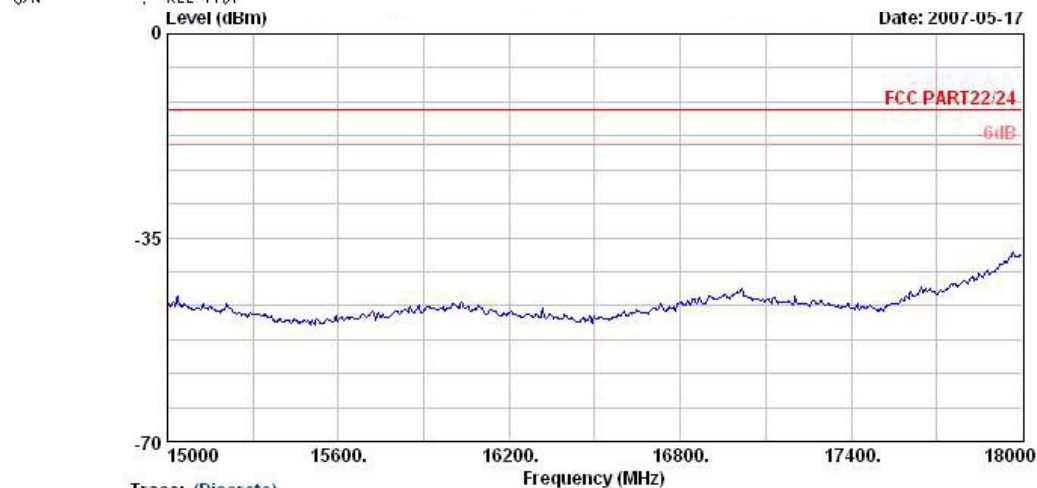

Trace: (Discrete)



Site : 03CH06-HY
Condition : HF-SPURIOUS VERTICAL
EUT : PDA Phone
Power : 120Vac/60Hz
Model : FG 750806
Memo : CDMA2000 PCS Link Mode;Ch600
Memo : Adaptor I+Earphone
Plane : E2
S/N : AE2-1167

Remark : There is no more obvious emission except the listings above.



4.6.5.4 Mode 4


Horizontal Polarization

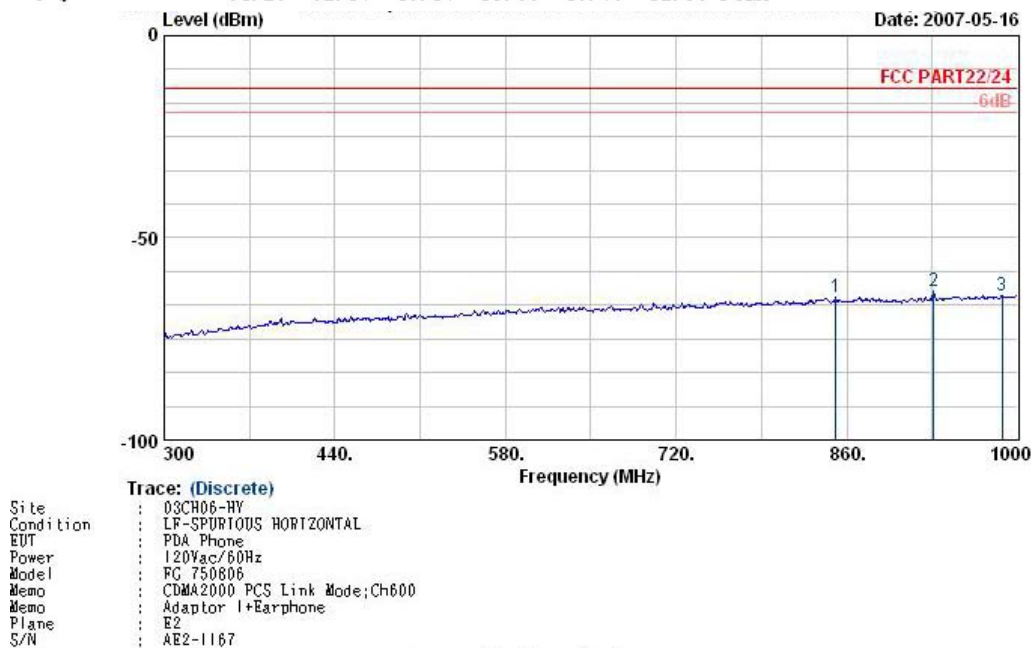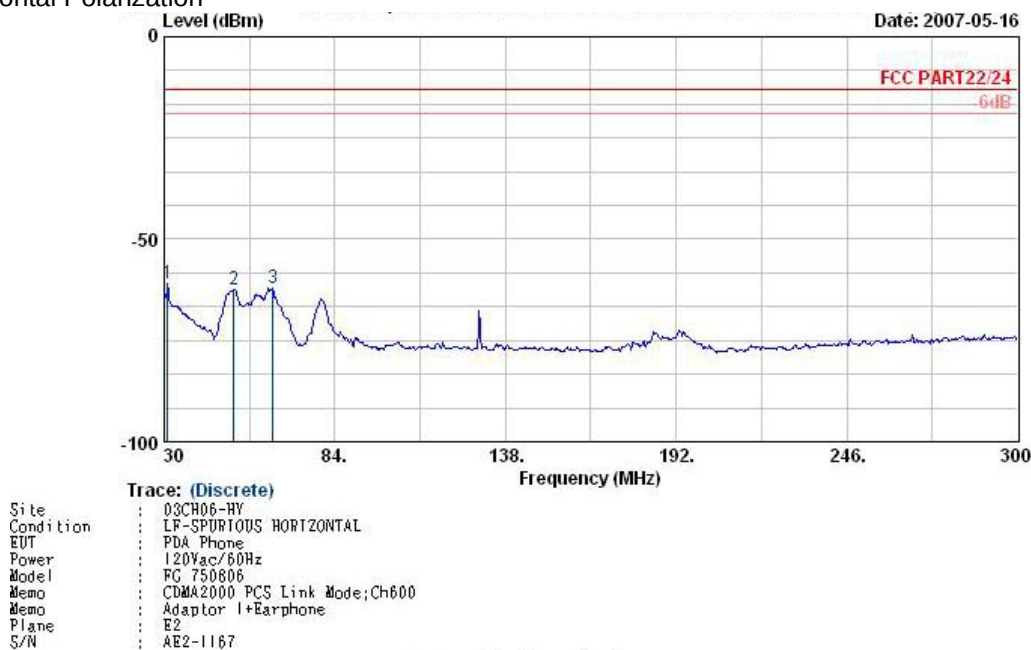



FCC/IC TEST REPORT

Report No. : FG750806

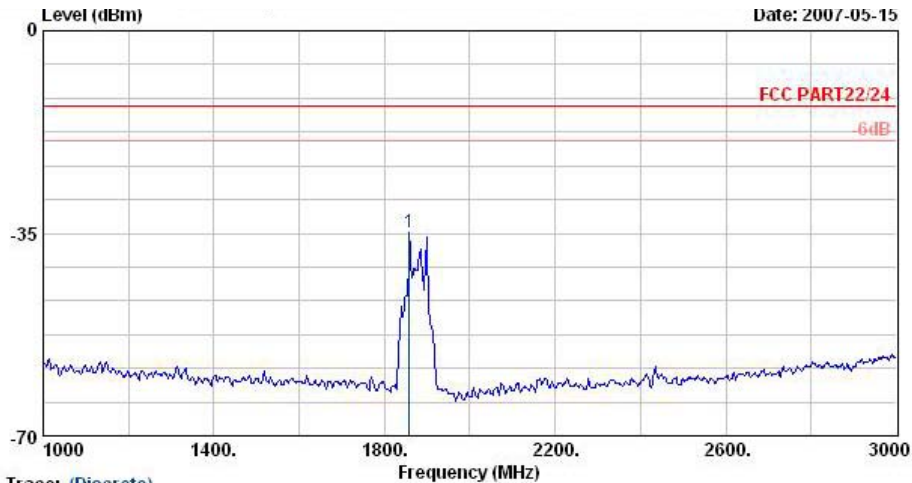


Trace: (Discrete)

Site : 03CH06-HY
Condition : HF-SPURIOUS HORIZONTAL
EUT : PDA Phone
Power : 120Vac/60Hz
Model : FG 750806
Memo : CDMA2000 PCS Link Mode;Ch600
Memo : Adaptor I+Earphone
Plane : E2
S/N : AE2-1167

	Freq	Level	Over	Limit	Read		
	MHz	dBm	Limit	Line	Level	Factor	Remark
			dB	dBm	dBm	dB	
1 @	1858.00	-34.78			-34.27	-0.51	Peak

Remark: #1: MS Signal

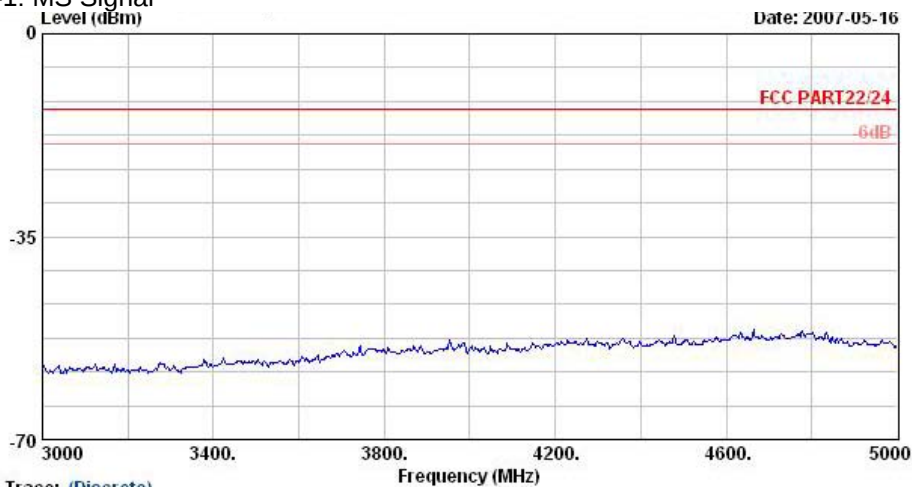

Trace: (Discrete)

Site : 03CH06-HY
Condition : HF-SPURIOUS HORIZONTAL
EUT : PDA Phone
Power : 120Vac/60Hz
Model : FG 750806
Memo : CDMA2000 PCS Link Mode;Ch600
Memo : Adaptor I+Earphone
Plane : E2
S/N : AE2-1167

SPORTON International Inc.

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255


FCC ID : O8F-747

IC ID : 3905A-747


Page No. : 107 of 126

Report Issued Date : Jun. 04, 2007

Report Version : Rev. 01

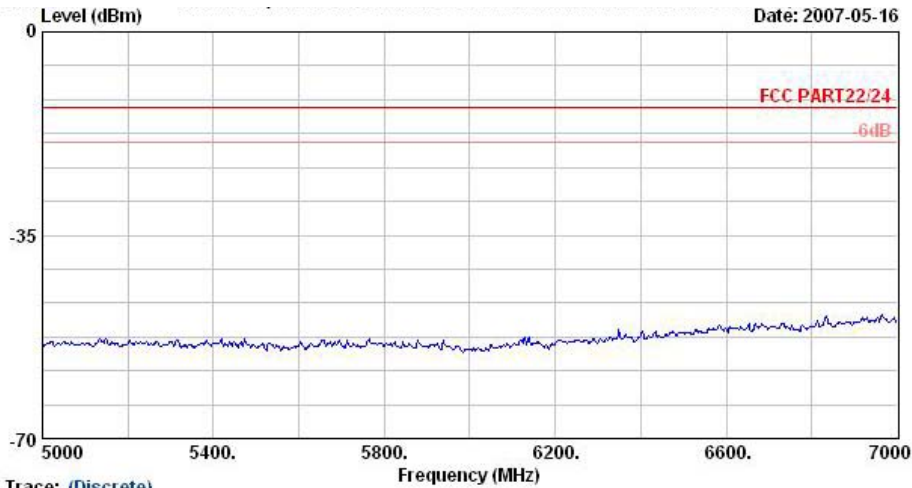**Trace: (Discrete)**

Site : 03CH06-HY
Condition : HF-SPURIOUS HORIZONTAL
EUT : PDA Phone
Power : 120Vac/60Hz
Model : FG 750806
Memo : CDMA2000 PCS Link Mode;Ch600
Memo : Adaptor I+Earphone
Plane : E2
S/N : AE2-1167

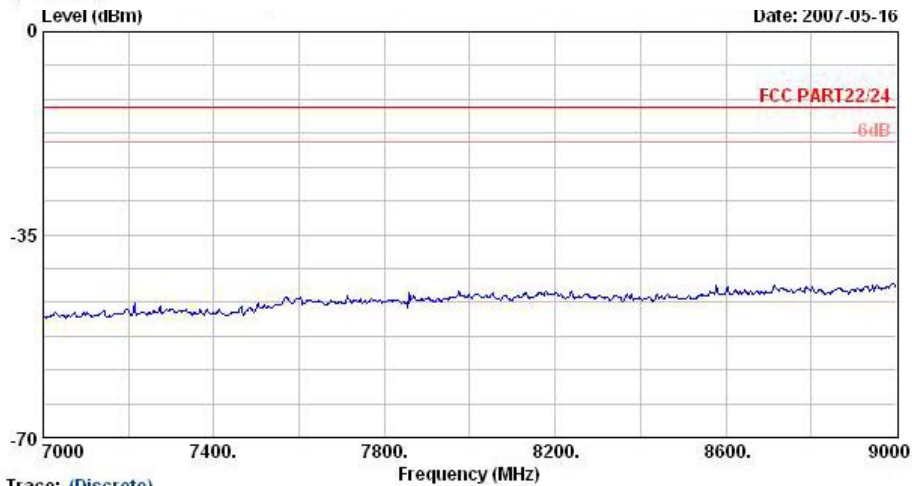
**Trace: (Discrete)**

Site : 03CH06-HY
Condition : HF-SPURIOUS HORIZONTAL
EUT : PDA Phone
Power : 120Vac/60Hz
Model : FG 750806
Memo : CDMA2000 PCS Link Mode;Ch600
Memo : Adaptor I+Earphone
Plane : E2
S/N : AE2-1167




FCC/IC TEST REPORT

Report No. : FG750806

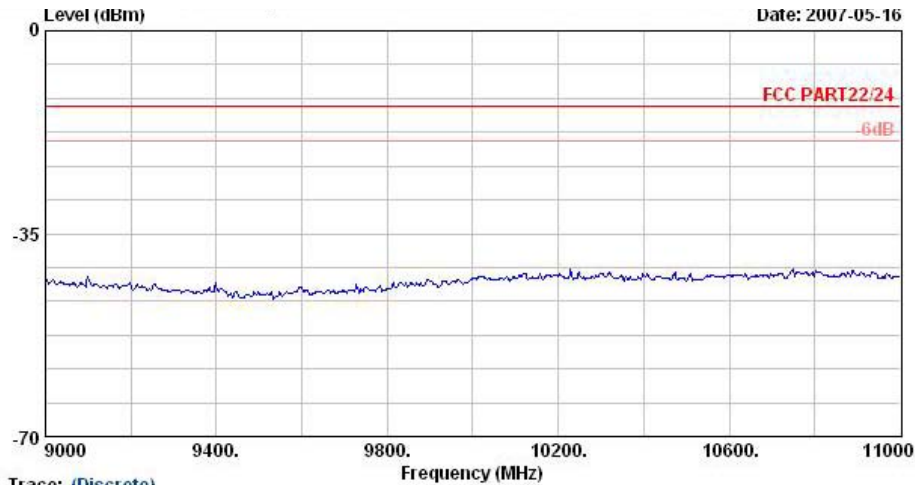



Trace: (Discrete)

Site : 03CH06-HY
Condition : HF-SPURIOUS HORIZONTAL
EUT : PDA Phone
Power : 120Vac/60Hz
Model : FG 750806
Memo : CDMA2000 PCS Link Mode;Ch600
Memo : Adaptor 1+Earphone
Plane : E2
S/N : AE2-1167

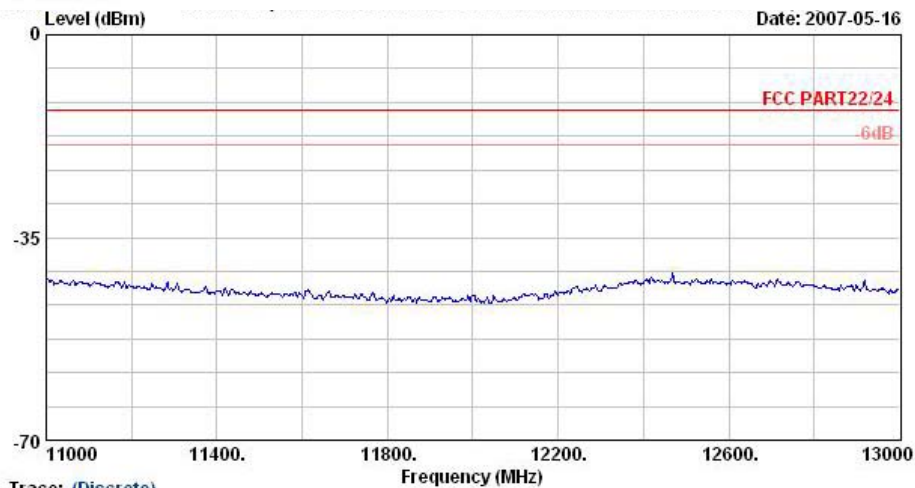

Trace: (Discrete)


Site : 03CH06-HY
Condition : HF-SPURIOUS HORIZONTAL
EUT : PDA Phone
Power : 120Vac/60Hz
Model : FG 750806
Memo : CDMA2000 PCS Link Mode;Ch600
Memo : Adaptor 1+Earphone
Plane : E2
S/N : AE2-1167

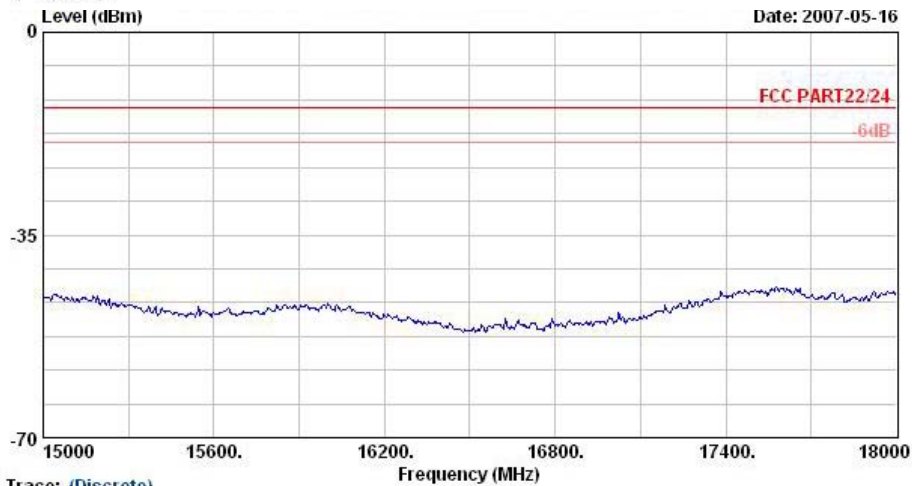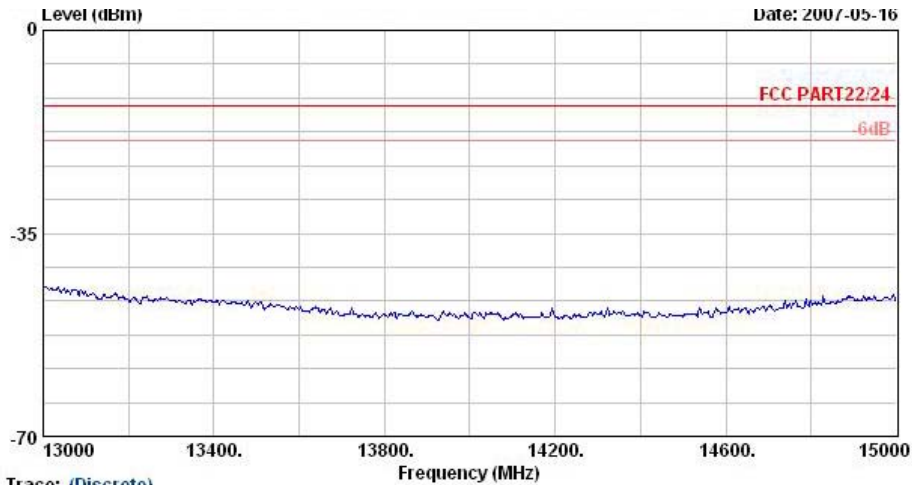

Remark: There's no more obvious spurious emission except the listings above.




Vertical Polarization

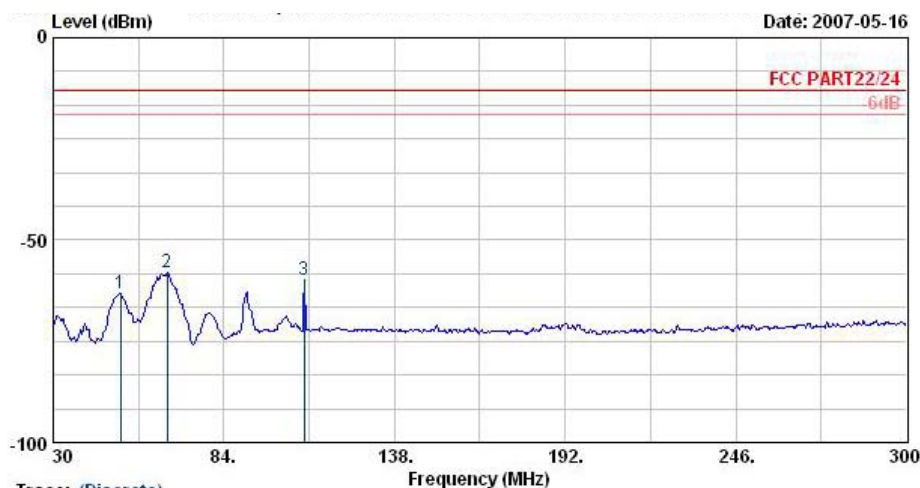

Trace: (Discrete)

Site : 03CH06-HY
Condition : LF-SPURIOUS VERTICAL
EUT : PDA Phone
Power : 120Vac/60Hz
Model : FG 750806
Memo : CDMA2000 PCS Link Mode;Ch600
Memo : Adaptor 1+Earphone
Plane : E2
S/N : AE2-1167


	Freq	Level	Over	Limit	Read	Factor	Remark
	MHz	dBm	Limit	Line	Level	dB	
1 @	51.33	-63.10	-50.10	-13.00	-48.42	-14.68	Peak
2 @	66.18	-57.88	-44.88	-13.00	-45.29	-12.58	Peak
3 @	109.38	-59.92	-46.92	-13.00	-52.14	-7.78	Peak

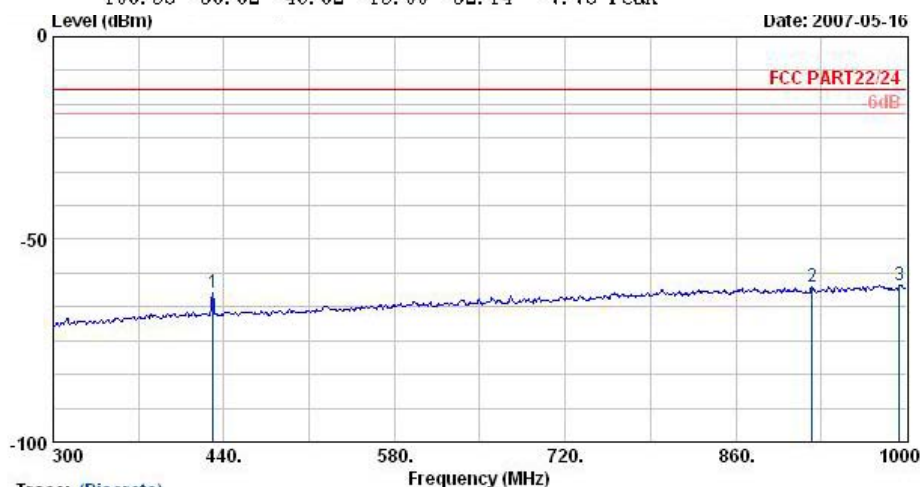

Trace: (Discrete)

Site : 03CH06-HY
Condition : LF-SPURIOUS VERTICAL
EUT : PDA Phone
Power : 120Vac/60Hz
Model : FG 750806
Memo : CDMA2000 PCS Link Mode;Ch600
Memo : Adaptor 1+Earphone
Plane : E2
S/N : AE2-1167

	Freq	Level	Over	Limit	Read	Factor	Remark
	MHz	dBm	Limit	Line	Level	dB	
1 @	430.90	-63.19	-50.19	-13.00	-59.24	-3.96	Peak
2 @	922.30	-61.68	-48.68	-13.00	-63.72	2.04	Peak
3 @	994.40	-61.30	-48.30	-13.00	-63.91	2.61	Peak

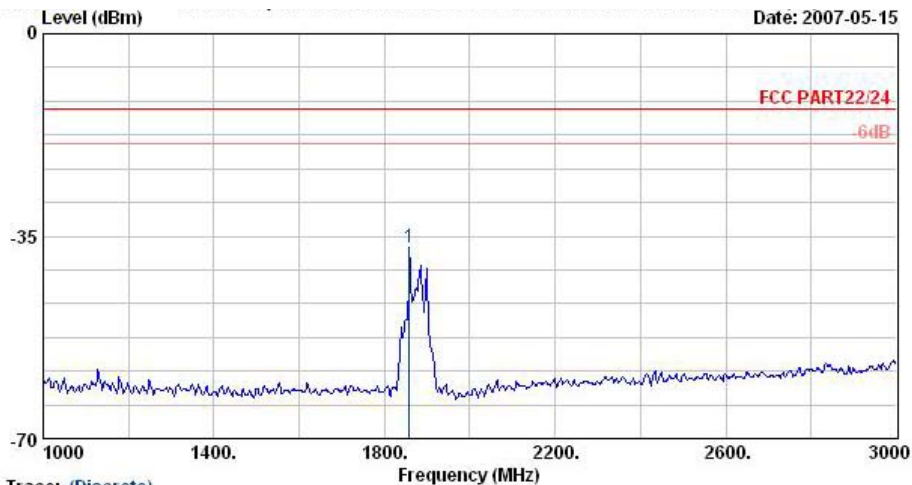


Trace: (Discrete)

Site : 03CH06-HY
Condition : HF-SPURIOUS VERTICAL
EUT : PDA Phone
Power : 120Vac/60Hz
Model : FG 750806
Memo : CDMA2000 PCS Link Mode;Ch600
Memo : Adaptor I+Earphone
Plane : E2
S/N : AE2-1167

Freq	Level	Over	Limit	Read	Factor	Remark
MHz	dBm	dB	dBm	dBm	dB	


1 @ 1858.00 -37.05 -36.65 -0.40 Peak

Remark: #1: MS Signal

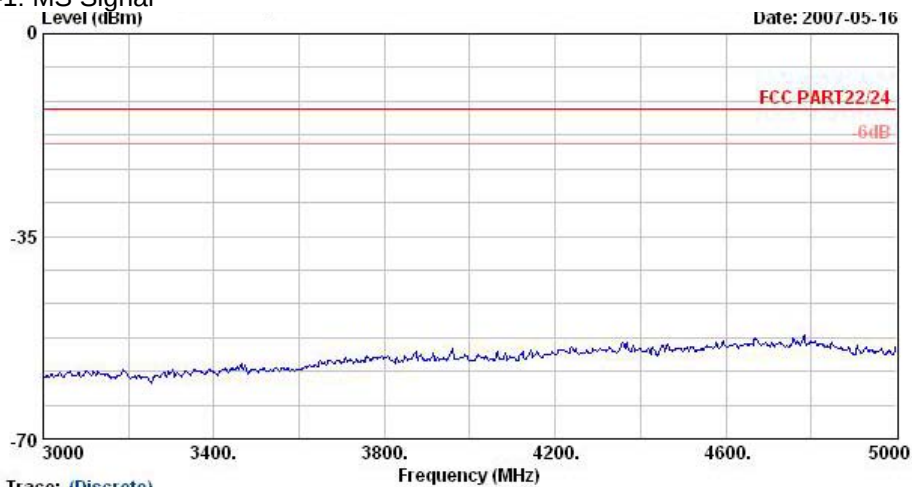

Trace: (Discrete)


Site : 03CH06-HY
Condition : HF-SPURIOUS VERTICAL
EUT : PDA Phone
Power : 120Vac/60Hz
Model : FG 750806
Memo : CDMA2000 PCS Link Mode;Ch600
Memo : Adaptor I+Earphone
Plane : E2
S/N : AE2-1167

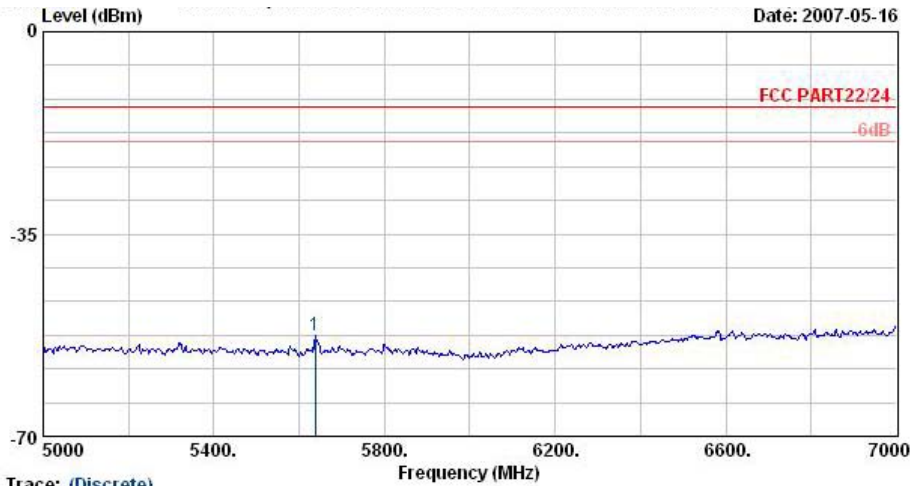

Trace: (Discrete)

Site : 03CH06-HY
Condition : HF-SPURIOUS VERTICAL
EUT : PDA Phone
Power : 120Vac/60Hz
Model : FG 750806
Memo : CDMA2000 PCS Link Mode;Ch600
Memo : Adaptor I+Earphone
Plane : E2
S/N : AE2-1167


	Freq	Level	Over	Limit	Read	Factor	Remark
	MHz	dBm	dB	dBm	dBm	dB	
1 @	5638.00	-52.58	-39.58	-13.00	-61.24	8.65	Peak

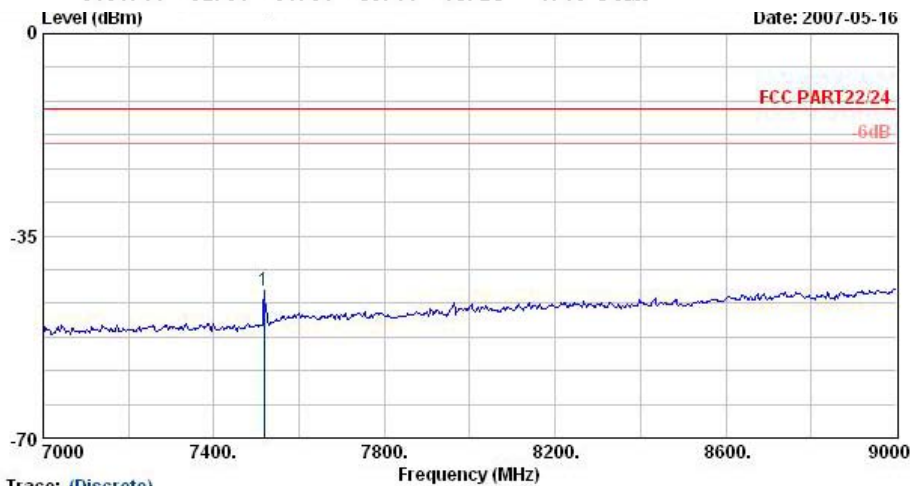

Trace: (Discrete)

Site : 03CH06-HY
Condition : HF-SPURIOUS VERTICAL
EUT : PDA Phone
Power : 120Vac/60Hz
Model : FG 750806
Memo : CDMA2000 PCS Link Mode;Ch600
Memo : Adaptor I+Earphone
Plane : E2
S/N : AE2-1167

	Freq	Level	Over	Limit	Read	Factor	Remark
	MHz	dBm	dB	dBm	dBm	dB	
1 @	7518.00	-44.41	-31.41	-13.00	-57.78	13.37	Peak

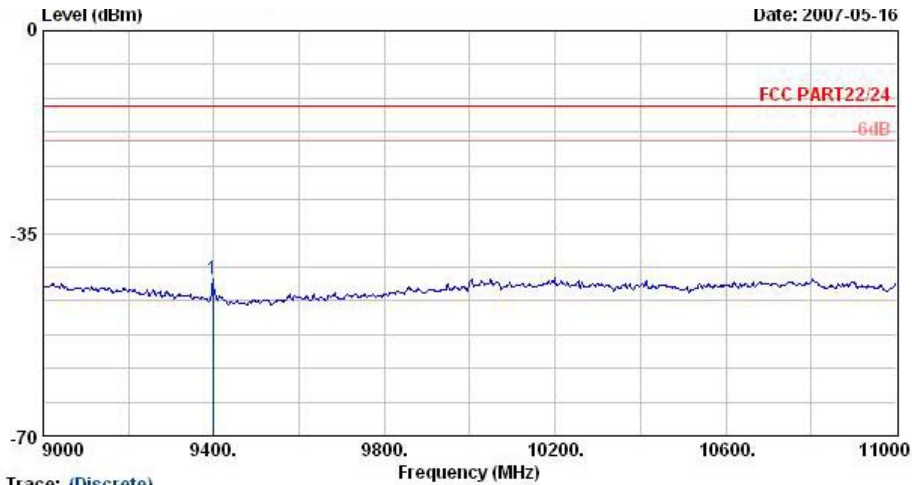


Trace: (Discrete)

Site : 03CH06-HY
Condition : HF-SPURIOUS VERTICAL
EUT : PDA Phone
Power : 120Vac/60Hz
Model : FG 750806
Memo : CDMA2000 PCS Link Mode;Ch600
Adaptor 1+Earphone
Plane : E2
S/N : AE2-1167


Freq	Level	Over	Limit	Read	Factor	Remark
MHz	dBm	dB	dBm	dBm	dB	

1 @	9398.00	-42.81	-29.81	-13.00	-60.01	17.20 Peak
-----	---------	--------	--------	--------	--------	------------

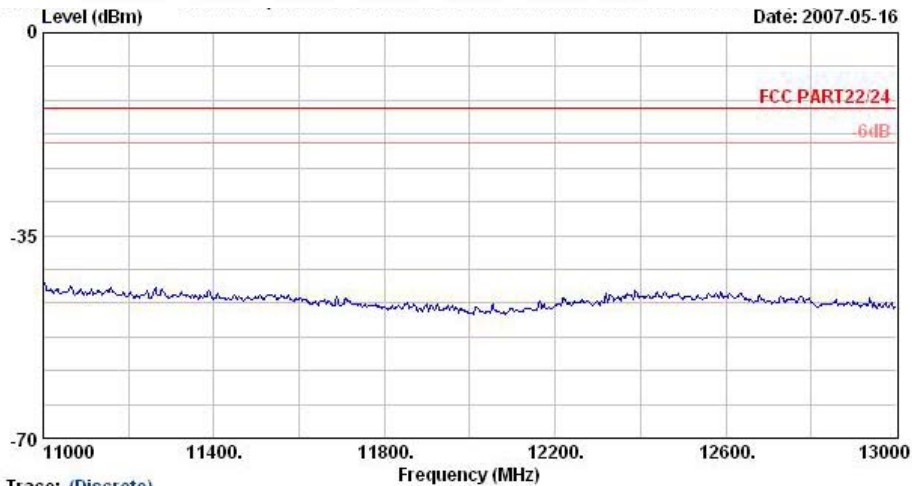


Trace: (Discrete)

Site : 03CH06-HY
Condition : HF-SPURIOUS VERTICAL
EUT : PDA Phone
Power : 120Vac/60Hz
Model : FG 750806
Memo : CDMA2000 PCS Link Mode;Ch600
Adaptor 1+Earphone
Plane : E2
S/N : AE2-1167

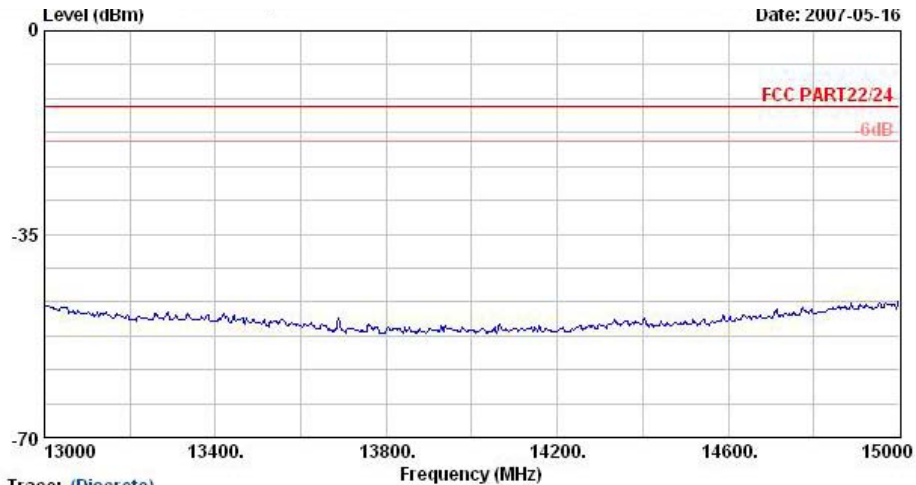

Trace: (Discrete)

Site : 03CH06-HY
Condition : HF-SPORTIOUS VERTICAL
EUT : PDA Phone
Power : 120Vac/60Hz
Model : FG 750806
Memo : CDMA2000 PCS Link Mode;Ch600
Memo : Adaptor I+Earphone
Plane : E2
S/N : AE2-1167

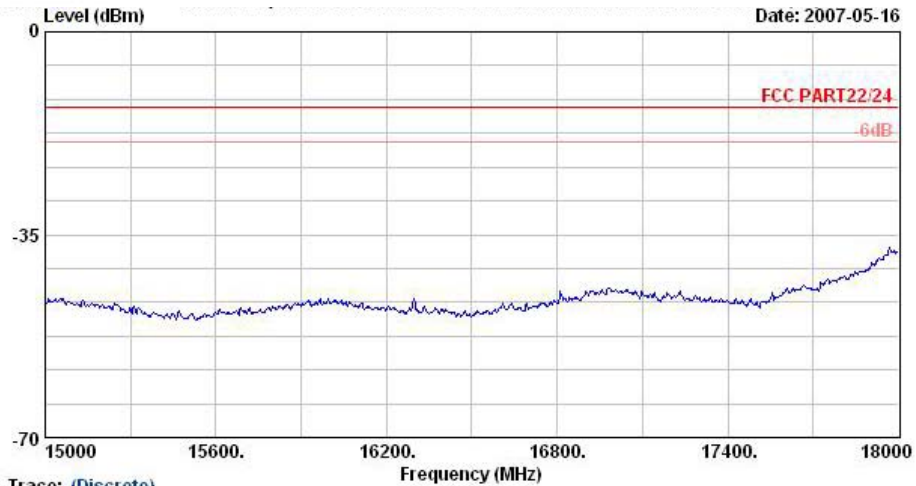

Trace: (Discrete)


Site : 03CH06-HY
Condition : HF-SPORTIOUS VERTICAL
EUT : PDA Phone
Power : 120Vac/60Hz
Model : FG 750806
Memo : CDMA2000 PCS Link Mode;Ch600
Memo : Adaptor I+Earphone
Plane : E2
S/N : AE2-1167

Remark : There is no more obvious emission except the listings above.



4.6.5.5 Mode 5


Horizontal Polarization

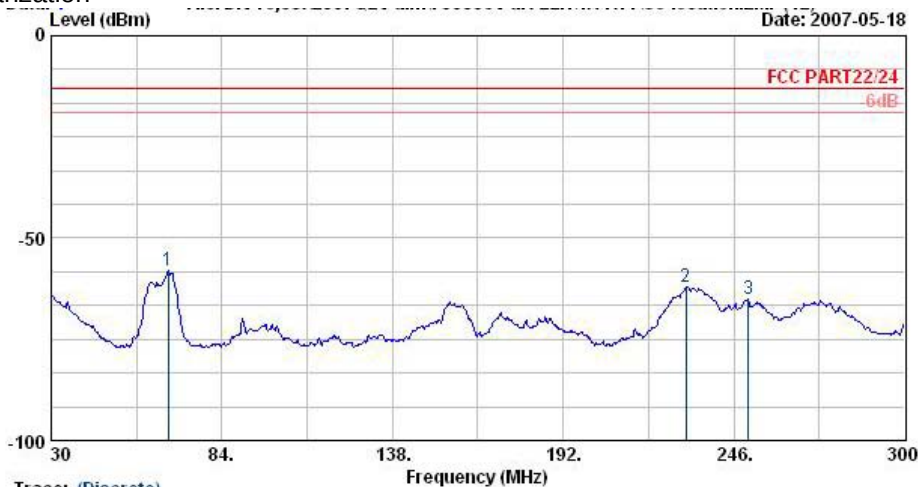

Trace: (Discrete)

Site : 03CH06-HY
Condition : LF-SPURIOUS HORIZONTAL
EUT : PDA Phone
Power : 120Vac/60Hz
Model : FG 750806
Memo : CDMA2000 Cellular Link Mode;Ch384
Memo : +BT Tx_CH78+Adaptor I+Earphone
Plane : E2
S/N : AE2-1167

	Freq	Level	Over	Limit	Read	Factor	Remark
	MHz	dBm	dB	dBm	dBm	dB	
1	66.99	-57.86	-44.86	-13.00	-45.50	-12.37	Peak
2	230.88	-62.18	-49.18	-13.00	-49.86	-12.32	Peak
3	250.59	-65.04	-52.04	-13.00	-53.38	-11.65	Peak

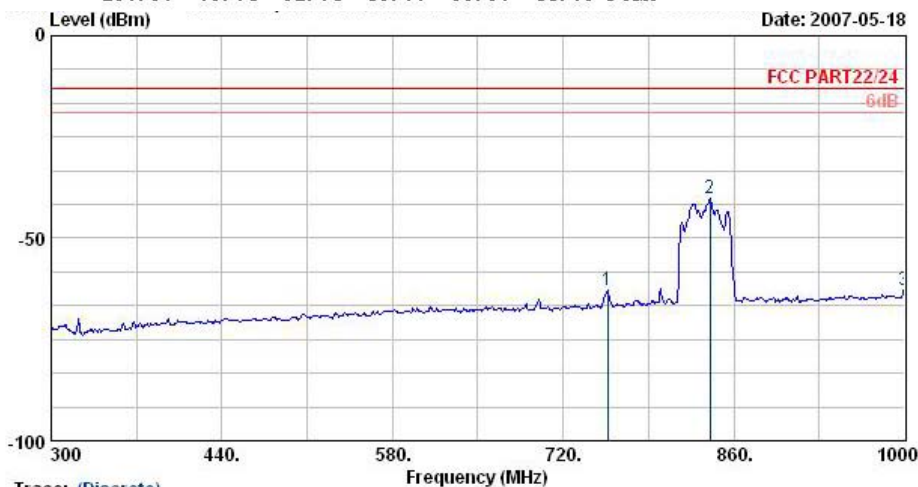


Trace: (Discrete)

Site : 03CH06-HY
Condition : LF-SPURIOUS HORIZONTAL
EUT : PDA Phone
Power : 120Vac/60Hz
Model : FG 750806
Memo : CDMA2000 Cellular Link Mode;Ch384
Memo : +BT Tx_CH78+Adaptor I+E
Plane : E2
S/N : AE2-1167

	Freq	Level	Over	Limit	Read	Factor	Remark
	MHz	dBm	dB	dBm	dBm	dB	
1	756.40	-62.66	-49.66	-13.00	-60.52	-2.14	Peak
2	840.40	-40.28	-27.28	-13.00	-38.97	-1.31	Peak
3	1000.00	-63.00	-50.00	-13.00	-63.24	0.24	Peak




Remark: #2: MS Signal

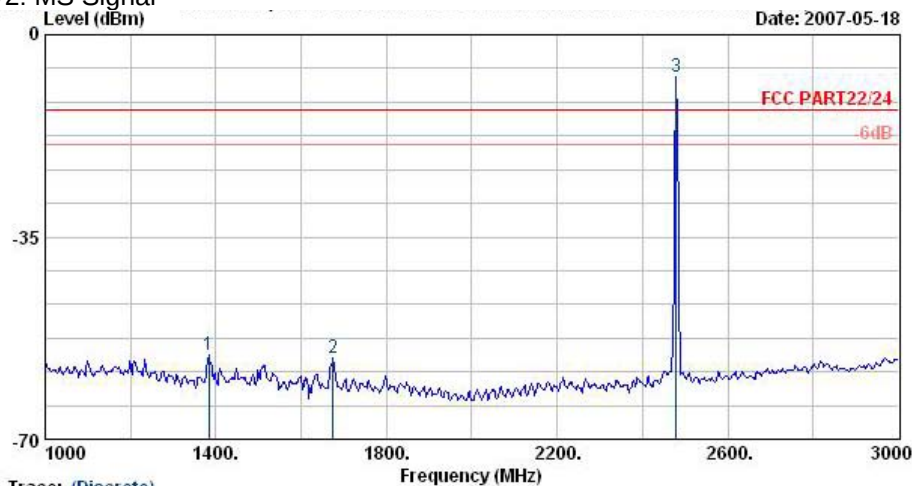


Site : 03CH06-HY
Condition : HF-SPURIOUS HORIZONTAL
EUT : PDA Phone
Power : 120Vac/60Hz
Model : FG 750806
Memo : CDMA2000 Cellular Link Mode;Ch384
Memo : +BT Tx_CH78+Adaptor I+Earphone
Plane : E2
S/N : AE2-1167

	Freq	Level	Over	Limit	Read		
	MHz	dBm	Limit	Line	Level	Factor	Remark
			dB	dBm	dBm	dB	
1	1384.00	-55.53	-42.53	-13.00	-56.28	0.74	Peak
2	1674.00	-55.93	-42.93	-13.00	-56.15	0.22	Peak
3 @	2478.00	-7.26			-8.41	1.16	Peak

Remark: #3: BT Signal

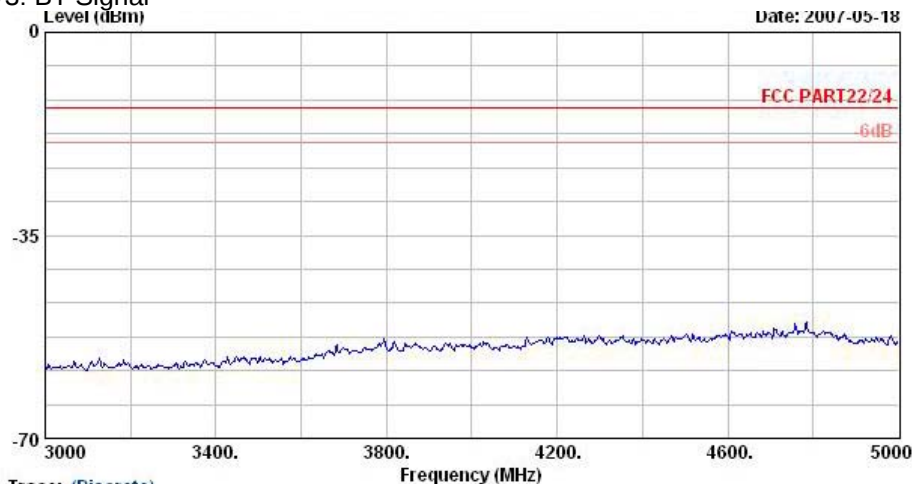


Site : 03CH06-HY
Condition : HF-SPURIOUS HORIZONTAL
EUT : PDA Phone
Power : 120Vac/60Hz
Model : FG 750806
Memo : CDMA2000 Cellular Link Mode;Ch384
Memo : +BT Tx_CH78+Adaptor I+Earphone
Plane : E2
S/N : AE2-1167

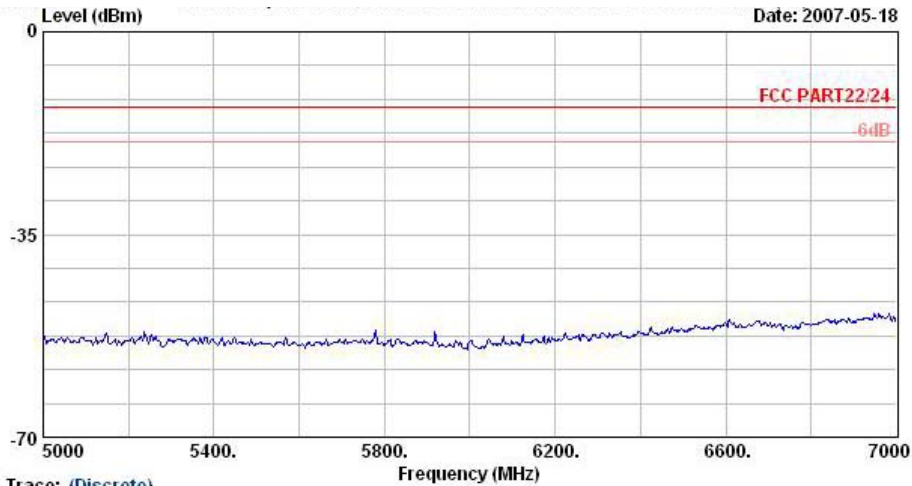

Trace: (Discrete)

Site : 03CH06-HY
Condition : HF-SPURIOUS HORIZONTAL
EUT : PDA Phone
Power : 120Vac/60Hz
Model : FG 750806
Memo : CDMA2000 Cellular Link Mode;Ch384
Memo : +BT Tx_CH78+Adaptor I+Earphone
Plane : E2
S/N : AE2-1167

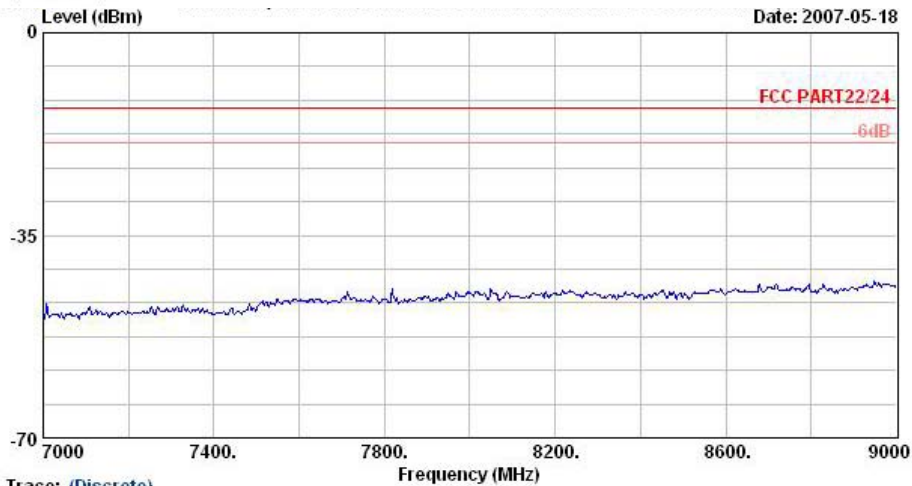


Trace: (Discrete)

Site : 03CH06-HY
Condition : HF-SPURIOUS HORIZONTAL
EUT : PDA Phone
Power : 120Vac/60Hz
Model : FG 750806
Memo : CDMA2000 Cellular Link Mode;Ch384
Memo : +BT Tx_CH78+Adaptor I+Earphone
Plane : E2
S/N : AE2-1167

Remark: There's no more obvious spurious emission except the listings above.




Vertical Polarization

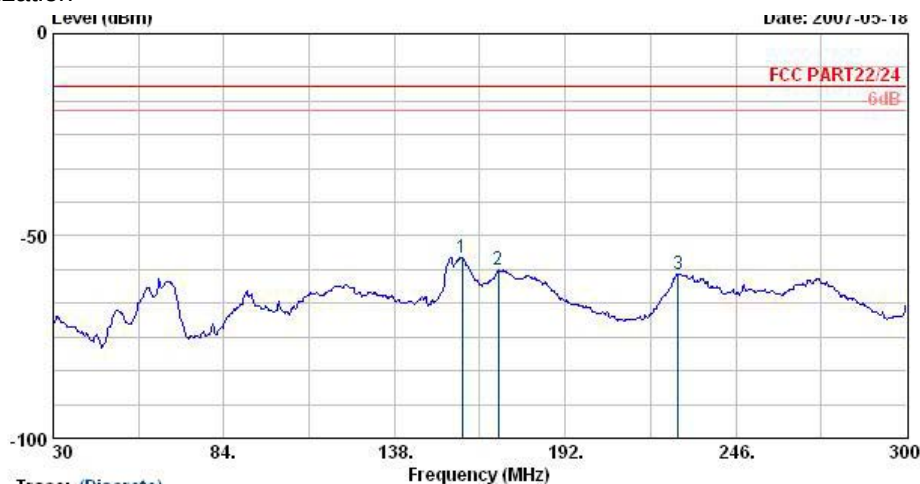

Trace: (Discrete)

Site : 03CH06-HY
Condition : LF-SPURIOUS VERTICAL
EUT : PDA Phone
Power : 120Vac/60Hz
Model : FG 750806
Memo : CDMA2000 Cellular Link Mode;Ch384
Memo : +BT Tx_CH78+Adaptor I+Earphone
Plane : E2
S/N : AE2-1167

	Freq	Level	Over	Limit	Read		
	MHz	dBm	Limit	Line	Level	Factor	Remark
			dB	dBm	dBm	dB	
1	159.33	-55.39	-42.39	-13.00	-47.16	-8.22	Peak
2	170.94	-58.47	-45.47	-13.00	-50.14	-8.33	Peak
3	227.64	-59.34	-46.34	-13.00	-51.35	-7.99	Peak

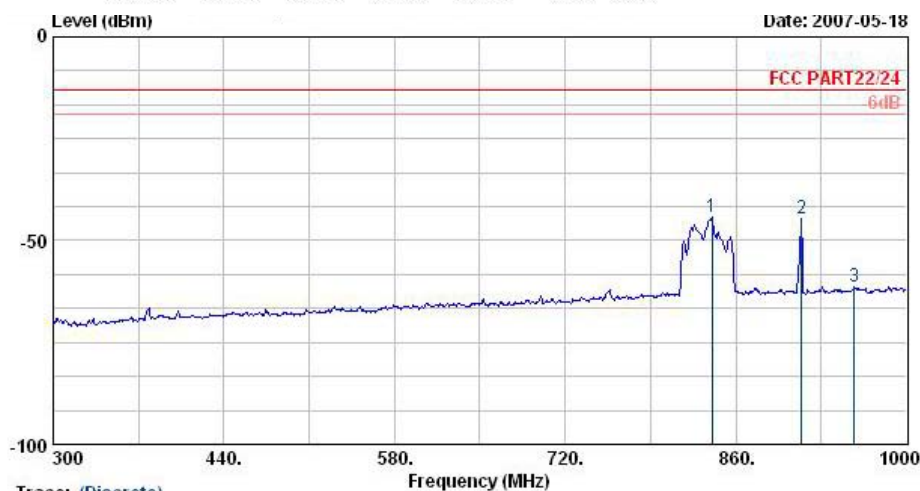

Trace: (Discrete)

Site : 03CH06-HY
Condition : LF-SPURIOUS VERTICAL
EUT : PDA Phone
Power : 120Vac/60Hz
Model : FG 750806
Memo : CDMA2000 Cellular Link Mode;Ch384
Memo : +BT Tx_CH78+Adaptor I+Earphone
Plane : E2
S/N : AE2-1167


	Freq	Level	Over	Limit	Read		
	MHz	dBm	Limit	Line	Level	Factor	Remark
			dB	dBm	dBm	dB	
1	840.40	-44.32			-45.71	1.39	Peak
2	913.90	-44.50	-31.50	-13.00	-46.48	1.97	Peak
3	957.30	-61.30	-48.30	-13.00	-63.62	2.32	Peak

Remark: #1: MS Signal



FCC/IC TEST REPORT

Report No. : FG750806

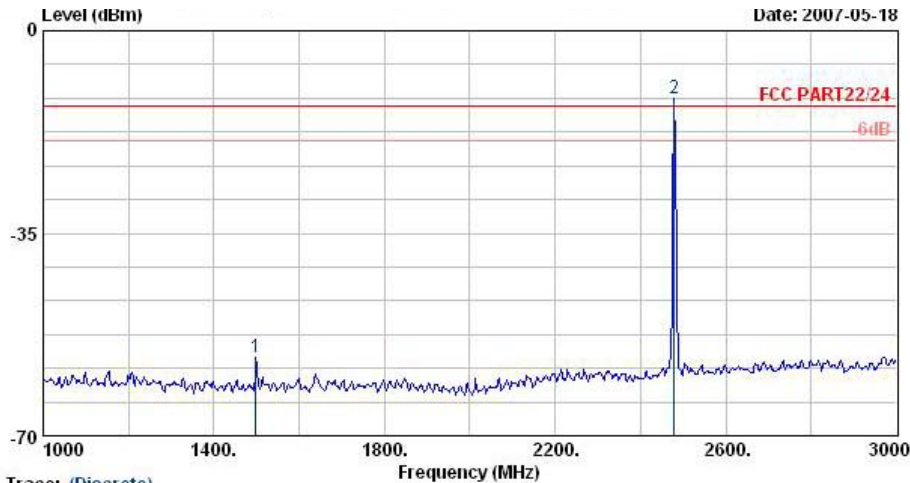


Trace: (Discrete)

Site : 03CH06-HY
Condition : HF-SPORTIOUS VERTICAL
EUT : PDA Phone
Power : 120Vac/60Hz
Model : FG 750806
Memo : CDMA2000 Cellular Link Mode;Ch384
Memo : +BT Tx_CH78+Adaptor I+Earphone
Plane : E2
S/N : AE2-1167

	Freq	Level	Over	Limit	Read	
	MHz	dBm	Limit	Line	Level	Factor Remark
			dB	dBm	dBm	dB
1	1498.00	-56.49	-43.49	-13.00	-55.63	-0.86 Peak
2 @	2478.00	-11.77			-13.99	2.21 Peak

Remark: #2: BT Signal

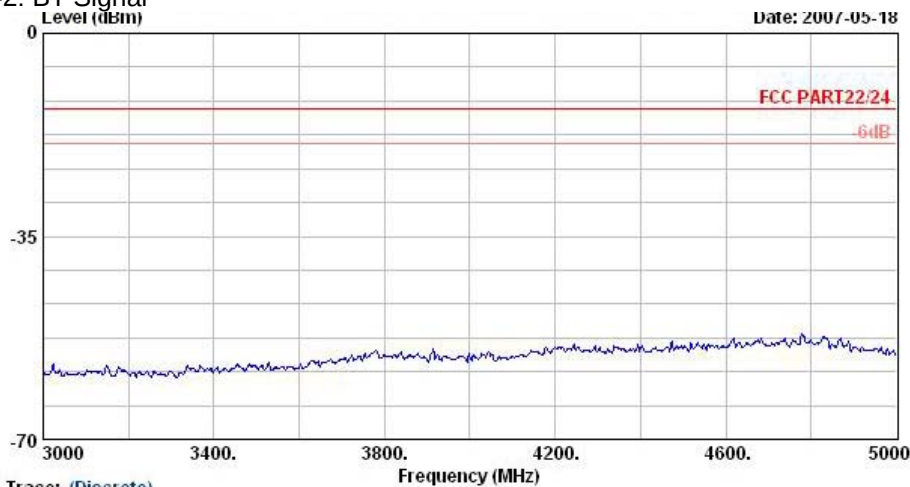

Trace: (Discrete)

Site : 03CH06-HY
Condition : HF-SPORTIOUS VERTICAL
EUT : PDA Phone
Power : 120Vac/60Hz
Model : FG 750806
Memo : CDMA2000 Cellular Link Mode;Ch384
Memo : +BT Tx_CH78+Adaptor I+Earphone
Plane : E2
S/N : AE2-1167

SPORTON International Inc.

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255


FCC ID : O8F-747

IC ID : 3905A-747

Page No. : 120 of 126


Report Issued Date : Jun. 04, 2007

Report Version : Rev. 01

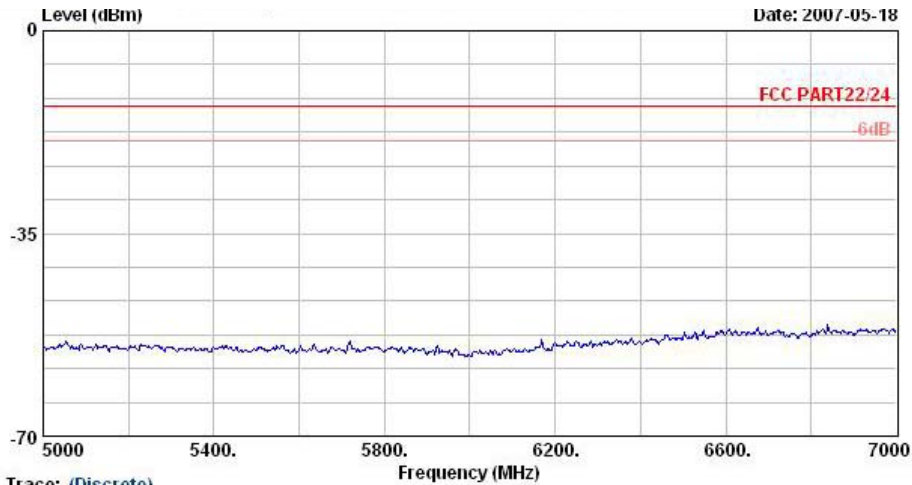

Trace: (Discrete)

Site : 03CH06-HY
Condition : HF-SPURIOUS VERTICAL
EUT : PDA Phone
Power : 120Vac/60Hz
Model : FG 750806
Memo : CDMA2000 Cellular Link Mode;Ch384
Memo : +BT Tx_CH78+Adaptor I+Earphone
Plane : E2
S/N : AE2-1167

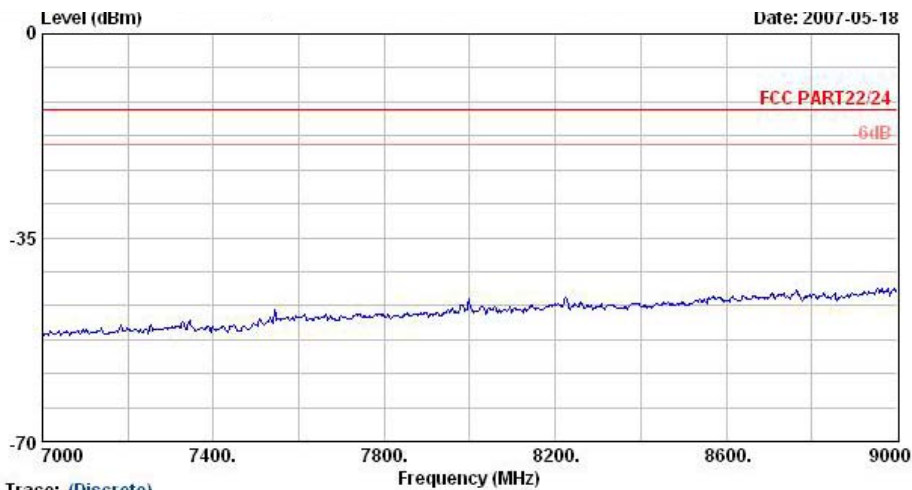

Trace: (Discrete)

Site : 03CH06-HY
Condition : HF-SPURIOUS VERTICAL
EUT : PDA Phone
Power : 120Vac/60Hz
Model : FG 750806
Memo : CDMA2000 Cellular Link Mode;Ch384
Memo : +BT Tx_CH78+Adaptor I+Earphone
Plane : E2
S/N : AE2-1167

Remark : There is no more obvious emission except the listings above.

4.7 Frequency Stability (Temperature Variation)


4.7.1 Measurement Instrument

As described in chapter 5 of this test report.

4.7.2 Test Procedure

1. The EUT and test equipment were set up as shown on the following section.
2. With all power removed, the temperature was decreased to -30°C and permitted to stabilize for three hours. Power was applied and the maximum change in frequency was noted within one minute.
3. With power OFF, the temperature was raised in 10°C steps. The sample was permitted to stabilize at each step for at least one-half hour. Power was applied and the maximum frequency change was noted within one minute.
4. The temperature tests were performed for the worst case.
5. Test data was recorded.

4.7.3 Test Setup Layout

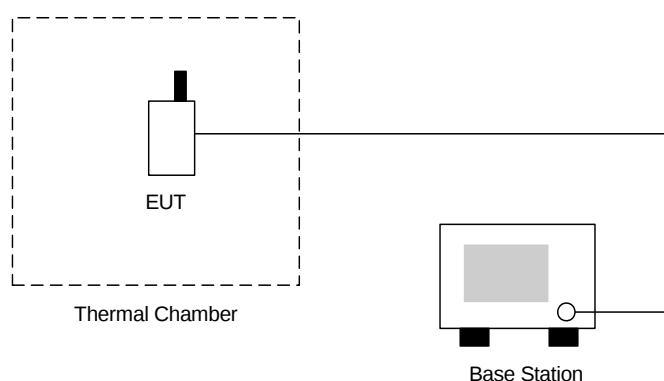

4.7.4 Test Result

- Test Mode : CDMA2000 Cellular 850 1xEV-DO 9.6Kbps CH384

Temperature(°C)	Change (Hz)	Change (ppm)	Limit (ppm)	Result
-30	-78	-0.04	2.5	Passed
-20	60	0.03		
-10	-54	-0.03		
0	-17	-0.01		
10	25	0.01		
20	18	0.01		
30	-6	0.00		
40	26	0.01		
50	35	0.02		

- Test Mode : CDMA2000 PCS 1900 1xEV-DO 9.6Kbps CH600

Temperature(°C)	Change (Hz)	Change (ppm)	Limit (ppm)	Result
-30	-82.00	-0.04	2.5	Passed
-20	-75.00	-0.04		
-10	-24.00	-0.01		
0	10.00	0.01		
10	18.00	0.01		
20	21.00	0.01		
30	-12.00	-0.01		
40	28.00	0.01		
50	32.00	0.02		

4.8 Frequency Stability (Voltage Variation)


4.8.1 Measurement Instrument

As described in chapter 5 of this test report.

4.8.2 Test Procedure

1. The EUT was placed in a temperature chamber at $25 \pm 5^{\circ}\text{C}$ and connected as the following section.
2. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

4.8.3 Test Setup Layout

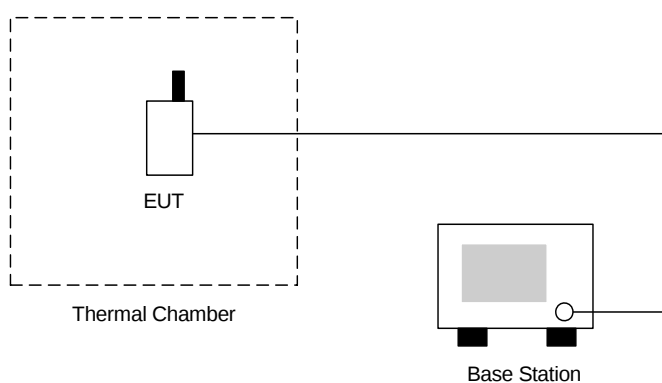

4.8.4 Test Result

- Test Mode : CDMA2000 Cellular 850 1xEV-DO CH384

Voltage(Volt)	Change (Hz)	Change (ppm)	Limit (ppm)	Result
3.7	-14.0	-0.01	2.5	Passed
BEP	24.0	0.01		
4.2	16.0	0.01		

- Test Mode : CDMA2000 PCS 1900 1xEV-DO CH600

Voltage(Volt)	Change (Hz)	Change (ppm)	Limit (ppm)	Result
3.7	20.00	0.01	2.5	Passed
BEP	16.00	0.01		
4.2	-14.00	-0.01		

Remark:

1. Normal Voltage=3.7 V.
2. Battery End Point (BEP)=3.2 V.



5 List of Measurement Equipments

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Due Date	Remark
Thermal Chamber	Tenyi technology	TTH-D35P	TBN-930701	N/A	Jul. 24, 2006	Jul. 23, 2007	TH02-HY
Spectrum	R&S	FSP40	100055	9KHz~40GHz	Jun. 23, 2006	Jun. 22, 2007	TH02-HY
Bluetooth Test	ANRITSU	MT8852A	6K00003939	N/A	N/A	N/A	TH02-HY
POWER DIVIDER	ARRA	5200-1	3871	N/A	Oct. 07, 2006	Oct. 06, 2007	TH02-HY
DC POWER SUPPLY	TOPWARD	3303D	740889	N/A	May 25, 2007	May 24, 2009	TH02-HY
Power Meter	Agilent	E4416A	GB41292344	N/A	Feb. 08, 2007	Feb. 07, 2008	TH02-HY
Power Sensor	Agilent	E9327A	US40441548	N/A	Feb. 08, 2007	Feb. 07, 2008	TH02-HY
Spectrum analyzer	Agilent	E4408B	MY44211030	9KHz-26.5GHz	Oct. 05, 2006	Oct. 04, 2007	Radiation (03CH06-HY)
EMI Test Receiver	R&S	ESCS30	100356	9KHz-2.75GHz	Jul. 13, 2006	Jul. 12, 2007	Radiation (03CH06-HY)
Bilog Antenna	SCHAFFNER	CBL6112B	2885	30MHz -2GHz	Nov. 20, 2006	Nov. 19, 2007	Radiation (03CH06-HY)
Double Ridge Horn Antenna	Com-Power	AH118	10094	1G~18G	Dec. 26, 2006	Dec. 25, 2007	Radiation (03CH06-HY)
SHF-EHF Horn	SCHWARZBECK	BBHA 9170	9170-249	14G - 40G	Nov. 20, 2006	Nov. 19, 2008	Radiation (03CH06-HY)
Pre Amplifier	Agilent	8449B	3008A01917	1G - 26.5G	Nov. 15, 2006	Nov. 14, 2007	Radiation (03CH06-HY)
Pre Amplifier	Mini Circuits	ZKL-2	D092004-1	10~2500MHz	Nov. 15, 2006	Nov. 14, 2007	Radiation (03CH06-HY)
Controller	INN-CO	CO2000	N/A	N/A	N/A	N/A	Radiation (03CH06-HY)
Turn Table	INN-CO	DS2000	420/650/00	0 ~ 360 degree	N/A	N/A	Radiation (03CH06-HY)
Antenna Mast	INN-CO	MM3000	114/8000604/ L	1 m - 4 m	N/A	N/A	Radiation (03CH06-HY)
Universal Radio Communication Tester	Agilent	E5515C	GB43460754	CDMA2000	Feb. 21, 2006	Feb. 20, 2008	Radiation (03CH06-HY)

6 Uncertainty Evaluation

Uncertainty of Radiated Emission Measurement (30MHz ~ 1000MHz)

Contribution	Uncertainty of X_i		$u(x_i)$
	dB	Probability Distribution	
Receiver reading	0.41	Normal(k=2)	0.21
Antenna factor calibration	0.83	Normal(k=2)	0.42
Cable loss calibration	0.25	Normal(k=2)	0.13
Pre Amplifier Gain calibration	0.27	Normal(k=2)	0.14
RCV/SPA specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site imperfection	1.43	Rectangular	0.83
Mismatch	+0.39/-0.41	U-shaped	0.28
combined standard uncertainty Uc(y)	1.27		
Measuring uncertainty for a level of confidence of 95% U=2Uc(y)	2.54		

Uncertainty of Radiated Emission Measurement (1GHz ~ 40GHz)

Contribution	Uncertainty of X_i		$u(x_i)$	C_i	$C_i * u(x_i)$
	dB	Probability Distribution			
Receiver reading	±0.10	Normal(k=1)	0.10	1	0.10
Antenna factor calibration	±1.70	Normal(k=2)	0.85	1	0.85
Cable loss calibration	±0.50	Normal(k=2)	0.25	1	0.25
Receiver Correction	±2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	±1.50	Rectangular	0.87	1	0.87
Site imperfection	±2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20 \log(1 - \Gamma_1 * \Gamma_2 * \Gamma_3)$	+0.34/-0.35	U-shaped	0.244	1	0.244
Combined standard uncertainty Uc(y)	2.36				
Measuring uncertainty for a level of confidence of 95% U=2Uc(y)	4.72				

END OF TEST REPORT