

Test Laboratory: Compliance Certification Services

PCS 1900_Left Hand Side_open

DUT: Palm; Type: N/A; Serial: N/A

Communication System: PCS Band; Frequency: 1880 MHz; Duty Cycle: 1:8

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 39.1$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(8.64, 8.64, 8.64); Calibrated: 2/23/2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 7/21/2010
- Phantom: SAM 2 (Twin); Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch_M-ch/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.586 mW/g



Touch_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 20.5 V/m; Power Drift = -0.039 dB

Peak SAR (extrapolated) = 0.807 W/kg

SAR(1 g) = 0.541 mW/g; SAR(10 g) = 0.348 mW/g

Maximum value of SAR (measured) = 0.659 mW/g

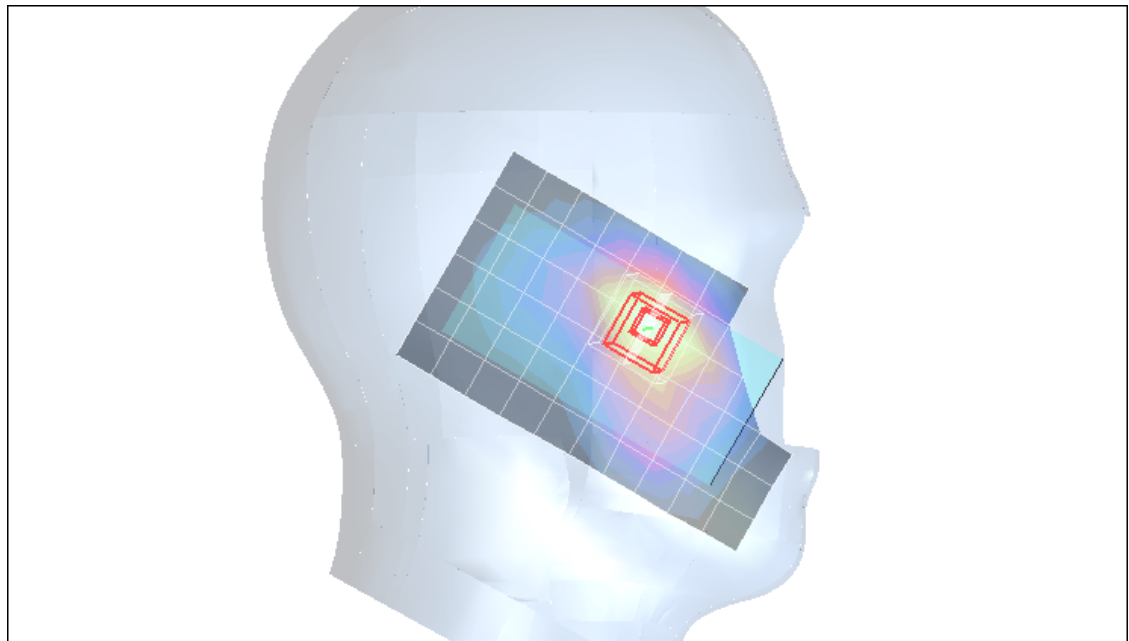

Test Laboratory: Compliance Certification Services

PCS 1900_Left Hand Side_open

DUT: Palm; Type: N/A; Serial: N/A

Communication System: PCS Band; Frequency: 1880 MHz; Duty Cycle: 1:8

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.39 \text{ mho/m}$; $\epsilon_r = 39.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(8.64, 8.64, 8.64); Calibrated: 2/23/2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 7/21/2010
- Phantom: SAM 2 (Twin); Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Tilt_M-ch/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.382 mW/g



Tilt_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 16.4 V/m; Power Drift = -0.135 dB

Peak SAR (extrapolated) = 0.475 W/kg

SAR(1 g) = 0.323 mW/g; SAR(10 g) = 0.200 mW/g

Maximum value of SAR (measured) = 0.379 mW/g

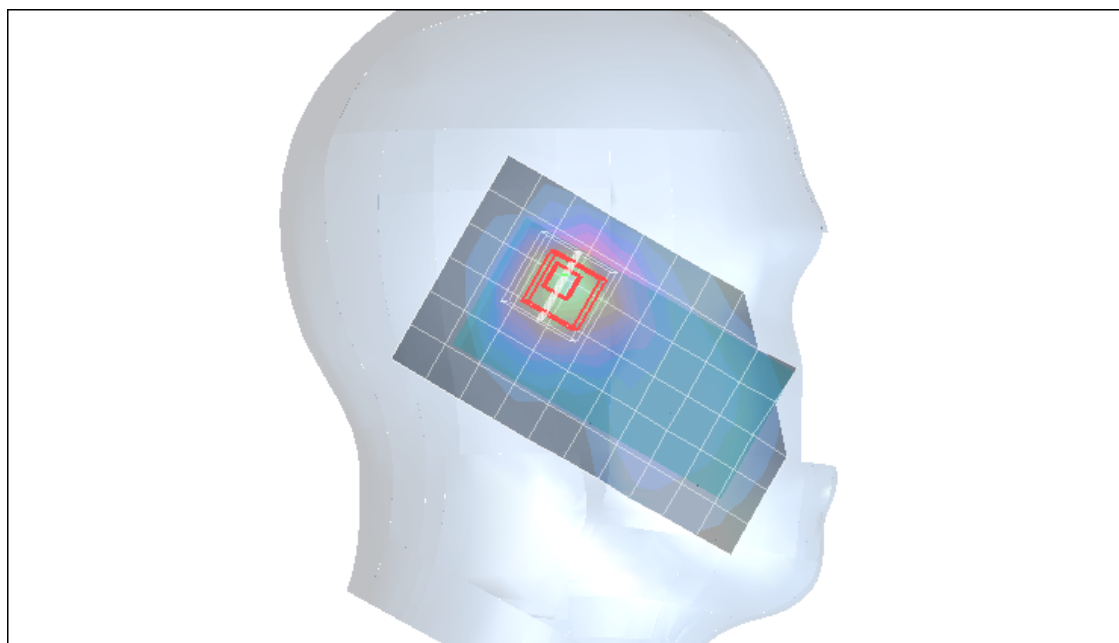

Test Laboratory: Compliance Certification Services

PCS 1900_Left Hand Side_closed

DUT: Palm; Type: N/A; Serial: N/A

Communication System: PCS Band; Frequency: 1880 MHz; Duty Cycle: 1:8

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 39.1$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(8.64, 8.64, 8.64); Calibrated: 2/23/2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 7/21/2010
- Phantom: SAM 2 (Twin); Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch_M-ch/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.409 mW/g


Touch_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 16.6 V/m; Power Drift = -0.062 dB

Peak SAR (extrapolated) = 0.711 W/kg

SAR(1 g) = 0.420 mW/g; SAR(10 g) = 0.217 mW/g

Maximum value of SAR (measured) = 0.518 mW/g

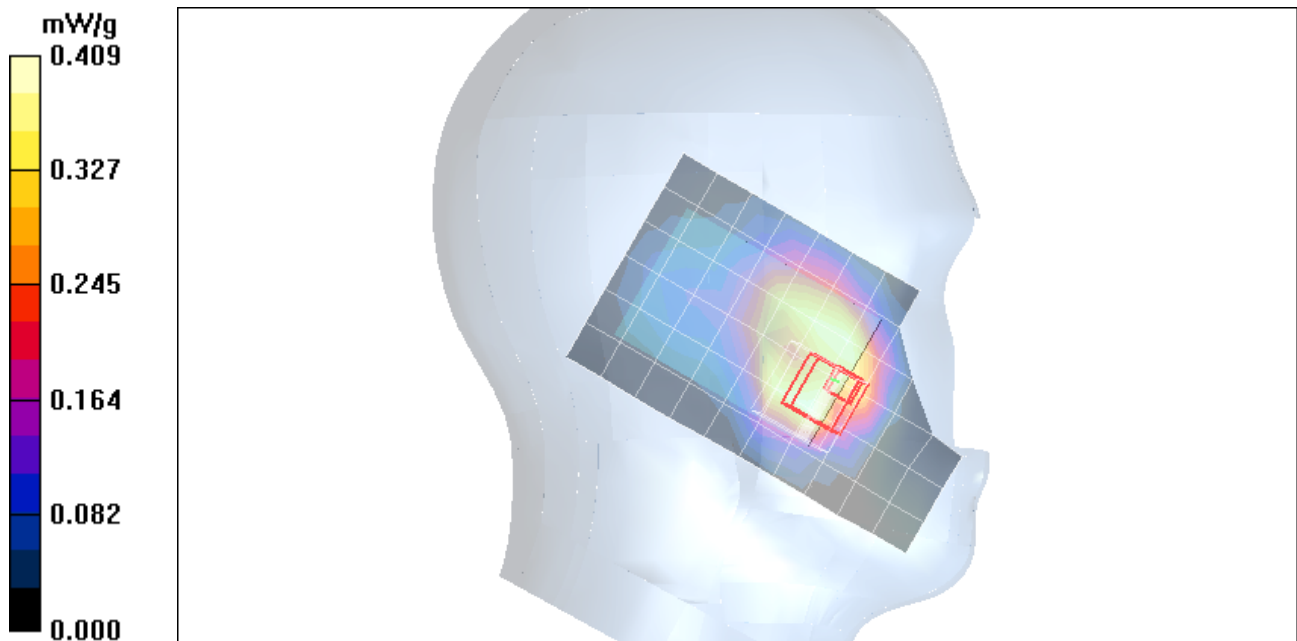

Test Laboratory: Compliance Certification Services

PCS 1900_Left Hand Side_closed

DUT: Palm; Type: N/A; Serial: N/A

Communication System: PCS Band; Frequency: 1880 MHz; Duty Cycle: 1:8

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 39.1$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(8.64, 8.64, 8.64); Calibrated: 2/23/2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 7/21/2010
- Phantom: SAM 2 (Twin); Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Tilt_M-ch/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.202 mW/g



Tilt_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 12.1 V/m; Power Drift = 0.202 dB

Peak SAR (extrapolated) = 0.319 W/kg

SAR(1 g) = 0.203 mW/g; SAR(10 g) = 0.123 mW/g

Maximum value of SAR (measured) = 0.247 mW/g

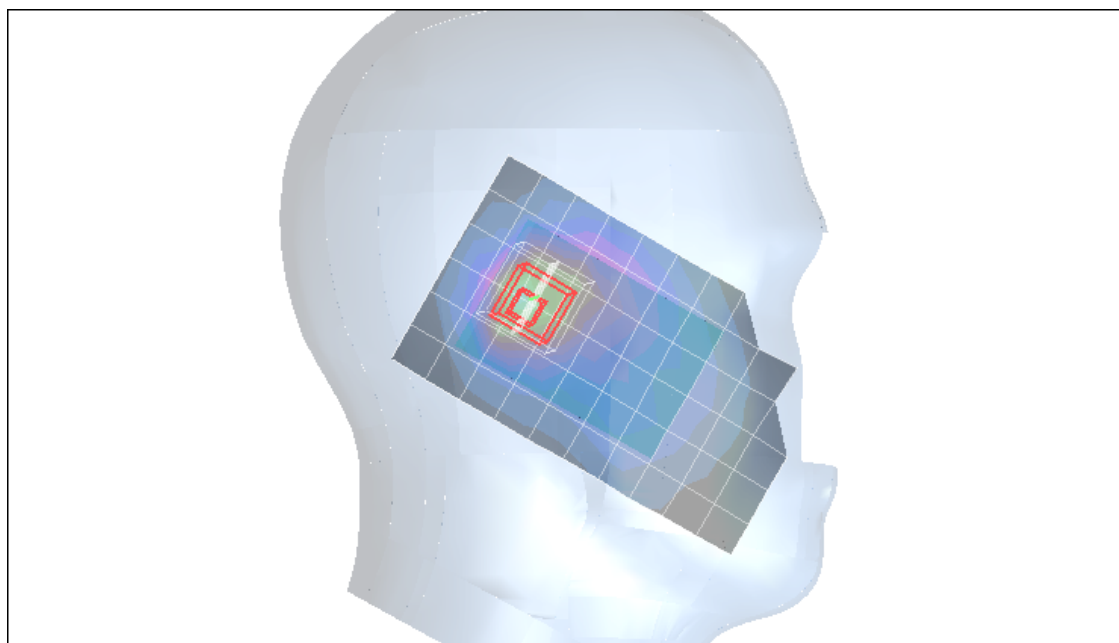

Test Laboratory: Compliance Certification Services

PCS 1900_Right Hand Side_open

DUT: Palm; Type: N/A; Serial: N/A

Communication System: PCS Band; Frequency: 1880 MHz; Duty Cycle: 1:8

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.39 \text{ mho/m}$; $\epsilon_r = 39.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(8.64, 8.64, 8.64); Calibrated: 2/23/2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 7/21/2010
- Phantom: SAM 2 (Twin); Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch_M-ch/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.753 mW/g


Touch_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 23.4 V/m; Power Drift = -0.060 dB

Peak SAR (extrapolated) = 0.968 W/kg

SAR(1 g) = 0.663 mW/g; SAR(10 g) = 0.406 mW/g

Maximum value of SAR (measured) = 0.779 mW/g

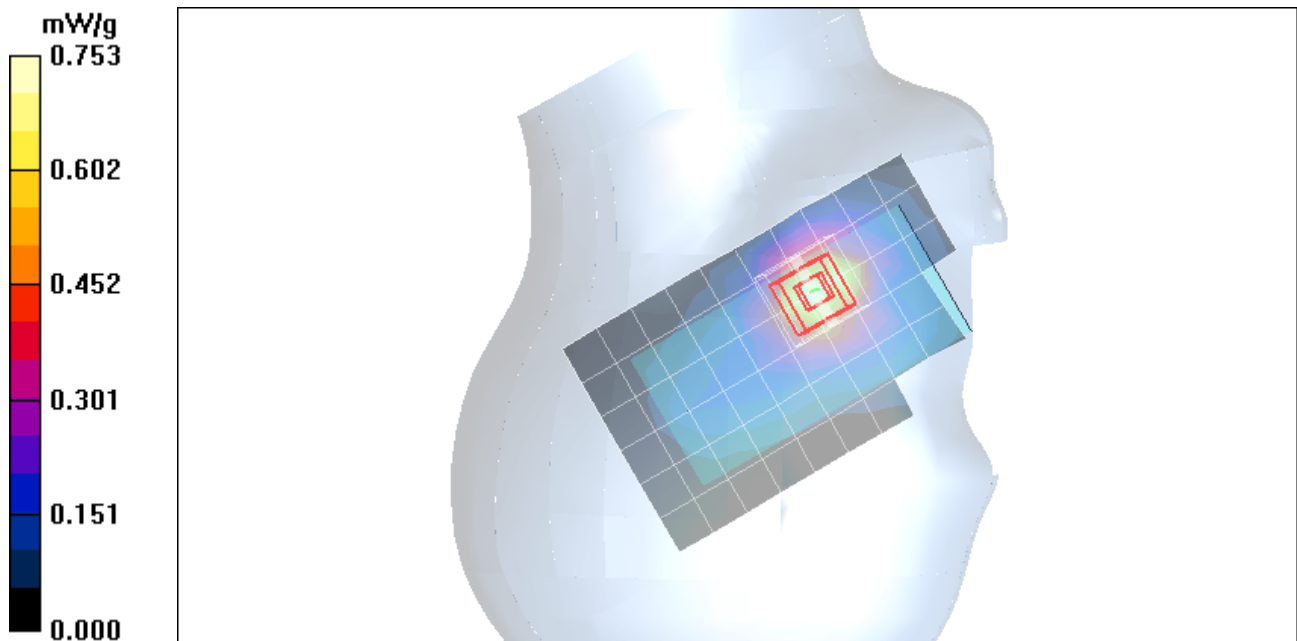


Test Laboratory: Compliance Certification Services

PCS 1900_Right Hand Side_open

DUT: Palm; Type: N/A; Serial: N/A

Communication System: PCS Band; Frequency: 1880 MHz; Duty Cycle: 1:8

Touch_M-ch/Z Scan (1x1x34): Measurement grid: dx=20mm, dy=20mm, dz=3mm
Maximum value of SAR (measured) = 0.661 mW/g

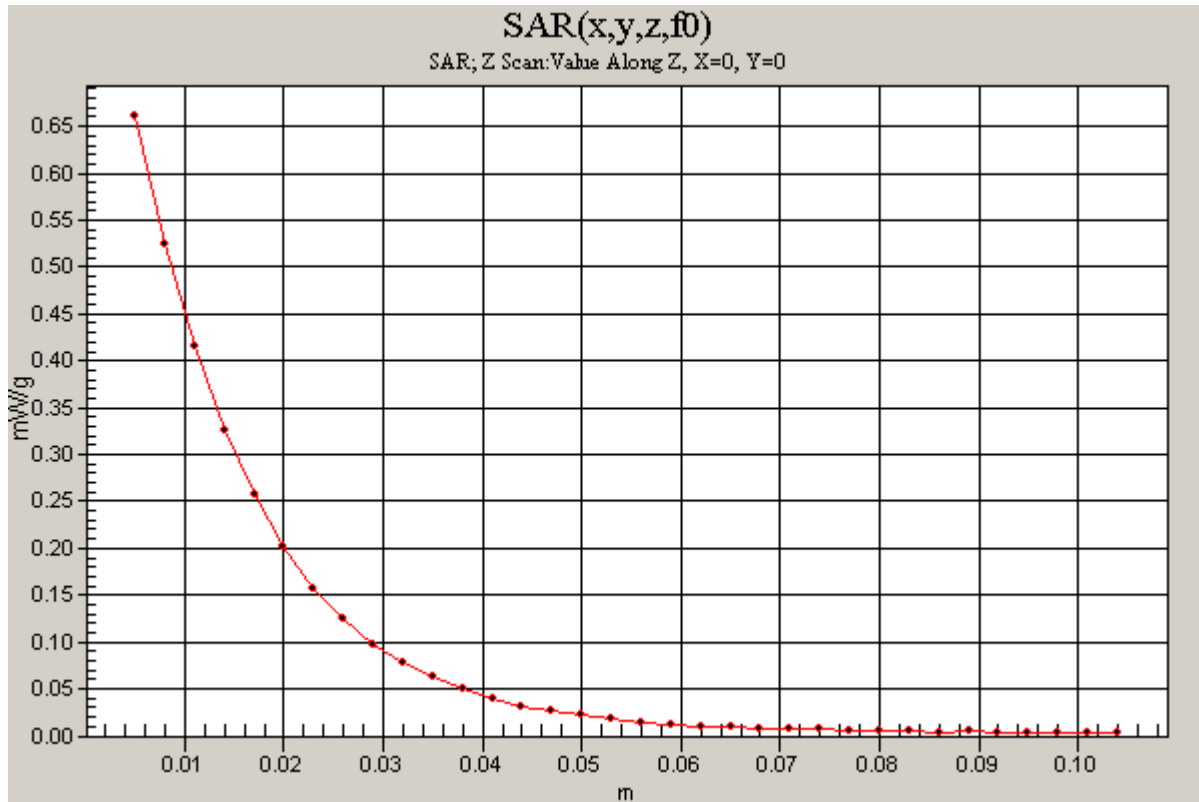

Test Laboratory: Compliance Certification Services

PCS 1900_Right Hand Side_open

DUT: Palm; Type: N/A; Serial: N/A

Communication System: PCS Band; Frequency: 1880 MHz; Duty Cycle: 1:8

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 39.1$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(8.64, 8.64, 8.64); Calibrated: 2/23/2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 7/21/2010
- Phantom: SAM 2 (Twin); Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Tilt_M-ch/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.308 mW/g



Tilt_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 14.3 V/m; Power Drift = 0.192 dB

Peak SAR (extrapolated) = 0.391 W/kg

SAR(1 g) = 0.268 mW/g; SAR(10 g) = 0.168 mW/g

Maximum value of SAR (measured) = 0.318 mW/g

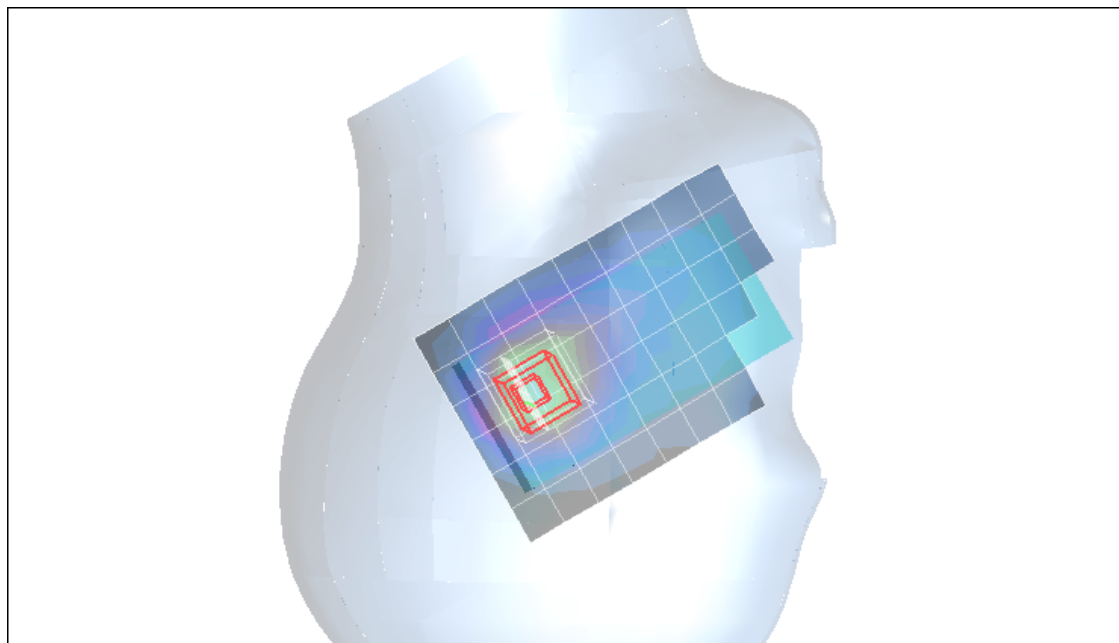

Test Laboratory: Compliance Certification Services

PCS 1900_Right Hand Side_closed

DUT: Palm; Type: N/A; Serial: N/A

Communication System: PCS Band; Frequency: 1880 MHz; Duty Cycle: 1:8

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.39 \text{ mho/m}$; $\epsilon_r = 39.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(8.64, 8.64, 8.64); Calibrated: 2/23/2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 7/21/2010
- Phantom: SAM 2 (Twin); Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch_M-ch/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.495 mW/g


Touch_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 19.0 V/m; Power Drift = -0.116 dB

Peak SAR (extrapolated) = 0.796 W/kg

SAR(1 g) = 0.429 mW/g; SAR(10 g) = 0.222 mW/g

Maximum value of SAR (measured) = 0.602 mW/g

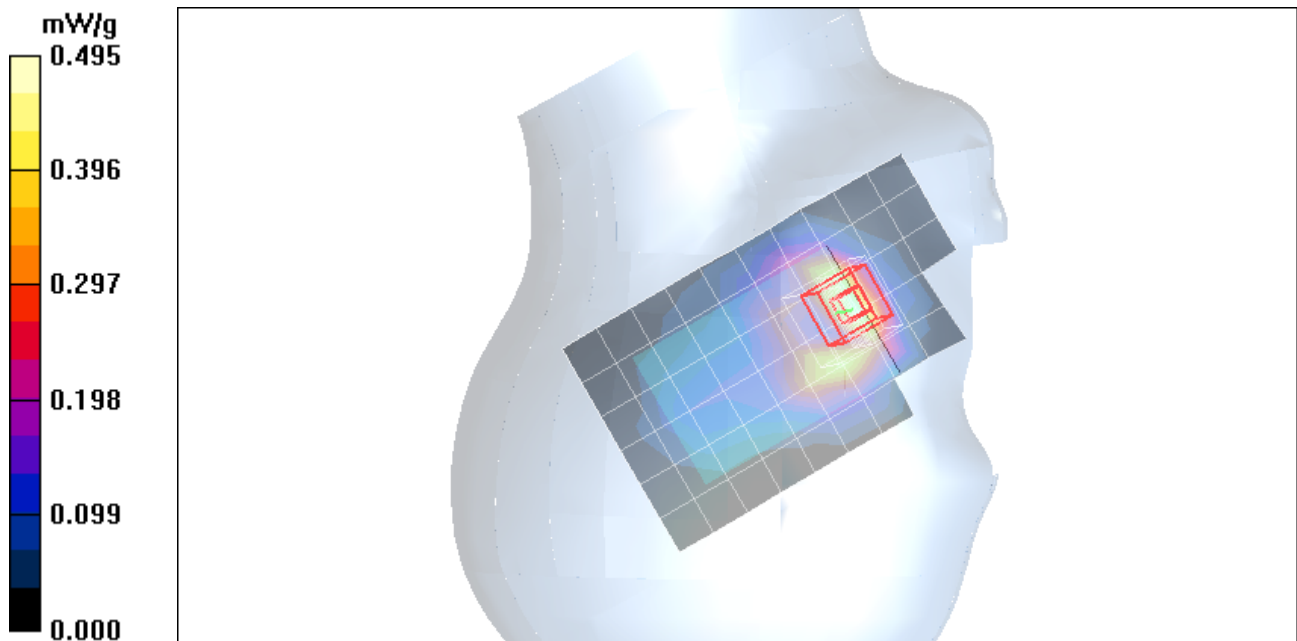

Test Laboratory: Compliance Certification Services

PCS 1900_Right Hand Side_closed

DUT: Palm; Type: N/A; Serial: N/A

Communication System: PCS Band; Frequency: 1880 MHz; Duty Cycle: 1:8

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.39 \text{ mho/m}$; $\epsilon_r = 39.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(8.64, 8.64, 8.64); Calibrated: 2/23/2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 7/21/2010
- Phantom: SAM 2 (Twin); Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Tilt_M-ch/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.221 mW/g


Tilt_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 14.5 V/m; Power Drift = -0.078 dB

Peak SAR (extrapolated) = 0.413 W/kg

SAR(1 g) = 0.260 mW/g; SAR(10 g) = 0.151 mW/g

Maximum value of SAR (measured) = 0.317 mW/g

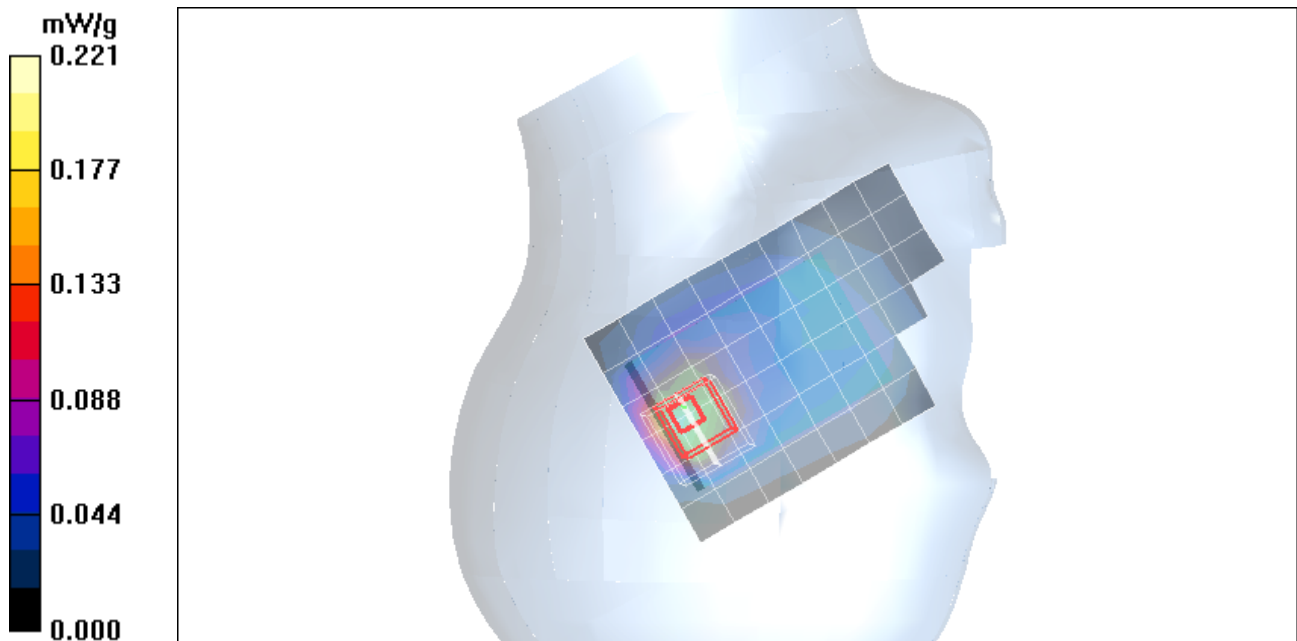

Test Laboratory: Compliance Certification Services

PCS 1900_Body

DUT: Palm; Type: N/A; Serial: N/A

Communication System: PCS Band; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 52.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(8.04, 8.04, 8.04); Calibrated: 2/23/2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 7/21/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Face up_2 slot_M-ch/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.260 mW/g

Face up_2 slot_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 13.8 V/m; Power Drift = 0.143 dB

Peak SAR (extrapolated) = 0.433 W/kg

SAR(1 g) = 0.277 mW/g; SAR(10 g) = 0.168 mW/g

Maximum value of SAR (measured) = 0.334 mW/g


Face up_2 slot_M-ch/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 13.8 V/m; Power Drift = 0.143 dB

Peak SAR (extrapolated) = 0.320 W/kg

SAR(1 g) = 0.223 mW/g; SAR(10 g) = 0.152 mW/g

Maximum value of SAR (measured) = 0.258 mW/g

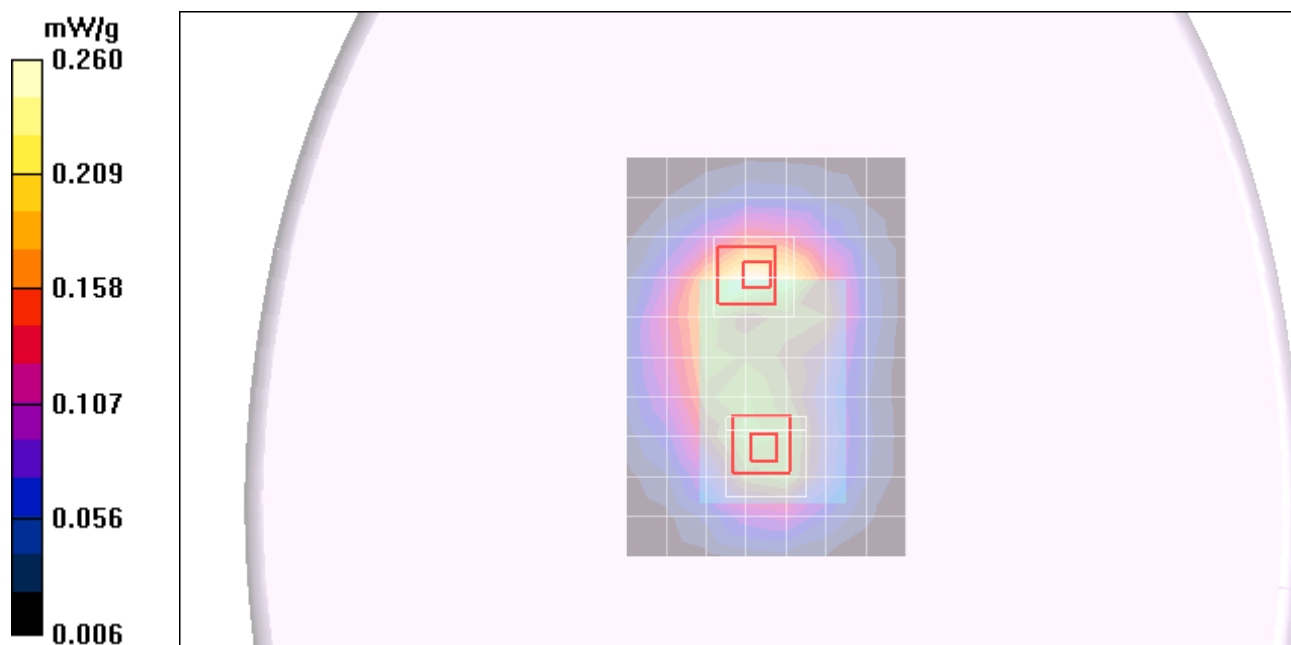

Test Laboratory: Compliance Certification Services

PCS 1900_Body_2 slot

DUT: Palm; Type: N/A; Serial: N/A

Communication System: PCS Band; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 52.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(8.04, 8.04, 8.04); Calibrated: 2/23/2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 7/21/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Face down_2 slot_M-ch/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.489 mW/g

Face down_2 slot_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 19.6 V/m; Power Drift = -0.148 dB

Peak SAR (extrapolated) = 0.774 W/kg

SAR(1 g) = 0.473 mW/g; SAR(10 g) = 0.271 mW/g

Maximum value of SAR (measured) = 0.594 mW/g


Face down_2 slot_M-ch/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 19.6 V/m; Power Drift = -0.148 dB

Peak SAR (extrapolated) = 0.581 W/kg

SAR(1 g) = 0.380 mW/g; SAR(10 g) = 0.245 mW/g

Maximum value of SAR (measured) = 0.450 mW/g

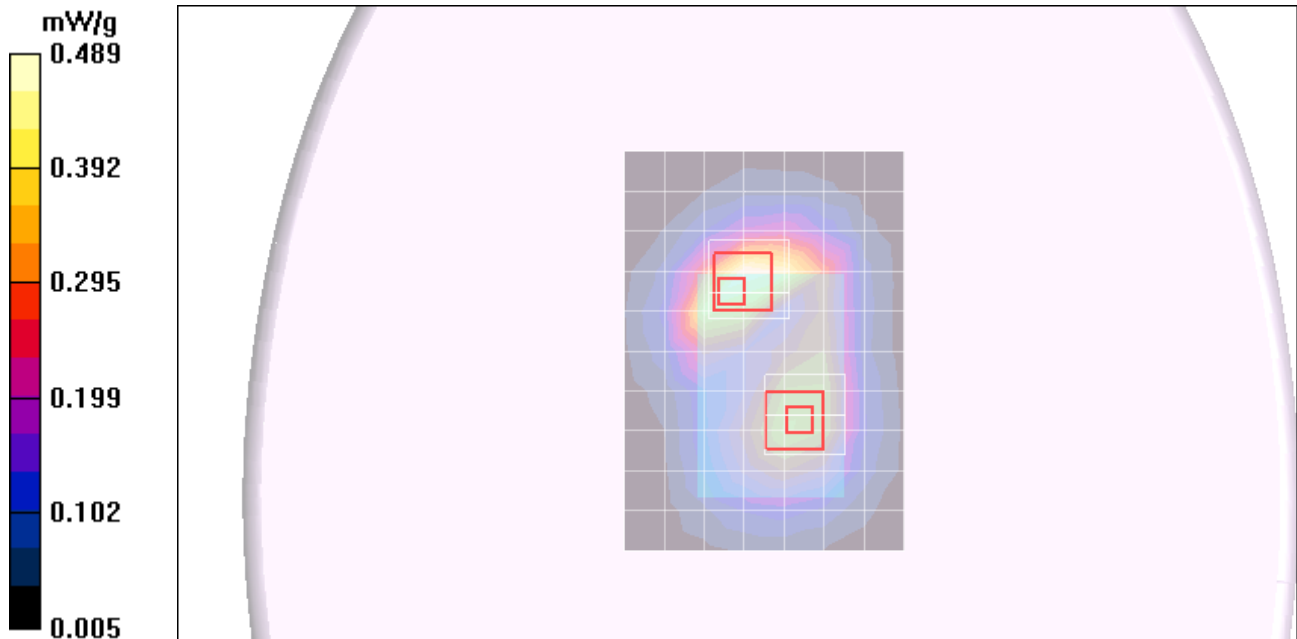


Test Laboratory: Compliance Certification Services

PCS 1900_Body_2 slot

DUT: Palm; Type: N/A; Serial: N/A

Communication System: PCS Band; Frequency: 1880 MHz; Duty Cycle: 1:4

Face down_2 slot_M-ch/Z Scan (1x1x34): Measurement grid: dx=20mm, dy=20mm, dz=3mm
Maximum value of SAR (measured) = 0.423 mW/g

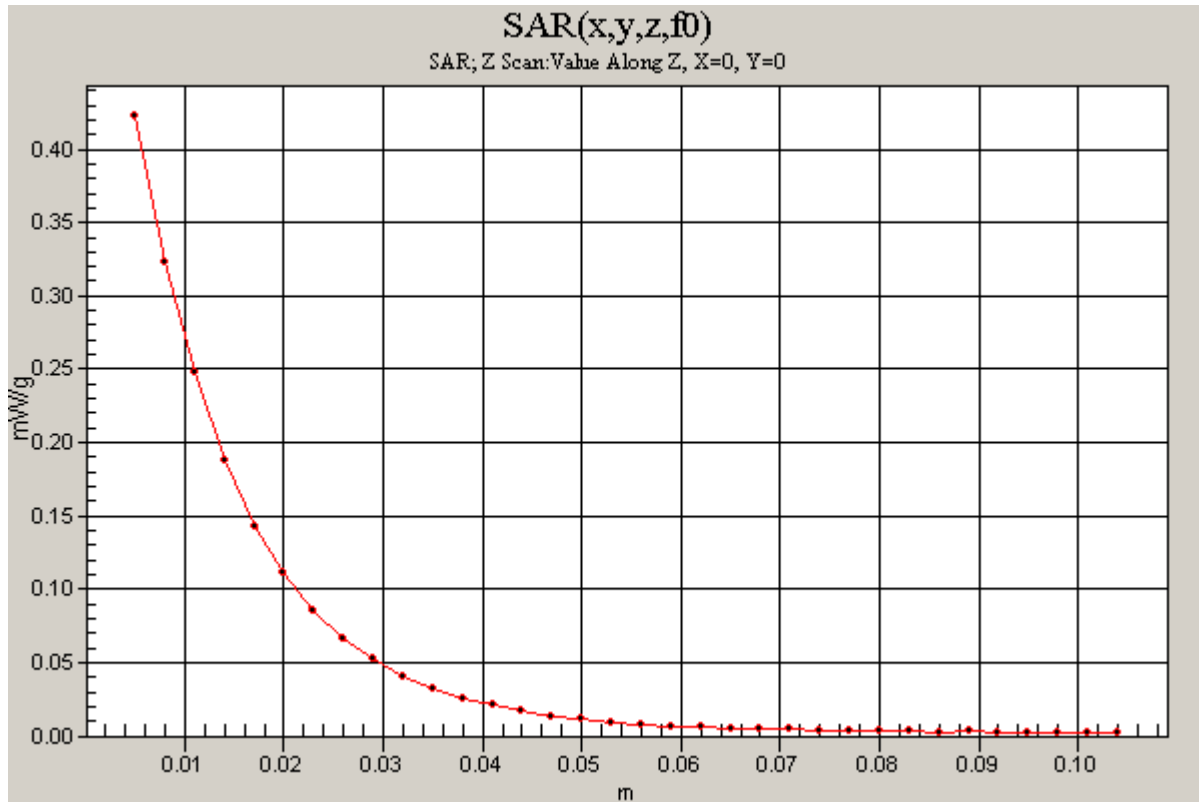

Test Laboratory: Compliance Certification Services

PCS 1900_Body_2 slot

DUT: Palm; Type: N/A; Serial: N/A

Communication System: PCS Band; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 52.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C


DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(8.04, 8.04, 8.04); Calibrated: 2/23/2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 7/21/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Face down_2 slot_M-ch w/headset/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.480 mW/g

Face down_2 slot_M-ch w/headset/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 18.0 V/m; Power Drift = 0.194 dB
Peak SAR (extrapolated) = 0.817 W/kg
SAR(1 g) = 0.466 mW/g; SAR(10 g) = 0.263 mW/g
Maximum value of SAR (measured) = 0.572 mW/g

Face down_2 slot_M-ch w/headset/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 18.0 V/m; Power Drift = 0.194 dB
Peak SAR (extrapolated) = 0.509 W/kg
SAR(1 g) = 0.347 mW/g; SAR(10 g) = 0.226 mW/g
Maximum value of SAR (measured) = 0.402 mW/g

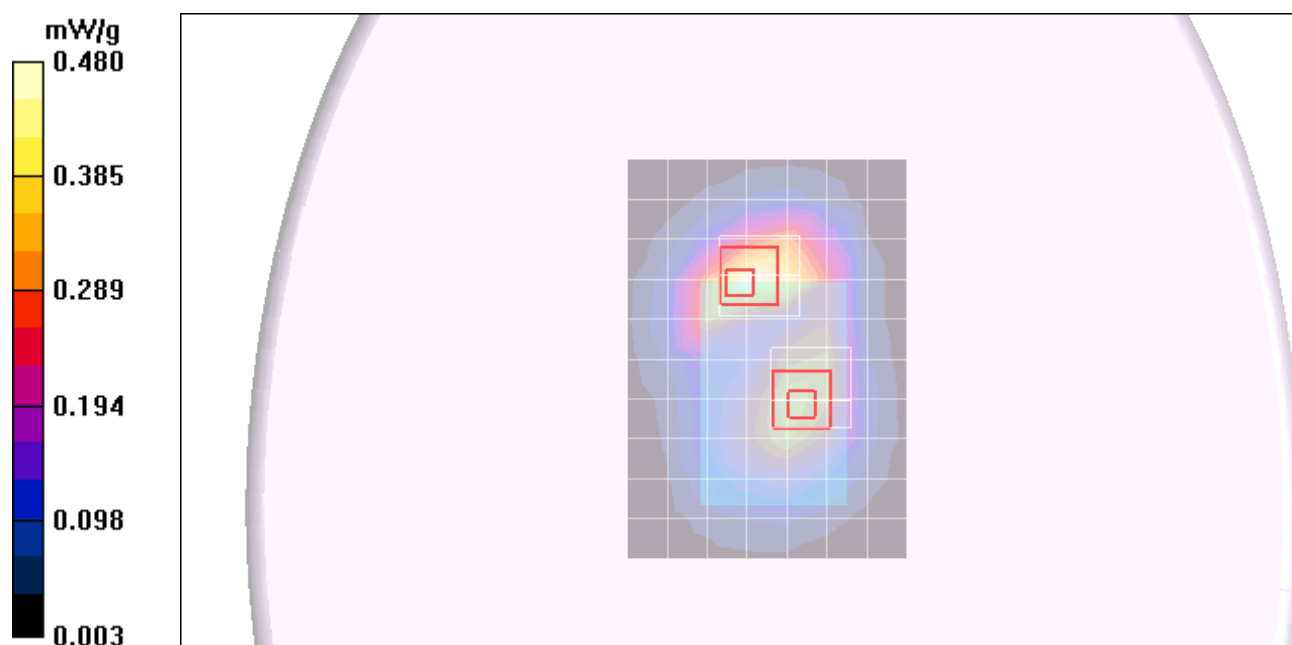

Test Laboratory: Compliance Certification Services

PCS 1900_Body_3 slot

DUT: Palm; Type: N/A; Serial: N/A

Communication System: PCS Band; Frequency: 1880 MHz; Duty Cycle: 1:2.67

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 52.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(8.04, 8.04, 8.04); Calibrated: 2/23/2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 7/21/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Face up_3 slot_M-ch/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.421 mW/g

Face up_3 slot_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 16.9 V/m; Power Drift = -0.127 dB

Peak SAR (extrapolated) = 0.512 W/kg

SAR(1 g) = 0.343 mW/g; SAR(10 g) = 0.214 mW/g

Maximum value of SAR (measured) = 0.401 mW/g


Face up_3 slot_M-ch/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 16.9 V/m; Power Drift = -0.127 dB

Peak SAR (extrapolated) = 0.485 W/kg

SAR(1 g) = 0.308 mW/g; SAR(10 g) = 0.205 mW/g

Maximum value of SAR (measured) = 0.371 mW/g

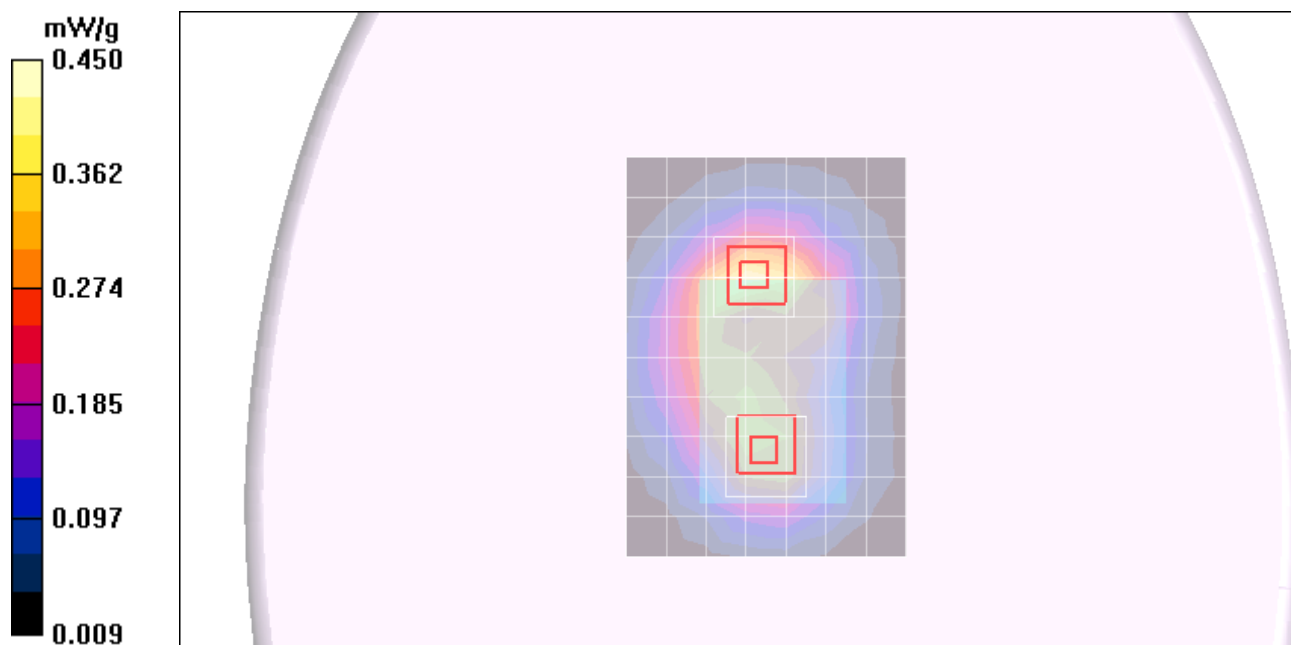

Test Laboratory: Compliance Certification Services

PCS 1900_Body_3 slot

DUT: Palm; Type: N/A; Serial: N/A

Communication System: PCS Band; Frequency: 1880 MHz; Duty Cycle: 1:2.67

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 52.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(8.04, 8.04, 8.04); Calibrated: 2/23/2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 7/21/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Face down_3 slot_M-ch/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.765 mW/g

Face down_3 slot_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 22.6 V/m; Power Drift = -0.128 dB

Peak SAR (extrapolated) = 0.944 W/kg

SAR(1 g) = 0.599 mW/g; SAR(10 g) = 0.360 mW/g

Maximum value of SAR (measured) = 0.714 mW/g


Face down_3 slot_M-ch/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 22.6 V/m; Power Drift = -0.128 dB

Peak SAR (extrapolated) = 0.681 W/kg

SAR(1 g) = 0.463 mW/g; SAR(10 g) = 0.299 mW/g

Maximum value of SAR (measured) = 0.543 mW/g

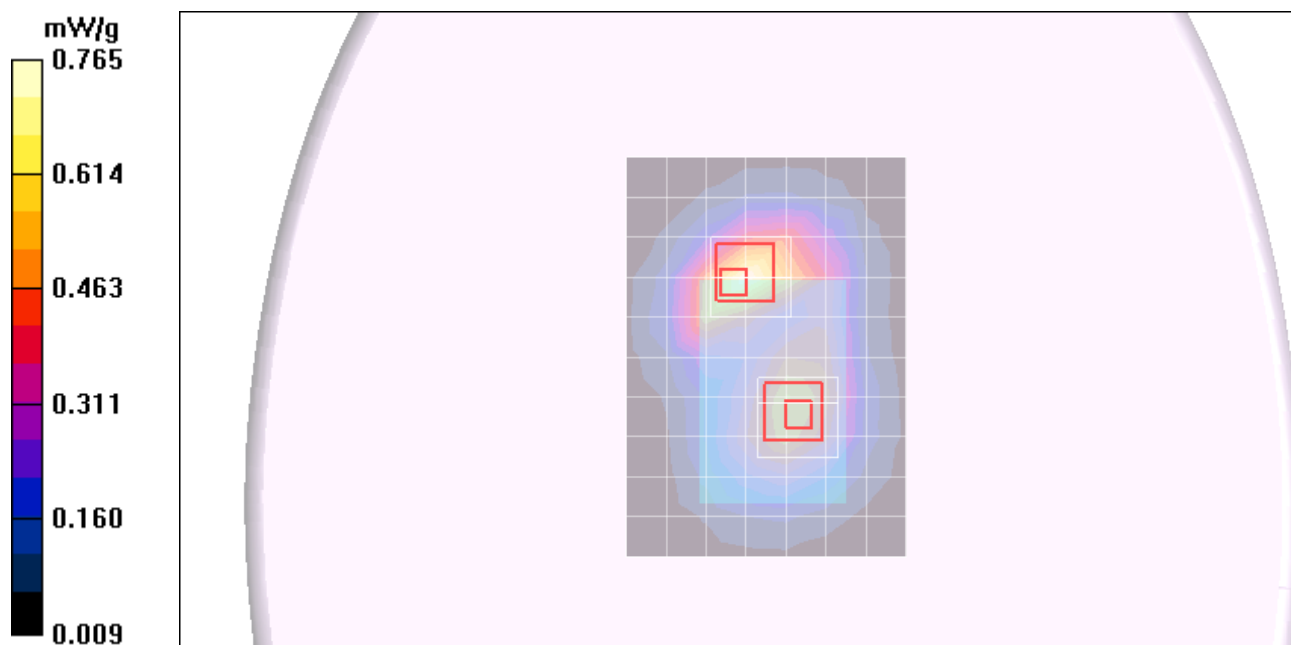


Test Laboratory: Compliance Certification Services

PCS 1900_Body_3 slot

DUT: Apple; Type: NA; Serial: NA

Communication System: PCS Band; Frequency: 1880 MHz; Duty Cycle: 1:2.67

Face down_3 slot_M-ch/Z Scan (1x1x34): Measurement grid: dx=20mm, dy=20mm, dz=3mm
Maximum value of SAR (measured) = 0.338 mW/g

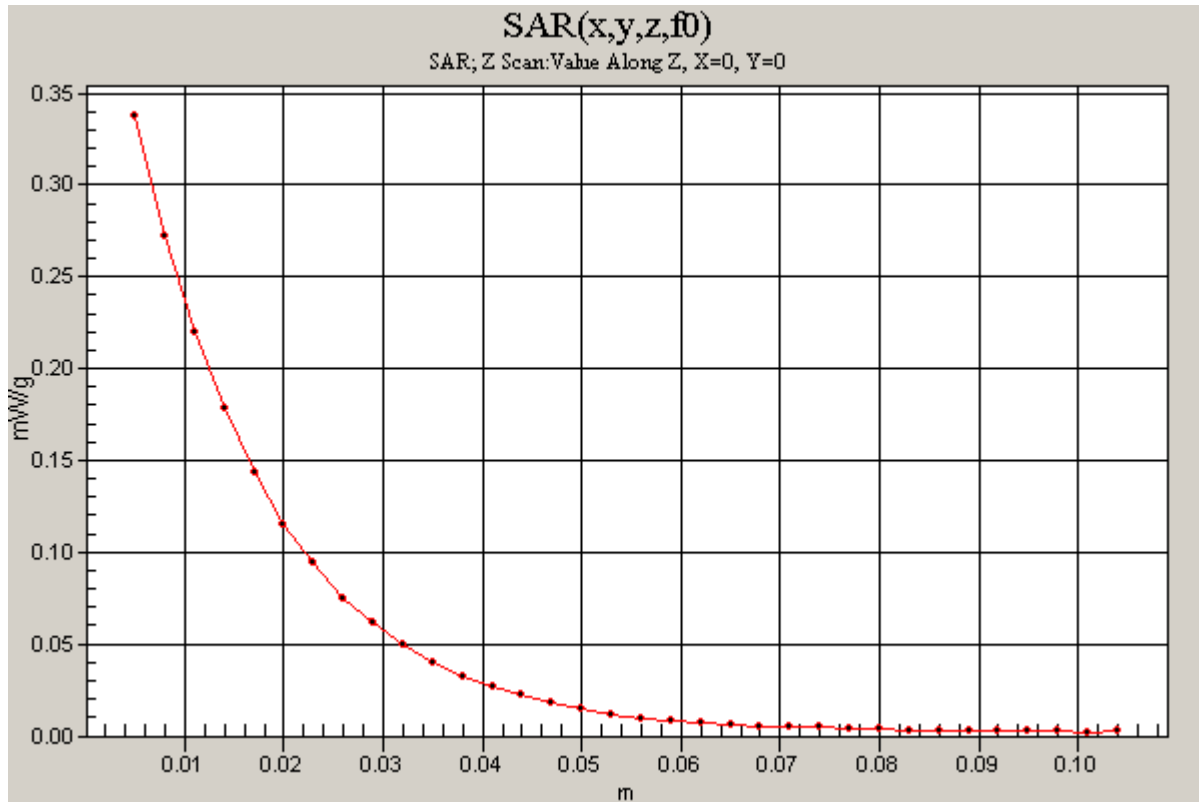

Test Laboratory: Compliance Certification Services

PCS 1900_Body_3 slot

DUT: Palm; Type: N/A; Serial: N/A

Communication System: PCS Band; Frequency: 1880 MHz; Duty Cycle: 1:2.67

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 52.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(8.04, 8.04, 8.04); Calibrated: 2/23/2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 7/21/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Face down_3 slot_M-ch w/headset/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.730 mW/g

Face down_3 slot_M-ch w/headset/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 22.1 V/m; Power Drift = -0.185 dB
Peak SAR (extrapolated) = 0.929 W/kg
SAR(1 g) = 0.588 mW/g; SAR(10 g) = 0.347 mW/g
Maximum value of SAR (measured) = 0.702 mW/g

Face down_3 slot_M-ch w/headset/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 22.1 V/m; Power Drift = -0.185 dB
Peak SAR (extrapolated) = 0.647 W/kg
SAR(1 g) = 0.444 mW/g; SAR(10 g) = 0.291 mW/g
Maximum value of SAR (measured) = 0.518 mW/g

